

FCC RADIO TEST REPORT

Applicant..... : Shen Zhen Shi Mi Ya Xin Xi Ji Shu You Xian Gong Si

Address..... : Room 2212 Building A, Huihai Square Chuangye RD, Long Hua New
District, Shenzhen, Guang Dong Province, China

Manufacturer..... : Shenzhen Jsound Technologies Co., Limited

Address..... : F6, Building 13 Futing Industrial Zone, Zhucun, Guanlan, Bao' an,
Shenzhen, Guangdong, P.R. China

Factory..... : Shenzhen Jsound Technologies Co., Limited

Address..... : F6, Building 13 Futing Industrial Zone, Zhucun, Guanlan, Bao' an,
Shenzhen, Guangdong, P.R. China

Product Name..... : Wireless Speaker

Brand Name..... : Miatone, Thonass

Model No. : MF01, Drum, Q08, QBOX, MTQ08S, QBOX PRO, MT038, MEGABOX,
MF02, LUPO, RUSH S, RUSH M, RUSH PRO, Q12 PRO, Q12, BOOMBOX,
BOOMBOX PRO (For the model difference refer to section 2)

FCC ID..... : 2AWG3-DMF01


Measurement Standard..... : 47 CFR FCC Part 15, Subpart C (Section 15.247)

Receipt Date of Samples..... : March 29, 2022

Date of Tested..... : March 29, 2022 to April 06, 2022


Date of Report..... : May 13, 2022

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.



Prepared by

Jenny Liu / Project Engineer

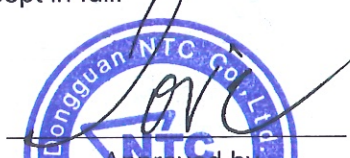

Approved by

Iori Fan / Authorized Signatory

Table of Contents

1. Summary of Test Result.....	4
2. General Description of EUT	5
3. Test Channels and Modes Detail	8
4. Configuration of EUT	8
5. Modification of EUT.....	8
6. Description of Support Device.....	9
7. Test Facility and Location	10
8. Applicable Standards and References	11
9. Deviations and Abnormalities from Standard Conditions.....	11
10. Test Conditions.....	12
11. Measurement Uncertainty	13
12. Sample Calculations	14
13. Test Items and Results	15
13.1 Conducted Emissions Measurement.....	15
13.2 Radiated Spurious Emissions and Restricted Bands Measurement	16
13.3 Channel Separation test.....	26
13.4 20dB Bandwidth.....	30
13.5 Hopping Channel Number.....	34
13.6 Time of Occupancy (Dwell Time)	36
13.7 Maximum Peak Output Power.....	40
13.8 Band Edge Conducted Spurious Emission Measurement	44
13.9 Antenna Requirement	48
14. Test Equipment List	50

Revision History

Report Number	Description	Issued Date
NTC2203343FV00	Initial Issue	2022-05-13

1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§15.247(a)(1)	Channel Separation test	PASS	---
§15.247(a)(1)	20dB Bandwidth	PASS	---
§15.247(a)(1)(iii)	Hopping Channel Number	PASS	---
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	---
§15.247(b)	Max Peak output Power test	PASS	---
§15.247(d)	Band edge test	PASS	---
§15.207 (a)	AC Power Conducted Emission	PASS	---
§15.247(d), §15.209, §15.205	Radiated Emission	PASS	---
§15.203	Antenna Requirement	PASS	---
§15.247(d)	Conducted Spurious Emission	PASS	---

2. General Description of EUT

Product Information	
Product name:	Wireless Speaker
Main Model Name:	MF01
Additional Model Name:	Drum, Q08, QBOX, MTQ08S, QBOX PRO, MT038, MEGABOX, MF02, LUPO, RUSH S, RUSH M, RUSH PRO, Q12 PRO, Q12, BOOMBOX, BOOMBOX PRO
Model Difference:	These models have the same circuit schematic, construction, PCB Layout and critical components. The difference is model number only due to trading purpose.
S/N:	N/A
Brand Name	Miatone, Thonass
Hardware version:	H.W. MF01-V1.0
Software version:	S.W. MF01-V1.0
Rating:	DC 3.7V come from Internal Battery DC 5V come from Type-C Port
Classification:	Class B
Typical arrangement:	Table-top
I/O Port:	Refer to the user manual
Accessories Information	
Adapter:	N/A
Cable:	N/A
Other:	N/A
Additional information	
Note:	According to the model difference, all tests were performed on model MF01.
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

Technical Specification	
Bluetooth Version:	V5.3
Frequency Range:	2402-2480MHz
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channel:	79 (refer to following channel list for details)
Channel Space:	1MHz
Antenna Type:	PCB Antenna
Antenna Gain:	1.3 dBi (Declared by manufacturer)
Note:	The EUT does not support Bluetooth Low Energy feature in accordance with the manufacturer declaration.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461	---	---

3. Test Channels and Modes Detail

No.	Mode	Channel	Frequency (MHz)	Modulation
1	TX	Hopping	2402-2480	GFSK/ π /4-DQPSK /8DPSK
2	TX	Low	2402	GFSK/ π /4-DQPSK /8DPSK
3	TX	Mid	2441	GFSK/ π /4-DQPSK /8DPSK
4	TX	High	2480	GFSK/ π /4-DQPSK /8DPSK
5	BT Link	---	---	---

Note: TX mode means that the EUT was programmed to be in continuously transmitting mode.

4. Configuration of EUT

TX Mode



5. Modification of EUT

No modifications are made to the EUT during all test items.

6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
1.	Laptop	Lenovo	02213DC	0A33012	Power cord, 1.8m, unshielded	---
2.	Power supply of the Laptop	Delta	92P1154	N/A	---	---
3.	Test fixture	---	---	---	----	Provided by manufacturer

No.	Test Software	Modulation	Power Setting
1.	FCC_assist_1.0.2.2	GFSK	10
2.		$\pi/4$ -DQPSK	10
3.		8DPSK	10

7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	The Laboratory has been assessed and proved to be in compliance with CNAS/CL01 Listed by CNAS, August 13, 2018 The Certificate Registration Number is L5795. The Certificate is valid until August 13, 2024 The Laboratory has been assessed and proved to be in compliance with ISO17025 Listed by A2LA, November 01, 2017 The Certificate Registration Number is 4429.01 The Certificate is valid until December 31, 2023 Listed by FCC, November 06, 2017 Test Firm Registration Number: 907417 Listed by Industry Canada, June 08, 2017 The Certificate Registration Number. Is 46405-9743A
Test Site Location	:	Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China

8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Test Standards:

47 CFR Part 15, Subpart C, 15.247

ANSI C63.10-2013

References Test Guidance:

DTS KDB 558074 D01 15.247 Meas Guidance v05r02

Remark:

The EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

10. Test Conditions

No.	Test Item	Test Mode	Test Voltage	Tested by	Remarks
1.	Channel Separation test	1	AC 120V 60Hz	Sean	See note ¹
2.	20dB Bandwidth	2-4	AC 120V 60Hz	Sean	See note ¹
3.	Hopping Channel Number	1	AC 120V 60Hz	Sean	See note ¹
4.	Time of Occupancy (Dwell Time)	1	AC 120V 60Hz	Sean	See note ¹
5.	Max Peak output Power test	2-4	AC 120V 60Hz	Sean	See note ¹
6.	Band edge test	1-4	AC 120V 60Hz	Sean	See note ¹
7.	AC Power Conducted Emission	5	AC 120V 60Hz	Sean	See note ¹
8.	Radiated Emission	1-5	AC 120V 60Hz	Sean	See note ¹
9.	Antenna Requirement	---	---	---	---
10.	Conducted Spurious Emission	1-4	AC 120V 60Hz	Sean	See note ³

Note:

1. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35℃, 30~70%, 86~106kPa
2. As the EUT can be operated multiple positions, all X,Y,Z axis were considered during the test and only the worst case X was recorded.
3. AC 120V 60Hz is come from the Adapter.

11. Measurement Uncertainty

No.	Test Item	Frequency	Uncertainty	Remarks
1.	Conducted Emission	150KHz ~ 30MHz	±2.52 dB	---
1.	Radiated Emission Test	9kHz ~ 30MHz	±2.60 dB	
		30MHz ~ 1GHz	±4.68 dB	---
		1GHz ~ 18GHz	±5.14 dB	---
		18GHz ~ 40GHz	±5.14 dB	---
2.	RF Conducted Test	10Hz ~ 40GHz	±1.06 dB	---

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The measurement uncertainty levels above are estimated and calculated according to CISPR 16-4-2.
3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

12. Sample Calculations

Conducted Emission						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.1900	30.10	10.60	40.70	79.00	-38.30	QP
Where, Freq. = Emission frequency in MHz Reading Level = Spectrum Analyzer/Receiver Reading Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation Measurement = Reading + Corrector Factor Limit = Limit stated in standard Margin = Measurement - Limit Detector = Reading for Quasi-Peak / Average / Peak						

Radiated Spurious Emissions and Restricted Bands						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
60.0700	45.88	-18.38	27.50	49.00	-21.50	QP
Where, Freq. = Emission frequency in MHz Reading Level = Spectrum Analyzer/Receiver Reading Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier Measurement = Reading + Corrector Factor Limit = Limit stated in standard Over = Margin, which calculated by Measurement - Limit Detector = Reading for Quasi-Peak / Average / Peak						

Note: For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

13. Test Items and Results

13.1 Conducted Emissions Measurement


LIMIT

According to the requirements of FCC PART 15.207, the limits are as follows:

Frequency (MHz)	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Note: 1. If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.
2. The lower limit shall apply at the transition frequencies.
3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

BLOCK DIAGRAM OF TEST SETUP

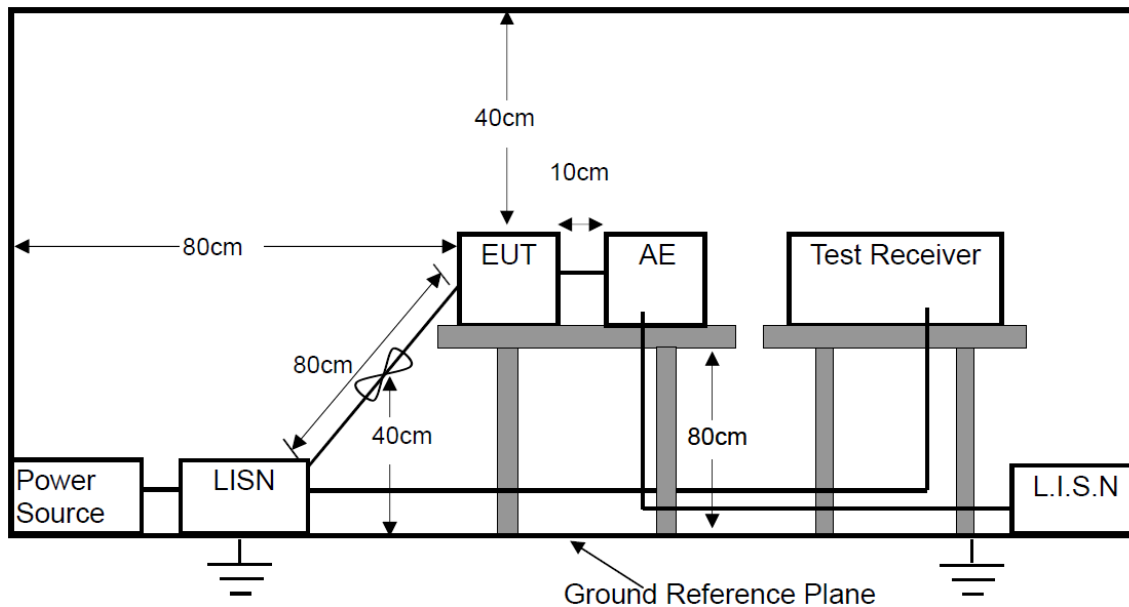

TEST PROCEDURES

- a. The EUT was placed on a wooden table 0.8m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. All I/O cables and support devices were positioned as per ANSI C63.10.
- c. Connect mains power port of the EUT to a line impedance stabilization network (LISN).
- d. Connect all support devices to the other LISN and AAN, if needed.
- e. Scan the frequency range from 150KHz to 30MHz at both sides of AC line for maximum conducted interference checking and record the test data.

TEST RESULTS:

PASS

Please refer to the following pages

M/N: MF01

Testing Voltage: AC 120V 60Hz

Phase: L1


Detector: QP & AVG

Test Mode: 5

Conducted Emission Measurement

Date: 2022/4/1

Time: 9:23:52

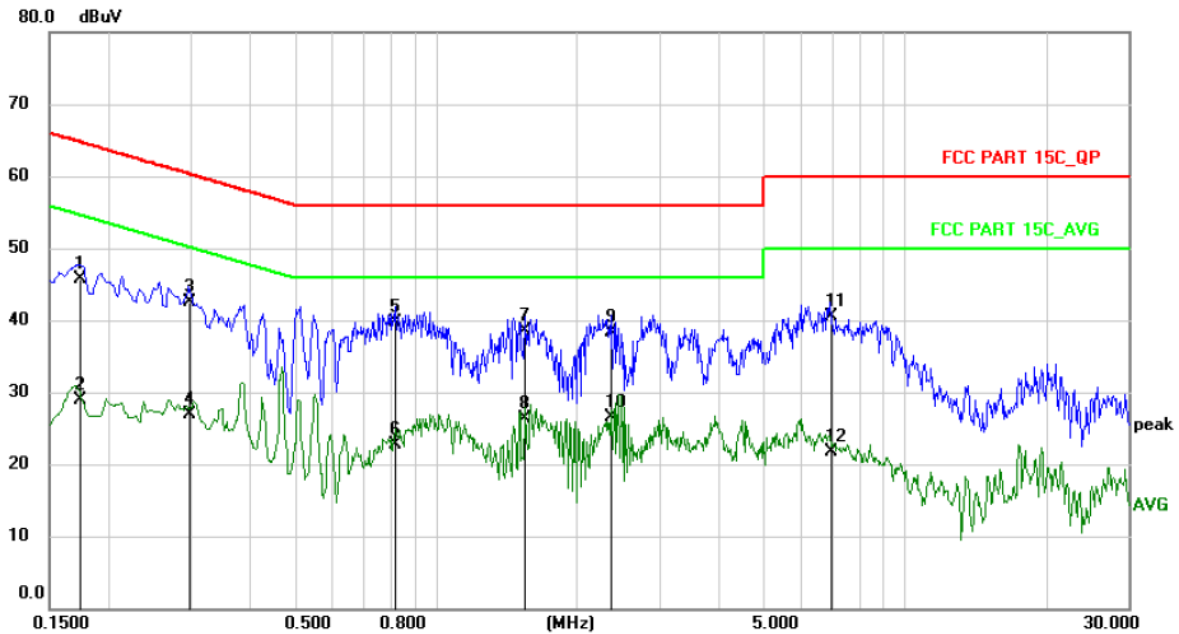

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1740	35.20	10.60	45.80	64.77	-18.97	QP	
2	0.1740	18.30	10.60	28.90	54.77	-25.87	AVG	
3	0.2980	32.00	10.60	42.60	60.30	-17.70	QP	
4	0.2980	16.30	10.60	26.90	50.30	-23.40	AVG	
5 *	0.8180	29.13	10.67	39.80	56.00	-16.20	QP	
6	0.8180	12.13	10.67	22.80	46.00	-23.20	AVG	
7	1.5500	27.80	10.70	38.50	56.00	-17.50	QP	
8	1.5500	15.60	10.70	26.30	46.00	-19.70	AVG	
9	2.3660	27.70	10.70	38.40	56.00	-17.60	QP	
10	2.3660	15.80	10.70	26.50	46.00	-19.50	AVG	
11	6.9219	29.88	10.72	40.60	60.00	-19.40	QP	
12	6.9219	11.08	10.72	21.80	50.00	-28.20	AVG	

M/N: MF01

Testing Voltage: AC 120V 60Hz

Phase: N


Detector: QP & AVG

Test Mode: 5

Conducted Emission Measurement

Date: 2022/4/1

Time: 9:29:19

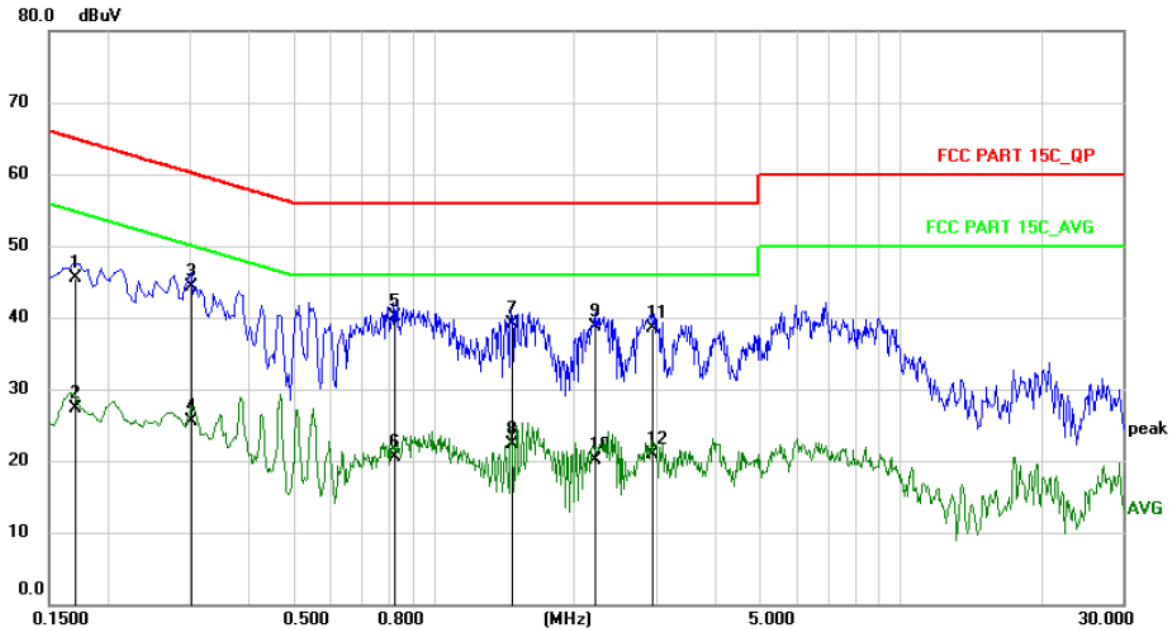

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1700	35.00	10.60	45.60	64.96	-19.36	QP	
2	0.1700	16.80	10.60	27.40	54.96	-27.56	AVG	
3 *	0.3019	33.70	10.60	44.30	60.19	-15.89	QP	
4	0.3019	14.90	10.60	25.50	50.19	-24.69	AVG	
5	0.8218	29.43	10.67	40.10	56.00	-15.90	QP	
6	0.8218	9.83	10.67	20.50	46.00	-25.50	AVG	
7	1.4700	28.50	10.70	39.20	56.00	-16.80	QP	
8	1.4700	11.60	10.70	22.30	46.00	-23.70	AVG	
9	2.2219	28.00	10.70	38.70	56.00	-17.30	QP	
10	2.2219	9.50	10.70	20.20	46.00	-25.80	AVG	
11	2.9340	27.89	10.71	38.60	56.00	-17.40	QP	
12	2.9340	10.19	10.71	20.90	46.00	-25.10	AVG	

13.2 Radiated Spurious Emissions and Restricted Bands Measurement


LIMIT

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500


- Remark:
- (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
 - (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

BLOCK DIAGRAM OF TEST SETUP


For Radiated Emission below 30MHz

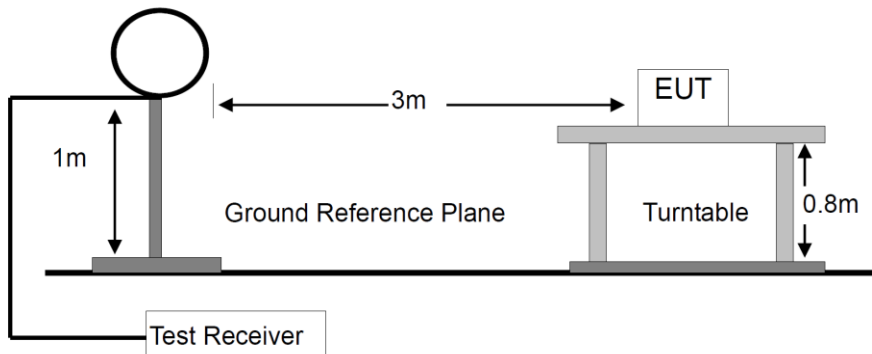

For Radiated Emission 30-1000MHz

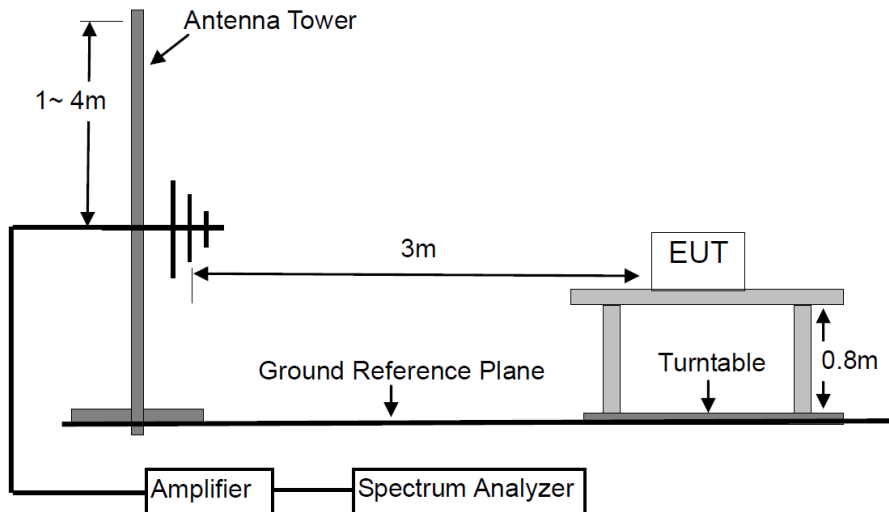

For Radiated Emission Above 1000MHz.

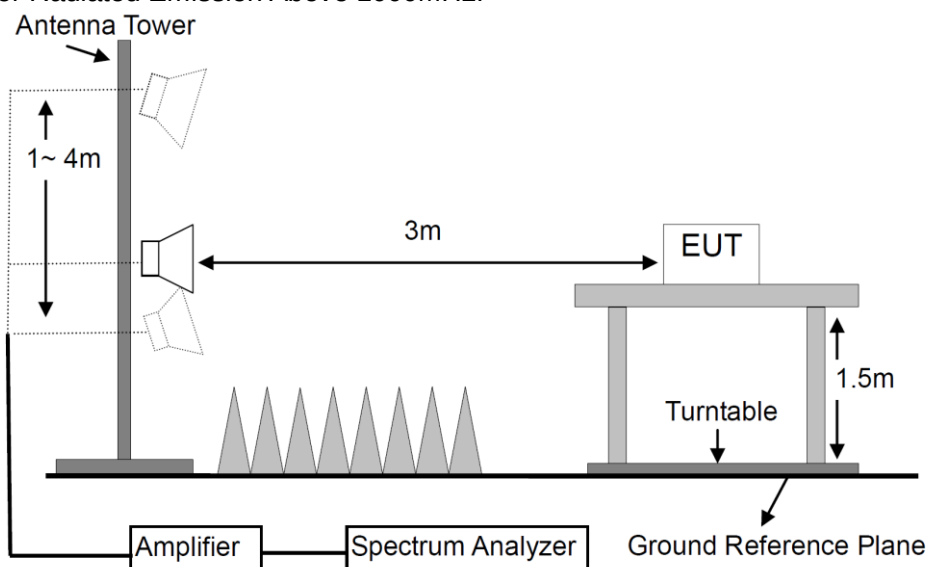

TEST PROCEDURES

- a. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:

The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

- g. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X, Y, Z axis and packet type.

The worst case was found when the EUT was positioned on X axis for radiated emission.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Detector	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

TEST RESULTS

PASS


Please refer to the following pages.

M/N: MF01	Testing Voltage: AC 120V 60Hz
Polarization: Horizontal	Detector: QP
Test Mode: 5 (the worst case)	Distance: 3m

Radiated Emission Measurement

Date: 2022/4/4

Time: 16:39:30

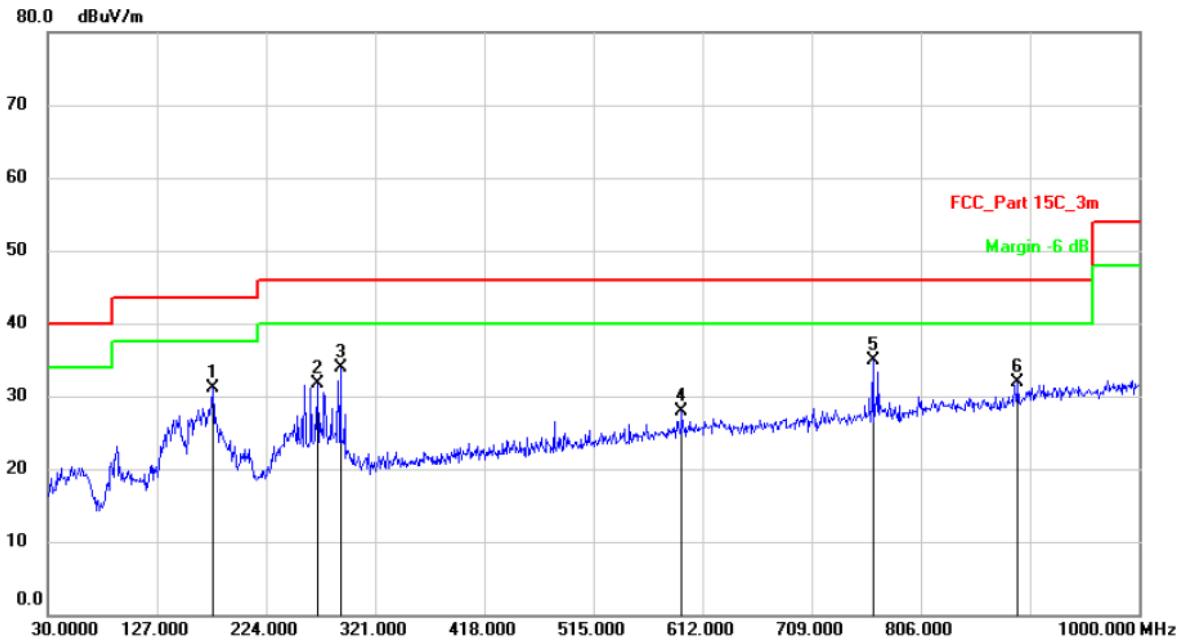

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		176.4700	40.74	-9.54	31.20	43.50	-12.30	QP	
2		269.5900	37.78	-6.02	31.76	46.00	-14.24	QP	
3		289.9600	39.69	-5.74	33.95	46.00	-12.05	QP	
4		593.5700	27.42	0.50	27.92	46.00	-18.08	QP	
5	*	763.3200	31.55	3.28	34.83	46.00	-11.17	QP	
6		892.3300	26.26	5.71	31.97	46.00	-14.03	QP	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: MF01	Testing Voltage: AC 120V 60Hz
Polarization: Vertical	Detector: QP
Test Mode: 5 (the worst case)	Distance: 3m

Radiated Emission Measurement

Date: 2022/4/4

Time: 16:33:55

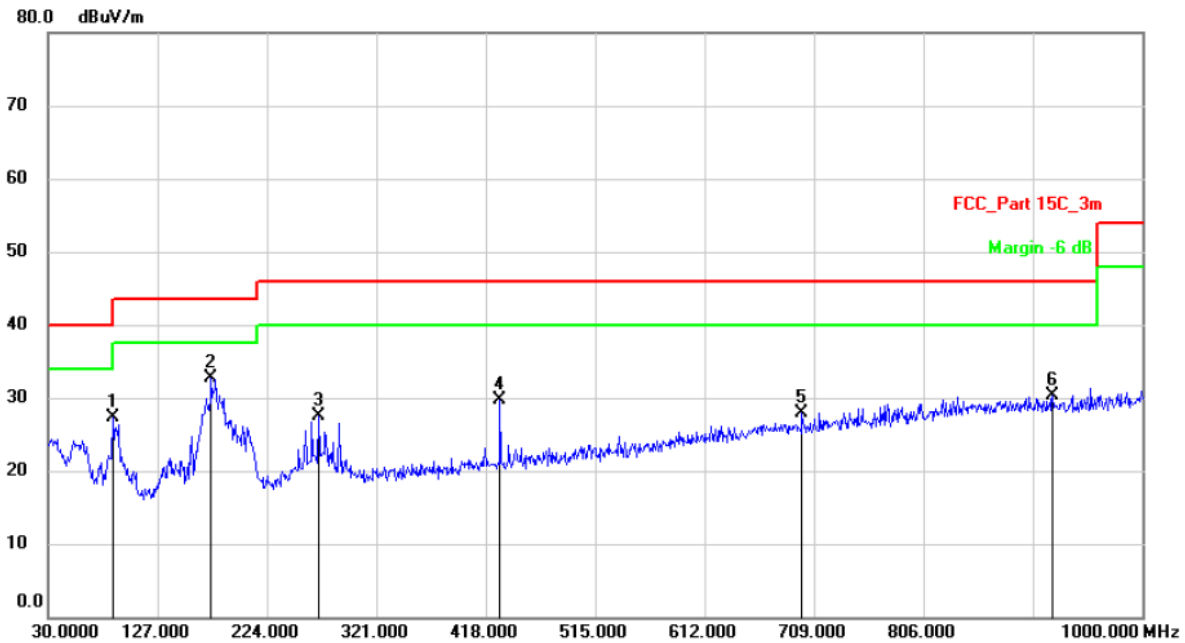

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		87.2300	37.96	-10.63	27.33	40.00	-12.67	QP	
2	*	174.5300	42.65	-9.89	32.76	43.50	-10.74	QP	
3		269.5900	34.60	-7.02	27.58	46.00	-18.42	QP	
4		430.6100	33.47	-3.85	29.62	46.00	-16.38	QP	
5		698.3300	25.78	2.13	27.91	46.00	-18.09	QP	
6		920.4600	25.32	4.99	30.31	46.00	-15.69	QP	

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Modulation: 8DPSK (the worst case)				Test Result: PASS			Test frequency range: 1-25GHz			
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV/m)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4804	H	51.01	36.11	6.30	57.31	42.41	74.00	54.00	-16.69	-11.59
7206	H	48.49	35.99	10.44	58.93	46.43	74.00	54.00	-15.07	-7.57

4804	V	48.19	35.99	6.30	54.49	42.29	74.00	54.00	-19.51	-11.71
7206	V	48.83	36.02	10.44	59.27	46.46	74.00	54.00	-14.73	-7.54

Operation Mode: TX Mode (Mid)										
4882	H	51.22	36.88	6.60	57.82	43.48	74.00	54.00	-16.18	-10.52
7323	H	48.57	36.27	10.55	59.12	46.82	74.00	54.00	-14.88	-7.18

4882	V	49.18	37.15	6.60	55.78	43.75	74.00	54.00	-18.22	-10.25
7323	V	48.42	36.00	10.55	58.97	46.55	74.00	54.00	-15.03	-7.45

Operation Mode: TX Mode (High)										
4960	H	49.84	37.36	6.89	56.73	44.25	74.00	54.00	-17.27	-9.75
7440	H	48.38	36.02	10.60	58.98	46.62	74.00	54.00	-15.02	-7.38

4960	V	46.25	36.97	6.89	53.14	43.86	74.00	54.00	-20.86	-10.14
7440	V	48.11	36.33	10.60	58.71	46.93	74.00	54.00	-15.29	-7.07


Spurious Emission in restricted band										
2390.000	H	51.53	36.91	0.09	51.62	37.00	74.00	54.00	-22.38	-17.00
2390.000	V	51.12	36.87	0.09	51.21	36.96	74.00	54.00	-22.79	-17.04
2483.500	H	55.85	44.75	0.34	56.19	45.09	74.00	54.00	-17.81	-8.91
2483.500	V	55.57	43.93	0.34	55.91	44.27	74.00	54.00	-18.09	-9.73
Remark: Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits.										

13.3 Channel Separation test

LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Enable the EUT hopping function.
- Set spectrum analyzer and perform testing according to ANSI C63.10-2013 clause 7.8.2.

TEST RESULTS

PASS


Please refer to the following table.

Modulation	Channel	Frequency (MHz)	Hopping Separation Measurement (MHz)	Hopping Separation Limit (MHz)	Test Result
GFSK	Low	2402	1.002	>0.637	Pass
	Mid	2441	0.999	>0.638	Pass
	High	2480	0.999	>0.637	Pass
$\pi/4$ -DQPSK	Low	2402	0.999	>0.856	Pass
	Mid	2441	0.999	>0.856	Pass
	High	2480	0.999	>0.857	Pass
8DPSK	Low	2402	1.002	>0.866	Pass
	Mid	2441	1.002	>0.867	Pass
	High	2480	1.005	>0.867	Pass

GFSK / Low Channel



GFSK / Mid Channel

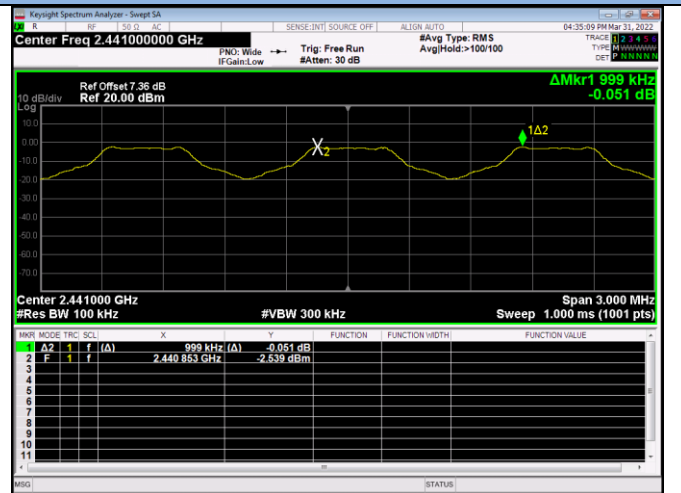


GFSK / High Channel



$\pi/4$ -DQPSK / Low Channel



$\pi/4$ -DQPSK / Mid Channel

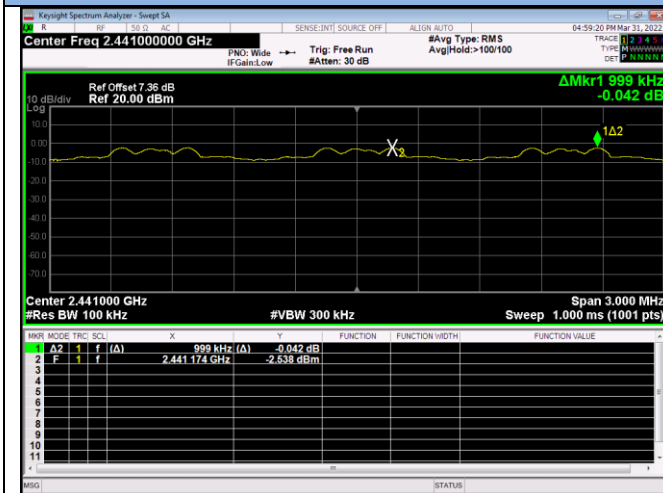

$\pi/4$ -DQPSK / High Channel






13.4 20dB Bandwidth

LIMIT

N/A

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Set spectrum analyzer and perform testing according to ANSI C63.10-2013 clause 6.9.2.


TEST RESULTS

PASS


Please refer to the following table.

Modulation	Channel	Frequency (MHz)	20dB Measurement (MHz)	Limit (MHz)	Remark
GFSK	Low	2402	0.956	---	Reporting only
	Mid	2441	0.957	---	
	High	2480	0.955	---	
$\pi/4$ -DQPSK	Low	2402	1.284	---	
	Mid	2441	1.283	---	
	High	2480	1.285	---	
8DPSK	Low	2402	1.299	---	
	Mid	2441	1.300	---	
	High	2480	1.300	---	


GFSK / Low Channel

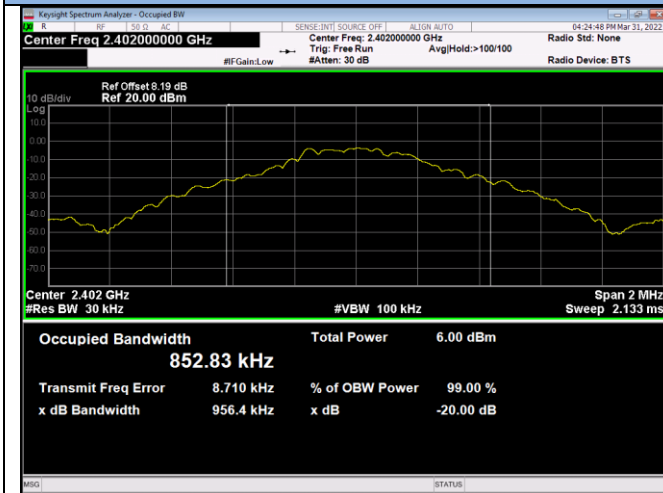


GFSK / Mid Channel

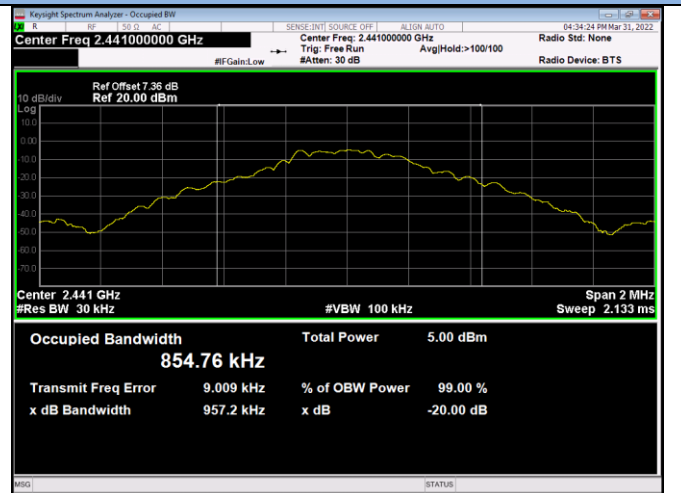


GFSK / High Channel

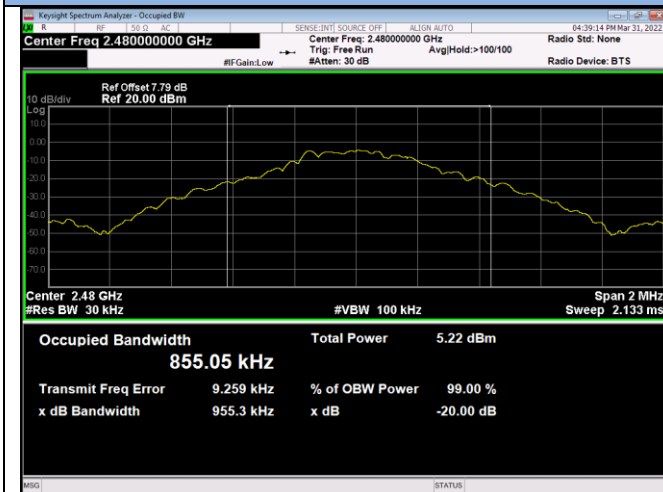


$\pi/4$ -DQPSK / Low Channel

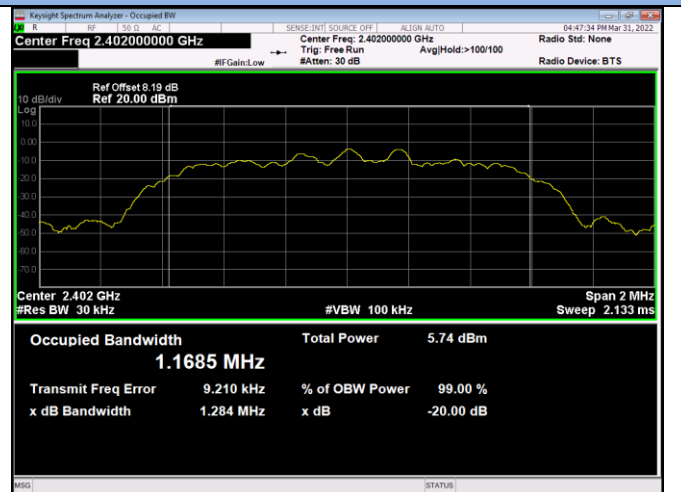


$\pi/4$ -DQPSK / Mid Channel

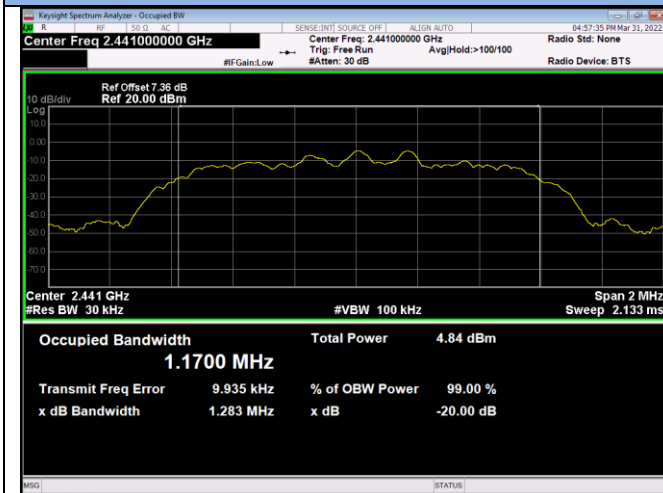

$\pi/4$ -DQPSK / High Channel

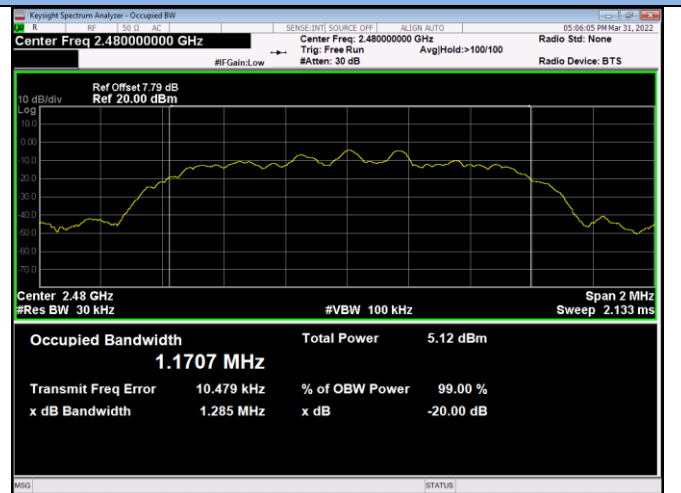

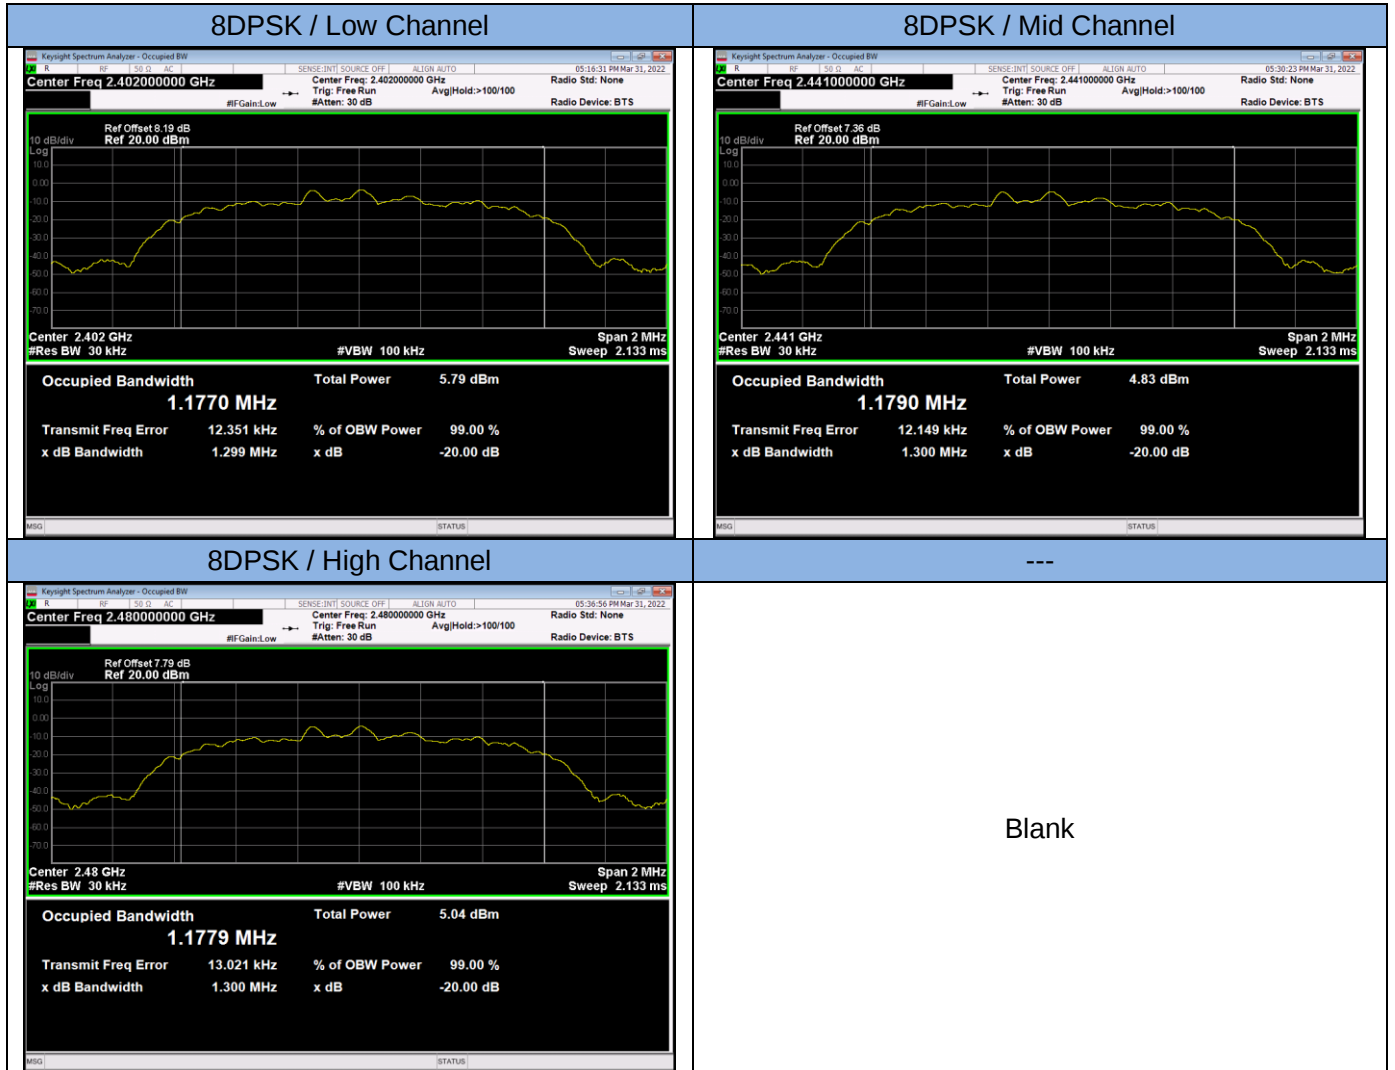


13.5 Hopping Channel Number

LIMIT

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Enable the EUT hopping function.
- Set spectrum analyzer and perform testing according to ANSI C63.10-2013 clause 7.8.3.


TEST RESULTS

PASS

Please refer to the following table.

Modulation	Number of Hopping Channels Measurement	Limit	Test Result
GFSK	79	≥ 15	PASS
$\pi/4$ -DQPSK	79	≥ 15	PASS
8DPSK	79	≥ 15	PASS

The worst case: $\pi/4$ -DQPSK

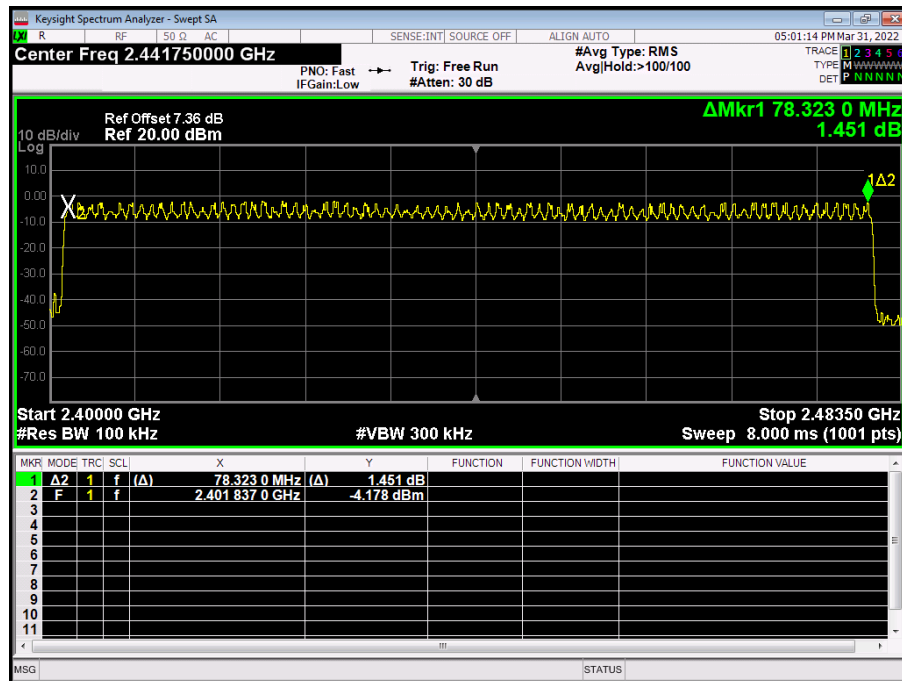


13.6 Time of Occupancy (Dwell Time)

LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Enable the EUT hopping function.
- Set spectrum analyzer and perform testing according to ANSI C63.10-2013 clause 7.8.4.


TEST RESULTS

PASS


Please refer to the following table.

Modulation	Packet	Frequency (MHz)	Dwell Time Measurement (msec)	Limit (msec)	Test Result
GFSK	DH1	2441	$0.375 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 120.00$	400	Pass
	DH3	2441	$1.635 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 261.60$	400	Pass
	DH5	2441	$2.878 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 306.99$	400	Pass
$\pi/4$ -DQPSK	2-DH1	2441	$0.385 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 123.20$	400	Pass
	2-DH3	2441	$1.640 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 262.40$	400	Pass
	2-DH5	2441	$2.885 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 307.73$	400	Pass
8DPSK	3-DH1	2441	$0.385 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 123.20$	400	Pass
	3-DH3	2441	$1.635 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 261.60$	400	Pass
	3-DH5	2441	$2.885 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 307.73$	400	Pass


GFSK / DH1

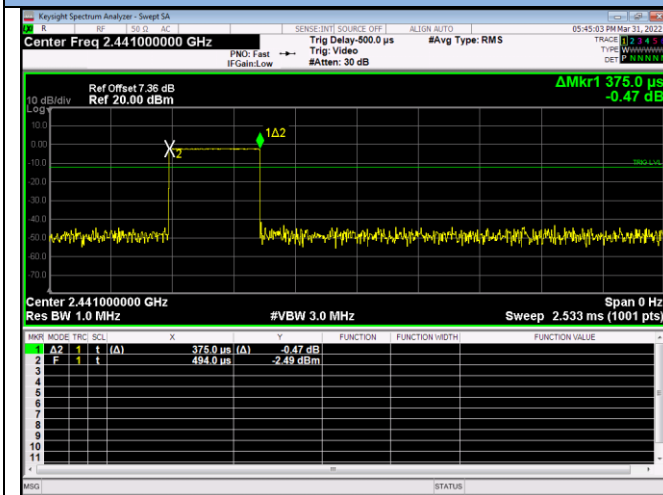


GFSK / DH3

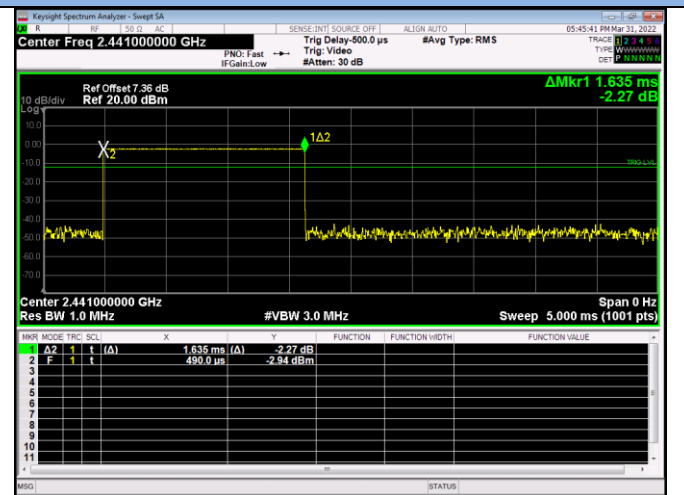


GFSK / DH5

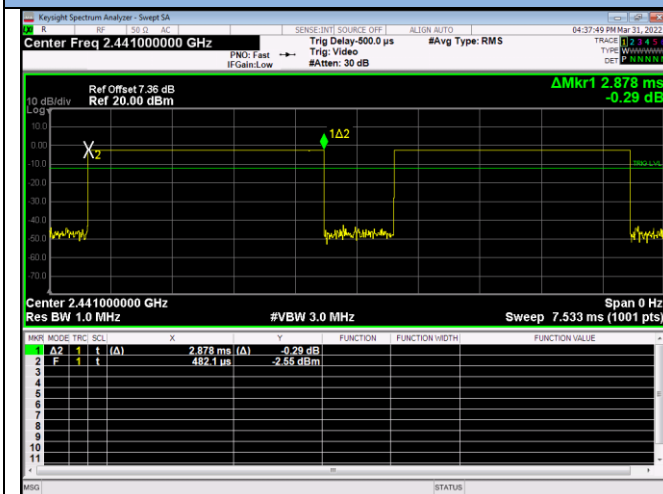


$\pi/4$ -DQPSK / 2-DH1

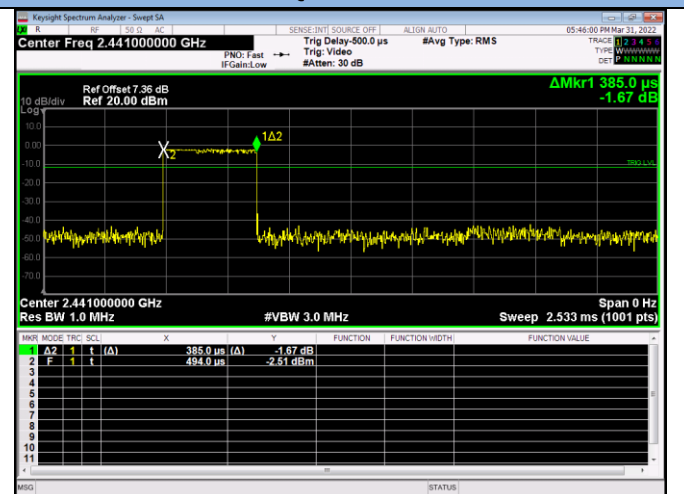


$\pi/4$ -DQPSK / 2-DH3

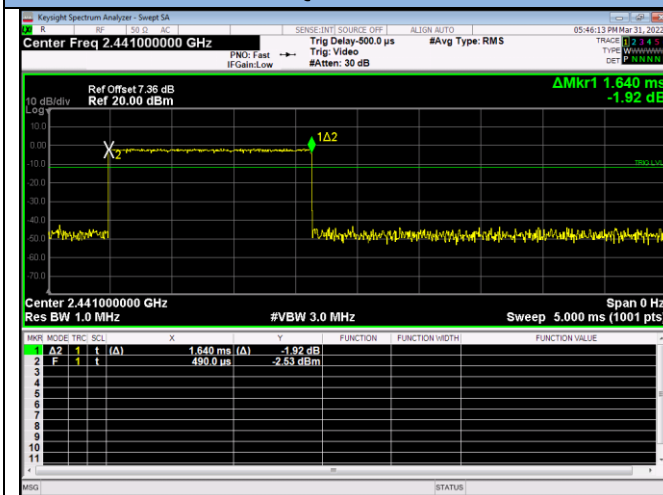


$\pi/4$ -DQPSK / 2-DH5

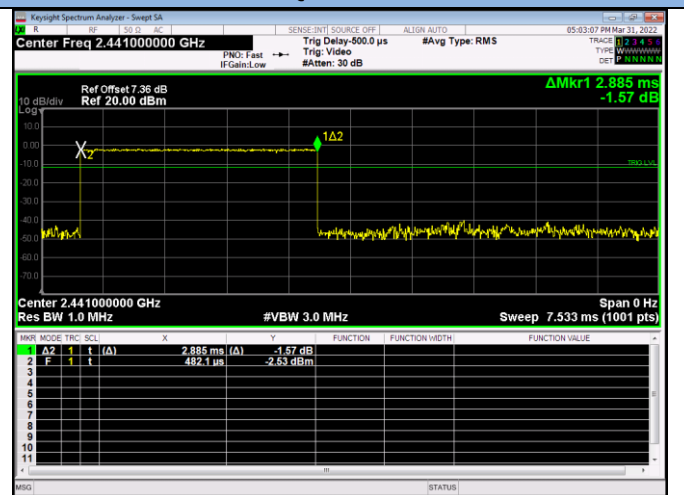


8DPSK / 3-DH1

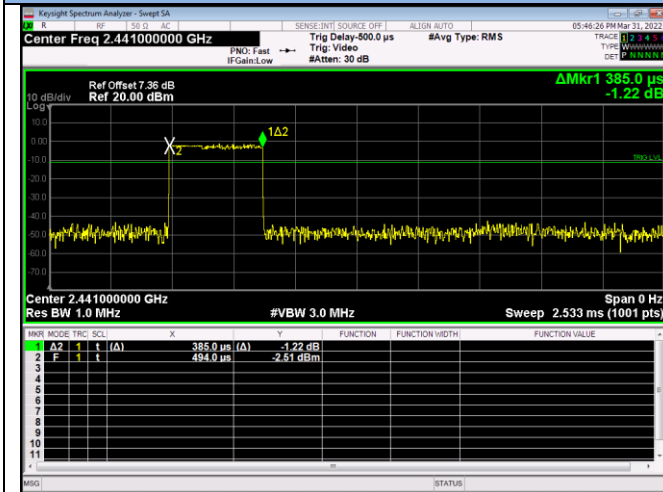

8DPSK / 3-DH3

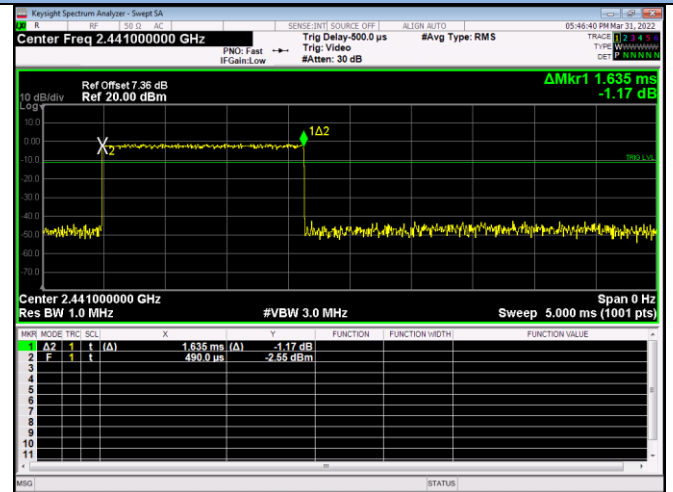

8DPSK / 3-DH5

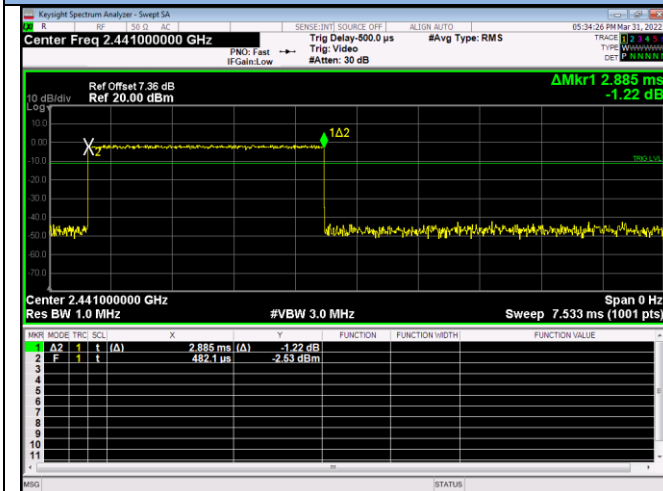


Blank

13.7 Maximum Peak Output Power

LIMIT

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Set spectrum analyzer and perform testing according to ANSI C63.10-2013 clause 7.8.5.


TEST RESULTS

PASS


Please refer to the following table.

Modulation	Frequency (MHz)	Peak Power output Measurement (dBm)	Peak Power output Measurement (mW)	Peak Power Limit (dBm)	Test Result
GFSK	2402.00	-1.360	0.73	21	Pass
	2441.00	-2.361	0.58	21	Pass
	2480.00	-2.140	0.61	21	Pass
$\pi/4$ -DQPSK	2402.00	-0.478	0.90	21	Pass
	2441.00	-1.147	0.77	21	Pass
	2480.00	-1.176	0.76	21	Pass
8DPSK	2402.00	-0.015	1.00	21	Pass
	2441.00	-1.067	0.78	21	Pass
	2480.00	-0.766	0.84	21	Pass


GFSK / Low Channel

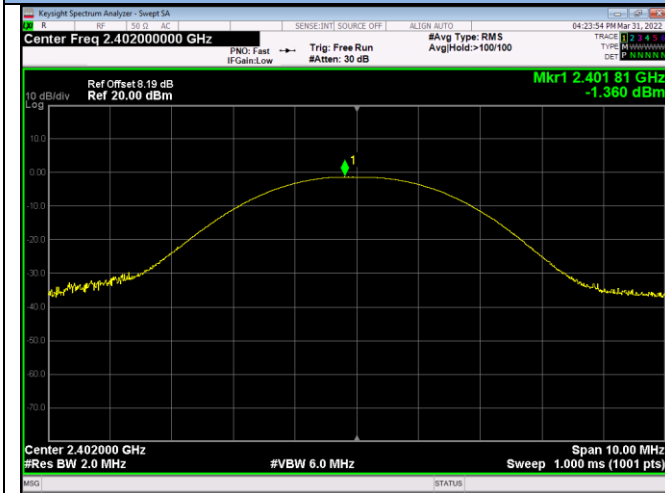


GFSK / Mid Channel

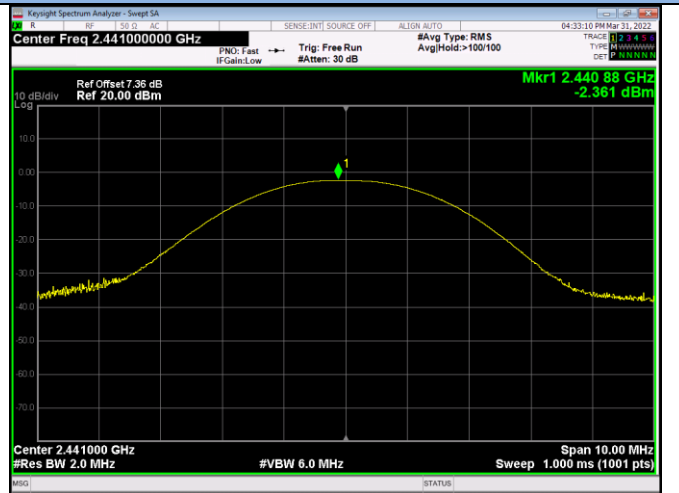


GFSK / High Channel

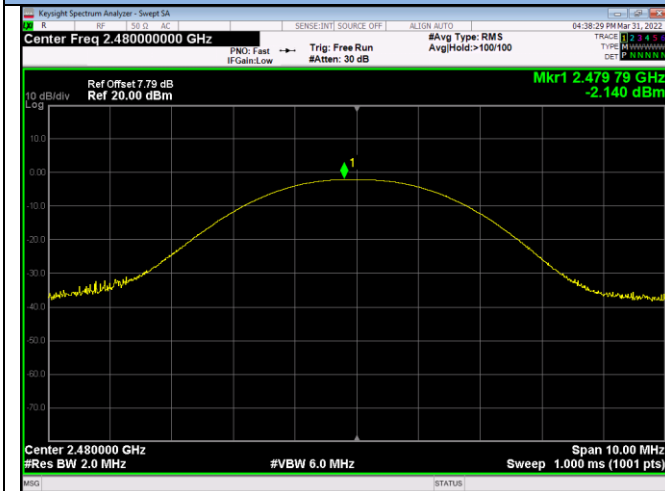


$\pi/4$ -DQPSK / Low Channel

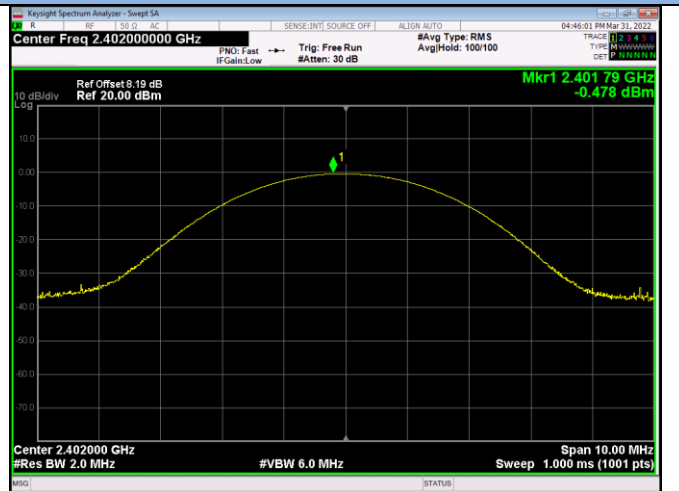


$\pi/4$ -DQPSK / Mid Channel

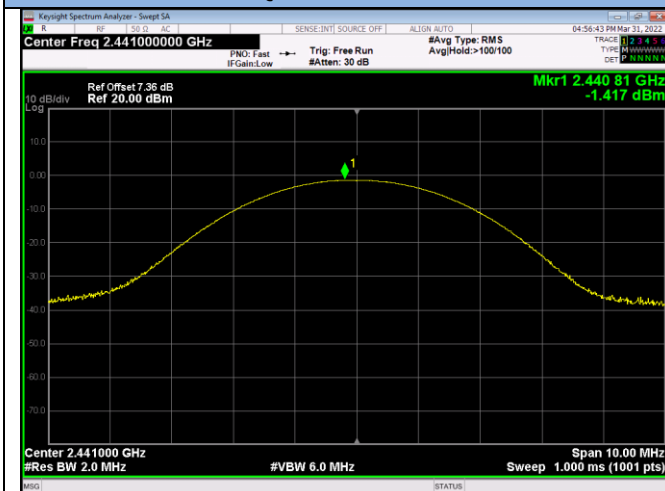

$\pi/4$ -DQPSK / High Channel

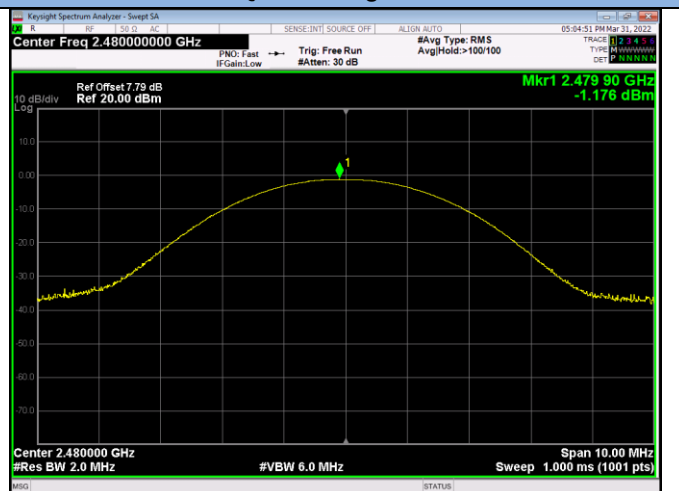

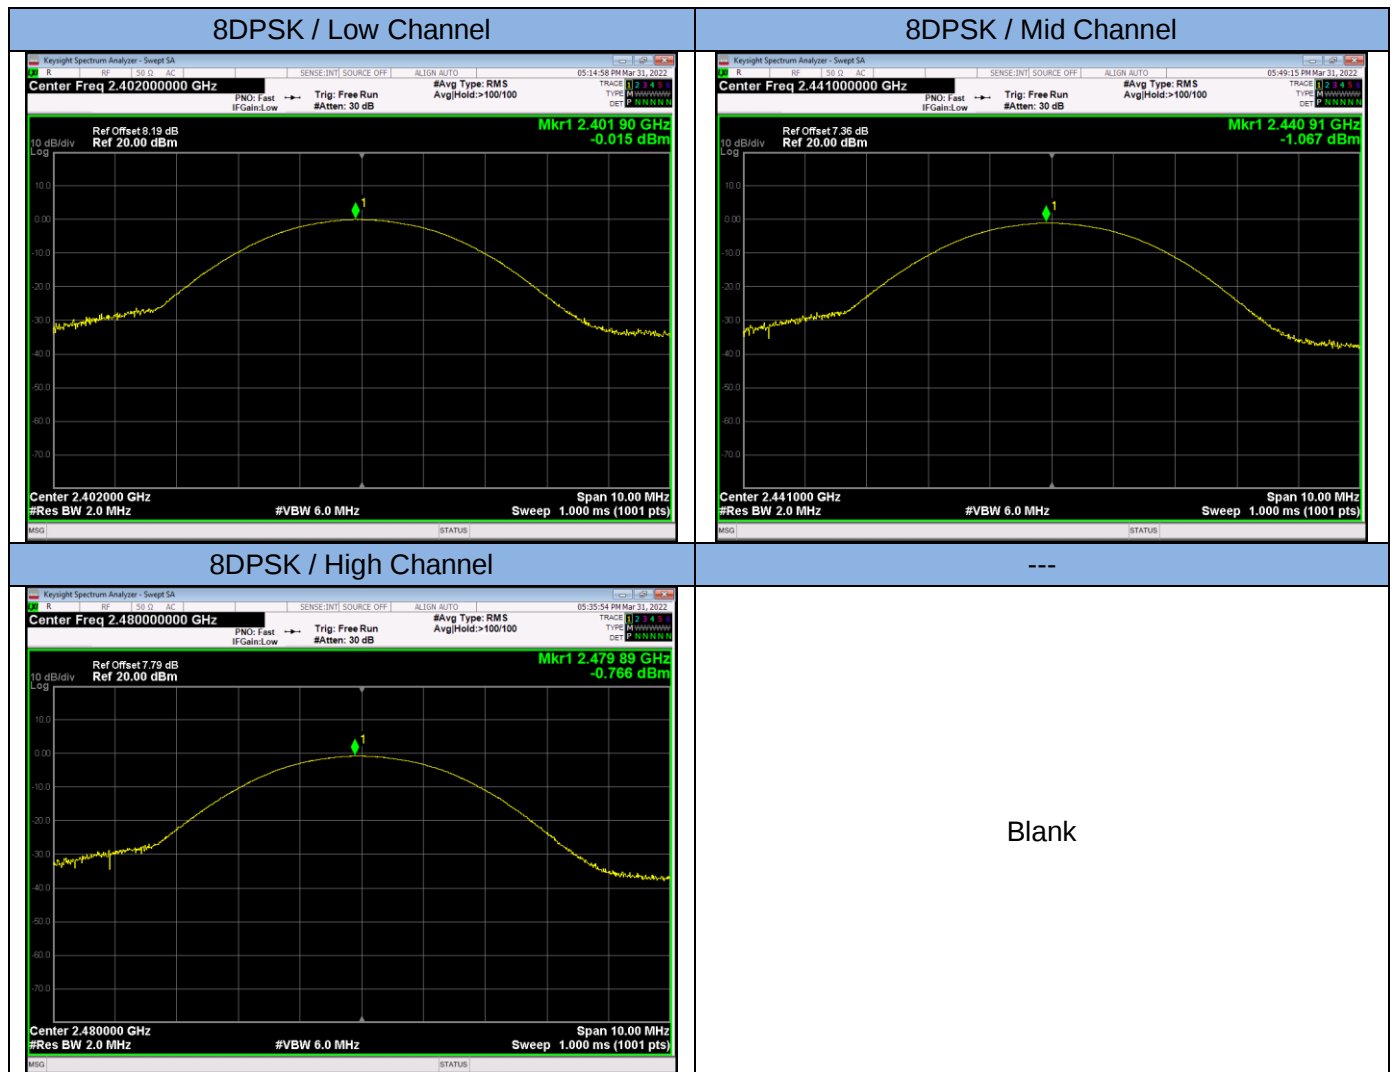


13.8 Band Edge Conducted Spurious Emission Measurement

LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Set spectrum analyzer and perform testing according to ANSI C63.10-2013 clause 7.8.6 and 6.10.
- Enable hopping function of the EUT and then repeat steps above.


TEST RESULTS

PASS


Please refer to the following test plots.

Band Edge


GFSK / Low / 2402

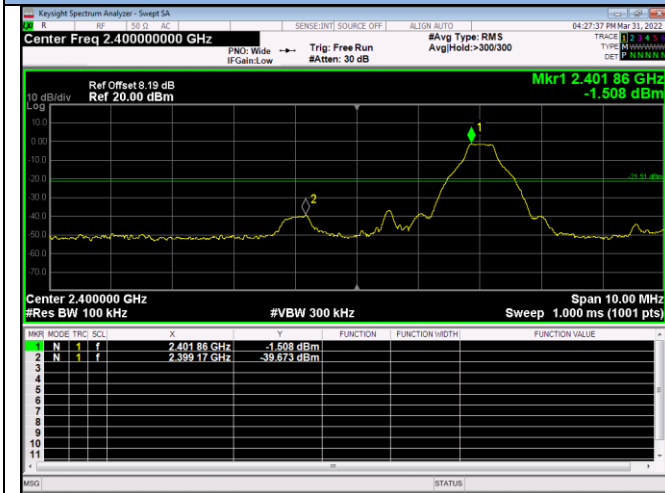


GFSK / Hopping

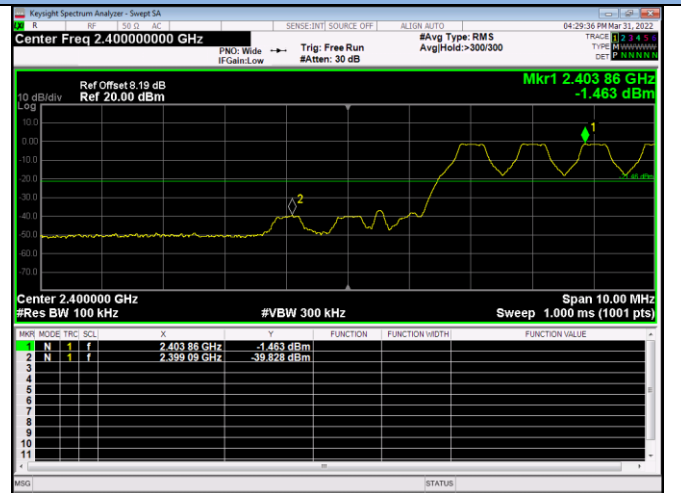


GFSK / High Channel / 2480

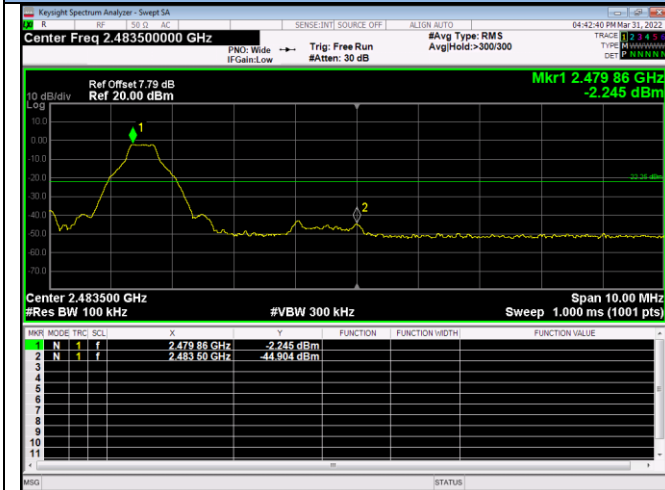


GFSK / Hopping

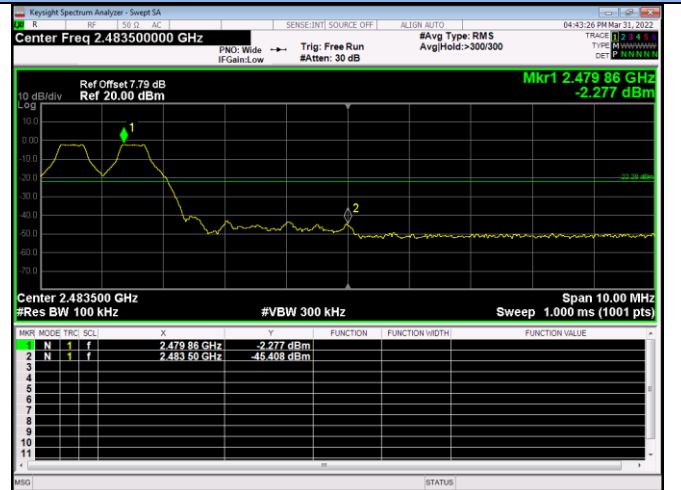


$\pi/4$ -DQPSK / Low / 2402

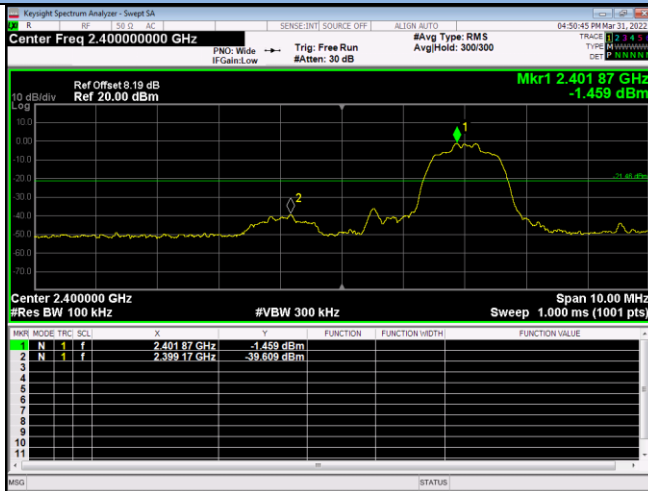


$\pi/4$ -DQPSK / Hopping

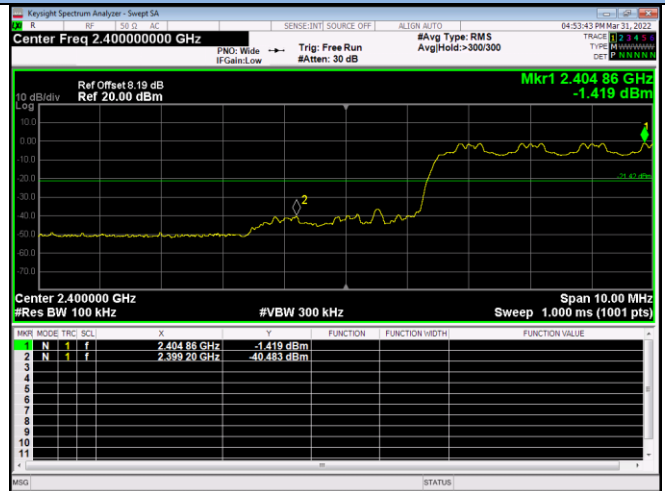


$\pi/4$ -DQPSK / High Channel / 2480

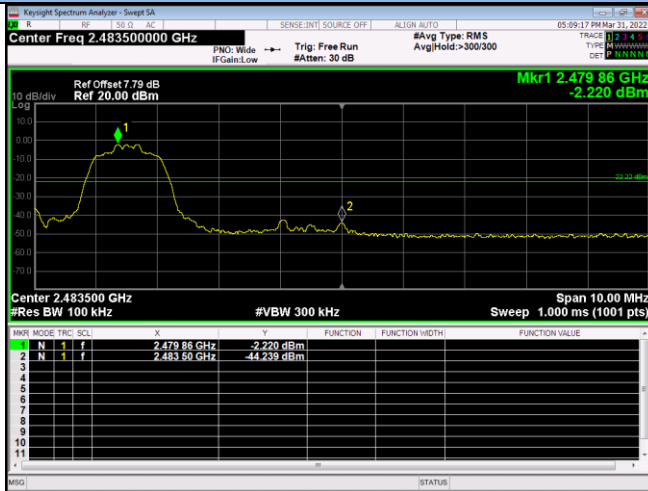


$\pi/4$ -DQPSK / Hopping

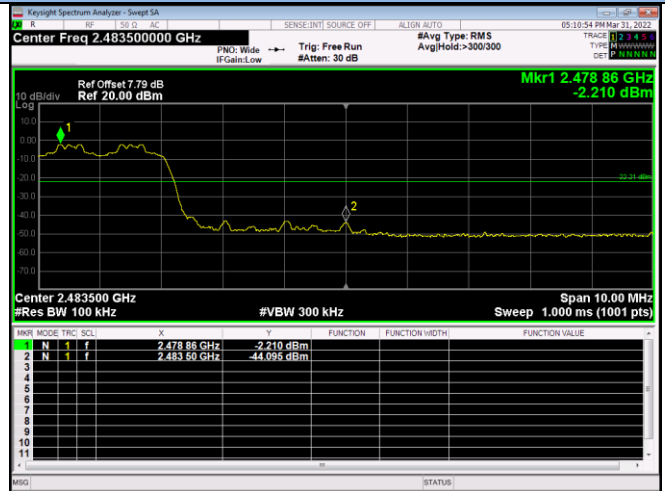


8DPSK / Low / 2402

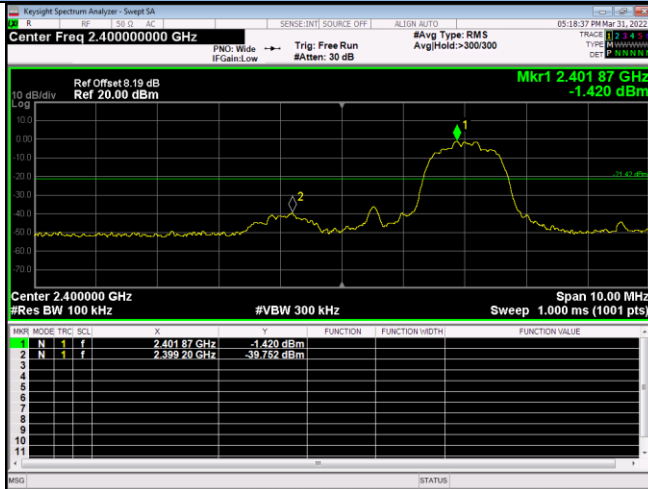


8DPSK / Hopping

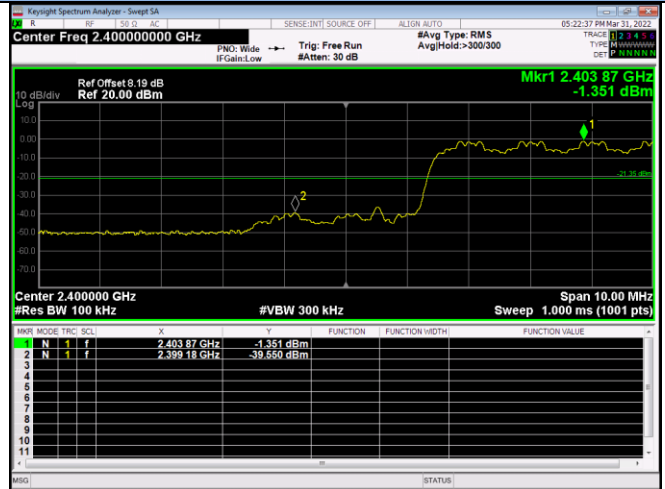

8DPSK / High / 2480

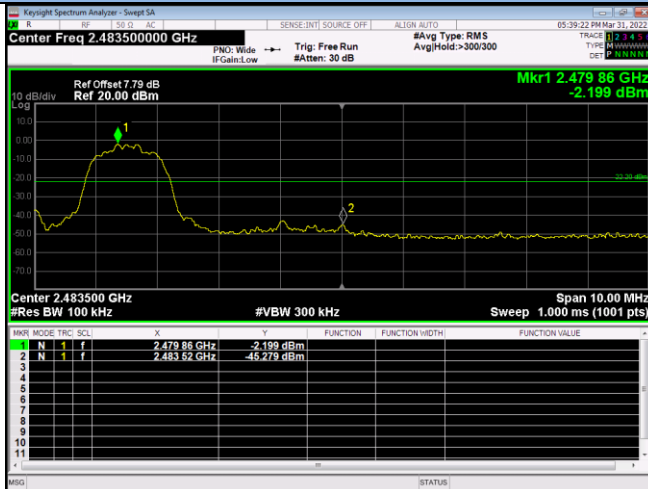


8DPSK / Hopping

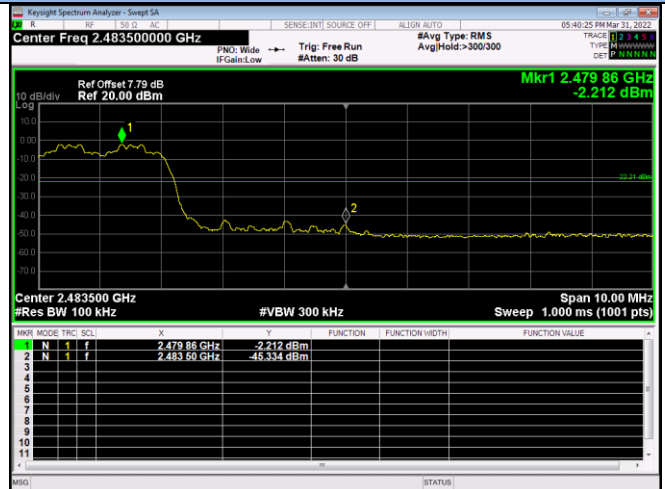


Conducted Spurious Emission (the worst case)


8DPSK / Low Channel / 30MHz~25GHz

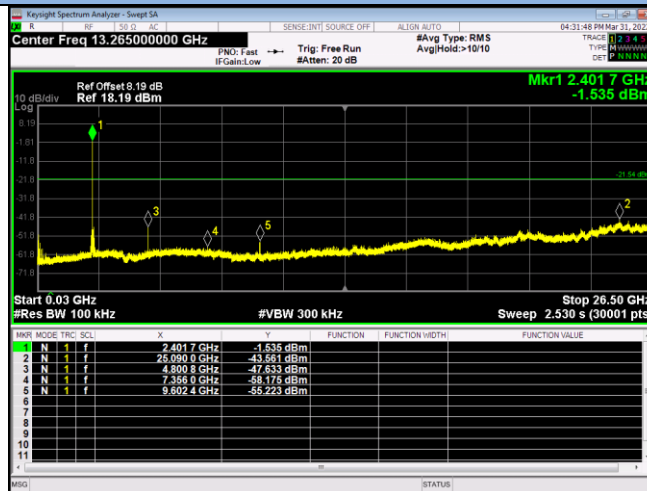

8DPSK / Mid Channel / 30MHz~25GHz

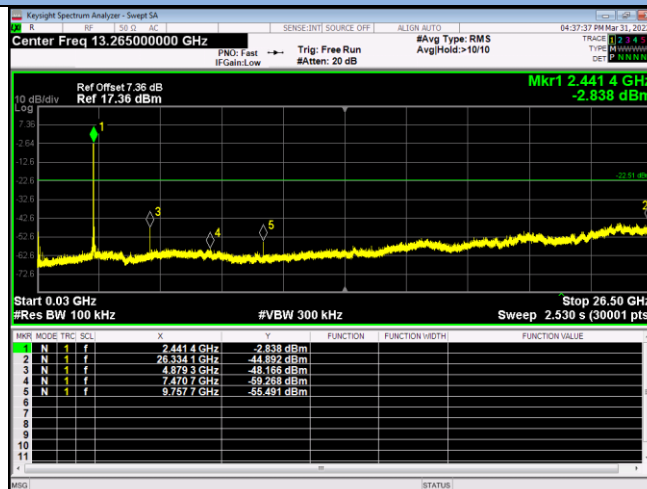

8DPSK / High Channel / 30MHz~25GHz

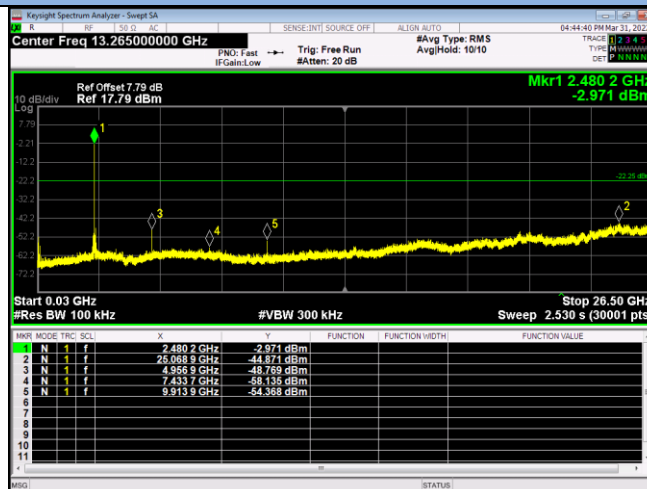

13.9 Antenna Requirement

STANDARD APPLICABLE

According to of FCC part 15C section 15.203 and 15.204:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

ANTENNA CONNECTED CONSTRUCTION

The antenna is PCB antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 1.3 dBi, Therefore, the antenna is considered to meet the requirement.

14. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 13, 2022	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2022	1 Year
3.	Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Mar. 13, 2022	1 Year
4.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 13, 2022	1 Year
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	101094	Mar. 13, 2022	1 Year
6.	Horn Antenna	Schwarzbeck	BBHA9170	9170-172	Mar. 23, 2022	2 Year
7.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Mar. 13, 2022	1 Year
8.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2022	1 Year
9.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 13, 2022	1 Year
10.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 13, 2022	1 Year
11.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2022	1 Year
12.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 13, 2022	1 Year
13.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 13, 2022	1 Year
14.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar.13, 2022	1 Year
15.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
16.	Test Software	EZ	EZ EMC, NTC-3A1.1	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---