

Appendix B

RF Test Data for BT LE (Conducted Measurement)

Product Name: Translator Earbuds


Test Model: M6

Environmental Conditions


Temperature:	24.1°C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Yan Chen
Supervised by:	Fengliu Tang

B.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.653	≥ 0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.686	≥ 0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.658	≥ 0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.132	≥ 0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.128	≥ 0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.265	≥ 0.5	Pass


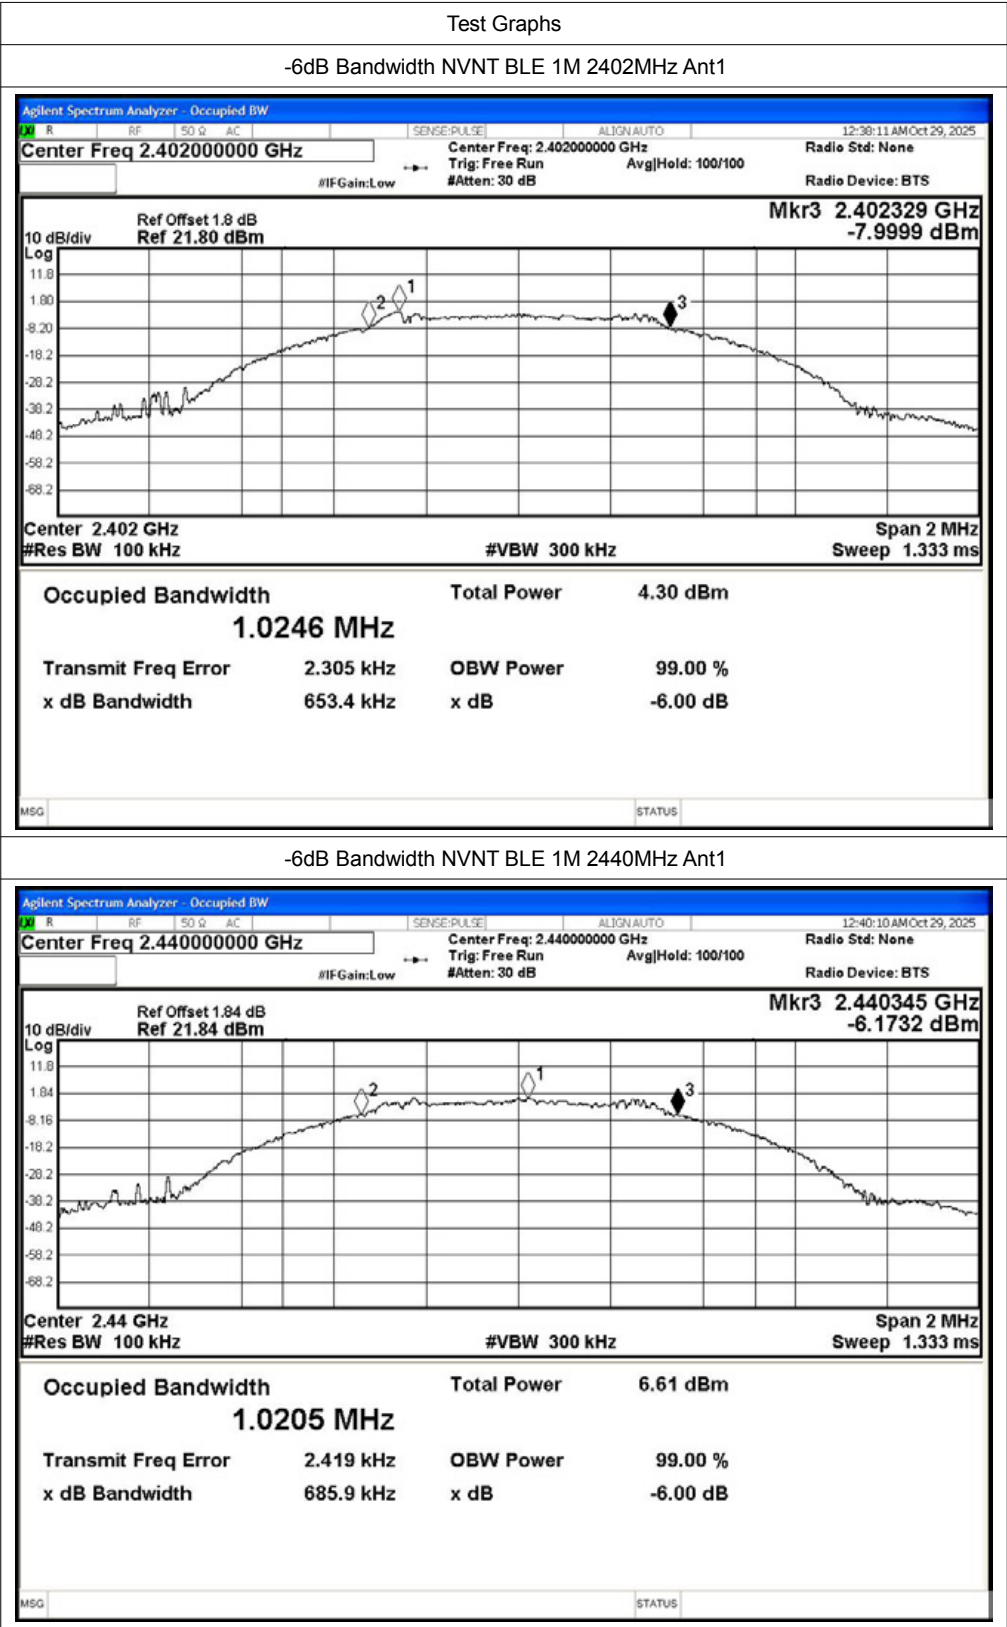


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

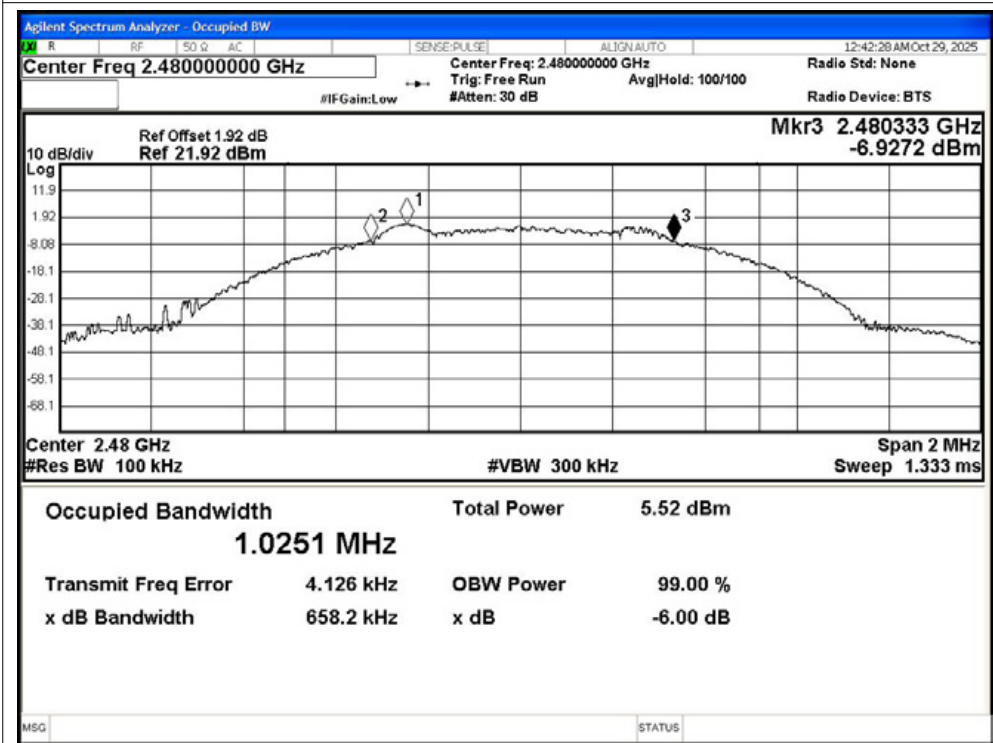


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1


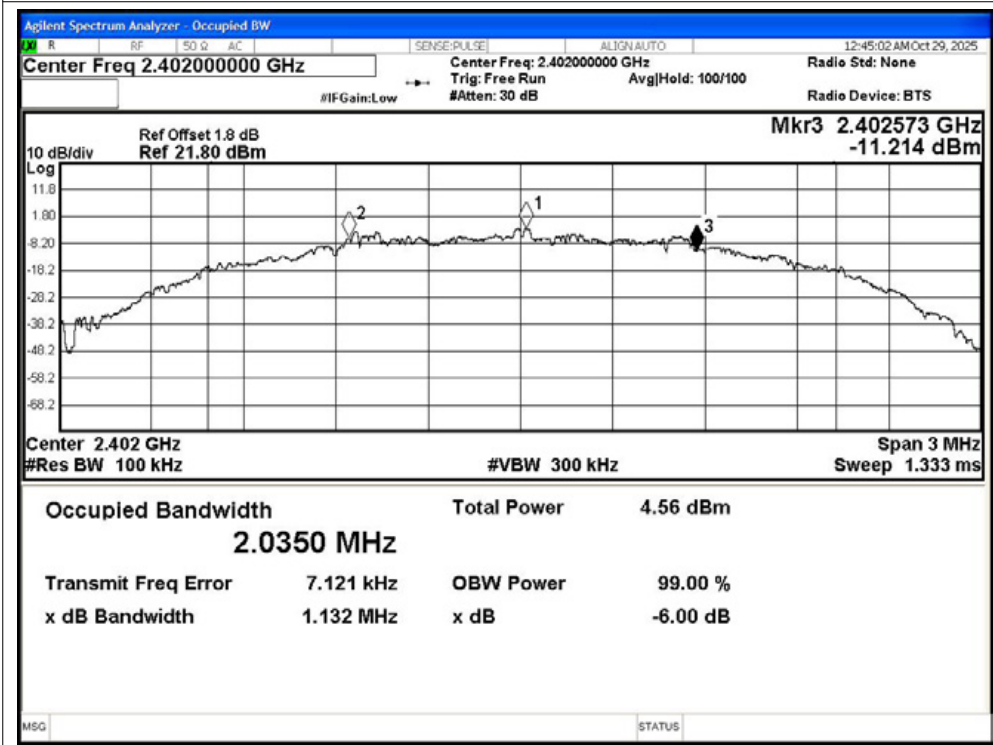


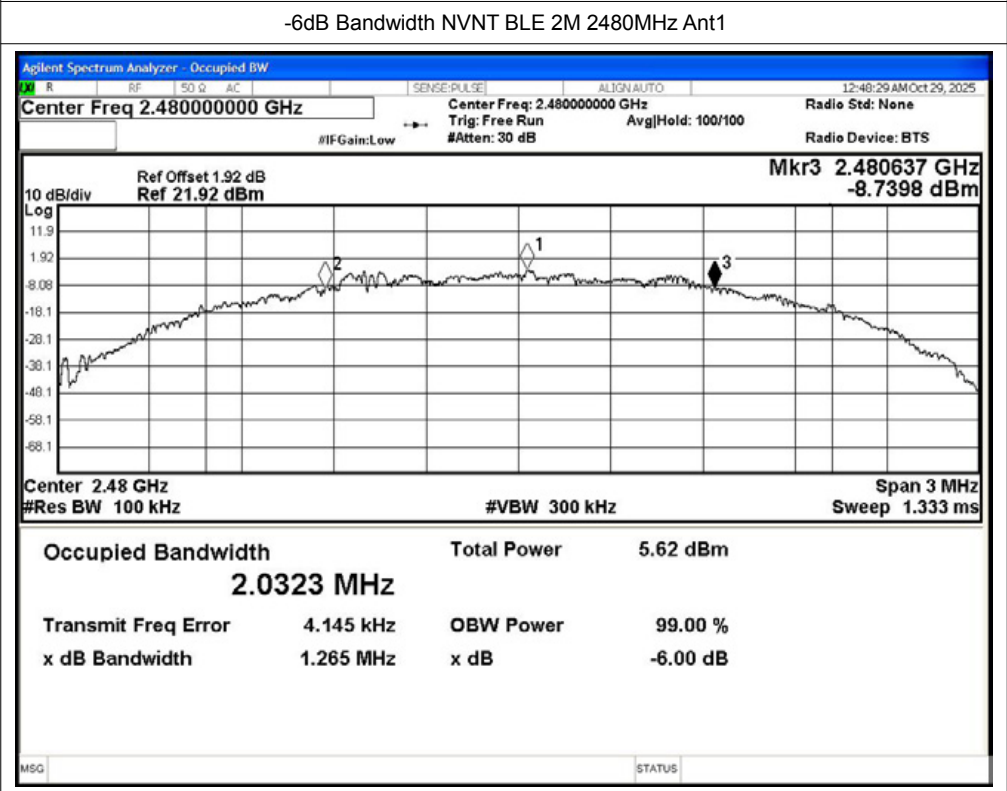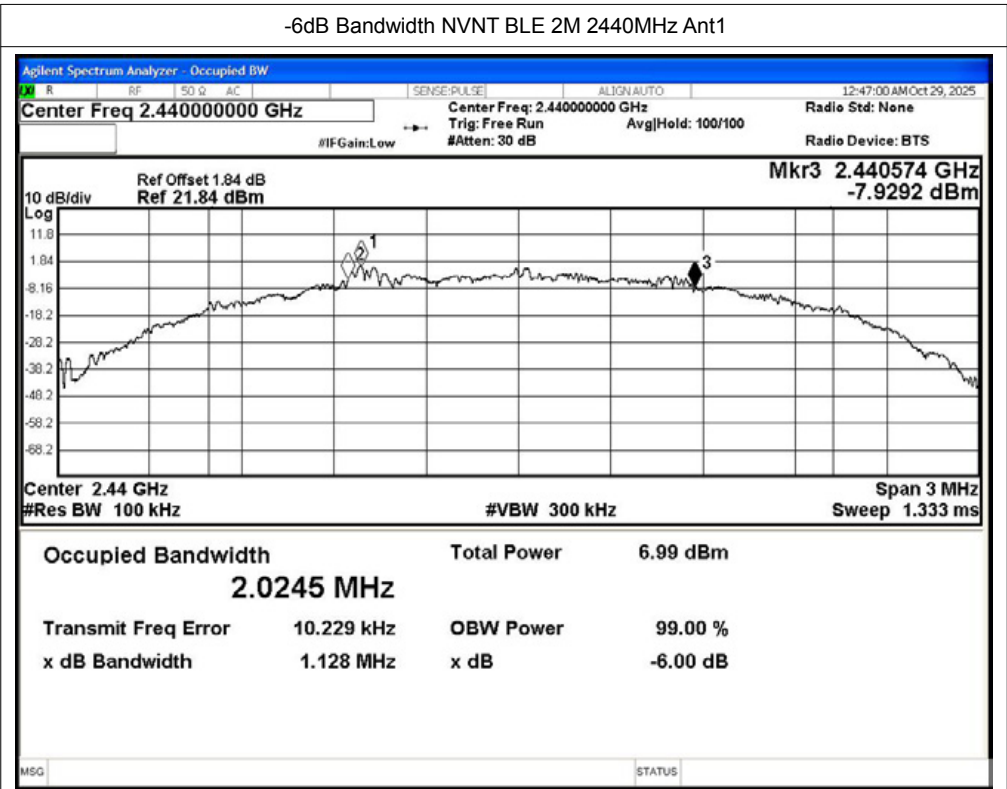


B.2 Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-1.47	30	Pass
NVNT	BLE 1M	2440	Ant1	0.88	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.27	30	Pass
NVNT	BLE 2M	2402	Ant1	-1.61	30	Pass
NVNT	BLE 2M	2440	Ant1	0.69	30	Pass
NVNT	BLE 2M	2480	Ant1	-0.43	30	Pass

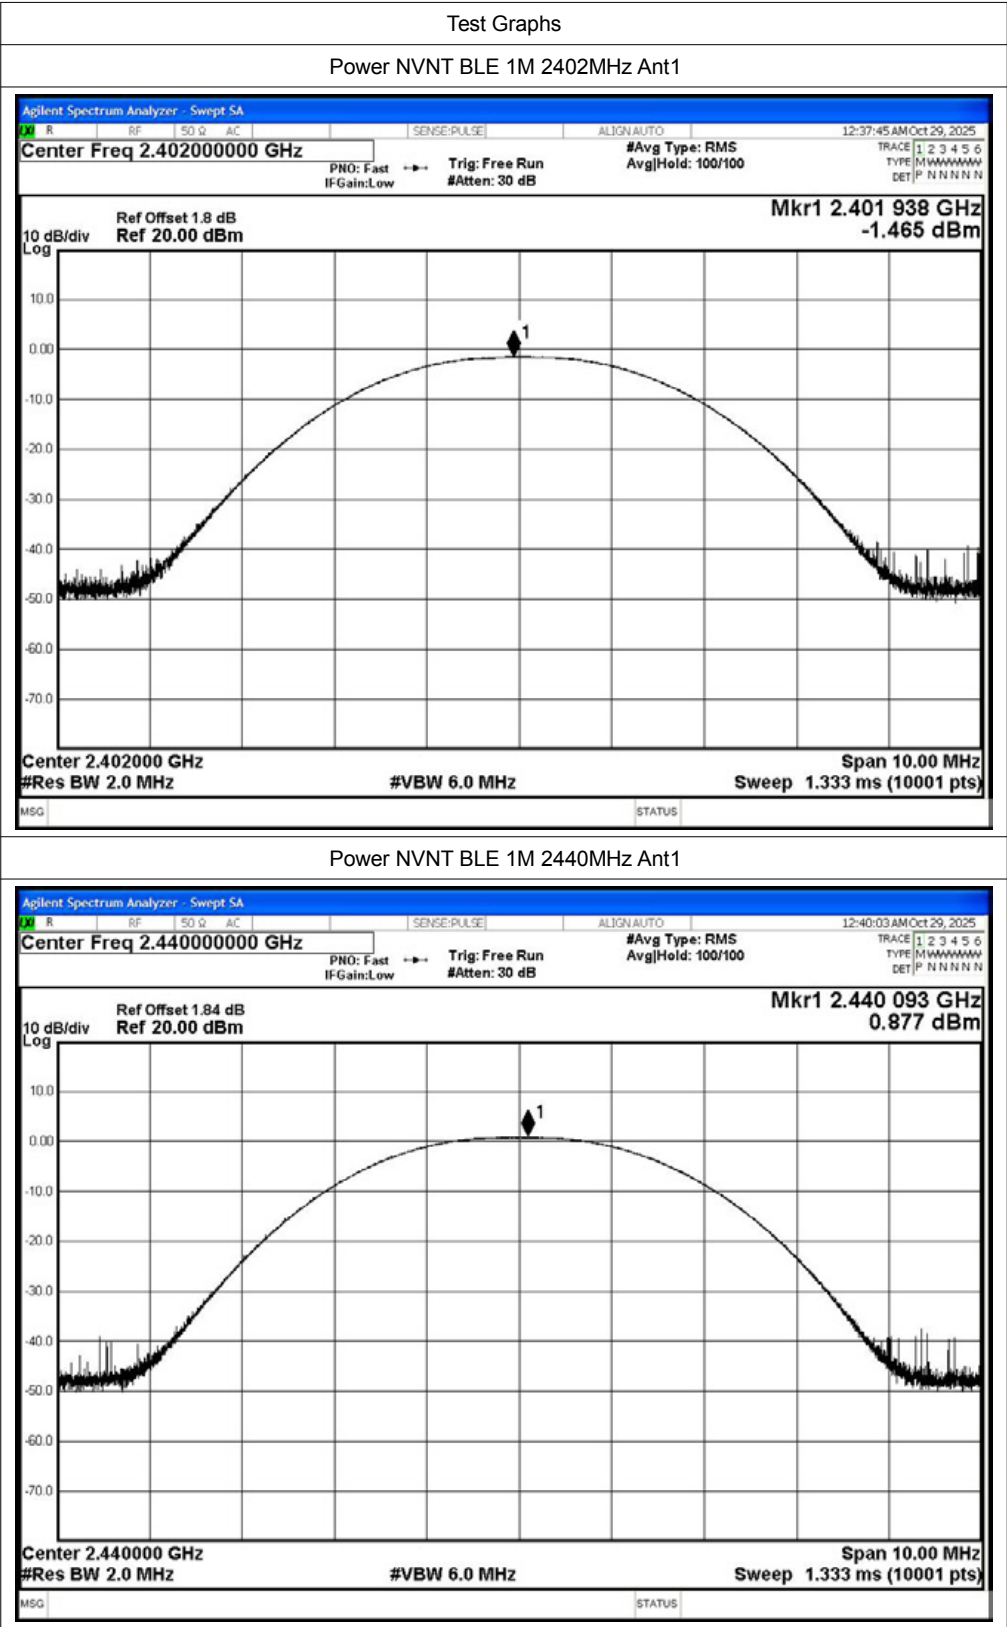

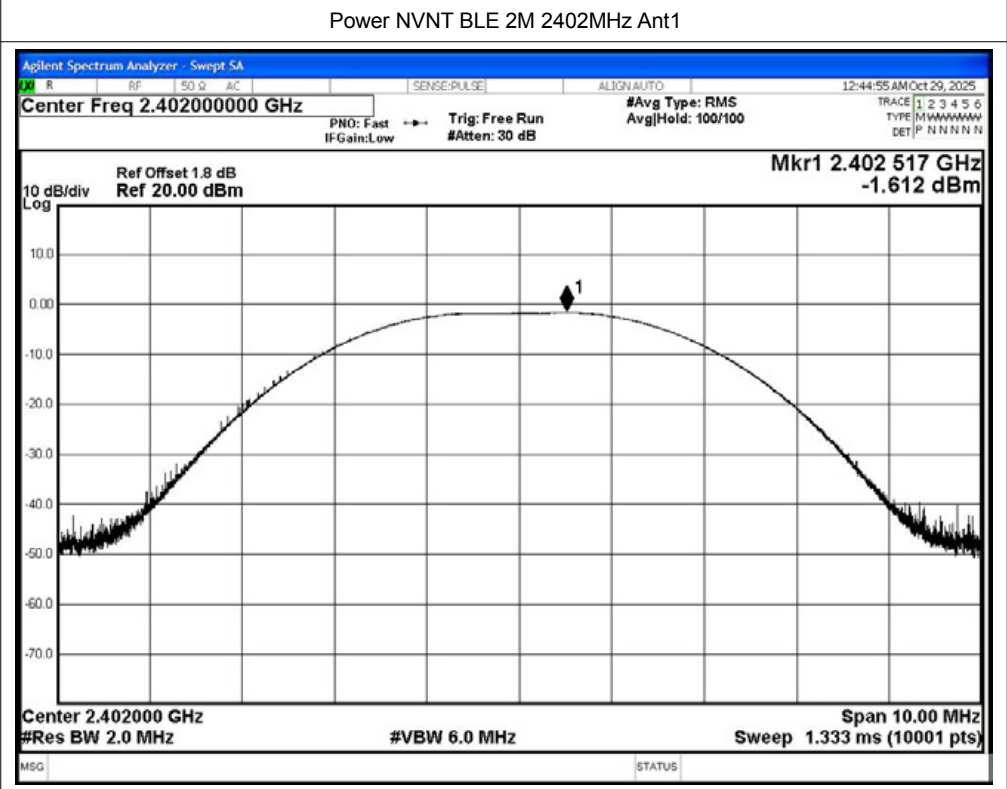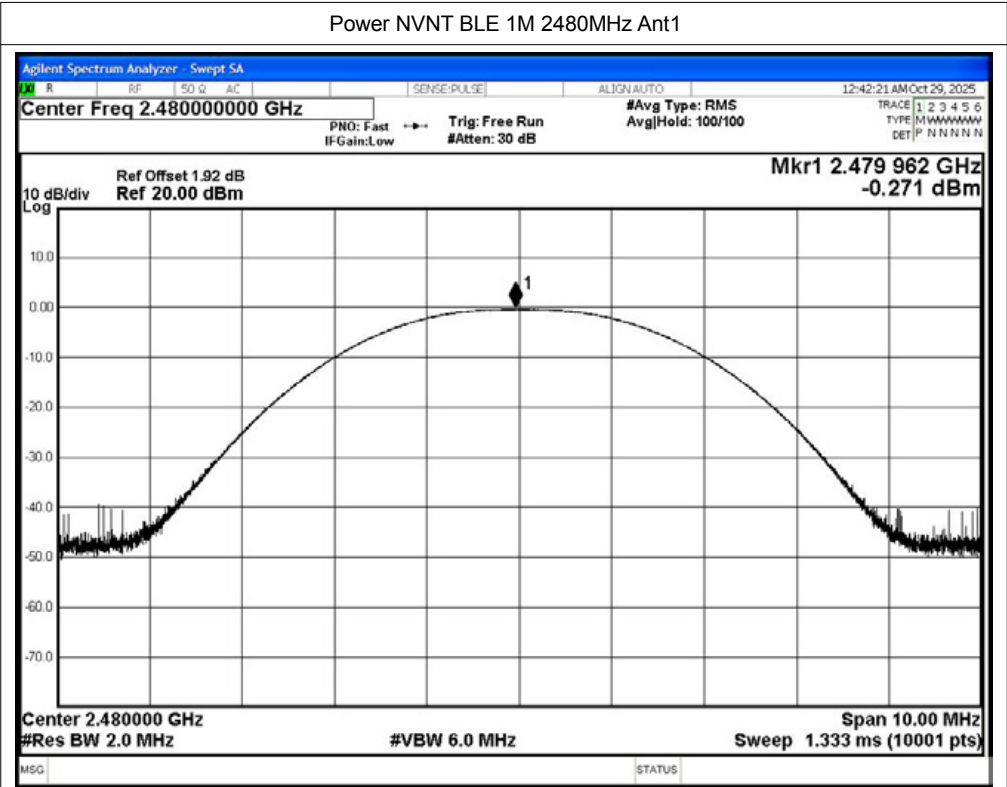

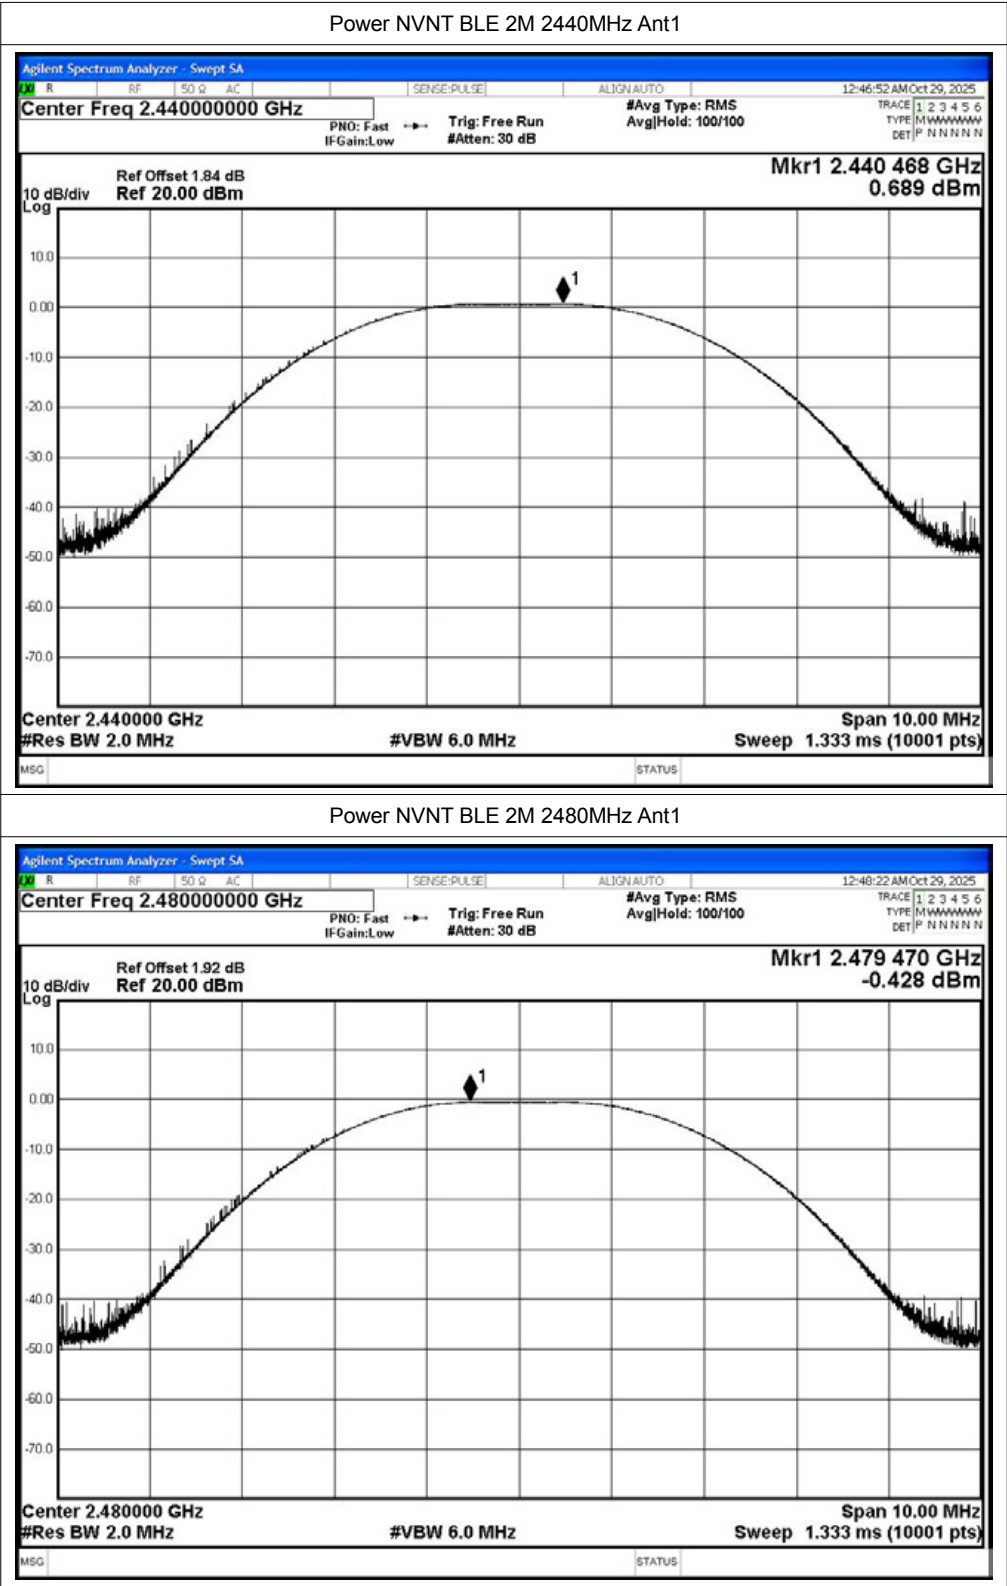


B.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-18.08	8	Pass
NVNT	BLE 1M	2440	Ant1	-15.66	8	Pass
NVNT	BLE 1M	2480	Ant1	-17.06	8	Pass
NVNT	BLE 2M	2402	Ant1	-21.31	8	Pass
NVNT	BLE 2M	2440	Ant1	-19.14	8	Pass
NVNT	BLE 2M	2480	Ant1	-20.39	8	Pass



Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

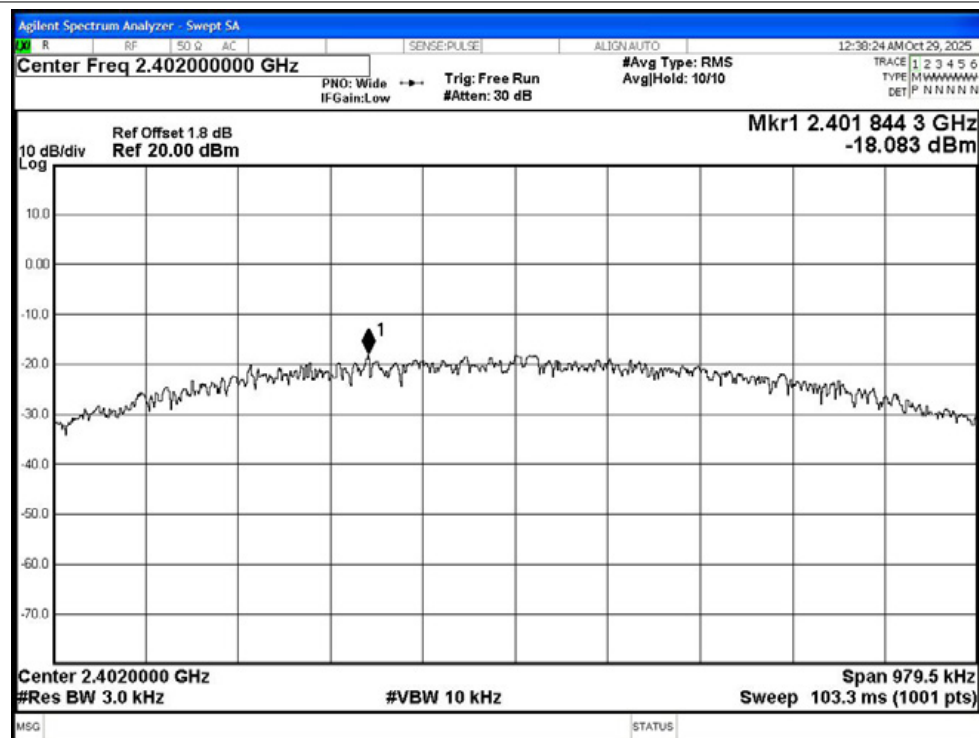


PSD NVNT BLE 1M 2440MHz Ant1

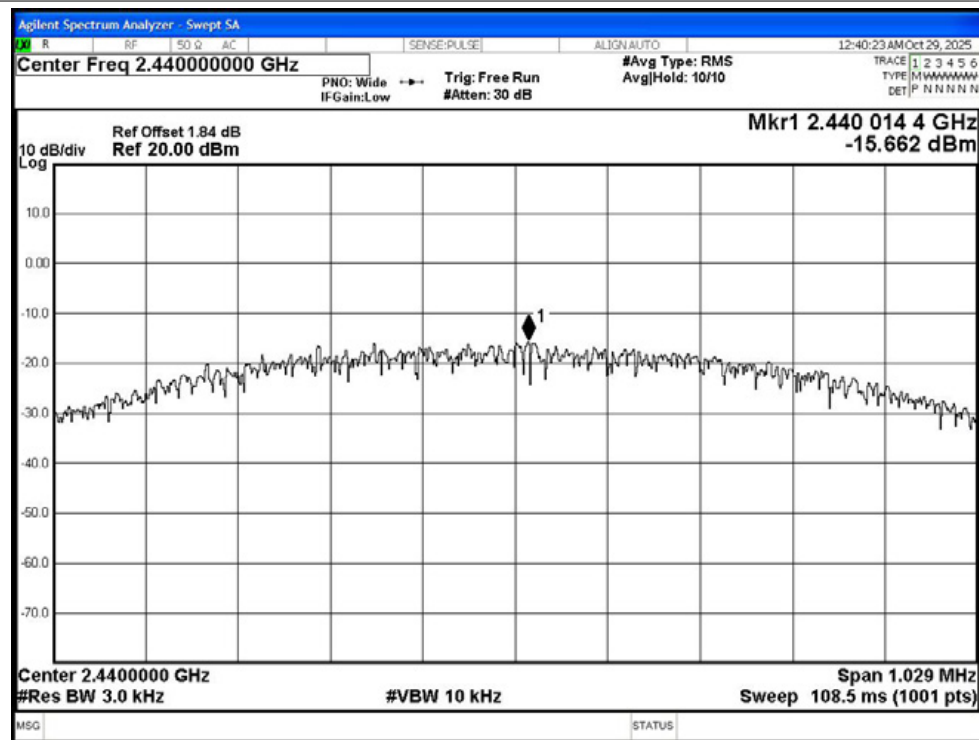


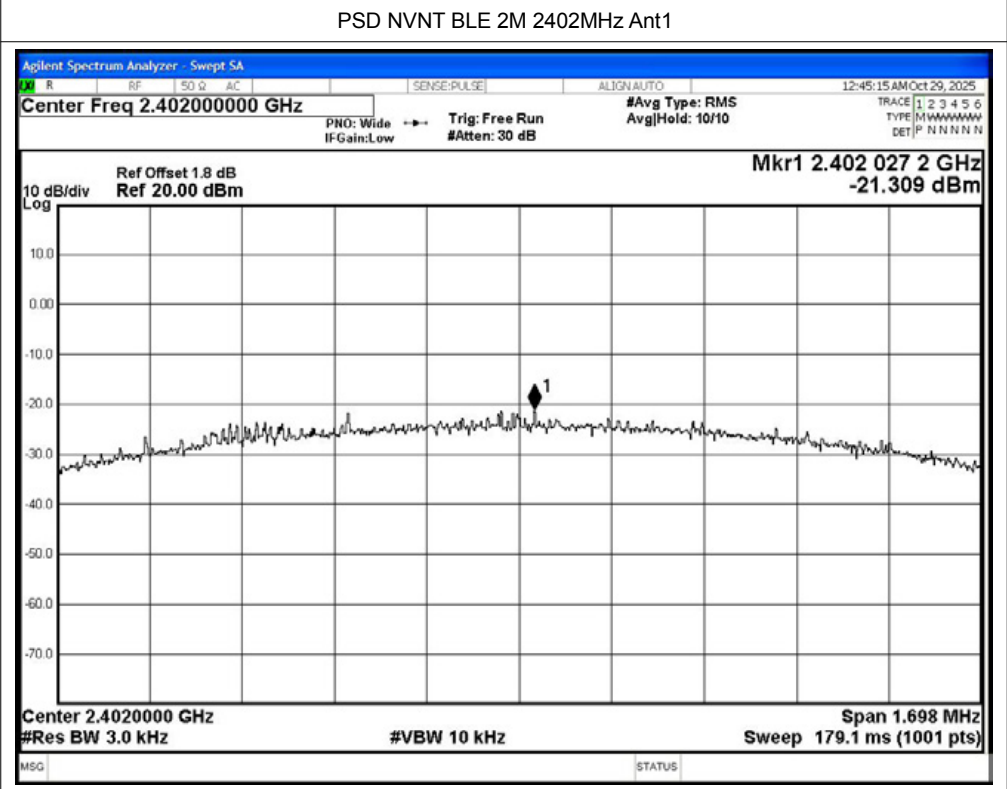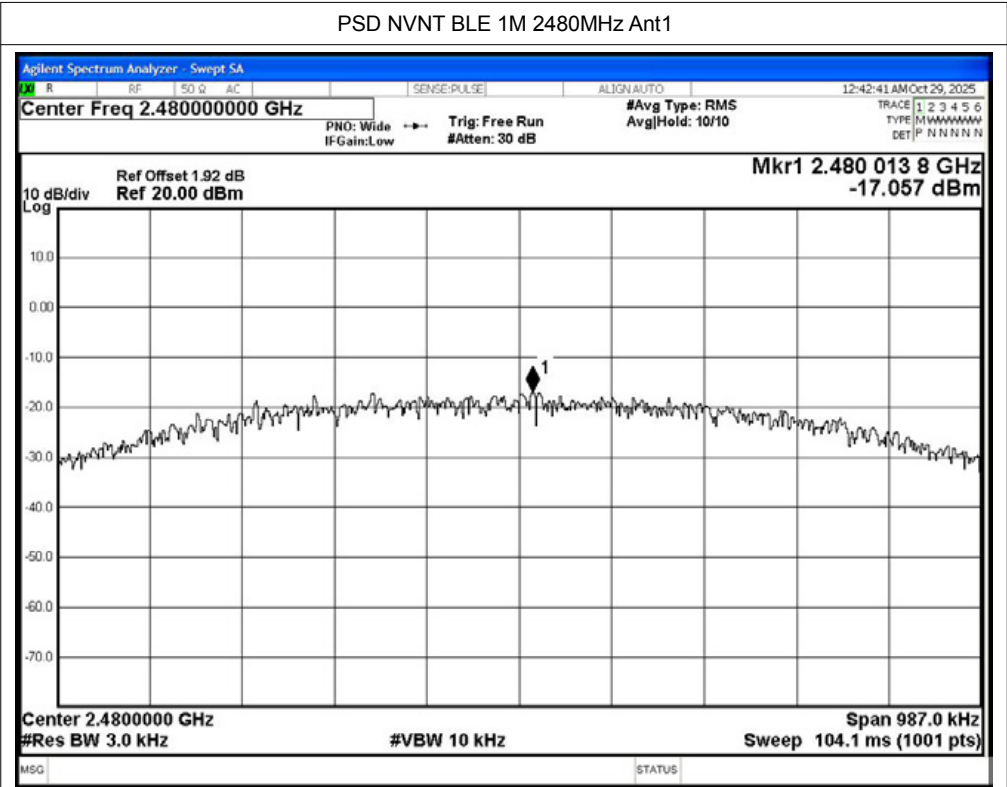

PSD NVNT BLE 2M 2440MHz Ant1

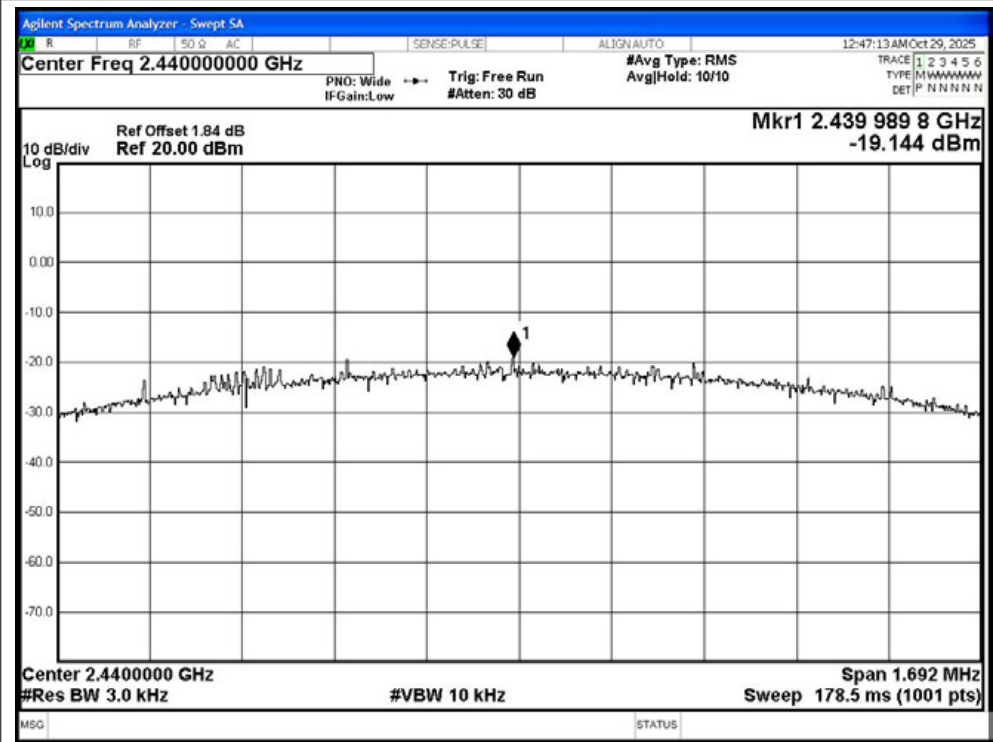



PSD NVNT BLE 2M 2480MHz Ant1

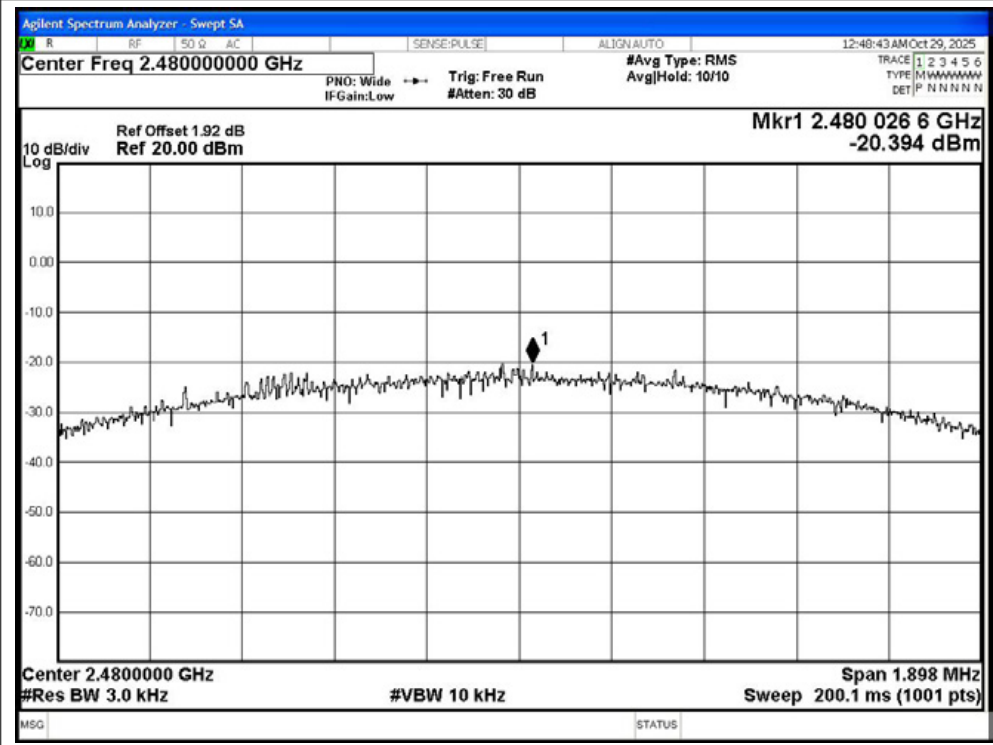



B.4 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-55.03	-20	Pass
NVNT	BLE 1M	2480	Ant1	-56.34	-20	Pass
NVNT	BLE 2M	2402	Ant1	-46.83	-20	Pass
NVNT	BLE 2M	2480	Ant1	-56.1	-20	Pass

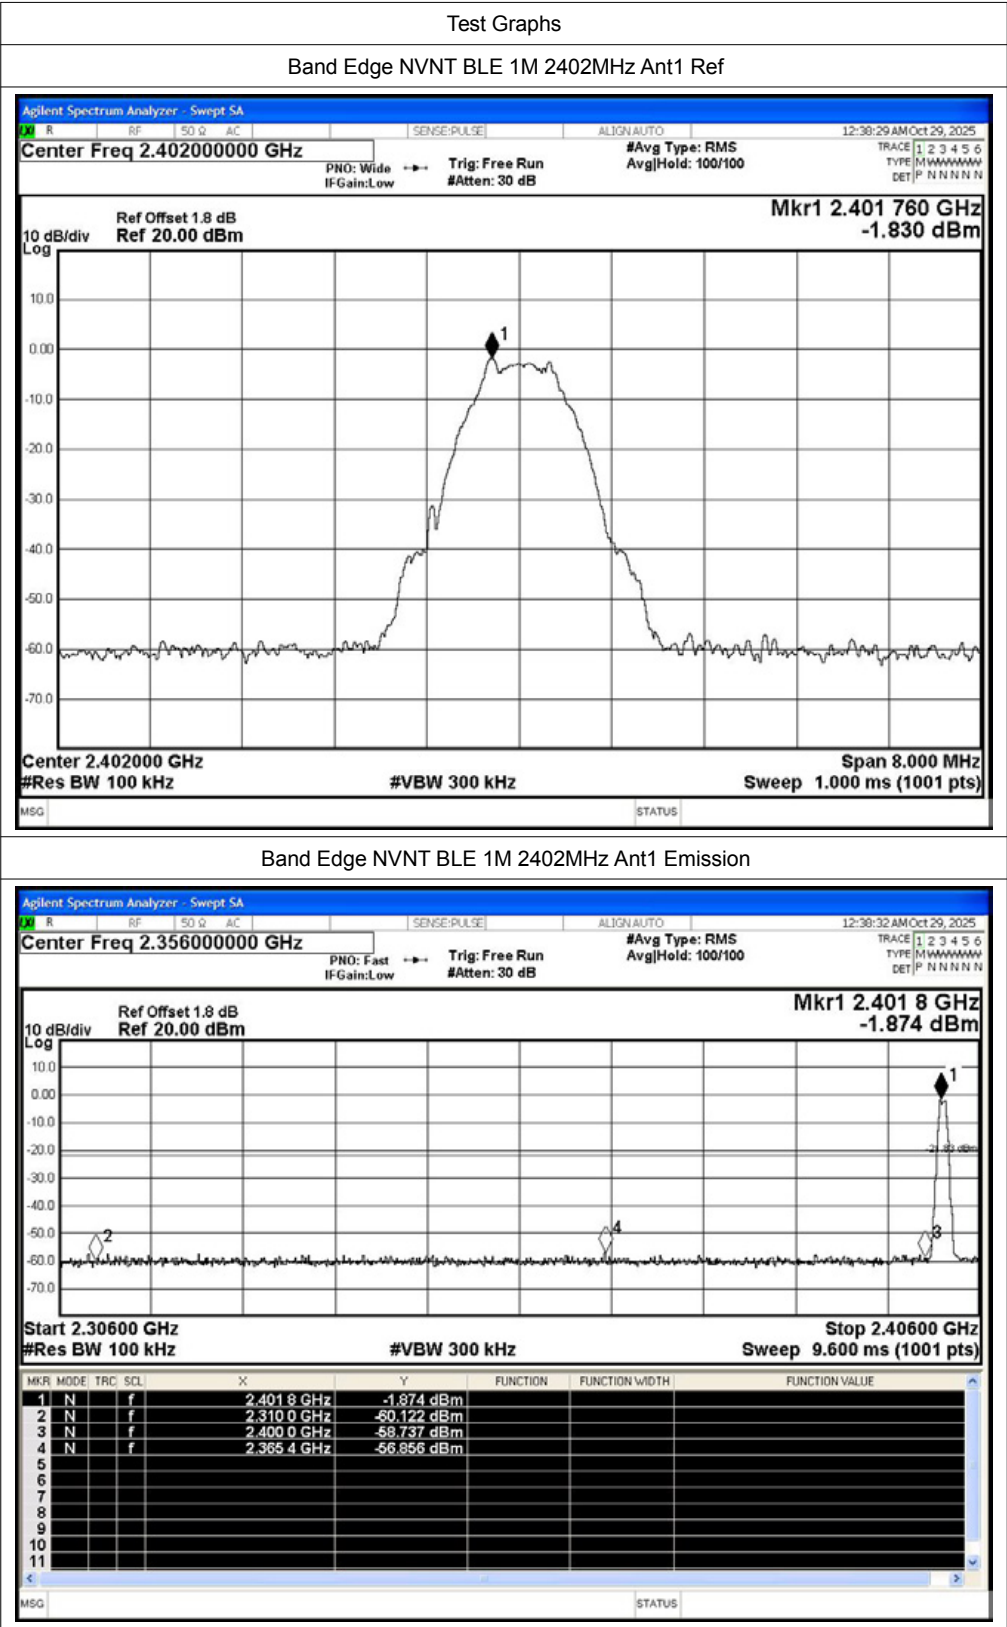

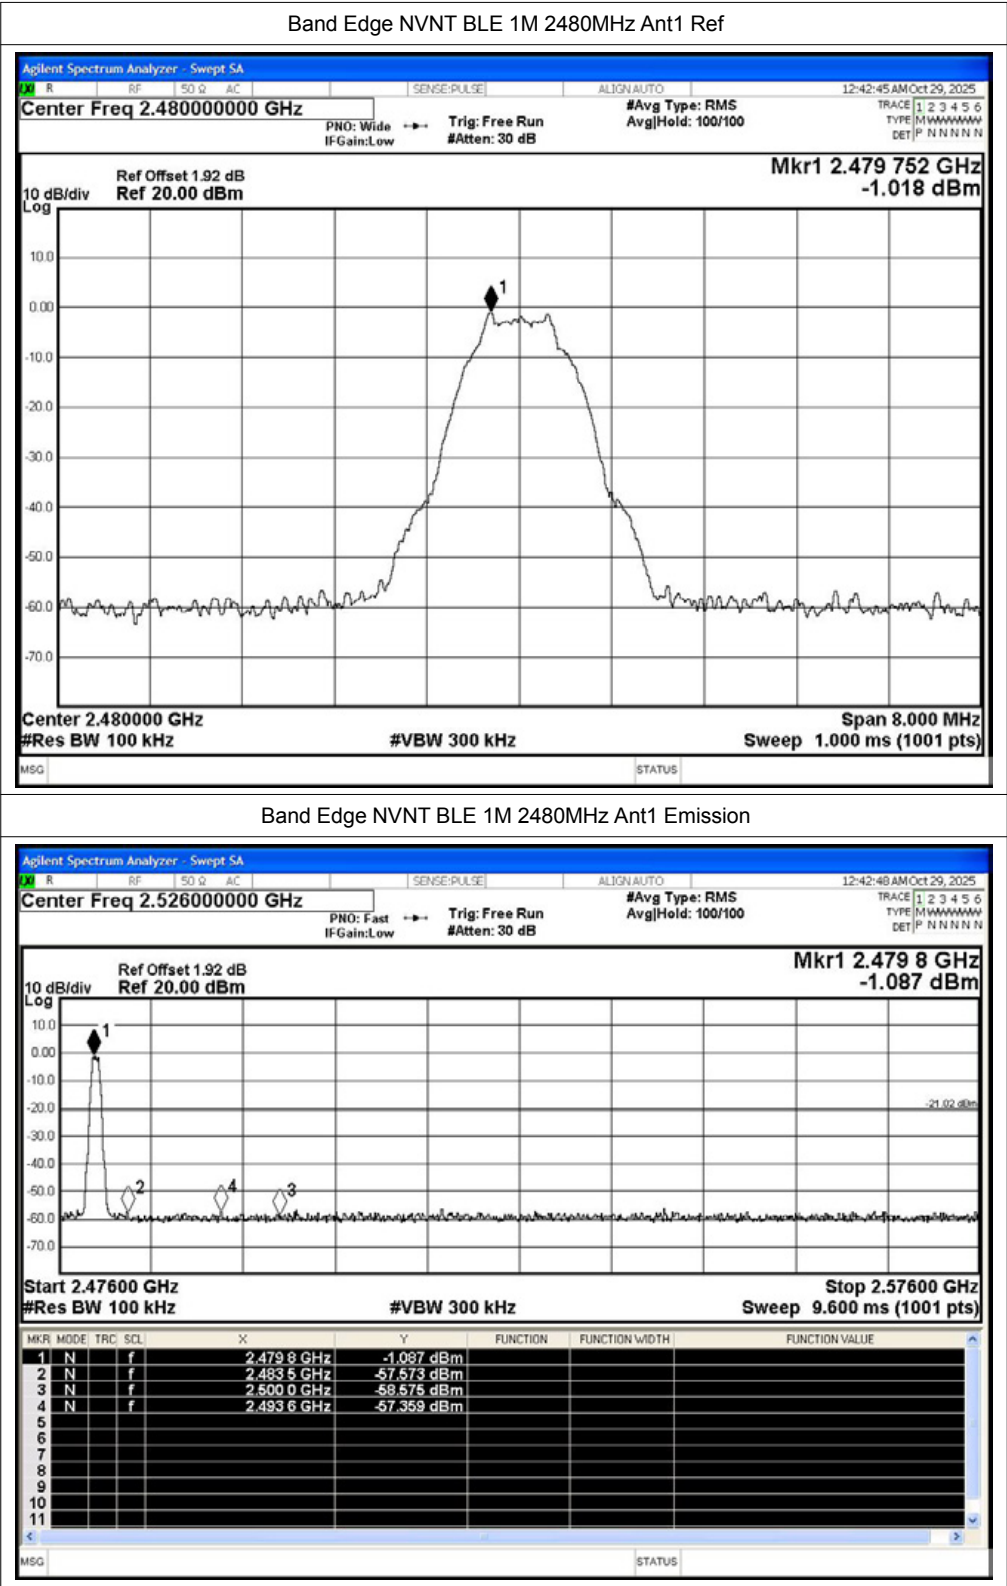


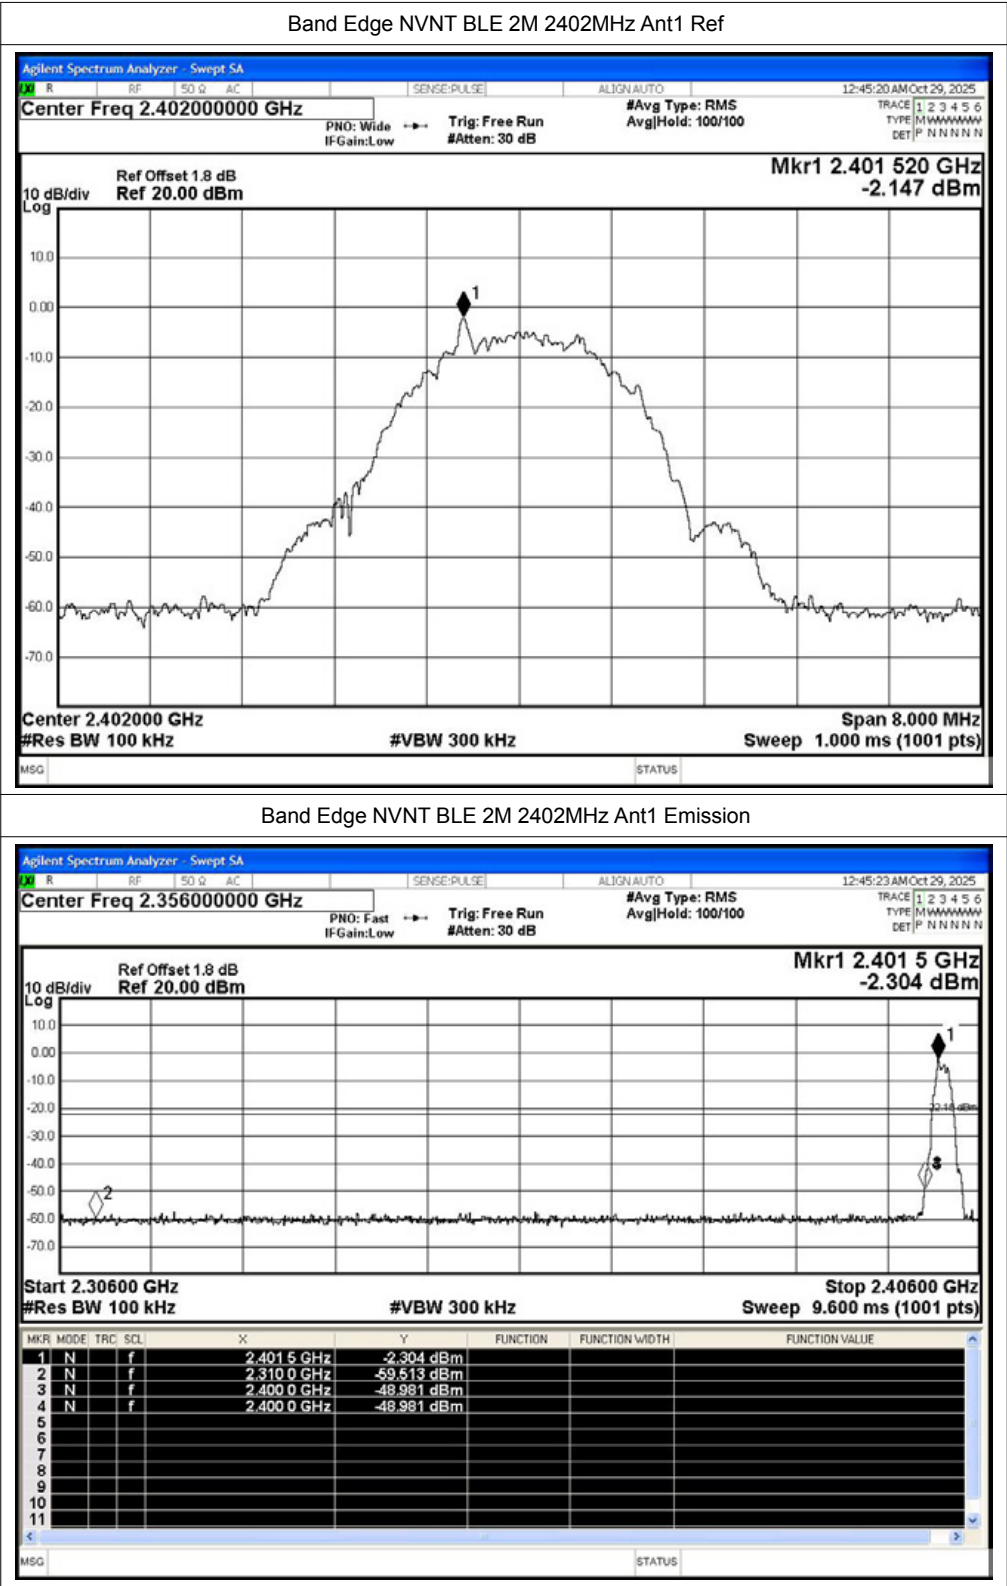


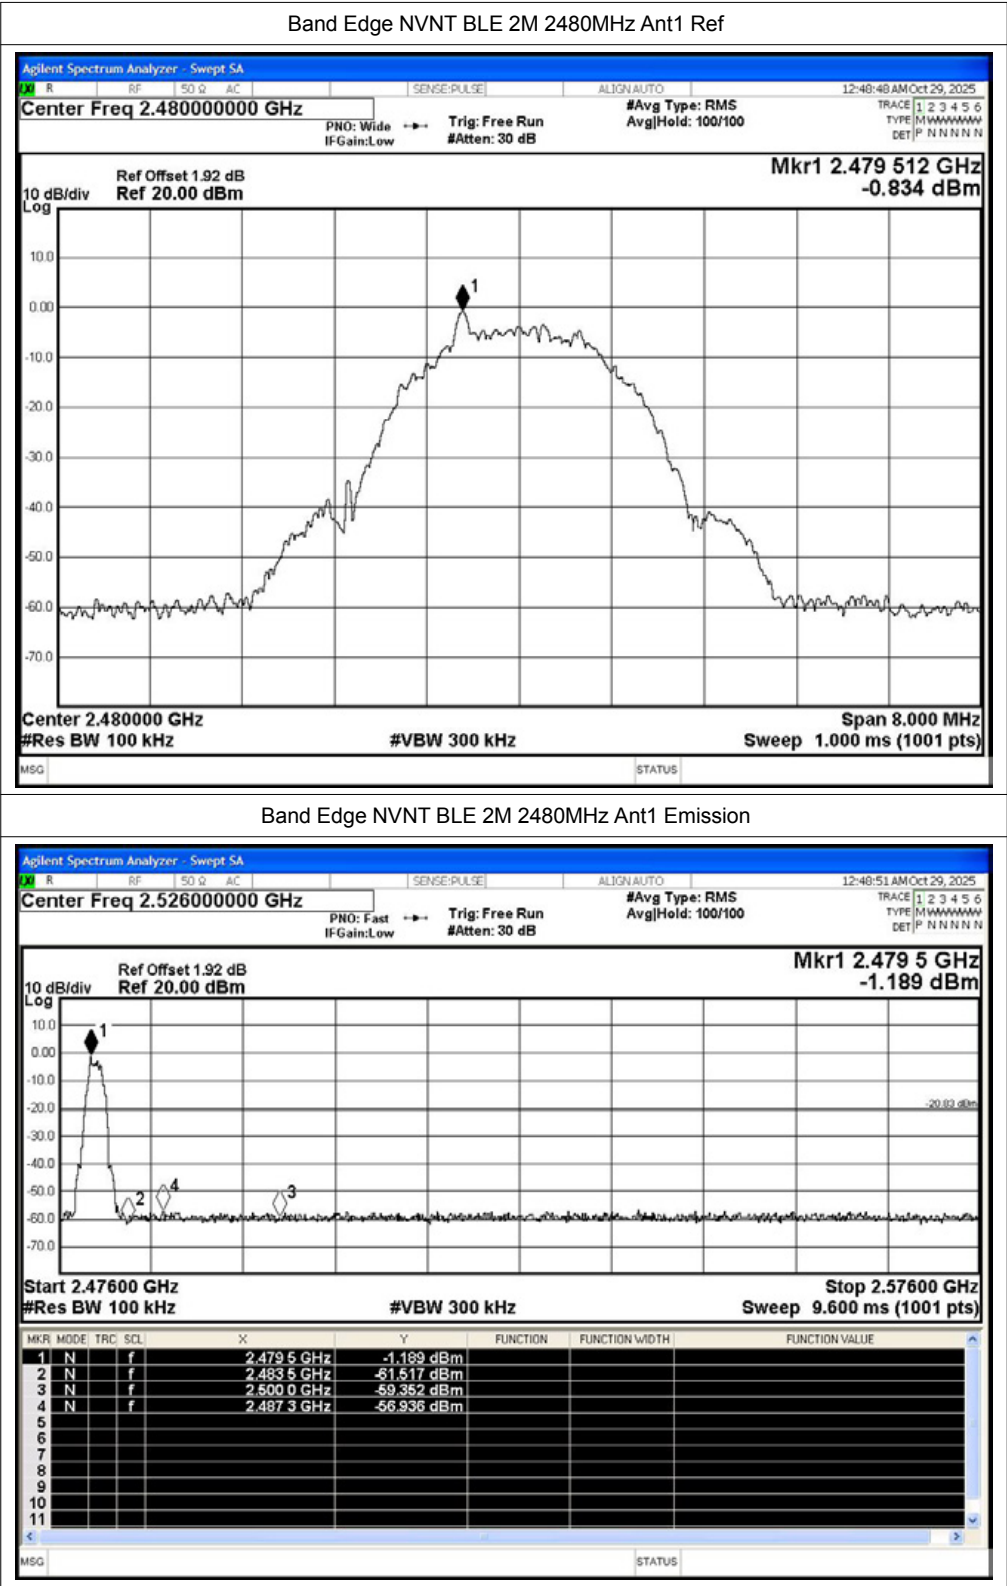



B.5 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-53.94	-20	Pass
NVNT	BLE 1M	2440	Ant1	-55.88	-20	Pass
NVNT	BLE 1M	2480	Ant1	-54.4	-20	Pass
NVNT	BLE 2M	2402	Ant1	-53.25	-20	Pass
NVNT	BLE 2M	2440	Ant1	-55.09	-20	Pass
NVNT	BLE 2M	2480	Ant1	-53.35	-20	Pass

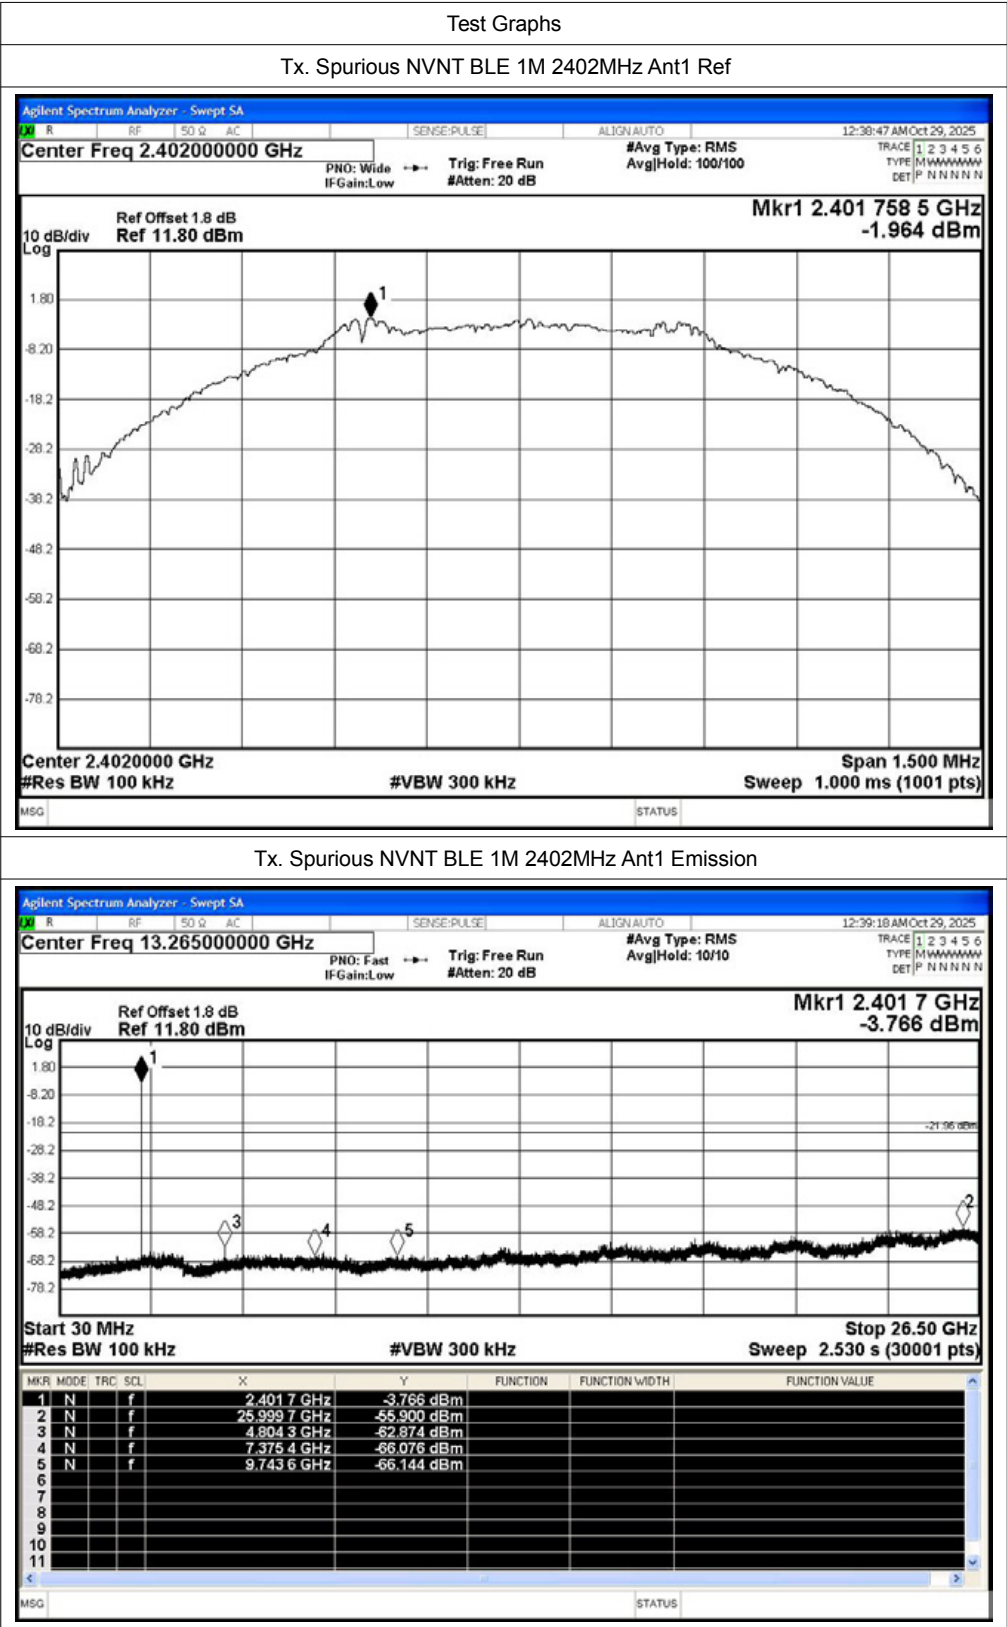


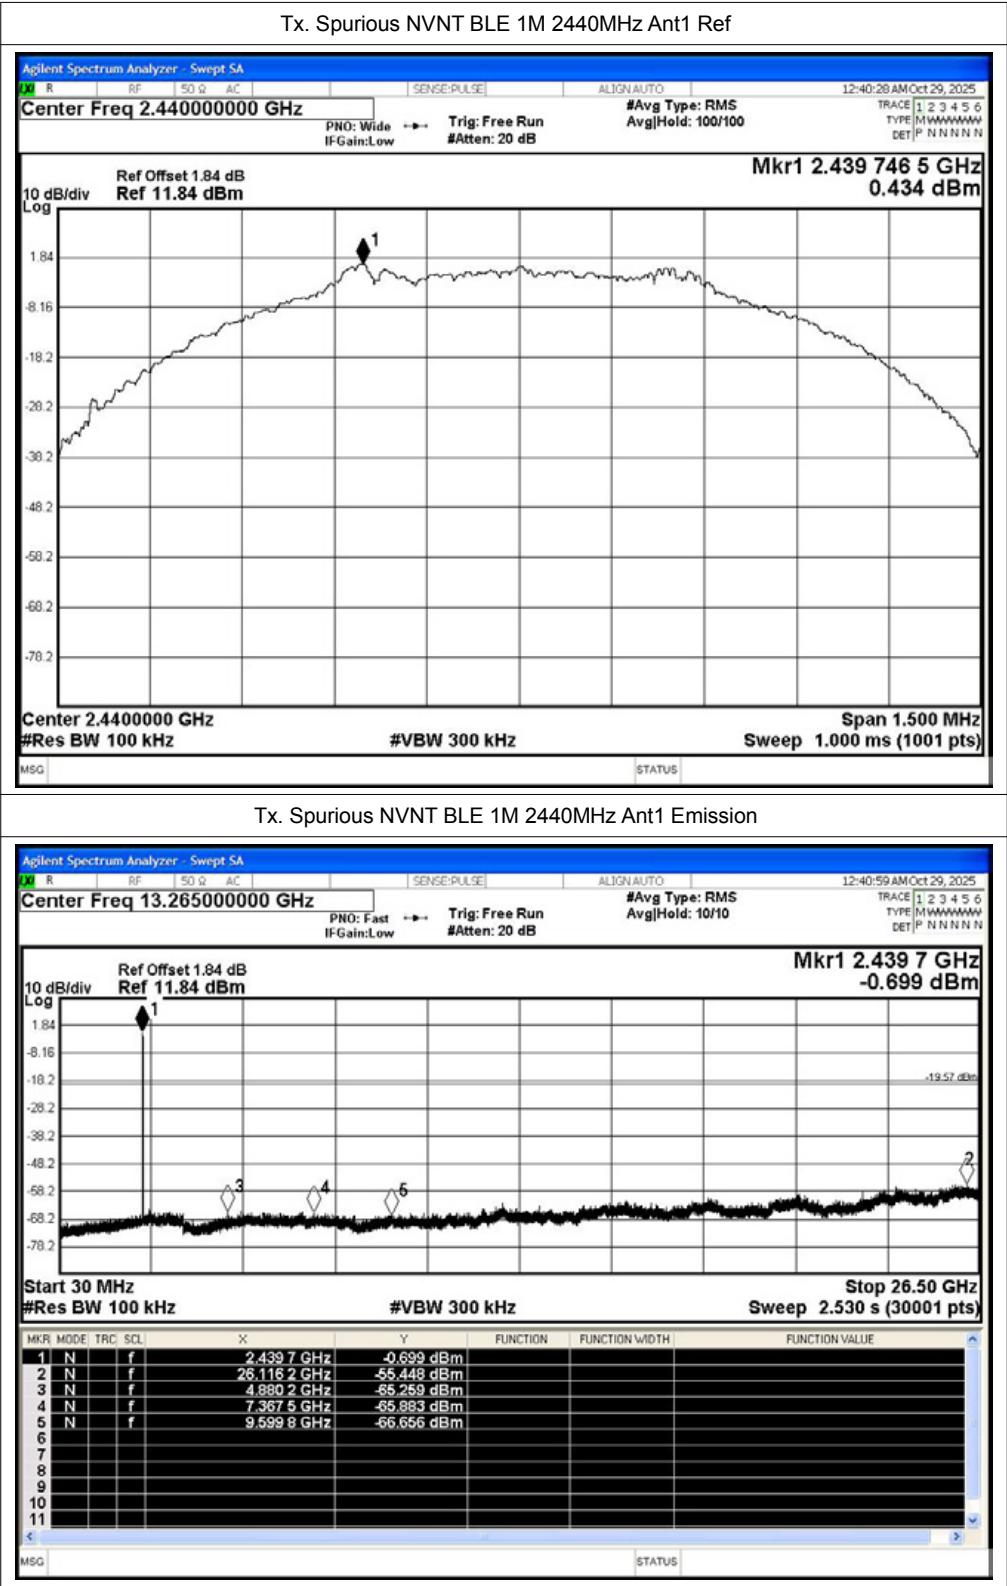

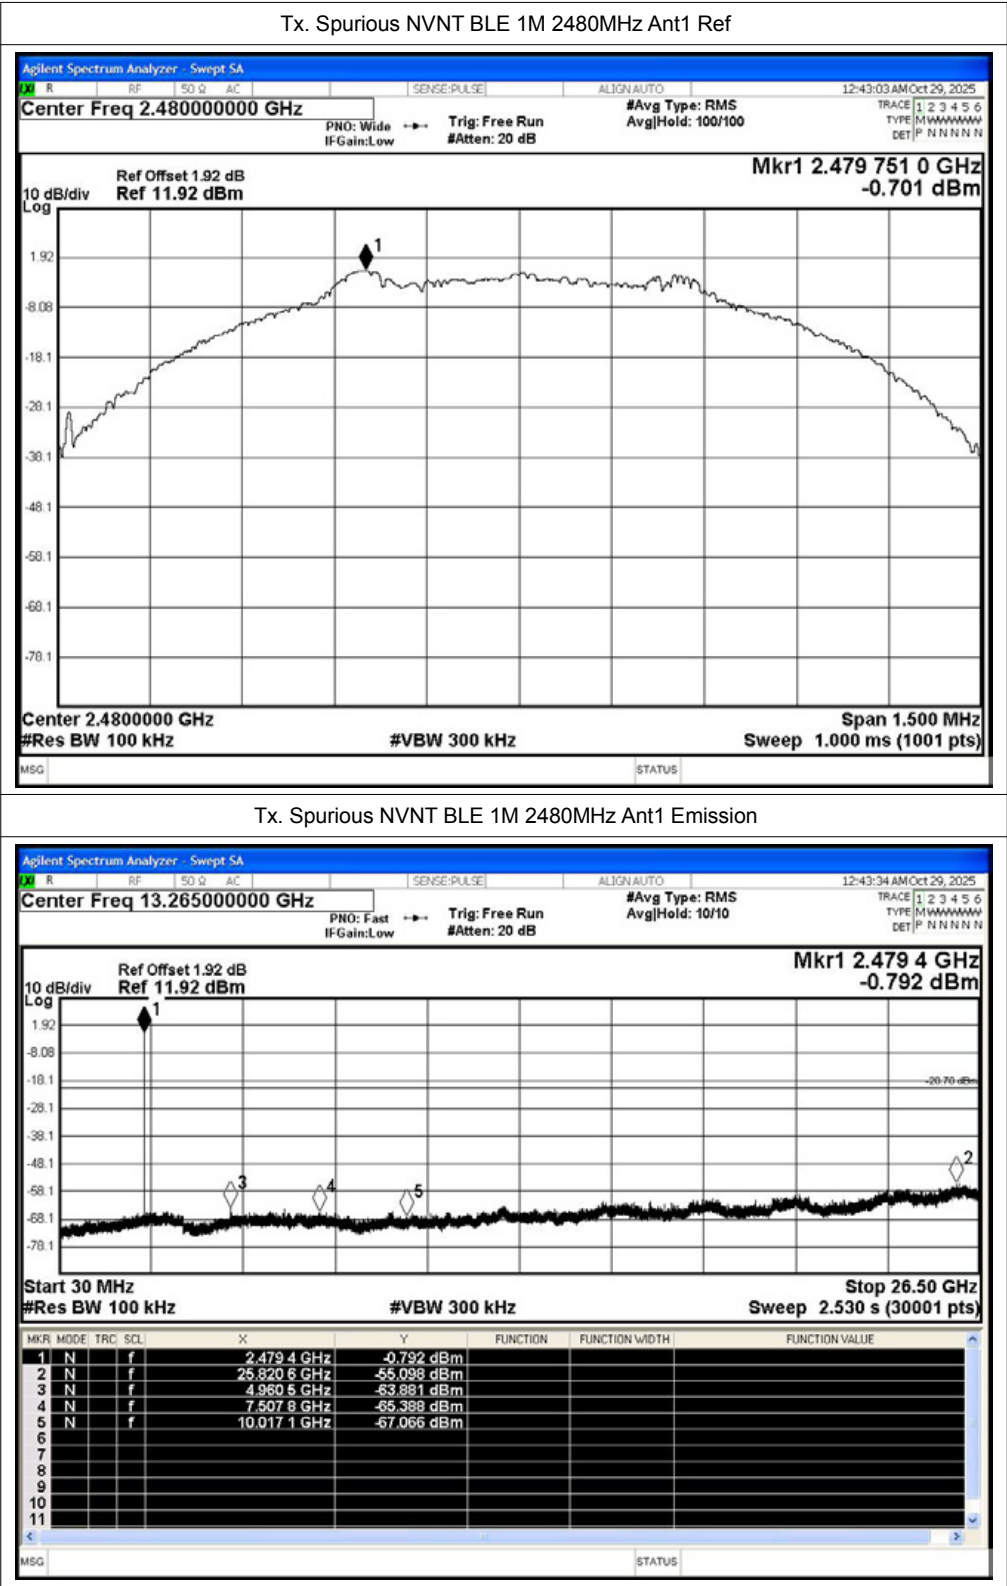

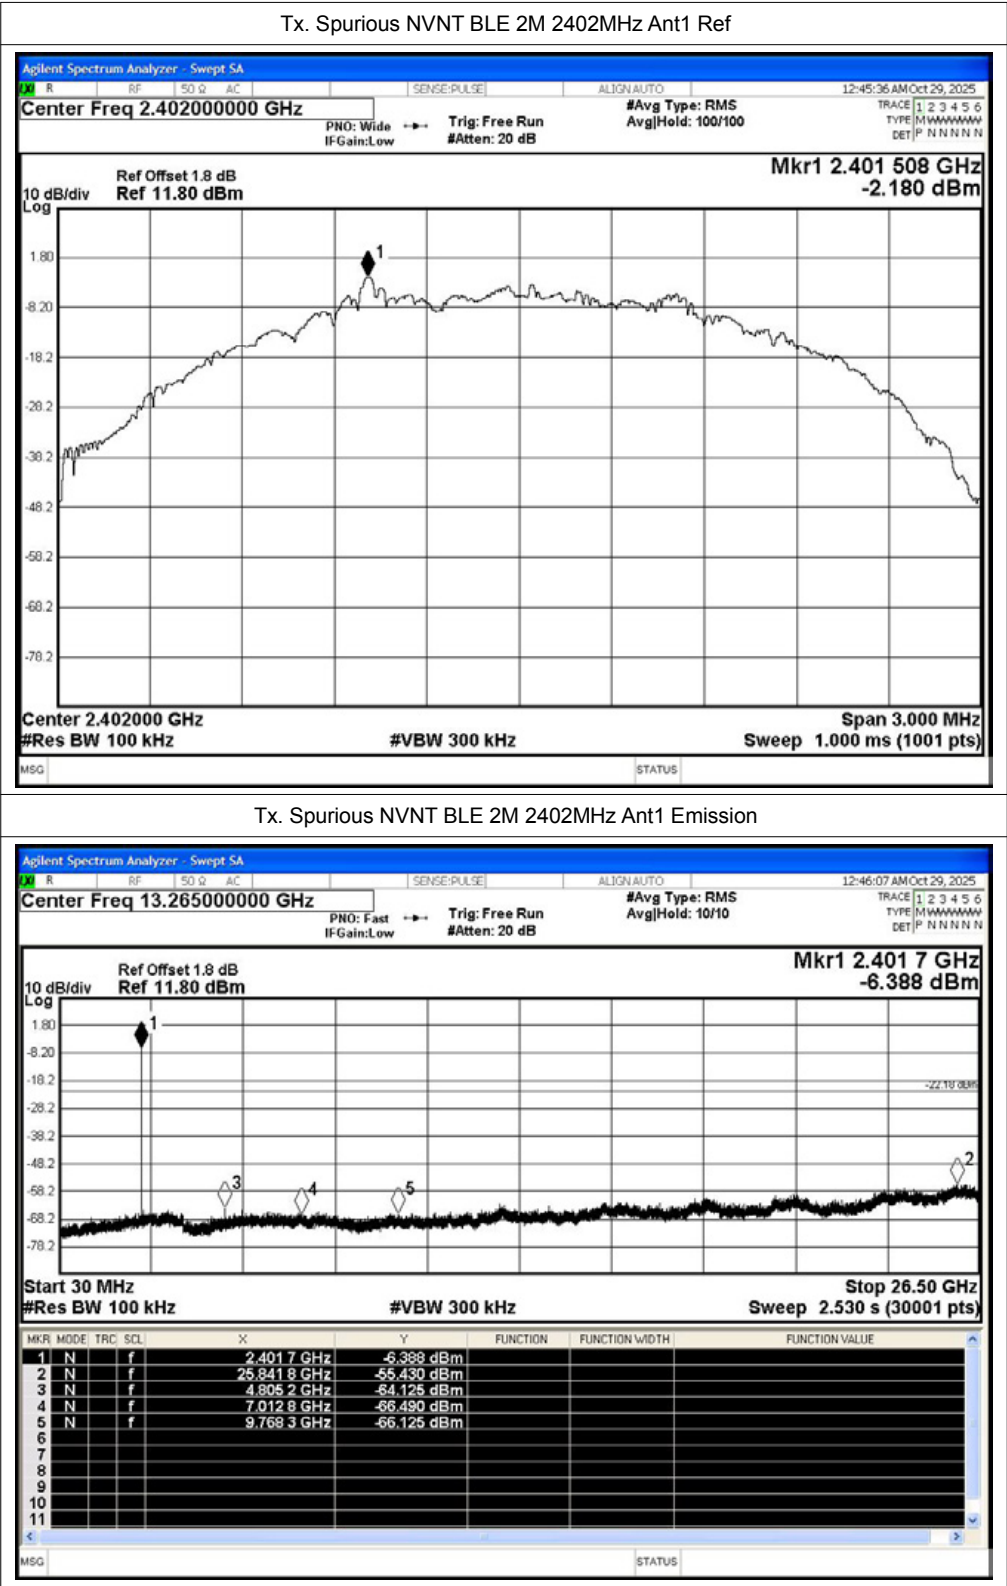


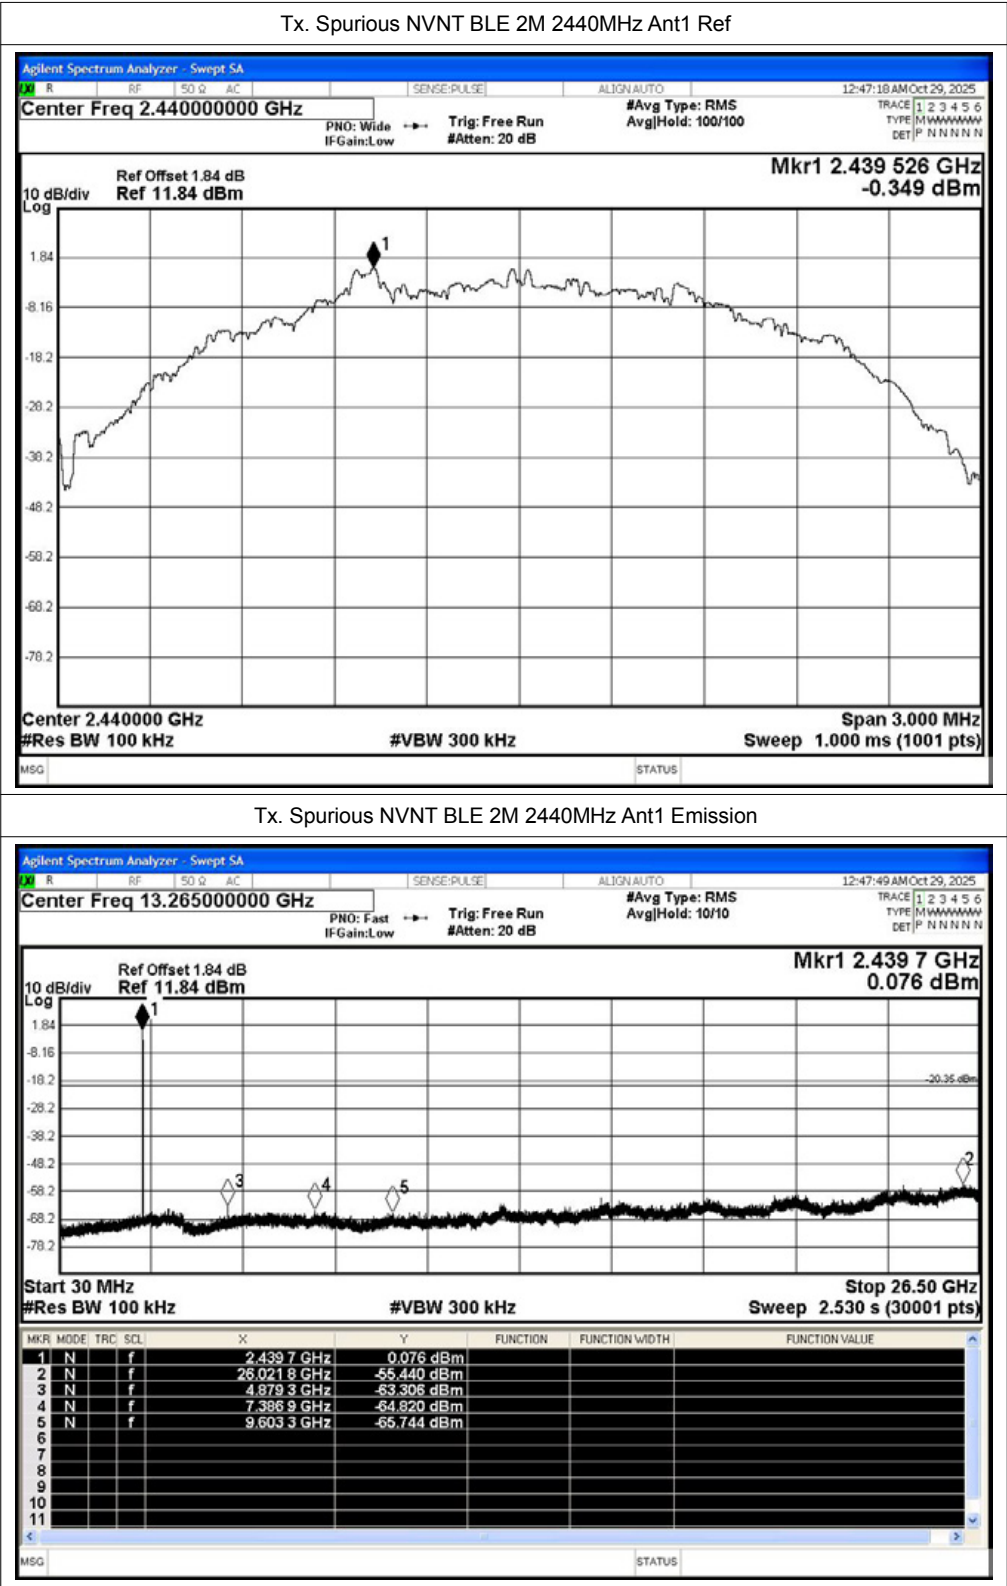


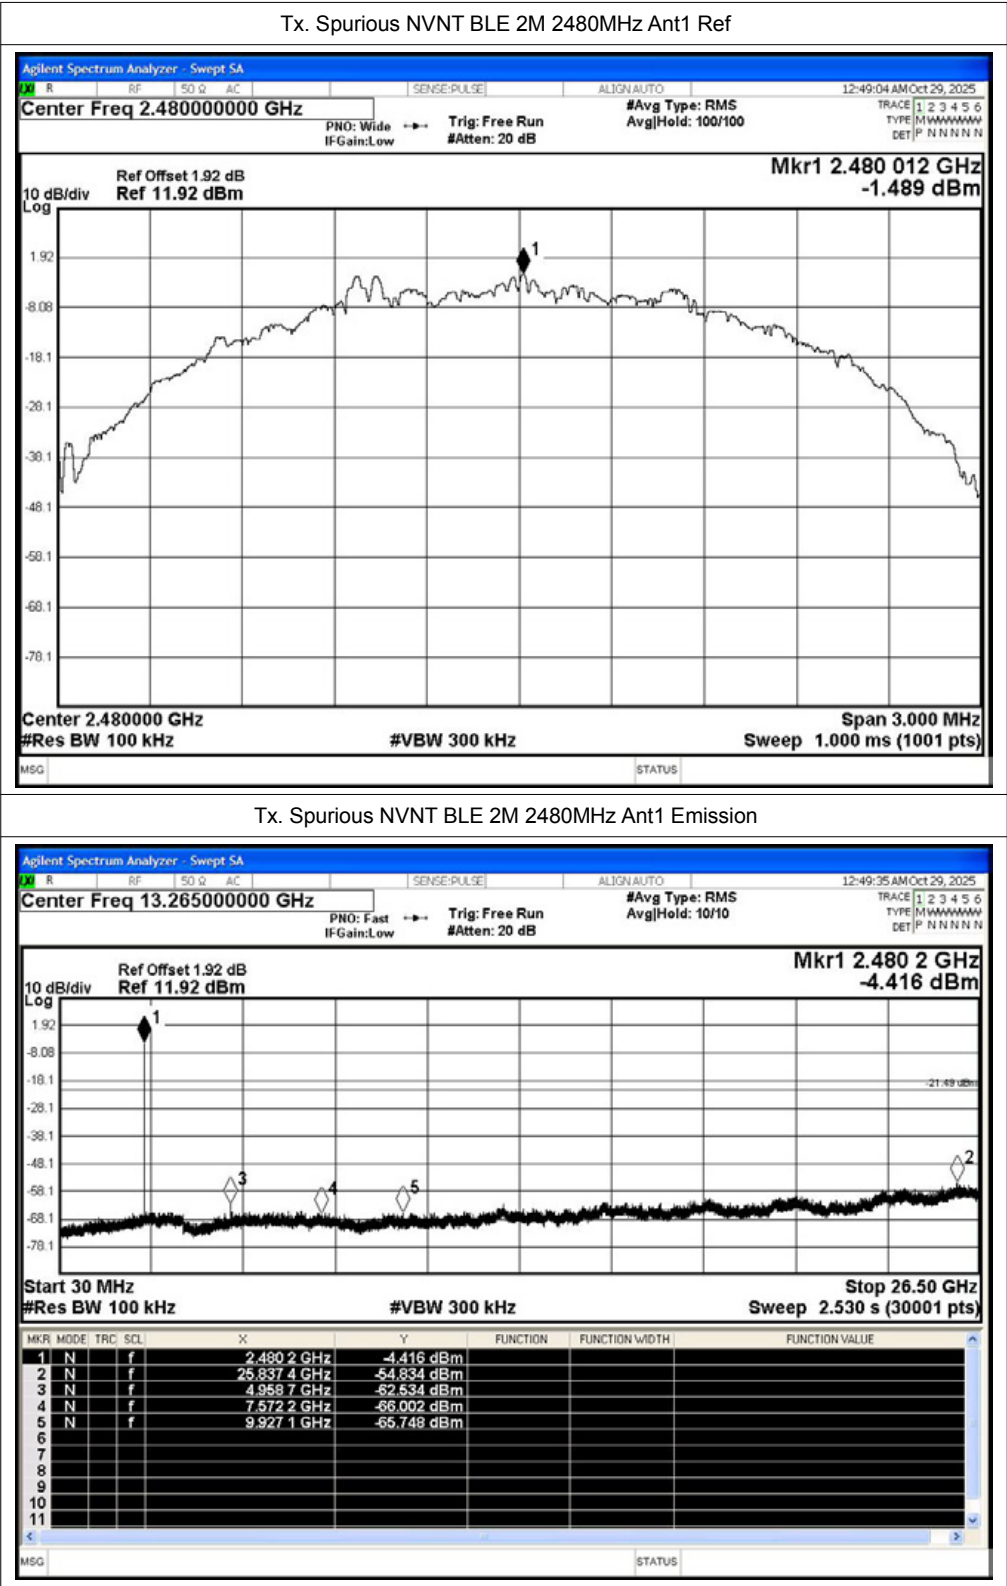


B.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	87.39	0.59	0.61
NVNT	BLE 1M	2440	Ant1	87.41	0.58	0.61
NVNT	BLE 1M	2480	Ant1	87.39	0.59	0.61
NVNT	BLE 2M	2402	Ant1	65.92	1.81	1.21
NVNT	BLE 2M	2440	Ant1	65.92	1.81	1.21
NVNT	BLE 2M	2480	Ant1	65.92	1.81	1.21

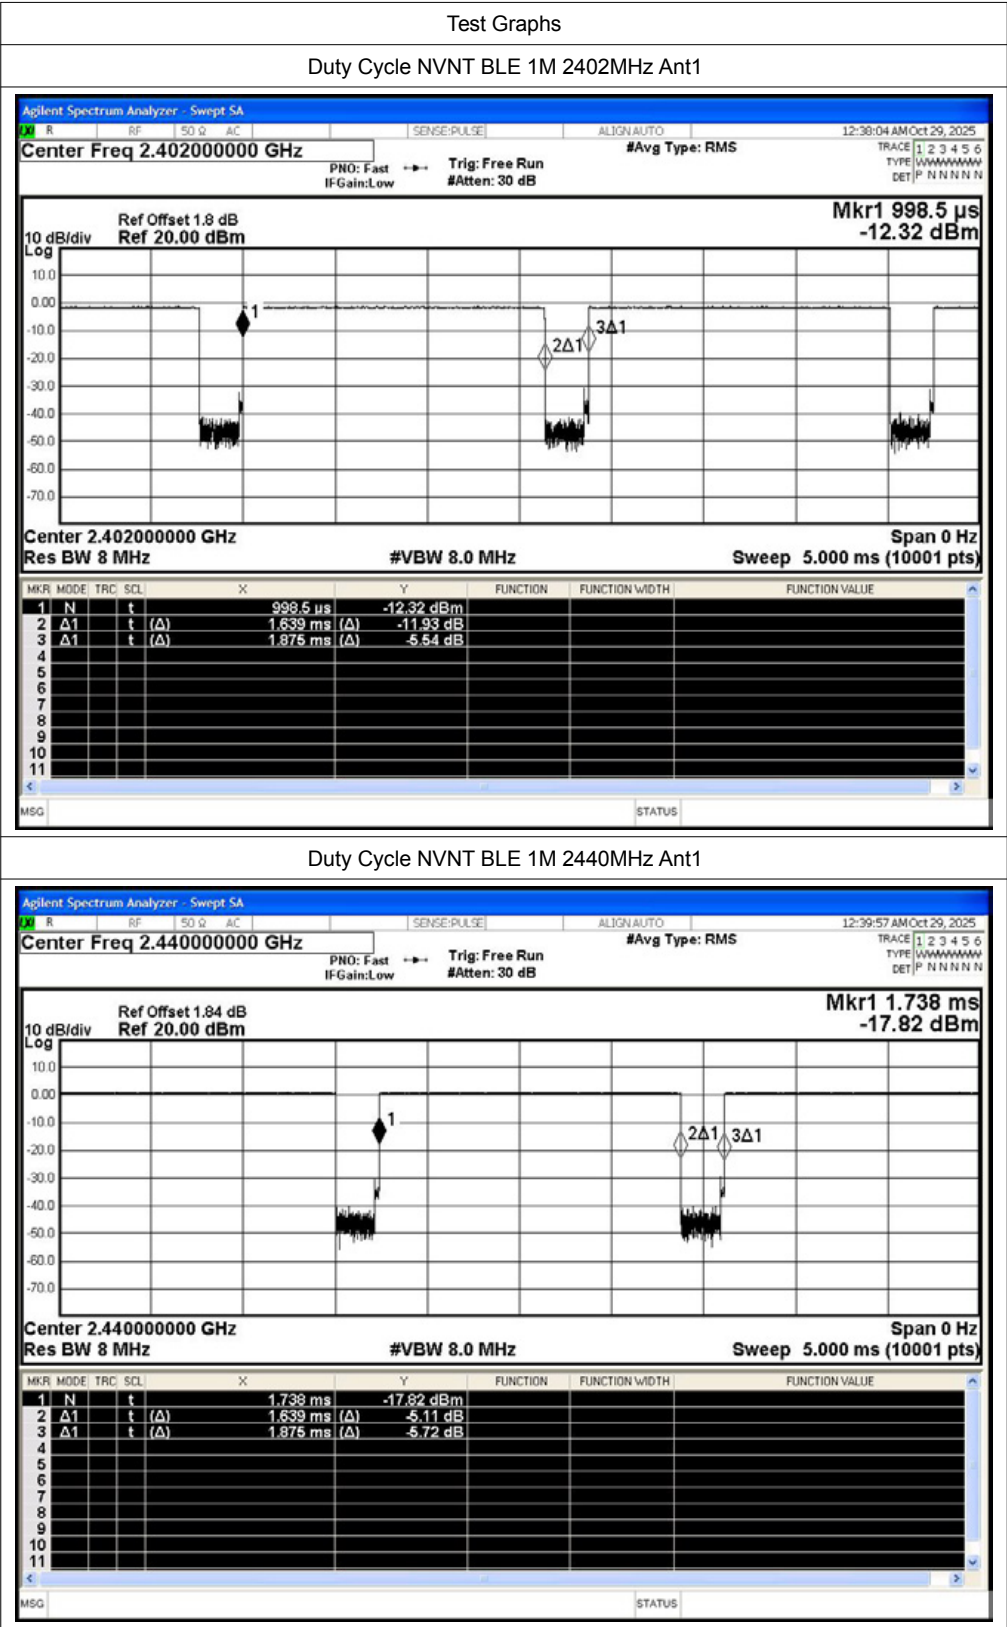

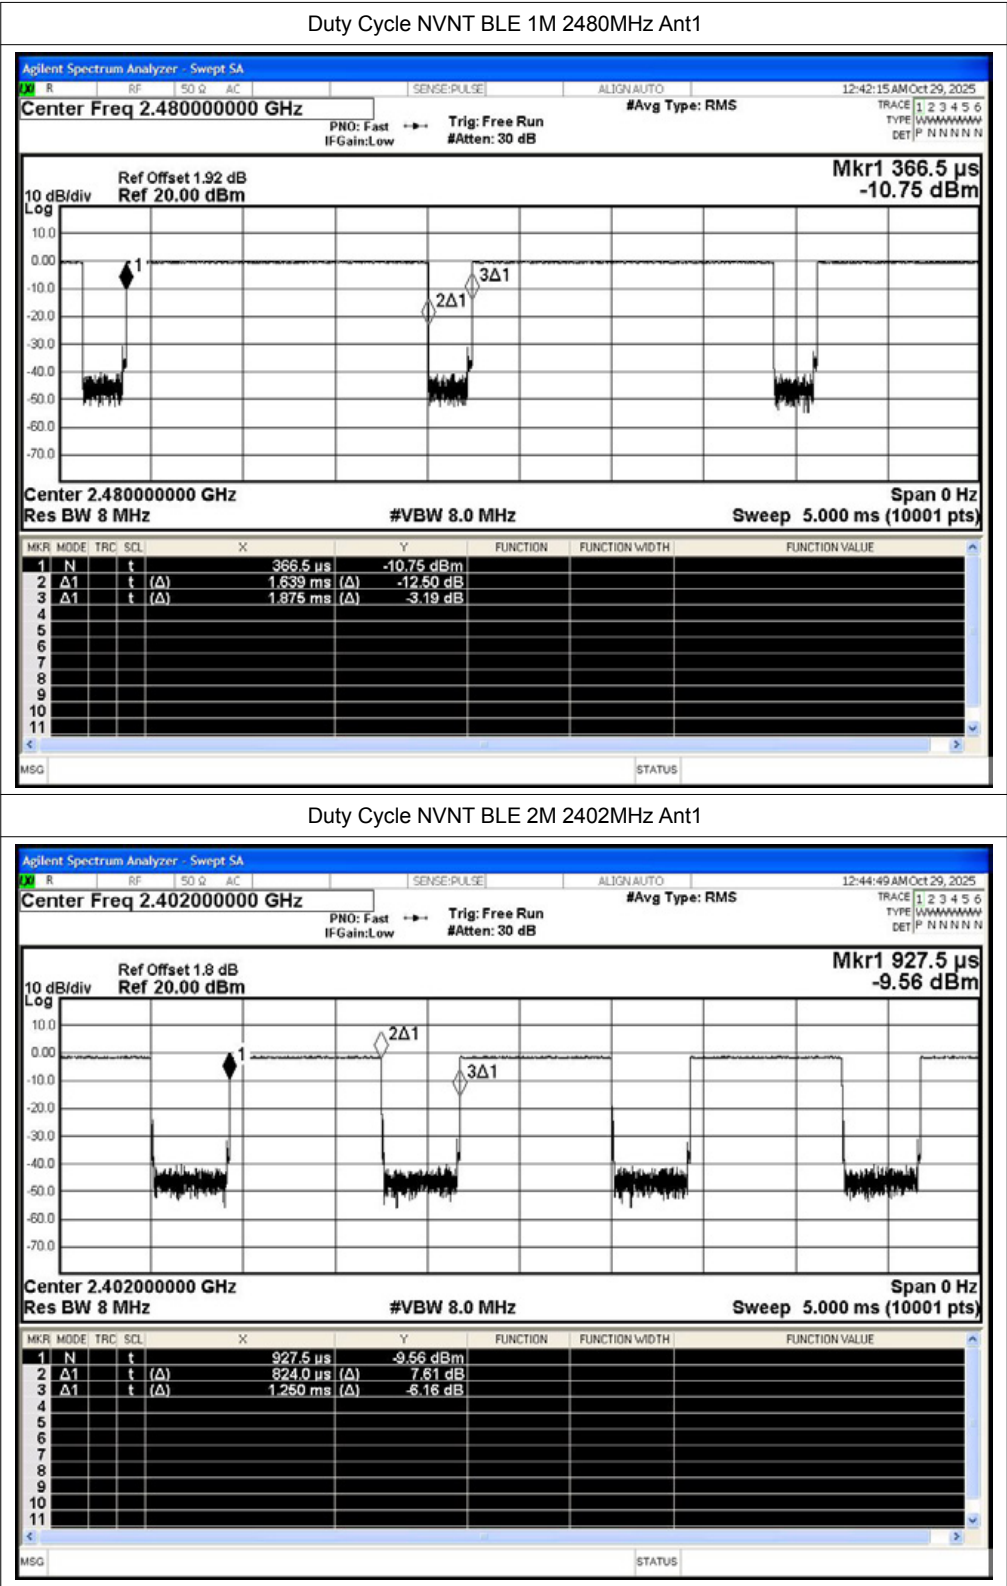

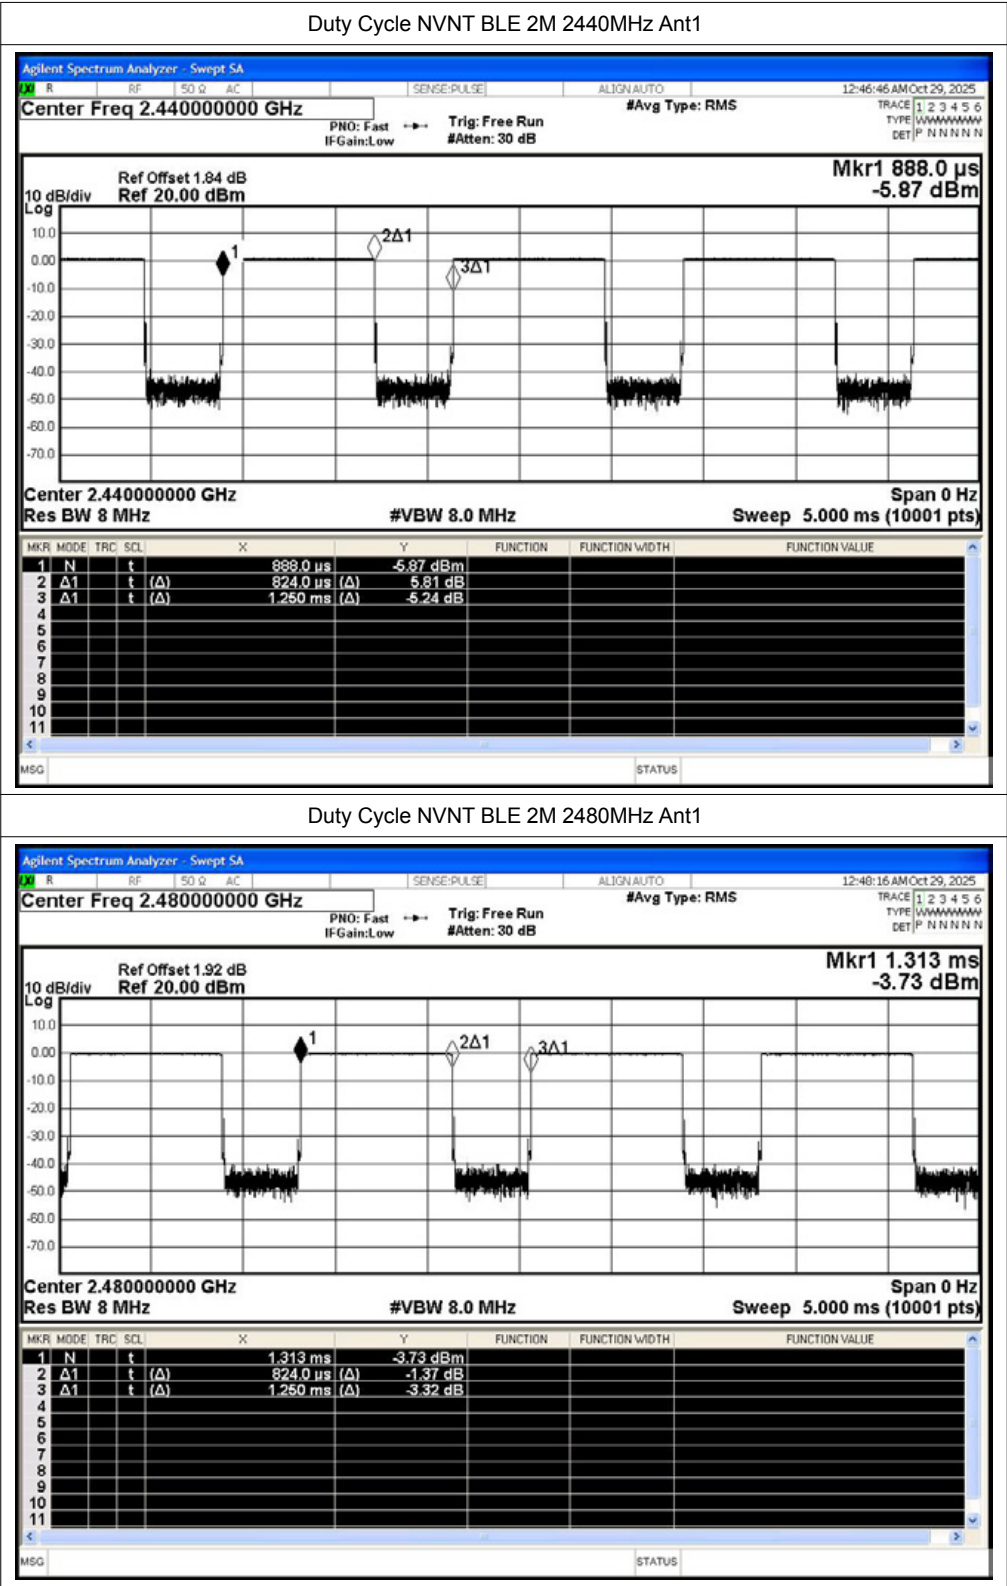

B.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-49.95	2	-	47.31	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-58.92	2	0.59	38.93	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2363.952	-48.23	2	-	49.03	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2388.912	-58.29	2	0.59	39.56	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-51.62	2	-	45.64	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-58.78	2	0.59	39.07	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-50.27	2	-	46.99	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-57.85	2	0.59	40	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2484.472	-44.83	2	-	52.43	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.848	-57.64	2	0.59	40.21	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-48.81	2	-	48.45	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-58.16	2	0.59	39.69	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2310	-49.81	2	-	47.45	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2310	-58.92	2	1.81	40.15	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2366.16	-48.35	2	-	48.91	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2349.744	-57.91	2	1.81	41.16	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2390	-49.26	2	-	48	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2390	-58.7	2	1.81	40.37	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-50.18	2	-	47.08	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-57.49	2	1.81	41.58	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2486.368	-44.6	2	-	52.66	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2495.152	-57.2	2	1.81	41.87	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2500	-50.21	2	-	47.05	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2500	-58.39	2	1.81	40.68	Average	54	Pass

