



Inverted F Antenna Specification Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2400MHz	2500MHz	2400MHz	2400MHz	2500MHz
	-1.26	-0.76	2.5	-5.25	-2.46	-1.86
MAX.Gain	2.5					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-ditectional					
Impedance	50 ohm					
Antenna I ength	34.70MM					
Manufacture						

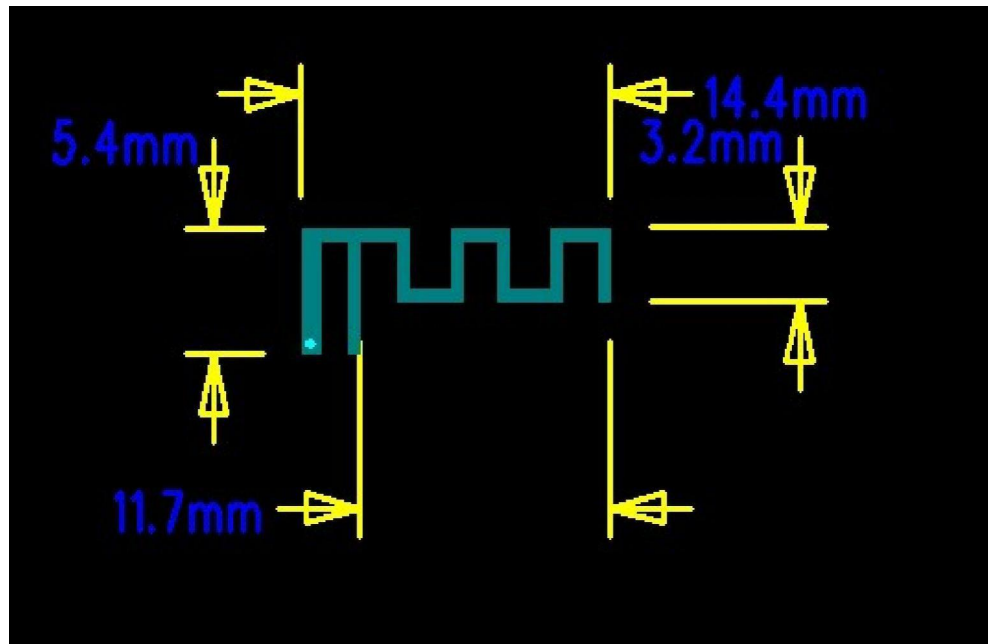


天线无源 S 参数:
Antenna passive S-parameters:
驻波比 (VSWR)、回波损耗 (Return Loss) 及史密斯圆图 (Smith)

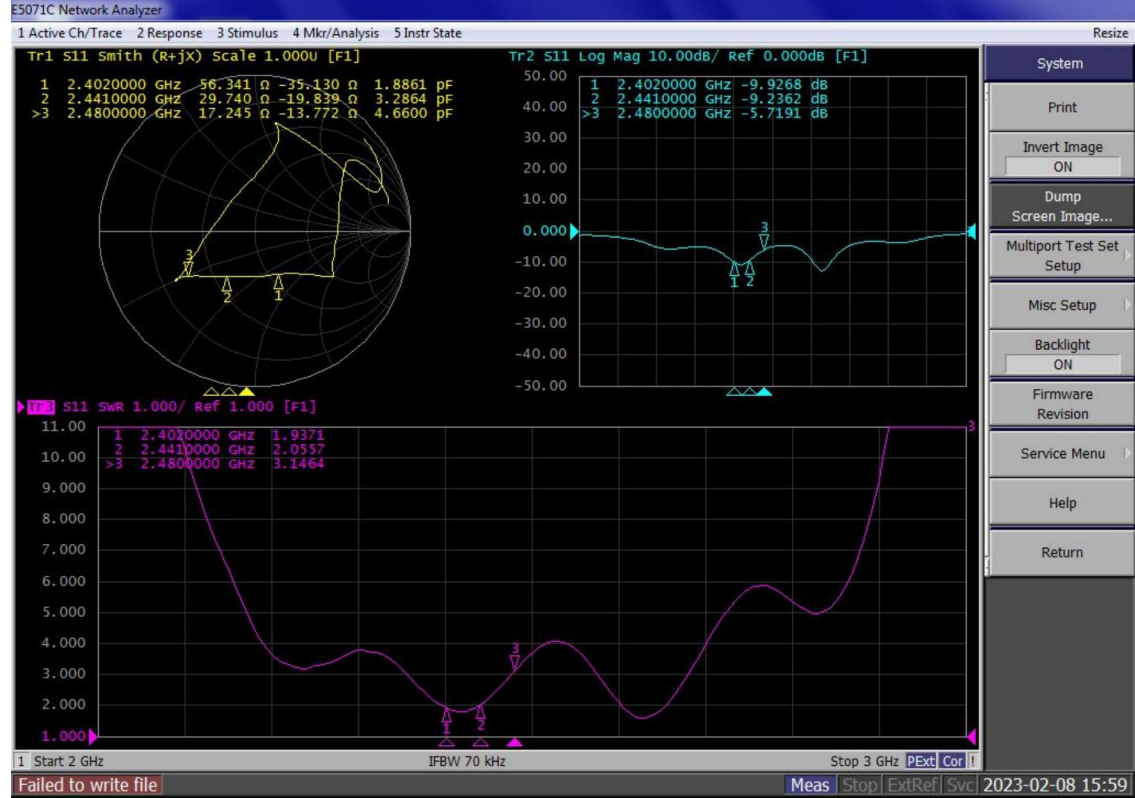


天线效率及增益:
Antenna efficiency and gain:

Frequency (MHz)	Gain (dBi)	Effciency (%)	AverageGain (dBi)	Efficiency (dB)
2400	1.433	59.329%	-2.717	-2.267
2410	0.927	51.861%	-3.416	-2.852
2420	0.829	52.112%	-3.166	-2.831
2430	0.881	49.299%	-3.258	-3.072
2440	1.192	50.672%	-3.144	-2.952
2450	1.688	53.067%	-2.735	-2.752
2460	2.194	59.423%	-2.276	-2.260
2470	2.118	56.680%	-2.438	-2.466
2480	2.499	61.727%	-2.112	-2.095
Average	1.529	54.908%	-2.806	-2.616
Peak	2.499	61.727%	-2.112	-2.095


天线 2440MHz 2D-Theta Pattern

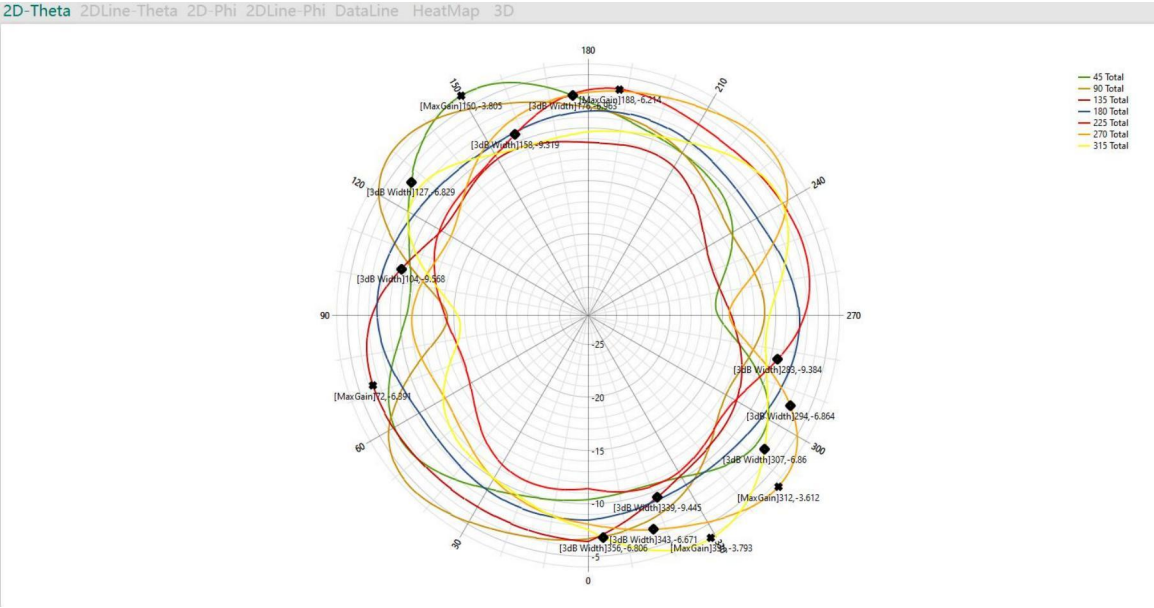


天线 2440MHz 2D-Phi Pattern

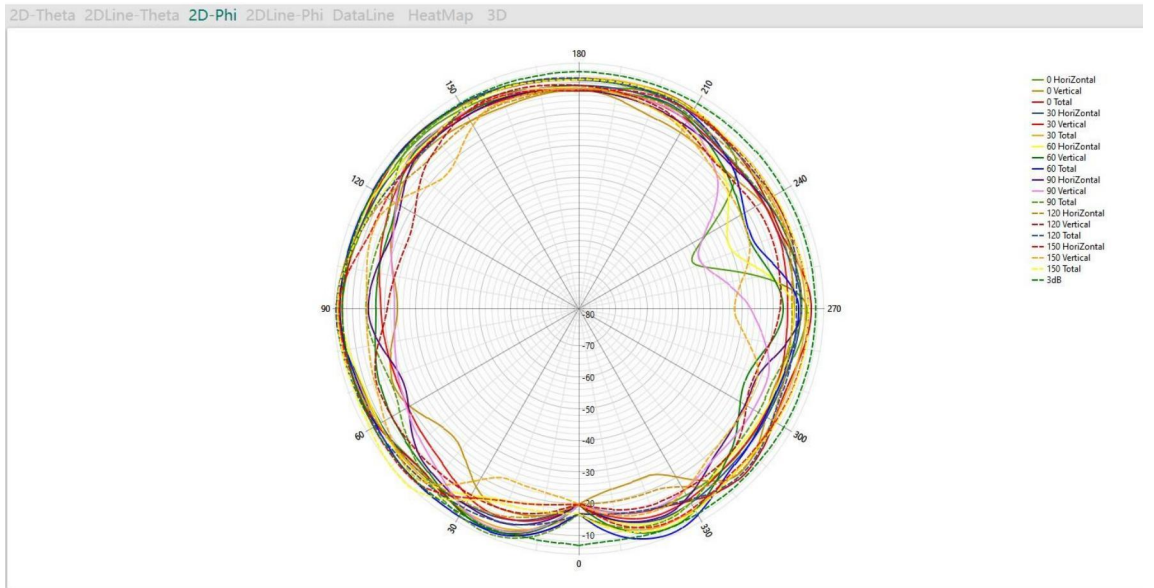

天线 2440MHz 3D-Horizontal Pattern

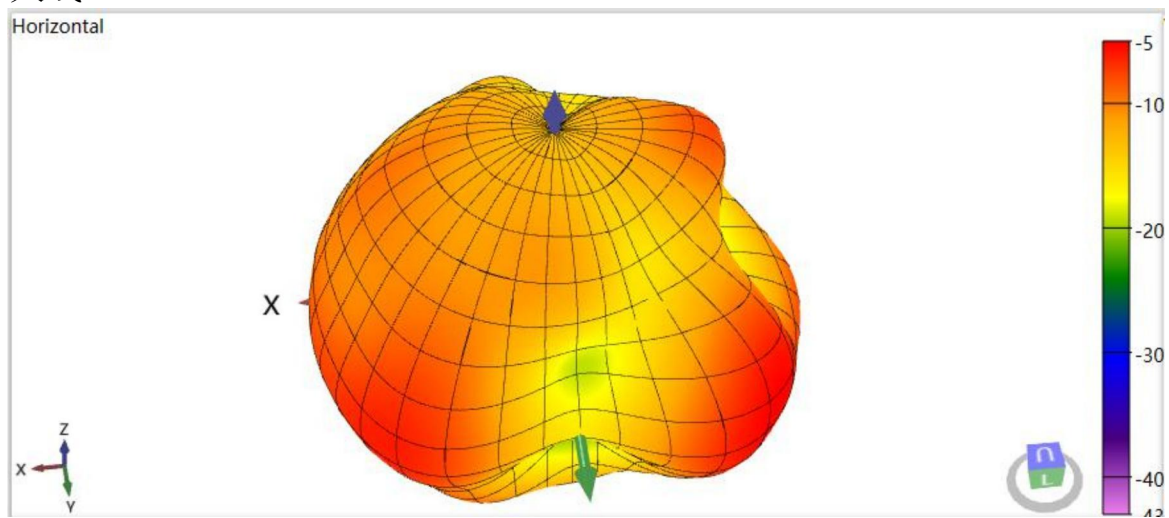

天线 2440MHz 3D-Vertical Pattern

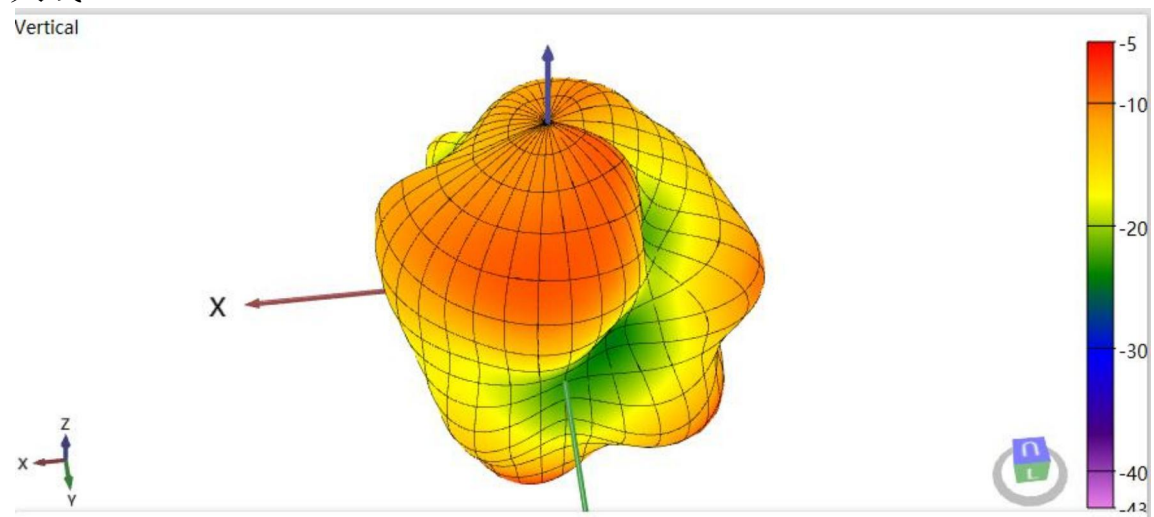

2440MHz 3D-Total Pattern

