9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

A) Set the RBW = 100KHz.
B) Set the VBW = 300KHz.
C) Sweep time = auto couple.
D) Detector function = peak.
E) Trace mode = max hold.
F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Test plot as follows:

ANT1

802.11b Modulation

Spurious emission		
Low Channel		

Middle Channel		
		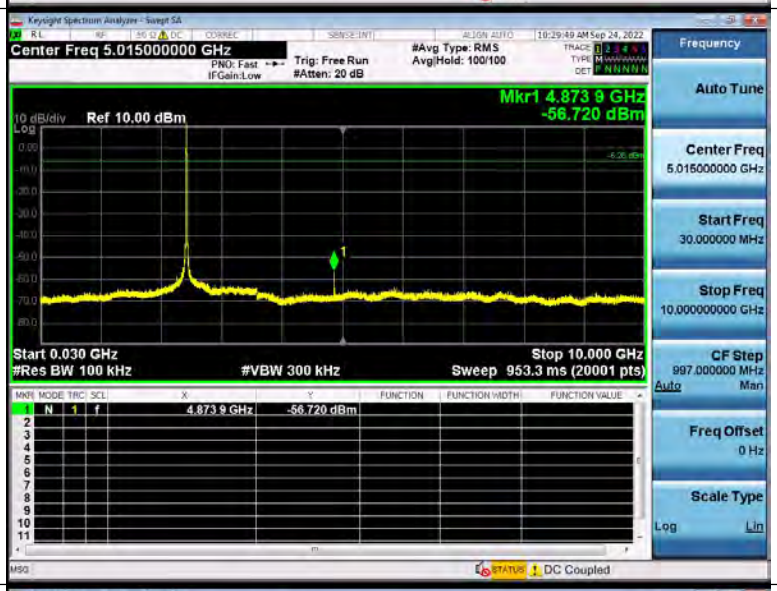

High Channel		
		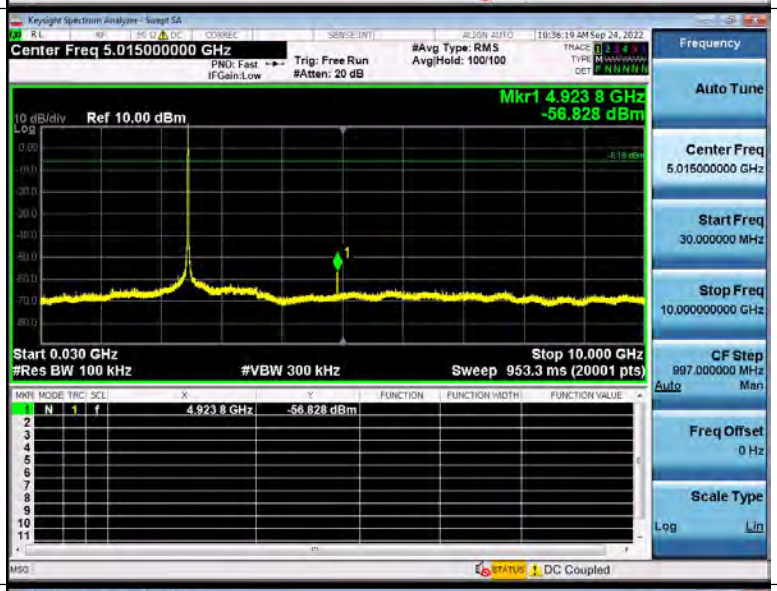

Lowest Channel	Highest Channel
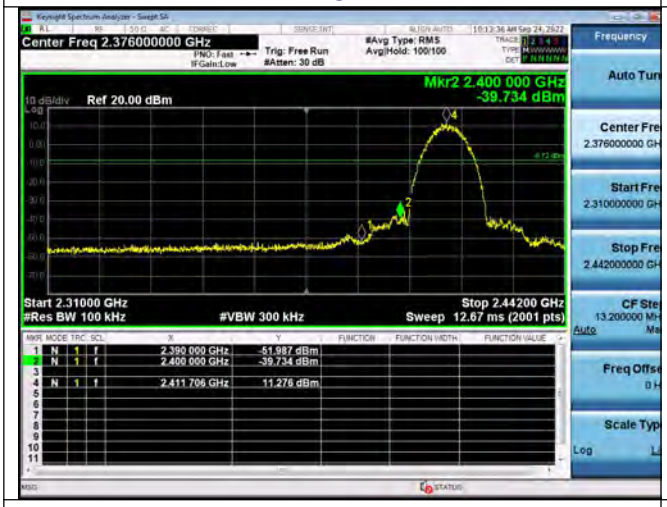	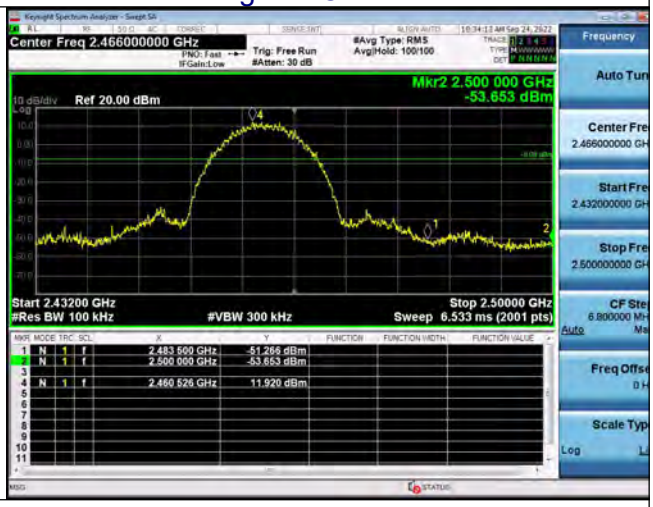
Left Band Edge	Right Band Edge

802.11g Modulation

Spurious emission		
Low Channel		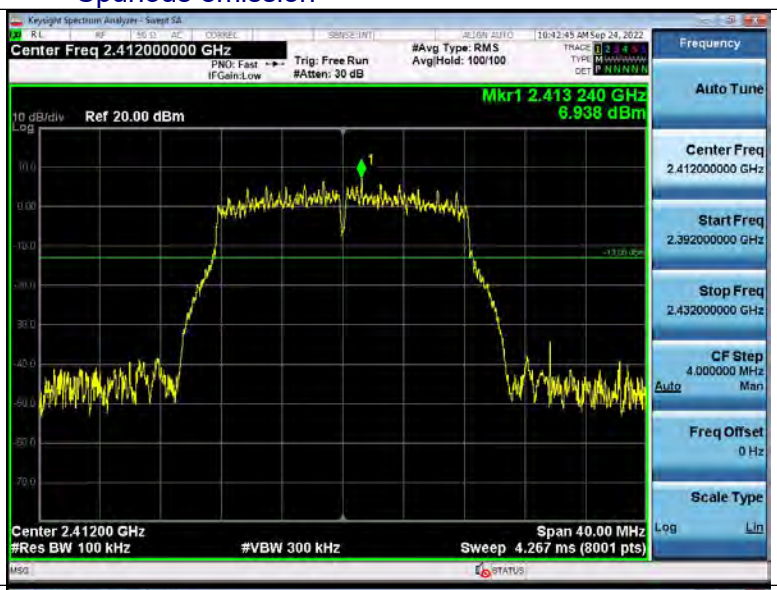
		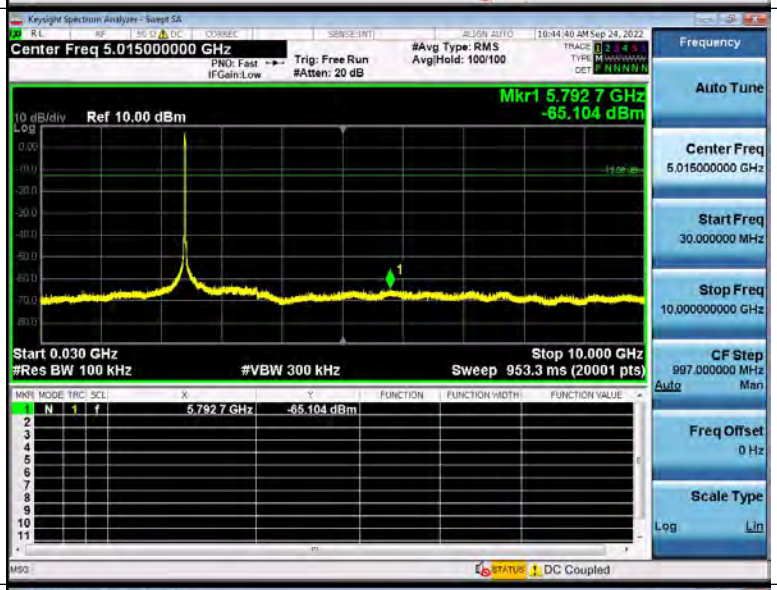

Middle Channel		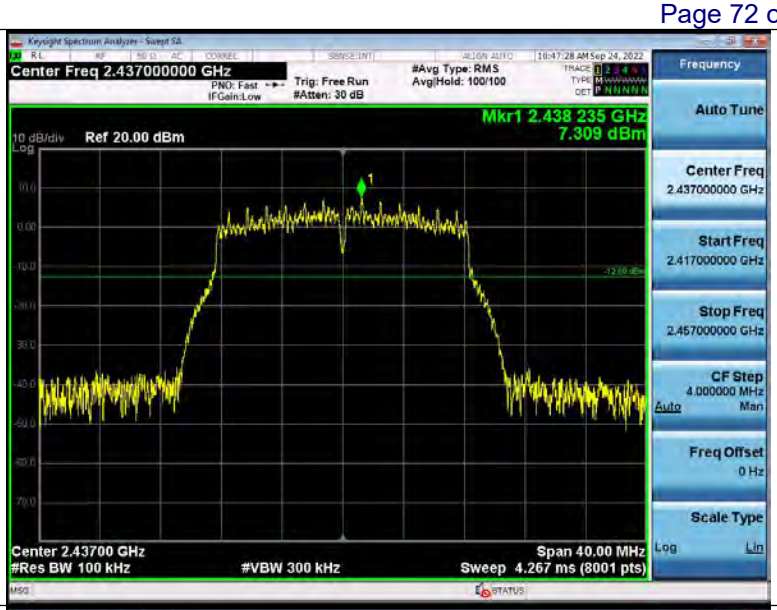
		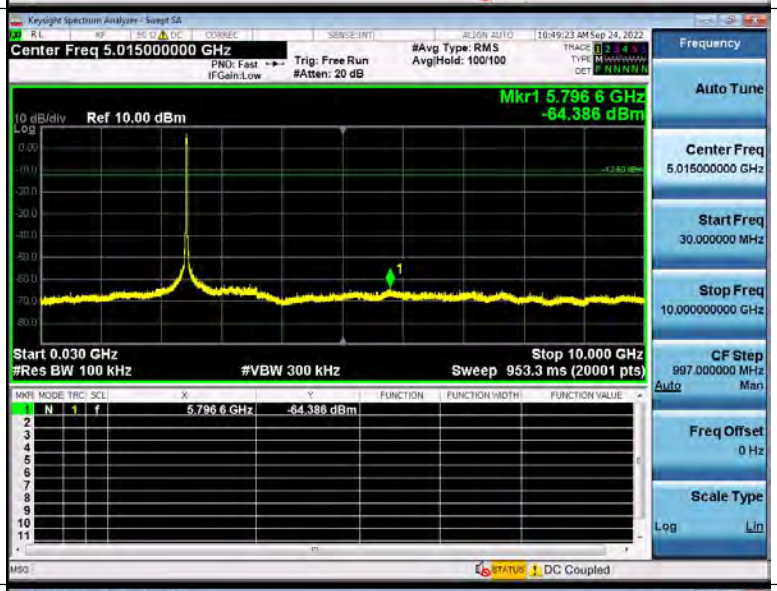

High Channel		
		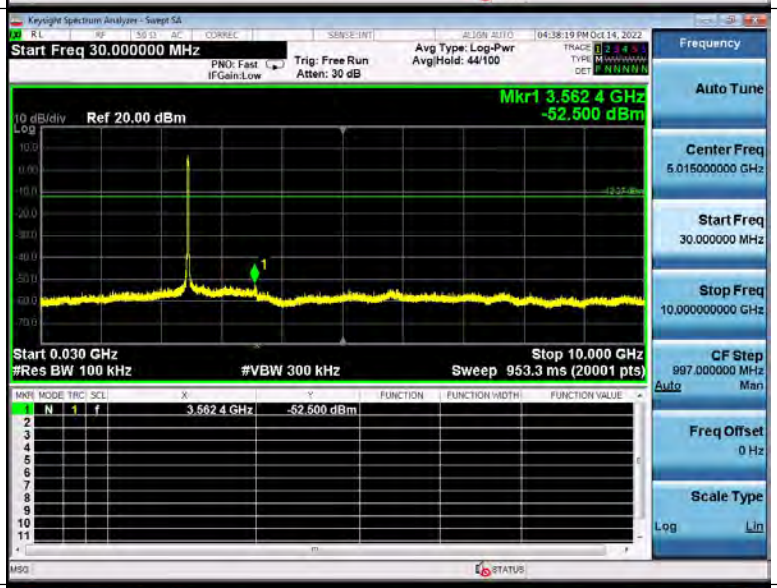

Lowest Channel	Highest Channel
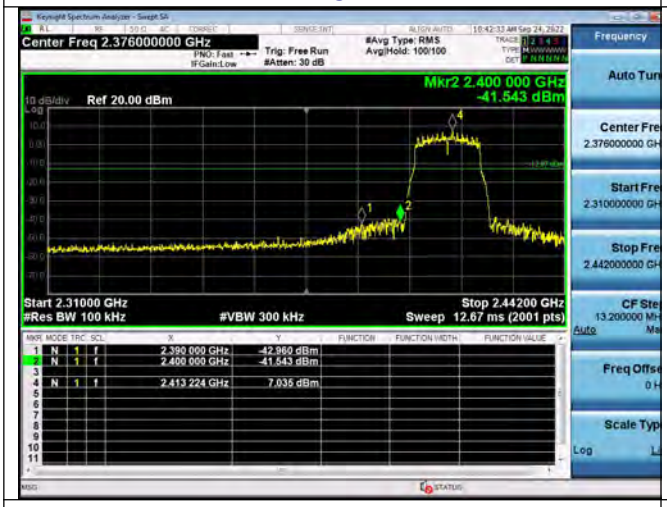	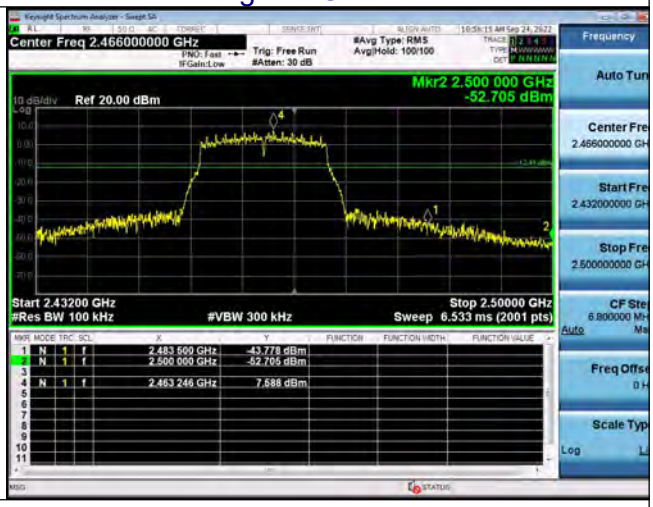
Left Band Edge	Right Band Edge

802.11n20 Modulation

Spurious emission	
Low Channel	
	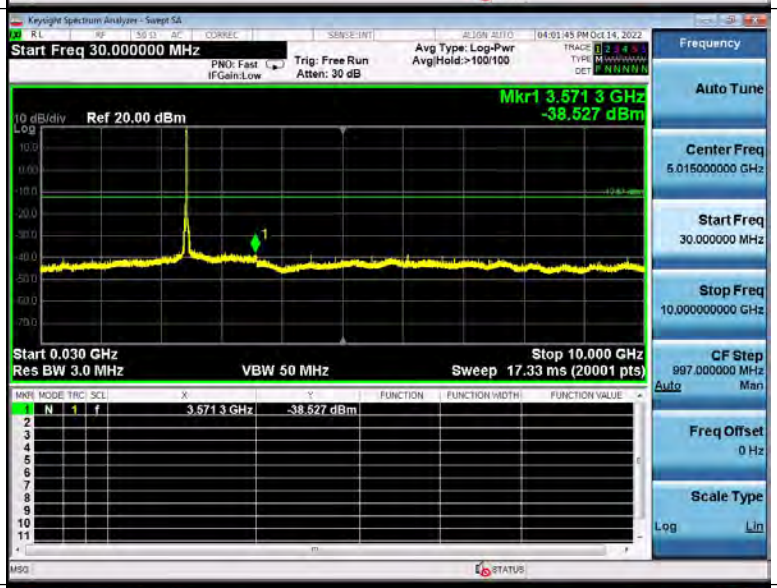

Middle Channel		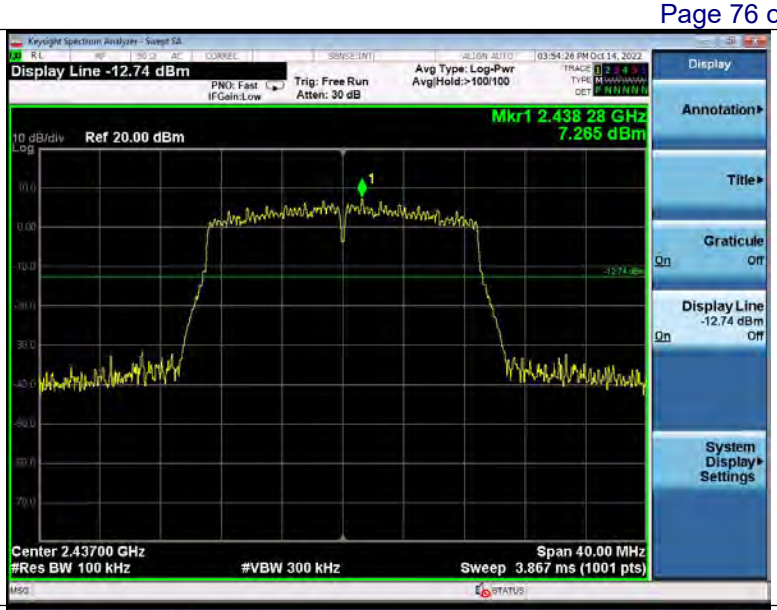
		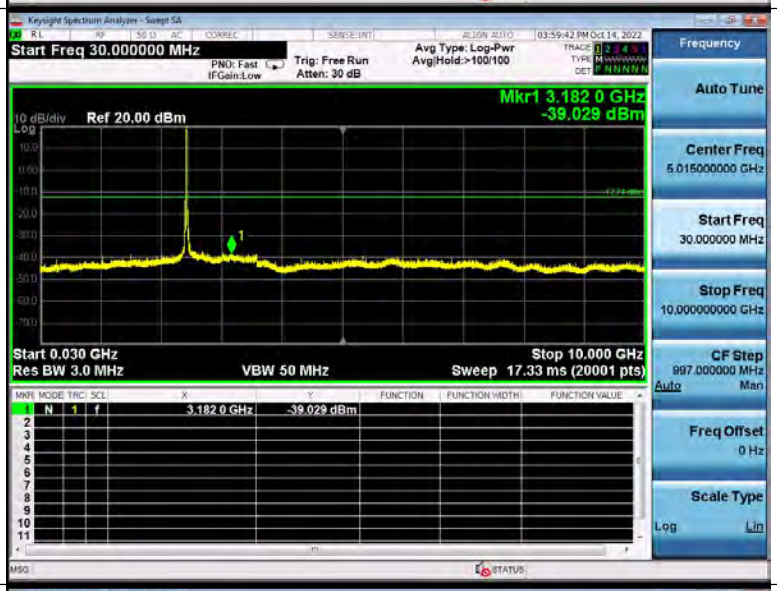

High Channel		
		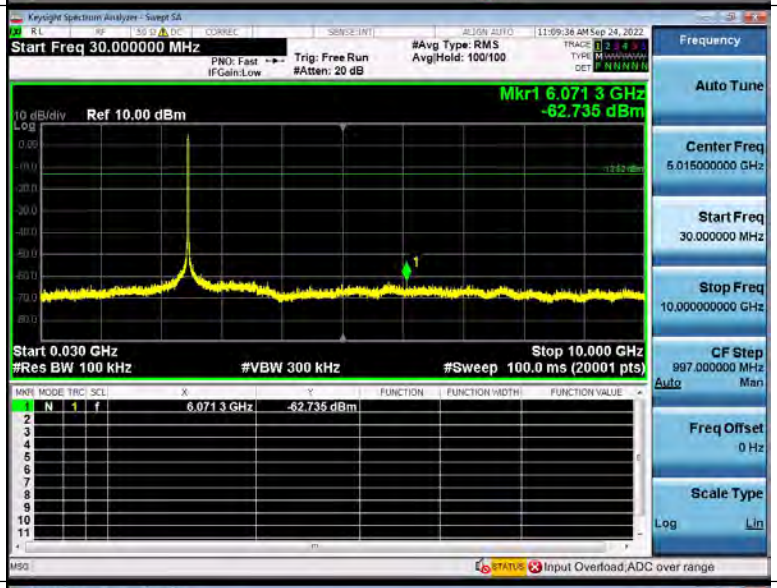

Lowest Channel	Highest Channel
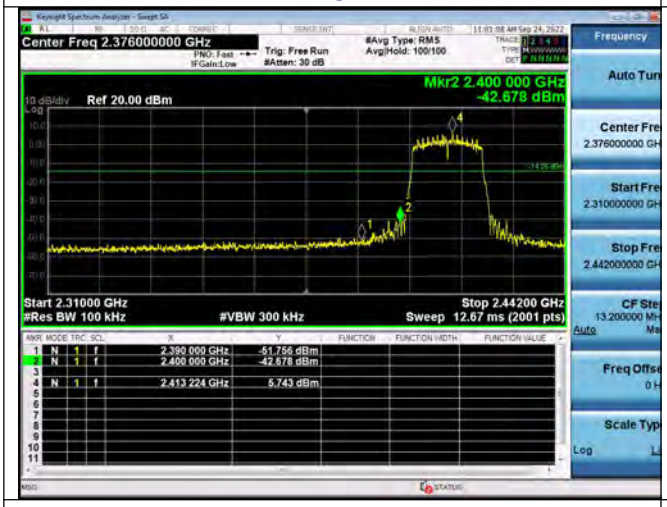	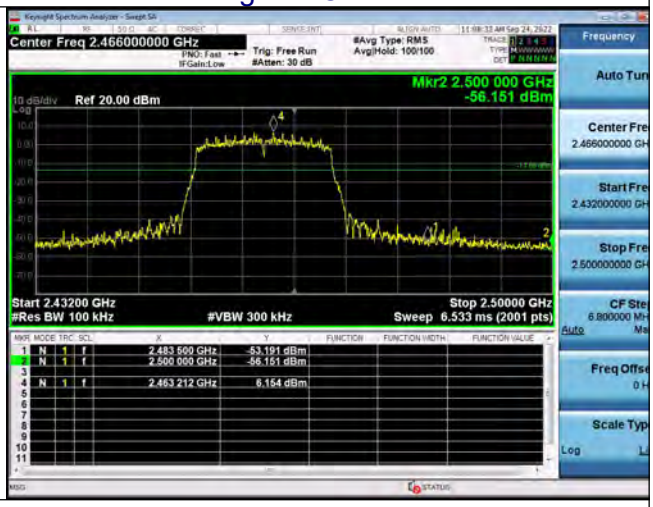
Left Band Edge	Right Band Edge

802.11n40 Modulation

Spurious emission	
Low Channel	
	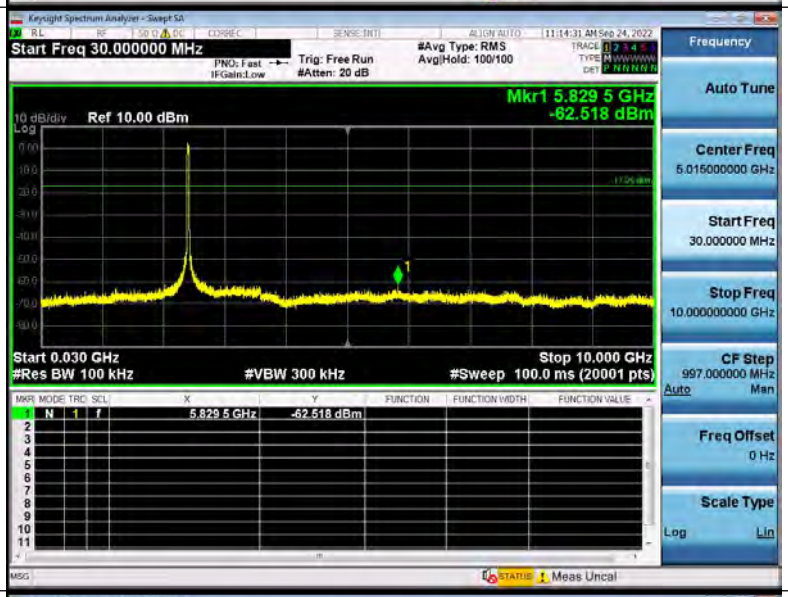

Middle Channel		
		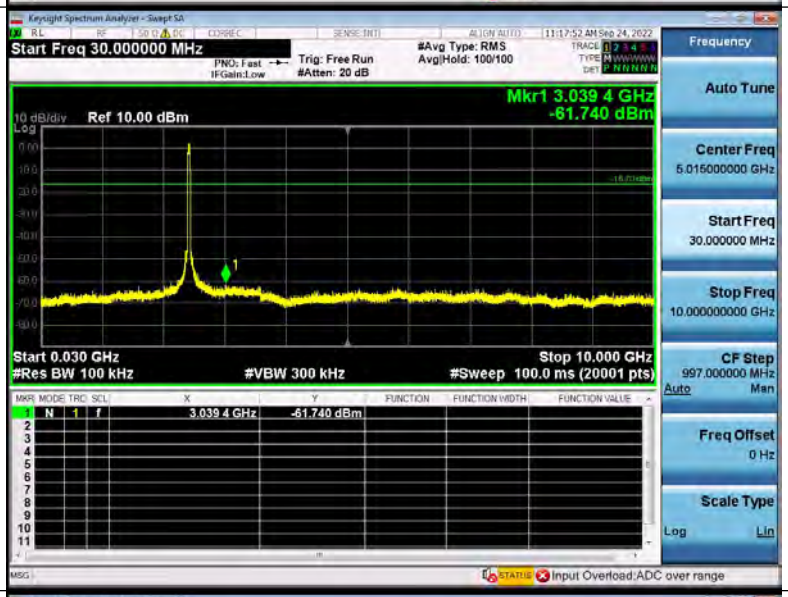

High Channel		
		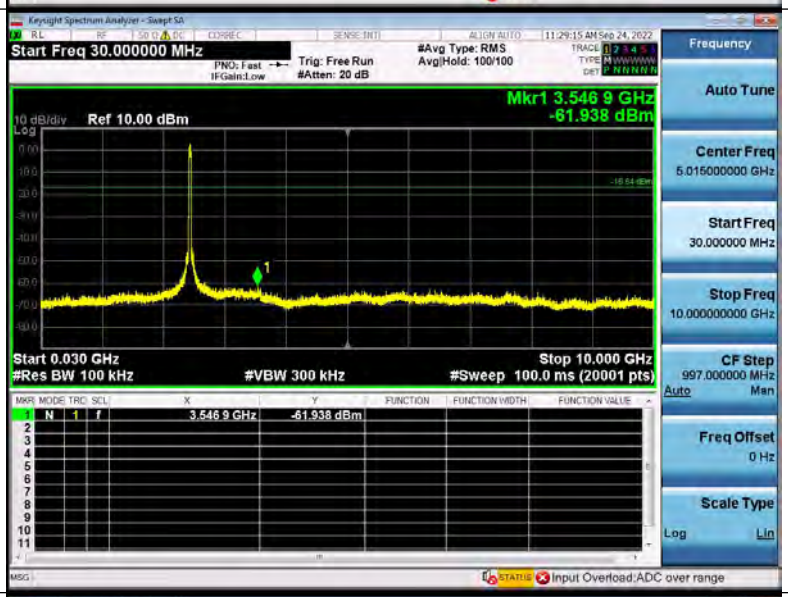

Lowest Channel	Highest Channel
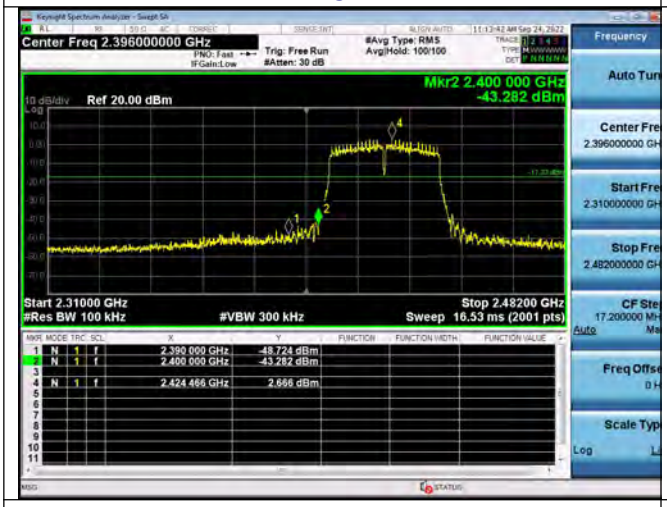	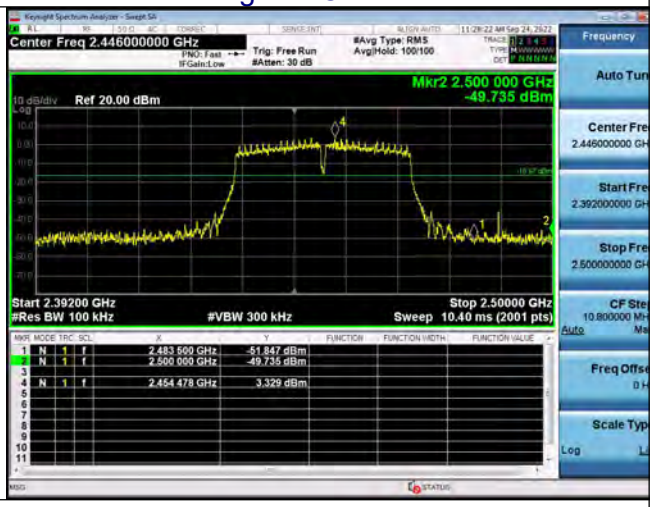
Left Band Edge	Right Band Edge

802.11ax20 Modulation

Spurious emission		
Low Channel		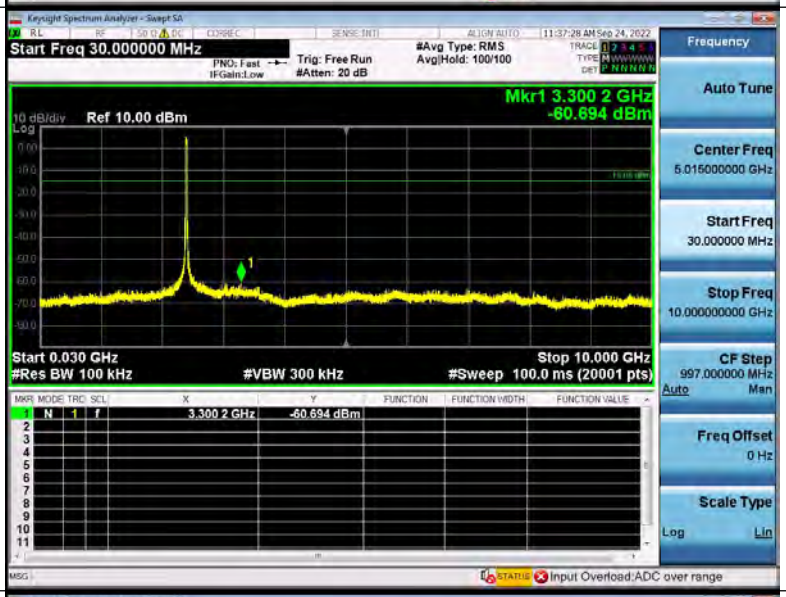

Middle Channel		
		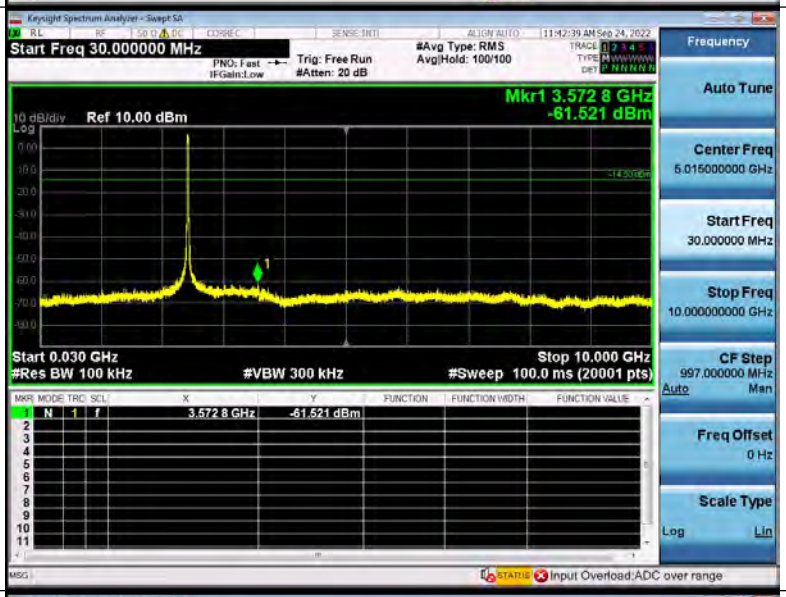

High Channel		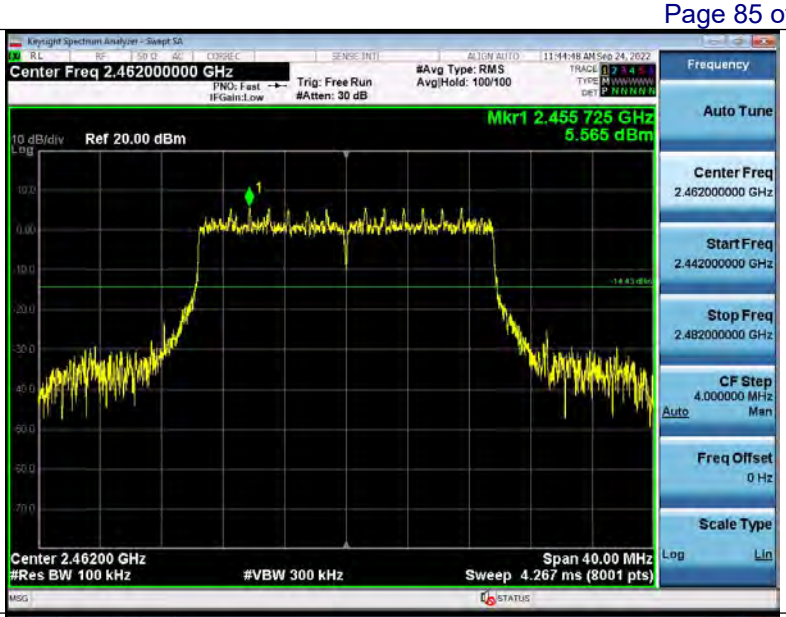
		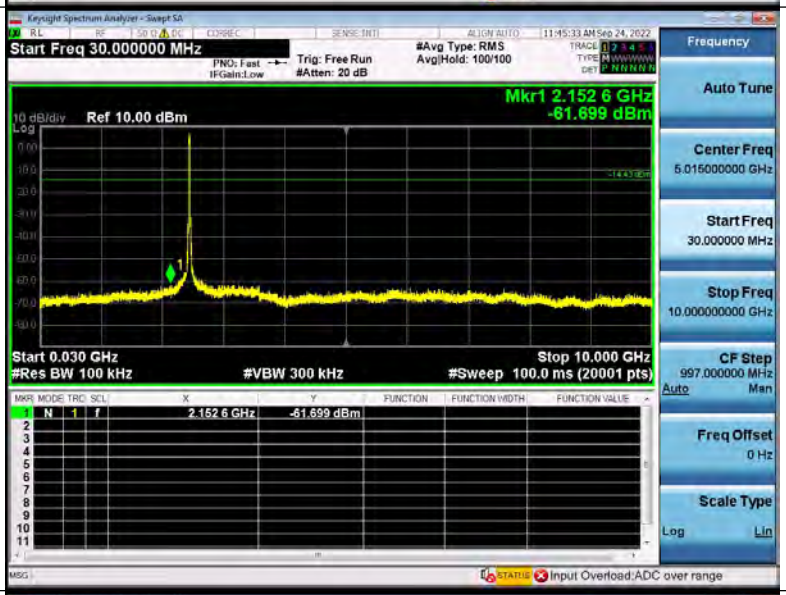

Lowest Channel	Highest Channel
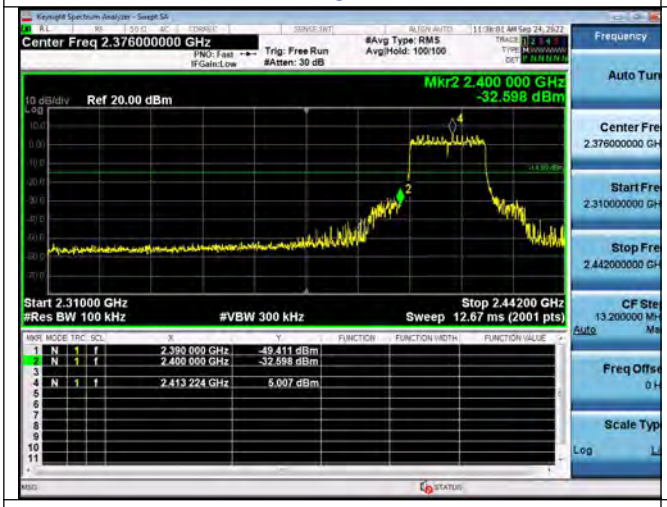	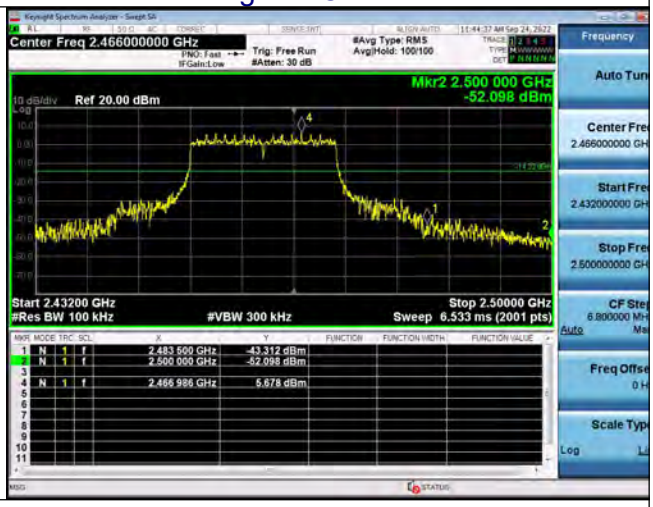
Left Band Edge	Right Band Edge

802.11ax40 Modulation

Spurious emission	
Low Channel	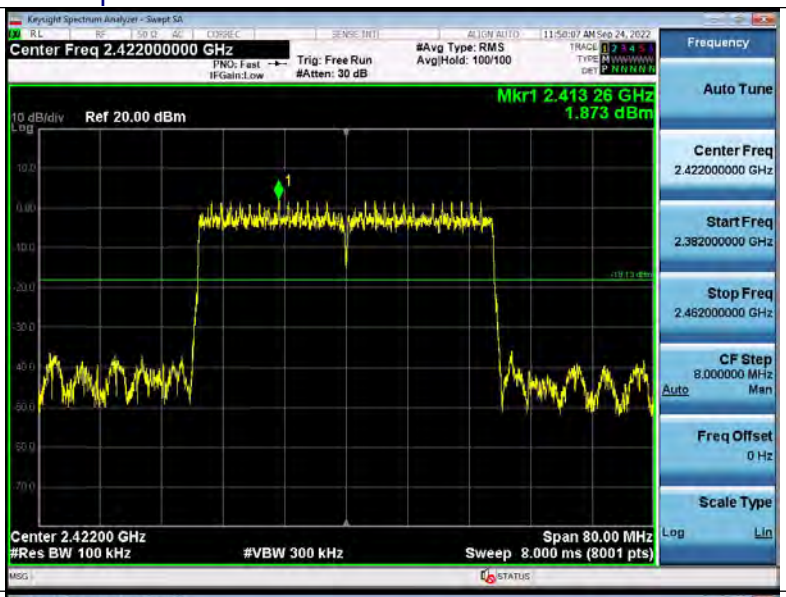
	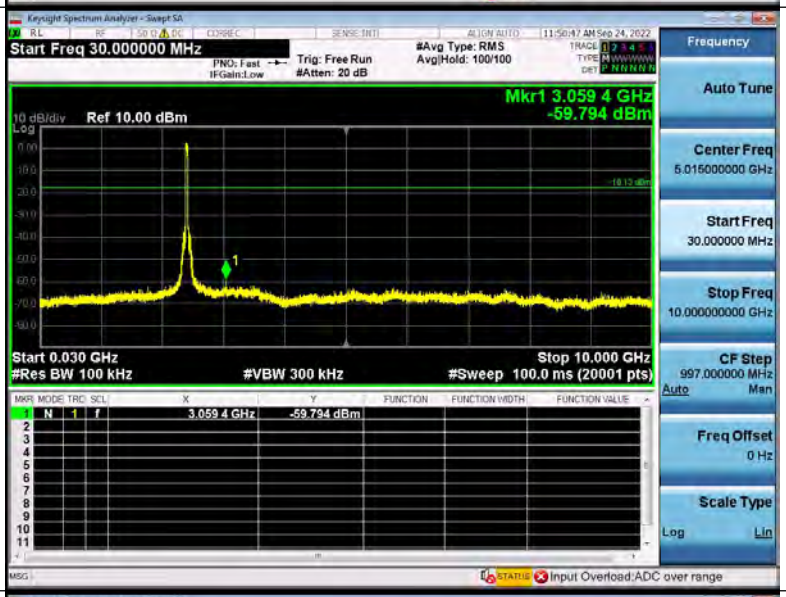

Middle Channel		

High Channel		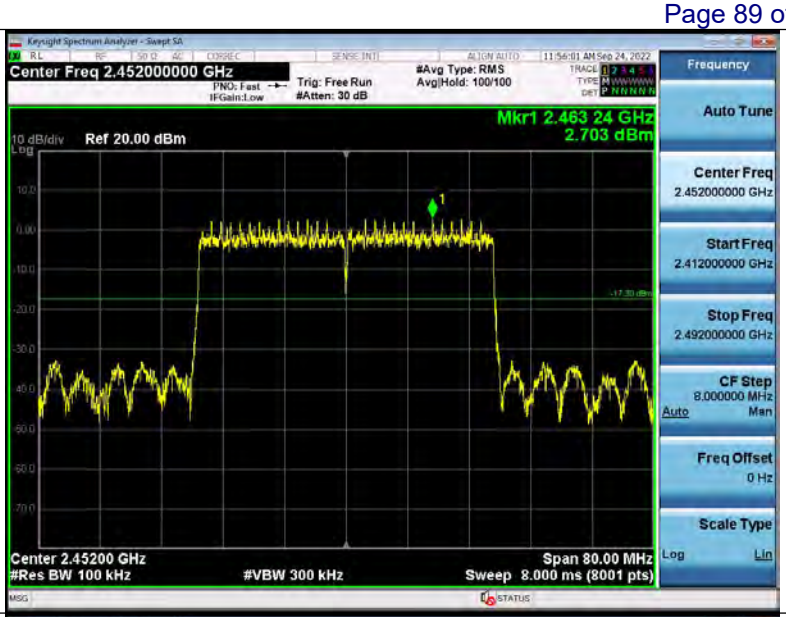
		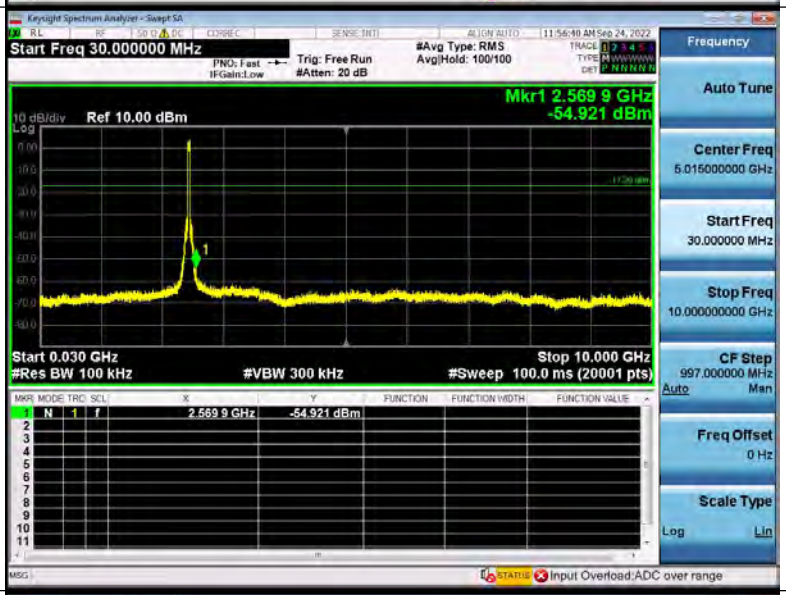

Lowest Channel	Highest Channel
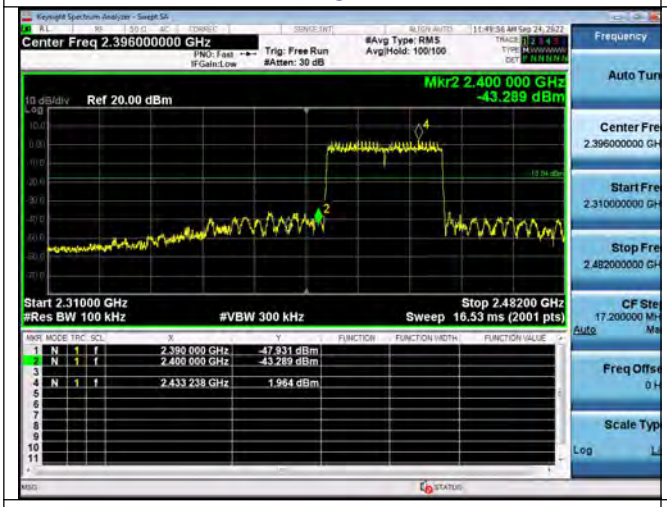	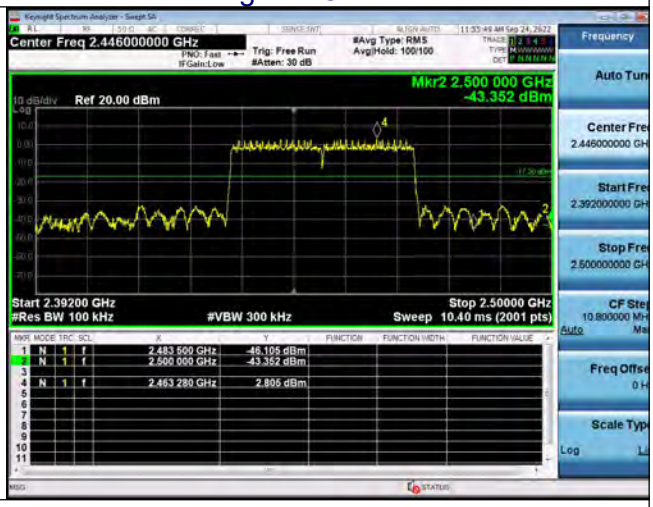
Left Band Edge	Right Band Edge

ANT2

802.11b Modulation

Spurious emission		
Low Channel		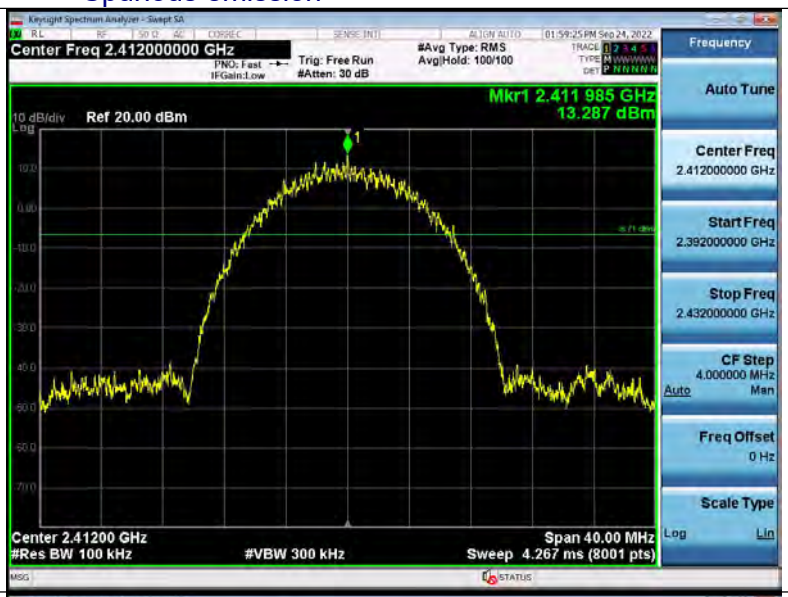

Middle Channel		
		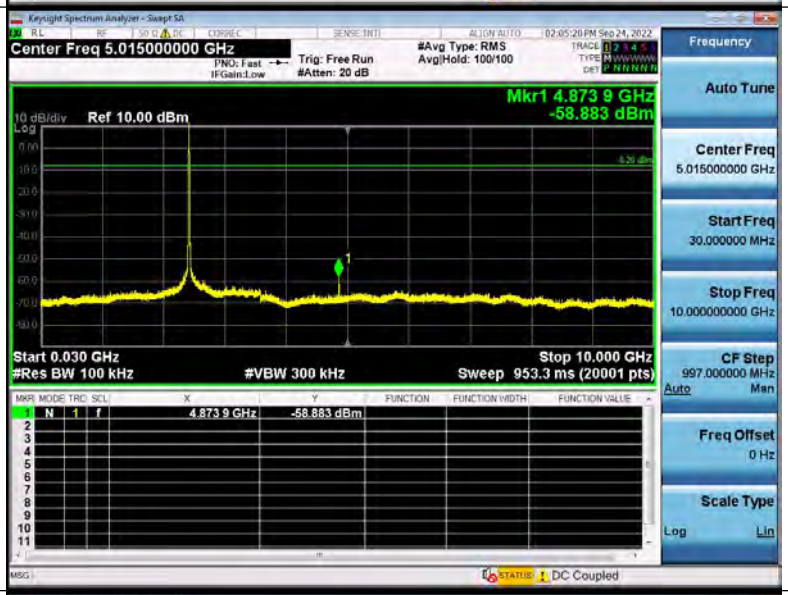

High Channel		
		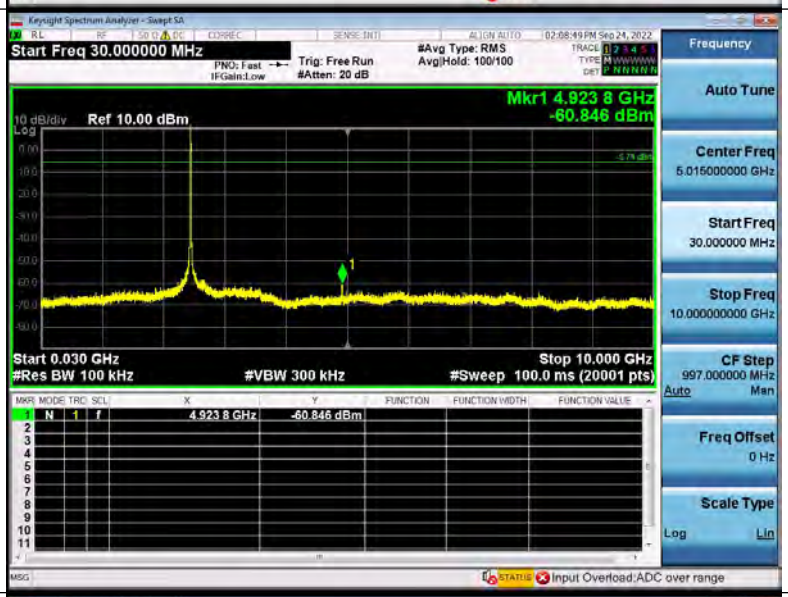

Lowest Channel	Highest Channel
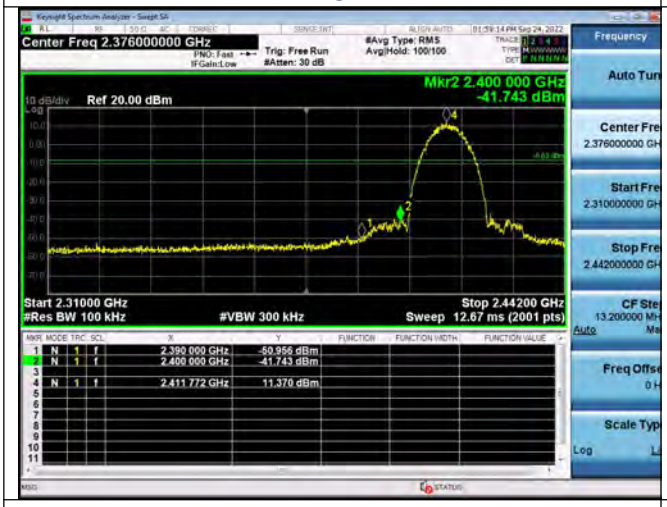	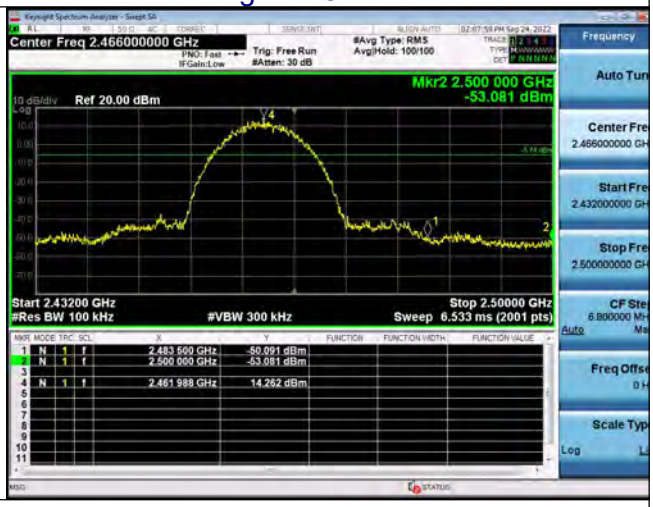
Left Band Edge	Right Band Edge

802.11g Modulation

Spurious emission		
Low Channel		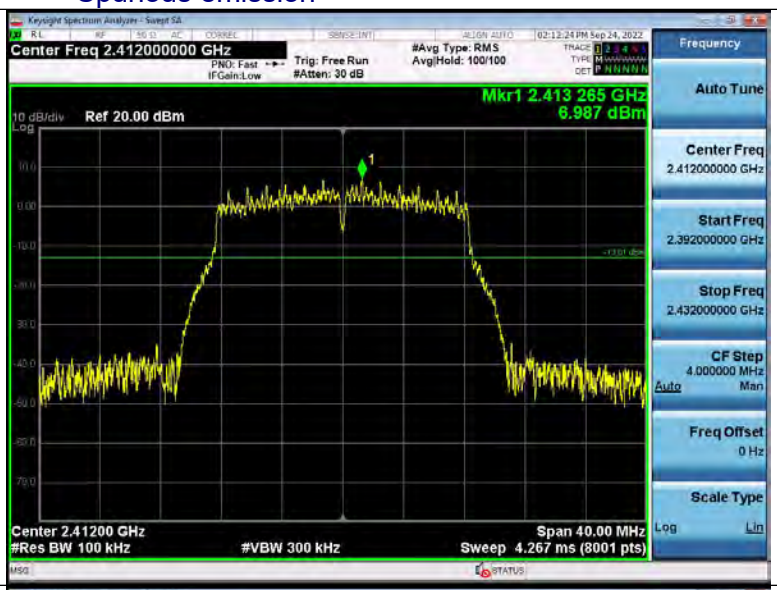

Middle Channel		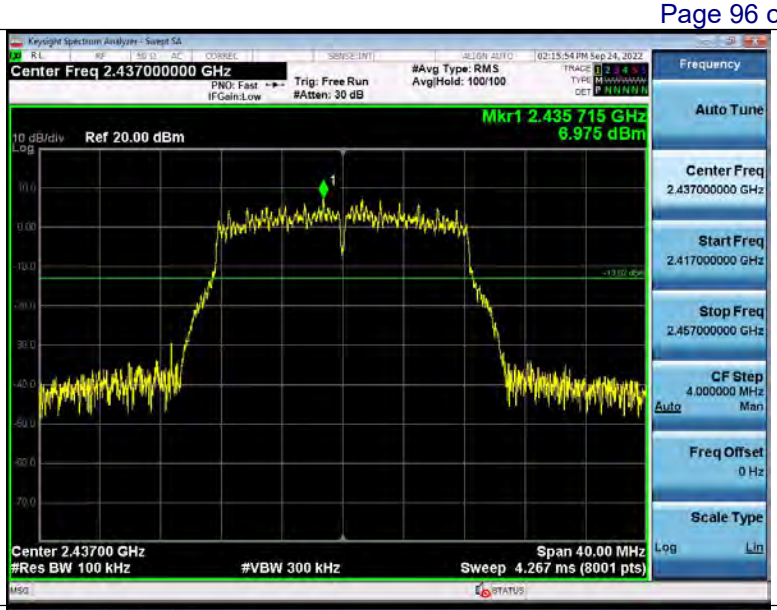
		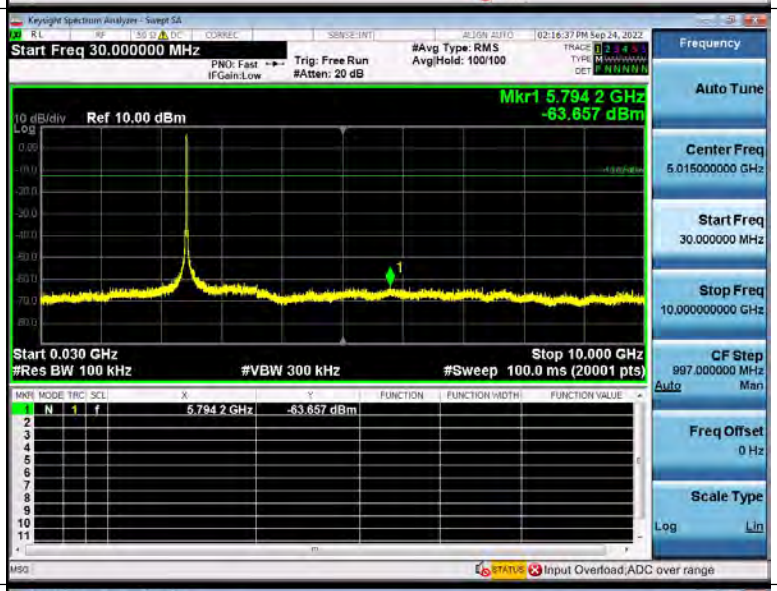

High Channel		
		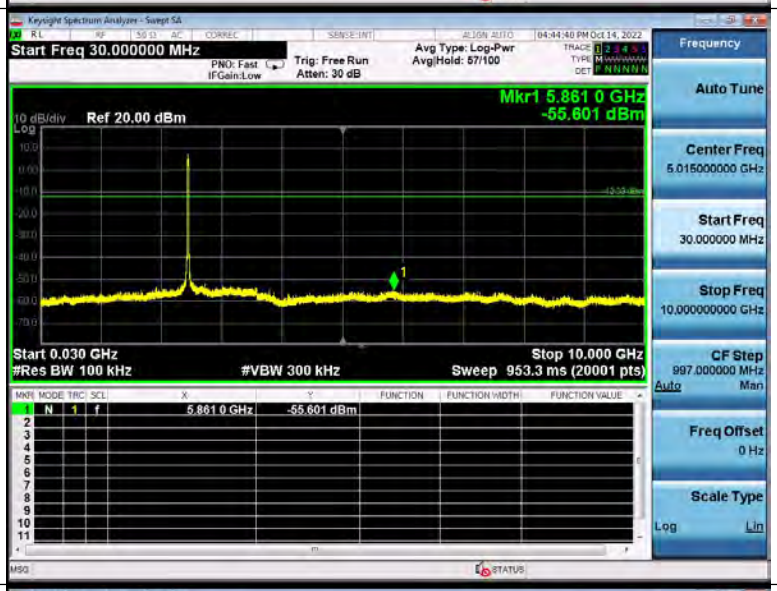
		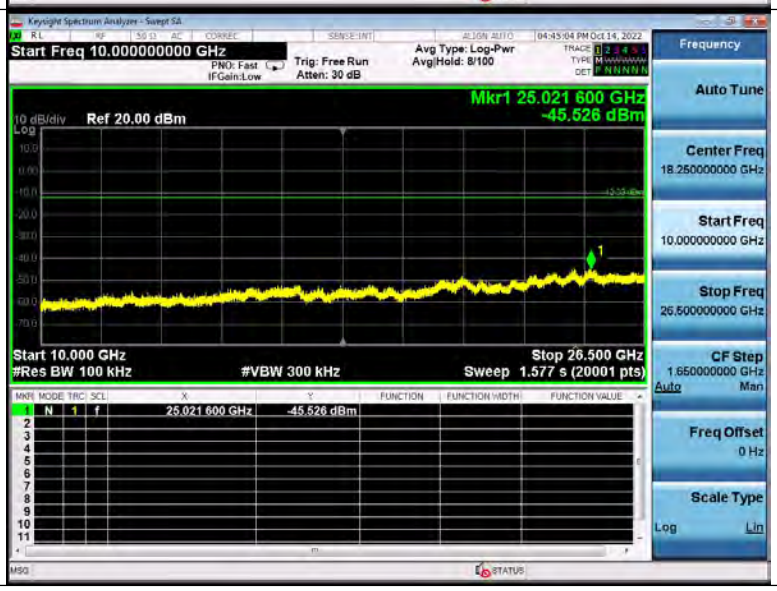

Lowest Channel	Highest Channel
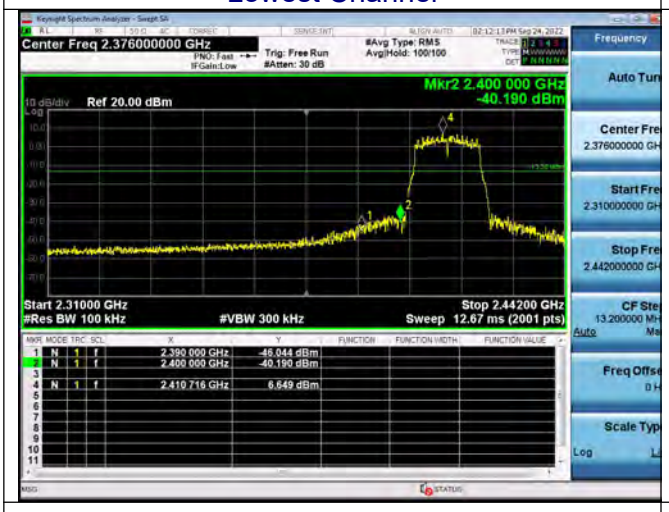	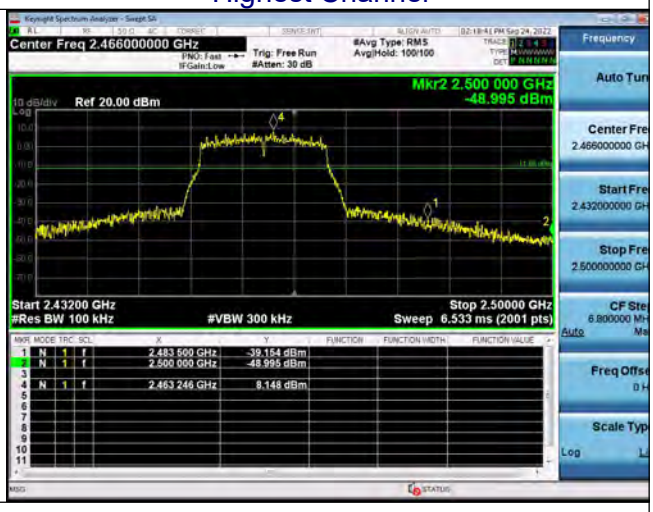
Left Band Edge	Right Band Edge

802.11n20 Modulation

Spurious emission		
Low Channel		
		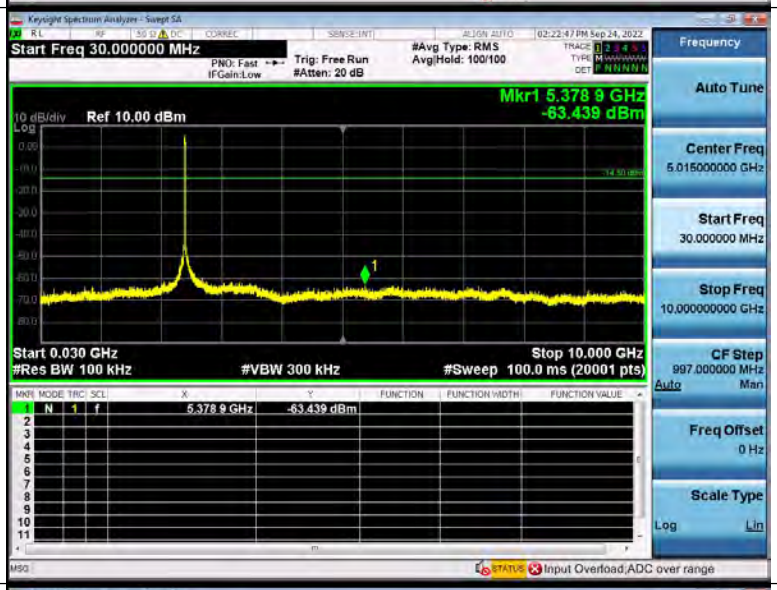

Middle Channel		

High Channel		
		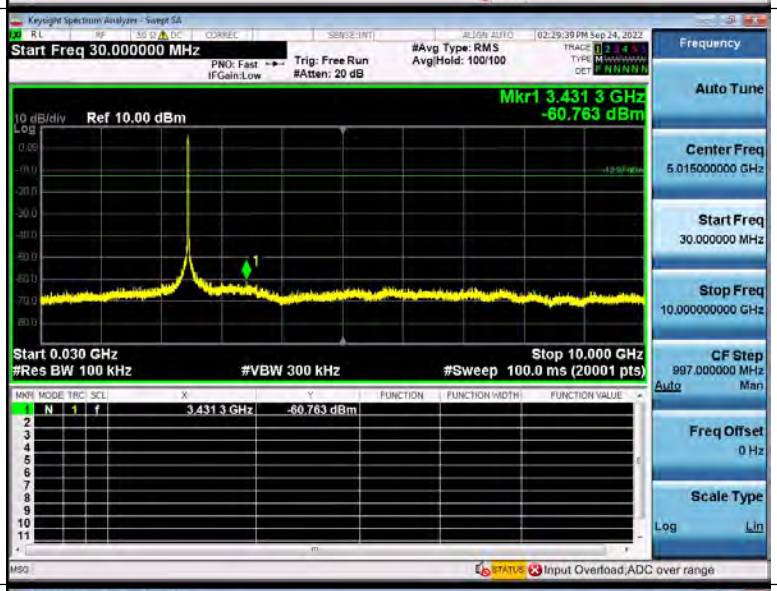

Lowest Channel	Highest Channel
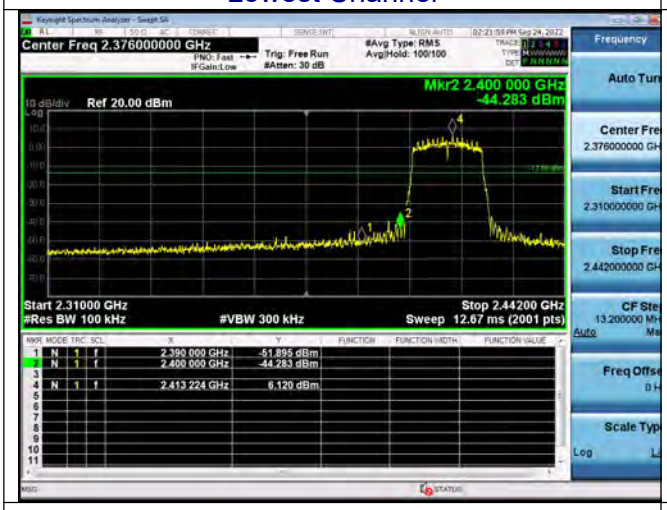	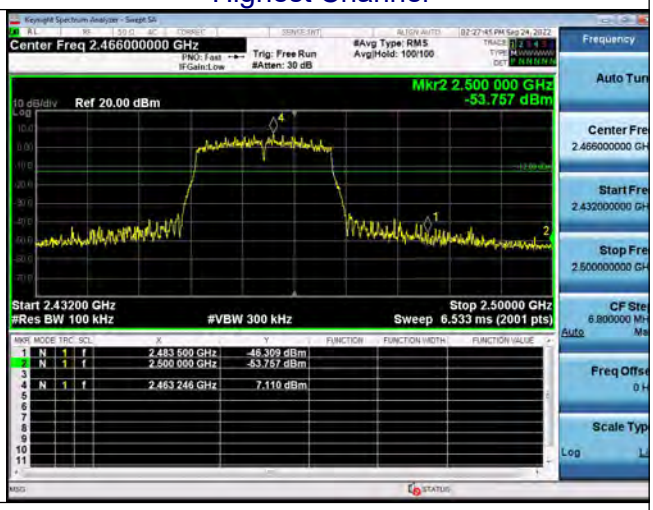
Left Band Edge	Right Band Edge

802.11n40 Modulation

Spurious emission		
Low Channel		

Middle Channel		
		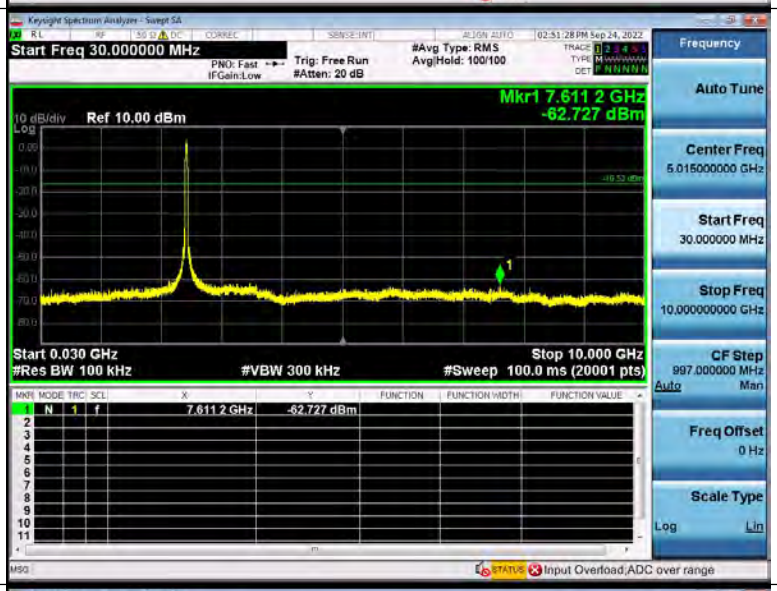

High Channel		
		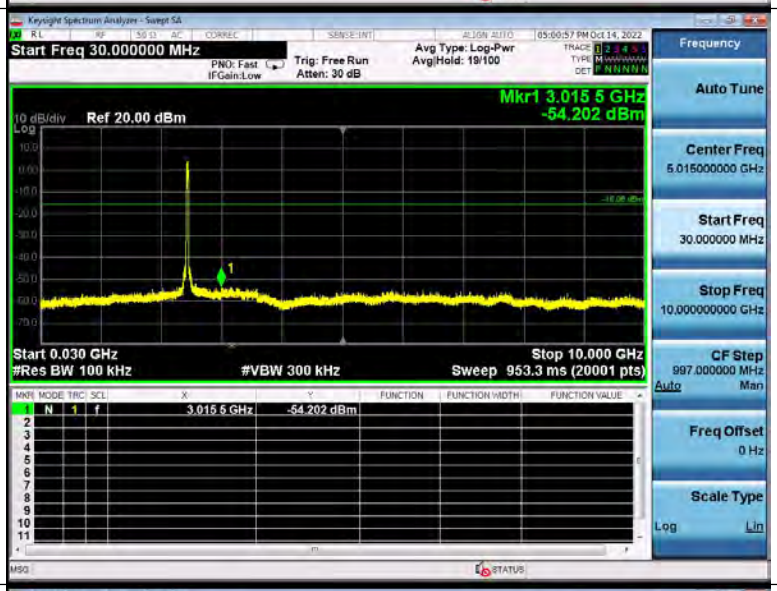
		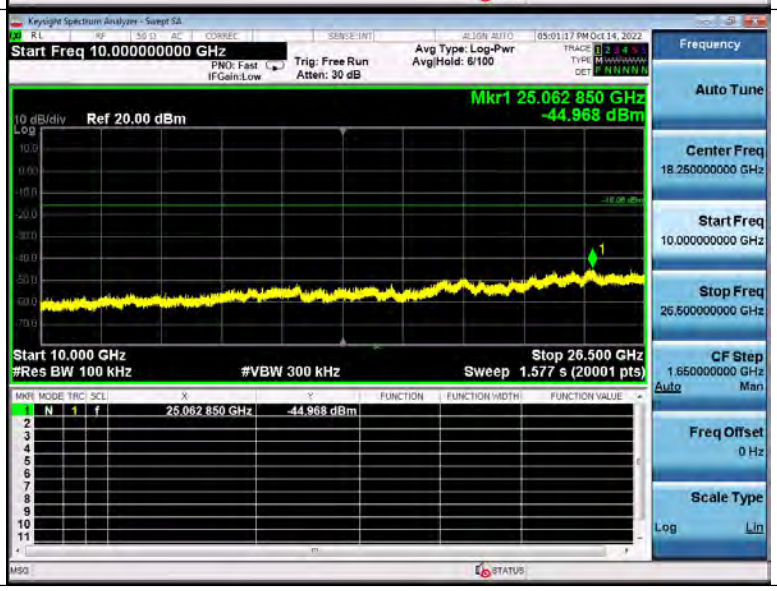

Lowest Channel	Highest Channel
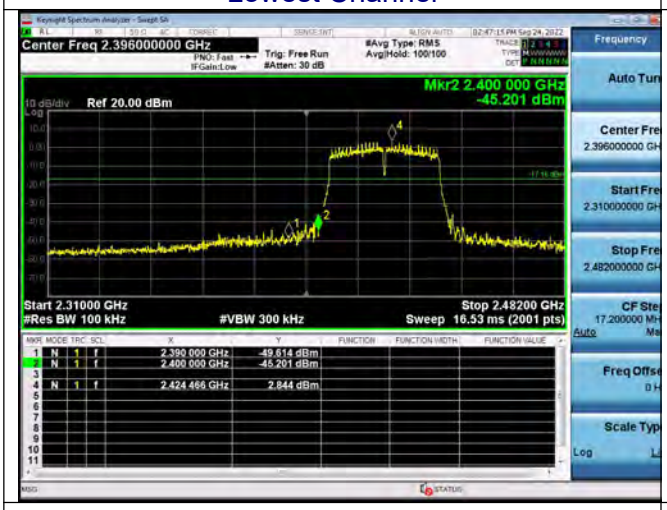	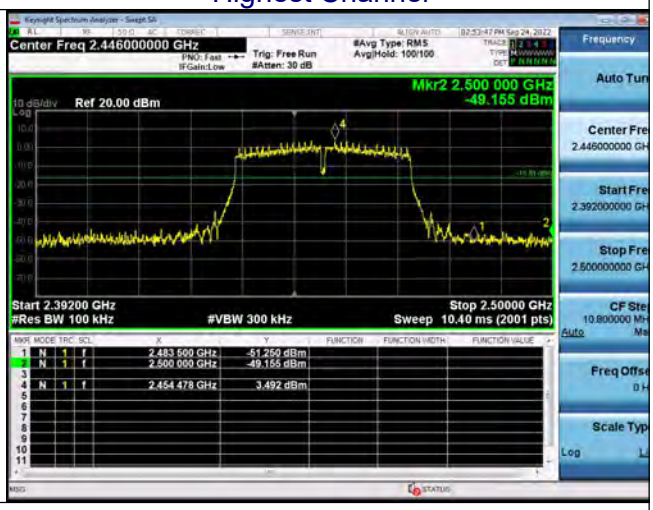
Left Band Edge	Right Band Edge

802.11ax20 Modulation

Spurious emission	
Low Channel	
	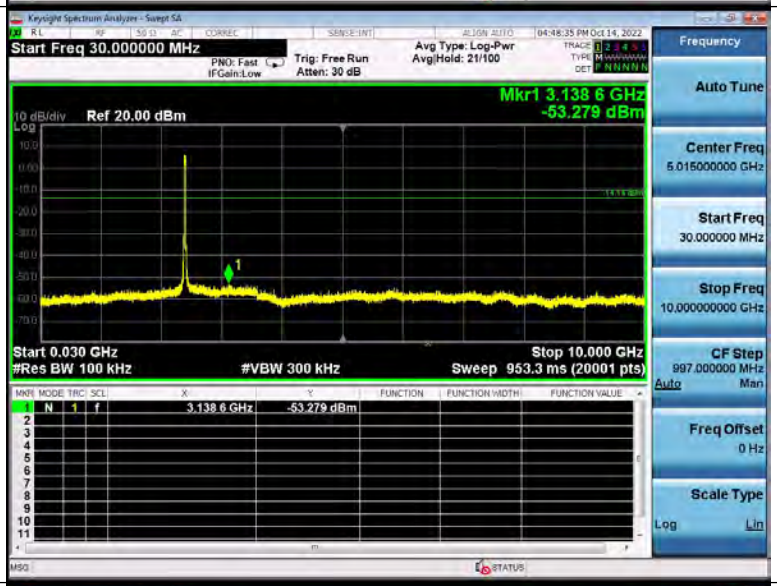
	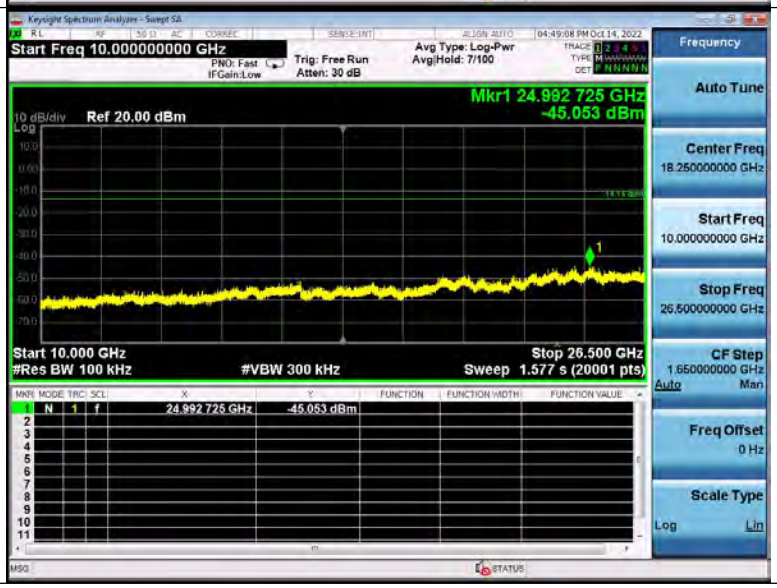

Middle Channel		
		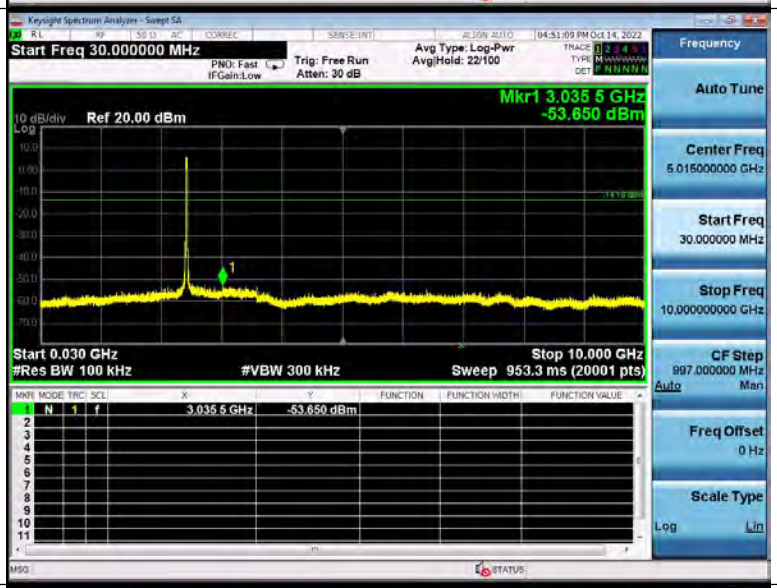
		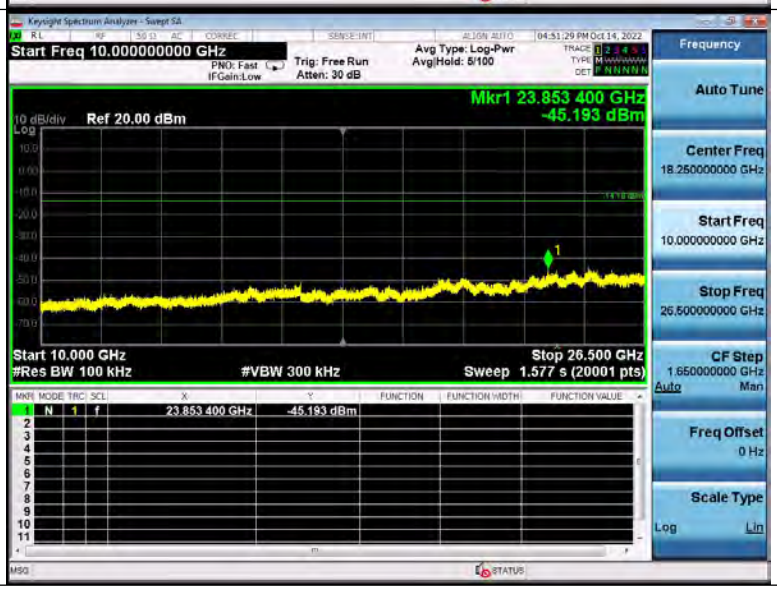

High Channel		
	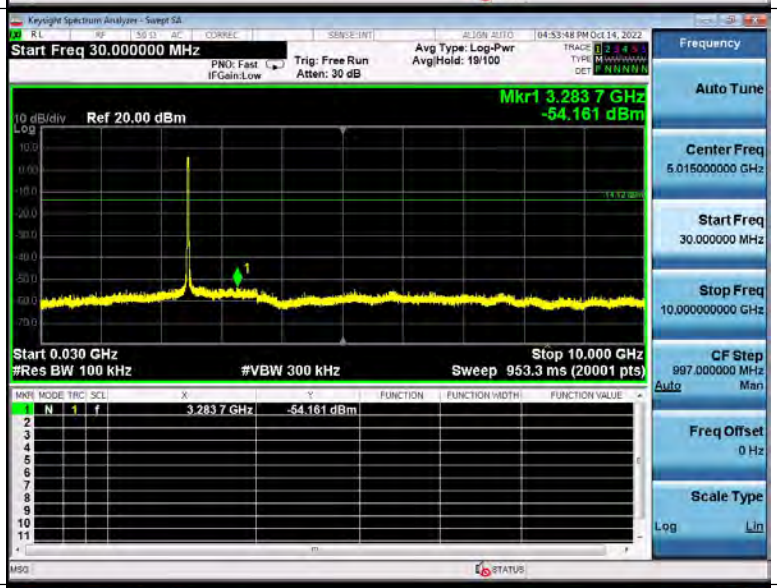	
	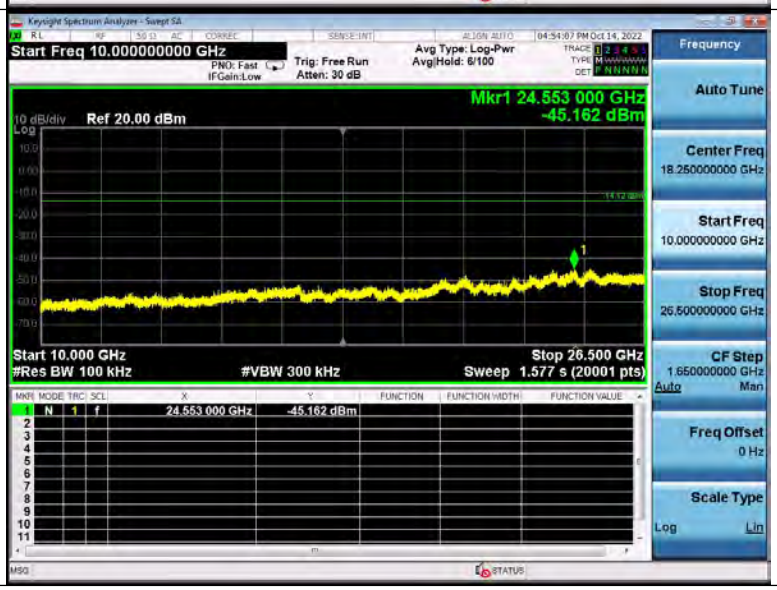	

Lowest Channel	Highest Channel
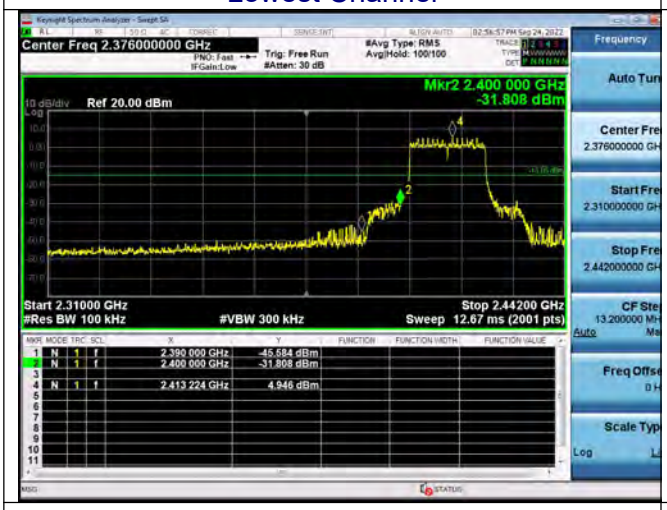	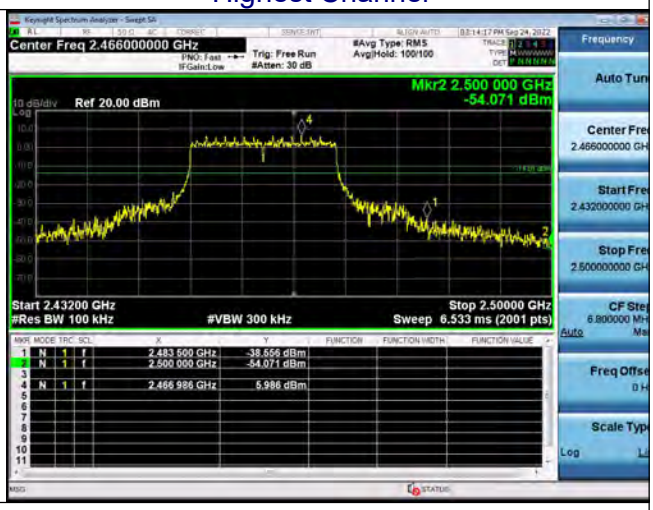
Left Band Edge	Right Band Edge

802.11ax40 Modulation

Spurious emission	
Low Channel	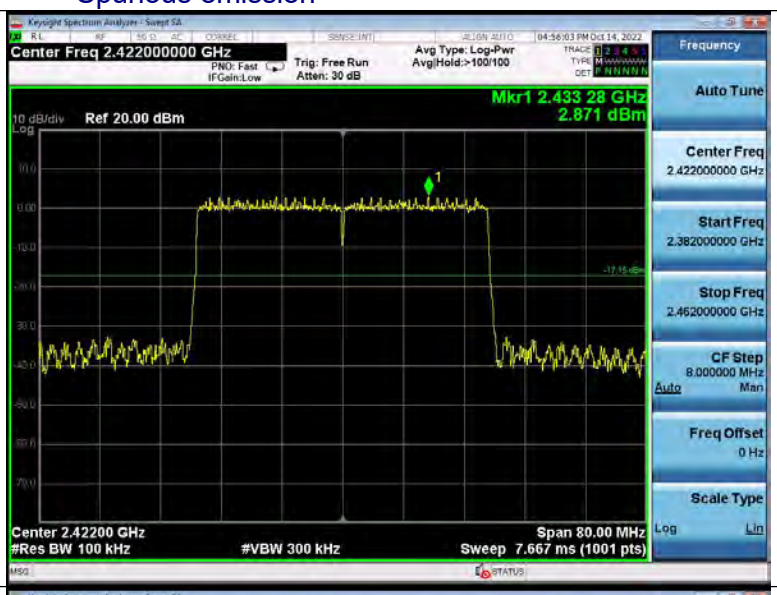
	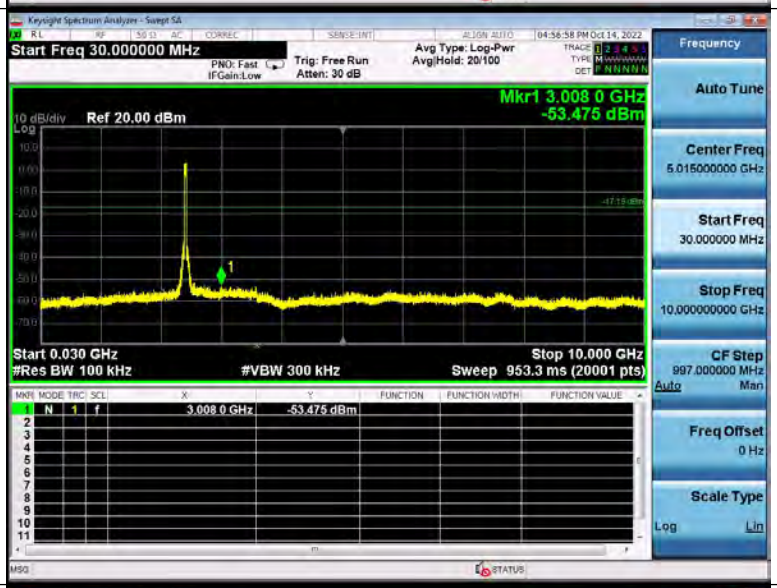

Middle Channel		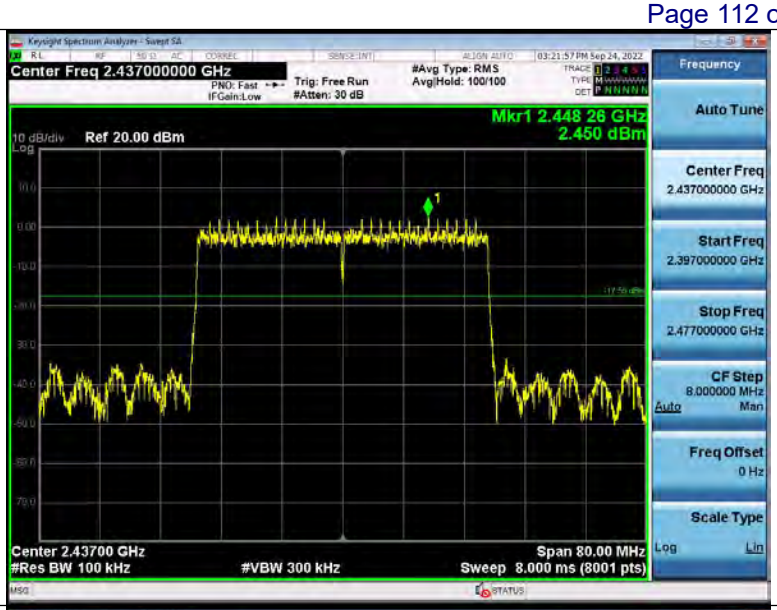
		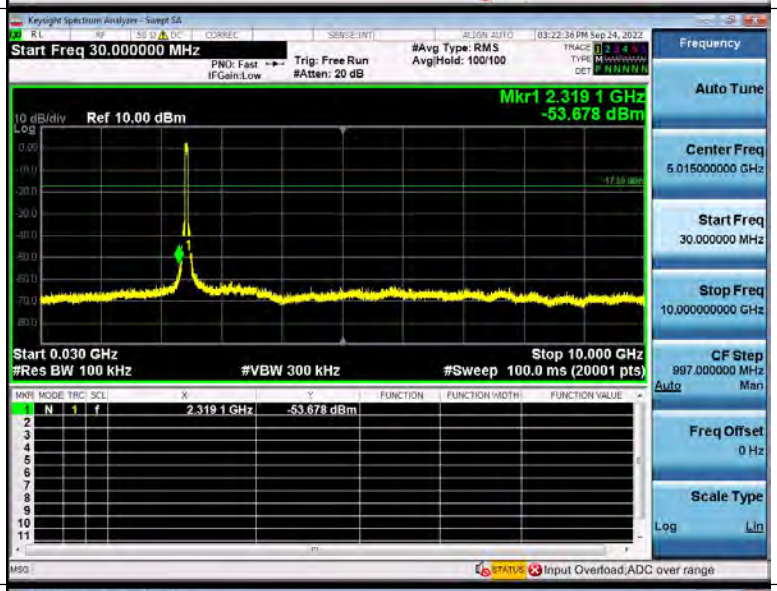

High Channel		
		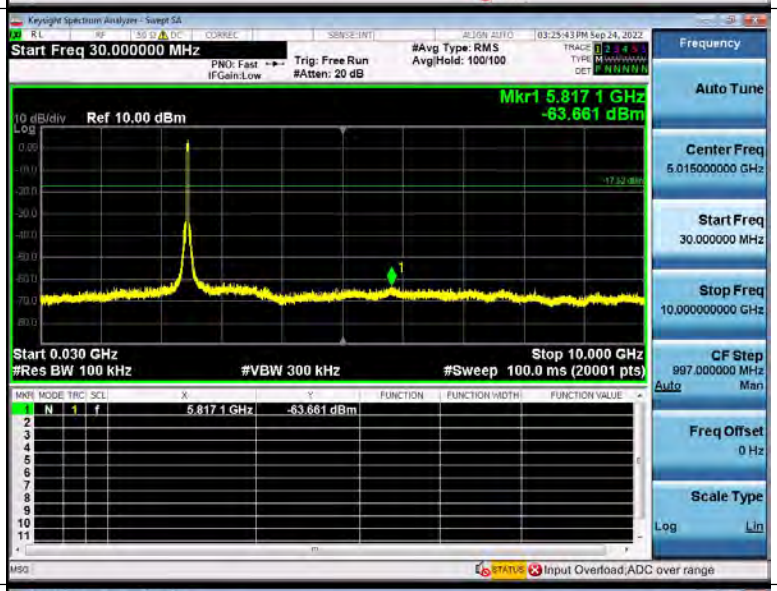

Lowest Channel	Highest Channel
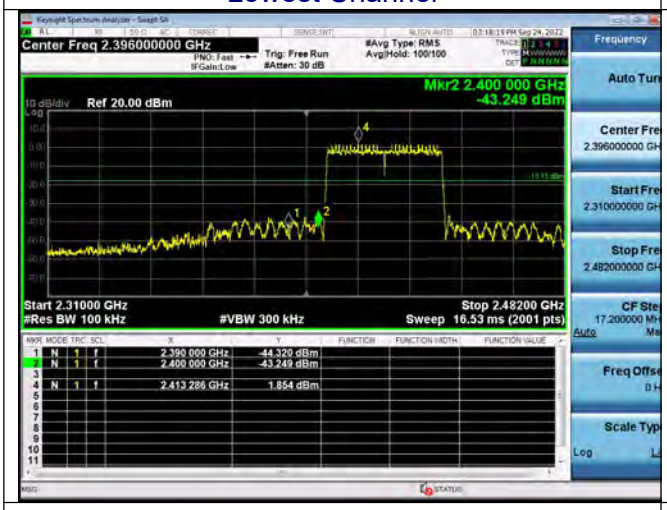	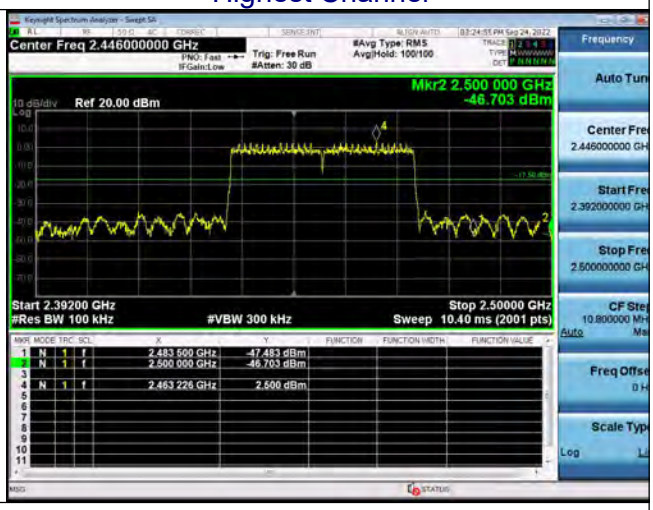
Left Band Edge	Right Band Edge

10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product are FPC antenna, and the best case gain of the antenna is antenna port 1: 2dBi and Antenna port 2:2dBi.

EUT Antenna:

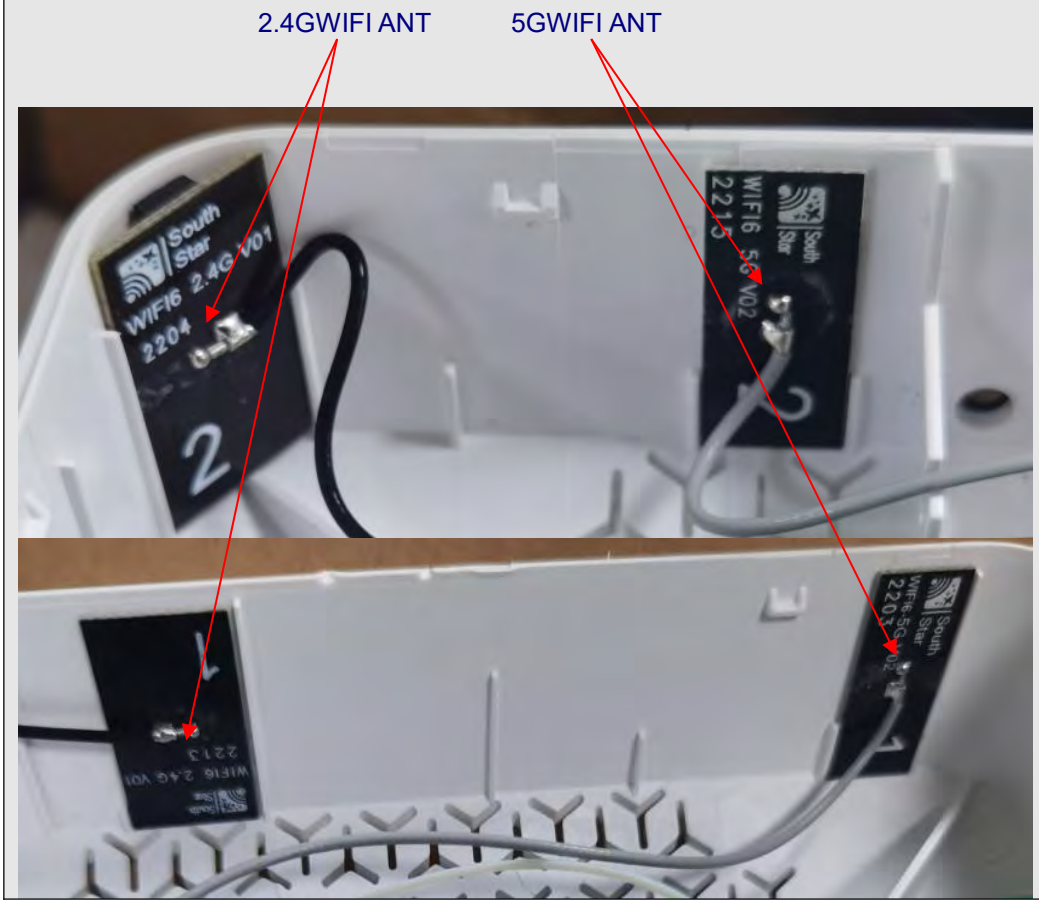

11. TEST SETUP PHOTO

12. EUT CONSTRUCTIONAL DETAILS

Reference to the external photos file and internal photos file for details.

※※※※※ END OF REPORT ※※※※※