

SIMAGIC

Alpha EVO Ultra | Quick Guide

1. List of Accessories

1.1 Screw & Tool Kit

Pan Head Screw M6-10 × 6

Pan Head Screw M6-16 × 6

Hex Wrench (4mm) × 1

1.2 Cable Kit

Power Adapter × 1

USB Cable (Type A-B) × 1

USB Cable (Type-C) × 1

Cable (RJ45-RJ11) × 1

1.3 Kill Switch Accessories


Half Thread Hex Socket Cap Screw M6-45 × 4

T-Slot Nut M6 × 4


Hex Wrench (5mm) × 1

2. Wheelbase Mounting

2.1 EVO Ultra Bottom Mounting Rig Method



The threaded hole side should face downwards.




Method of mounting the base using regular rigs.

2.2 EVO Ultra Side Mounting Rig Method

Note: Side Mount Bracket (MB-S) is an optional accessory.

Fully-Threaded Bolt (M6-12)

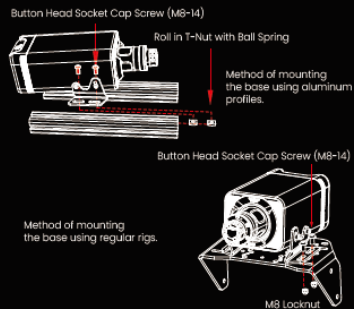


Method of mounting the base using aluminum profiles.

Method of mounting the base using regular rigs.


2.3 EVO Ultra Front Mounting Rig Method

Note: Front Mount Bracket (MB-F) is an optional accessory.




3. Kill Switch Setup

3.1 Kill Switch Installation & Connection




3.2 How to Use



4. EVO Ultra Product Interfaces

Note: Some products are equipped with two output terminal cables. Do not connect both Output Interface 1 and Output Interface 2 at the same time.



- The RJ45 connector supports CAN USB devices.
- The RJ45 connector supports CAN devices.
- The Type-C and USB-B connectors are used to connect PC.
- The RJ45 KEY connector supports CAN devices.
- The RJ45 KEY connector supports CAN devices and Kill Switch.
- The USB interface supports CAN devices.

Software & applications



Install SimPro Manager
on PC to complete setup



Product Tutorial
(Scan the QR code to view more)

Note: SimPro Manager required to complete setup

FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.