Dec. 2016 Ver.5.0
TDK Corporation

Multilayer Antenna

For 2.4GHz W-LAN & Bluetooth / 5GHz W-LAN

ANT Series 1608 TYPE

P/N: **ANT162442DT-2001A2**

Dongtai Chemical (China) Investment Co., Ltd.
Room 1907, Shanghai International Trade Center, No. 2201, Yan'an West Road, Shanghai

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies

Dec. 2016 Ver.5.0
TDK Corporation

ANT162442DT-2001A2

SHAPES AND DIMENSIONS

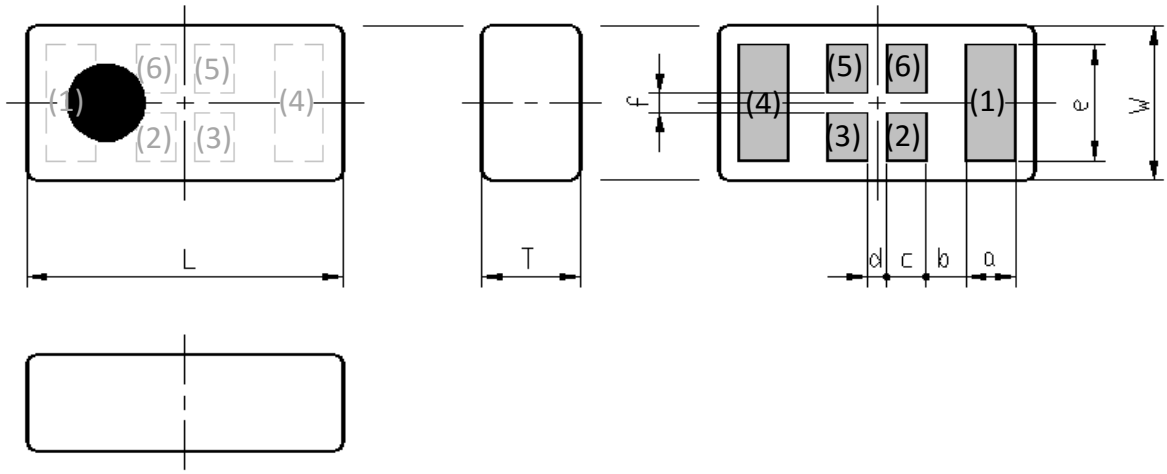

Dimensions (mm)

L	W	T	a	b	c	d	e	f
1.60 +/-0.10	0.80 +/-0.10	0.40 Max	0.215 +/-0.10	0.25 +/-0.10	0.20 +/-0.10	(0.10)	0.63 +/-0.10	(0.10)

Terminal functions

(1)	Radiator electrode for 2.4GHz ISM
(2)	Feed point
(3)	Feed point
(4)	Radiator electrode for 5.5GHz
(5)	Feed point

(6)	Feed point

***Terminal (2),(3),(5) and (6) :Connected in inner structure**

Note:
These samples are marked with trial sample identification.
In mass production, this sample marking will be changed to show in the TDK full specification.

TEMPERATURE RANGE

Operating temperature	Storage temperature
–40 to +85 °C	–40 to +85 °C

TERMINATION FINISH

Material
Au plate

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies

Dec. 2016 Ver.5.0
TDK Corporation

ANT162442DT-2001A2

ELECTRICAL CHARACTERISTICS

(Measurement)

Parameter	Frequency (MHz)	TDK Spec		
		Min.	Typ.	Max.
VSWR	2400 to 2484	-	1.54	3.0
	5150 to 5850	-	1.58	3.0
Antenna Gain (dBi)**	2400 to 2484	-	2.13	-
	5150 to 5850	-	2.30	-
Polarization		Linear		
PCB Size (mm)		50 x 20		
Antenna keep-out Area (mm)		8x5		
Characteristic Impedance (ohm)		50 (Nominal)		

* This is typical antenna performance with the standard PCB.
** Reference value

FREQUENCY CHARACTERISTICS

Note: Tested antenna has been soldered. Evaluation board size is 50x20x1 mm.

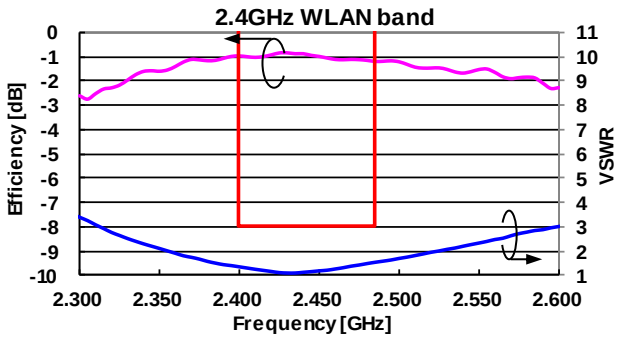

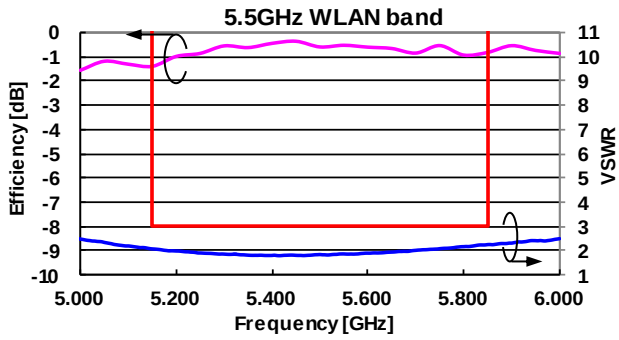

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies

Dec. 2016 Ver.5.0
TDK Corporation

ANT162442DT-2001A2

■ EVALUATION BOARD

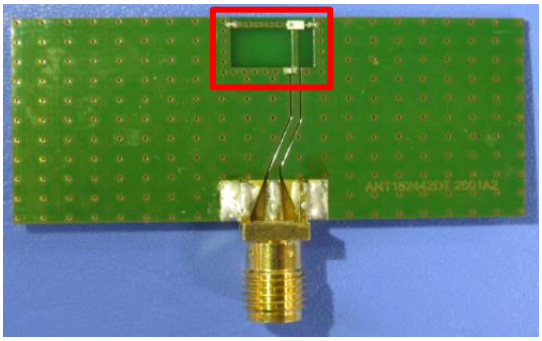

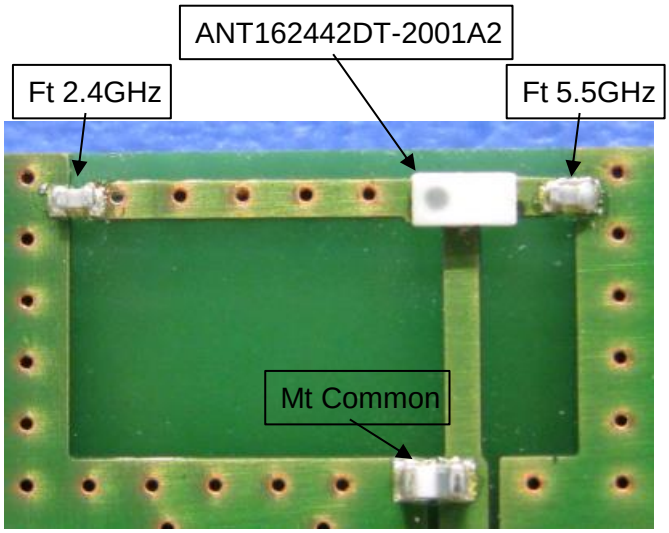

PCB size : 50mm x 20mm x 1mm
Antenna area : 8 x 5 mm

	Element Value
Ft 2.4GHz	6.2pF
Ft 5.5GHz	0.4pF
Mt Common	1.3nH(MLG1005S1N3C:TDK)

Measurement condition for Radiation Pattern

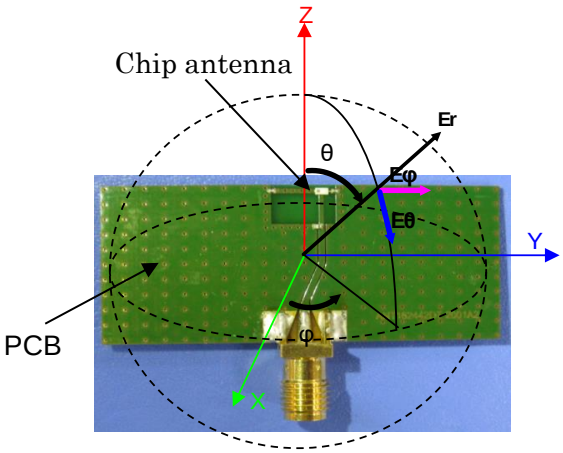

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies

Dec. 2016 Ver.5.0
TDK Corporation

ANT162442DT-2001A2

Radiation Pattern

Note: Tested antenna has been soldered. Evaluation board size is 50x20x1 mm.

2.4GHz ISM Band

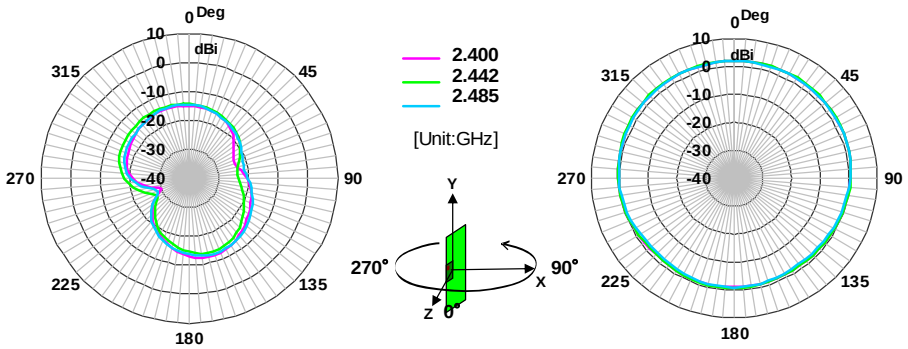

Horizontal Polarization

Frequency[GHz]	2.400	2.442	2.485
Average[dBi]	-16.54	-16.59	-16.37
Maximum[dBi]	-12.01	-13.47	-12.72
Minimum[dBi]	-30.09	-27.57	-28.66

Vertical Polarization

Frequency[GHz]	2.400	2.442	2.485
Average[dBi]	0.57	0.67	0.35
Maximum[dBi]	2.02	2.13	1.90
Minimum[dBi]	-1.35	-1.43	-2.16

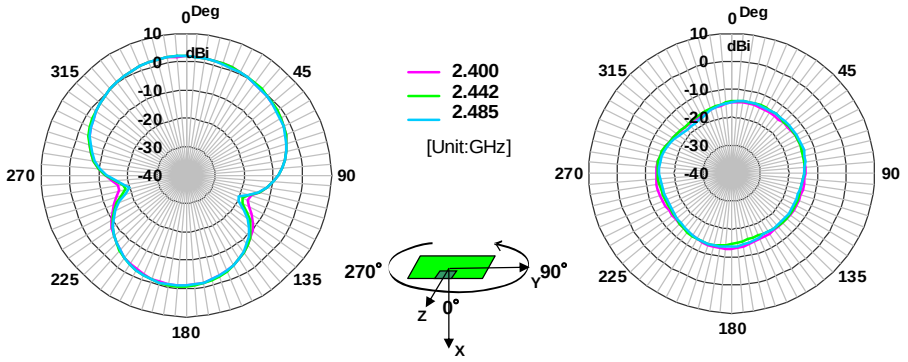

Horizontal Polarization

Frequency[GHz]	2.400	2.442	2.485
Average[dBi]	-2.27	-2.13	-2.37
Maximum[dBi]	1.94	2.08	1.96
Minimum[dBi]	-17.08	-18.95	-20.38

Vertical Polarization

Frequency[GHz]	2.400	2.442	2.485
Average[dBi]	-14.44	-14.68	-14.79
Maximum[dBi]	-12.83	-13.39	-13.42
Minimum[dBi]	-17.10	-16.69	-18.01

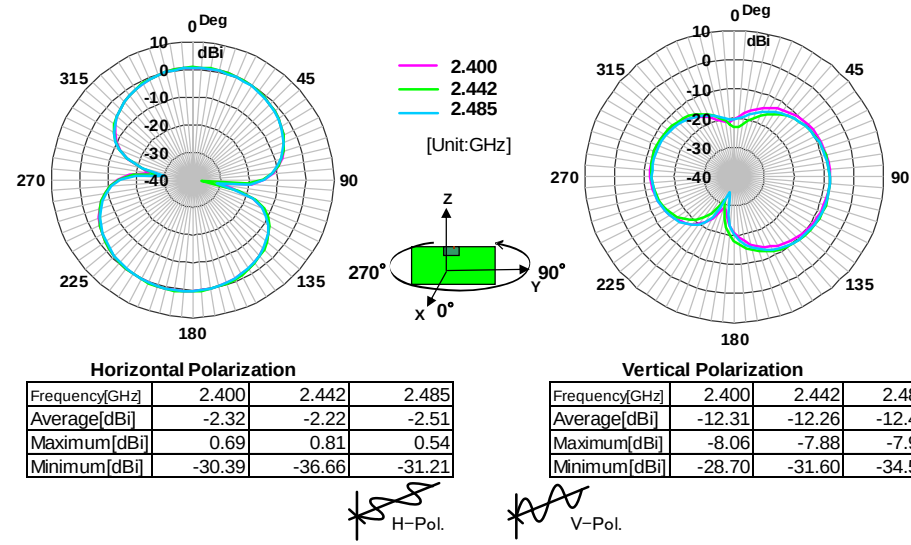

Horizontal Polarization

Frequency[GHz]	2.400	2.442	2.485
Average[dBi]	-2.32	-2.22	-2.51
Maximum[dBi]	0.69	0.81	0.54
Minimum[dBi]	-30.39	-36.66	-31.21

Vertical Polarization

Frequency[GHz]	2.400	2.442	2.485
Average[dBi]	-12.31	-12.26	-12.40
Maximum[dBi]	-8.06	-7.88	-7.97
Minimum[dBi]	-28.70	-31.60	-34.56

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies

Dec. 2016 Ver.5.0
TDK Corporation

ANT162442DT-2001A2

Radiation Pattern

Note: Tested antenna has been soldered. Evaluation board size is 50x20x1 mm.

5.5GHz Band

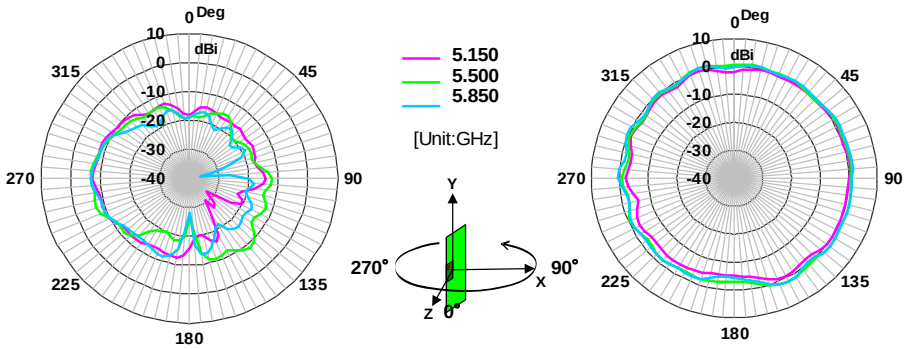

Horizontal Polarization

Frequency[GHz]	5.150	5.500	5.850
Average[dBi]	-12.97	-12.16	-13.58
Maximum[dBi]	-7.48	-6.62	-6.72
Minimum[dBi]	-32.51	-26.84	-36.34

Vertical Polarization

Frequency[GHz]	5.150	5.500	5.850
Average[dBi]	-1.43	-0.20	-0.08
Maximum[dBi]	0.62	1.47	1.73
Minimum[dBi]	-5.45	-3.08	-4.67

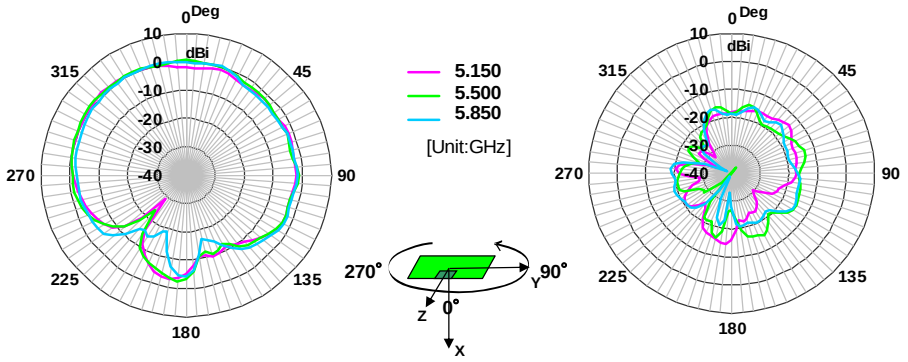

Horizontal Polarization

Frequency[GHz]	5.150	5.500	5.850
Average[dBi]	-2.51	-2.08	-2.65
Maximum[dBi]	1.01	1.13	0.37
Minimum[dBi]	-28.98	-23.90	-18.97

Vertical Polarization

Frequency[GHz]	5.150	5.500	5.850
Average[dBi]	-19.15	-18.18	-19.20
Maximum[dBi]	-13.54	-13.50	-14.93
Minimum[dBi]	-34.57	-42.62	-38.87

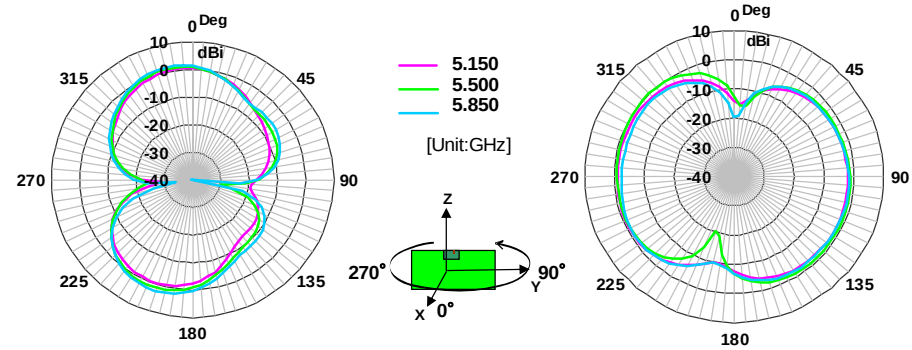

Horizontal Polarization

Frequency[GHz]	5.150	5.500	5.850
Average[dBi]	-4.50	-3.50	-2.84
Maximum[dBi]	0.42	1.37	2.30
Minimum[dBi]	-29.11	-29.74	-40.66

Vertical Polarization

Frequency[GHz]	5.150	5.500	5.850
Average[dBi]	-2.89	-2.23	-3.18
Maximum[dBi]	-0.68	0.24	-1.24
Minimum[dBi]	-15.19	-20.29	-19.75

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies

Dec. 2016 Ver.5.0
TDK Corporation

ANT162442DT-2001A2

RECOMMENDED LAND PATTERN

Recommend land pattern and solder resist pattern

< Land pattern >

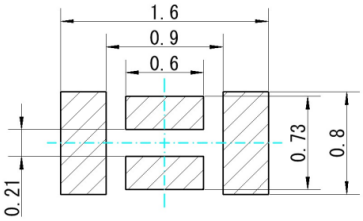

< Solder resist pattern >





Recommend aperture size of metal mask for solder printing

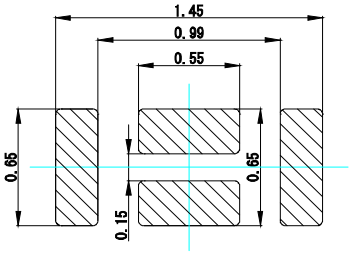



Example of Antenna pattern layout (TDK Standard PCB)

<Top Layer (Parts mounted side) >

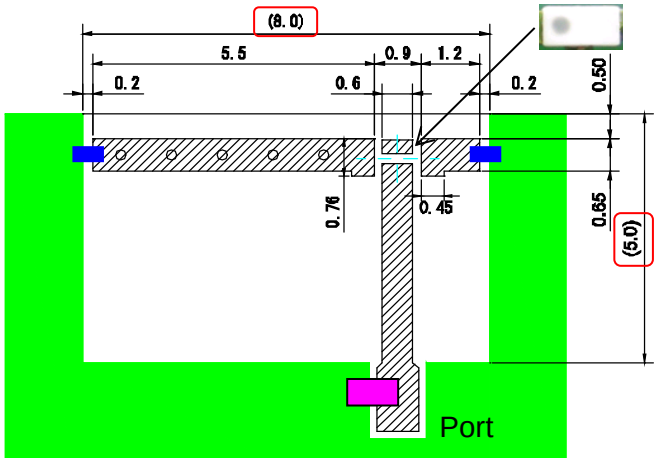

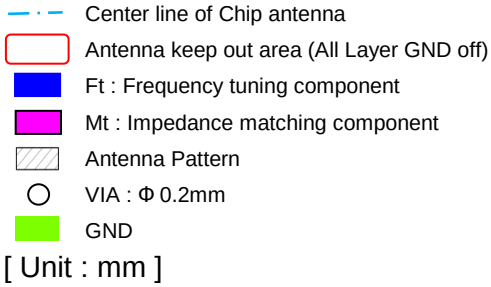

[Unit : mm]

<Inner Layer >

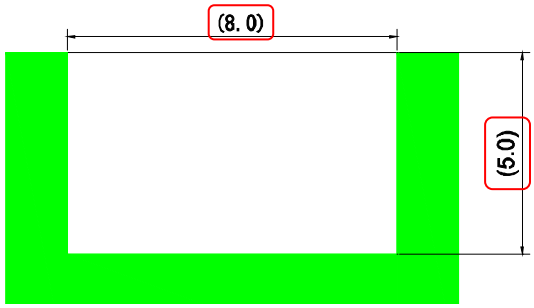

<Bottom Layer >

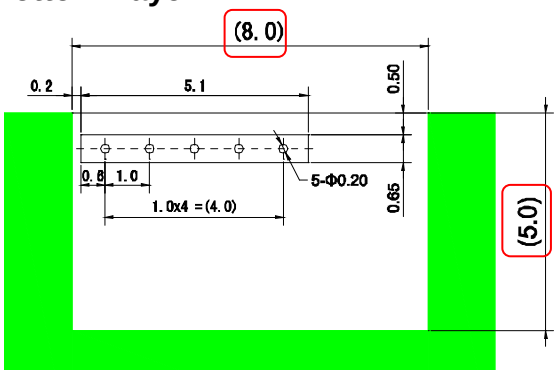

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies

Dec. 2016 Ver.5.0
TDK Corporation

ANT162442DT-2001A2

ENVIROMENT INFORMATION

RoHS Statement
RoHS Compliance

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies

TDK Corporation

RECOMMENDED REFLOW PROFILE

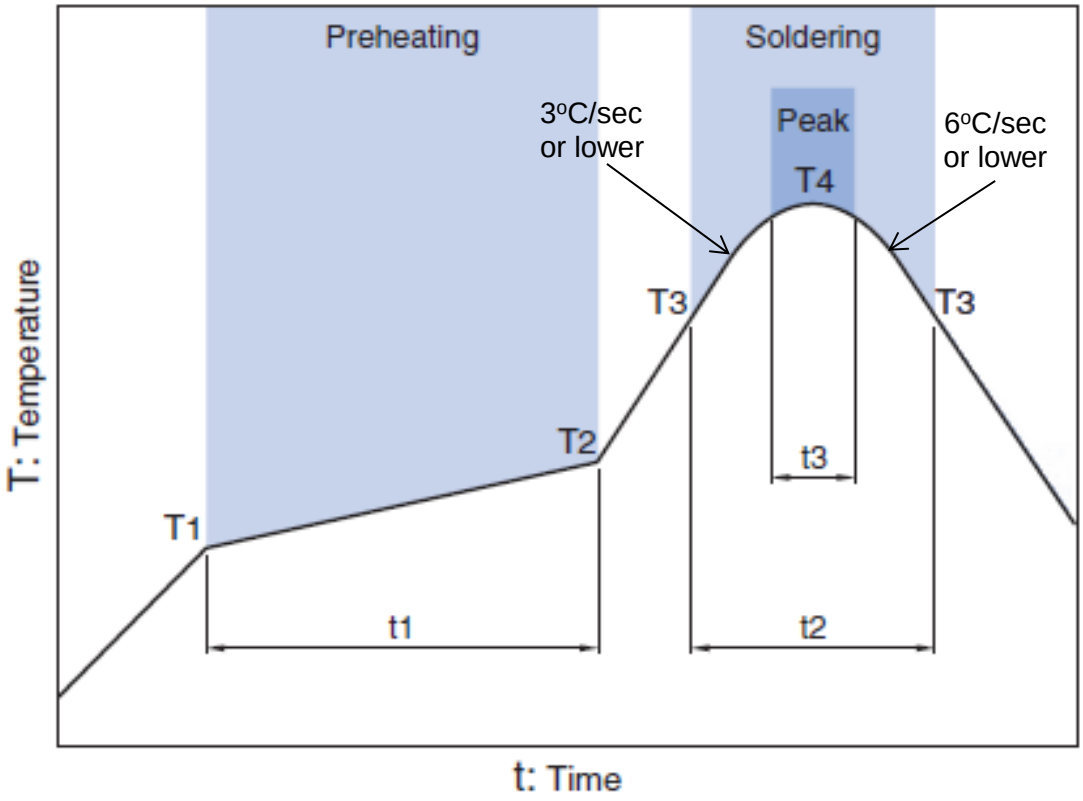

Preheating			Soldering			
			Critical zone (T3 to T4)		Peak	
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3 *
150°C	200°C	60 to 120sec	217°C	60 to 120sec	240 to 260°C	30 sec Max

* t3 : Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

Note: Lead free solder is recommended.
Recommended solder is Sn-3.0Ag-0.5Cu. (M705 by Senju Metal Industry)

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies

Dec. 2016 Ver.5.0
TDK Corporation

ANT162442DT-2001A2

■ PACKAGING STYLE

Reel Dimensions

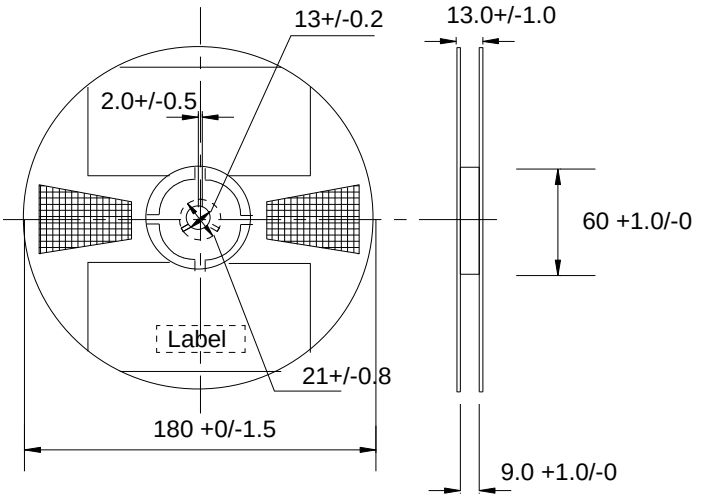

Unit : mm

Carrier Tape

Material of the carrier tape : PS

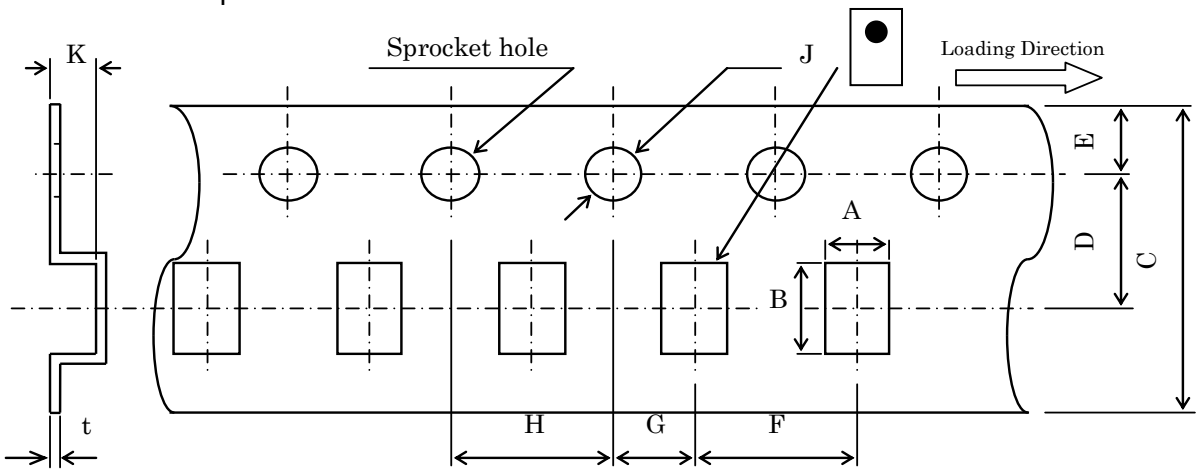

Dimensions (mm)

Unit : mm

A	B	C	D	E	F	G	H	J	K	t
0.97 +/-0.05	1.8 +/-0.05	8.0 +/-0.2	3.5 +/-0.05	1.75 +/-0.1	4.0 +/-0.1	2.0 +/-0.05	4.0 +/-0.1	1.5 +0.1/-0	0.55 MAX	0.25 +/-0.05

STANDARD PACKAGE QUANTITY (pieces/reel)
4,000

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS

The products listed on this specification sheet are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.

1. Aerospace/Aviation equipment
2. Transportation equipment (cars, electric trains, ships, etc.)
3. Medical equipment
4. Power-generation control equipment
5. Atomic energy-related equipment
6. Seabed equipment
7. Transportation control equipment
8. Public information-processing equipment
9. Military equipment
10. Electric heating apparatus, burning equipment
11. Disaster prevention/crime prevention equipment
12. Safety equipment
13. Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.

All specifications are subject to change without notice.
TDK Technology - Proprietary and Confidential Information of TDK Group Companies