


Brand / Model : 6603303081
 Remark : 2400MHz
 Tested by : Nick Dai

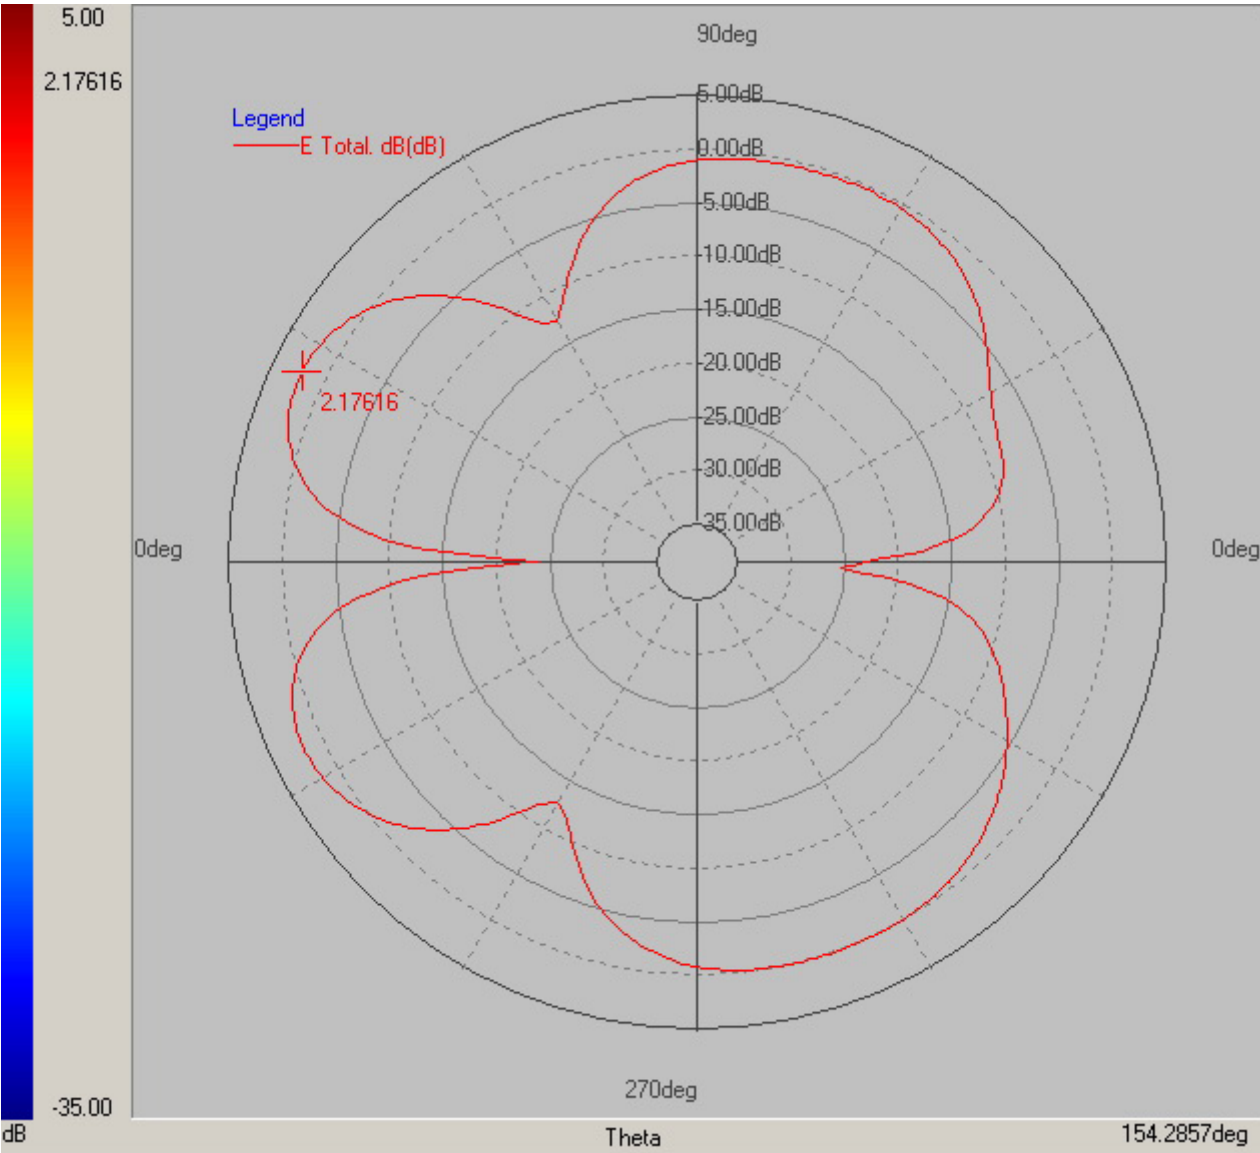


-- : Max. deg
 *Unit : dBi

Frequency(MHz) : 2400.00	Pattern Field : E plane	Average Gain(dB) : -3.27dB
Maximum Gain(dB) : 2.18dB	Maximum Gain(degree) : 154.29	
Minimum Gain(dB) : -25.54dB	Minimum Gain(degree) : -2.86	

Brand / Model : 6603303081-000

Remark : 2400MHz


Tested by : Nick Dai

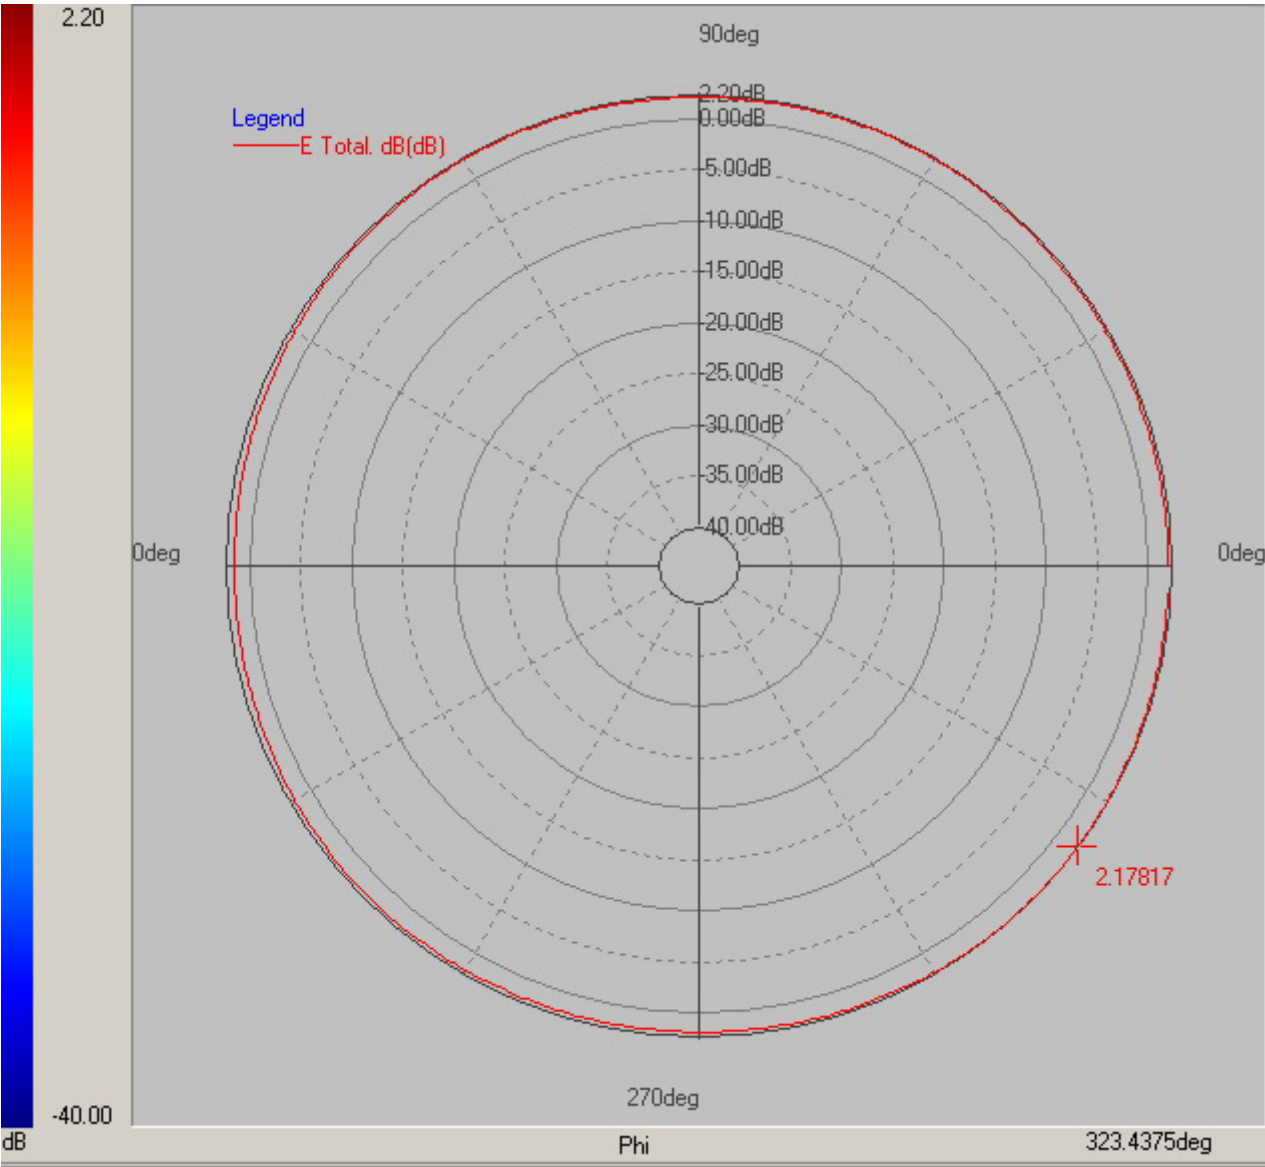

-- : Max. deg *Unit : dBi

Frequency(MHz) : 2400.00	Pattern Field : H plane	Average Gain(dB) : 1.85dB
Maximum Gain(dB) : 2.18dB	Maximum Gain(degree) : 323.44	
Minimum Gain(dB) : 1.49dB	Minimum Gain(degree) : 180.00	


Brand / Model : 6603303081
 Remark : 5800MHz
 Tested by : Nick Dai

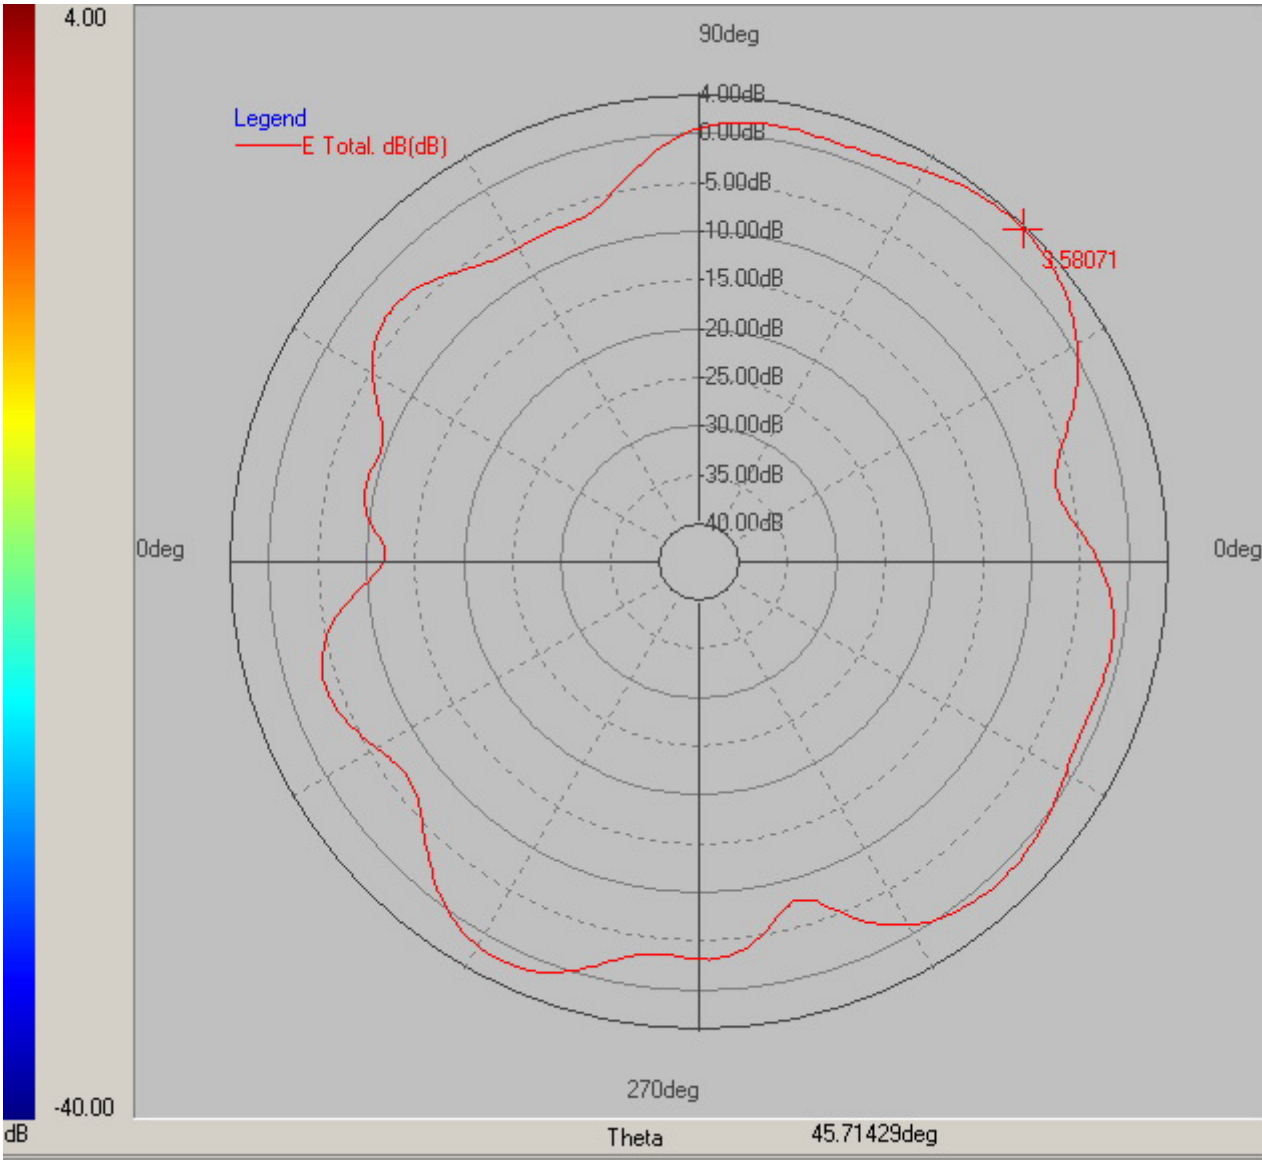

-- : Max. deg
 *Unit : dBi

Frequency(MHz) : 5800.00	Pattern Field : E plane	Average Gain(dB) : -2.15dB
Maximum Gain(dB) : 3.58dB	Maximum Gain(degree) : 45.71	
Minimum Gain(dB) : -11.98dB	Minimum Gain(degree) : -180.00	

Brand / Model : 6603303081
 Remark : 5800MHz
 Tested by : Nick Dai

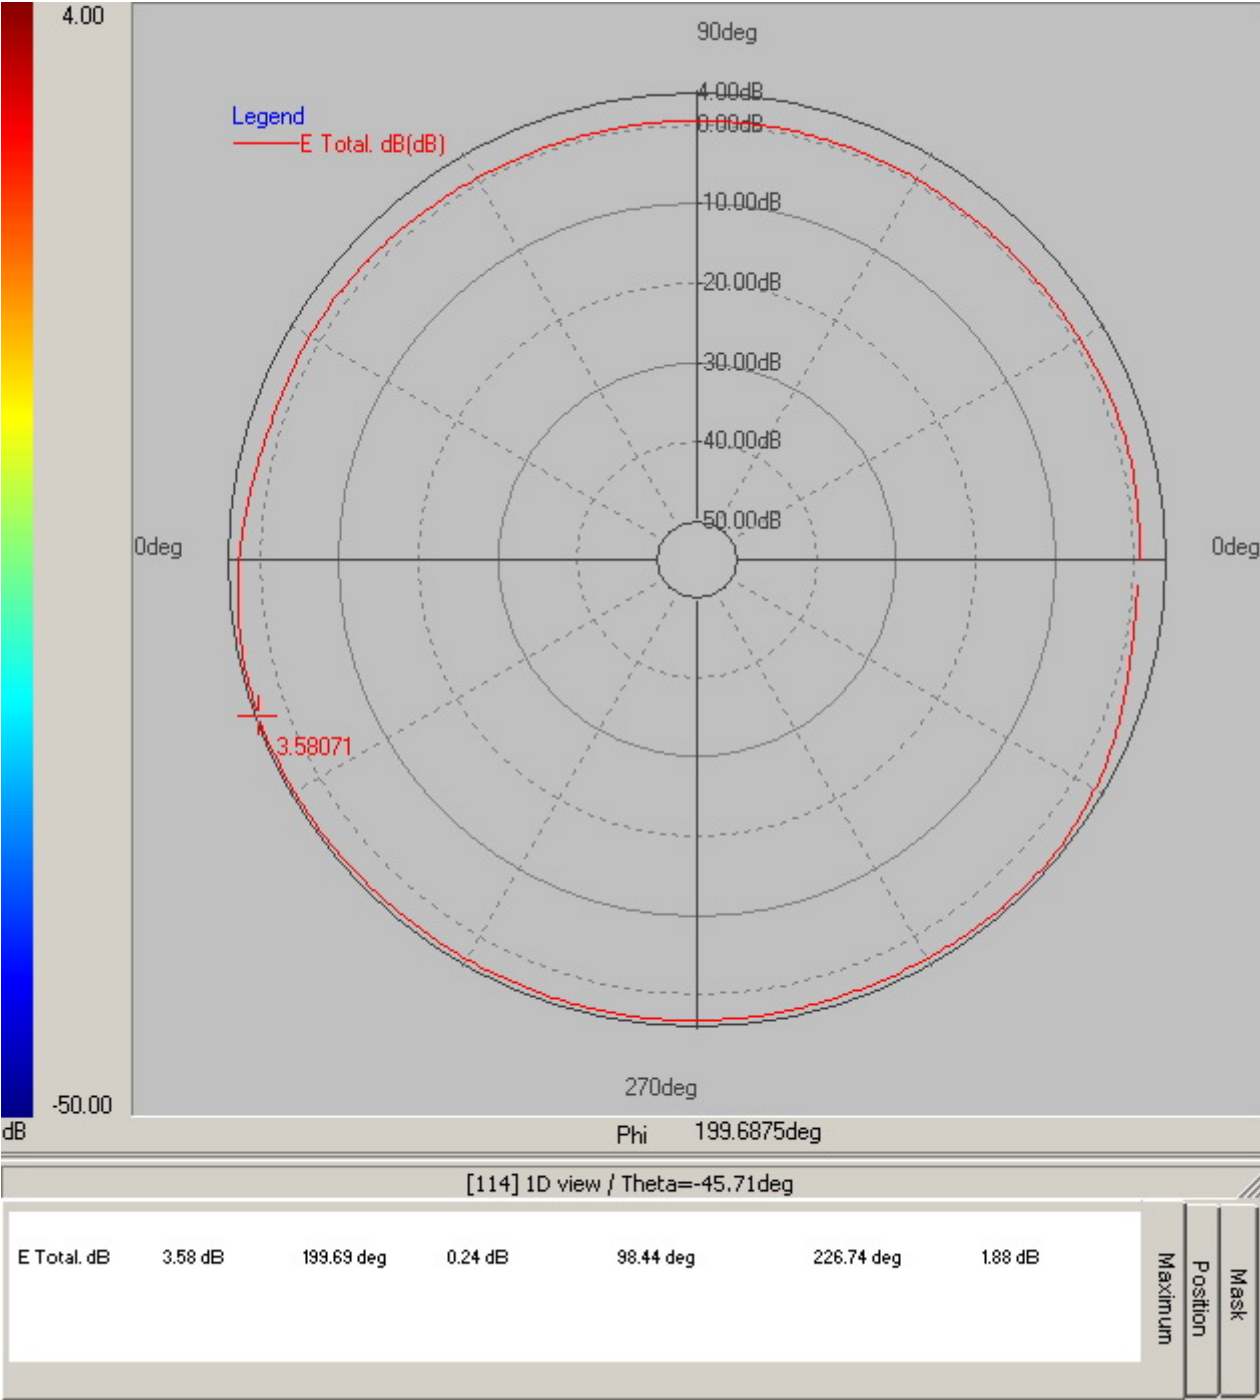

-- : Max. deg


*Unit : dBi

Frequency(MHz) : **5800.00**
 Pattern Field : **H plane**
 Average Gain(dB) : **1.88dB**


Maximum Gain(dB) : **3.58dB**
 Maximum Gain(degree) : **199.69**

Minimum Gain(dB) : **0.24dB**
 Minimum Gain(degree) : **98.44**

S11

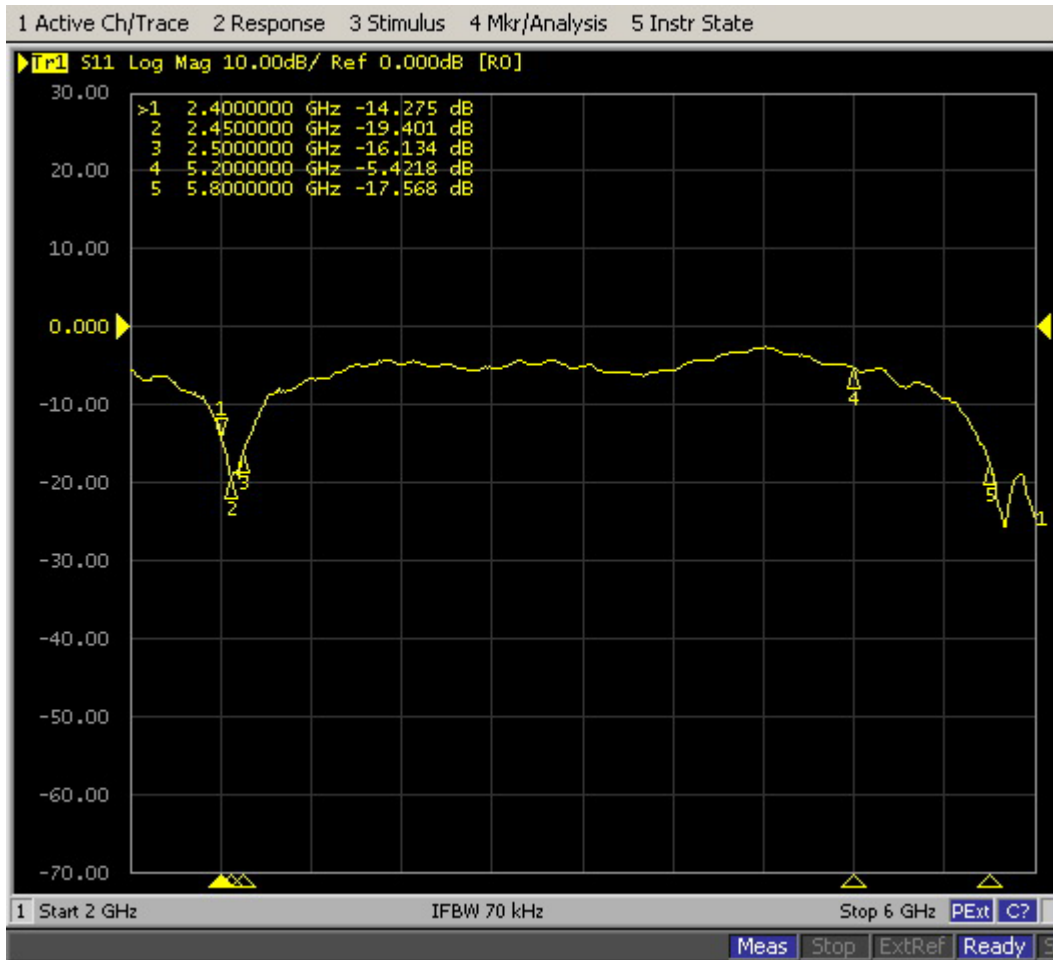

VSWR

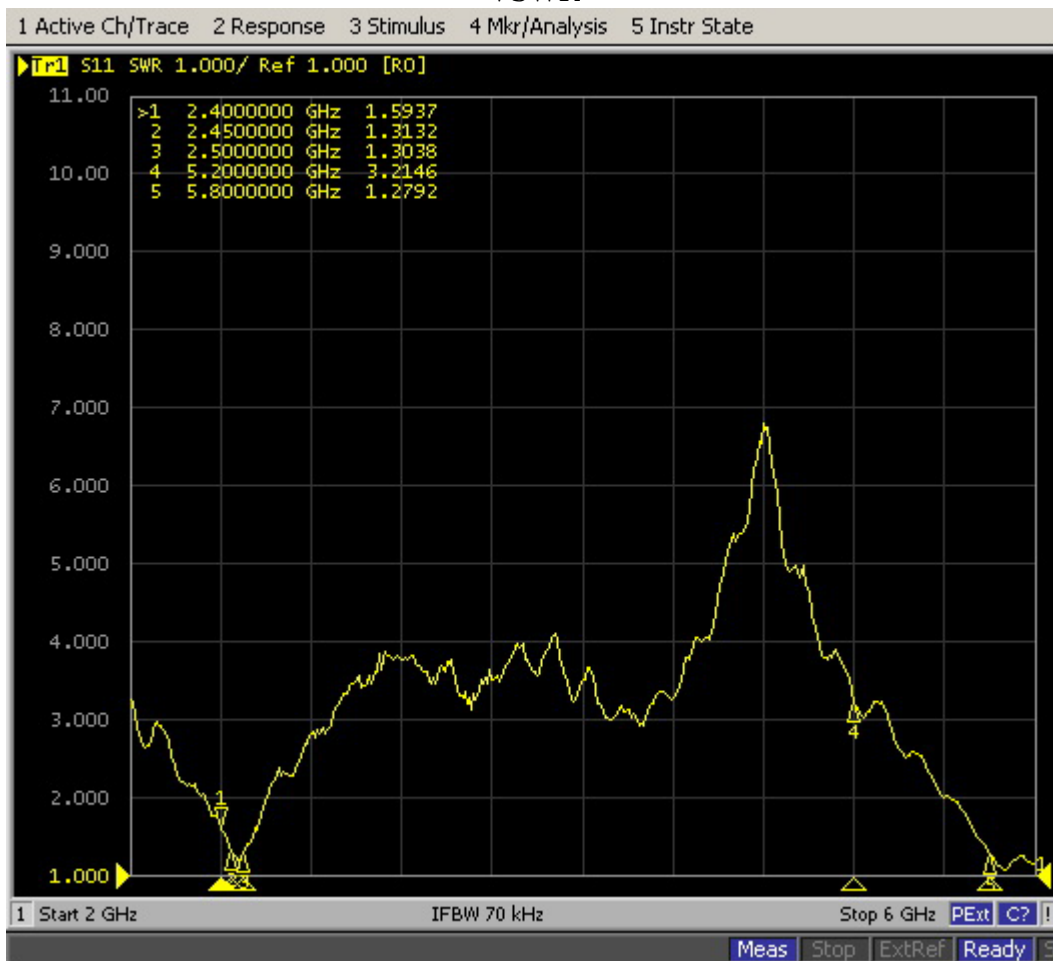

RoHS COMPLIANT

MECHANICAL

Antenna Cover : PU



Antenna Base : PC UL 94V-0

Color : Black

ELECTRICAL

Frequency : 2.4&5.8 GHz

Connector : SMA Male RP

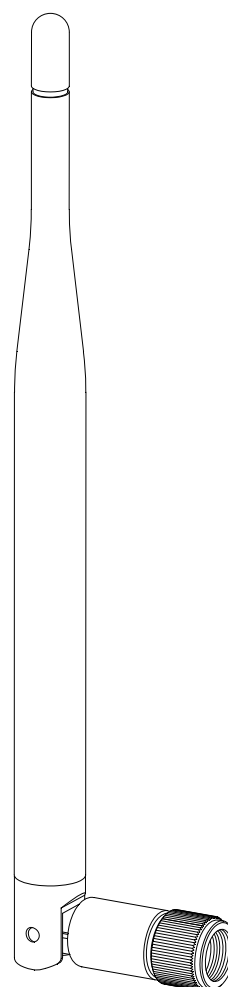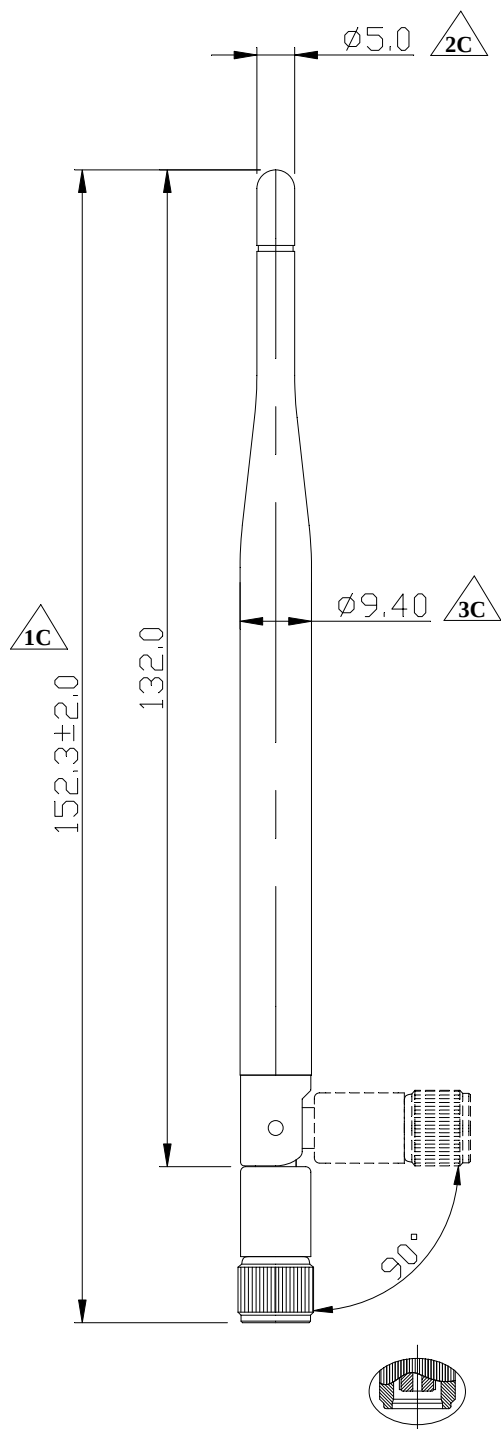

※ 凡標註記號者，為品管檢驗之尺寸

設計 DR. Hayato 2011/08/09		核准 APPD. Jerry 2011/08/09		容許公差 TOLERANCE .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°		品名 ARTICLE 6603-2.4/5.8GHz-SMA		
版本說明 REVISION NOTE				圖號 DWG NO. 6603303081		單位 UNIT 比例 SCALE 張數 SHEET 版本 REV. mm 1/1 1/1 A		