


BEITONG

BEITONG PanGu

Custom Modular Controller

User Manual

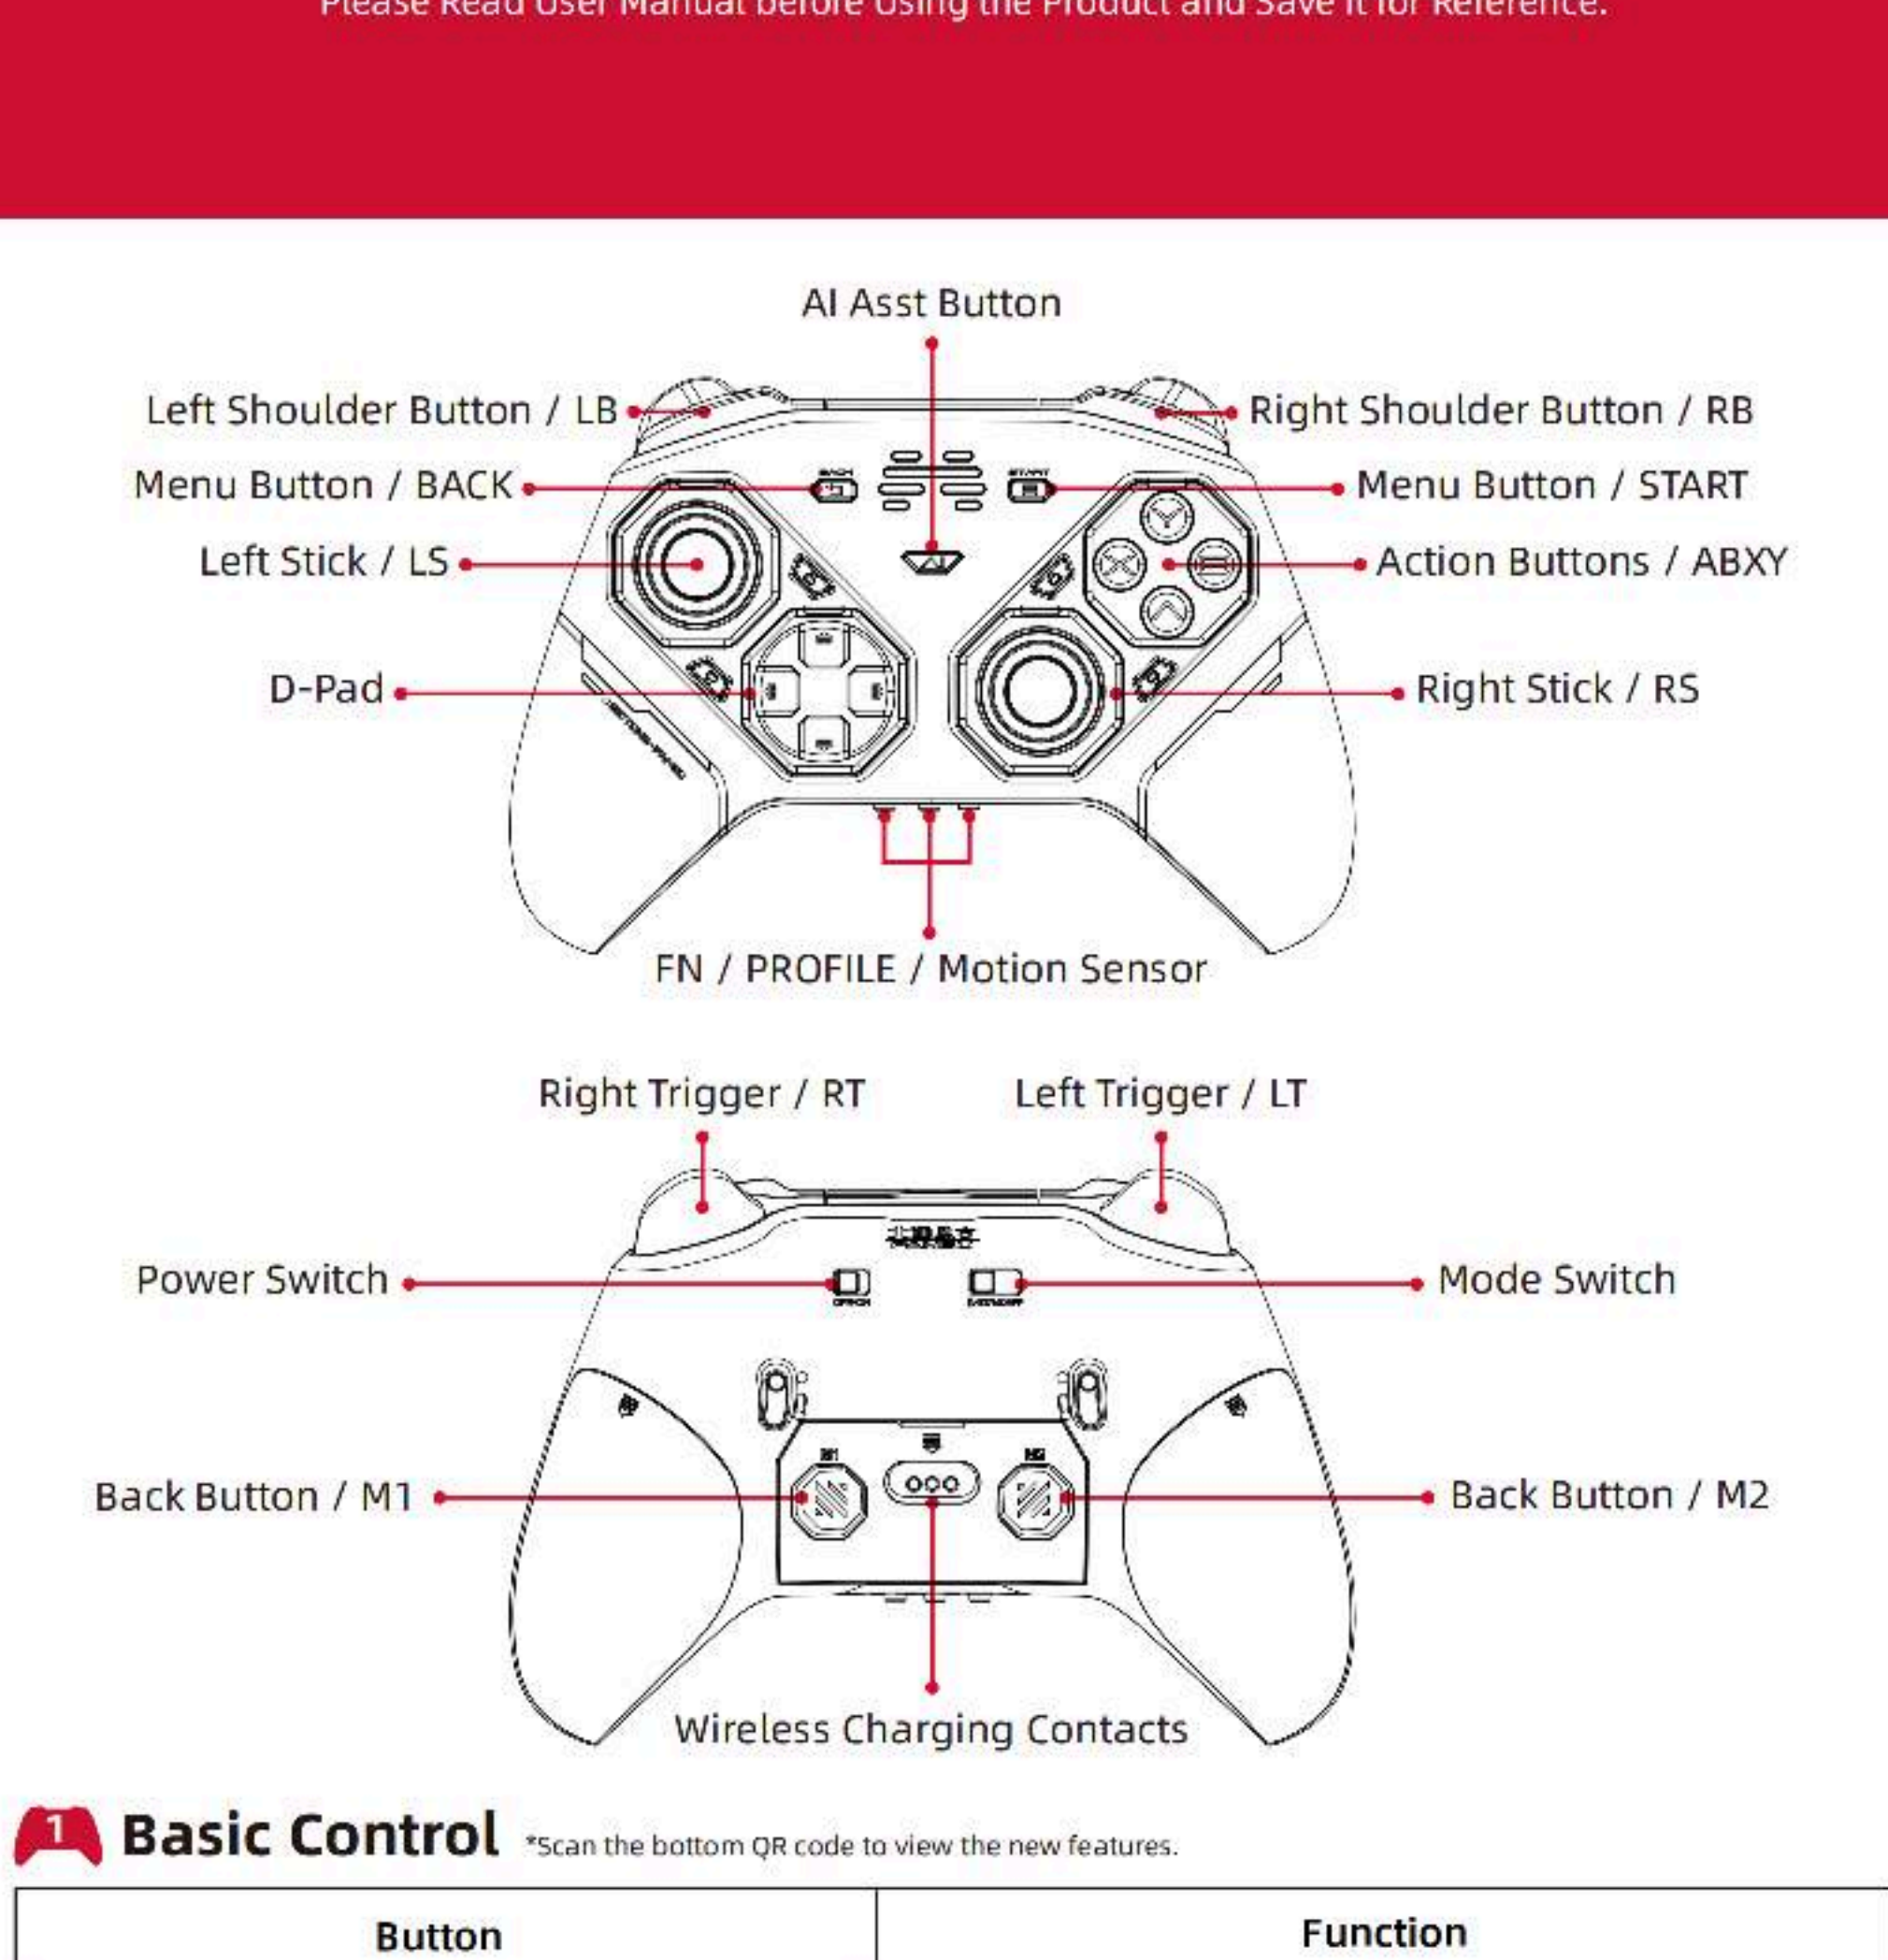

1 Basic Control

*Scan the bottom QR code to view the new features.

Button	Function
AI Button	PC: AI Command Wheel NS: Screenshot
FN Button	Short Press to Activate / Home Button
FN Button (Long Press for 5s)	Force Pairing In Current Mode
Profile Button	Controller Profile Switch
Profile Button (Long Press for 3s)	FlyMouse On/Off
Motion Sensor Switch	Turn Motion Sensor On/Off
Power on with RB+BACK+RS	Clear All Pairing Data
BACK+START+RS	Calibration Mode for Triggers and Sticks
Power on with Y+X	Calibration Mode for Motion Sensors

Receiver Manual

1. Long press receiver button for 3s to indicator fast flash, to pair with the controller.
2. If not connect with the controller in 2 minutes, the receiver indicator will turn off, but it will continue to search the controller. Once connected, the receiver indicator will stay solidly.
3. After successful connecting, short press the receiver button to turn on/off the receiver indicator.

Auto Power Off

Power off after 10 minutes (adjustable) of no inputs while connected.

Auto Power Off (DC)


Power off after being disconnected with no user inputs for 2 minutes.

Calibrate Sticks / Triggers















While connected, press BACK+START+RS to enter the calibration mode. Once entered, the logo light and grip light will flash in a red-green-blue sequence. Rotate left and right sticks in full 360 degrees for 3 times, fully press down triggers for 3 times, then press BACK+START+RS again to finish the calibration. The gamepad will auto-reconnect after the calibration.

Motion Sensor Calibration

1. While powered off, press Y+X+POWER ON to enter the calibration mode. Once entered, the logo light will stay yellow.
2. Then put the gamepad on a flat surface for 5 seconds. A steady orange light for 1 second indicates successful calibration, and the controller is now powered on.

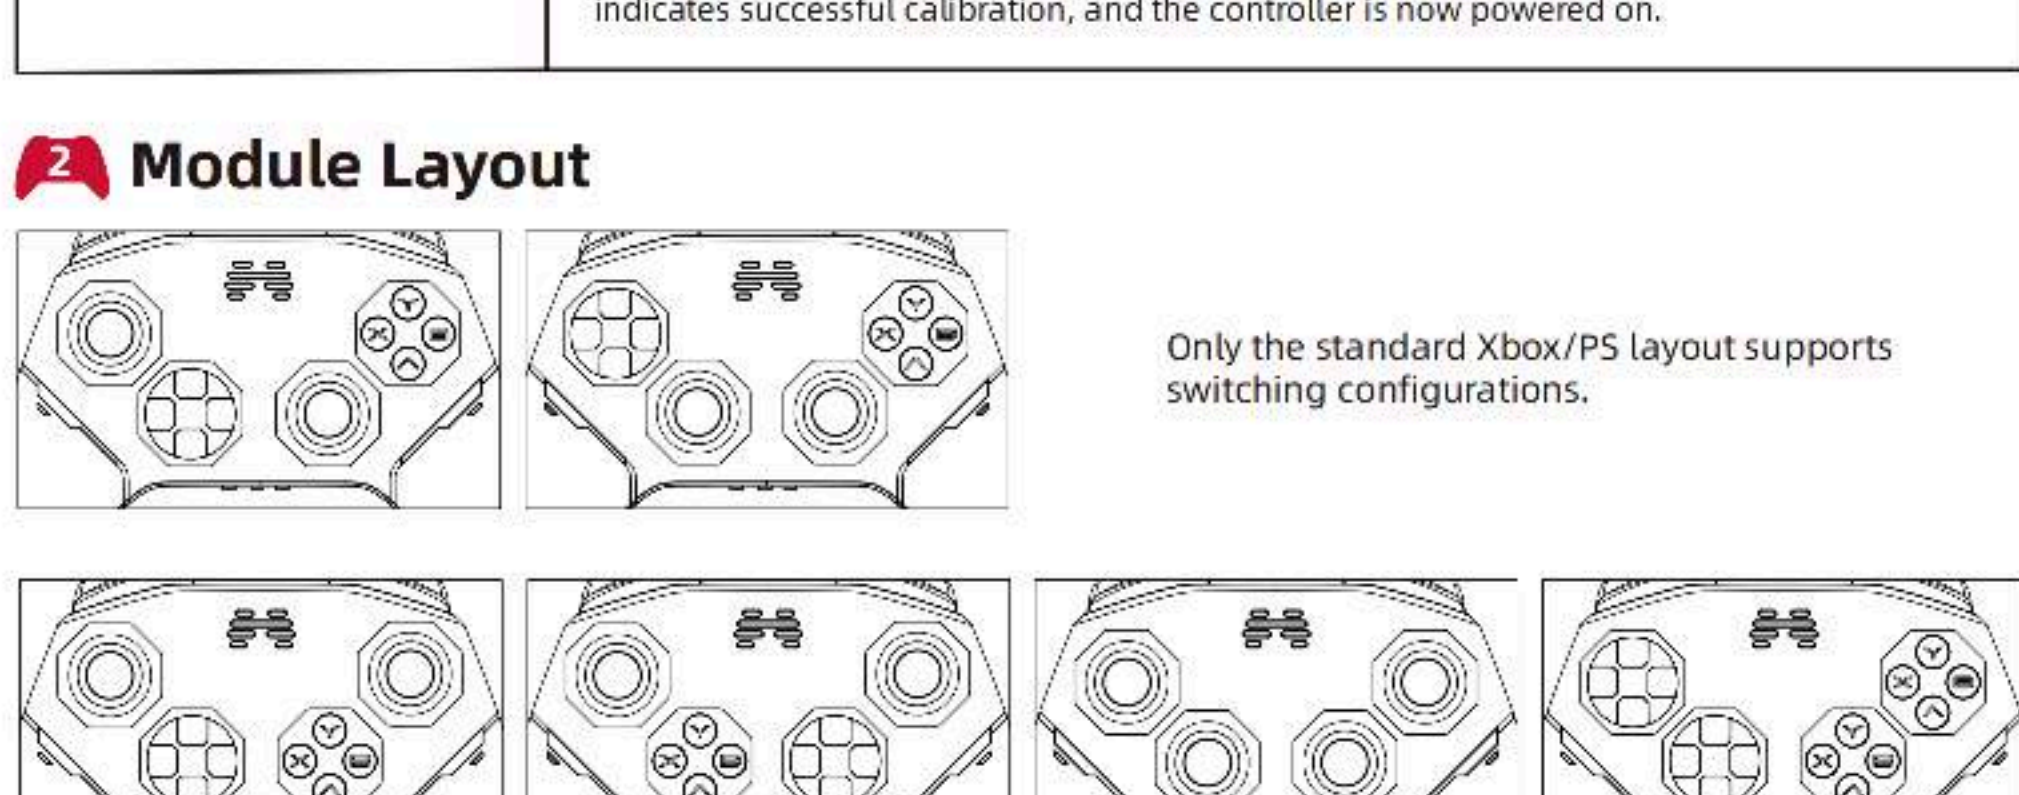

Non-Xbox/PS standard layouts do not support switching configurations. Customize key value in BEITONG iControl.

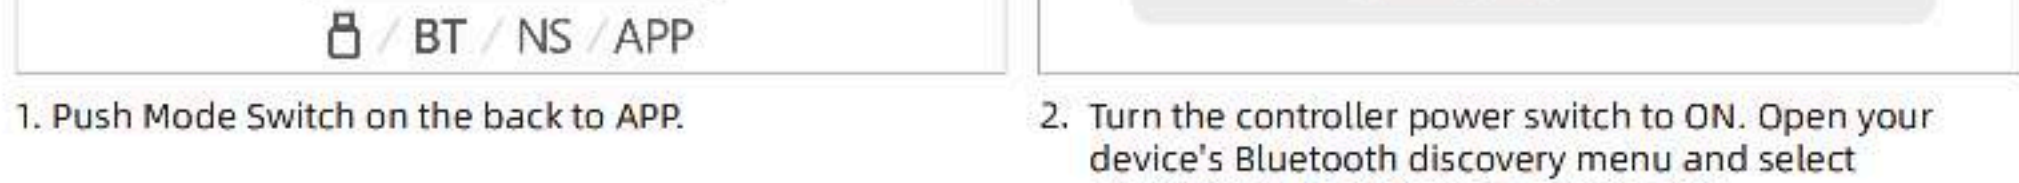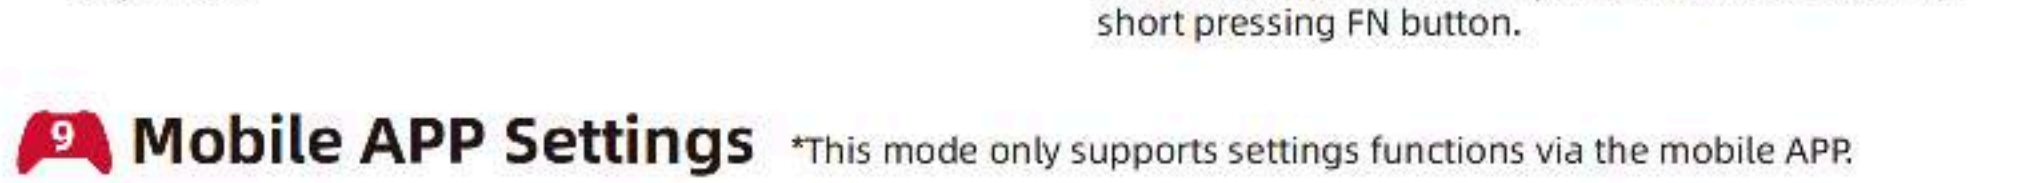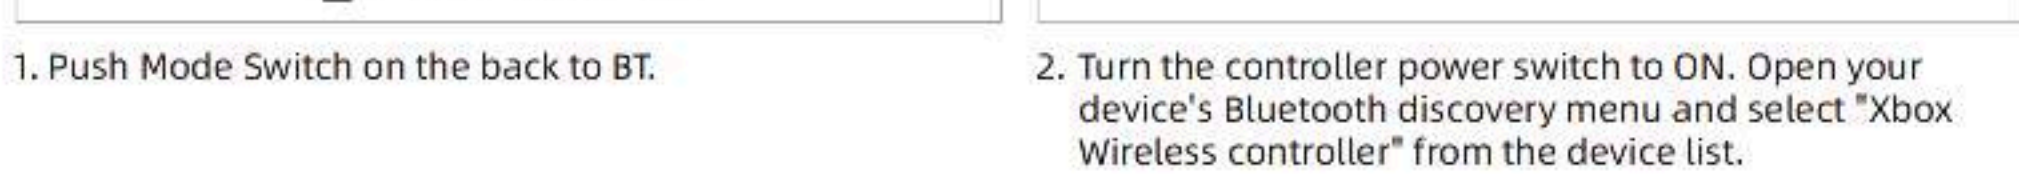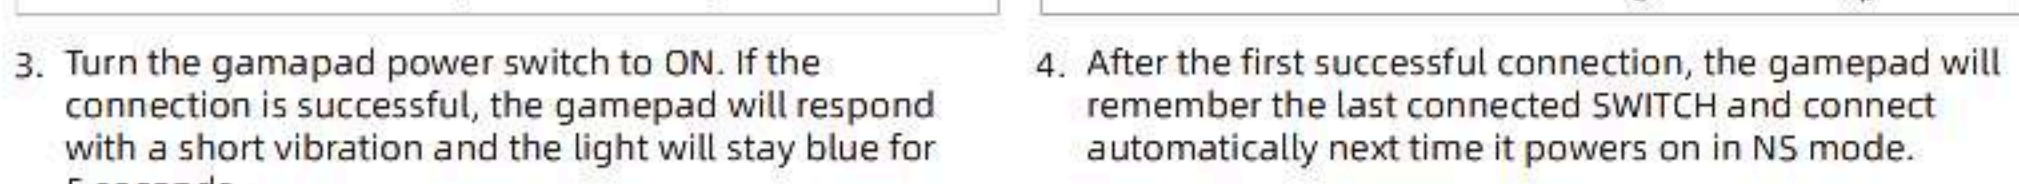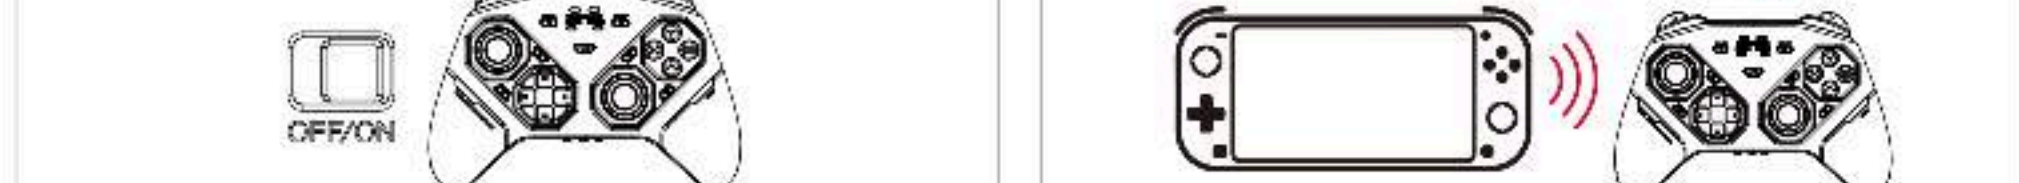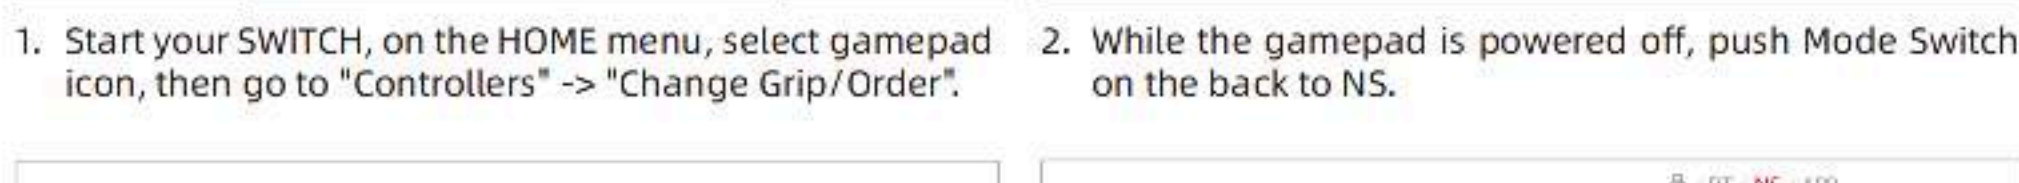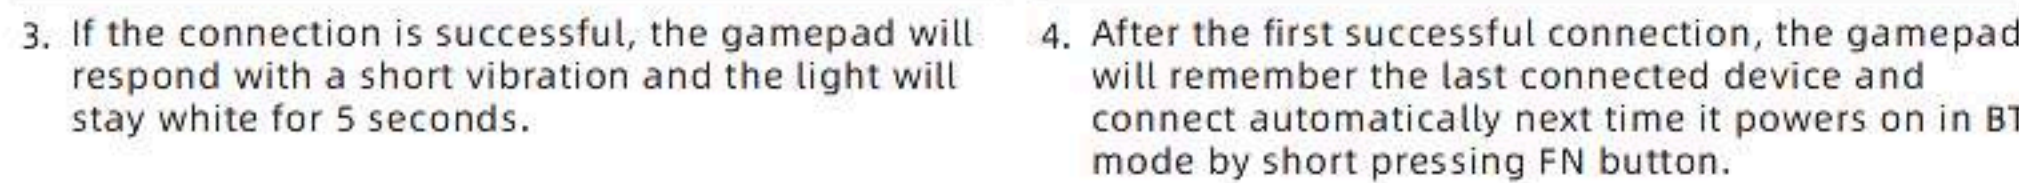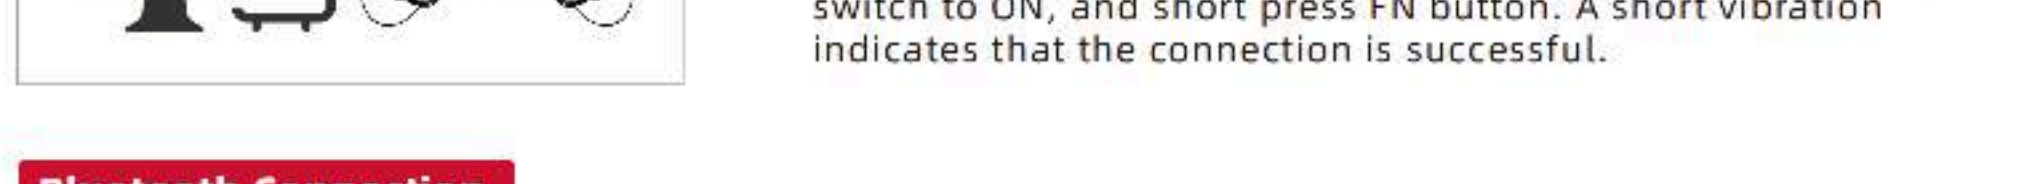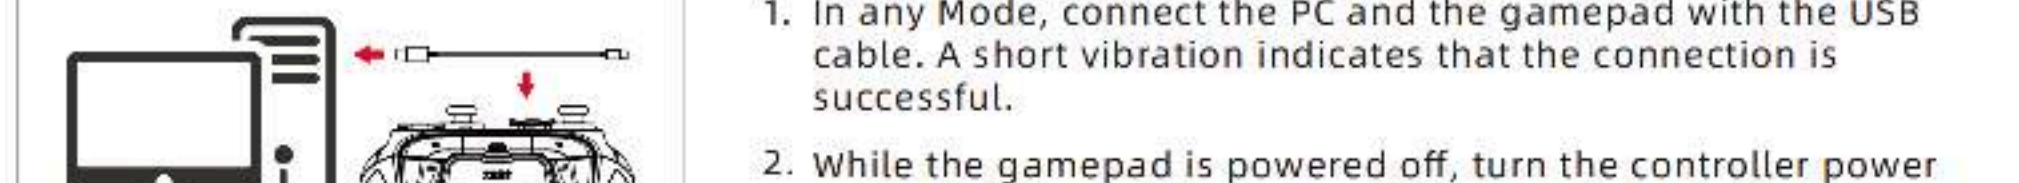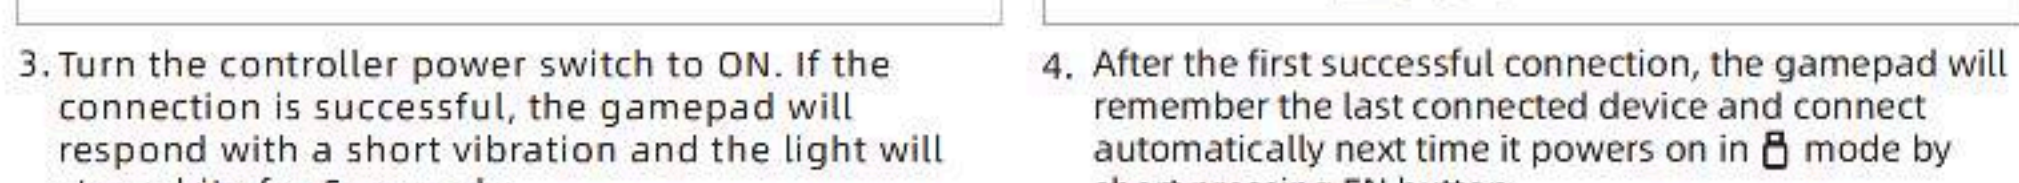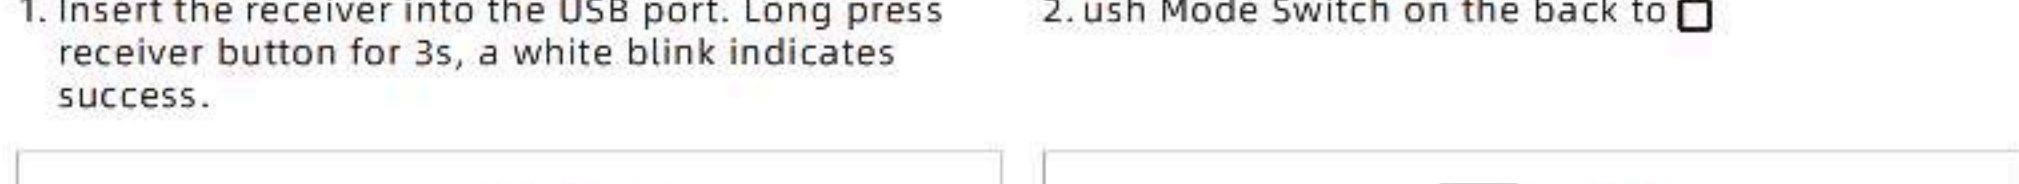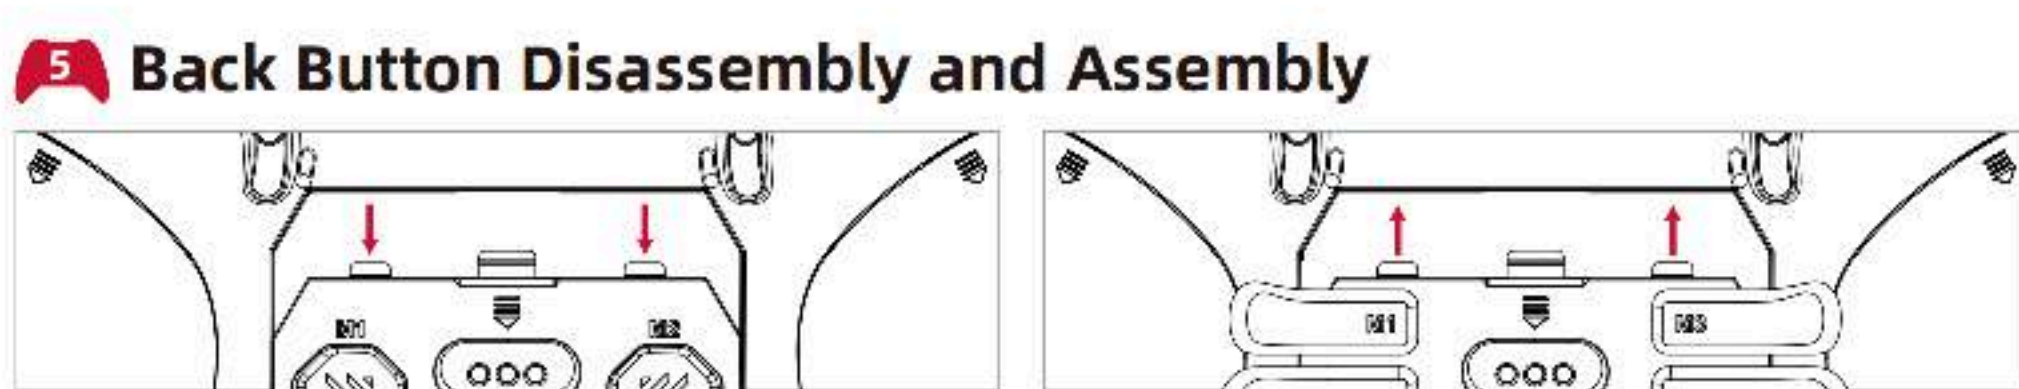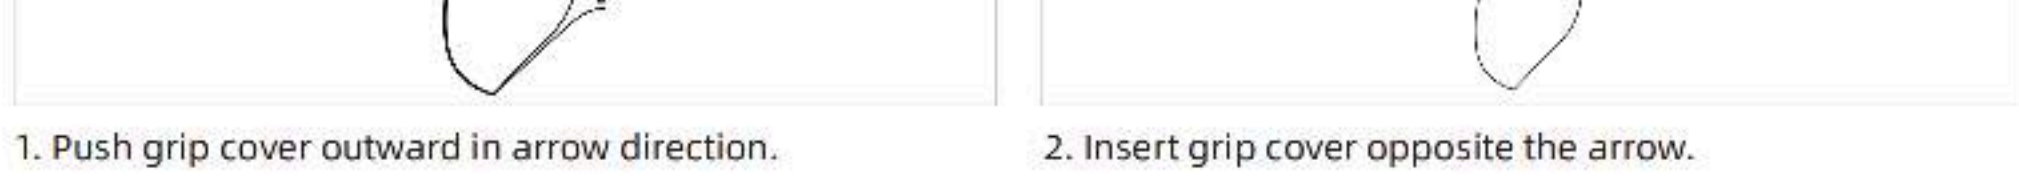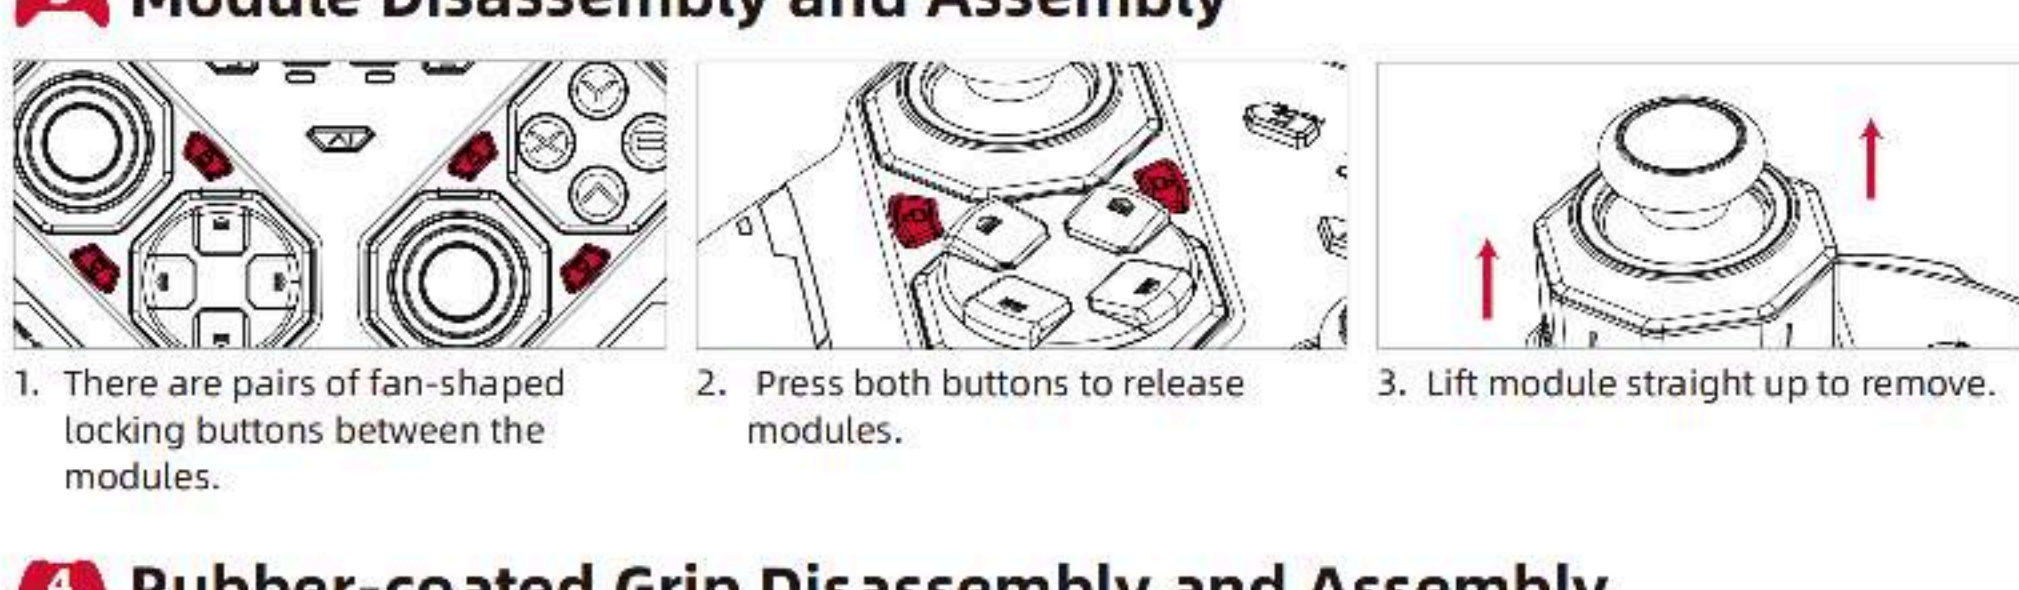


Switch	Mode	Light	Reconnect	Force Pairing	Successful Connection
BT	Receiver Mode				
BT	Xinput Mode	White	Normal White Flash	Fast White Flash	Light stays white for 5 seconds then changes to user-defined light
NS	Switch Mode				
APP	BFM Mode				



Battery Status	Light Indication
Less than 20%	Fast flashing user-defined light
Charging	User-defined light fades in and out
Charging complete	When powered off, user-defined light stays on for 5 seconds then off

* By default, charging light is white. The light's color can be changed in BEITONG iControl controller assistant.

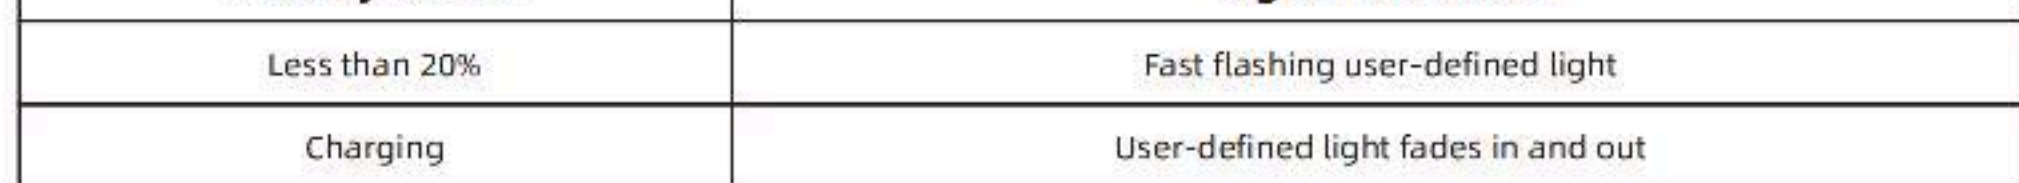

Do not use this device in places where the use of wireless devices is expressly prohibited, as it may interfere with other electronic devices or cause other dangers.

- Contains small parts. Keep away from children under 3. If swallowed, seek emergency medical care.
- Do not close to the open flames
- Do not expose the product in direct sunlight or hot vehicles
- Do not expose to humidity/dust
- Do not hit or drop the product
- Do not let the liquid contact with USB ports
- Do not bend or drag cables forcefully
- Please Clean with soft dry microfibre cloth
- Do not use gas and solvents to clean
- Do not disassemble, repair or modify by yourself
- Please use only as intended by the original design. We're not responsible for accidents if you modify or misuse this product.
- Do not stare at beams - eye injury risk
- Contact customer service for quality issue



Lift the default plate vertically upward to detach. Align the PanGu's plate with dock slots. Insert vertically to ensure the plate into position.

FC This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

CE This equipment has been tested against the listed standards and found to comply with the requirements of EMC Directive 2014/30/EU, LVD Directive 2014/35/EU, and RF Directive 2014/53/EU. The CE marking can be used to certify that a product complies with European Union (EU) health, safety, and environmental requirements



This product, its battery, or the packaging may bear this symbol, indicating that this product and any contained batteries must not be disposed of with your household waste. Instead, you are responsible for handing them over to applicable collection points for the recycling of batteries and electrical electronic equipment. This separate collection and recycling will help protect natural resources and prevent potential negative consequences for human health and the environment due to harmful substances that may be present in batteries and electrical electronic devices, which could arise from improper disposal. For more information on where to dispose of batteries and electronic waste, please contact your local city/municipal office, your household waste disposal service, or the store where you purchased this product. For more information about the disposal of electrical electronic equipment and waste batteries, please contact beitong-overseas@beitong-cn.com.

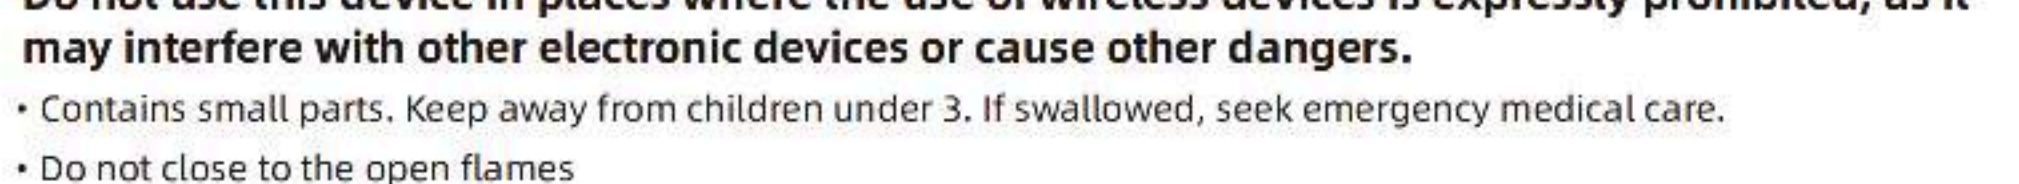

User Manual Innovative Tech, For Game And Life


BEITONG

BEITONG PanGu

カスタムモジュールコントローラ

ユーザーマニュアル

製品を使用する前にユーザーマニュアルをご覧ください。保管してください。

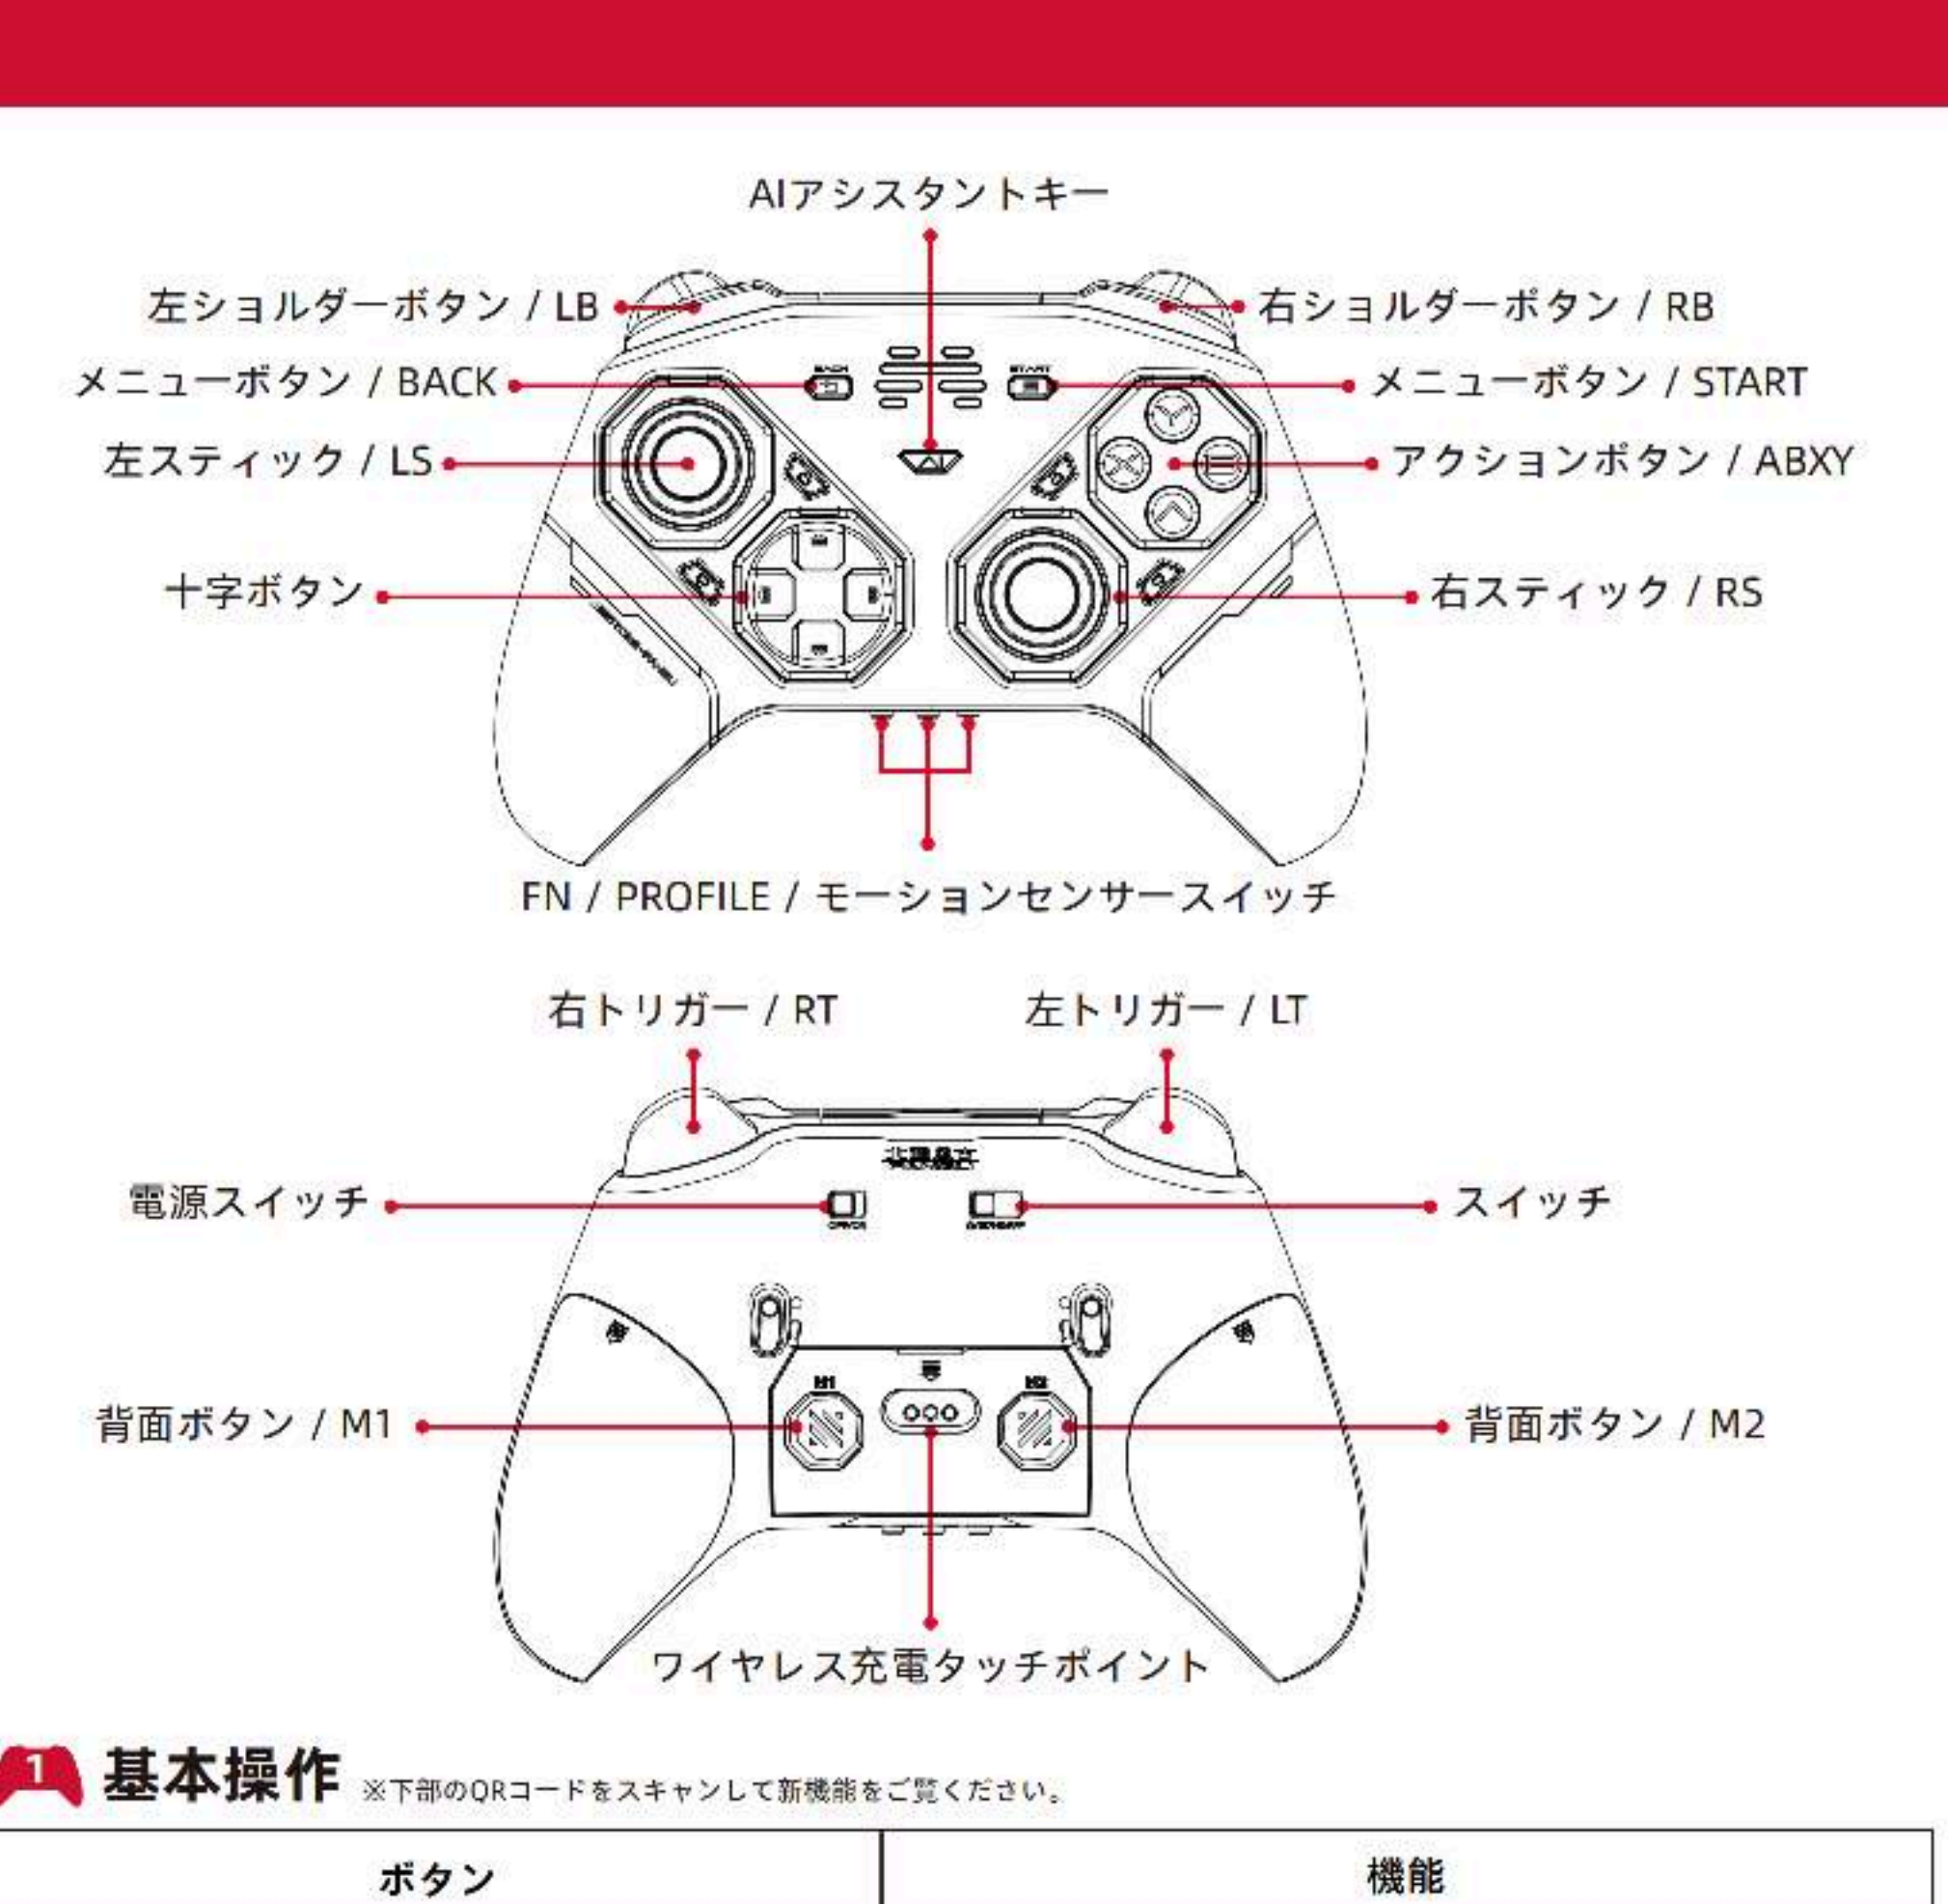

1 基本操作

*下部のQRコードをスキャンして新機能ををご覧ください。

ボタン	機能
AIアシスタントボタン	PC: 北通ゲームセンターを起動すればAI機能が使用可能。 NS: スクリーンショット
FNボタン	短押しでコントローラーを起動します / HOMEボタン
FNボタン (5秒長押し)	現在のモードで強制リペアリング
PROFILEボタン (3秒短押し)	コントローラーの設定を切り替えます
PROFILEボタン (3秒短押し)	マウスのオン/オフ
モーションセンサースイッチ	モーションセンサーのオン/オフ
RB+BACK+RS+ONで電源オン	すべてのリペアリングデータを消去
BACK+START+RS	トリガーとスティックのキャリブレーションモード
Y+X+ONで電源オン	モーションセンサーのキャリブレーションモード

レシーバー説明

1. レシーバーのボタンを3秒間長押しし、LEDが高速で点滅する状態にしてから、コントローラーとペアリングを行ってください。
2. 2分以内にコントローラーとの接続に失敗した場合は、レシーバーのLEDは消灯するが、接続失敗は継続される。コントローラー-接続後に正常する。
3. 接続成功後、レシーバーのボタンを10回押すことで、レシーバーのLEDをオン/オフできます。

自動電源オフ

コントローラーが接続中に、10分間センサー動作がなく、かつアシスタントで電源オフ経路が変更されていない場合は、自動的に電源がオフになります。

自動電源オフ (DC)

切断後、2分間ユーザー入力がないと電源がオフになります。

スティックトリガーのキャリブレーション















電源が入っている状態で「BACK+START+RS」を押すとキャリブレーションモードに入ります。キャリブレーションモードに入ると、ロゴライトが赤、緑、青の順に点滅します。左右のスティックを360度回転させ、トリガーも360度押し込みます。もう一度「BACK+START+RS」を押してキャリブレーションは完了します。

モーションセンサーのキャリブレーション


電源が入っていない状態で「Y+X+POWER ON」を押してキャリブレーションモードに入ります。キャリブレーションモードに入ると、ロゴライトが黄色に点滅するので、ゲームパッドを平らな面に5秒間置きます。ライティングが黄色に2回点滅したら、キャリブレーションは完了します。



XBOX/PS以外の標準レイアウトは、切り替えられません。ゲームホールでキー値を設定できます

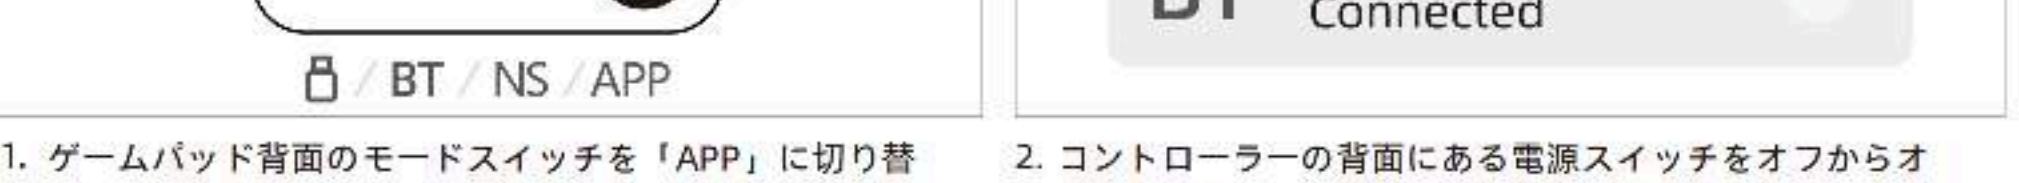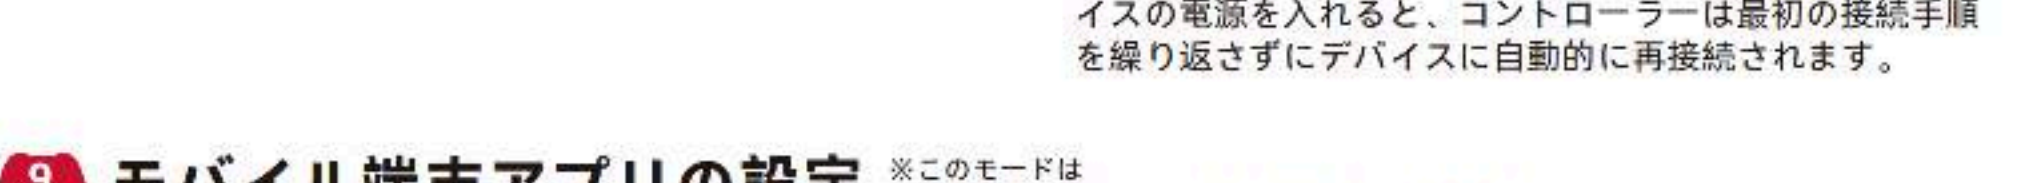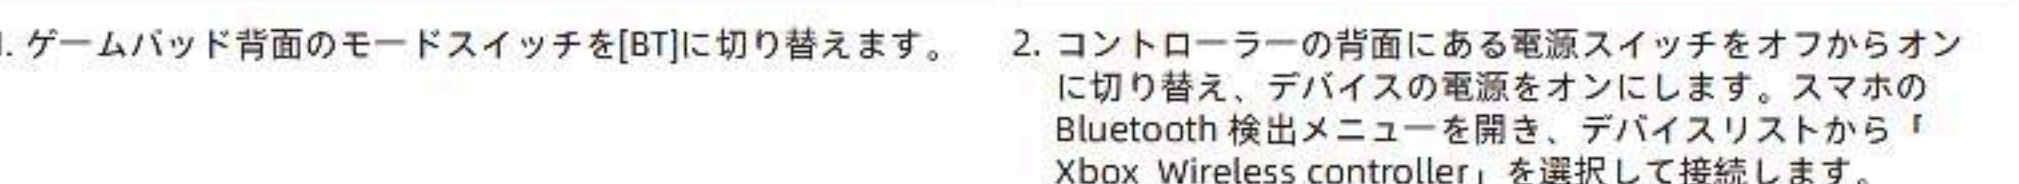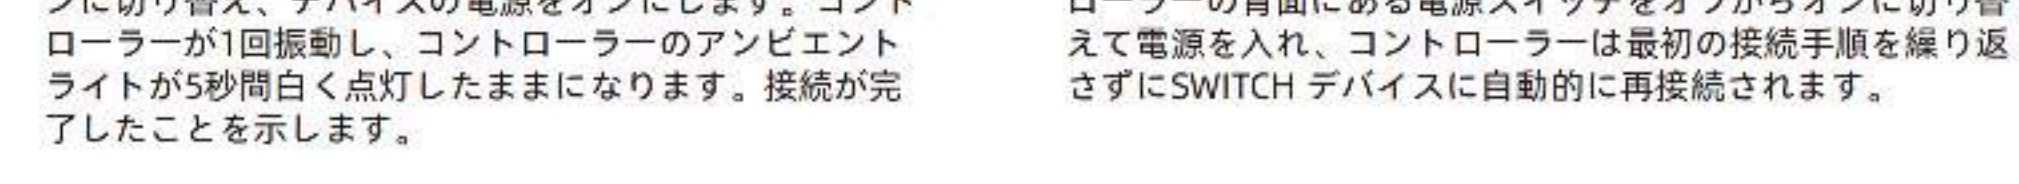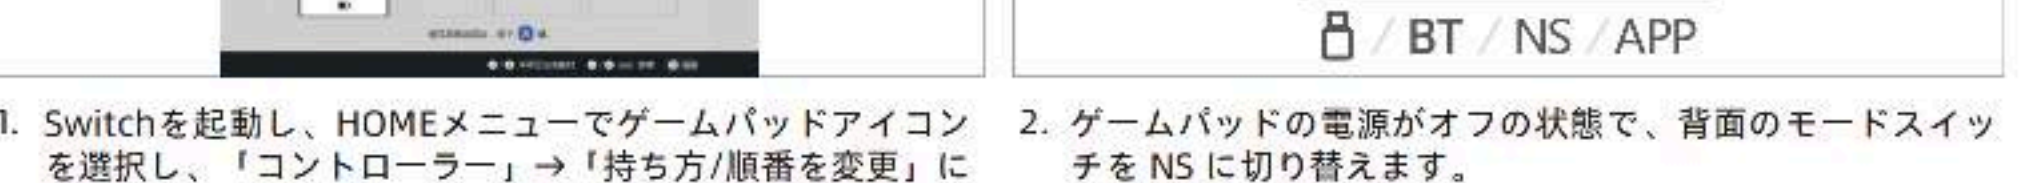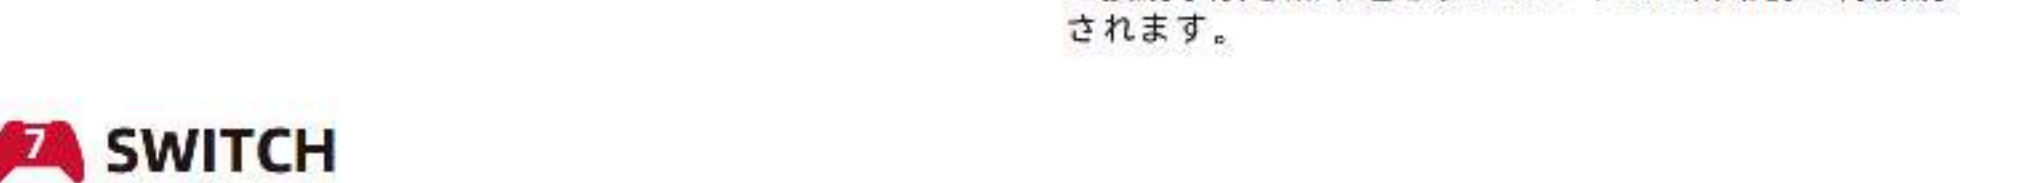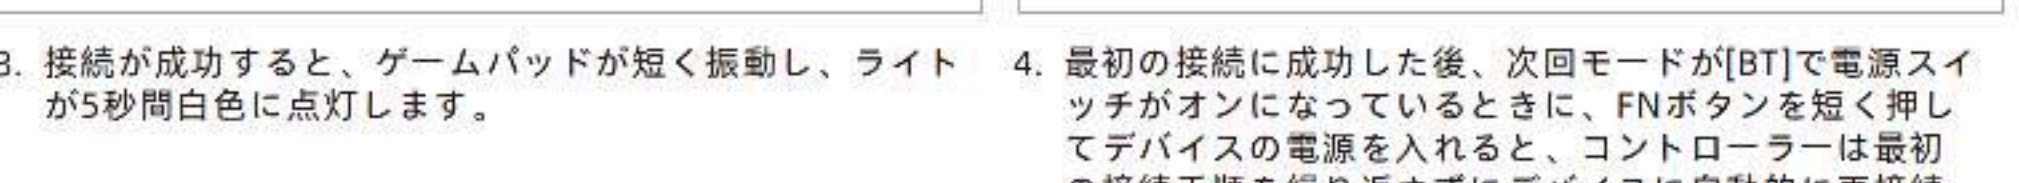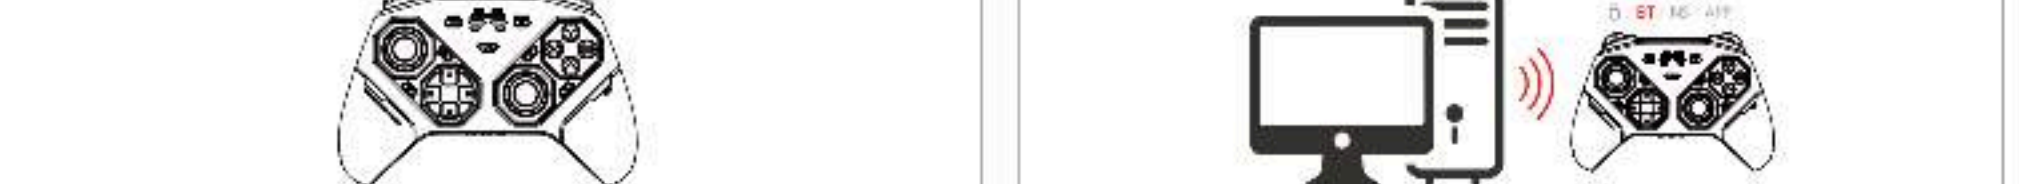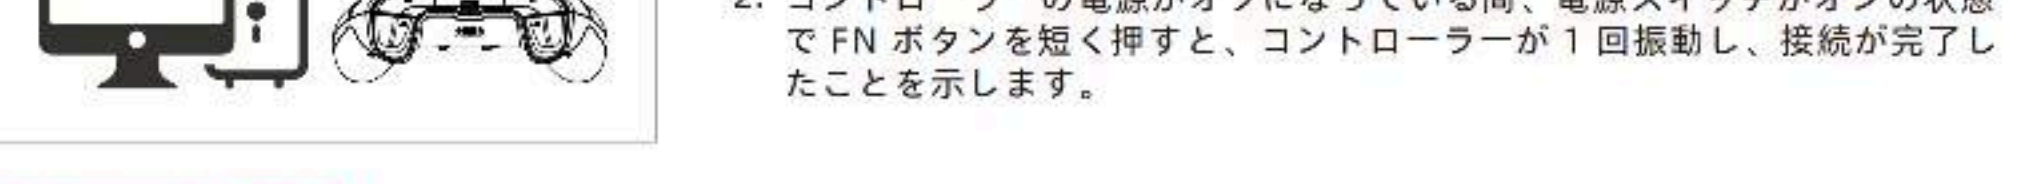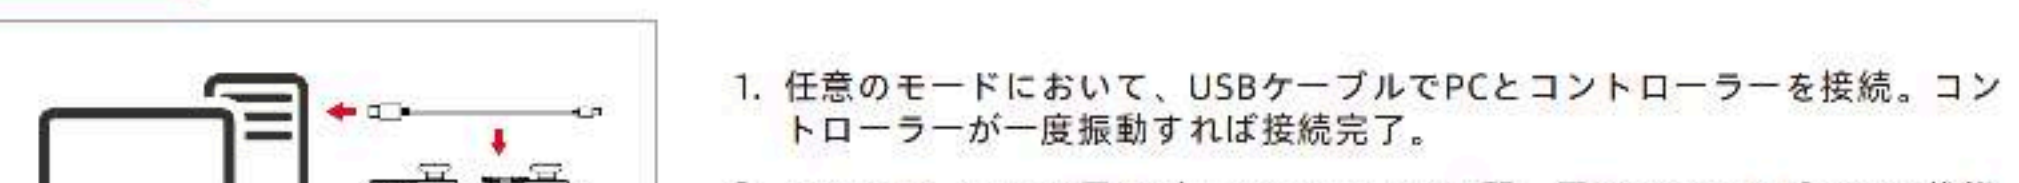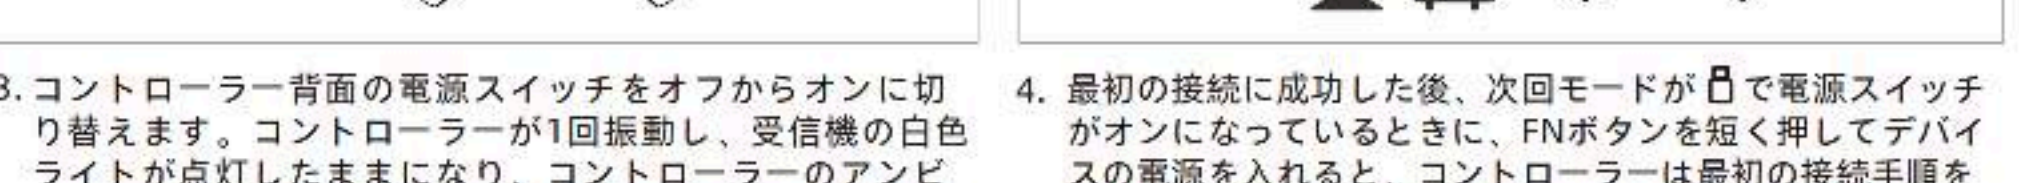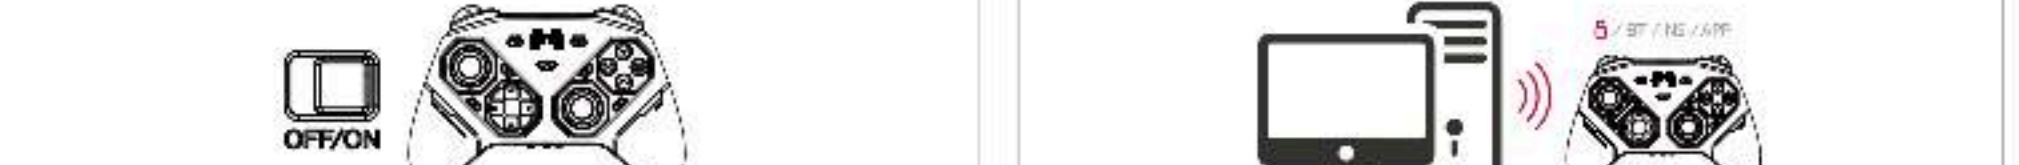
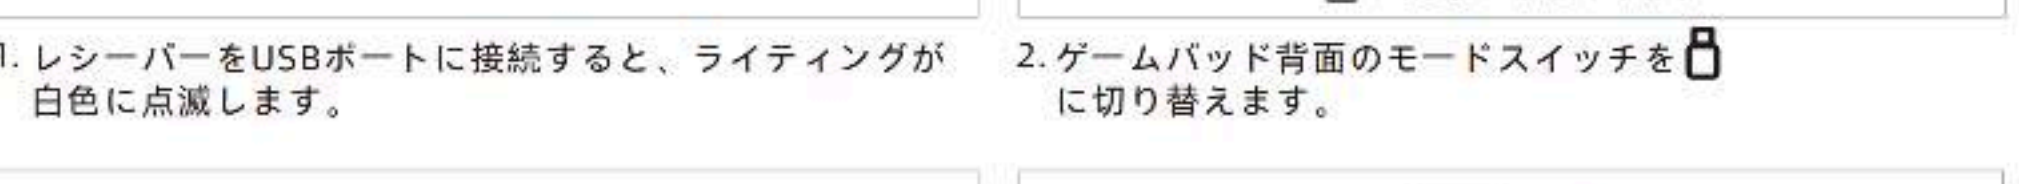
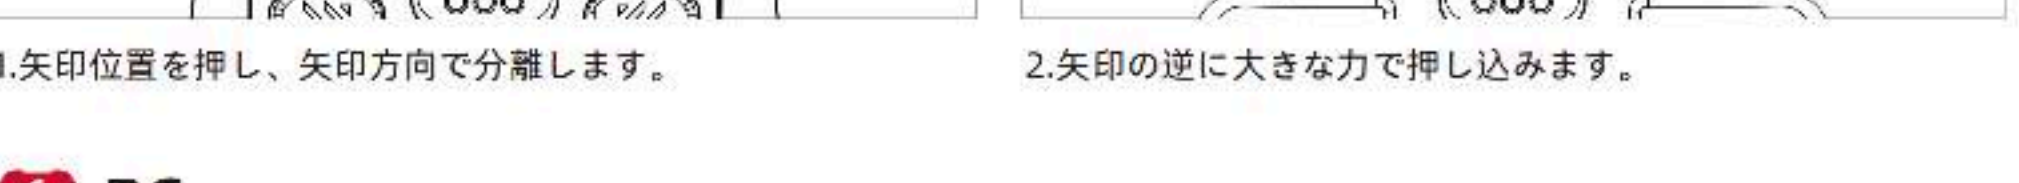


Switch	モード	ライト	再接続	強制リペアリング	接続成功
BT	レシーバーモード				
BT	Xinputモード	白	通常速度で白色点滅	高速で白色点滅	ライティングが5秒間白色で点灯した後、ユーザー設定のライティングに切り替わります
NS	スイッチモード				
APP	BFMモード				

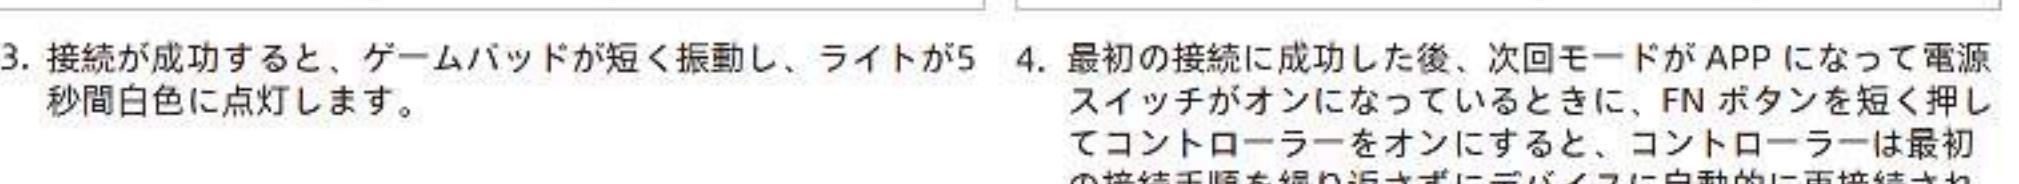


バッテリー状態	ライト表示
20%未満	ユーザー設定のライティングが高速で点滅します
充電中	ユーザー設定のライティングがフェードイン/フェードアウト
C充電完了	電源オフ時: ユーザー設定のライティングが5秒間点灯し、その後消灯します 電源オン時: ユーザー設定のライティングが切り替わります

デフォルトの設定では、充電時にインジケータは白色になっています。ライティングの色はBEITONG iControlでカスタマイズできます。

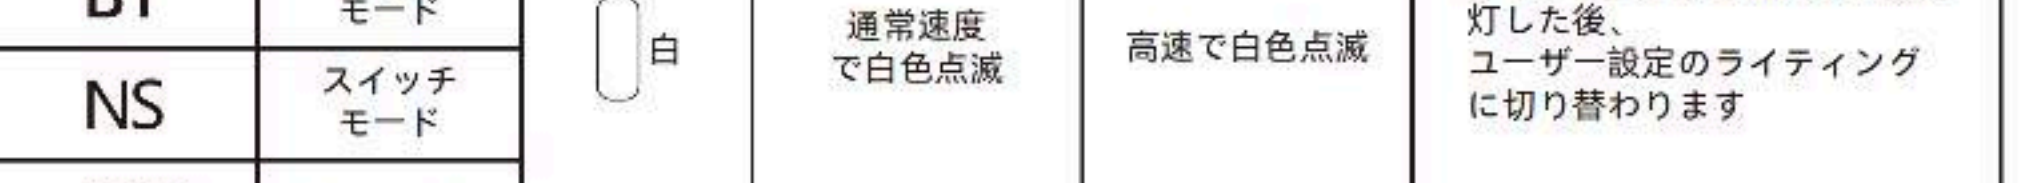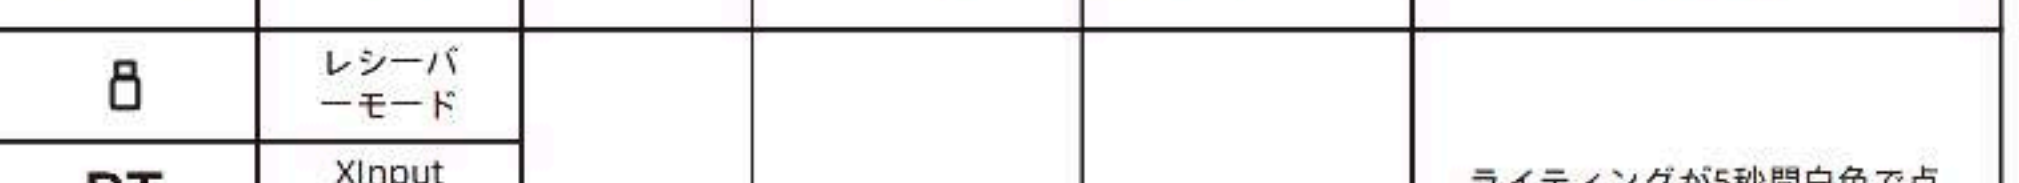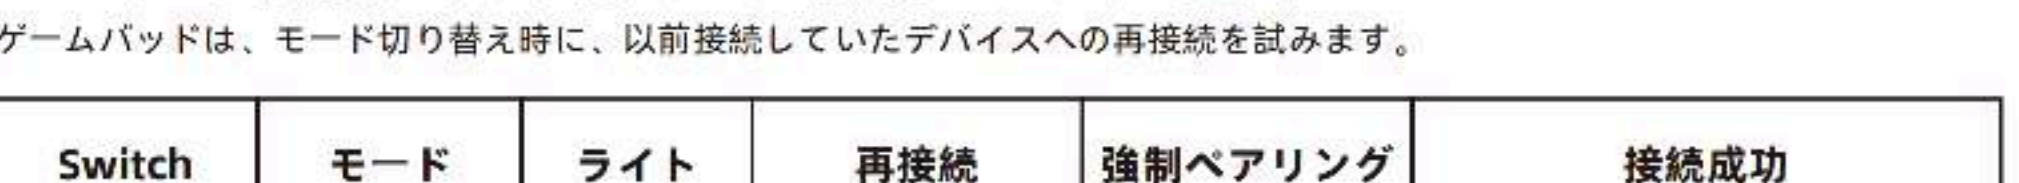

ワイヤレスデバイスの使用が明示的に禁止されている場所では、本製品を使用しないでください。他の電子機器に干渉したり、その他の危険を引き起こす可能性があります。

- 小さな部品が含まれている。3歳未満の子供の手の届かない場所に保管してください。飲み込んだり、吸い込んだりした場合は、直ちに医師の診察を受けてください。
- 火気や近づく本製品を使用しないでください。
- 直射日光や高温になる場所を避けてください。
- 湿気やほこりの多い場所に保管しないでください。
- 衝撃を与えたり、落としたりしないでください。
- USBポートに直接触れないでください。故障の原因となる場合があります。
- ケーブルを無理に曲げたり、引っ張ったりしないでください。
- 乾いた柔らかい布で洗浄してください。
- ガソリンやシンナーなどの化学製品は使用しないでください。
- ご自身で分解、修理、改造しないでください。
- 本来の用途以外に使用しないでください。本来の用途以外での使用による事故や損害については、当社は一切責任を負いません。
- ピームを直接見ないでください。目を傷める可能性があります。
- 製品の品質について質問やご意見がございましたら、カスタマーサービスホットラインまでご連絡ください。

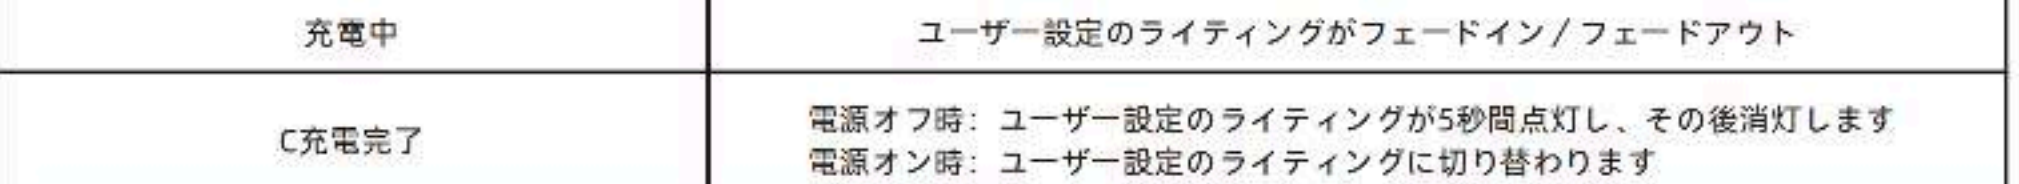

標準ブラケットを背面に上向きにカチッとベースに付属のブラケットを取り付けます。スロットに正確に差し込み、カチンと音がするまでしっかりと固定します。