



Project No.: TM-2603000054P
Report No.: TMTN2603000208NR

FCC ID: 2AWUU60B5901

Page: 1 / 65
Rev.: 01

FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10: 2020

TEST REPORT

For

Wireless Button

Model: QB11-W-HW

Brand: Verkada

Issued for

Verkada Inc

405 E. 4th Ave., San Mateo, California, United States, 94401

Issued by

Compliance Certification Services Inc.

Tainan Lab.

No. 168, Ln. 523, Sec. 3, Zhongzheng Rd.,
Rende Dist., Tainan City, 717017, Taiwan

Issued Date: April 17, 2026

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any

REVISION HISTORY

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 10, 2026	Initial Issue	ALL	Gina Lin
01	April 17, 2026	See the following note rev.01	ALL	Gina Lin

Note:

- ✘ Rev.00 Issue Date: April 10, 2026
Original report.
- ✘ Rev.01 Issue Date: April 17, 2026
Corrected the version of ANSI C63.10.

TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	6
4. TEST METHODOLOGY	8
5. FACILITIES AND ACCREDITATIONS.....	8
5.1 FACILITIES.....	8
5.2 EQUIPMENT.....	8
5.3 LABORATORY ACCREDITATIONS LISTINGS	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	9
5.5 MEASUREMENT EQUIPMENT USED.....	10
6. CALIBRATION AND UNCERTAINTY.....	11
6.1 MEASURING INSTRUMENT CALIBRATION.....	11
6.2 MEASUREMENT UNCERTAINTY	11
7. SETUP OF EQUIPMENT UNDER TEST.....	12
7.1 SETUP CONFIGURATION OF EUT.....	12
7.2 SUPPORT EQUIPMENT	12
7.3 EUT OPERATING CONDITION	12
8. APPLICABLE LIMITS AND TEST RESULTS.....	13
8.1 6DB BANDWIDTH	13
8.2 MAXIMUM PEAK OUTPUT POWER.....	16
8.3 DUTY CYCLE	19
8.4 POWER SPECTRAL DENSITY	22
8.5 CONDUCTED SPURIOUS EMISSION.....	25
8.6 RADIATED EMISSIONS	30
8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS.....	30
8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHZ	34
8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHZ	46
8.7 POWERLINE CONDUCTED EMISSIONS	52
9. ANTENNA REQUIREMENT	55
9.1 STANDARD APPLICABLE	55
9.2 ANTENNA CONNECTED CONSTRUCTION	55
APPENDIX I SETUP PHOTOS	56
APPENDIX II EUT PHOTOS	61

Report No.: TMTN2603000208NR

1. TEST REPORT CERTIFICATION

Applicant : Verkada Inc
405 E. 4th Ave., San Mateo, California, United States, 94401
Manufacturer : Verkada Inc
405 E. 4th Ave., San Mateo, California, United States, 94401
Equipment Under Test : Wireless Button
Model : QB11-W-HW
Brand : Verkada
Date of Test : March 04, 2026 ~ March 06, 2026

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C AND ANSI C63.10: 2020	No non-compliance noted

Statements of Conformity
Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

FCC Standard Section	Report Section	Test Item	Result
15.247(a)	8.1	6dB BANDWIDTH	Pass
15.247(b)	8.2	MAXIMUM PEAK OUTPUT POWER	Pass
N/A	8.3	DUTY CYCLE	N/A
15.247(e)	8.4	POWER SPECTRAL DENSITY	Pass
15.247(d)	8.5	CONDUCTED SPURIOUS EMISSION	Pass
15.205(a)	8.6	RADIATED EMISSIONS	Pass
15.207(a)	8.7	POWERLINE CONDUCTED EMISSIONS	N/A

Approved by:



John Chen
Asst Supervisor

2. EUT DESCRIPTION

Product Name	Wireless Button
Model	QB11-W-HW
Brand	Verkada
Received Date	March 04, 2026
Frequency Range	915.0MHz ~915.7MHz
Transmit Power	19.88 dBm (97.252mW)
Channel Spacing	0.35 MHz
Channel Number	3 Channels
Transmit Data Rate	80kbps
Type of Modulation	OQPSK
Antenna Type	Type: Trace on Board PIFA antenna Model: QB11-W Manufacturer: N/A Gain: -0.6 dBi
Power Rating	3Vdc - 350mA
RF Module Brand /Model	EFR32FG23 / Silicon Labs
Software Version	Rev.0
Firmware Version	Rev.0
Temperature Range	0°C ~ +50°C
Reported Date	March 24, 2026

REMARK:

1. The sample (**QB11-W-HW**) selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **2AWUU60B5901**, filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the User's manual of the EUT.

3. DESCRIPTION OF TEST MODES

The EUT is a Wireless Button.

The RF chipset is manufactured by Silicon Labs.

The antenna peak gain -0.6 dBi (highest gain) were chosen for full testing.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	915
High	915.7

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type
Low, High	OFDM	OQPSK

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type
Low, High	OFDM	OQPSK

Bandedge Measurement :

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type
Low, High	OFDM	OQPSK

Antenna Port Conducted Measurement :

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type
Low, High	OFDM	OQPSK

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 and FCC CFR 47 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- ☐ No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)
- ☒ No. 168, Ln. 523, Sec. 3, Zhongzheng Rd., Rende Dist., Tainan City 717017, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW1109).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada (TW1109)
Germany	TUV NORD
Taiwan	BSMI
USA	FCC

5.5 MEASUREMENT EQUIPMENT USED

For §8.6

Chamber 1166 Room (Radiation Test)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Active Loop Antenna	ETS-LINDREN	6502	8905-2356	09/01/2025	08/31/2026
Band Reject Filter	MICRO-TRONICS	HPM13525	006	01/13/2026	01/12/2027
Bilog Antenna with 6dB Attenuator	SUNOL SCIENCES & EMCI	JB1 & N-6-06	A021306 & AT-N0682	10/08/2025	10/07/2026
Cable	EMCI	EM102-KMKM	CB1166-01	01/13/2026	01/12/2027
Double Ridged Guide Horn Antenna	ETS.LINDGREN	3117	00078733	04/28/2025	04/27/2026
EMI Test Receiver	R&S	ESCI 7	100856	06/23/2025	06/22/2026
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/24/2025	07/23/2026
Pre-Amplifier	EMEC	EM01G40GA	060919/S02-130417-307	05/06/2025	05/05/2026
Software	Excel(ccs-o6-2020 v1.1) · e3(v6.101222)				

For §8.1~8.5

Chamber 1166 Room (Conducted Test)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/24/2025	07/23/2026
SMA Cable+10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/13/2026	01/12/2027
Software	Excel(ccs-o6-2020 v1.1)				

For §8.7

Conducted Emission room #1					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
Test S/W	-				

6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Measurement	Uncertainty
AC Powerline Conducted Emission	$\pm 2.21\text{dB}$
Channel Bandwidth	$\pm 2.87\%$
RF output power (Spectrum)	$\pm 2.88\text{dB}$
RF Output power (Power Meter & Power sensor)	$\pm 0.243\text{dB}$
Power Density	$\pm 2.87\text{dB}$
Conducted Bandedge	$\pm 2.87\text{dB}$
Conducted Spurious Emission	$\pm 2.88\text{dB}$
Channel Separation	$\pm 2.87\text{dB}$
In-Band Emission (Channel Mask)	$\pm 2.88\text{dB}$
Frequency Stability	$\pm 0.03\text{ ppm}$

Uncertainty figures are valid to a confidence level of 95%, K=2

7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT



7.2 SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	N/A	N/A	N/A	N/A	N/A

No.	Signal cable description	
A	N/A	N/A

REMARK:

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7.3 EUT OPERATING CONDITION

RF Setup

1. Set up a whole system as the setup diagram.
2. Turn on power.


8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6dB BANDWIDTH

LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST SETUP



TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST RESULTS

No non-compliance noted.



Model Name	QB11-W-HW	Test By	Ted Huang
Temp & Humidity	24.2°C, 56%	Test Date	2026/03/06

TX mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	915	508.10	500	PASS
High	915.7	503.70	500	PASS

NOTE : 1. The cable assembly insertion loss of 10.63dB was entered as an offset in the spectrum analyzer to allow for direct reading of power.

6dB BANDWIDTH

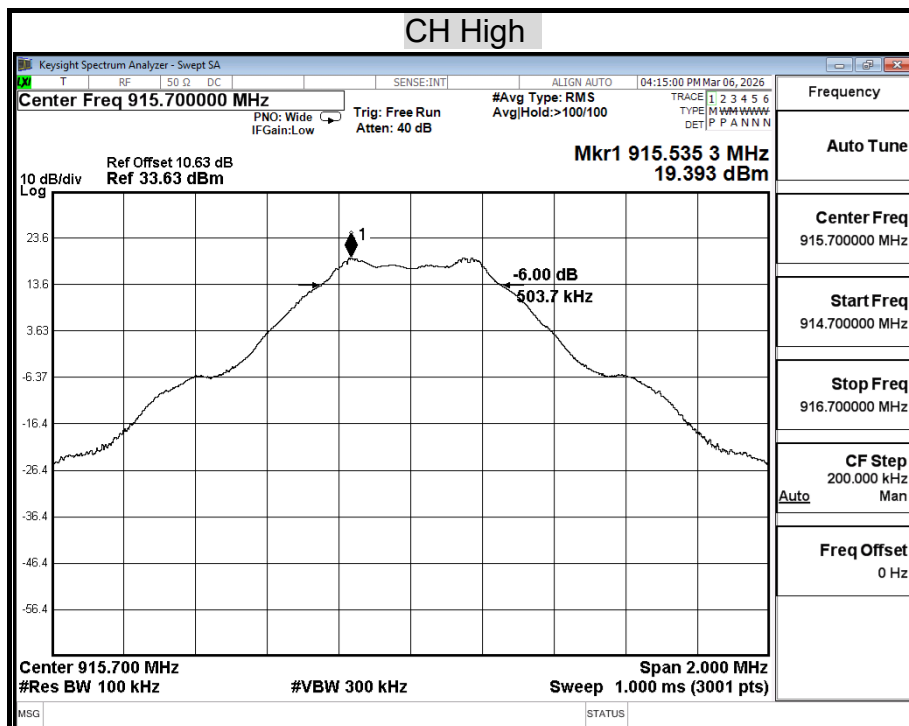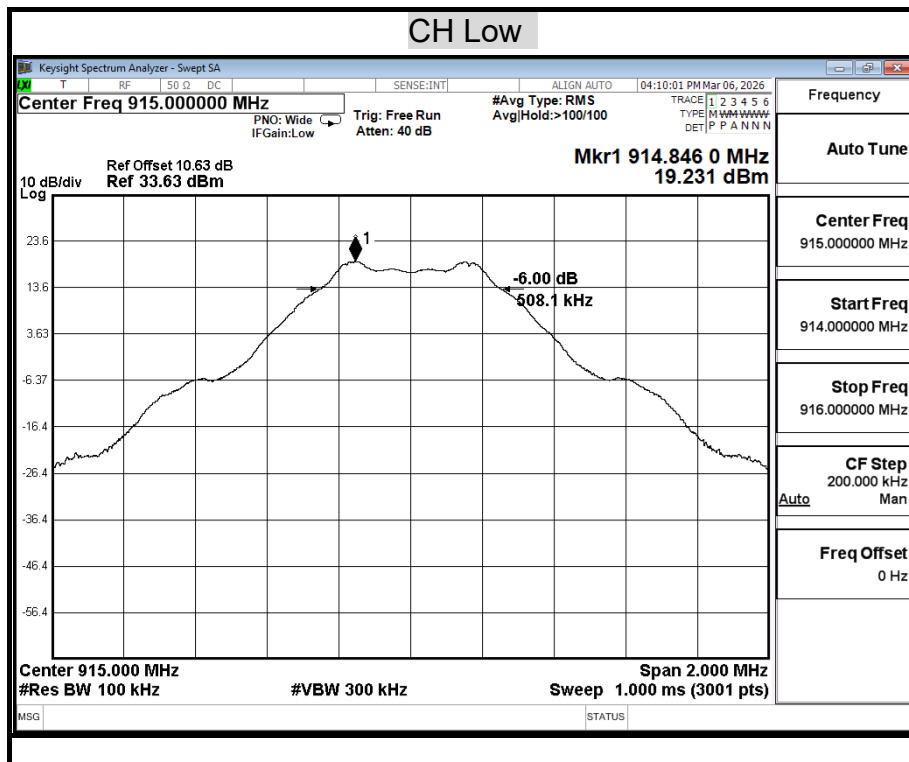

8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 D01 v05r02 8.3.1.

11.9.1.1(ANSI C63.10) Measurement Procedure PK2:

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq$ $[3 \times \text{RBW}]$.
- c) Set span $\geq$ $[3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

TEST RESULTS

No non-compliance noted

Model Name	QB11-W-HW	Test By	Ted Huang
Temp & Humidity	24.2°C, 56%	Test Date	2026/03/06

TX mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	915	19.62	30.00	PASS
High	915.7	19.88	30.00	PASS



NOTE : 1. The cable assembly insertion loss of 10.63dB was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Average Power Data

TX mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	915	19.31
High	915.7	19.61

MAXIMUM PEAK OUTPUT POWER

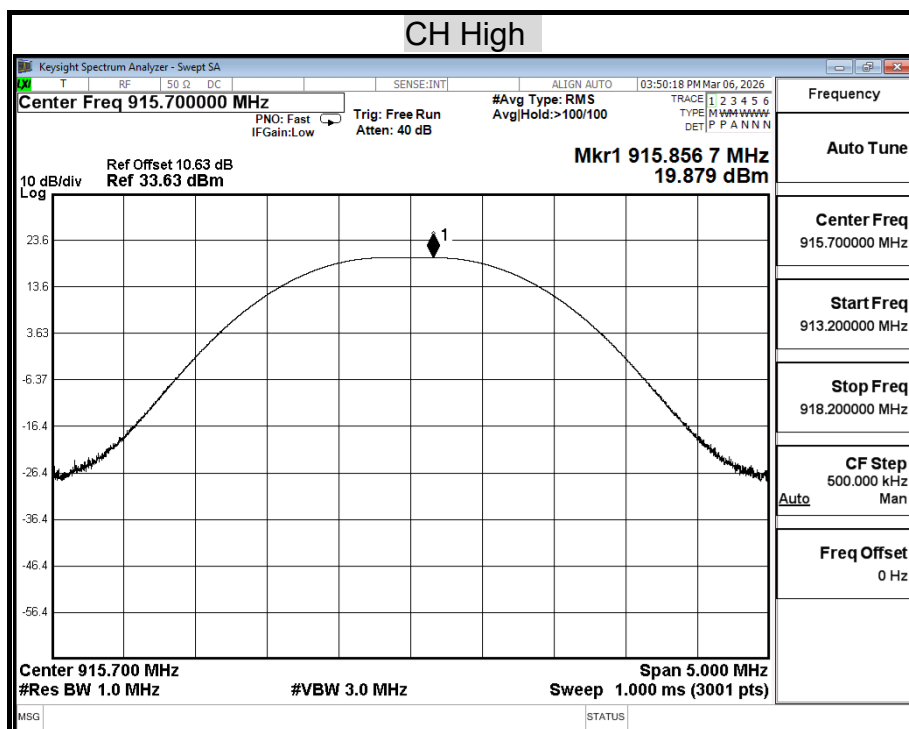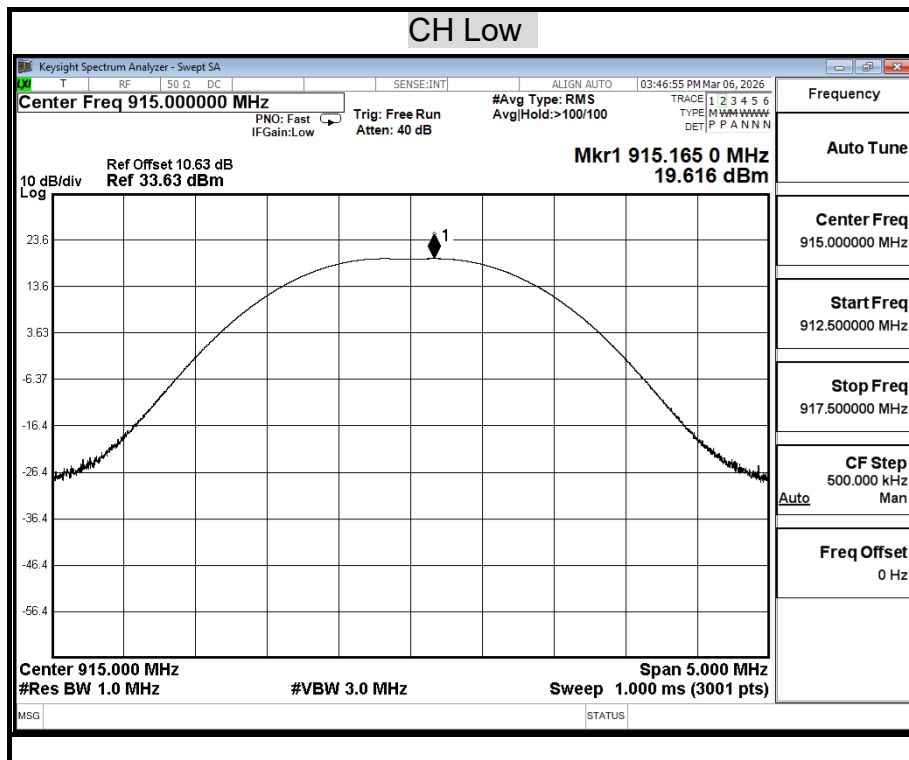


8.3 DUTY CYCLE

LIMIT

Nil (No dedicated limit specified in the Rules)

TEST EQUIPMENTS

TEST SETUP

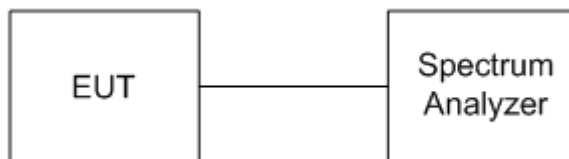

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

No non-compliance noted.

TEST DATA



Model Name	QB11-W-HW	Test By	Ted Huang
Temp & Humidity	24.2°C, 56%	Test Date	2026/03/06

	us	Times	Ton	Total Ton time(ms)
Ton1	8367.00	1	8367	
Ton2	1267.00	1	1267	
Ton3			0	9.634
TP				100

Ton	9.6
TP(Ton+Toff)	100
Duty Cycle	0.096
Duty Factor	-20.32

TEST PLOT

Plot

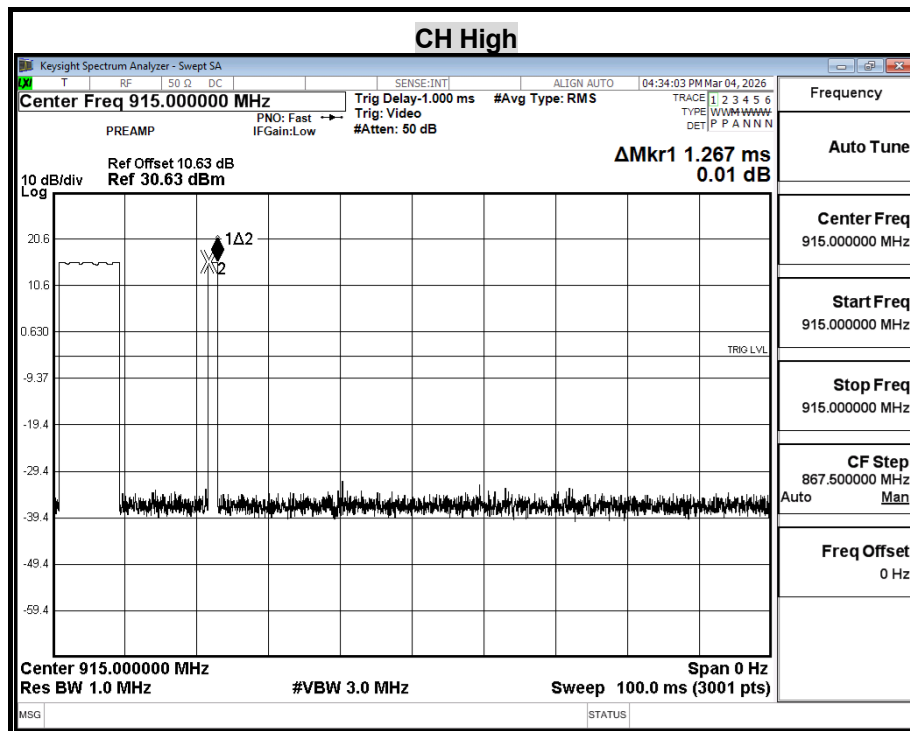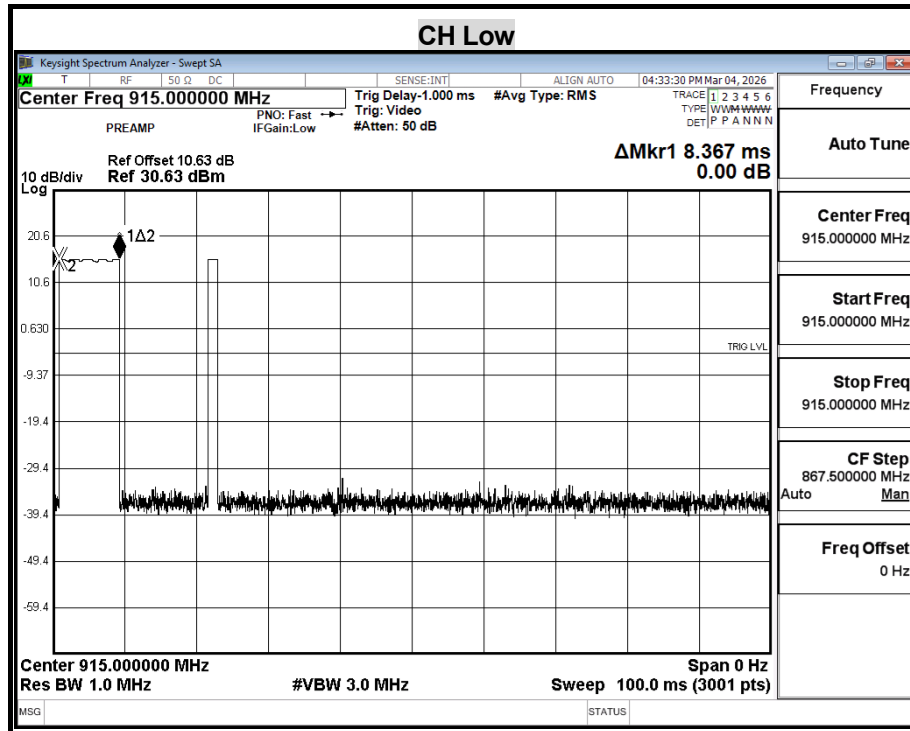


8.4 POWER SPECTRAL DENSITY

LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 D01 v05r02 8.4.

11.10.2 (ANSI C63.10) Measurement Procedure PKPSD:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS



Model Name	QB11-W-HW	Test By	Ted Huang
Temp & Humidity	24.2°C, 56%	Test Date	2026/03/06

TX mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	915	-0.17	8.00	-8.17	PASS
High	915.7	0.73	8.00	-7.27	PASS

NOTE : 1. The cable assembly insertion loss of 10.63dB was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

POWER SPECTRAL DENSITY (TX MODE)

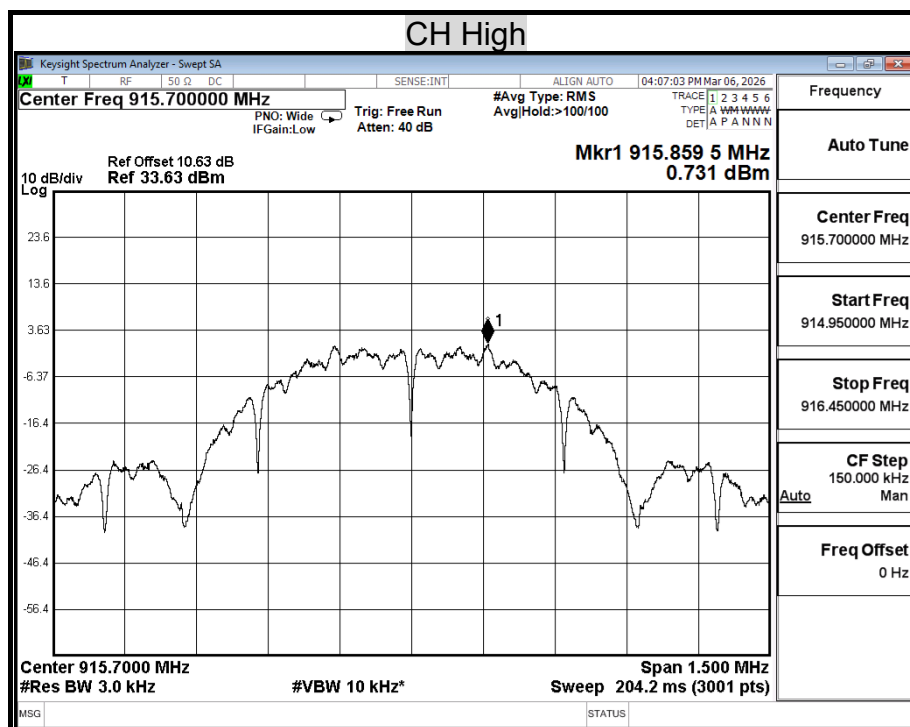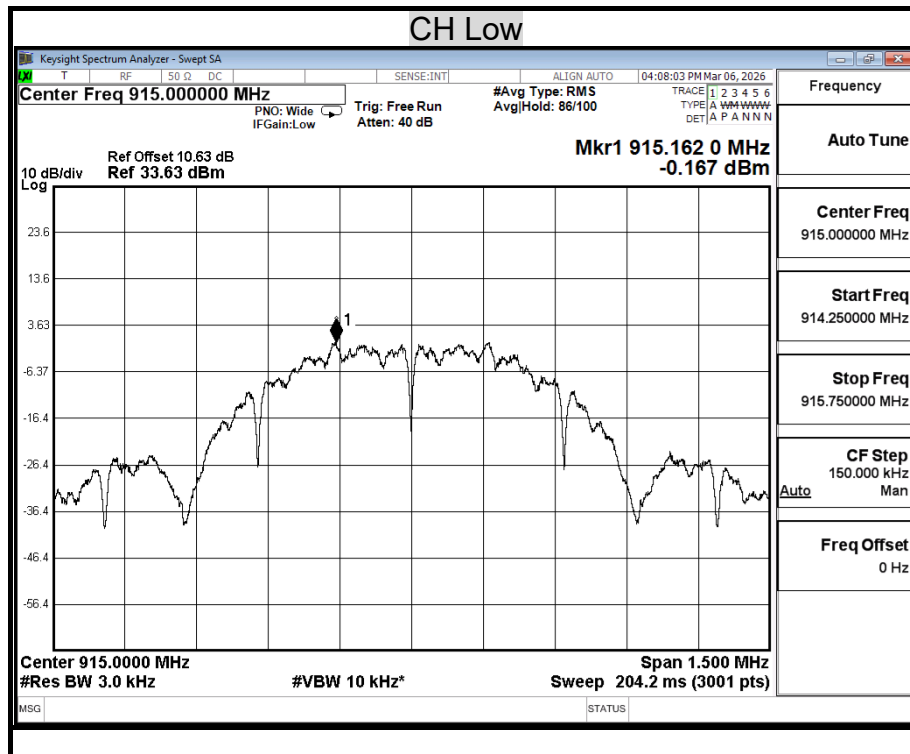

8.5 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST SETUP




TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 10 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 900MHz band.


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

Model Name	QB11-W-HW	Test By	Ted Huang
Temp & Humidity	24.2°C, 56%	Test Date	2026/03/06

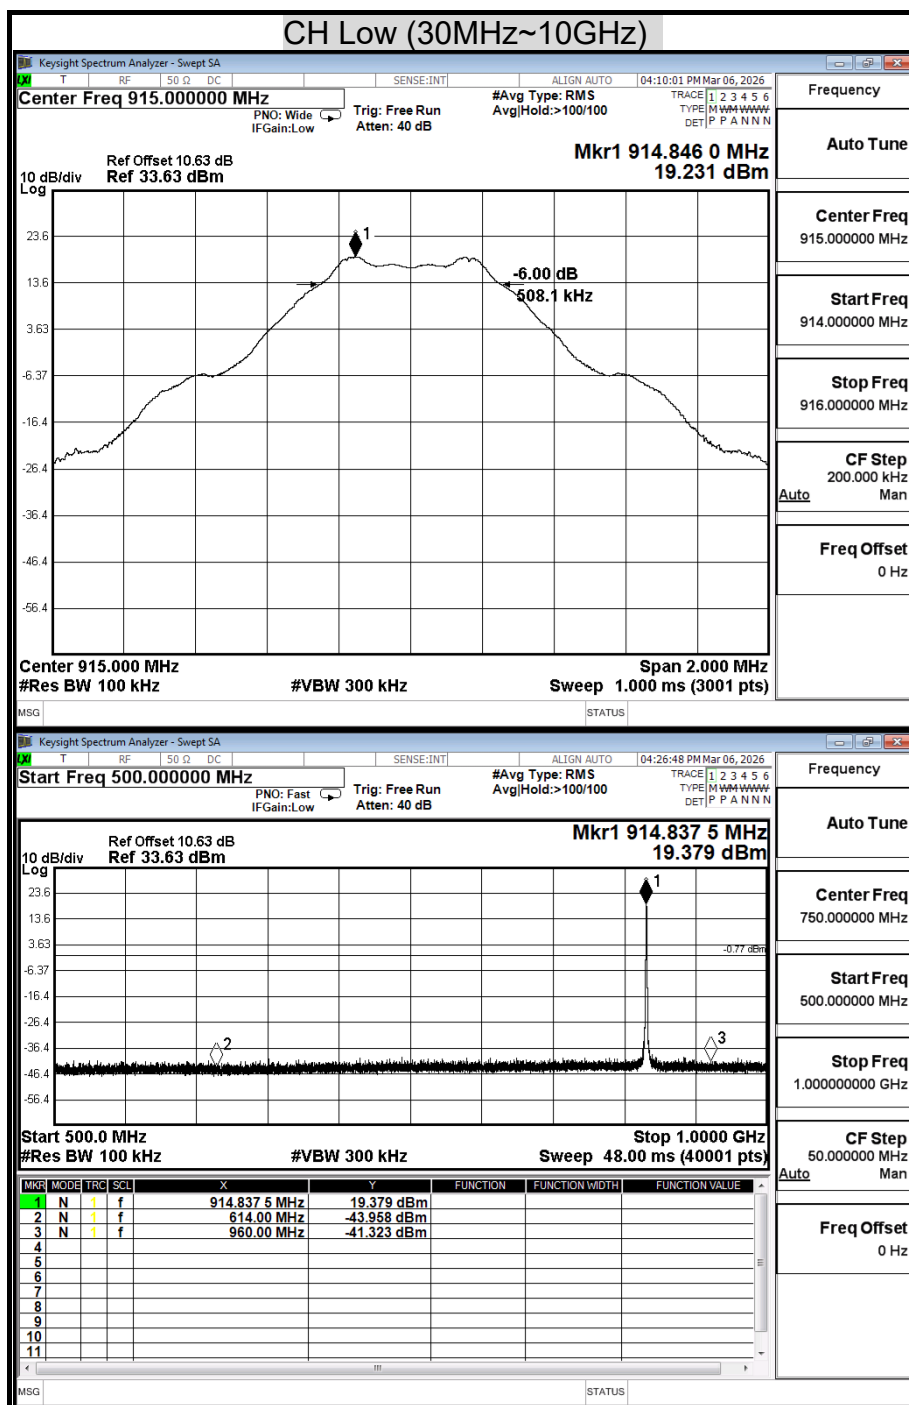

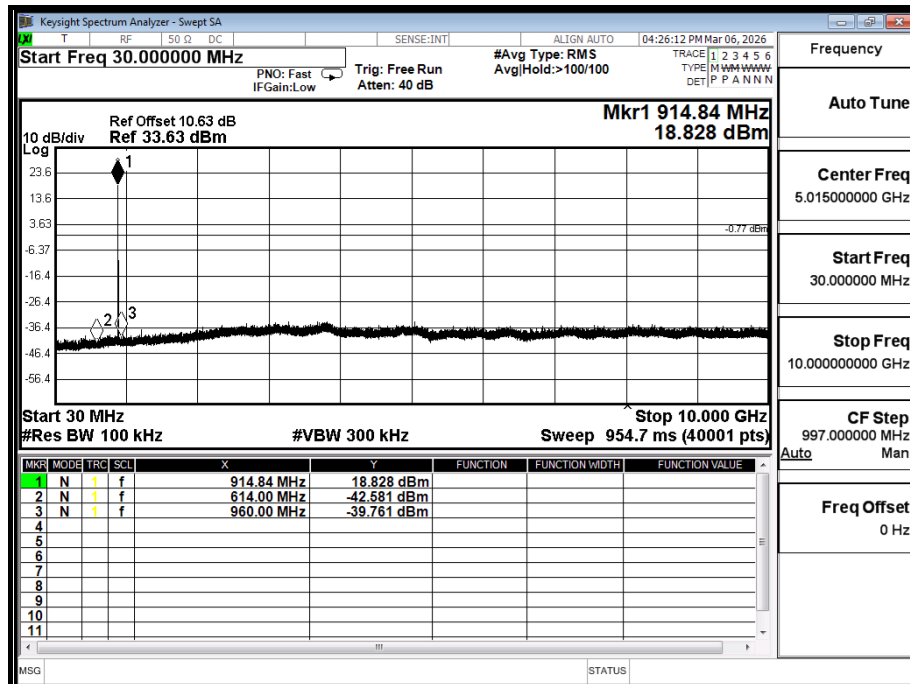

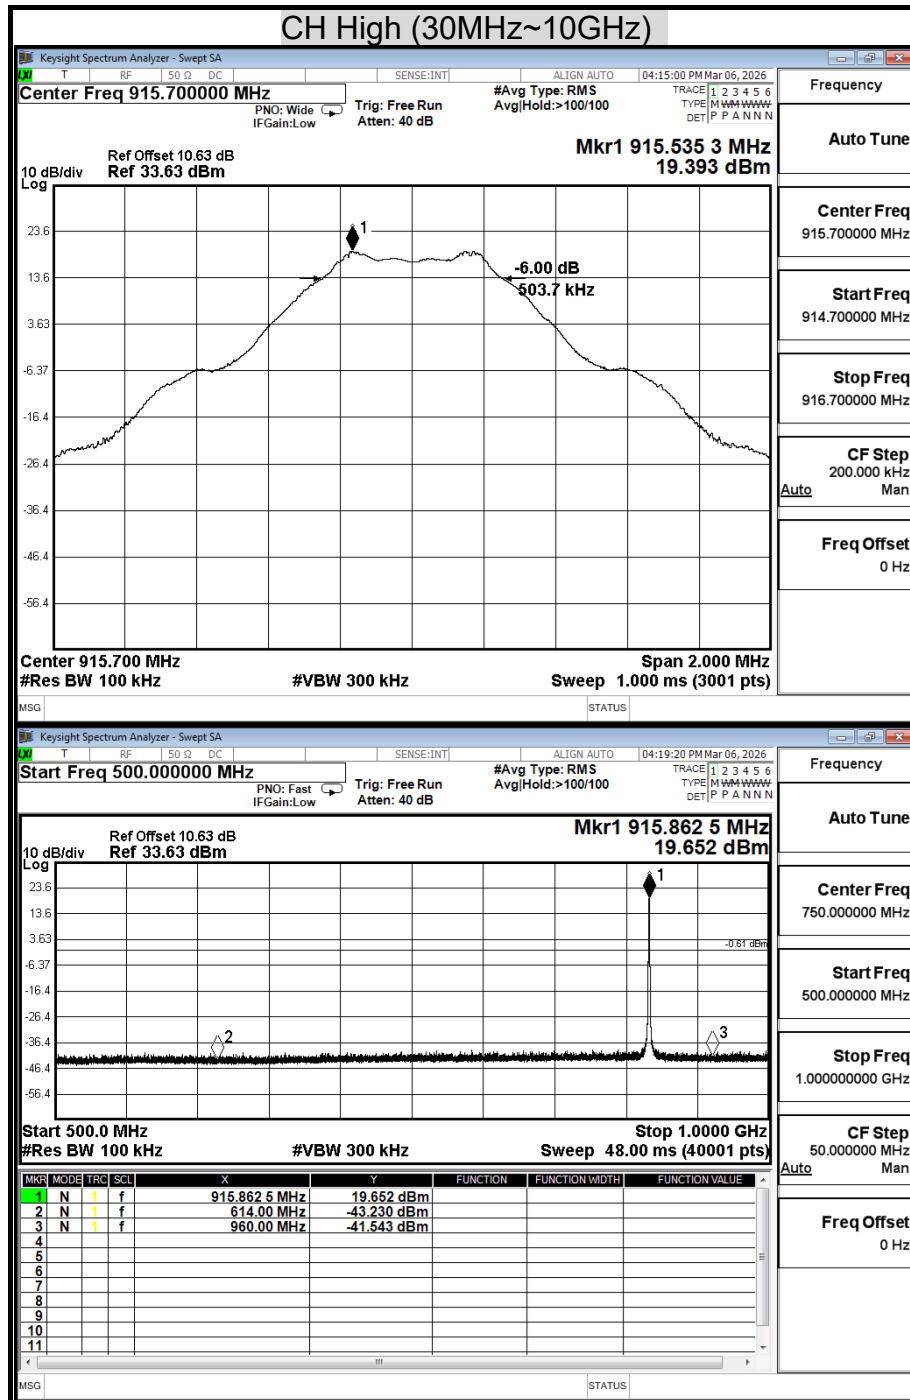

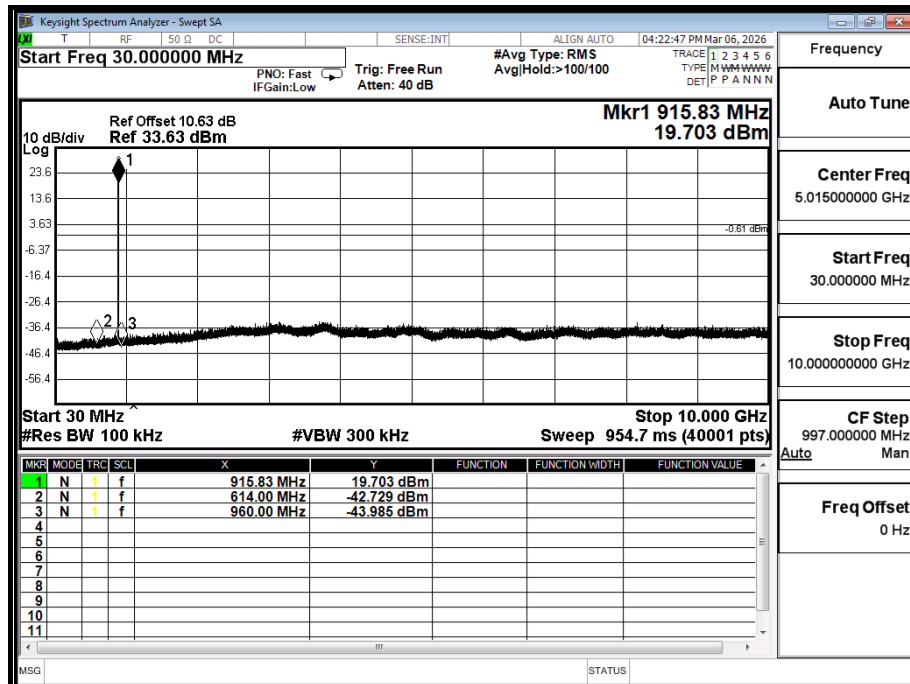

8.6 RADIATED EMISSIONS

8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Report No.: TMTN2603000208NR

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.


§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

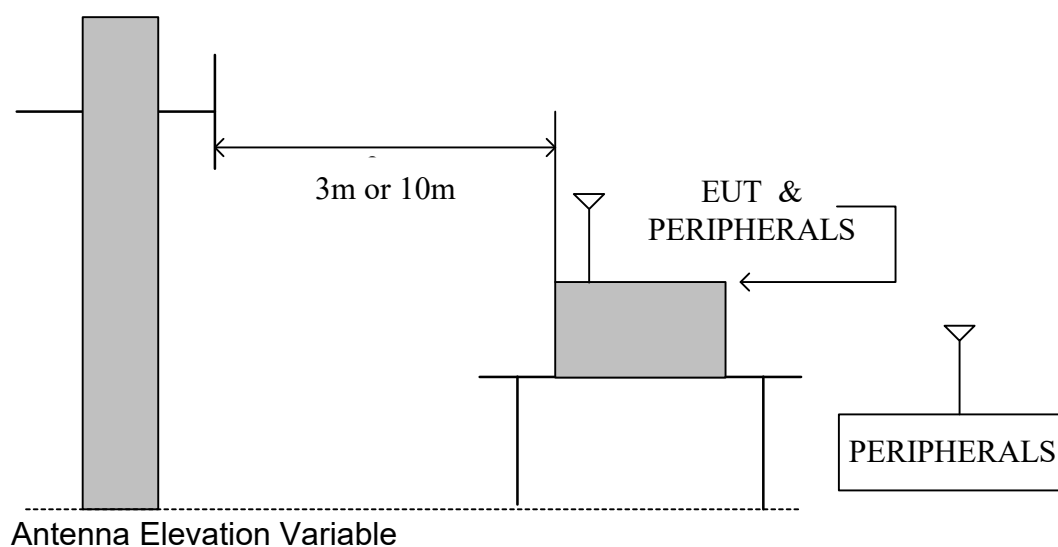

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

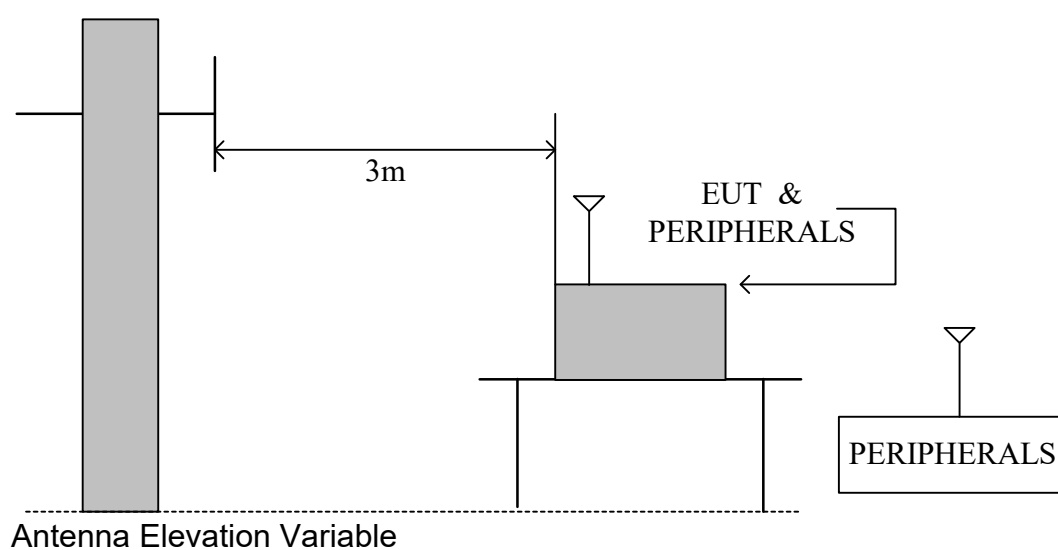

TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8/1.5 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3/10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The tests were performed in accordance with KDB 558074 D01 v05r02.

NOTE :

- 1.The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz for Average detection (AV) and Quasi-peak detection (QP) at frequency 9kHz~30Hz.
- 2.The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency 30MHz~1GHz.
- 3.The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
- 4.Average value=Peak value + Duty factor.
- 5.Obtain Z-axis for worst-case emission in test.

TEST RESULTS


No non-compliance noted.

8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Below 1GHz(9kHz ~ 30MHz)

3m Distance
9kHz~150kHz

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	24.8°C/54%

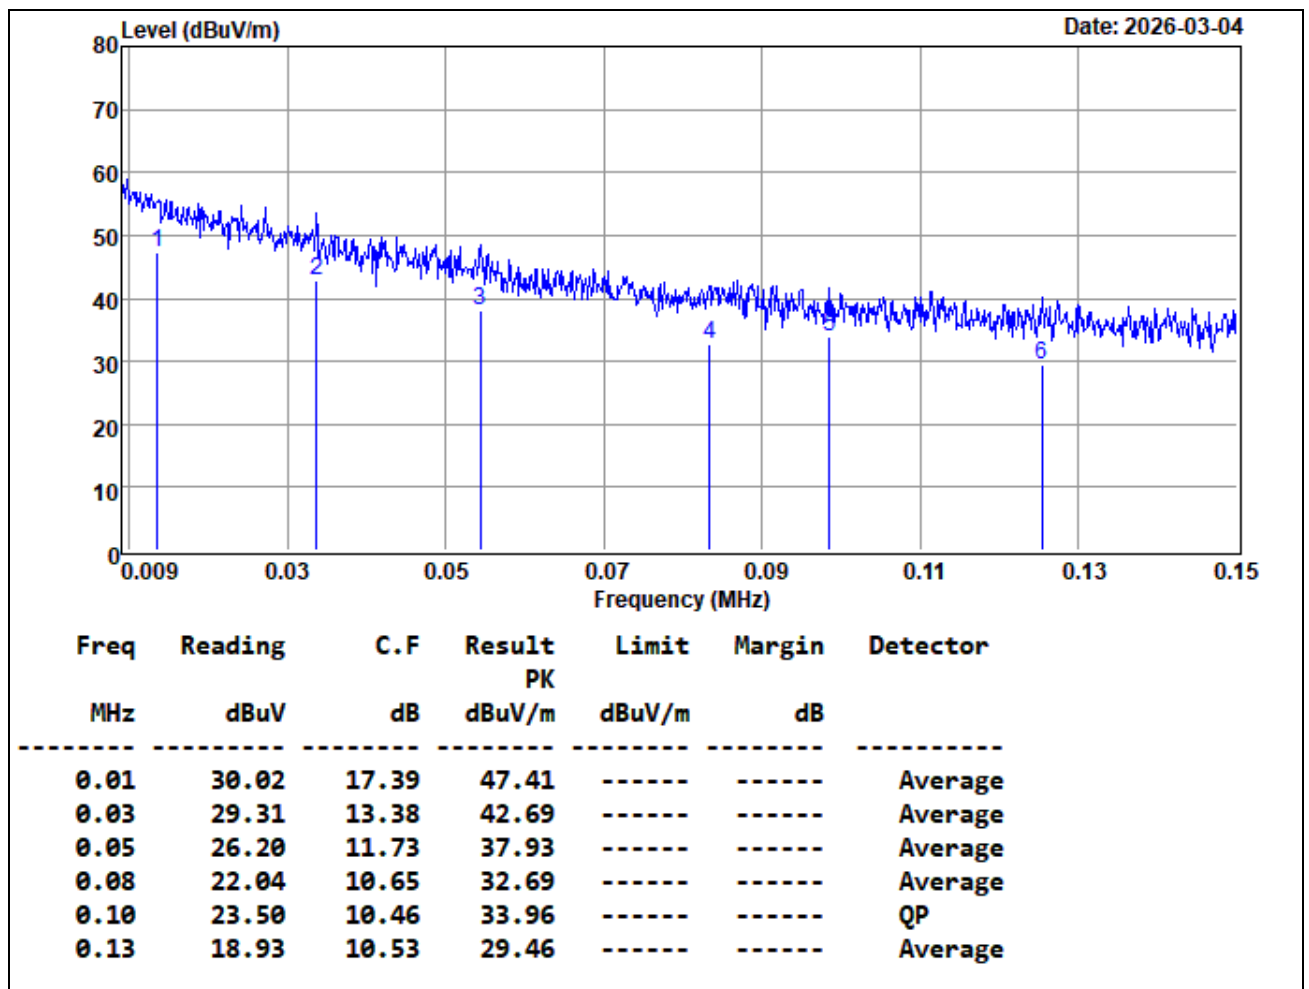


Remark:

- No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
- Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
- The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
- That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
- The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

15MHz~30MHz

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	24.8°C/54%

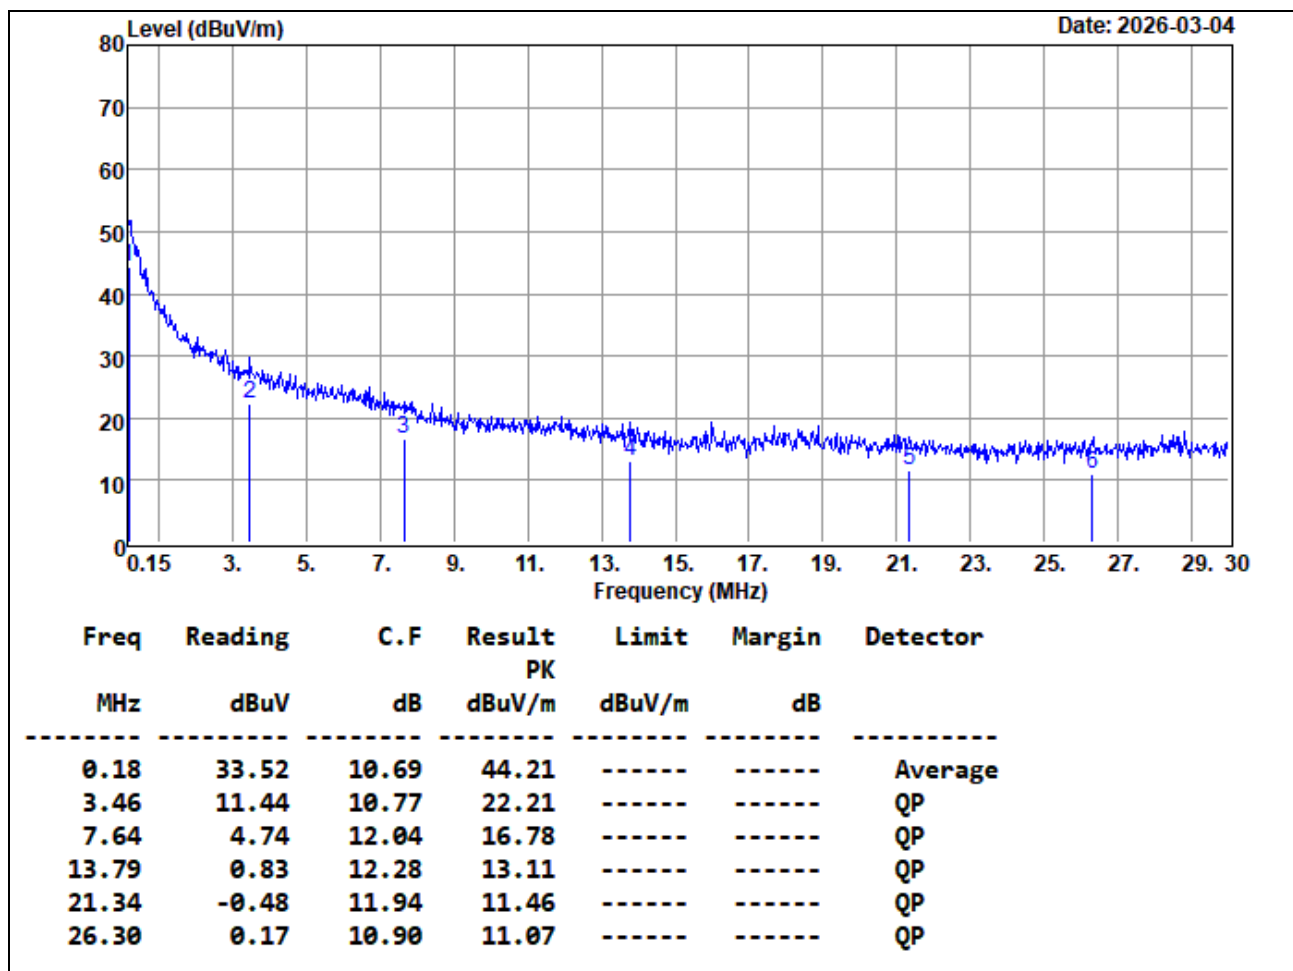


Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
5. The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

Standard Distance
9kHz~150kHz

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	24.8°C/54%

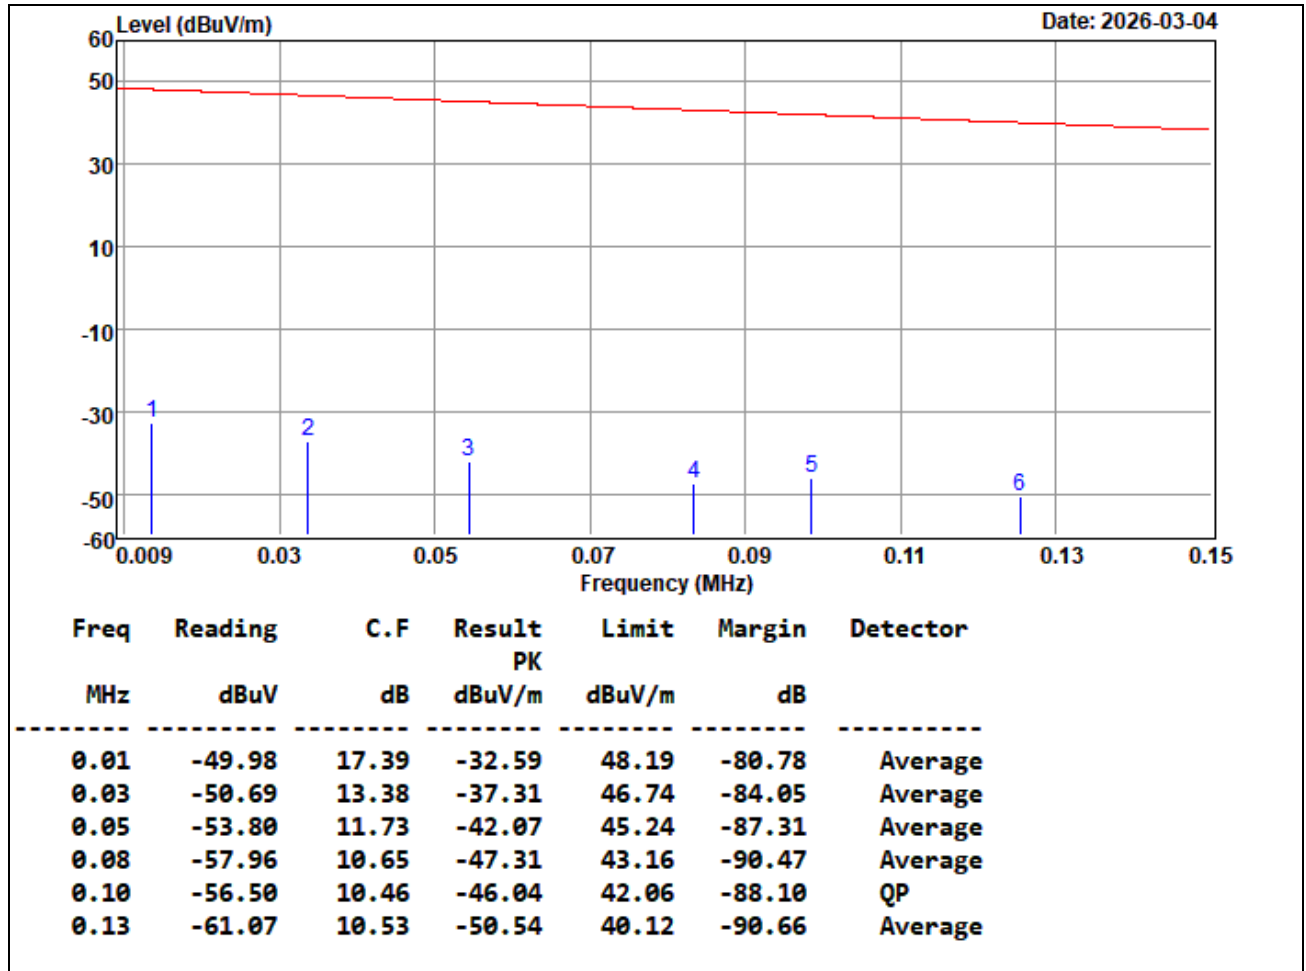


Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
5. The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

15MHz~30MHz

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	24.8°C/54%

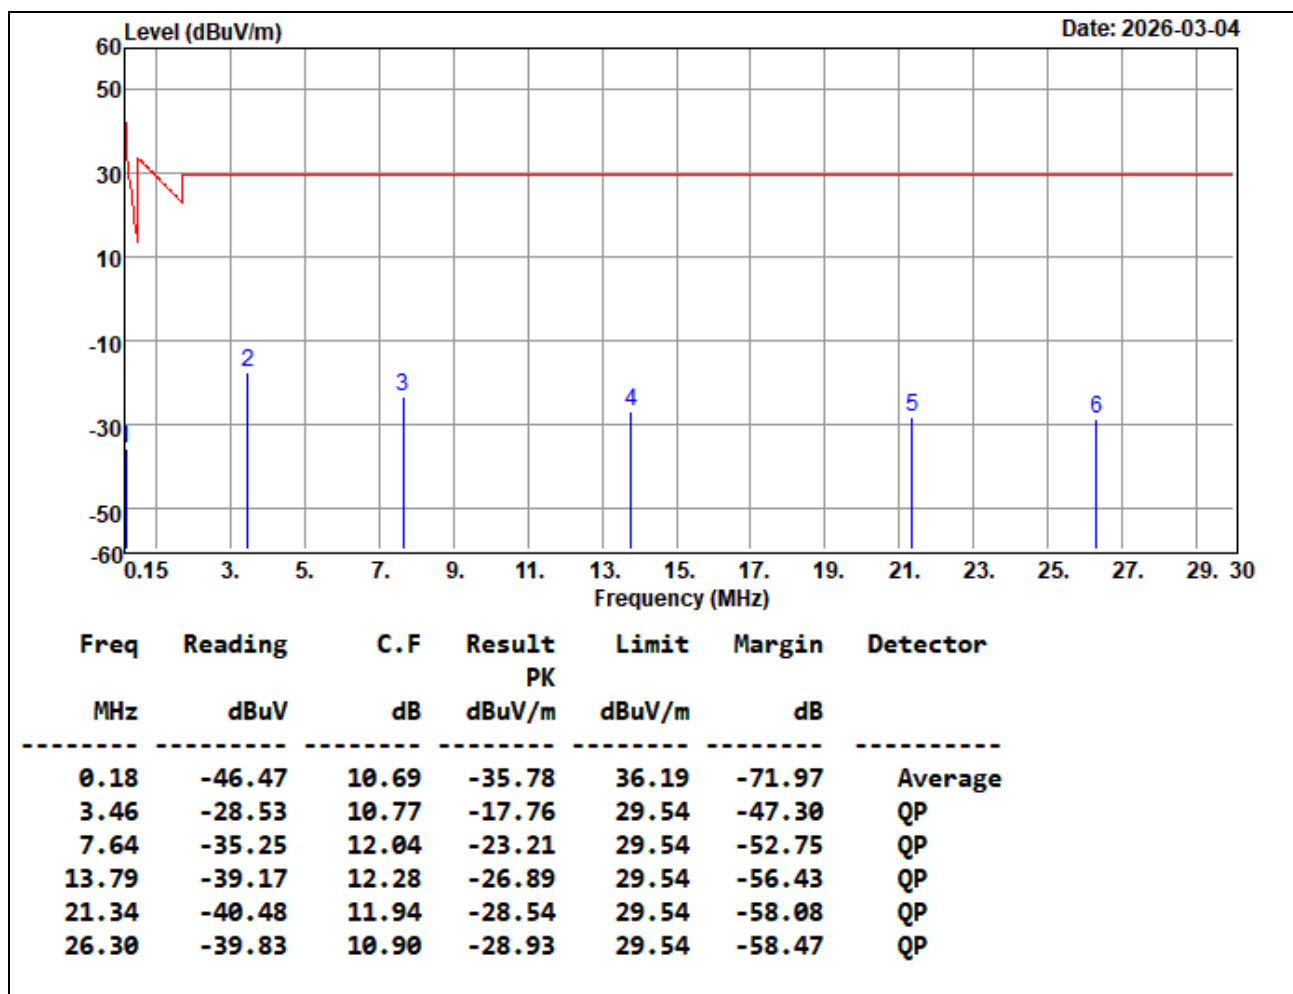

Remark:


- No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
- Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
- The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
- That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
- The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

Below 1GHz(30MHz ~ 1GHz)

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	24.8°C/54%

Horizontal

(The chart below shows the highest readings taken from the final data.)

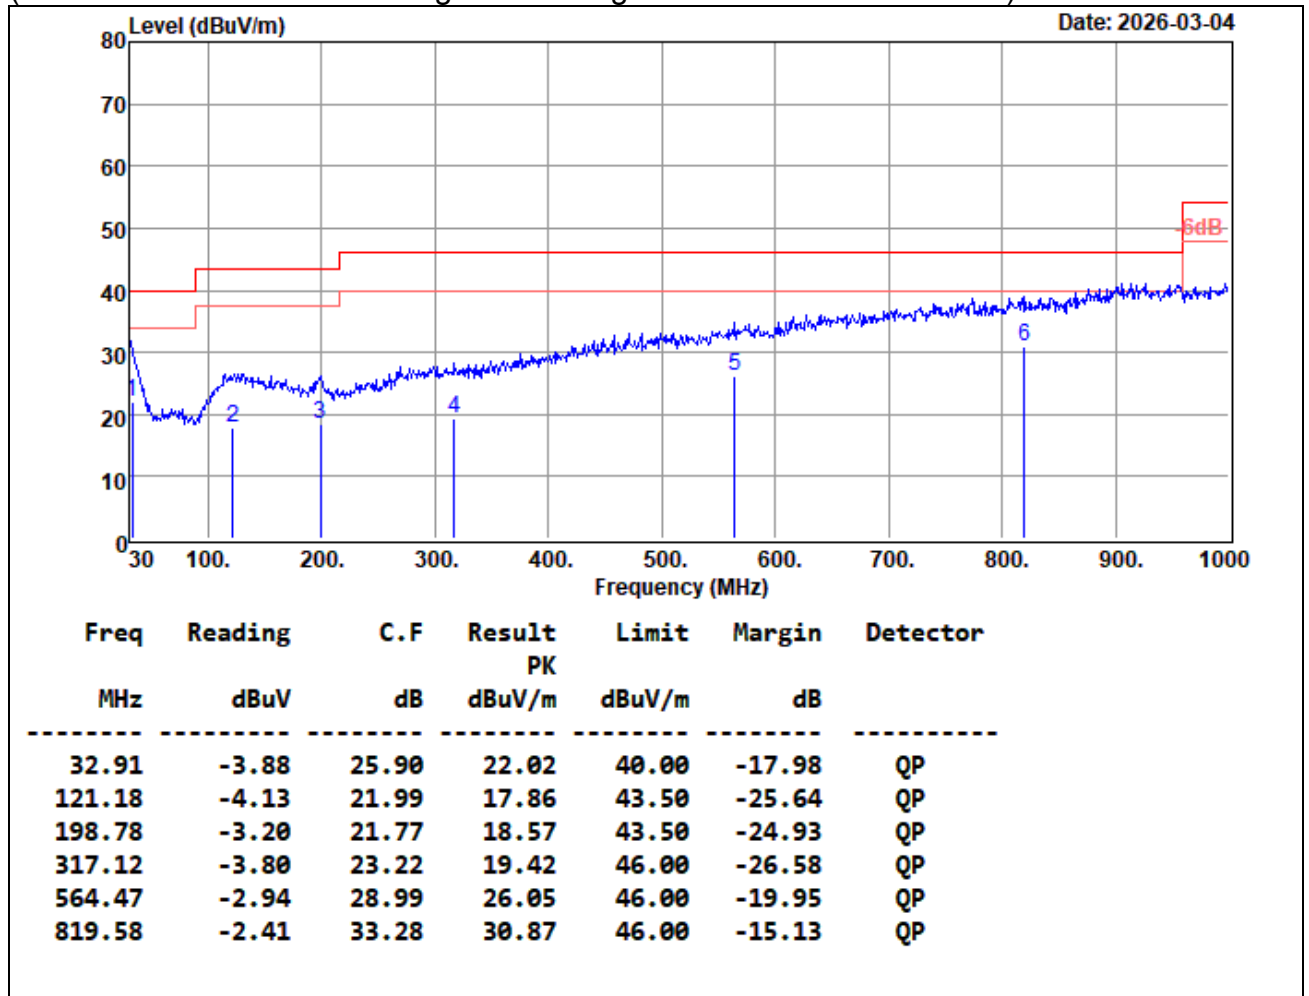

Remark:


- No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
- Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
- The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
- That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
- The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

Report No.: TMTN2603000208NR

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	24.8°C/54%

Vertical

(The chart below shows the highest readings taken from the final data.)

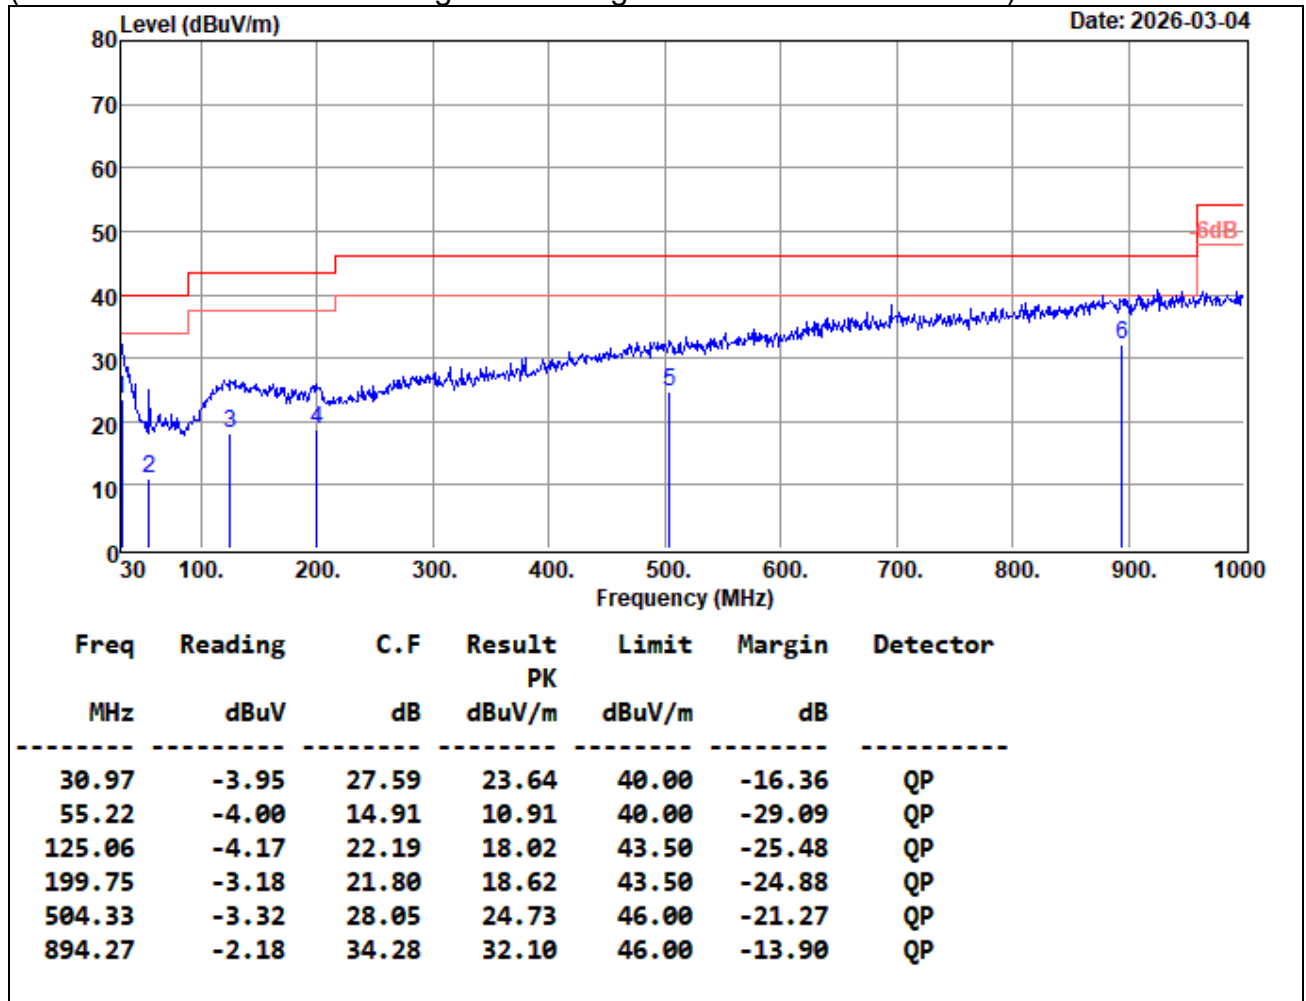


Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
5. The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

Below 1GHz(9kHz ~ 30MHz)

3m Distance
9kHz~150kHz

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	RX	TEMP& Humidity	24.8°C/54%

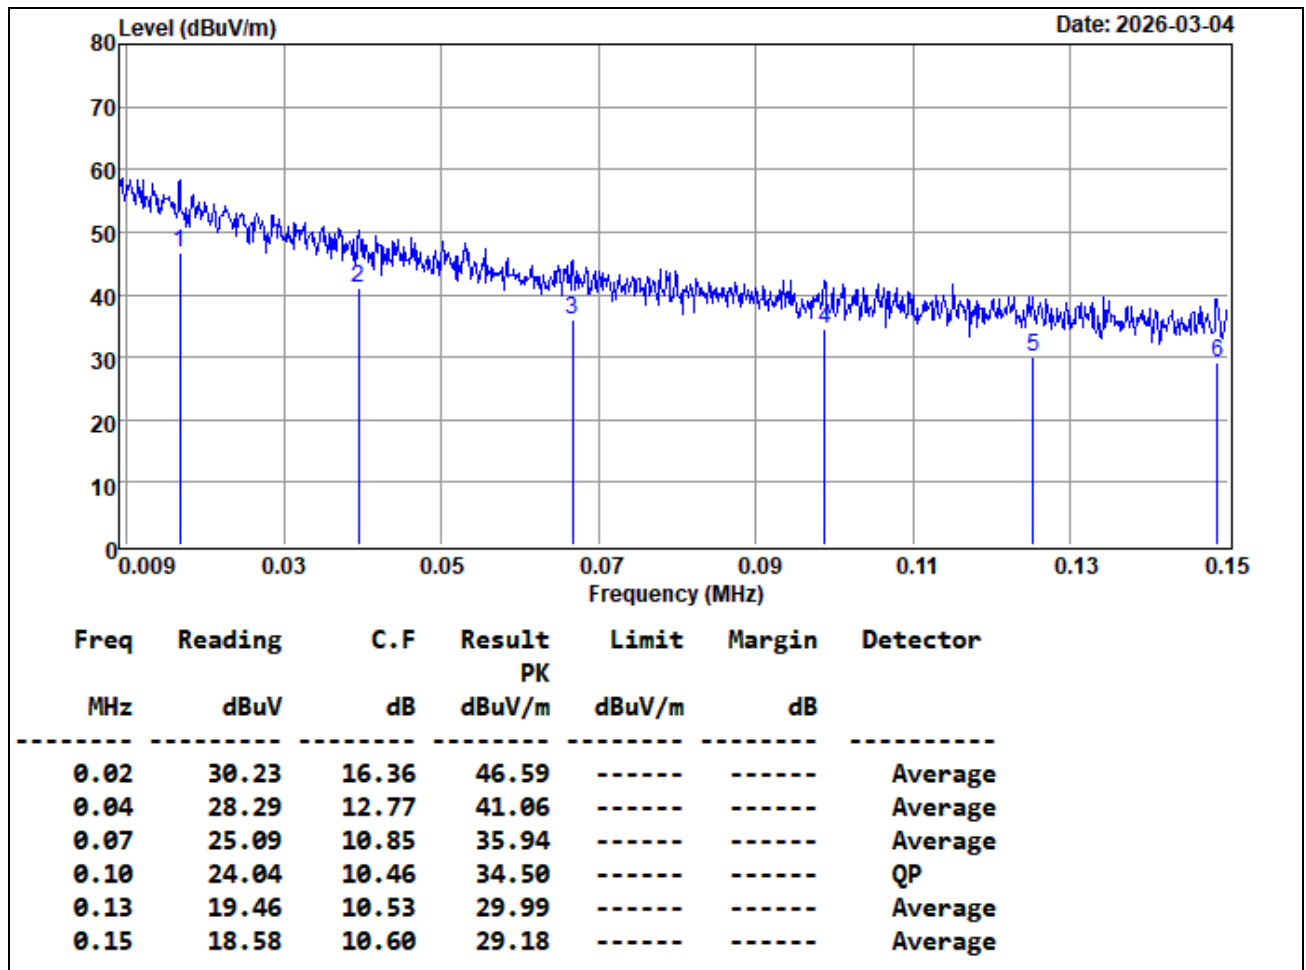


Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
5. The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

15MHz~30MHz

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	RX	TEMP& Humidity	24.8°C/54%

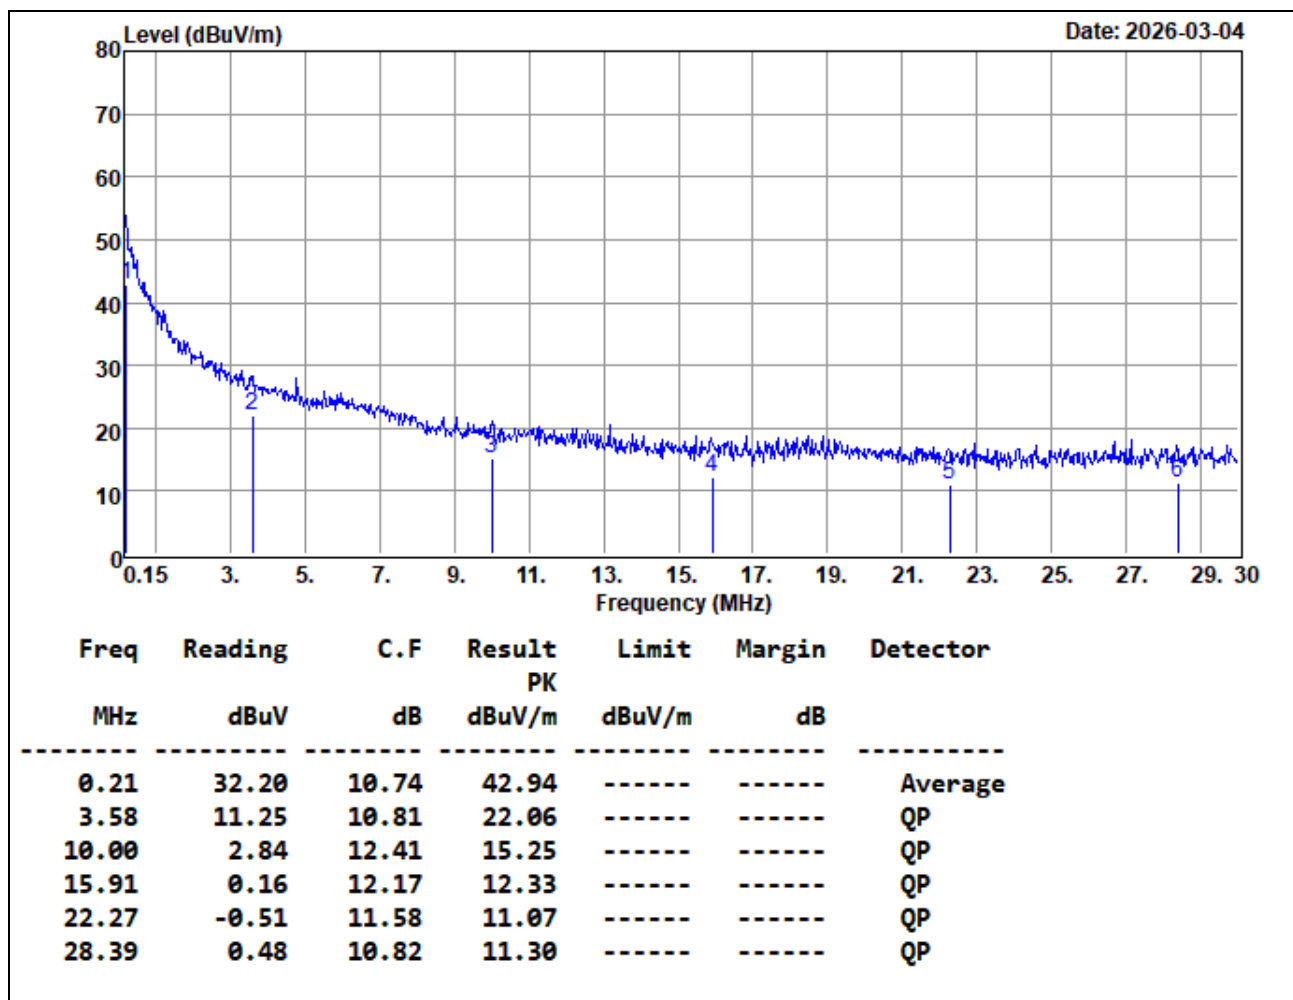


Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
5. The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

Standard Distance
9kHz~150kHz

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	RX	TEMP& Humidity	24.8°C/54%

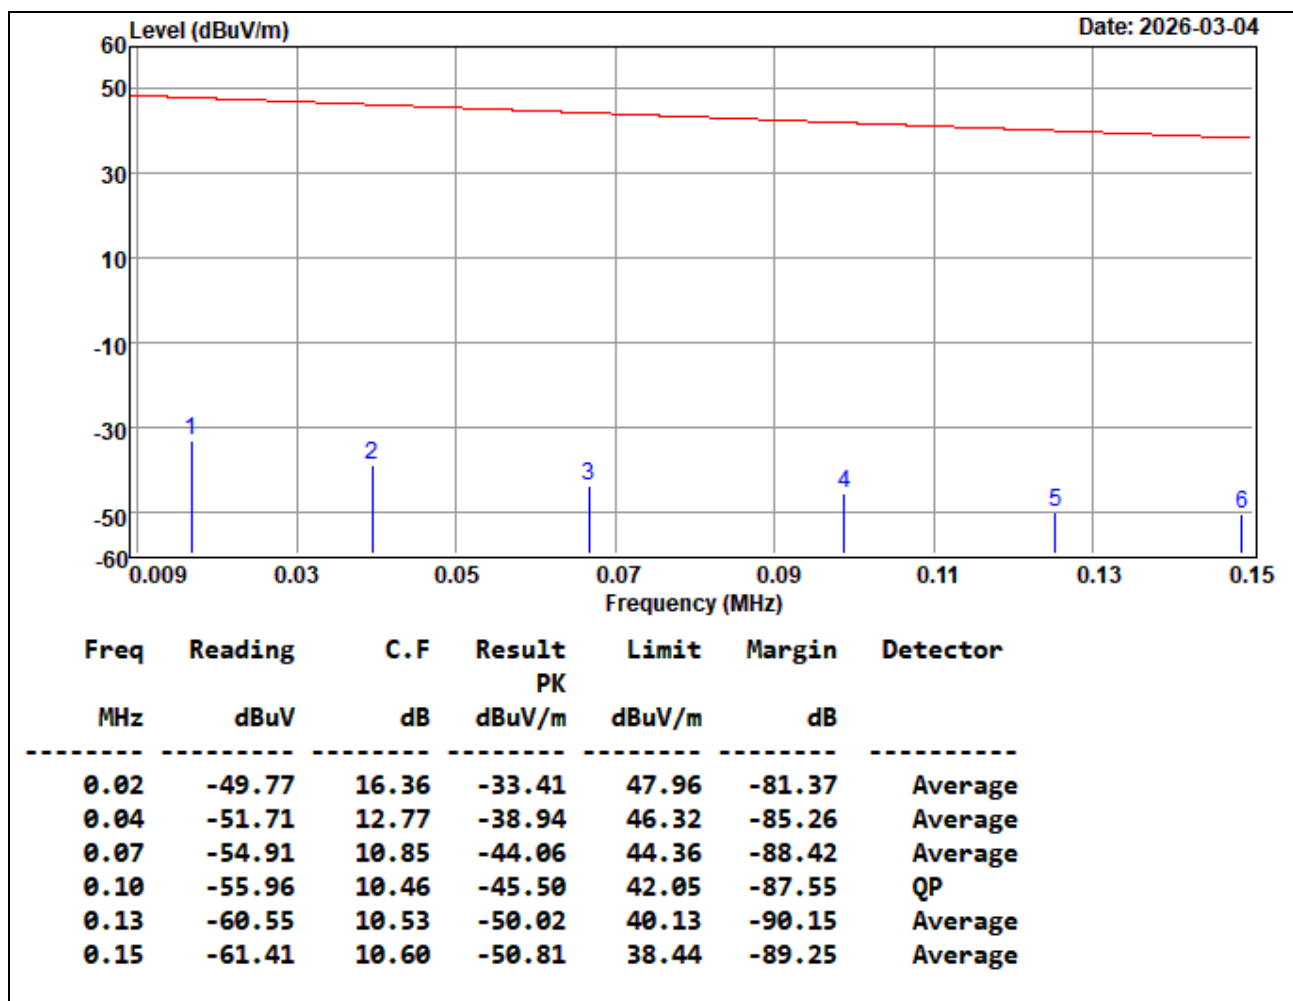


Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
5. The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

15MHz~30MHz

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	RX	TEMP& Humidity	24.8°C/54%

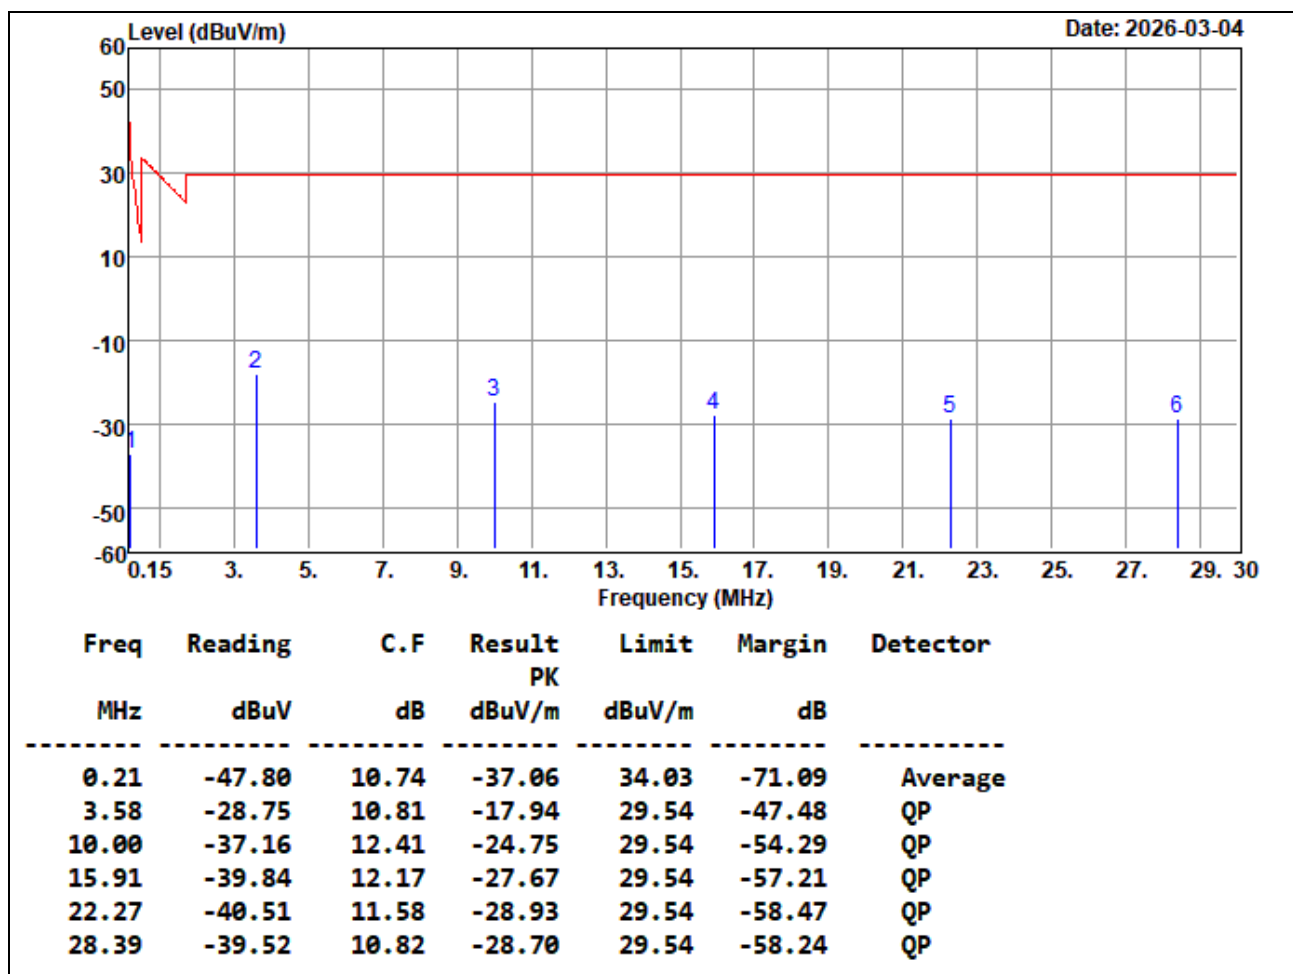

Remark:


1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
5. The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

Below 1GHz(30MHz ~ 1GHz)

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	RX	TEMP& Humidity	24.8°C/54%

Horizontal

(The chart below shows the highest readings taken from the final data.)

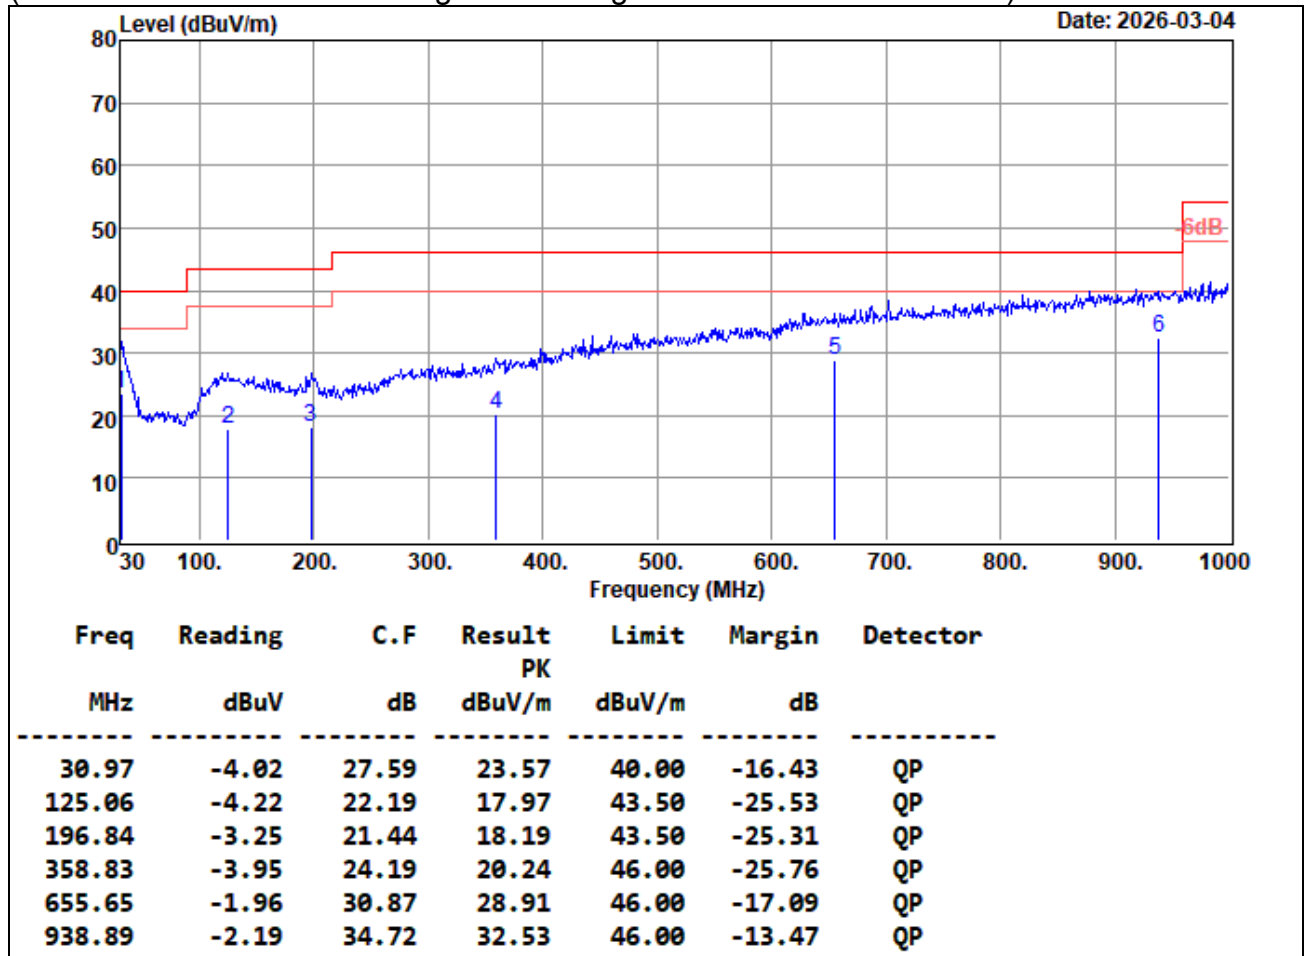

Remark:


1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
5. The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

Report No.: TMTN2603000208NR

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	RX	TEMP& Humidity	24.8°C/54%

Vertical

(The chart below shows the highest readings taken from the final data.)

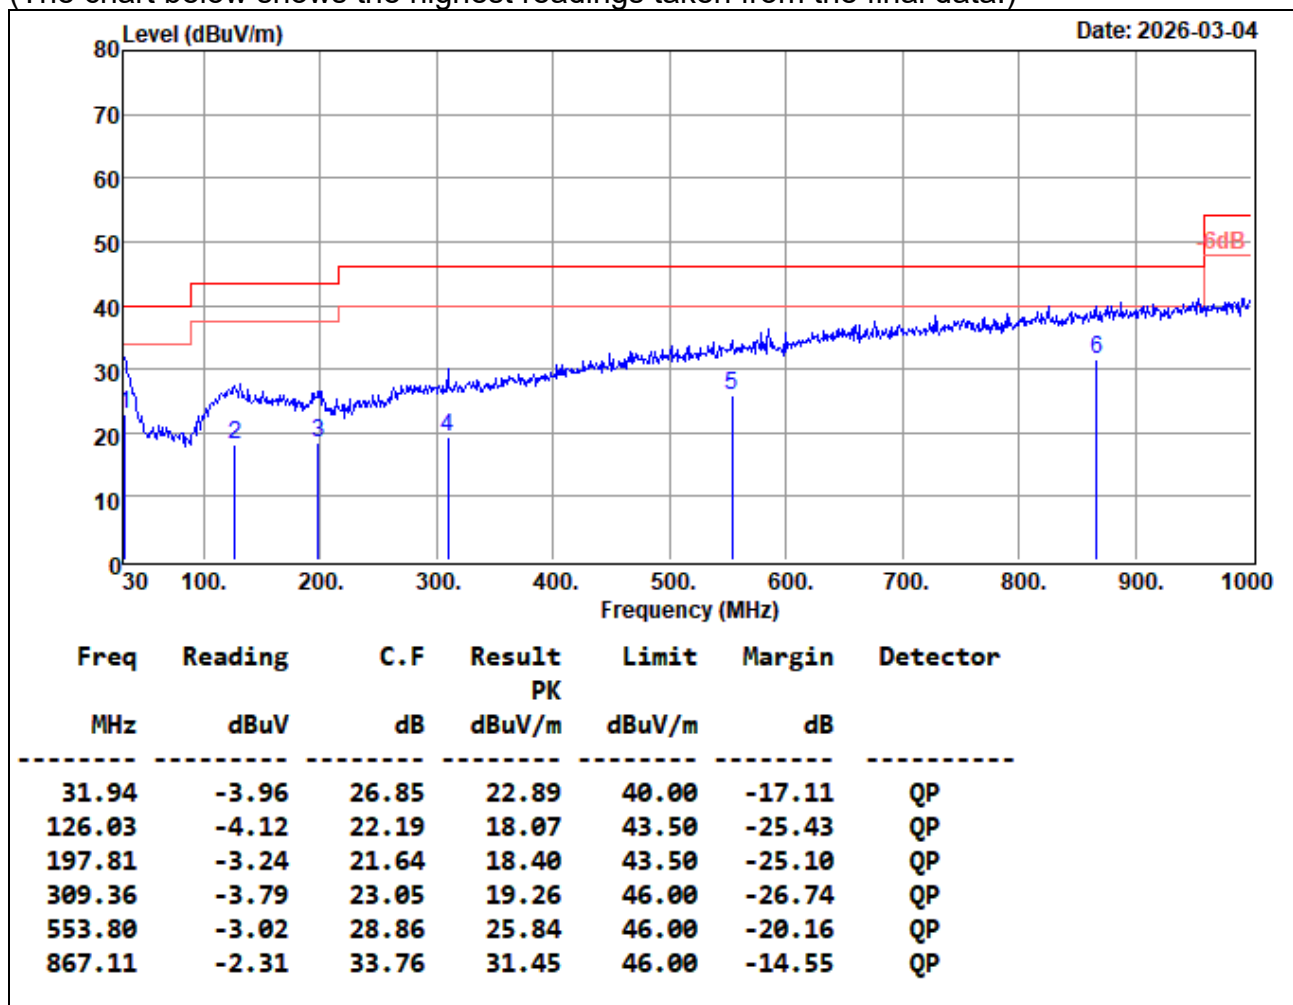


Remark:

- No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
- Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>10dB from the applicable limit) and considered that's already beyond the background noise floor.
- The result basic equation calculation is as follow:
C.F = AF + Cable , Result = Reading + C.F , Margin = Result-Limit
- That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
- The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	TX (CH Low)	TEMP& Humidity	24.8°C/54%

Horizontal

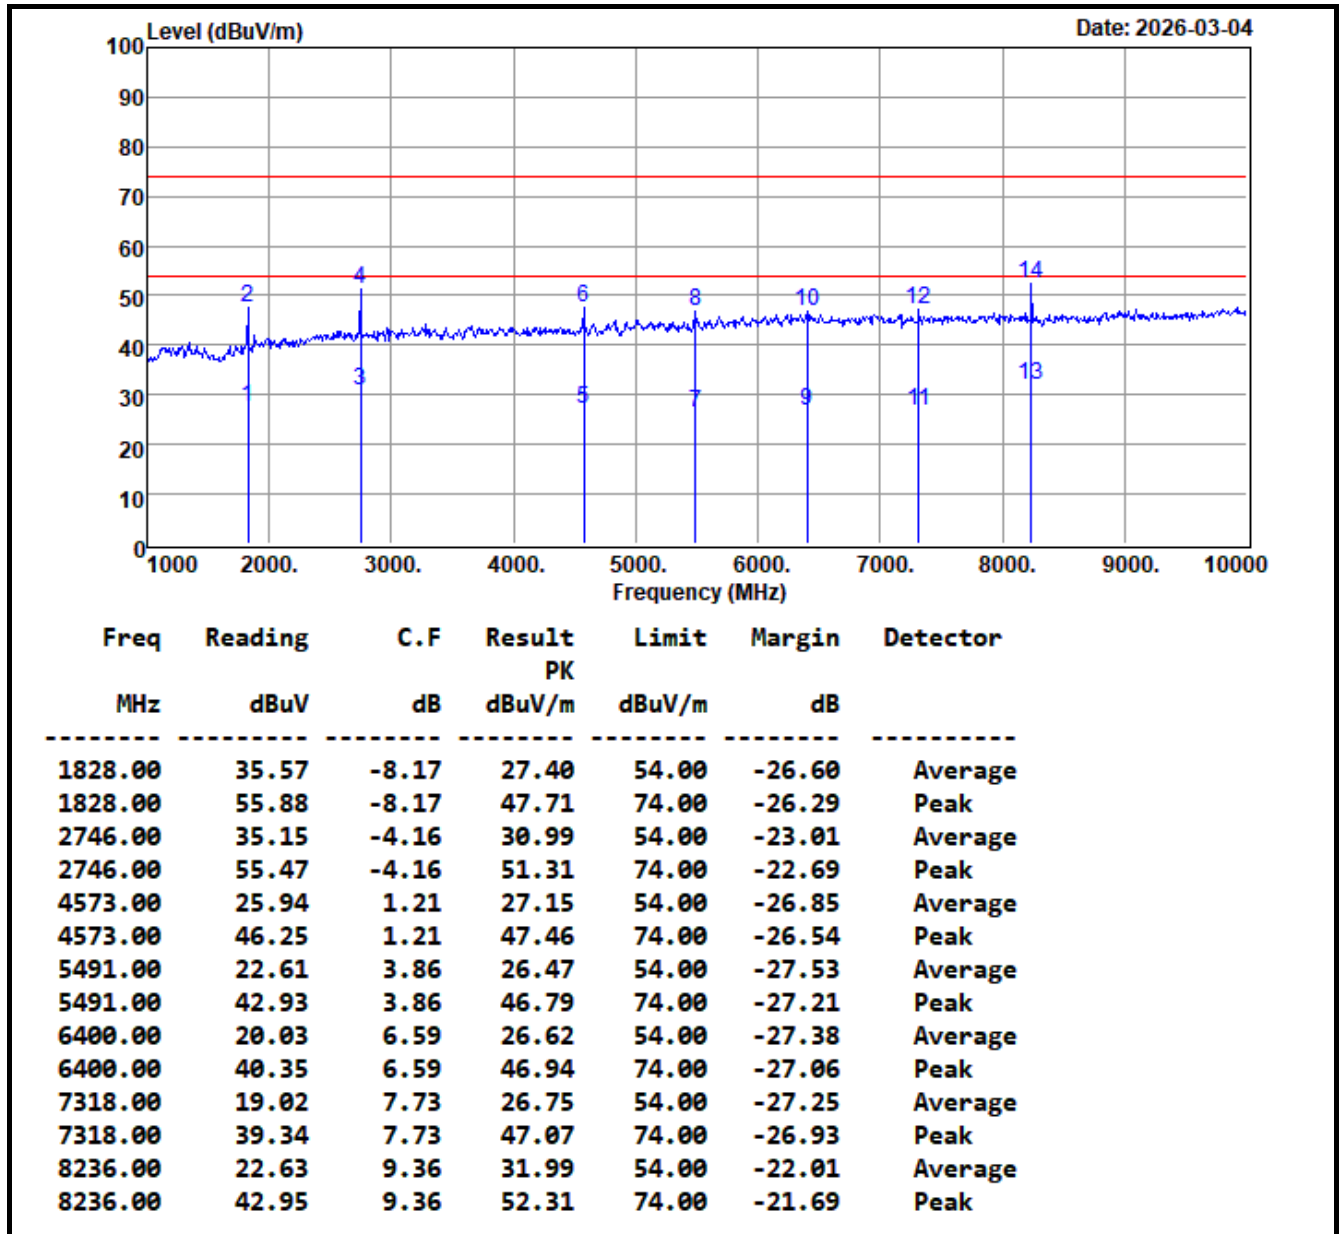


REMARK:

- 1.AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High pass-1G Filter Insertion Loss.
- 2.Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=3MHz.
- 3.Average level=Peak level + Duty factor
- 4.The result basic equation calculation is as follow:
C.F = AF + Cable – Preamp + Filter, Result = Reading + C.F, Margin = Result-Limit
- 5.The other emission levels were 10dB below the limit
- 6.The test limit distance is 3m limit.

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	TX (CH Low)	TEMP& Humidity	24.8°C/54%

Vertical

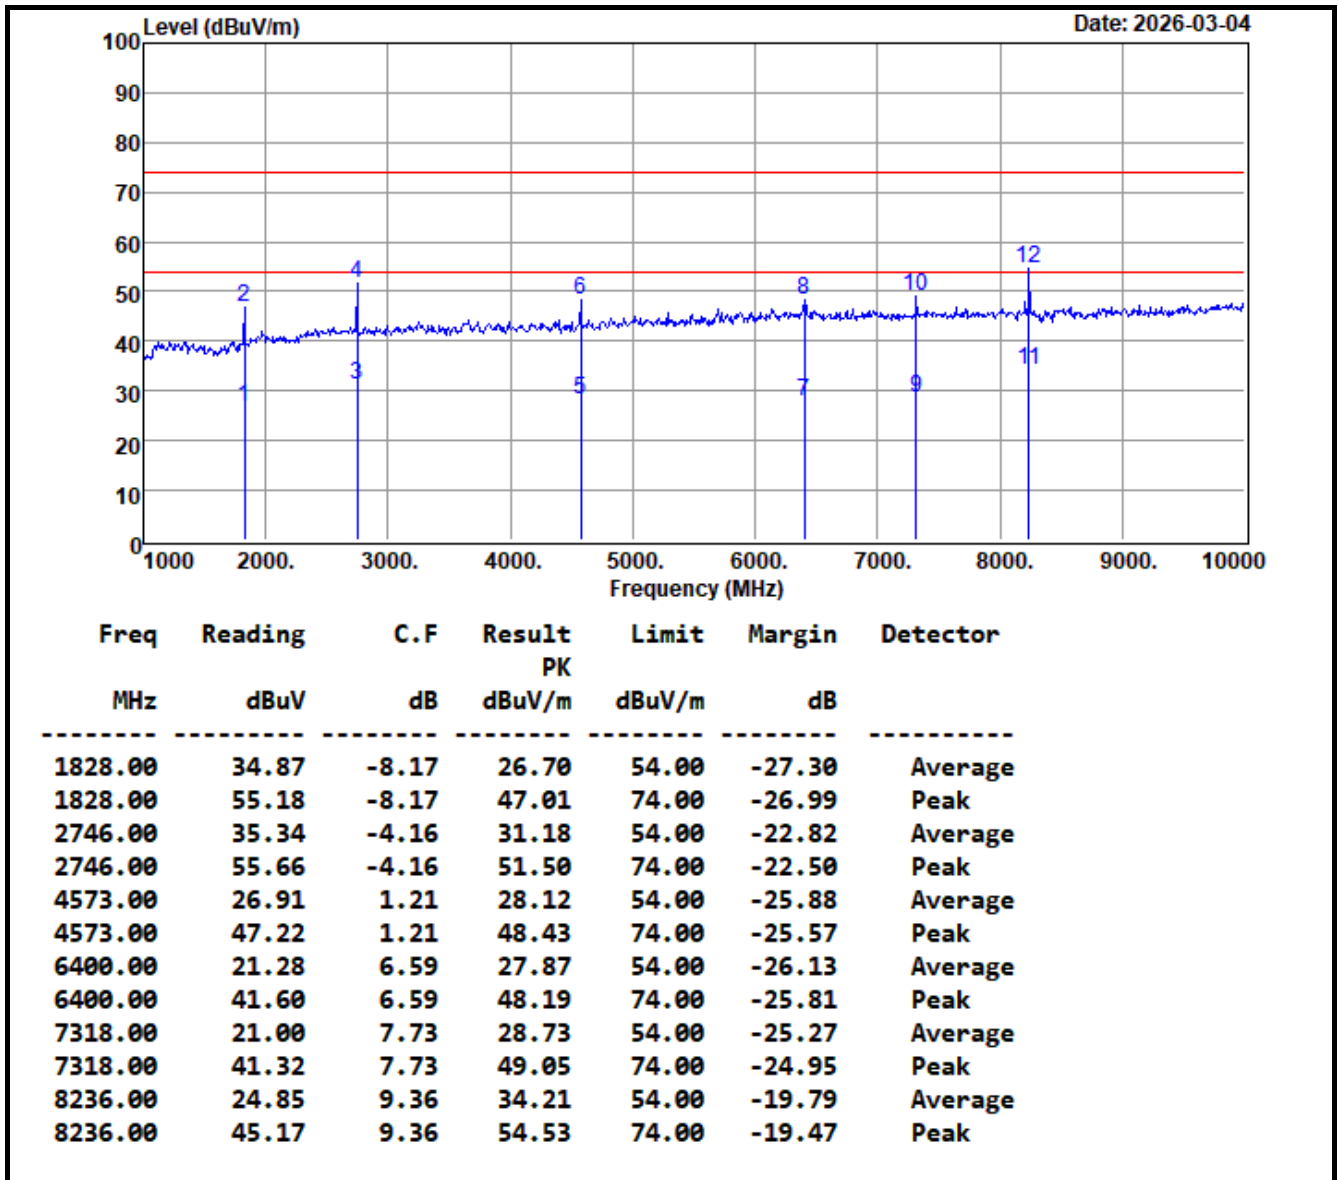


REMARK:

- 1.AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High pass-1G Filter Insertion Loss.
- 2.Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=3MHz.
- 3.Average level=Peak level + Duty factor
- 4.The result basic equation calculation is as follow:
C.F = AF + Cable – Preamp + Filter , Result = Reading + C.F , Margin = Result-Limit
- 5.The other emission levels were 10dB below the limit
- 6.The test limit distance is 3m limit.

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	TX (CH High)	TEMP& Humidity	24.8°C/54%

Horizontal

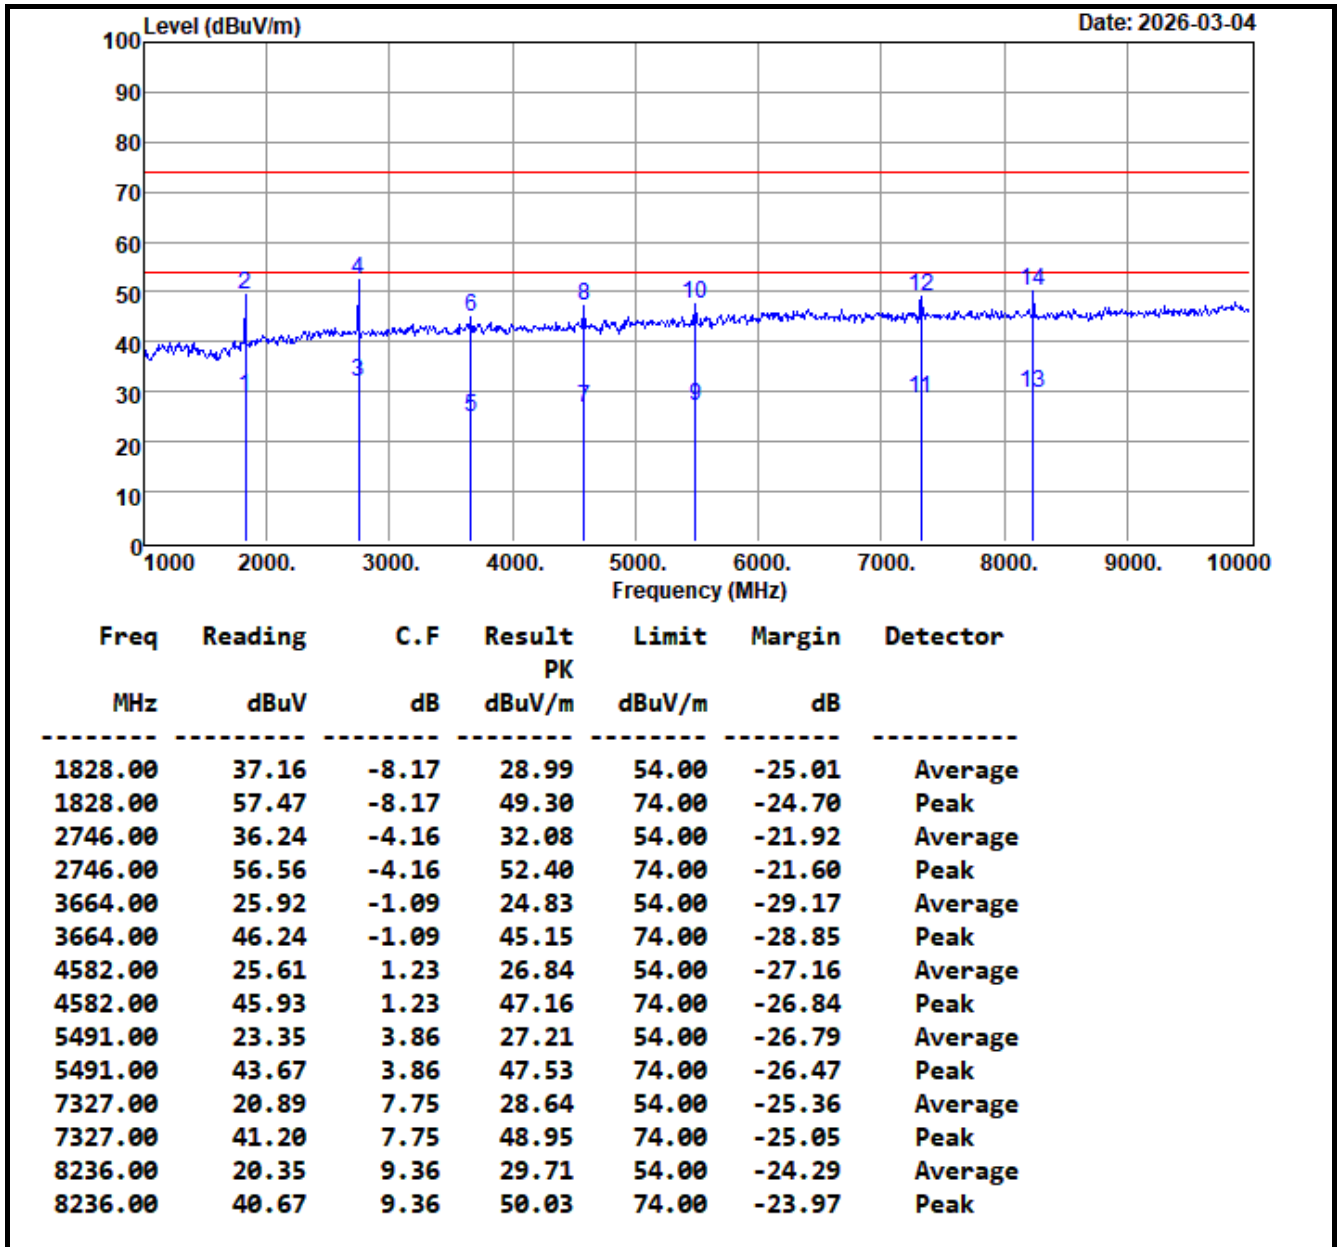


REMARK:

- 1.AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High pass-1G Filter Insertion Loss.
- 2.Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=3MHz.
- 3.Average level=Peak level + Duty factor
- 4.The result basic equation calculation is as follow:
C.F = AF + Cable – Preamp + Filter , Result = Reading + C.F , Margin = Result-Limit
- 5.The other emission levels were 10dB below the limit
- 6.The test limit distance is 3m limit.

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	TX (CH High)	TEMP& Humidity	24.8°C/54%

Vertical

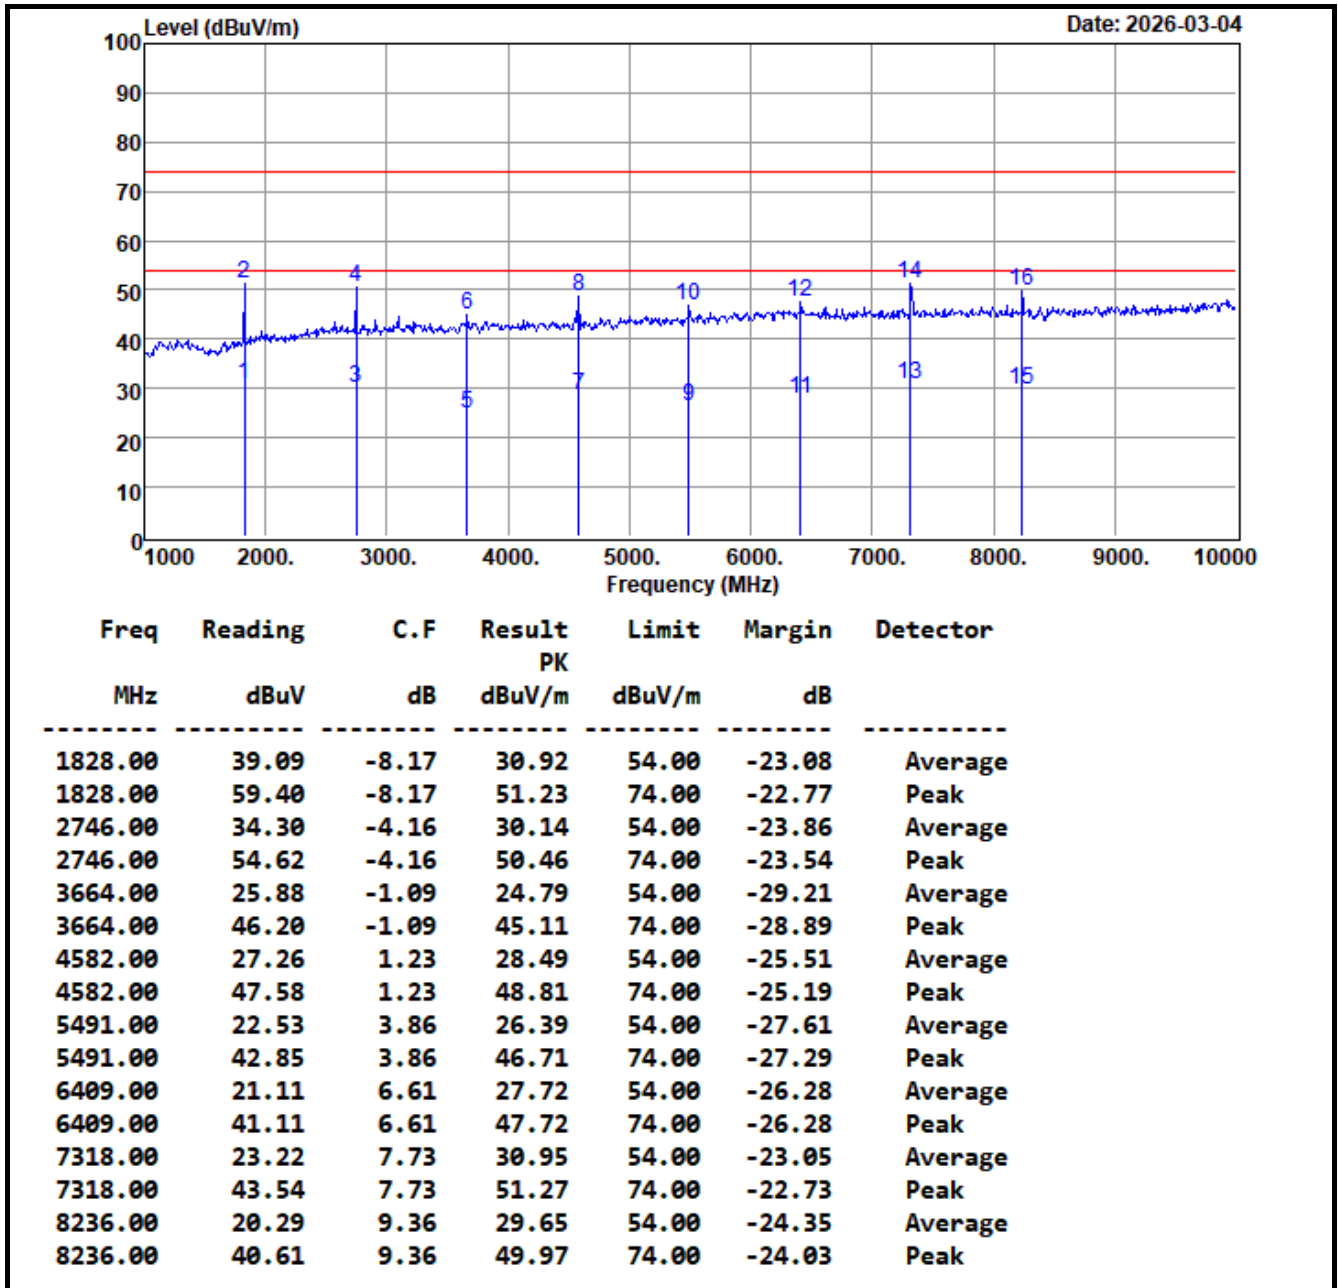


REMARK:

- 1.AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High pass-1G Filter Insertion Loss.
- 2.Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=3MHz.
- 3.Average level=Peak level + Duty factor
- 4.The result basic equation calculation is as follow:
C.F = AF + Cable – Preamp + Filter, Result = Reading + C.F, Margin = Result-Limit
- 5.The other emission levels were 10dB below the limit
- 6.The test limit distance is 3m limit.

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	RX	TEMP& Humidity	24.8°C/54%

Horizontal

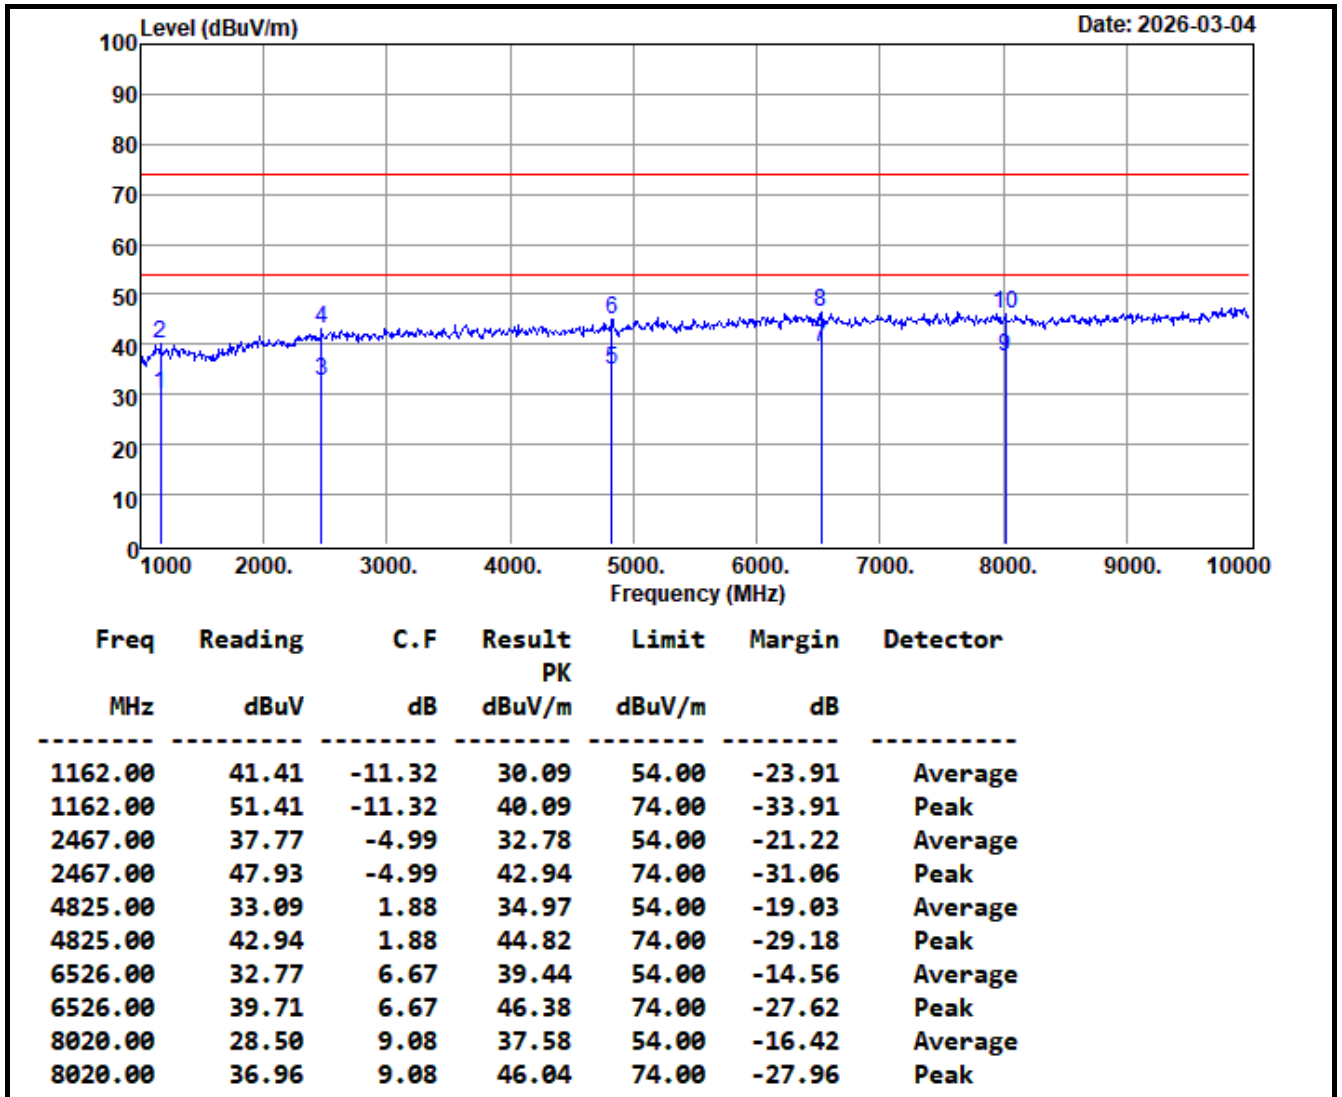


REMARK:

- 1.AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High pass-1G Filter Insertion Loss.
- 2.Spectrum analyzer setting Peak: RBW=1MHz, VBW=3MHz, Detector=Peak
Average: RBW=1MHz, VBW=3MHz, Detector=RMS
- 3.The result basic equation calculation is as follow:
C.F = AF + Cable – Preamp + Filter, Result = Reading + C.F, Margin = Result-Limit
- 4.The other emission levels were 10dB below the limit
- 5.The test limit distance is 3m limit.

Product Name	Wireless Button	Test Date	2026/03/04
Model	QB11-W-HW	Test By	Ted Huang
Test Mode	RX	TEMP& Humidity	24.8°C/54%

Vertical

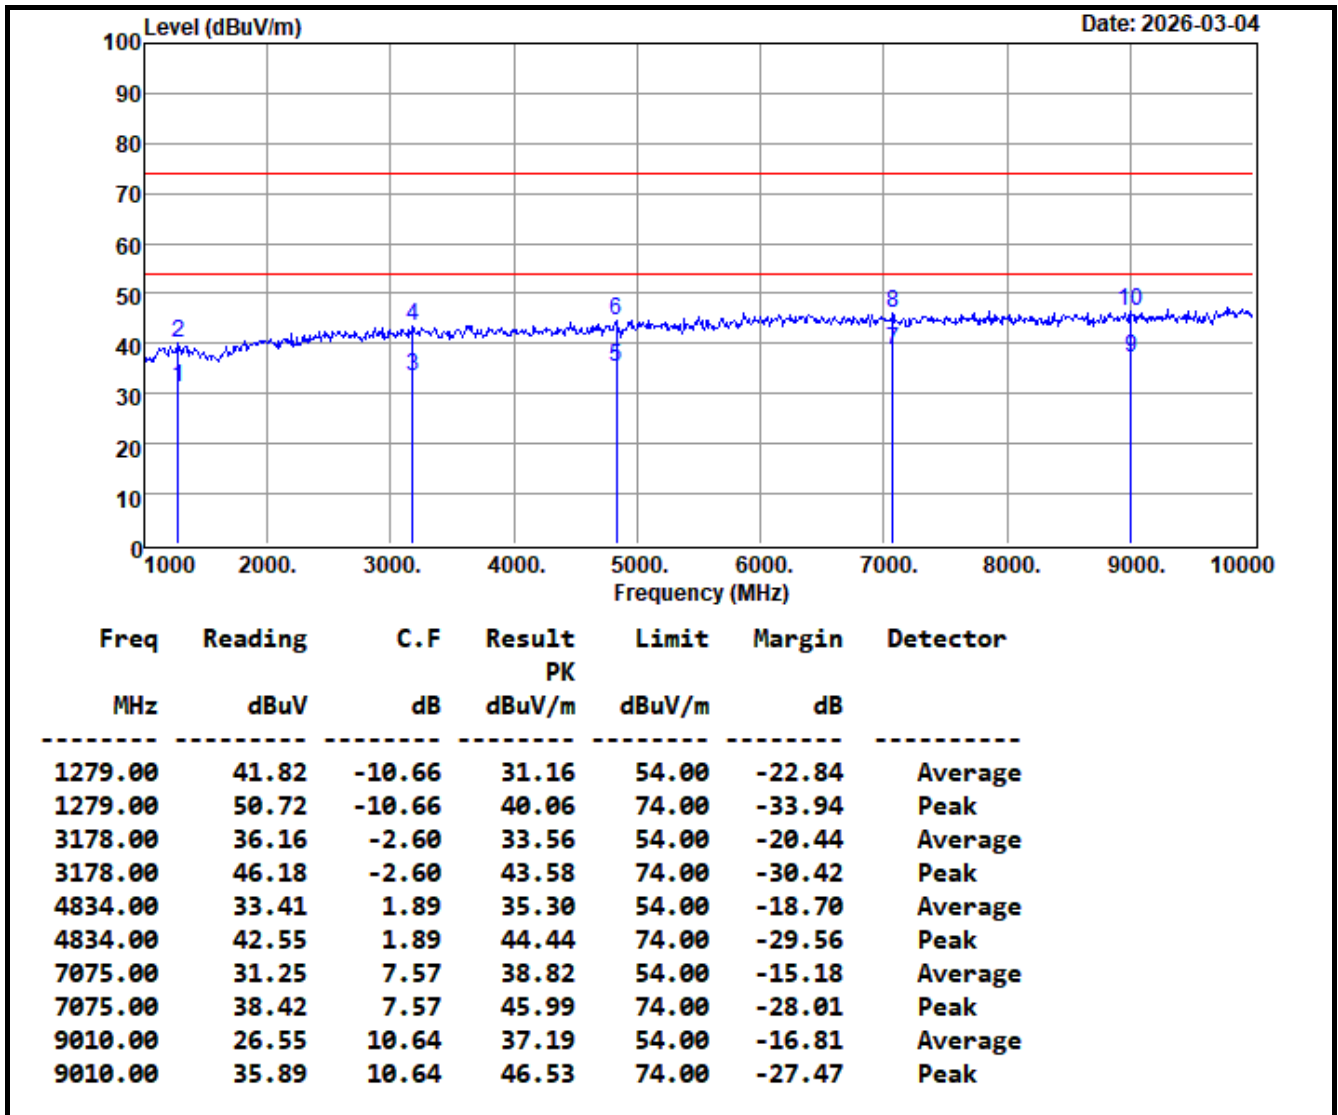

REMARK:

- 1.AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High pass-1G Filter Insertion Loss.
- 2.Spectrum analyzer setting Peak: RBW=1MHz, VBW=3MHz, Detector=Peak
Average: RBW=1MHz, VBW=3MHz, Detector=RMS
- 3.The result basic equation calculation is as follow:
 $C.F = AF + Cable - Preamp + Filter$, $Result = Reading + C.F$, $Margin = Result - Limit$
- 4.The other emission levels were 10dB below the limit
- 5.The test limit distance is 3m limit.

8.7 POWERLINE CONDUCTED EMISSIONS


LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

TEST SETUP

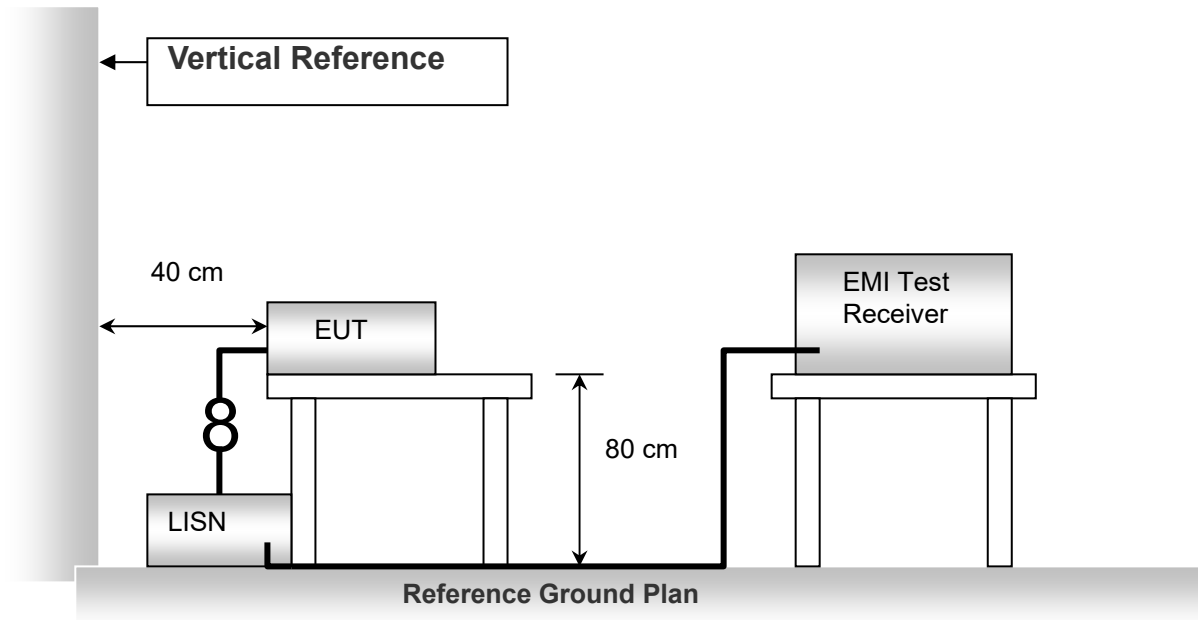

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.10.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

TEST RESULTS

No non-compliance noted.

※ This EUT is not connected to AC Source directly. Not applicable for this test.

9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

Type: Trace on Board PIFA antenna
Model: QB11-W
Manufacturer: N/A
Gain: -0.6 dBi

=== END of Report ===