


Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 125 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax40_Band4
Frequency : 5755 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 24

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

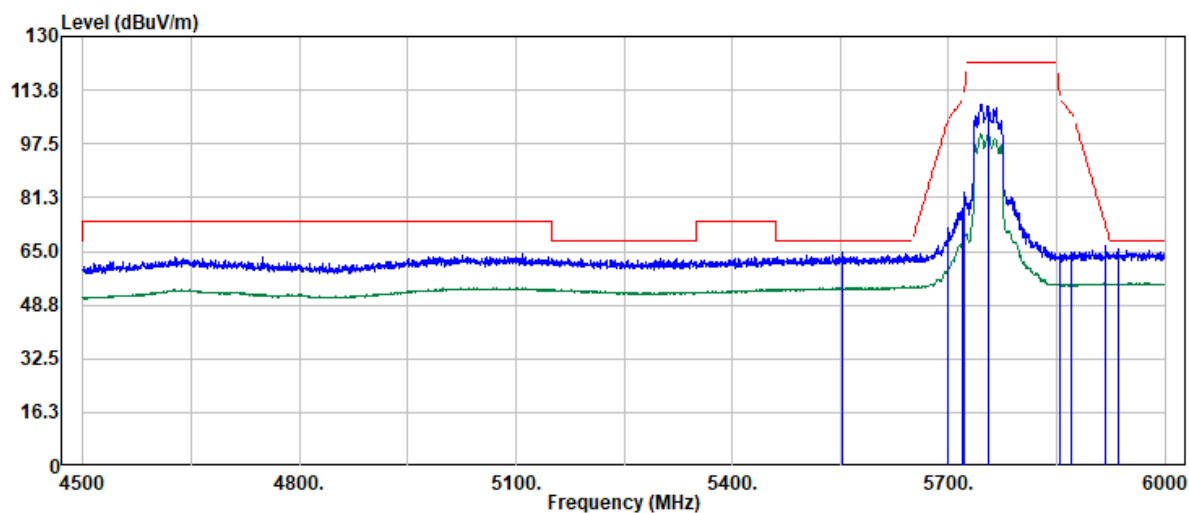

Trace: 1

Freq	Read		Actual	Limit		Detector
MHz	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5553.65	49.98	14.70	64.68	68.20	-3.52	Peak
5699.10	56.54	15.47	72.01	104.54	-32.53	Peak
5718.59	62.51	15.53	78.04	110.41	-32.37	Peak
5722.59	67.14	15.55	82.69	116.71	-34.02	Peak
5755.00	93.72	15.62	109.34	--	--	Peak
5755.00	84.74	15.62	100.36	--	--	Average
5854.55	48.81	15.39	64.20	111.83	-47.63	Peak
5869.54	49.18	15.38	64.56	106.73	-42.17	Peak
5918.53	51.15	15.38	66.53	72.97	-6.44	Peak
5934.52	50.54	15.43	65.97	68.20	-2.23	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 126 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax40_Band4
Frequency : 5795 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 23

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

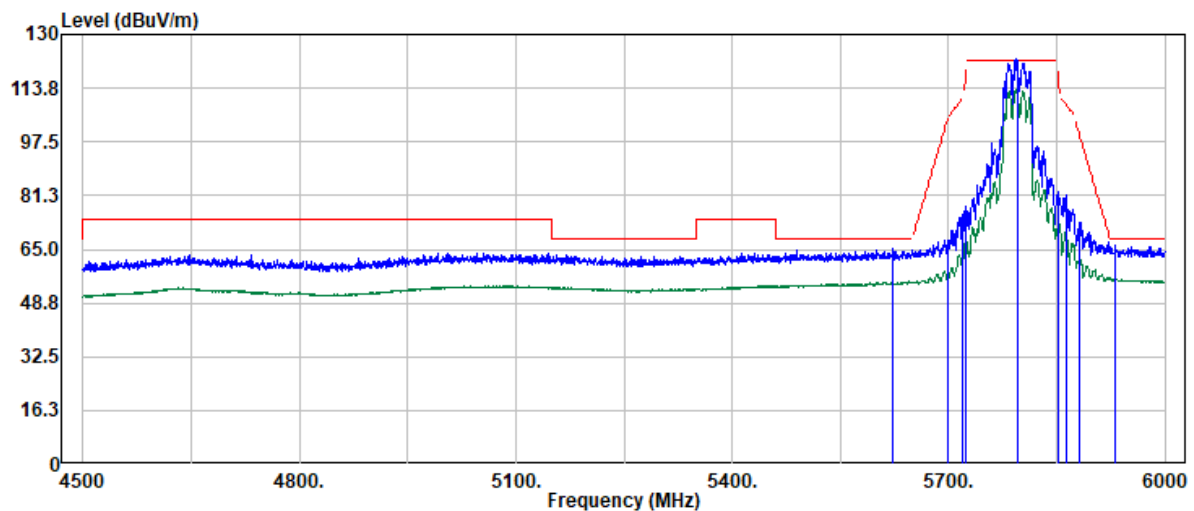

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5622.63	50.13	15.08	65.21	68.20	-2.99	Peak
5699.10	52.32	15.47	67.79	104.54	-36.75	Peak
5718.59	60.23	15.53	75.76	110.41	-34.65	Peak
5724.59	62.27	15.56	77.83	121.27	-43.44	Peak
5795.00	106.90	15.52	122.42	--	--	Peak
5795.00	97.98	15.52	113.50	--	--	Average
5852.55	67.08	15.39	82.47	116.39	-33.92	Peak
5862.55	66.06	15.38	81.44	108.68	-27.24	Peak
5881.04	57.78	15.34	73.12	100.71	-27.59	Peak
5931.02	50.76	15.42	66.18	68.20	-2.02	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 127 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax40_Band4
Frequency : 5795 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 23

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

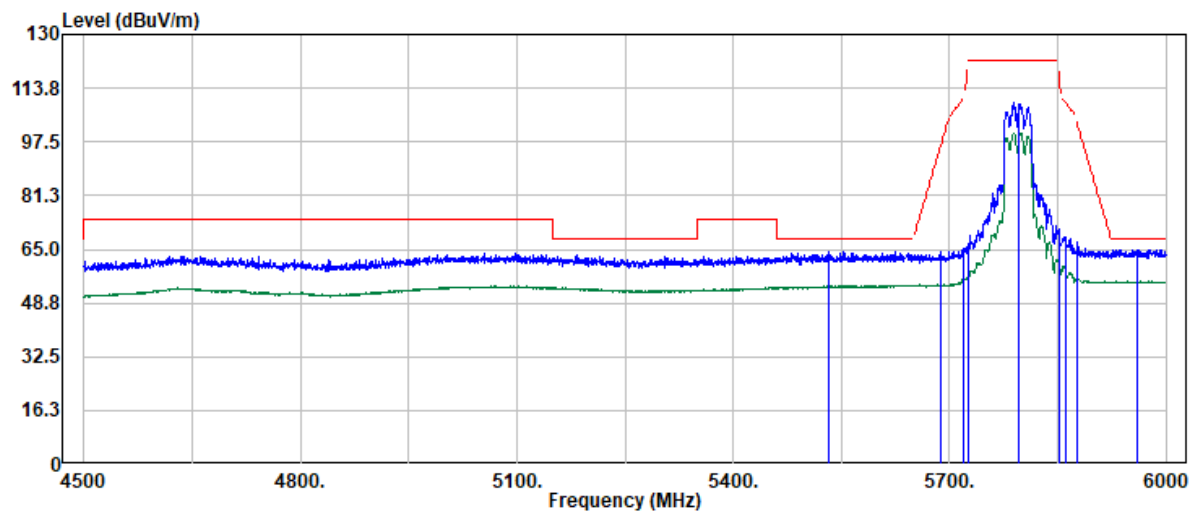


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5533.16	49.87	14.58	64.45	68.20	-3.75	Peak
5688.60	48.65	15.44	64.09	96.80	-32.71	Peak
5719.59	49.60	15.54	65.14	110.69	-45.55	Peak
5725.00	50.43	15.56	65.99	122.20	-56.21	Peak
5795.00	94.10	15.52	109.62	--	--	Peak
5795.00	84.79	15.52	100.31	--	--	Average
5851.55	55.79	15.40	71.19	118.67	-47.48	Peak
5860.05	53.35	15.39	68.74	109.39	-40.65	Peak
5877.04	51.67	15.35	67.02	103.68	-36.66	Peak
5960.01	49.50	15.49	64.99	68.20	-3.21	Peak

Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 128 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax80_Band4
Frequency : 5775 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 21

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

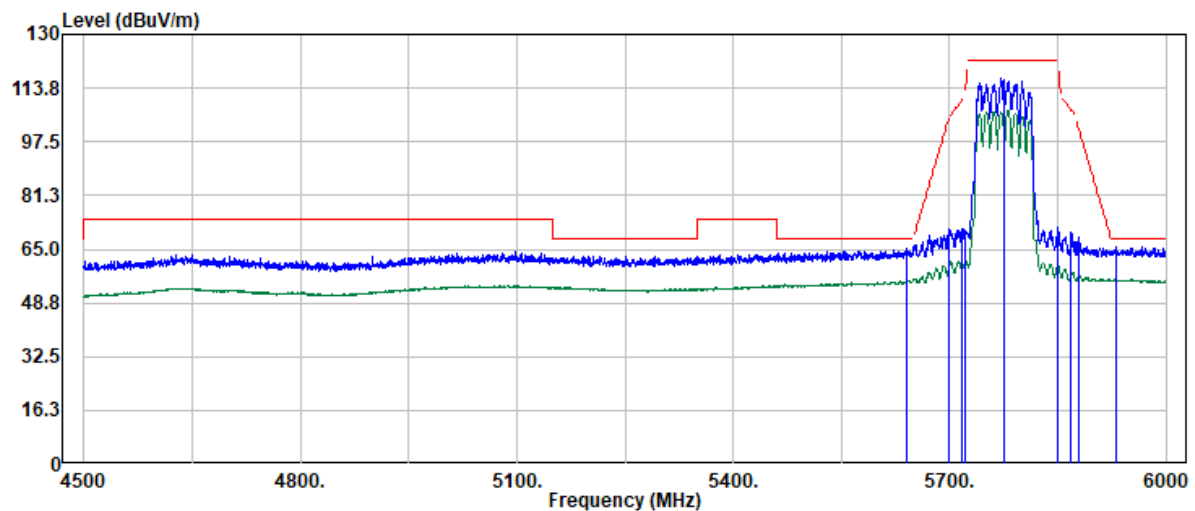

Trace: 1

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5641.62	49.84	15.27	65.11	68.20	-3.09	Peak
5699.10	55.82	15.47	71.29	104.54	-33.25	Peak
5718.09	55.57	15.53	71.10	110.27	-39.17	Peak
5721.59	54.91	15.54	70.45	114.43	-43.98	Peak
5775.00	101.16	15.57	116.73	--	--	Peak
5775.00	91.23	15.57	106.80	--	--	Average
5850.05	55.96	15.40	71.36	122.09	-50.73	Peak
5869.04	55.01	15.38	70.39	106.87	-36.48	Peak
5879.54	53.25	15.34	68.59	101.83	-33.24	Peak
5931.52	50.11	15.42	65.53	68.20	-2.67	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 129 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax80_Band4
Frequency : 5775 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 21

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

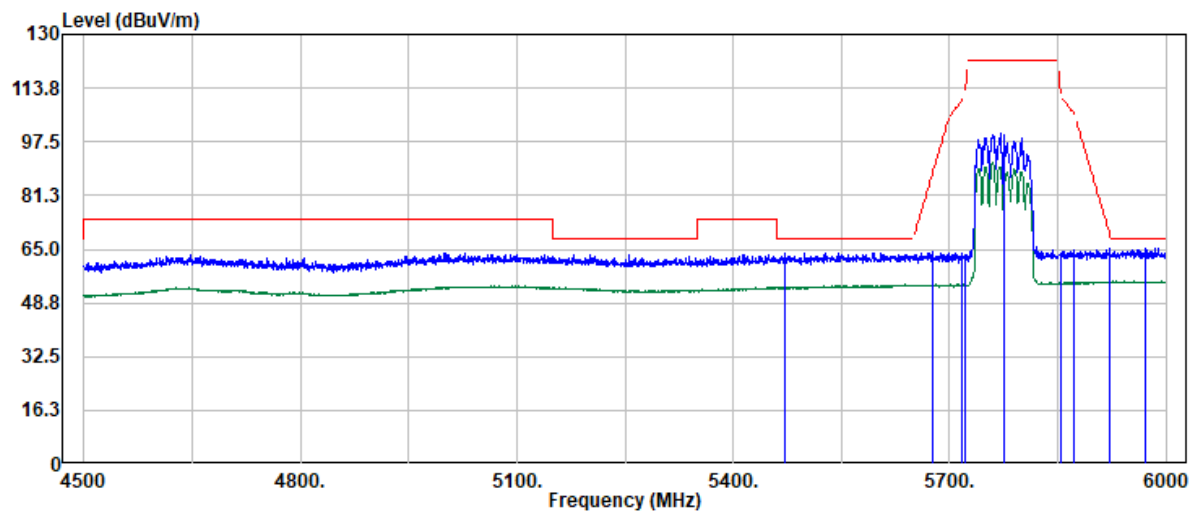

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5470.68	49.63	14.37	64.00	68.20	-4.20	Peak
5677.11	48.74	15.42	64.16	88.30	-24.14	Peak
5718.09	48.08	15.53	63.61	110.27	-46.66	Peak
5721.59	47.91	15.54	63.45	114.43	-50.98	Peak
5775.00	84.35	15.57	99.92	--	--	Peak
5775.00	75.52	15.57	91.09	--	--	Average
5853.55	48.52	15.39	63.91	114.11	-50.20	Peak
5873.04	49.51	15.37	64.88	105.75	-40.87	Peak
5922.53	49.66	15.39	65.05	70.02	-4.97	Peak
5972.51	49.93	15.50	65.43	68.20	-2.77	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 130 / 193
Rev.: 02

TX Test Data

Project No : TM-2412000476P
Operation Band : 802.11n40_Band1
Frequency : 5190 MHz
Operation Mode : TX
EUT Pol : H
Setting :

Test Date : 2025-02-08
Temp./Humi. : 24.3/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

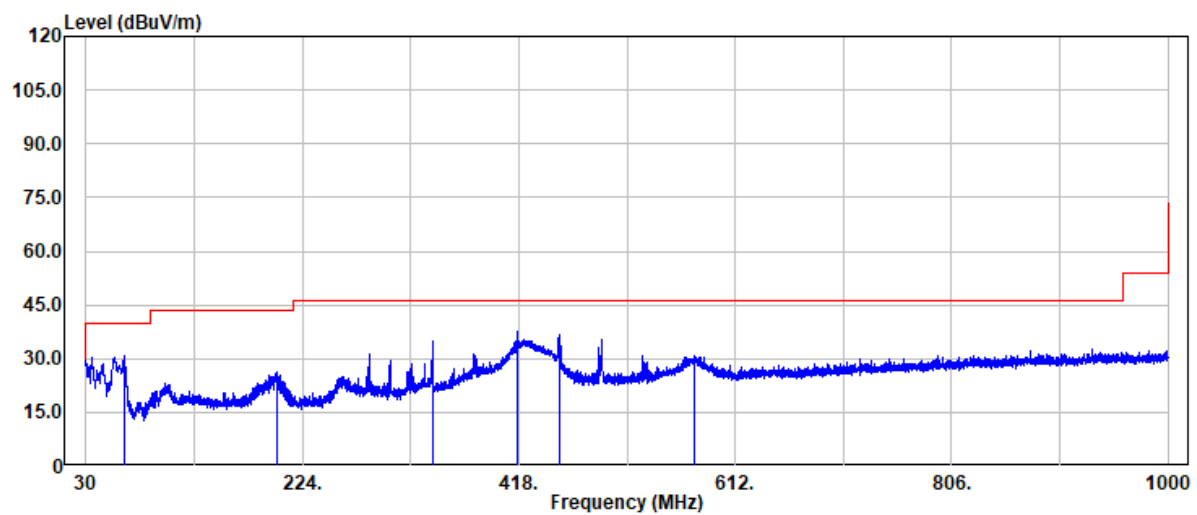

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
63.95	46.50	-15.90	30.60	40.00	-9.40	Peak
201.33	37.10	-10.82	26.28	43.50	-17.22	Peak
340.64	43.41	-8.65	34.76	46.00	-11.24	Peak
417.15	43.63	-6.23	37.40	46.00	-8.60	Peak
454.01	42.06	-5.31	36.75	46.00	-9.25	Peak
575.02	33.90	-3.19	30.71	46.00	-15.29	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 131 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11n40_Band1
Frequency : 5190 MHz
Operation Mode : TX
EUT Pol : H
Setting :

Test Date : 2025-02-08
Temp./Humi. : 24.3/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

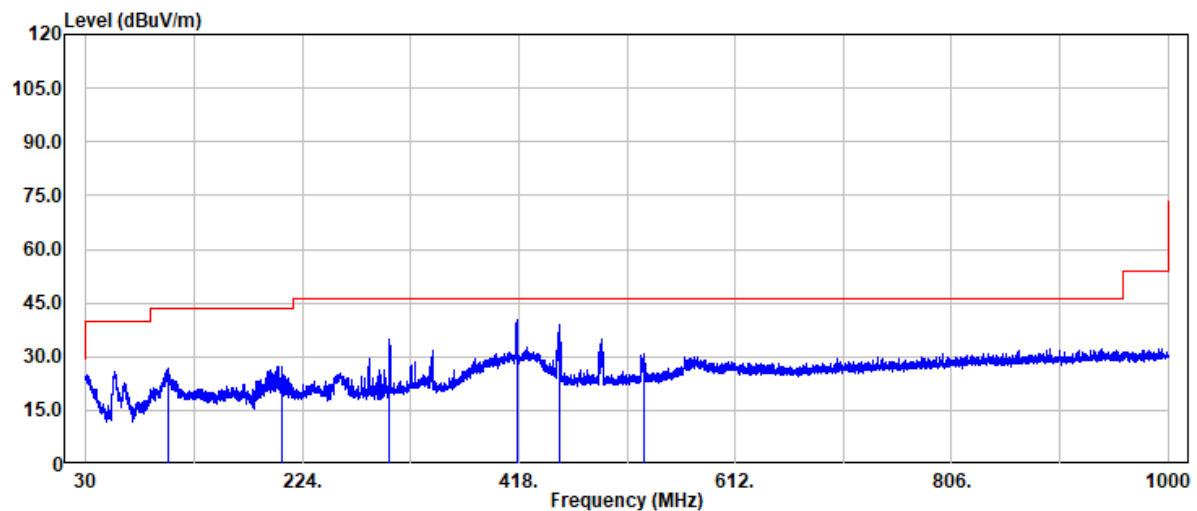


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
103.11	39.23	-12.61	26.62	43.50	-16.88	Peak
205.57	39.75	-12.49	27.26	43.50	-16.24	Peak
301.84	44.06	-9.29	34.77	46.00	-11.23	Peak
416.30	46.38	-6.25	40.13	46.00	-5.87	Peak
454.86	44.02	-5.30	38.72	46.00	-7.28	Peak
530.04	34.80	-3.89	30.91	46.00	-15.09	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 132 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11a_Band1_CH0	Temp./Humi.	: 24.4/59
Frequency	: 5180 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 21		

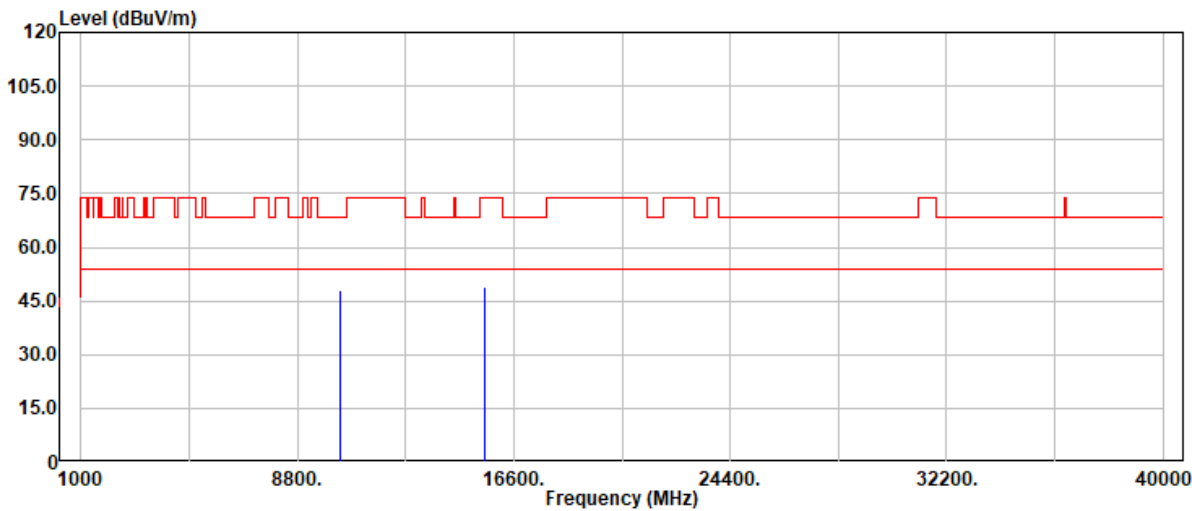


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	34.67	13.12	47.79	68.20	-20.41	Peak
15540.00	32.95	15.77	48.72	74.00	-25.28	Peak
15540.00	24.19	15.77	39.96	54.00	-14.04	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 133 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11a_Band1_CH0	Temp./Humi.	: 24.4/59
Frequency	: 5180 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 21		

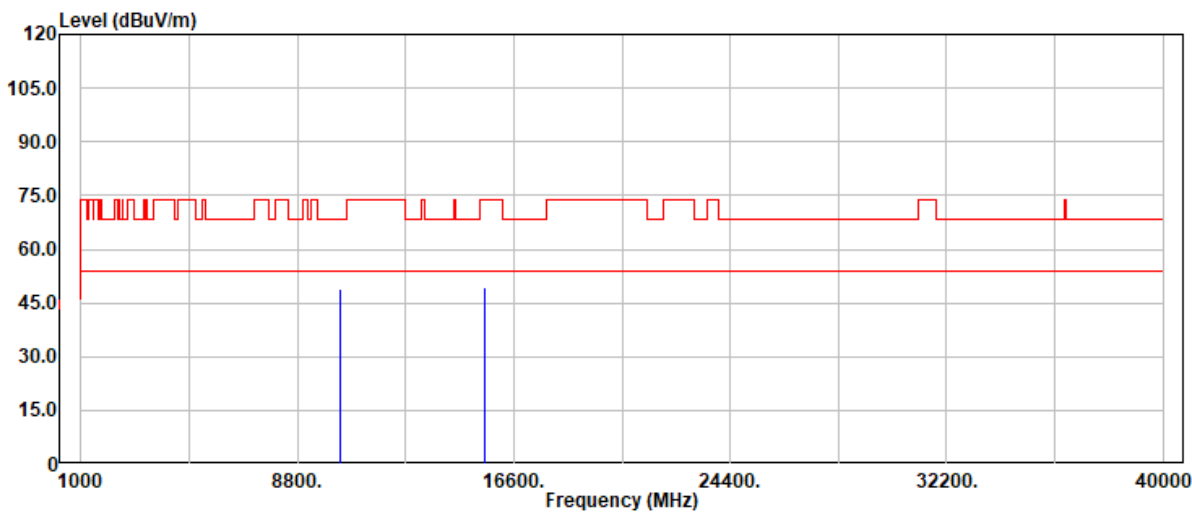

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	35.79	13.12	48.91	68.20	-19.29	Peak
15540.00	33.41	15.77	49.18	74.00	-24.82	Peak
15540.00	23.81	15.77	39.58	54.00	-14.42	Average




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 134 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11a_Band1_CH0
Frequency : 5220 MHz
Operation Mode : TX
EUT Pol : H
Setting : 28

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

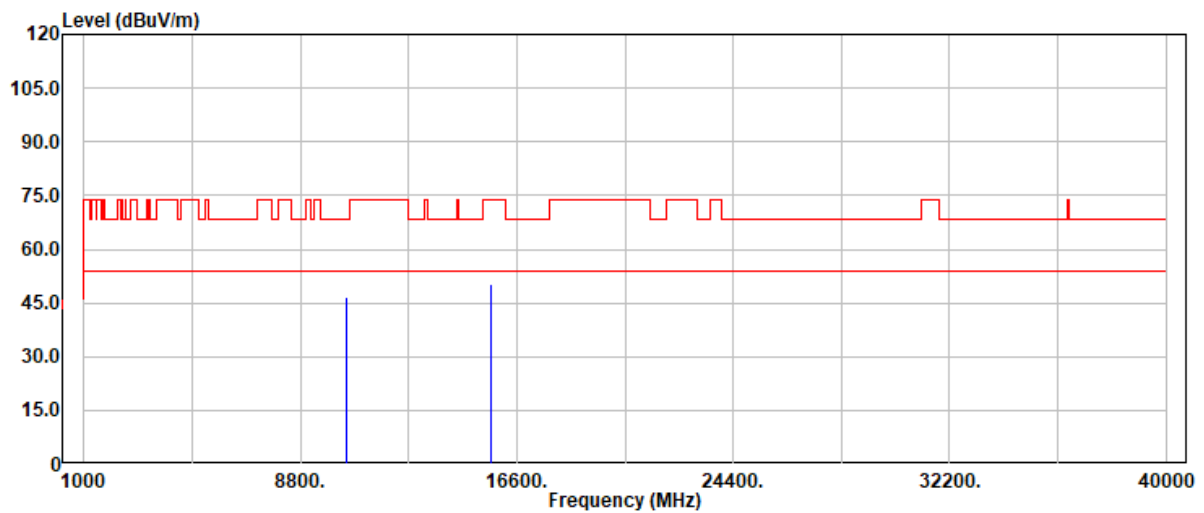

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	33.77	12.96	46.73	68.20	-21.47	Peak
15660.00	34.43	15.74	50.17	74.00	-23.83	Peak
15660.00	24.91	15.74	40.65	54.00	-13.35	Average




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 135 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11a_Band1_CH0
Frequency : 5220 MHz
Operation Mode : TX
EUT Pol : H
Setting : 28

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

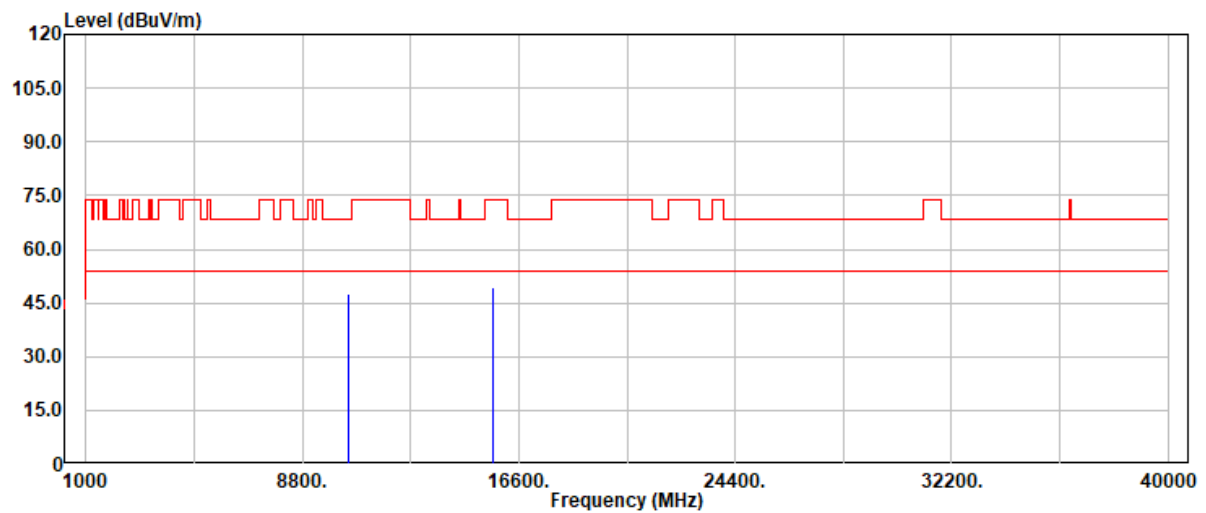

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	34.52	12.96	47.48	68.20	-20.72	Peak
15660.00	33.60	15.74	49.34	74.00	-24.66	Peak
15660.00	24.81	15.74	40.55	54.00	-13.45	Average




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 136 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11a_Band1_CH0
Frequency : 5240 MHz
Operation Mode : TX
EUT Pol : H
Setting : 21

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

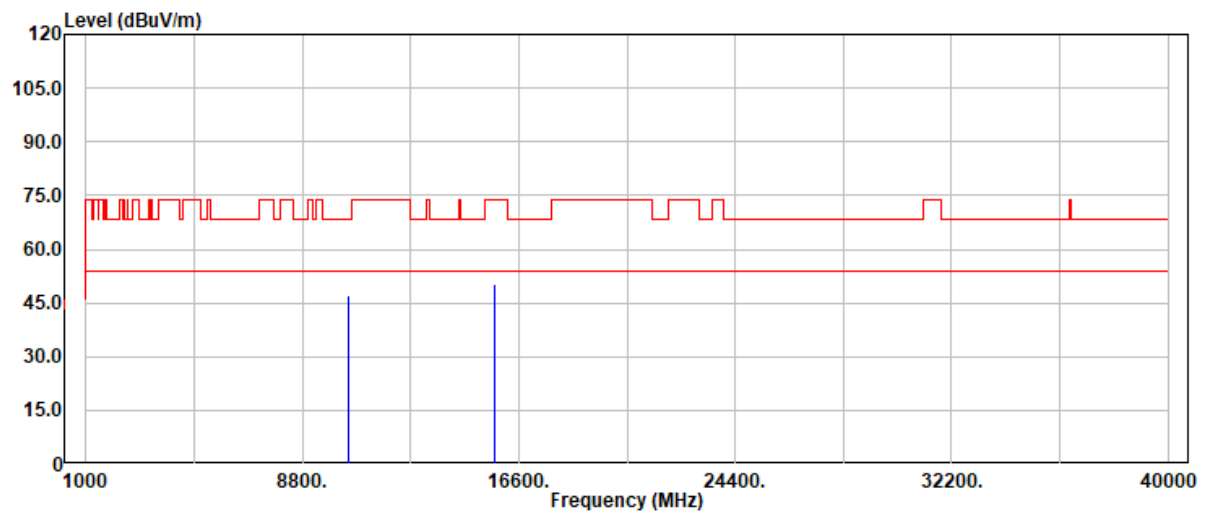

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	34.27	12.92	47.19	68.20	-21.01	Peak
15720.00	34.02	16.27	50.29	74.00	-23.71	Peak
15720.00	25.42	16.27	41.69	54.00	-12.31	Average




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 137 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11a_Band1_CH0
Frequency : 5240 MHz
Operation Mode : TX
EUT Pol : H
Setting : 21

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

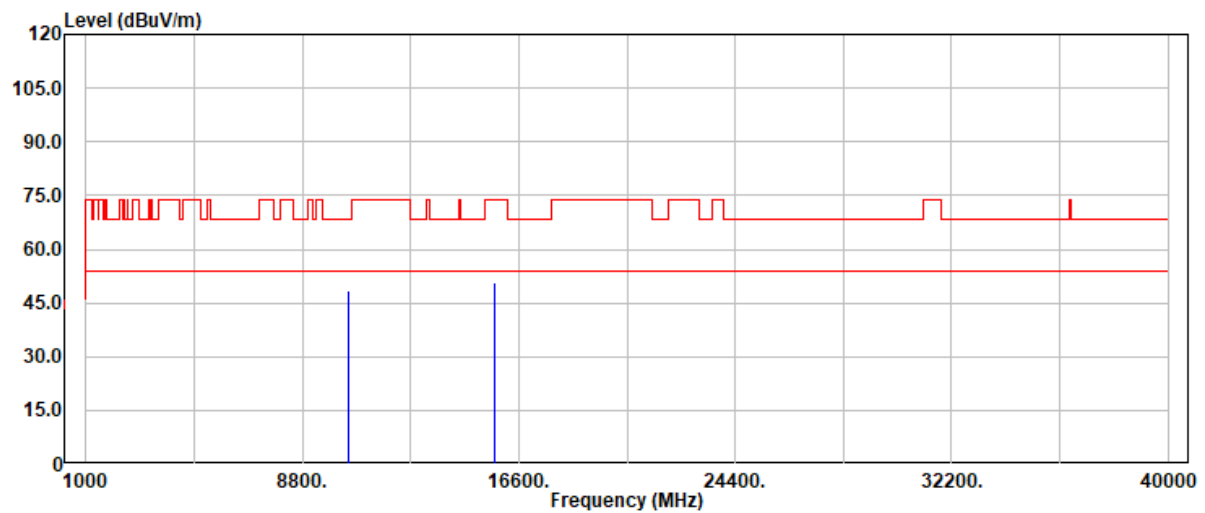

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	35.63	12.92	48.55	68.20	-19.65	Peak
15720.00	34.28	16.27	50.55	74.00	-23.45	Peak
15720.00	25.27	16.27	41.54	54.00	-12.46	Average




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 138 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11n20_Band1
Frequency : 5180 MHz
Operation Mode : TX
EUT Pol : H
Setting : 19

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : Vertical
Engineer : Tony.Chao
Test Chamber : 966A

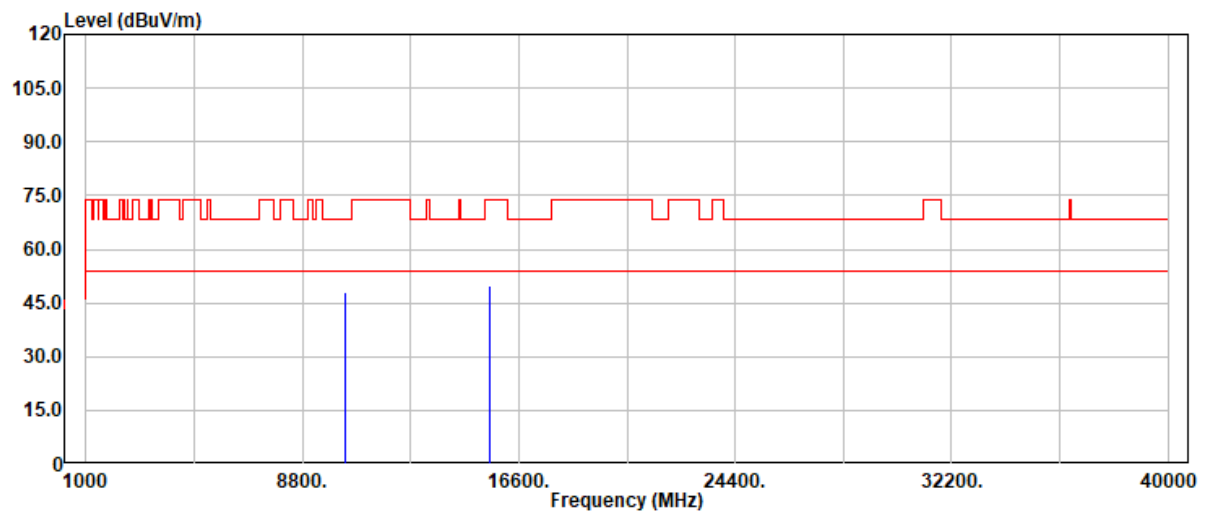


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	35.07	13.12	48.19	68.20	-20.01	Peak
15540.00	33.99	15.77	49.76	74.00	-24.24	Peak
15540.00	27.21	15.77	42.98	54.00	-11.02	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 139 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5180 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

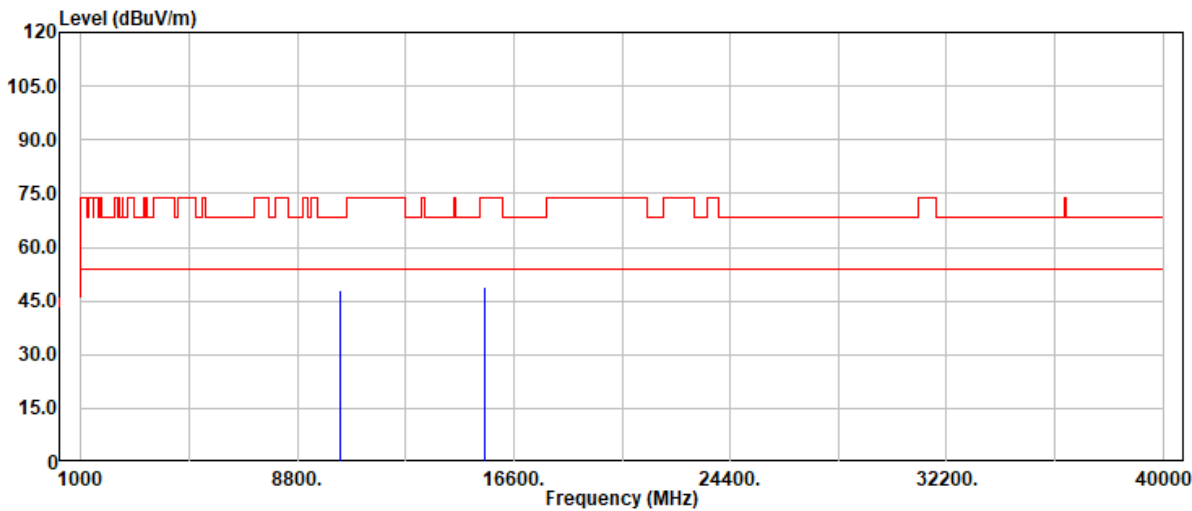


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	34.67	13.12	47.79	68.20	-20.41	Peak
15540.00	33.22	15.77	48.99	74.00	-25.01	Peak
15540.00	27.27	15.77	43.04	54.00	-10.96	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 140 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5220 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

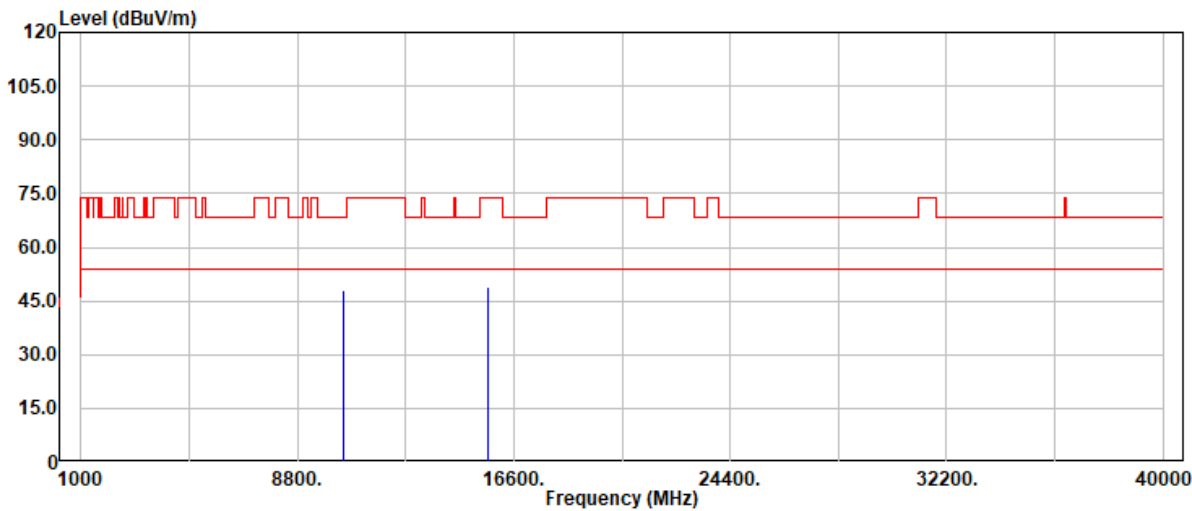


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	35.05	12.96	48.01	68.20	-20.19	Peak
15660.00	33.33	15.74	49.07	74.00	-24.93	Peak
15660.00	27.74	15.74	43.48	54.00	-10.52	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 141 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5220 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

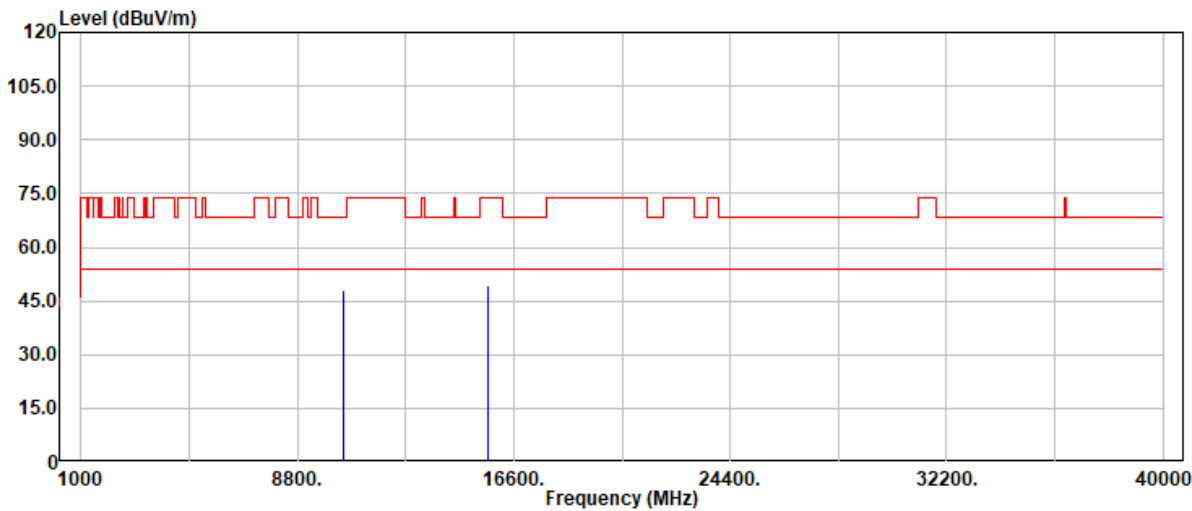


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	34.95	12.96	47.91	68.20	-20.29	Peak
15660.00	33.47	15.74	49.21	74.00	-24.79	Peak
15660.00	27.86	15.74	43.60	54.00	-10.40	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 142 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5240 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

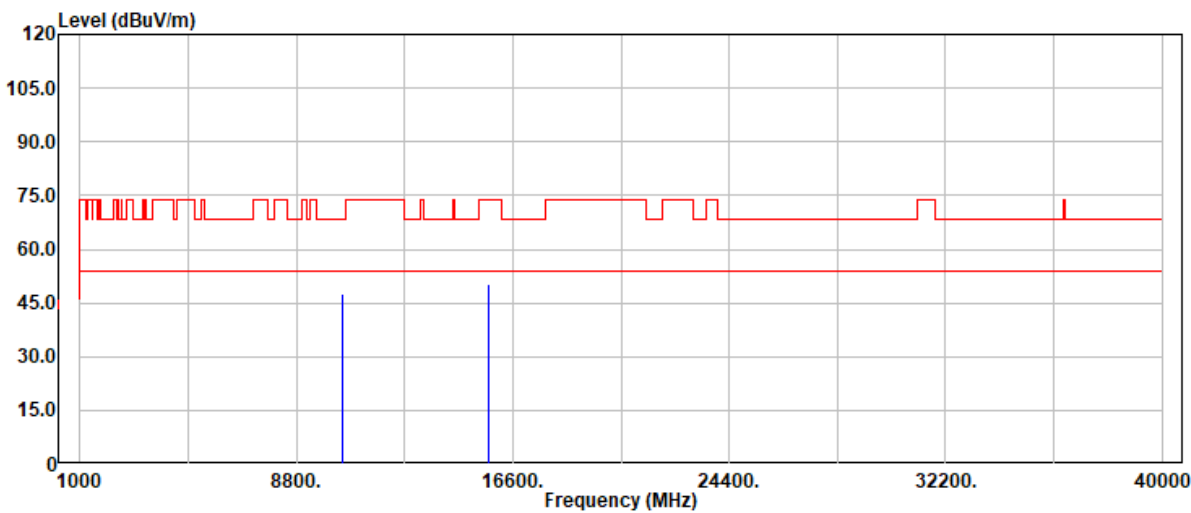


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	34.62	12.92	47.54	68.20	-20.66	Peak
15720.00	34.04	16.27	50.31	74.00	-23.69	Peak
15720.00	27.86	16.27	44.13	54.00	-9.87	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 143 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5240 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

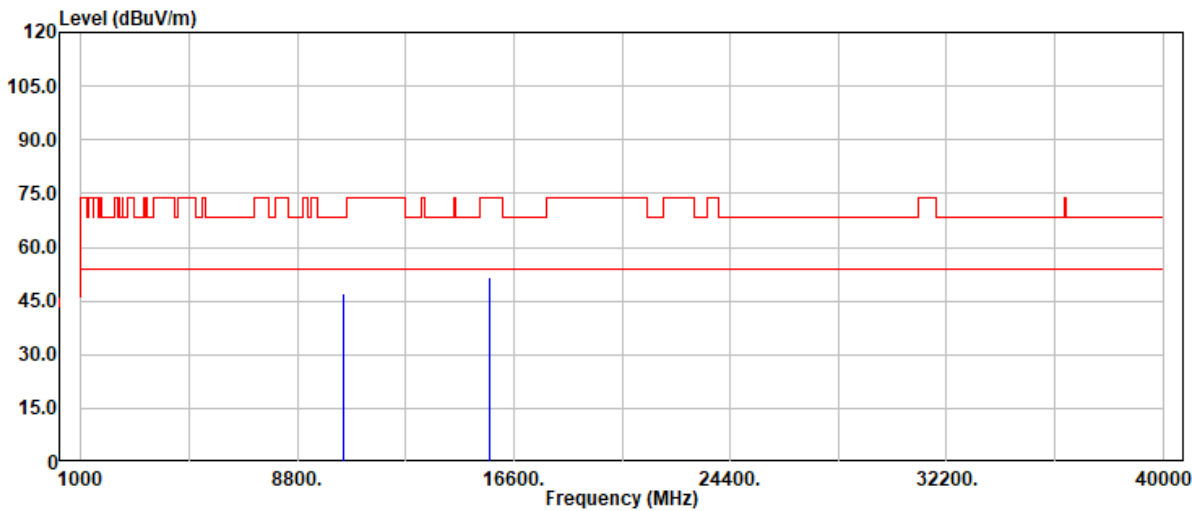

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	34.07	12.92	46.99	68.20	-21.21	Peak
15720.00	35.32	16.27	51.59	74.00	-22.41	Peak
15720.00	27.85	16.27	44.12	54.00	-9.88	Average




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 144 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11n40_Band1
Frequency : 5190 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

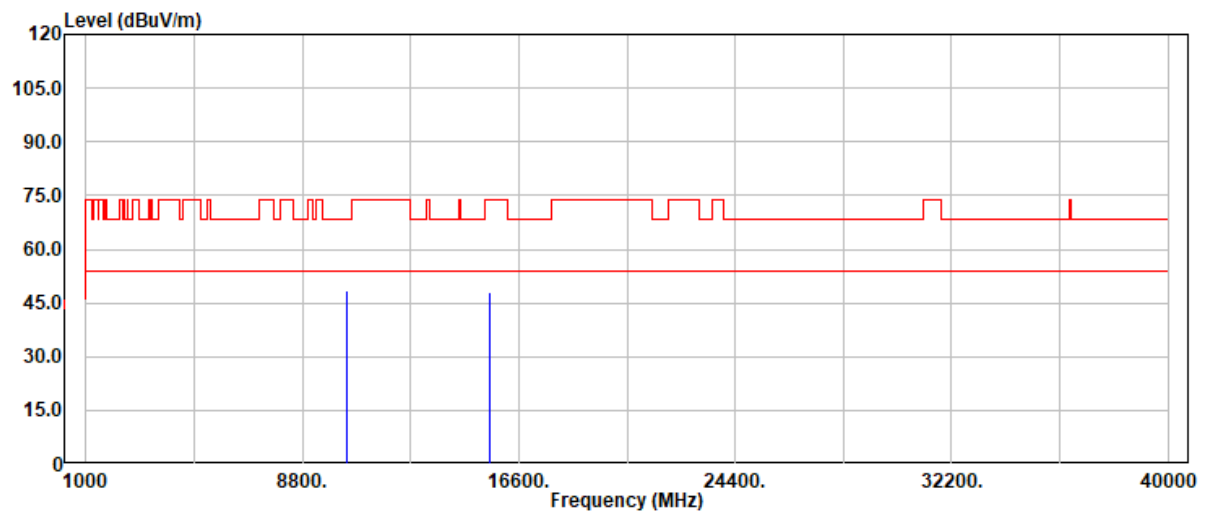


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	35.25	13.02	48.27	68.20	-19.93	Peak
15570.00	32.55	15.58	48.13	74.00	-25.87	Peak
15570.00	23.86	15.58	39.44	54.00	-14.56	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 145 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n40_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5190 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

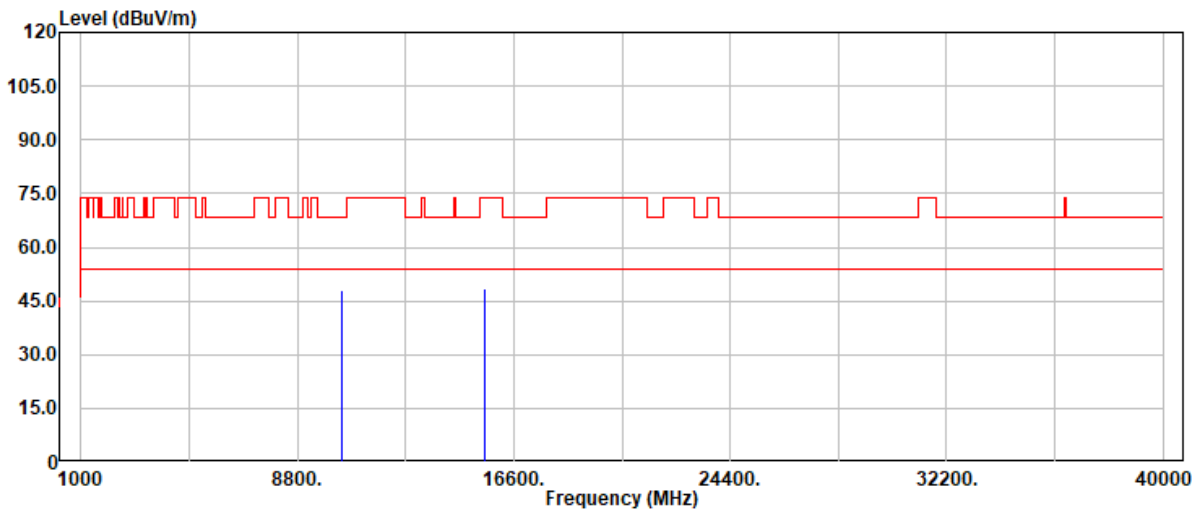


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	35.07	13.02	48.09	68.20	-20.11	Peak
15570.00	32.99	15.58	48.57	74.00	-25.43	Peak
15570.00	23.77	15.58	39.35	54.00	-14.65	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 146 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n40_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5230 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

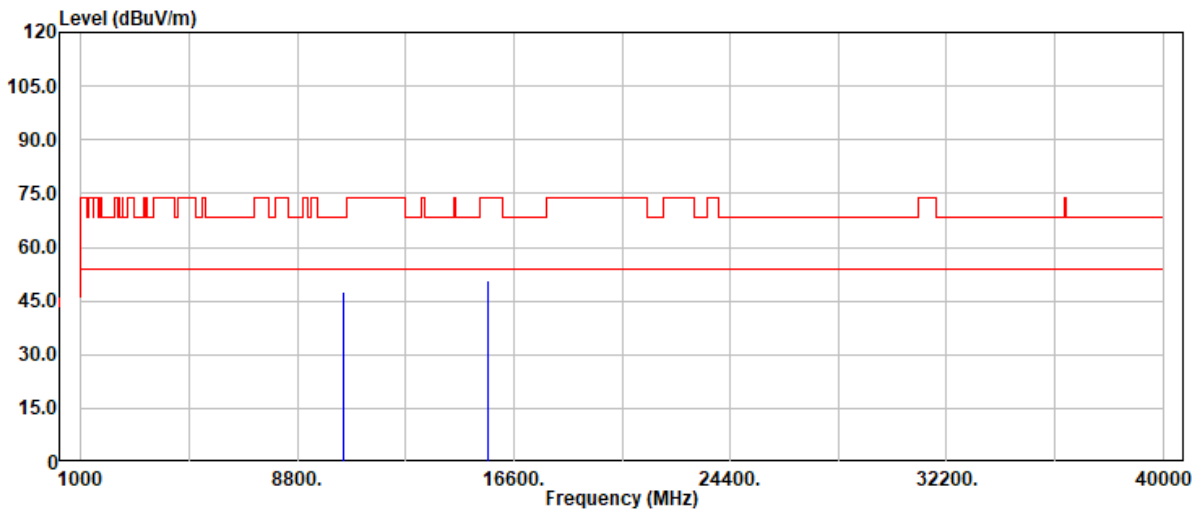


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	34.54	12.96	47.50	68.20	-20.70	Peak
15690.00	34.48	16.03	50.51	74.00	-23.49	Peak
15690.00	25.03	16.03	41.06	54.00	-12.94	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 147 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n40_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5230 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

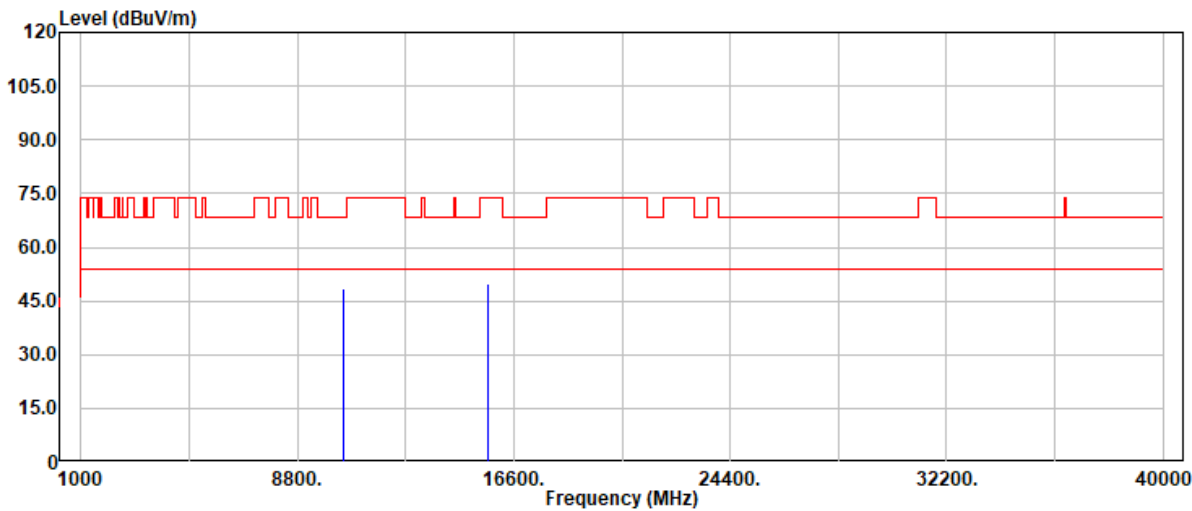


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	35.45	12.96	48.41	68.20	-19.79	Peak
15690.00	33.73	16.03	49.76	74.00	-24.24	Peak
15690.00	24.96	16.03	40.99	54.00	-13.01	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 148 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ac80_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5210 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

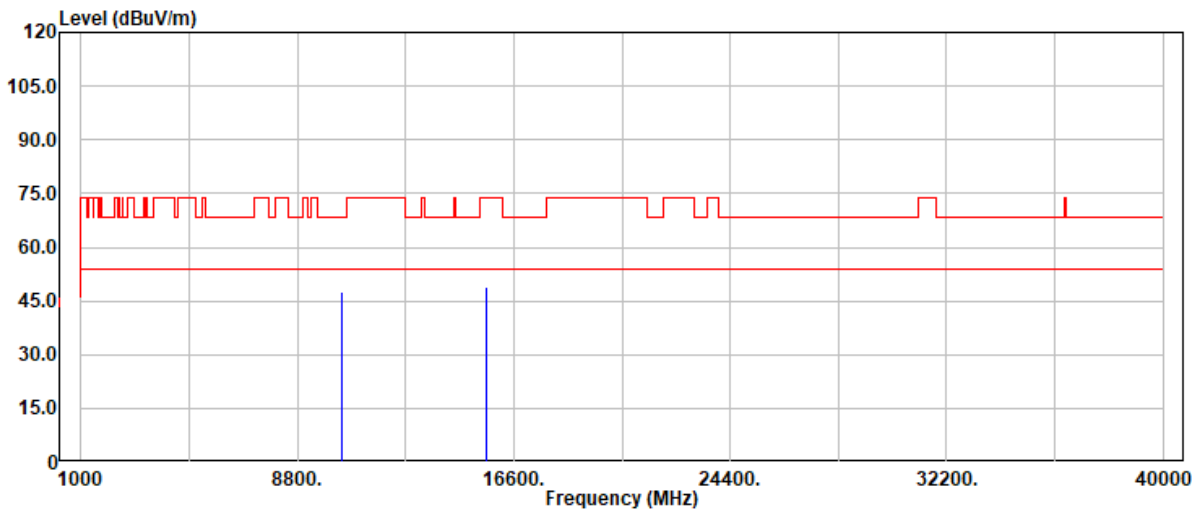


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	34.51	12.94	47.45	68.20	-20.75	Peak
15630.00	33.21	15.58	48.79	74.00	-25.21	Peak
15630.00	24.73	15.58	40.31	54.00	-13.69	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 149 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ac80_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5210 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

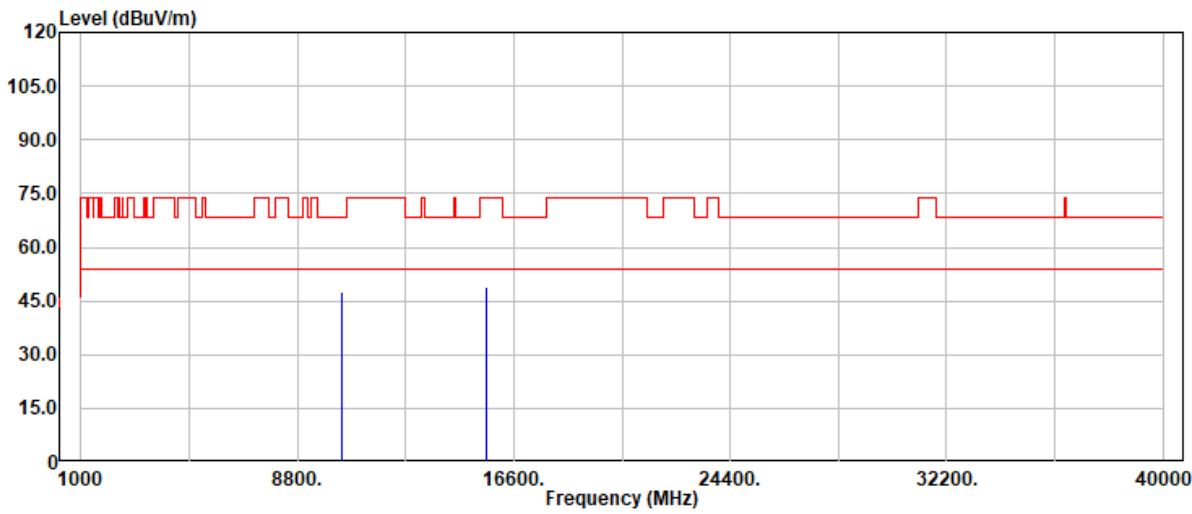


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	34.69	12.94	47.63	68.20	-20.57	Peak
15630.00	33.33	15.58	48.91	74.00	-25.09	Peak
15630.00	24.71	15.58	40.29	54.00	-13.71	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 150 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax20_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5180 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

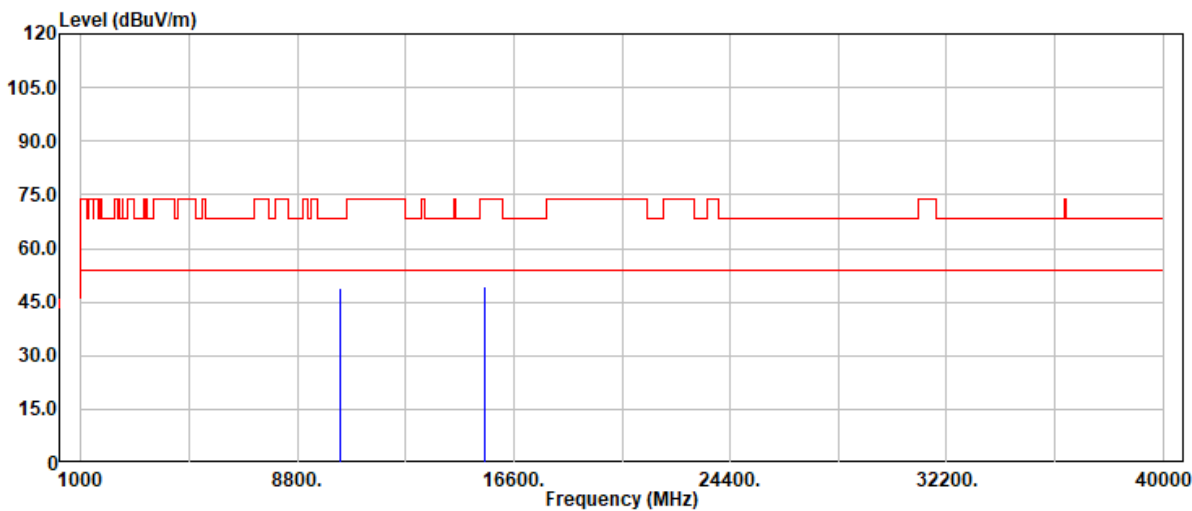


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	35.66	13.12	48.78	68.20	-19.42	Peak
15540.00	33.50	15.77	49.27	74.00	-24.73	Peak
15540.00	27.10	15.77	42.87	54.00	-11.13	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 151 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax20_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5180 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

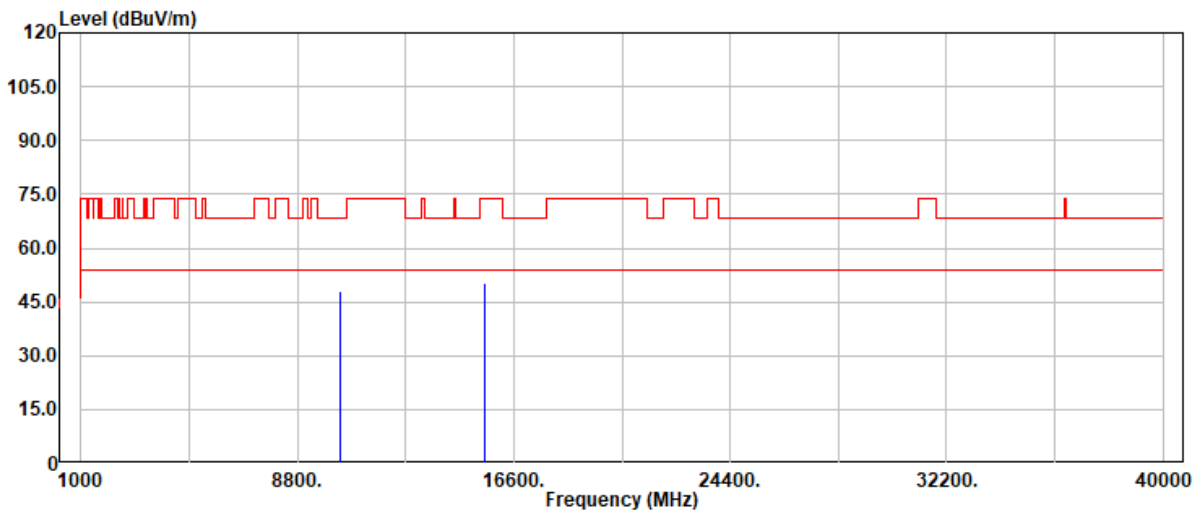


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	34.74	13.12	47.86	68.20	-20.34	Peak
15540.00	34.50	15.77	50.27	74.00	-23.73	Peak
15540.00	27.05	15.77	42.82	54.00	-11.18	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 152 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax20_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5220 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

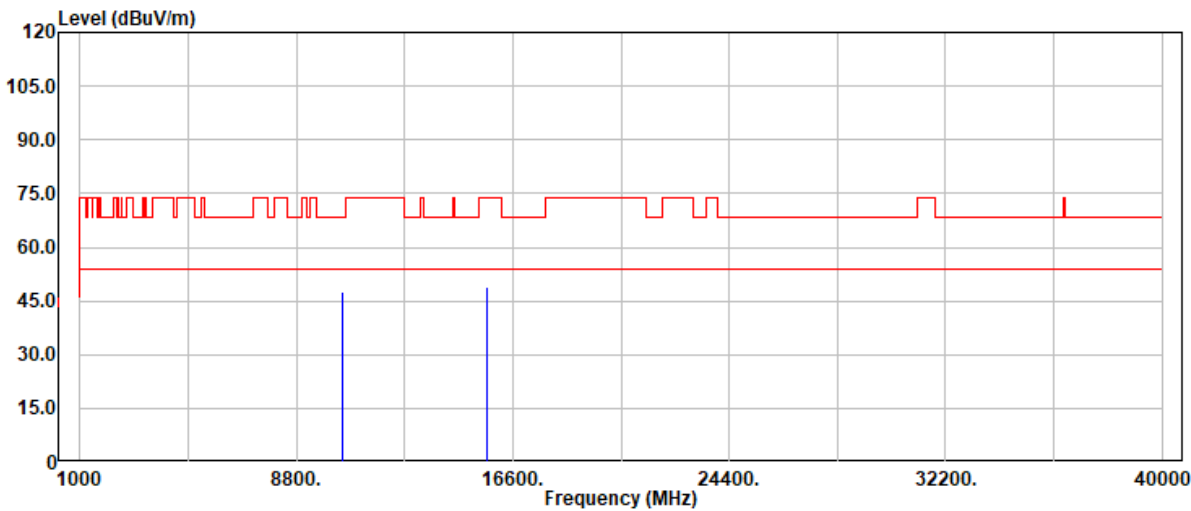


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	34.78	12.96	47.74	68.20	-20.46	Peak
15660.00	33.29	15.74	49.03	74.00	-24.97	Peak
15660.00	27.75	15.74	43.49	54.00	-10.51	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 153 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax20_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5220 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

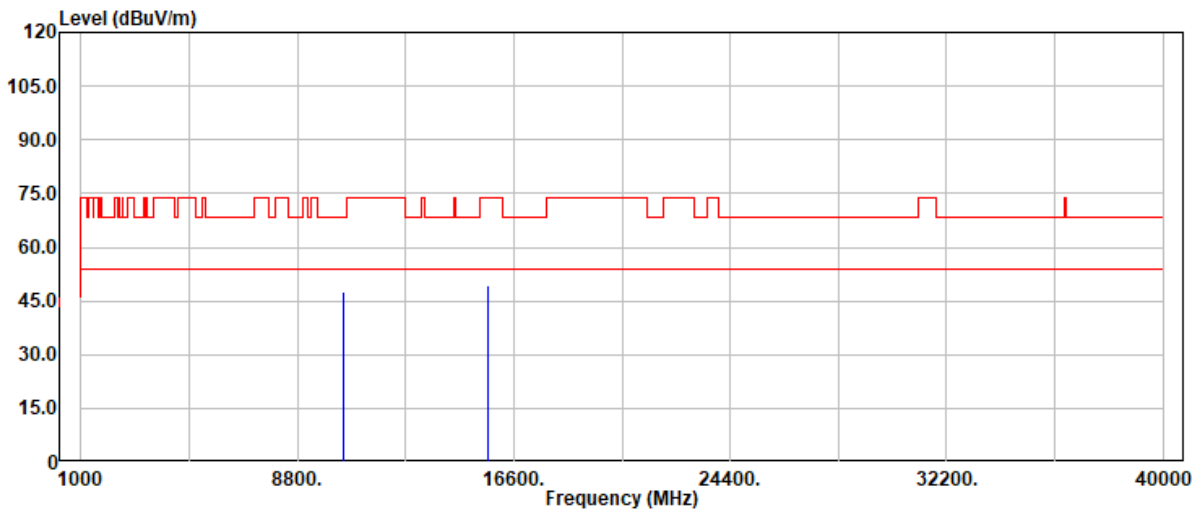

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	34.61	12.96	47.57	68.20	-20.63	Peak
15660.00	33.69	15.74	49.43	74.00	-24.57	Peak
15660.00	27.75	15.74	43.49	54.00	-10.51	Average




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 154 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax20_Band1
Frequency : 5240 MHz
Operation Mode : TX
EUT Pol : H
Setting : 19

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

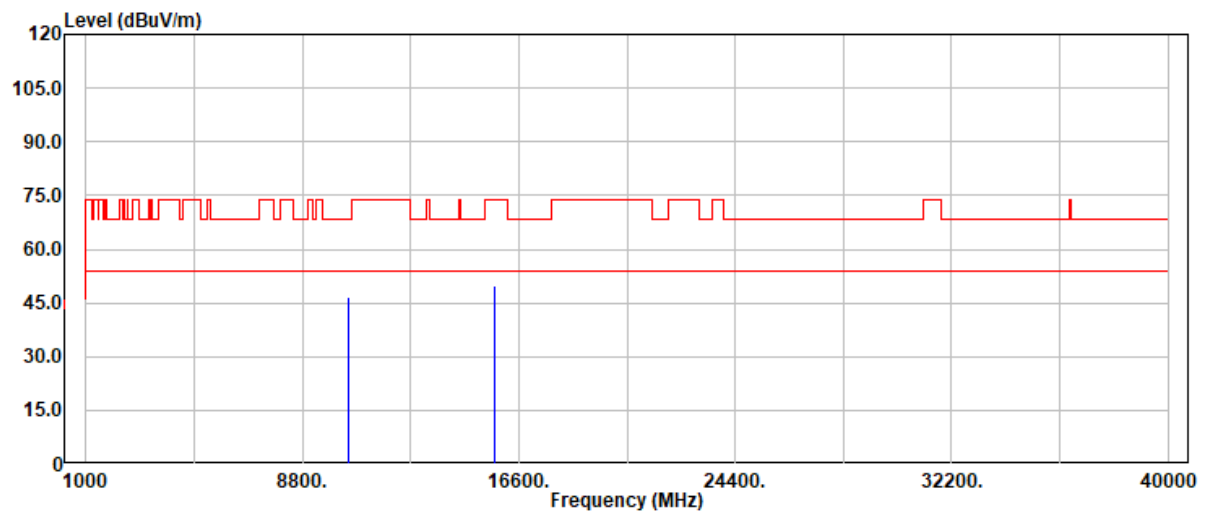


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	33.79	12.92	46.71	68.20	-21.49	Peak
15720.00	33.32	16.27	49.59	74.00	-24.41	Peak
15720.00	27.68	16.27	43.95	54.00	-10.05	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 155 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax20_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5240 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

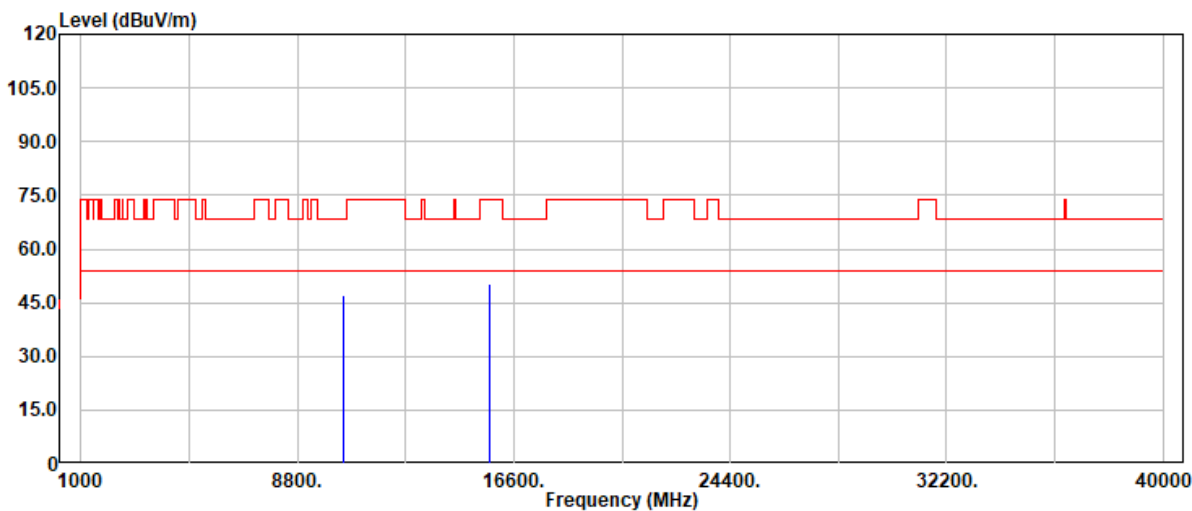


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	34.23	12.92	47.15	68.20	-21.05	Peak
15720.00	34.09	16.27	50.36	74.00	-23.64	Peak
15720.00	27.43	16.27	43.70	54.00	-10.30	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 156 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax40_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5190 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

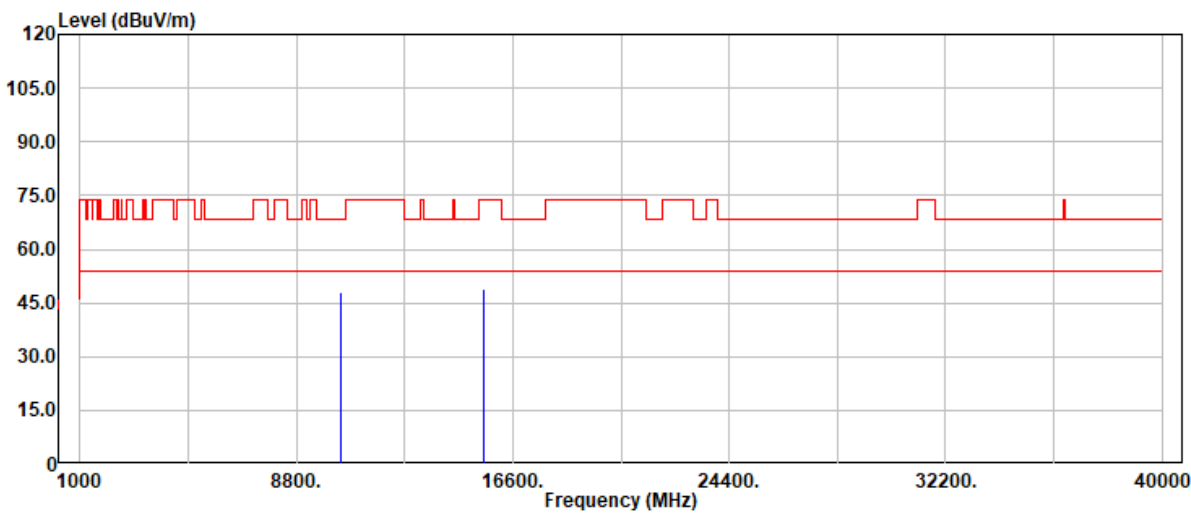

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	35.11	13.02	48.13	68.20	-20.07	Peak
15570.00	33.52	15.58	49.10	74.00	-24.90	Peak
15570.00	23.97	15.58	39.55	54.00	-14.45	Average




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 157 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax40_Band1
Frequency : 5190 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

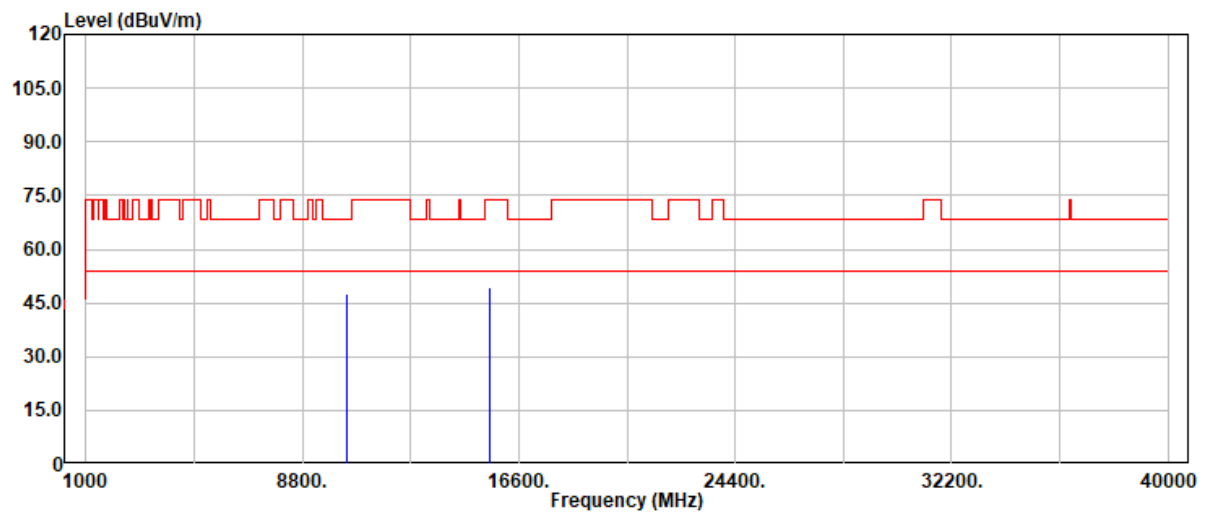


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	34.43	13.02	47.45	68.20	-20.75	Peak
15570.00	33.99	15.58	49.57	74.00	-24.43	Peak
15570.00	24.06	15.58	39.64	54.00	-14.36	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 158 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax40_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5230 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

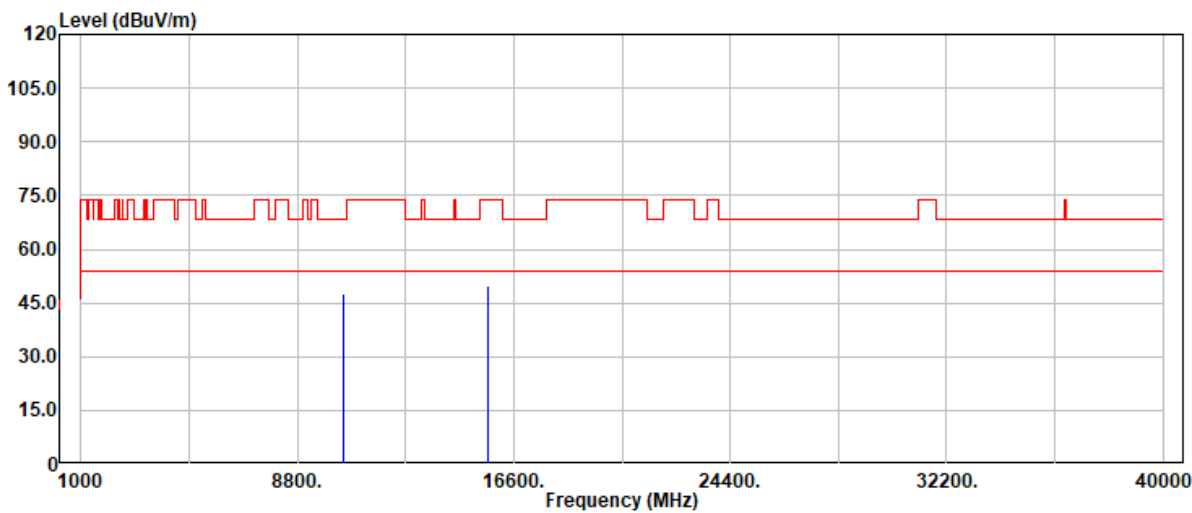

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	34.40	12.96	47.36	68.20	-20.84	Peak
15690.00	33.61	16.03	49.64	74.00	-24.36	Peak
15690.00	24.55	16.03	40.58	54.00	-13.42	Average




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 159 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax40_Band1
Frequency : 5230 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

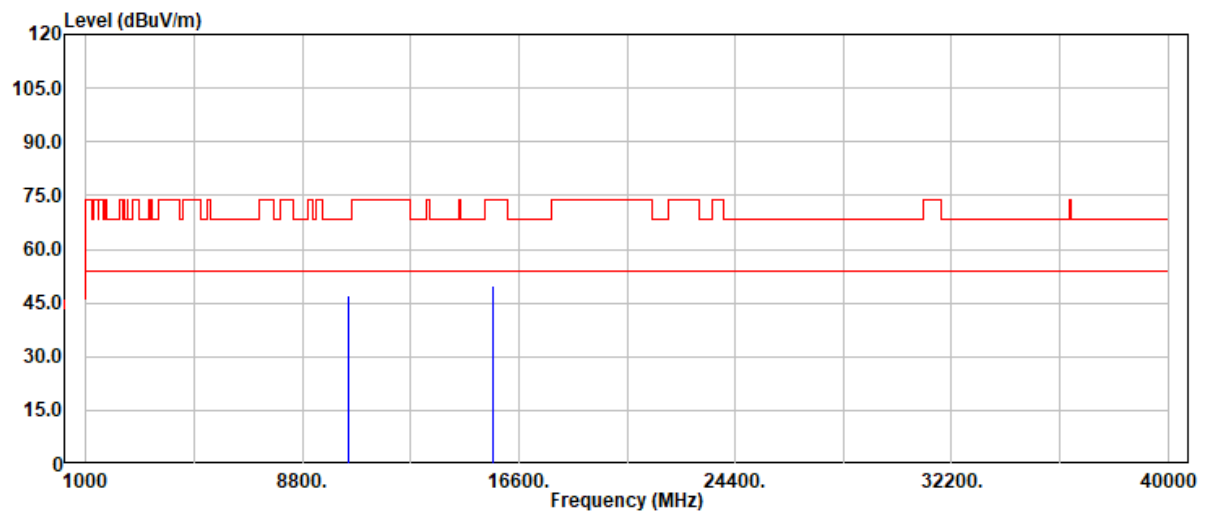


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	34.05	12.96	47.01	68.20	-21.19	Peak
15690.00	33.79	16.03	49.82	74.00	-24.18	Peak
15690.00	24.36	16.03	40.39	54.00	-13.61	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 160 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax80_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5210 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

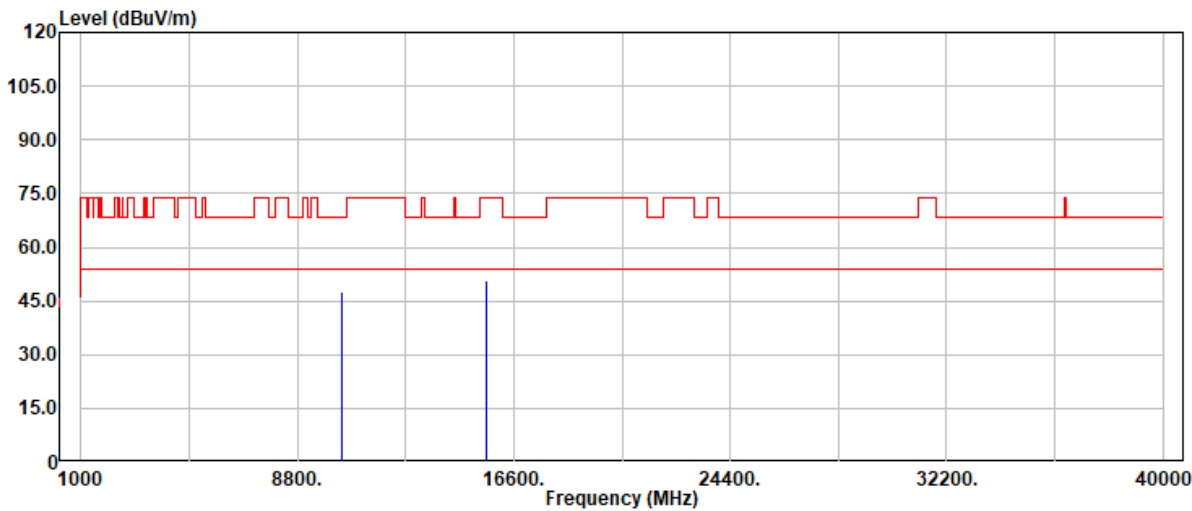


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	34.83	12.94	47.77	68.20	-20.43	Peak
15630.00	35.01	15.58	50.59	74.00	-23.41	Peak
15630.00	24.67	15.58	40.25	54.00	-13.75	Average



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 161 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax80_Band1	Temp./Humi.	: 24.4/59
Frequency	: 5210 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

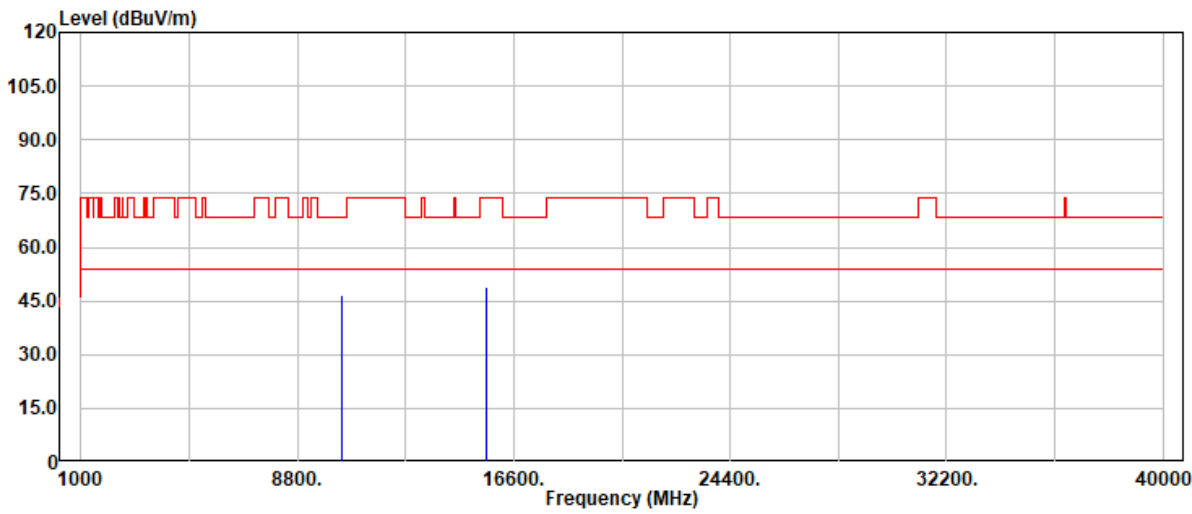

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	33.80	12.94	46.74	68.20	-21.46	Peak
15630.00	33.40	15.58	48.98	74.00	-25.02	Peak
15630.00	24.75	15.58	40.33	54.00	-13.67	Average




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 162 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11n20_Band4
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : H
Setting :

Test Date : 2025-02-08
Temp./Humi. : 24.3/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

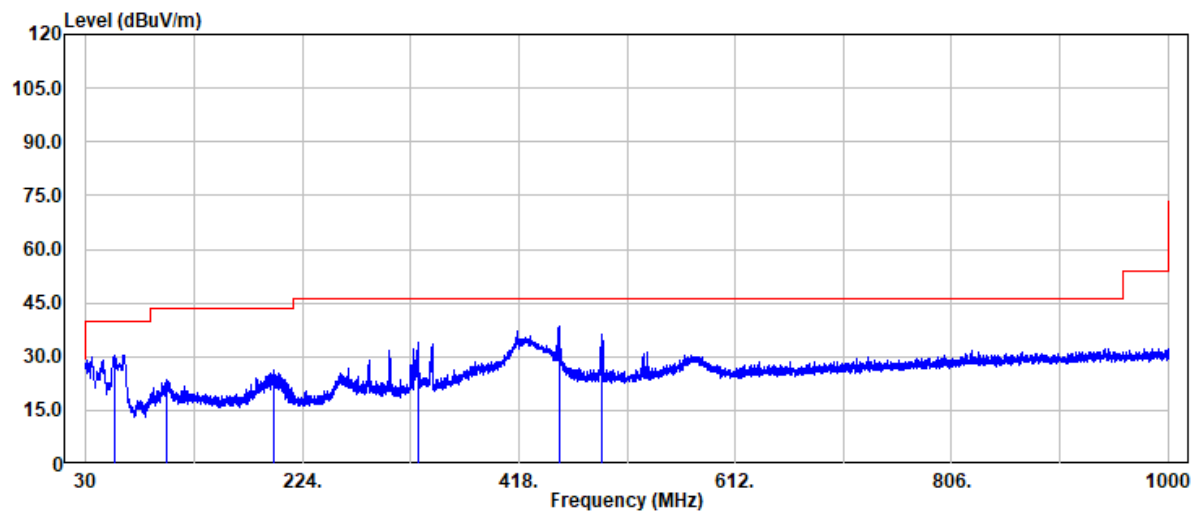

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
56.07	46.84	-16.47	30.37	40.00	-9.63	Peak
101.78	36.57	-12.99	23.58	43.50	-19.92	Peak
197.93	36.71	-10.57	26.14	43.50	-17.36	Peak
327.31	42.95	-8.80	34.15	46.00	-11.85	Peak
454.62	43.60	-5.30	38.30	46.00	-7.70	Peak
492.45	40.55	-4.44	36.11	46.00	-9.89	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 163 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11n20_Band4
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : H
Setting :

Test Date : 2025-02-08
Temp./Humi. : 24.3/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

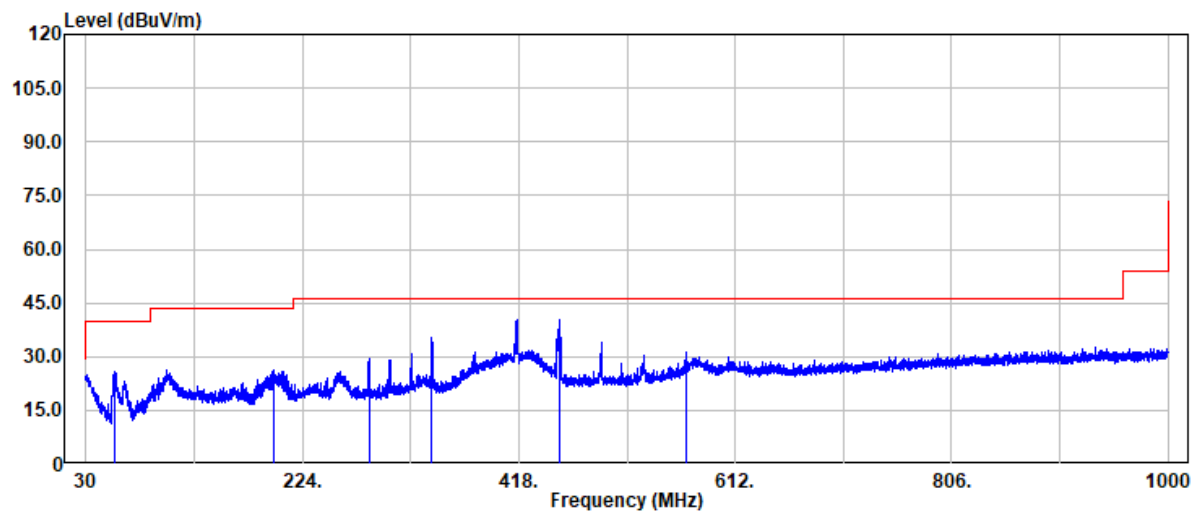


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
55.83	42.10	-16.50	25.60	40.00	-14.40	Peak
198.78	36.69	-10.39	26.30	43.50	-17.20	Peak
283.78	39.11	-9.56	29.55	46.00	-16.45	Peak
339.43	44.08	-8.68	35.40	46.00	-10.60	Peak
454.38	45.64	-5.31	40.33	46.00	-5.67	Peak
568.47	34.41	-3.24	31.17	46.00	-14.83	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 164 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11a_Band4_CH0	Temp./Humi.	: 24.4/59
Frequency	: 5745 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 28		

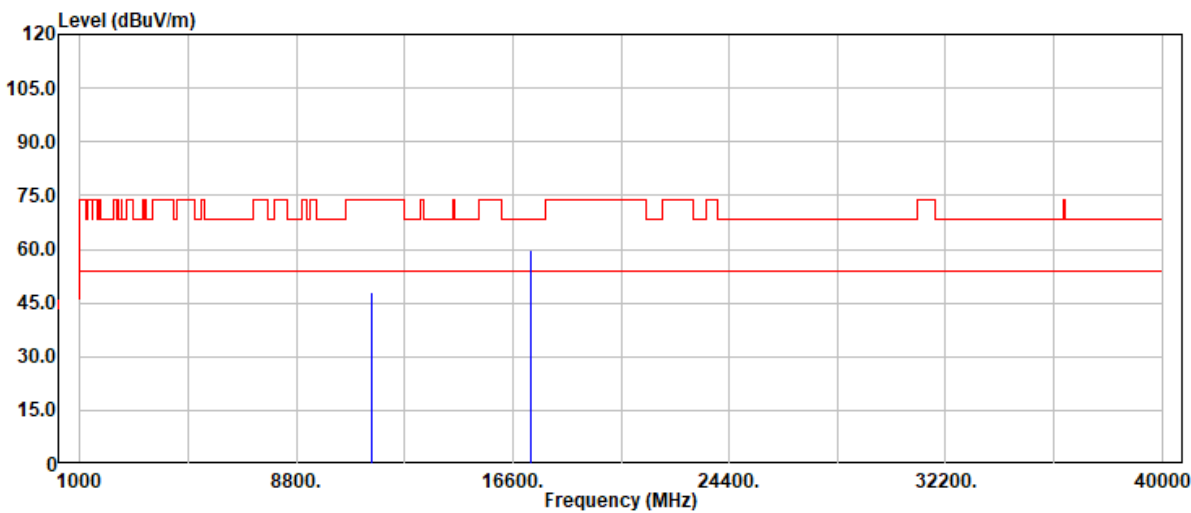


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	35.13	12.94	48.07	74.00	-25.93	Peak
11490.00	25.08	12.94	38.02	54.00	-15.98	Average
17235.00	33.35	26.41	59.76	68.20	-8.44	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 165 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11a_Band4_CH0	Temp./Humi.	: 24.4/59
Frequency	: 5745 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 28		

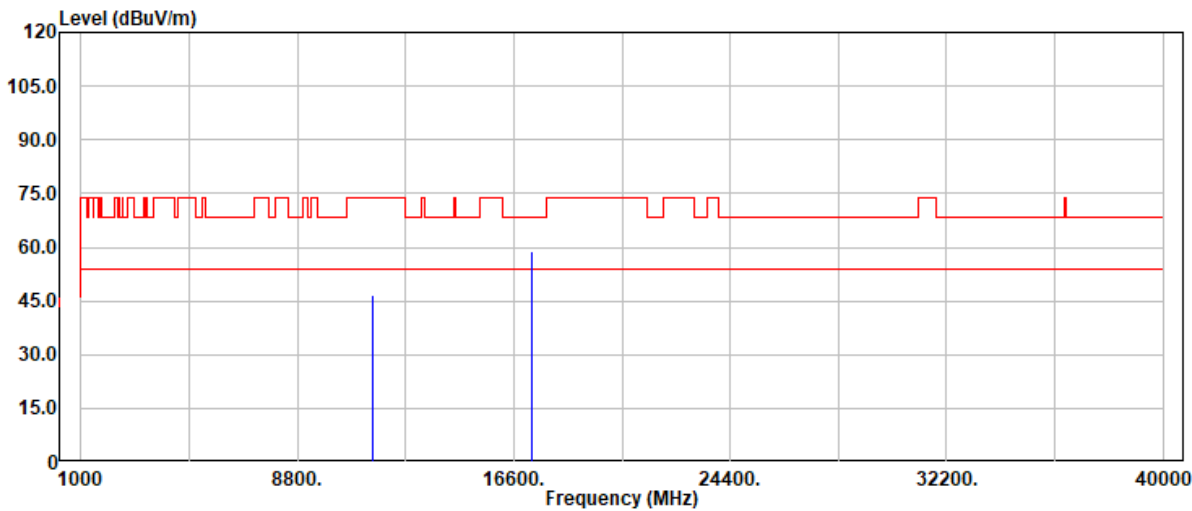


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	33.51	12.94	46.45	74.00	-27.55	Peak
11490.00	25.41	12.94	38.35	54.00	-15.65	Average
17235.00	32.49	26.41	58.90	68.20	-9.30	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 166 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11a_Band4_CH0	Temp./Humi.	: 24.4/59
Frequency	: 5785 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 28		

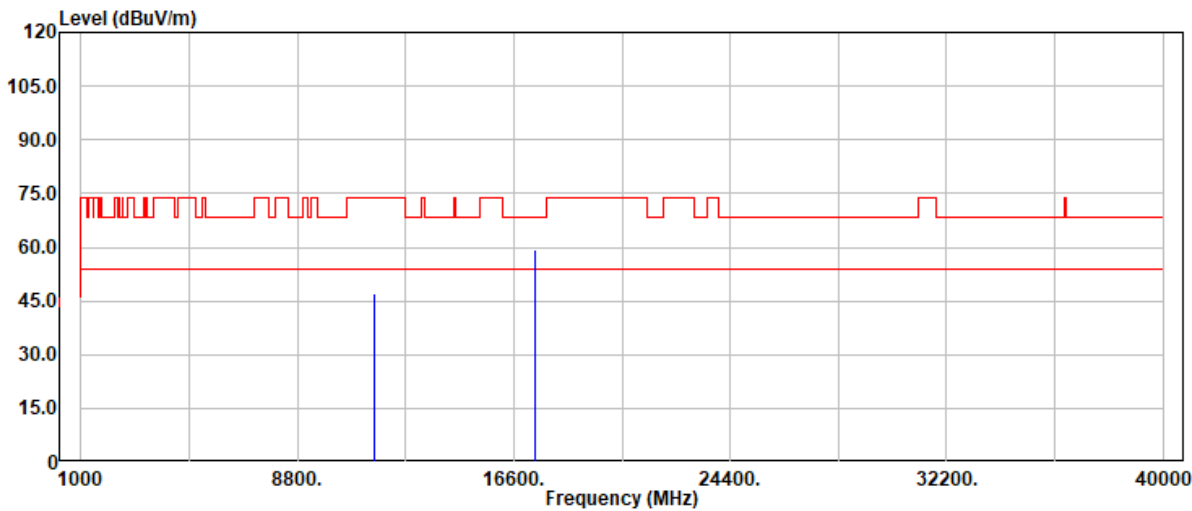


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	34.28	12.97	47.25	74.00	-26.75	Peak
11570.00	26.42	12.97	39.39	54.00	-14.61	Average
17355.00	33.05	26.34	59.39	68.20	-8.81	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 167 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11a_Band4_CH0	Temp./Humi.	: 24.4/59
Frequency	: 5785 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 28		

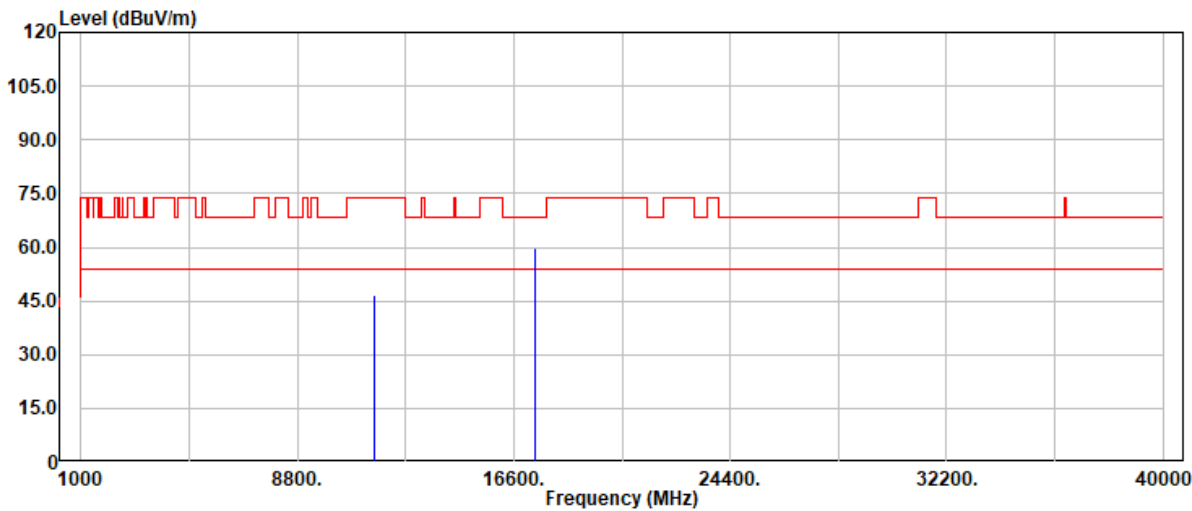

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	33.49	12.97	46.46	74.00	-27.54	Peak
11570.00	25.13	12.97	38.10	54.00	-15.90	Average
17355.00	33.25	26.34	59.59	68.20	-8.61	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 168 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11a_Band4_CH0
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : H
Setting : 28

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

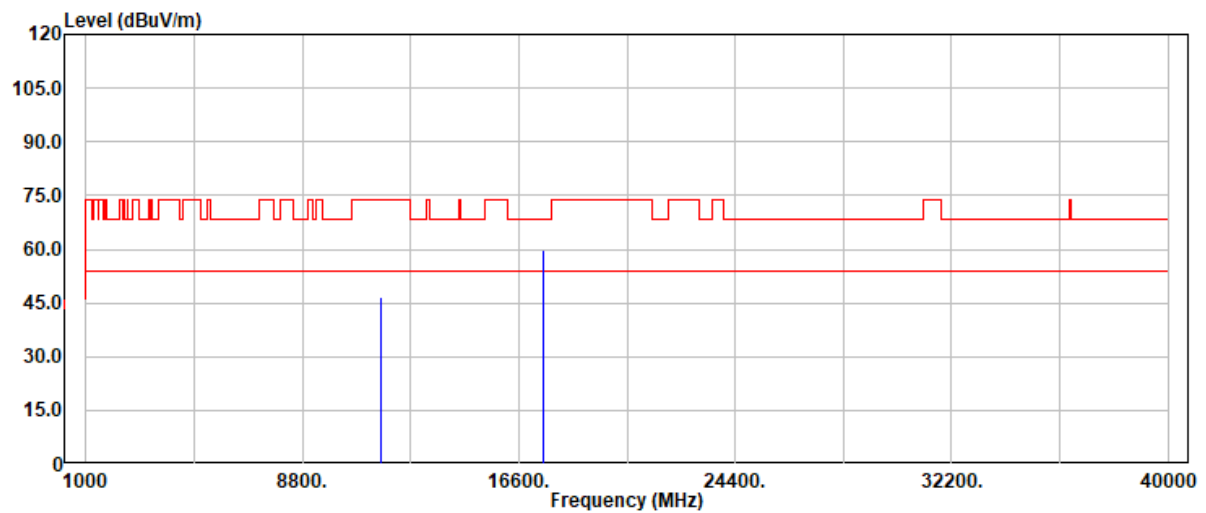


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	33.66	13.09	46.75	74.00	-27.25	Peak
11650.00	25.04	13.09	38.13	54.00	-15.87	Average
17475.00	33.71	25.89	59.60	68.20	-8.60	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 169 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11a_Band4_CH0	Temp./Humi.	: 24.4/59
Frequency	: 5825 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 28		

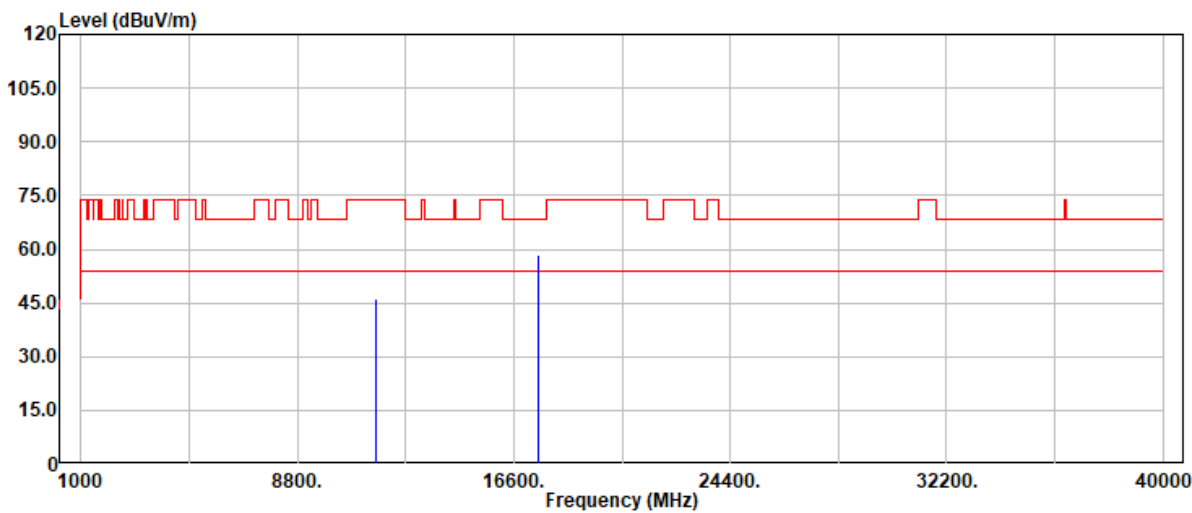

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	33.12	13.09	46.21	74.00	-27.79	Peak
11650.00	25.17	13.09	38.26	54.00	-15.74	Average
17475.00	32.69	25.89	58.58	68.20	-9.62	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 170 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11n20_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : H
Setting : 25

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

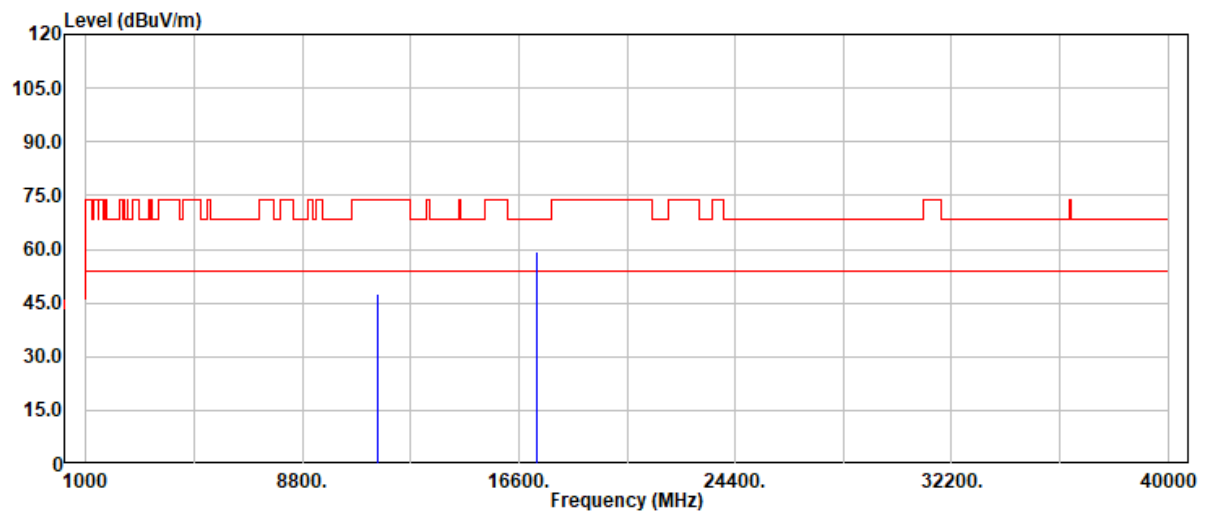

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	34.58	12.94	47.52	74.00	-26.48	Peak
11490.00	25.03	12.94	37.97	54.00	-16.03	Average
17235.00	33.04	26.41	59.45	68.20	-8.75	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 171 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11n20_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : H
Setting : 25

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

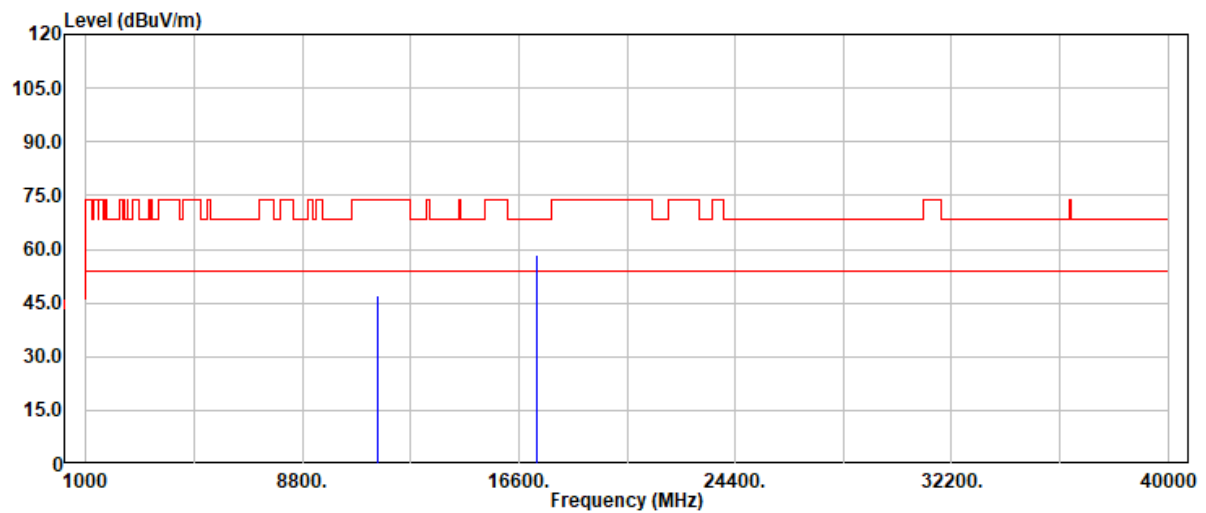

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	34.09	12.94	47.03	74.00	-26.97	Peak
11490.00	25.18	12.94	38.12	54.00	-15.88	Average
17235.00	31.83	26.41	58.24	68.20	-9.96	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 172 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11n20_Band4
Frequency : 5785 MHz
Operation Mode : TX
EUT Pol : H
Setting : 25

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

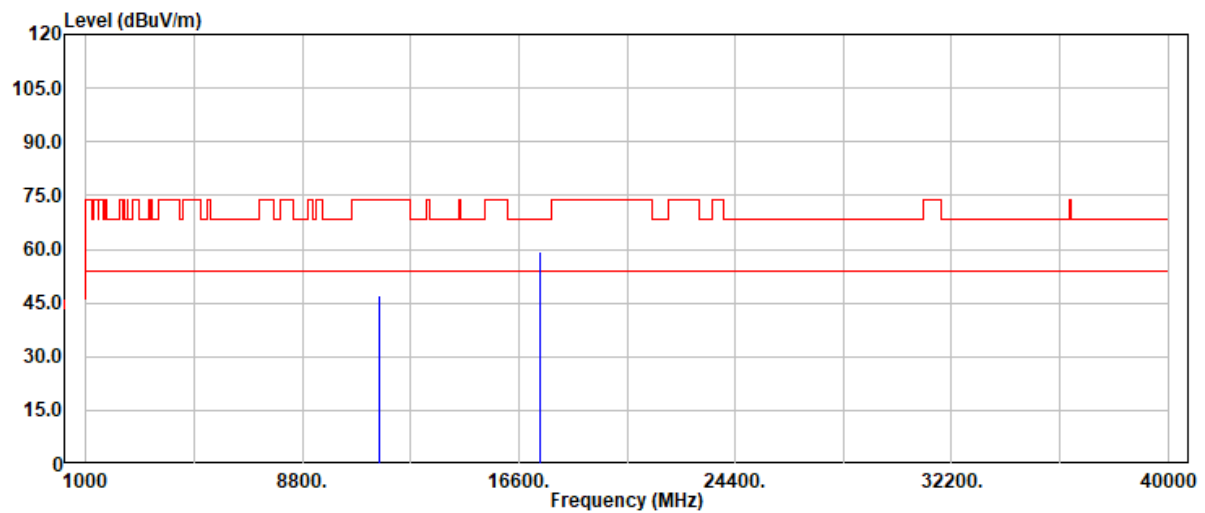


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	34.23	12.97	47.20	74.00	-26.80	Peak
11570.00	25.28	12.97	38.25	54.00	-15.75	Average
17355.00	33.04	26.34	59.38	68.20	-8.82	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 173 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n20_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5785 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

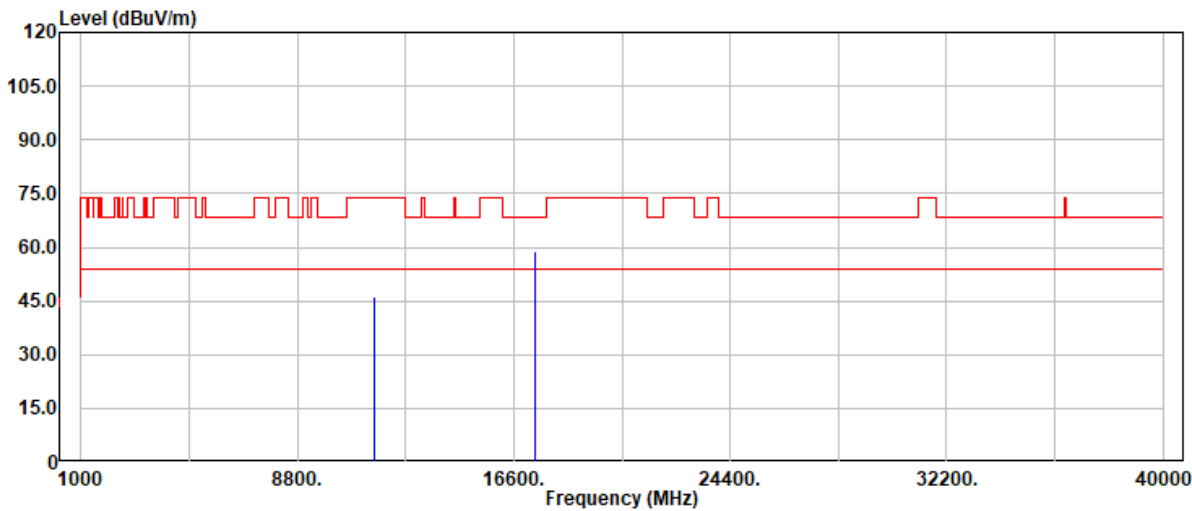


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	33.19	12.97	46.16	74.00	-27.84	Peak
11570.00	24.99	12.97	37.96	54.00	-16.04	Average
17355.00	32.56	26.34	58.90	68.20	-9.30	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 174 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n20_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5825 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

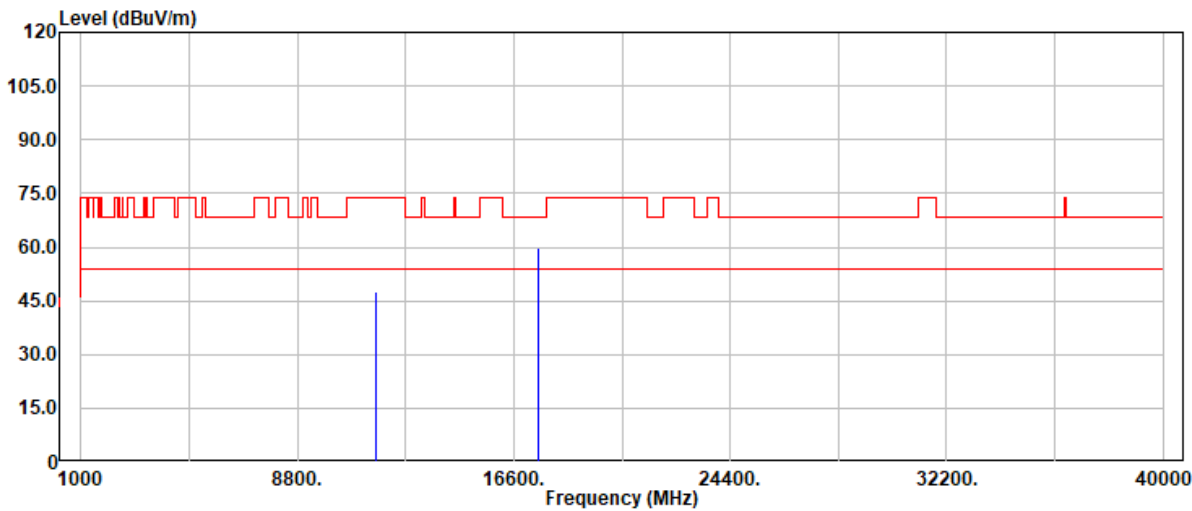


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	34.47	13.09	47.56	74.00	-26.44	Peak
11650.00	26.36	13.09	39.45	54.00	-14.55	Average
17475.00	34.02	25.89	59.91	68.20	-8.29	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 175 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n20_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5825 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

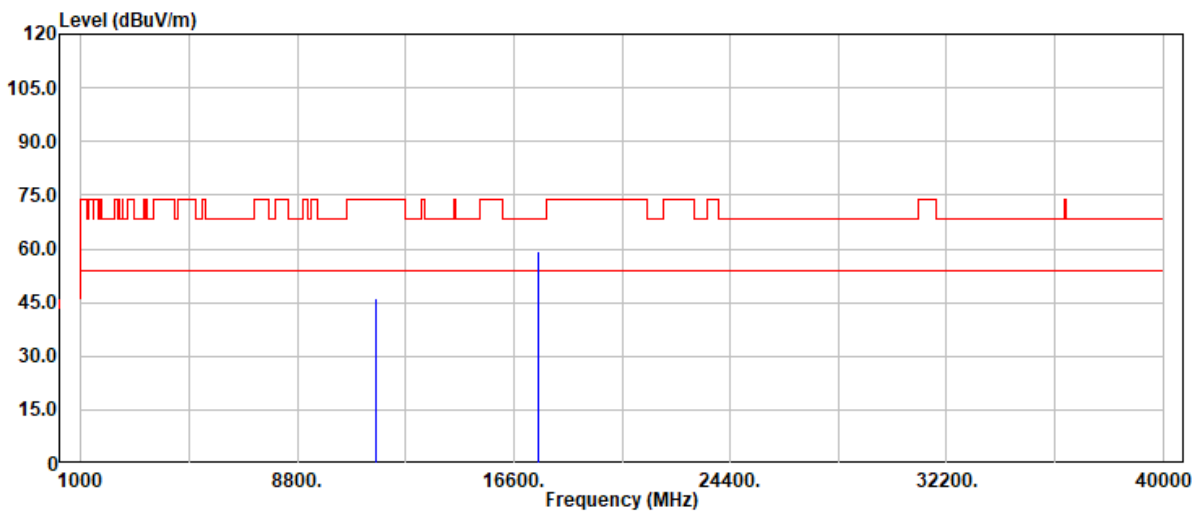

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	32.96	13.09	46.05	74.00	-27.95	Peak
11650.00	25.04	13.09	38.13	54.00	-15.87	Average
17475.00	33.27	25.89	59.16	68.20	-9.04	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 176 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11n40_Band4
Frequency : 5755 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

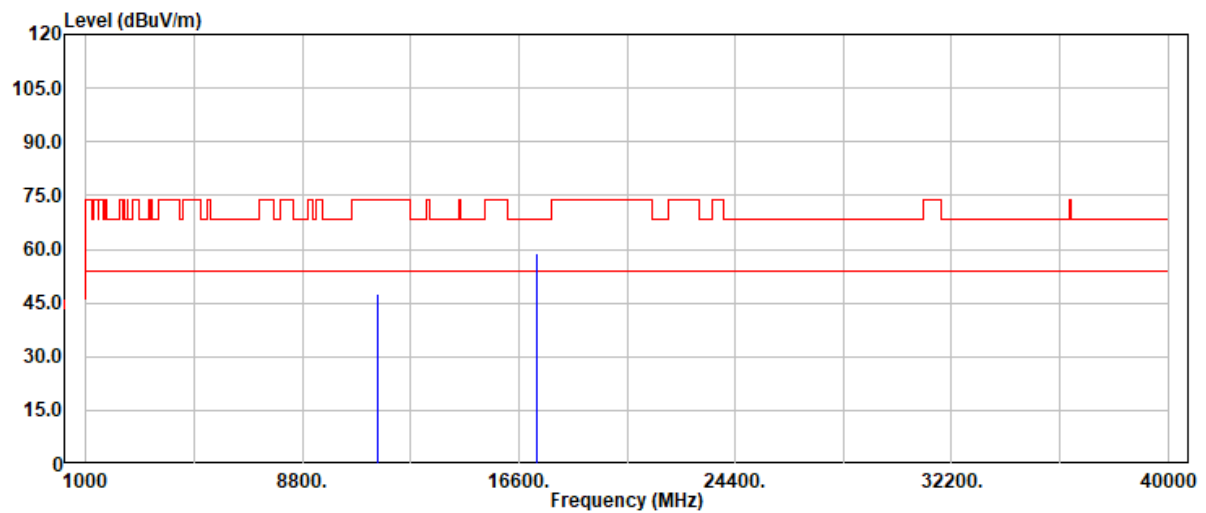


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11510.00	34.89	12.88	47.77	74.00	-26.23	Peak
11510.00	25.00	12.88	37.88	54.00	-16.12	Average
17265.00	32.37	26.52	58.89	68.20	-9.31	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 177 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n40_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5755 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

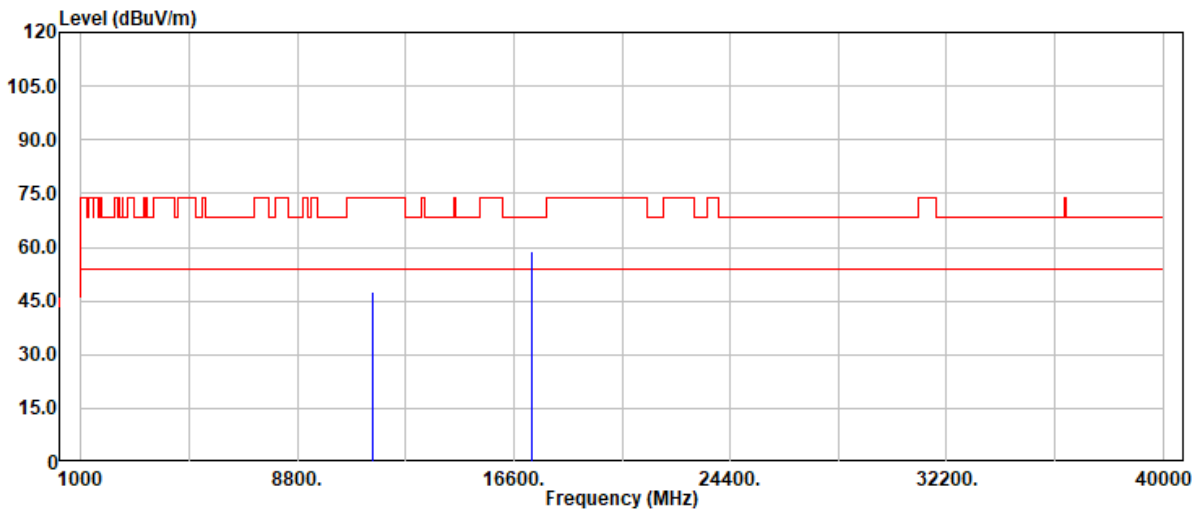


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11510.00	34.59	12.88	47.47	74.00	-26.53	Peak
11510.00	24.02	12.88	36.90	54.00	-17.10	Average
17265.00	32.29	26.52	58.81	68.20	-9.39	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 178 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n40_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5795 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 23		

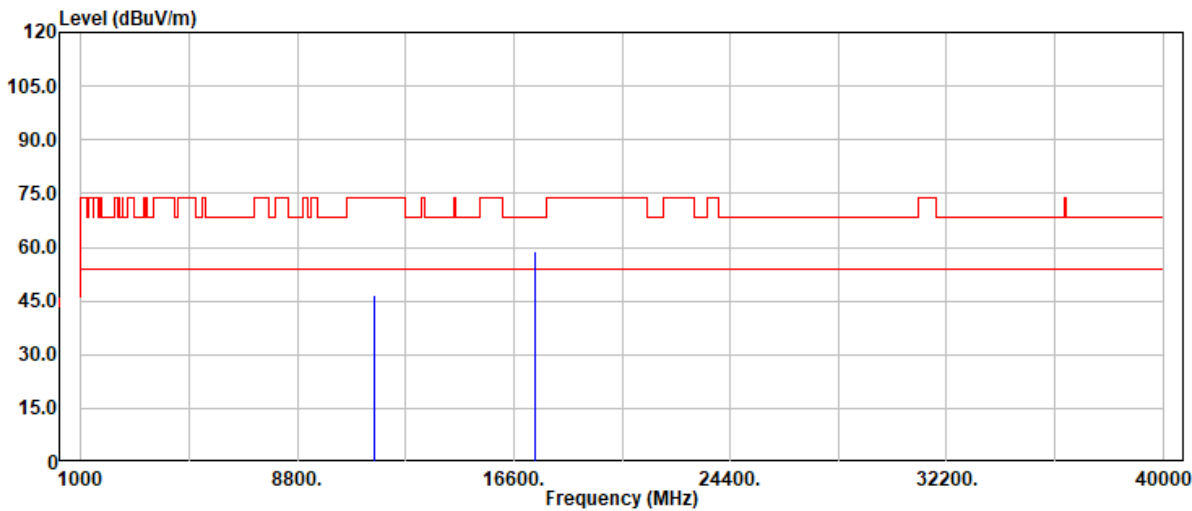


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11590.00	33.87	12.98	46.85	74.00	-27.15	Peak
11590.00	25.14	12.98	38.12	54.00	-15.88	Average
17385.00	32.45	26.29	58.74	68.20	-9.46	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 179 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11n40_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5795 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 23		

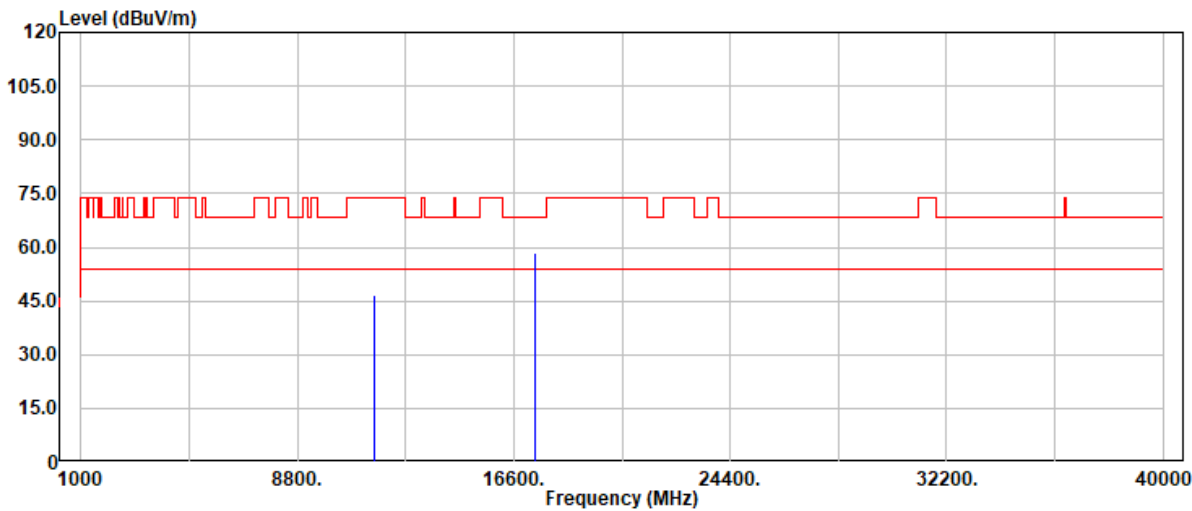


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11590.00	33.55	12.98	46.53	74.00	-27.47	Peak
11590.00	24.97	12.98	37.95	54.00	-16.05	Average
17385.00	32.19	26.29	58.48	68.20	-9.72	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 180 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ac80_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5775 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 21		

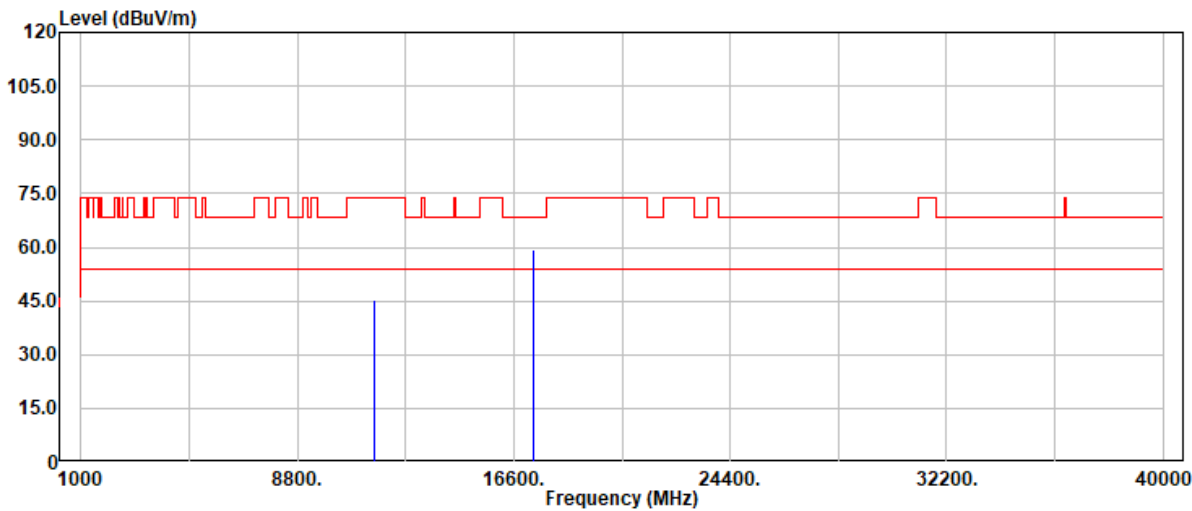


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11550.00	32.51	12.96	45.47	74.00	-28.53	Peak
11550.00	24.91	12.96	37.87	54.00	-16.13	Average
17325.00	32.71	26.49	59.20	68.20	-9.00	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 181 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ac80_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5775 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 21		

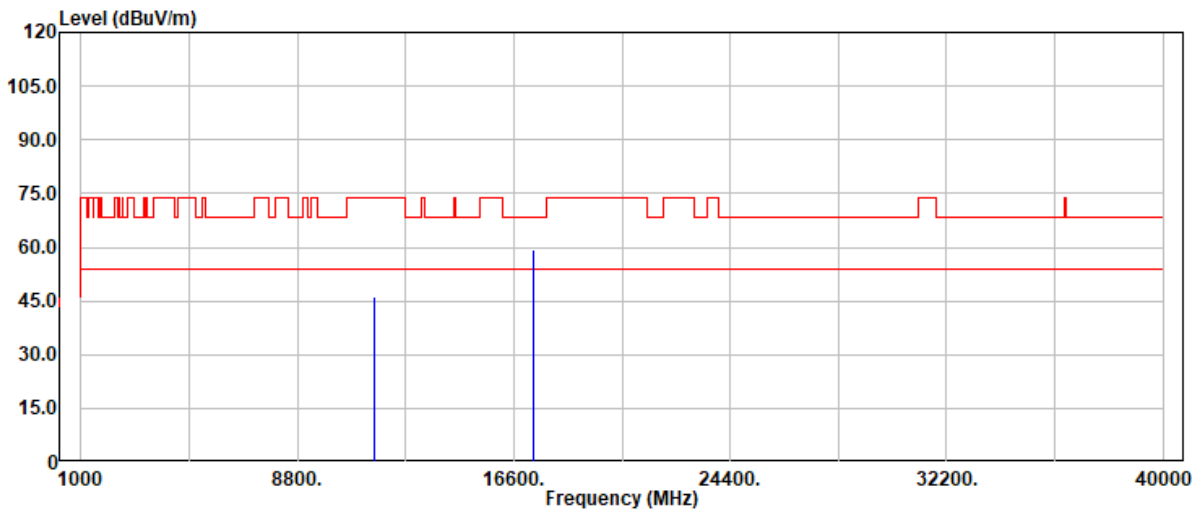

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11550.00	33.21	12.96	46.17	74.00	-27.83	Peak
11550.00	25.11	12.96	38.07	54.00	-15.93	Average
17325.00	32.60	26.49	59.09	68.20	-9.11	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 182 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax20_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : H
Setting : 25

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

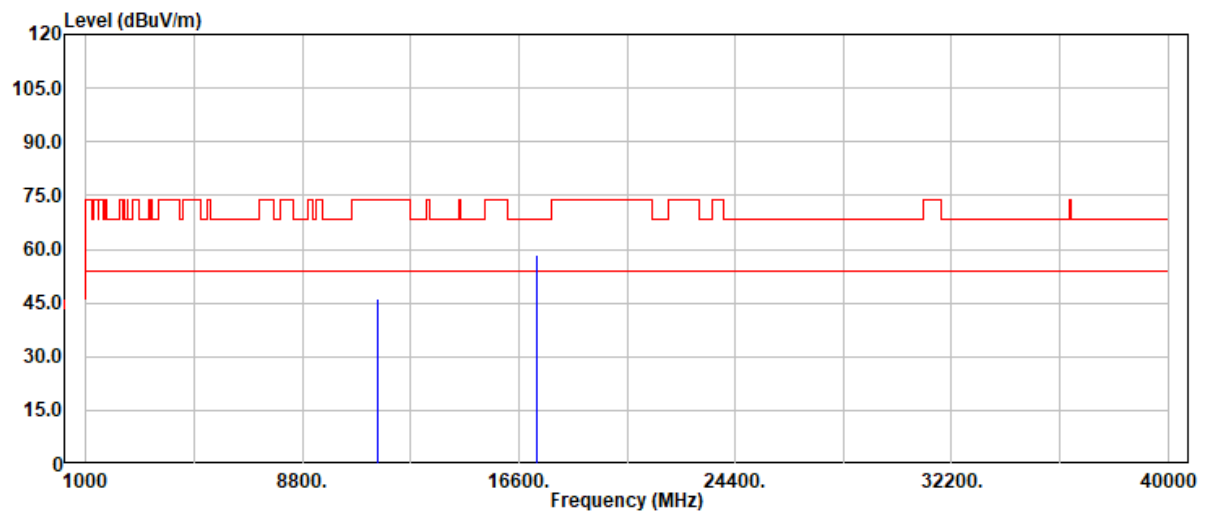


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	33.47	12.94	46.41	74.00	-27.59	Peak
11490.00	25.04	12.94	37.98	54.00	-16.02	Average
17235.00	32.06	26.41	58.47	68.20	-9.73	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 183 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax20_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5745 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

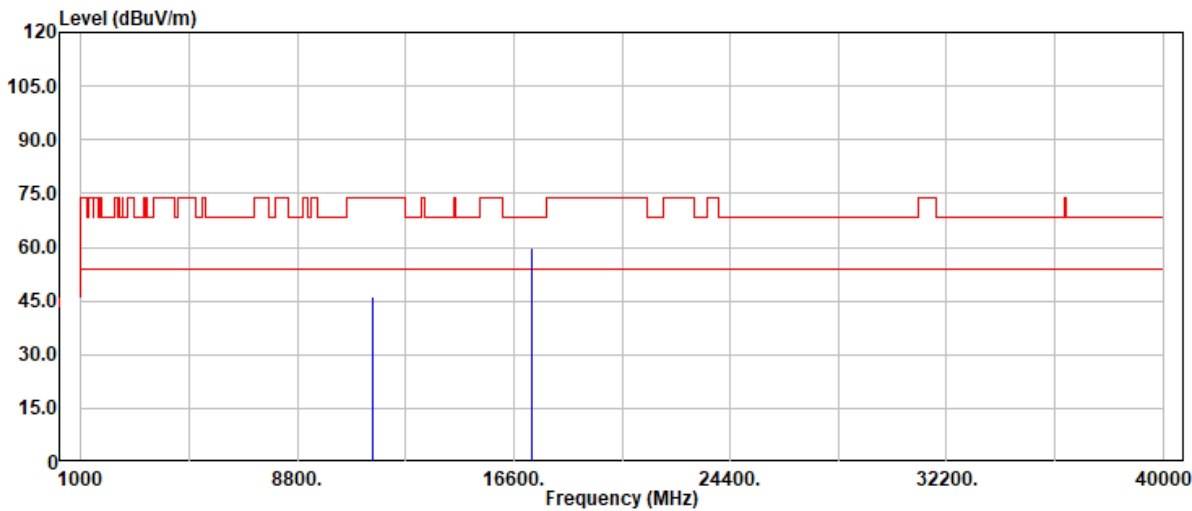


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	33.26	12.94	46.20	74.00	-27.80	Peak
11490.00	25.09	12.94	38.03	54.00	-15.97	Average
17235.00	33.14	26.41	59.55	68.20	-8.65	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 184 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax20_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5785 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

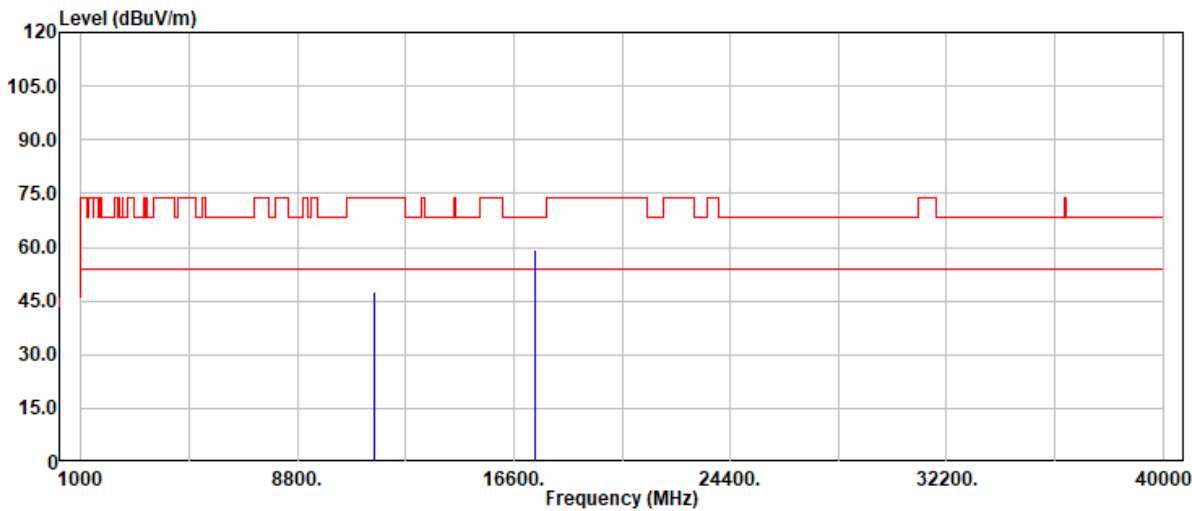


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	34.75	12.97	47.72	74.00	-26.28	Peak
11570.00	25.02	12.97	37.99	54.00	-16.01	Average
17355.00	32.96	26.34	59.30	68.20	-8.90	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 185 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax20_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5785 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

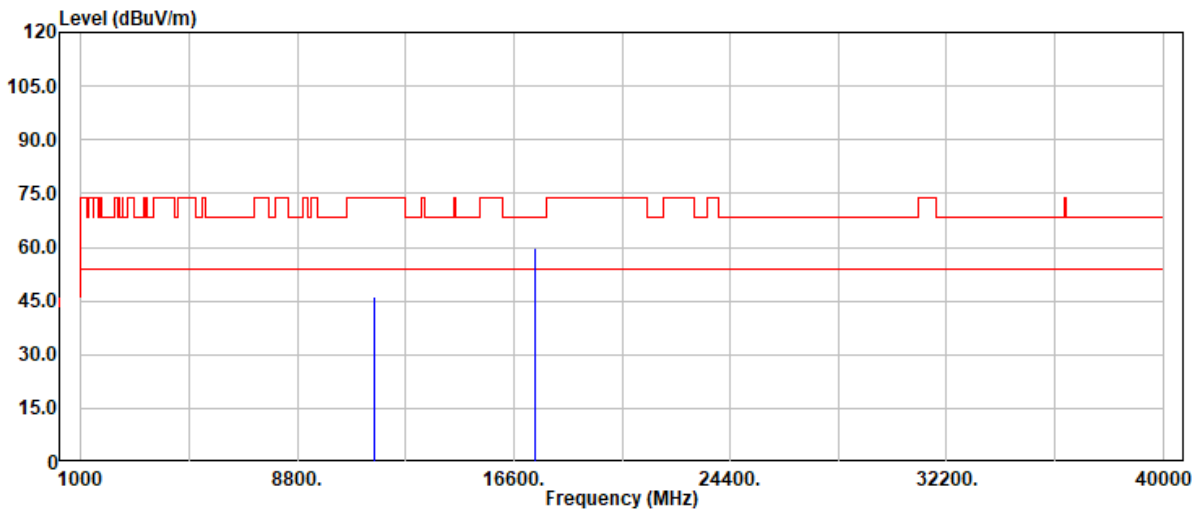


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	33.26	12.97	46.23	74.00	-27.77	Peak
11570.00	24.97	12.97	37.94	54.00	-16.06	Average
17355.00	33.27	26.34	59.61	68.20	-8.59	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 186 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax20_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5825 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

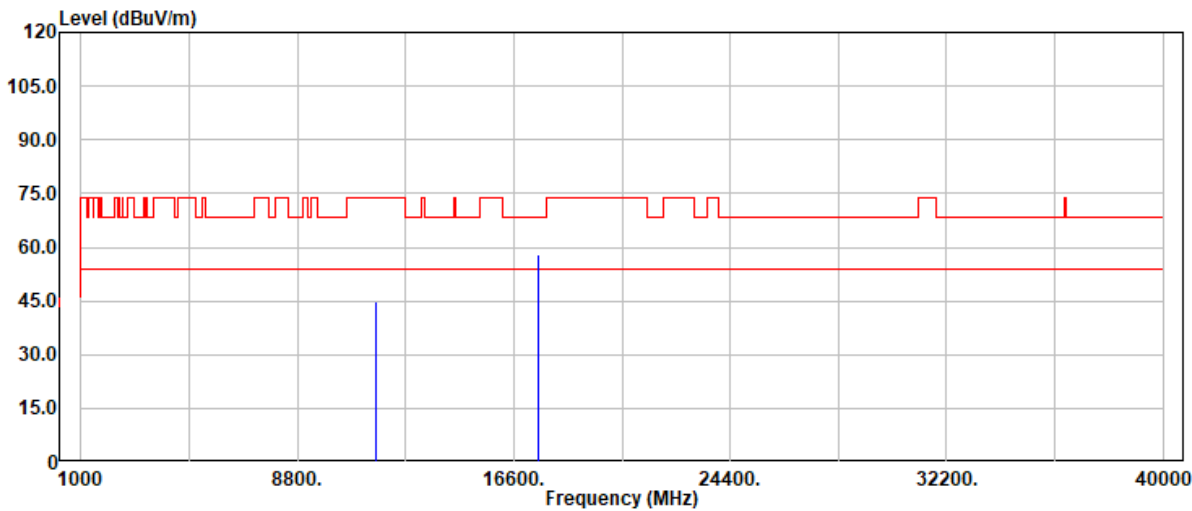


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	31.85	13.09	44.94	74.00	-29.06	Peak
11650.00	25.44	13.09	38.53	54.00	-15.47	Average
17475.00	31.90	25.89	57.79	68.20	-10.41	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 187 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax20_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5825 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

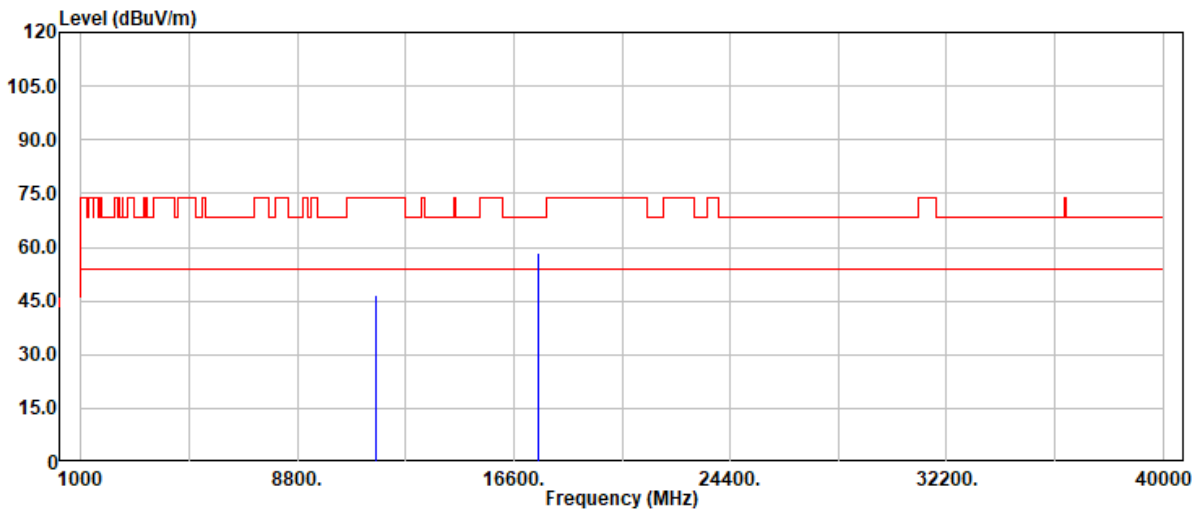


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	33.78	13.09	46.87	74.00	-27.13	Peak
11650.00	25.27	13.09	38.36	54.00	-15.64	Average
17475.00	32.74	25.89	58.63	68.20	-9.57	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 188 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax40_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5755 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

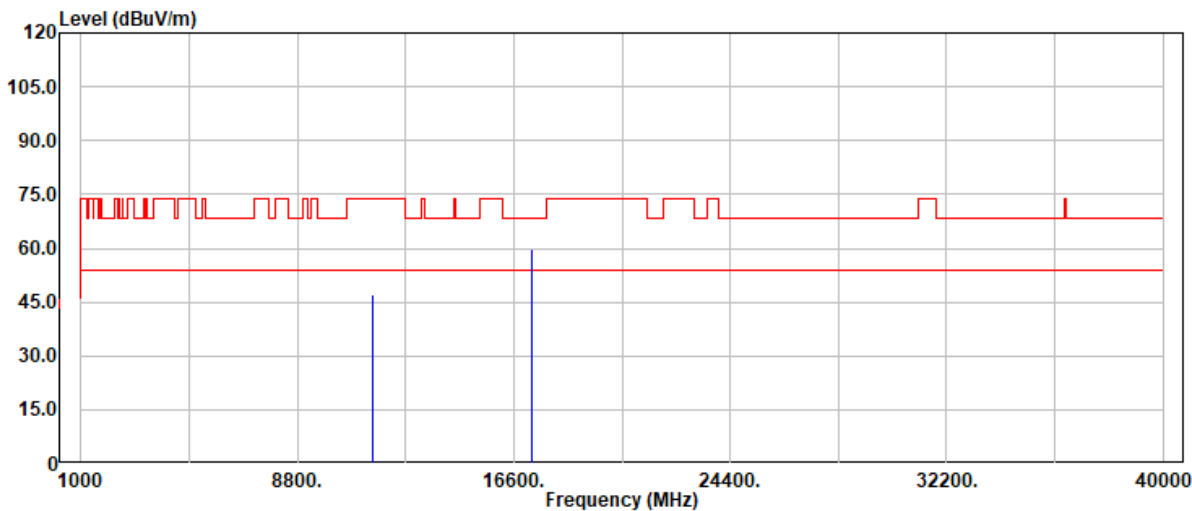


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11510.00	34.18	12.88	47.06	74.00	-26.94	Peak
11510.00	25.11	12.88	37.99	54.00	-16.01	Average
17265.00	33.03	26.52	59.55	68.20	-8.65	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 189 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax40_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5755 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

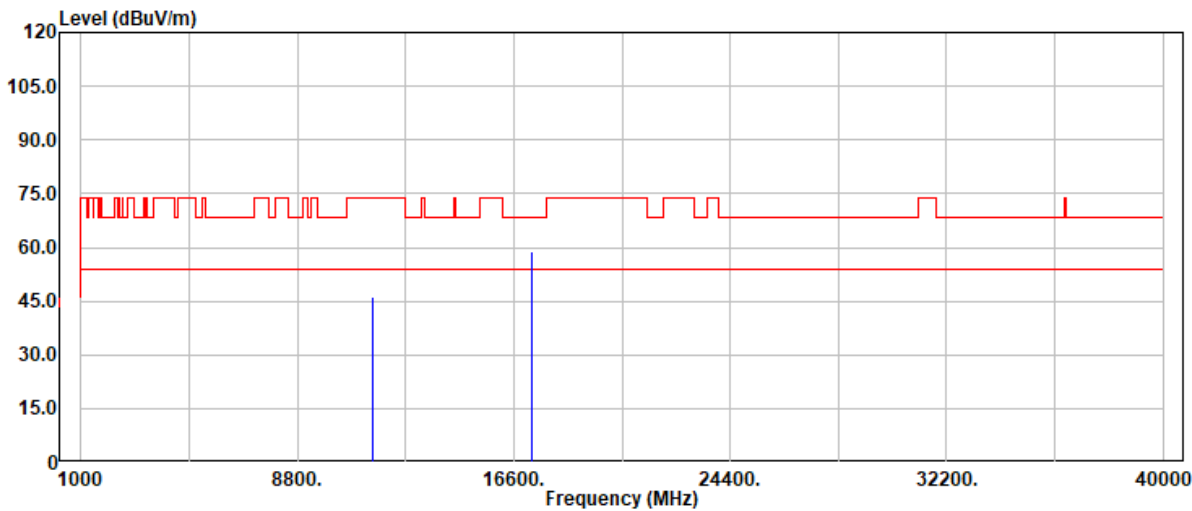

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11510.00	33.46	12.88	46.34	74.00	-27.66	Peak
11510.00	24.83	12.88	37.71	54.00	-16.29	Average
17265.00	32.14	26.52	58.66	68.20	-9.54	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 190 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax40_Band4
Frequency : 5795 MHz
Operation Mode : TX
EUT Pol : H
Setting : 23

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

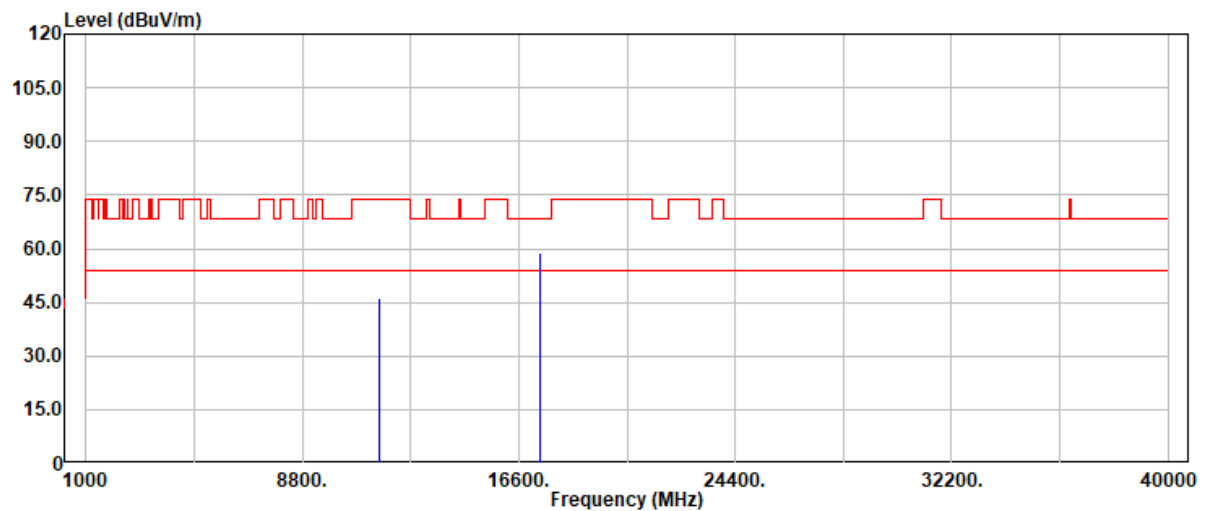


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11590.00	33.20	12.98	46.18	74.00	-27.82	Peak
11590.00	25.45	12.98	38.43	54.00	-15.57	Average
17385.00	32.39	26.29	58.68	68.20	-9.52	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 191 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax40_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5795 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 23		

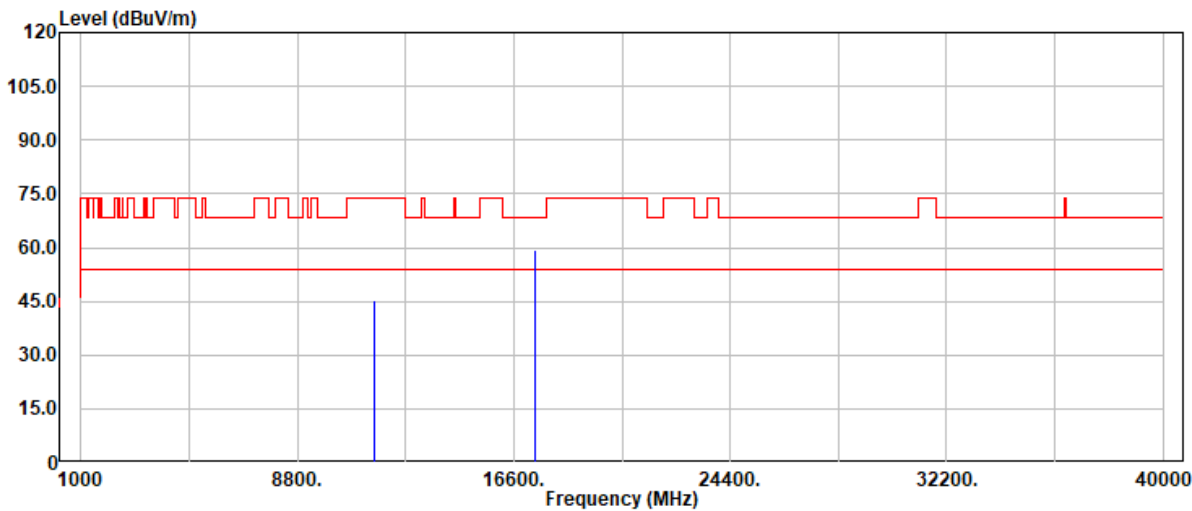

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11590.00	32.28	12.98	45.26	74.00	-28.74	Peak
11590.00	24.79	12.98	37.77	54.00	-16.23	Average
17385.00	32.83	26.29	59.12	68.20	-9.08	Peak




Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 192 / 193
Rev.: 02

Project No : TM-2412000476P
Operation Band : 802.11ax80_Band4
Frequency : 5775 MHz
Operation Mode : TX
EUT Pol : H
Setting : 21

Test Date : 2025-02-07
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

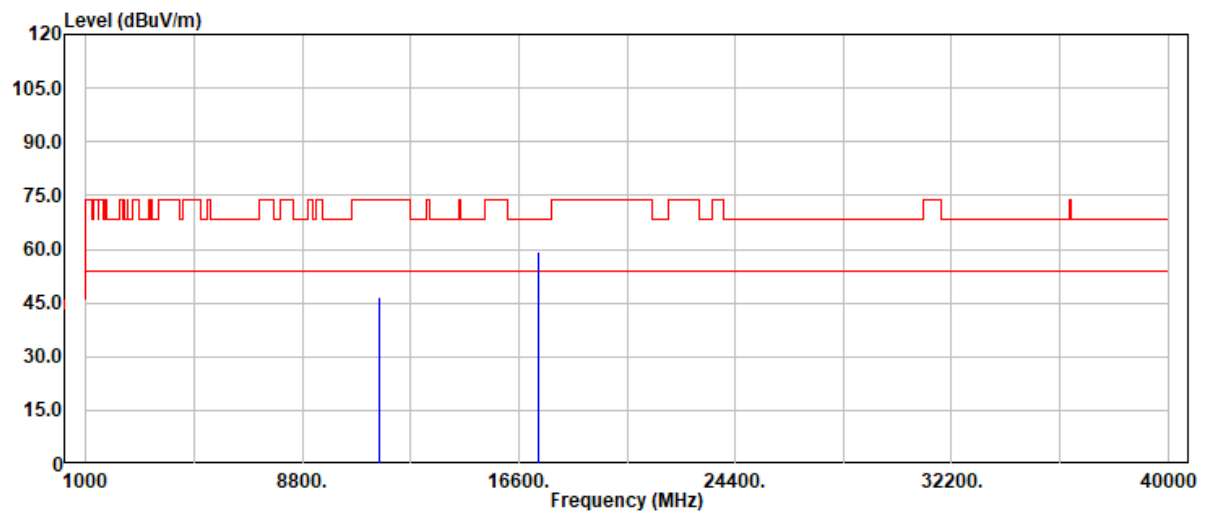


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11550.00	33.49	12.96	46.45	74.00	-27.55	Peak
11550.00	25.02	12.96	37.98	54.00	-16.02	Average
17325.00	33.03	26.49	59.52	68.20	-8.68	Peak



Project No: TM-2412000476P
Report No.: TMWK2412004834KR

Page: 193 / 193
Rev.: 02

Project No	: TM-2412000476P	Test Date	: 2025-02-07
Operation Band	: 802.11ax80_Band4	Temp./Humi.	: 24.4/59
Frequency	: 5775 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 21		

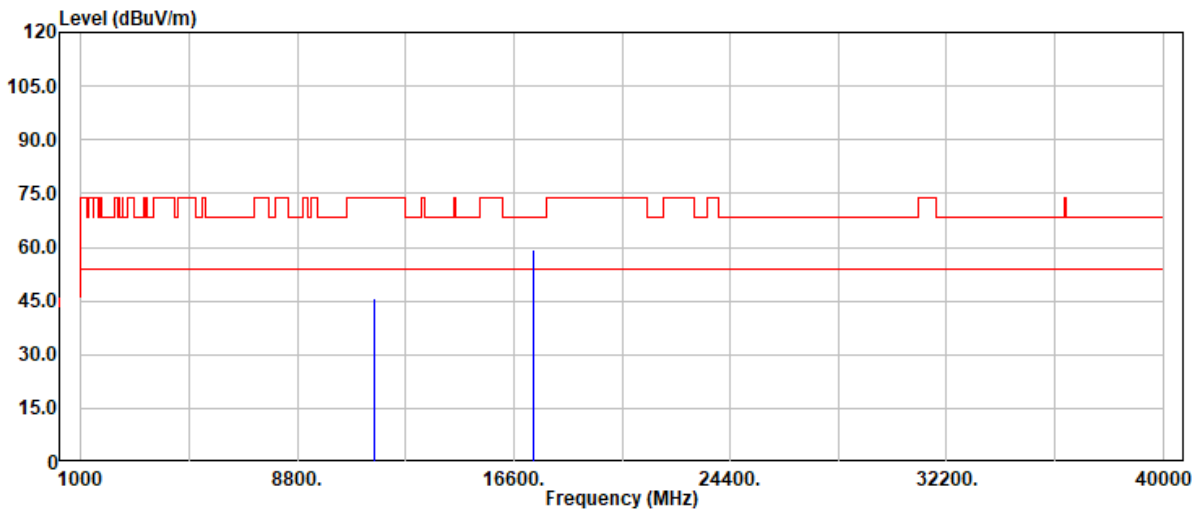

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11550.00	32.87	12.96	45.83	74.00	-28.17	Peak
11550.00	25.13	12.96	38.09	54.00	-15.91	Average
17325.00	32.99	26.49	59.48	68.20	-8.72	Peak

--End of Test Report--