










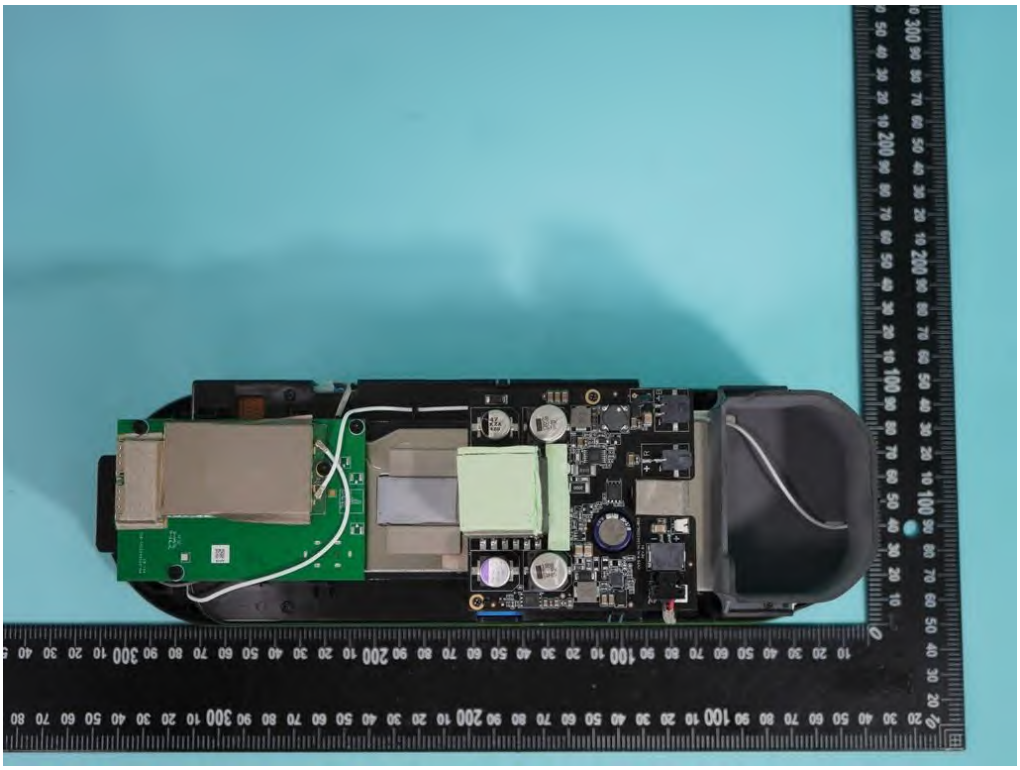


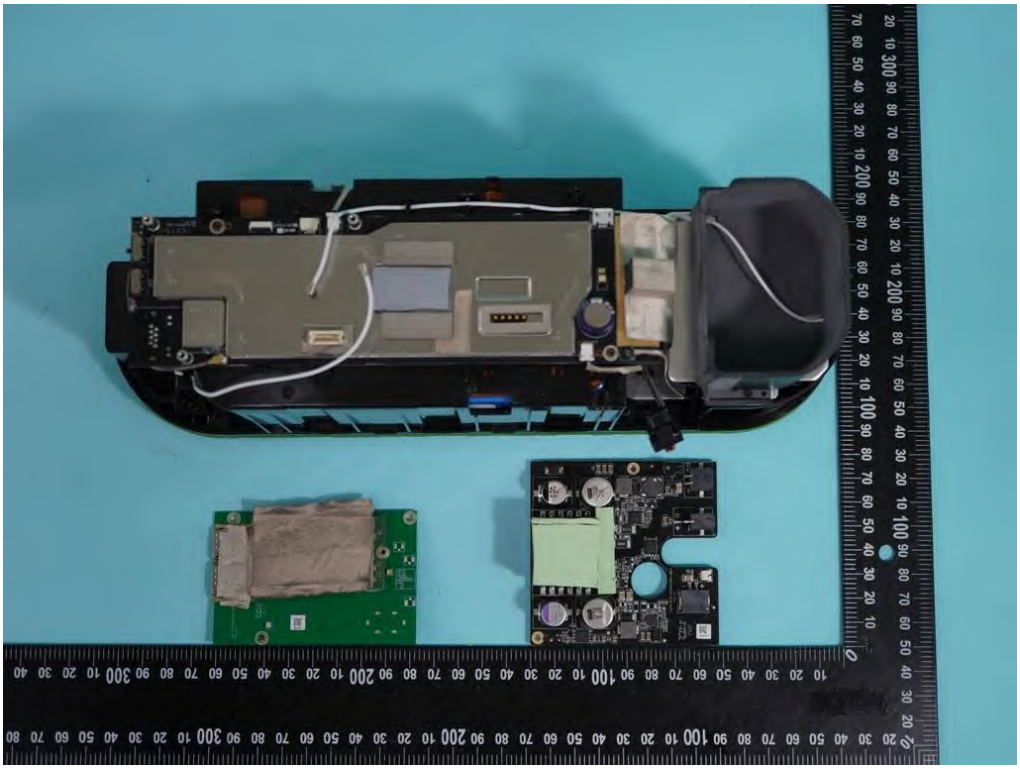


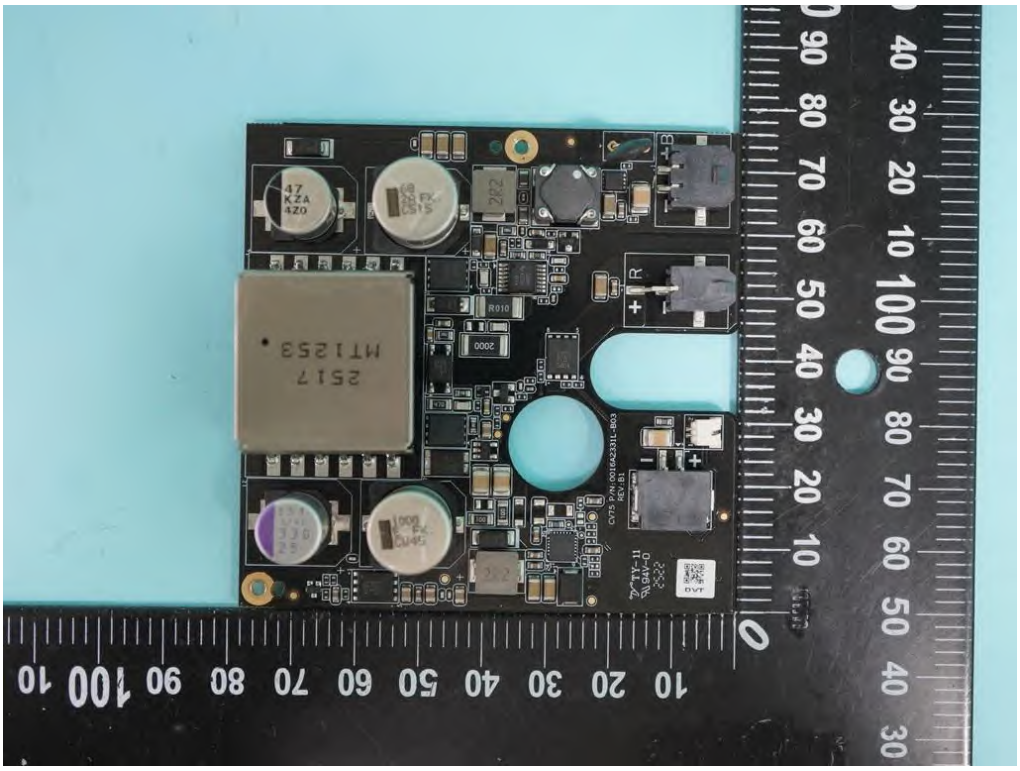

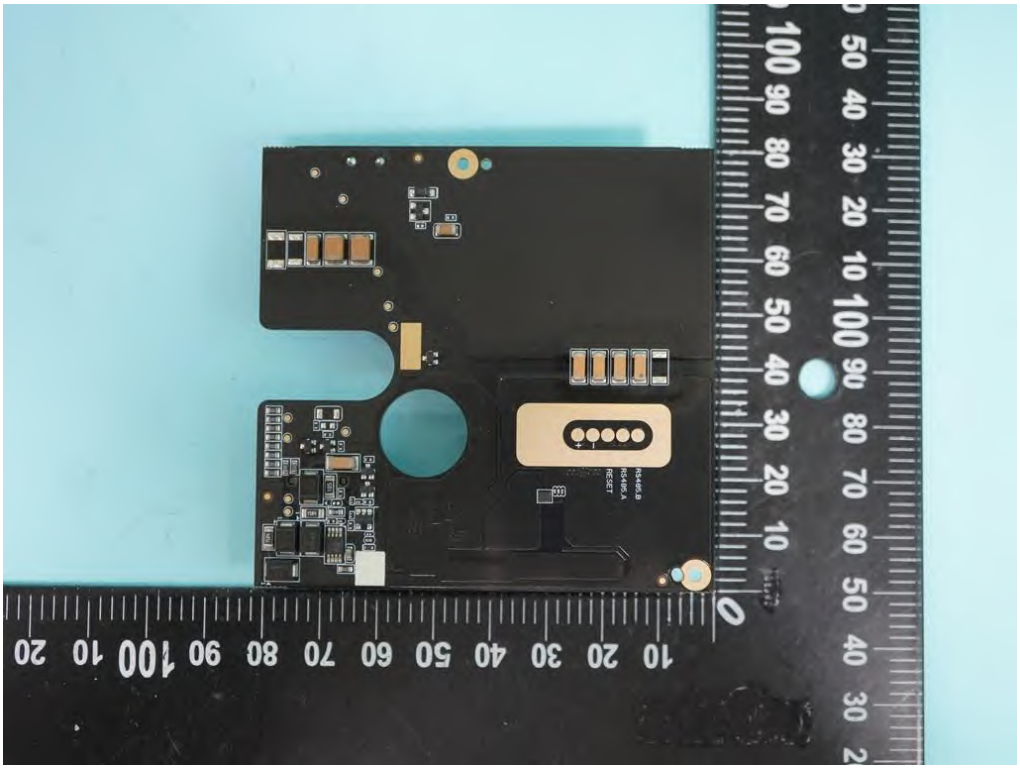


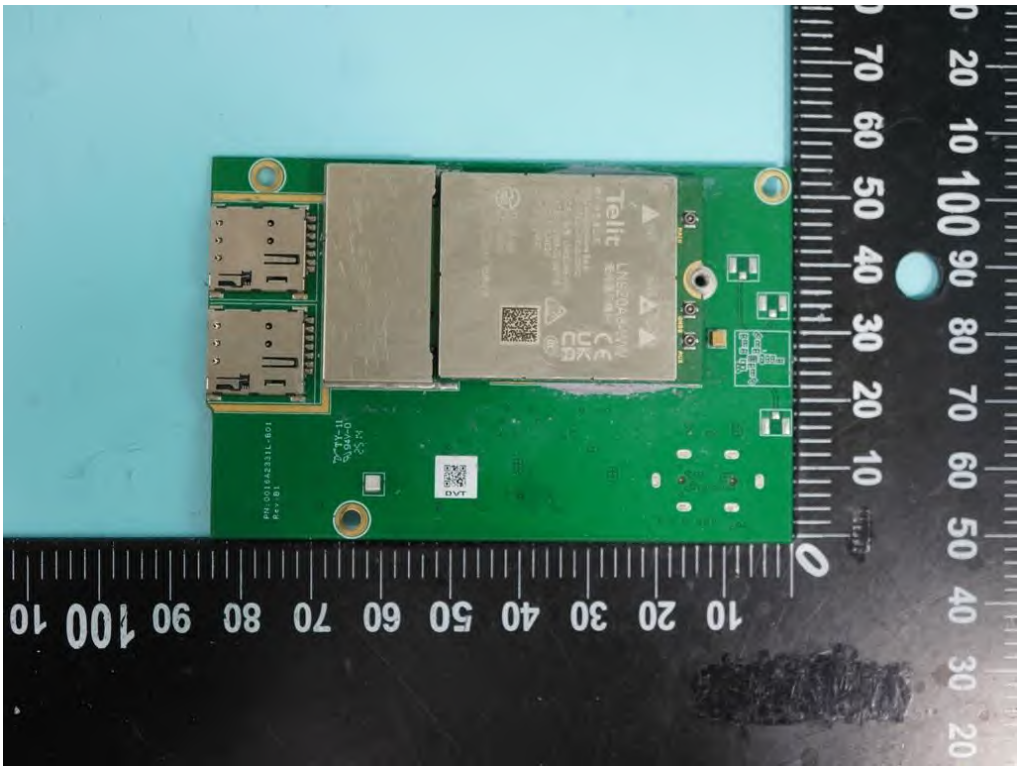


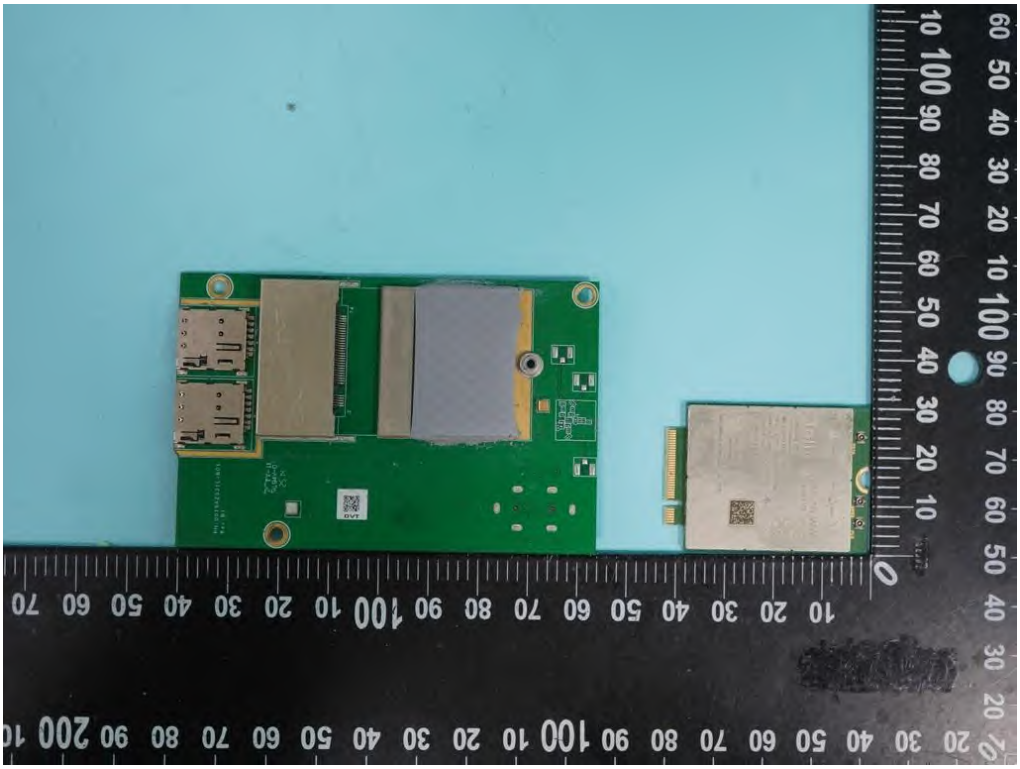


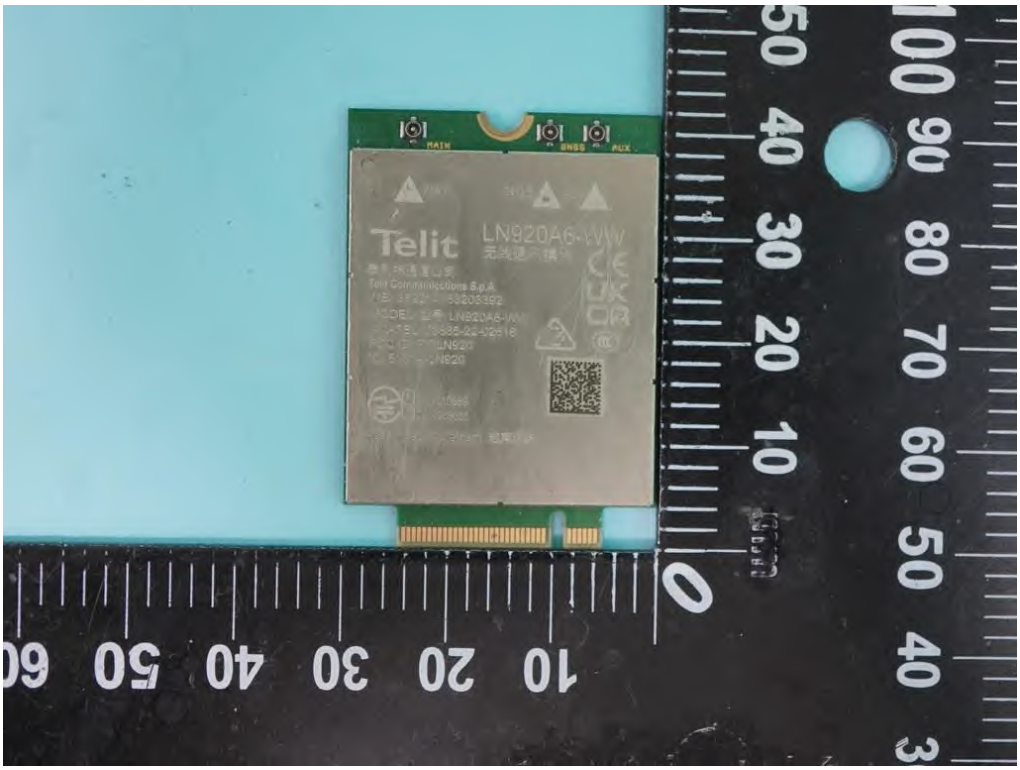

Telit
LN920A6-WW



MAIN
GNSS
AUX
Main
GNSS
AUX
Telit
LN920A6-WW
无线通讯模块
泰利特通信公司
Telit Communications S.p.A.
IMEI: 352214163203392
MODEL 型号: LN920A6-WW
ANATEL: 08885-22-02618
FCC ID: RI7LN920
IC: 5131A-LN920

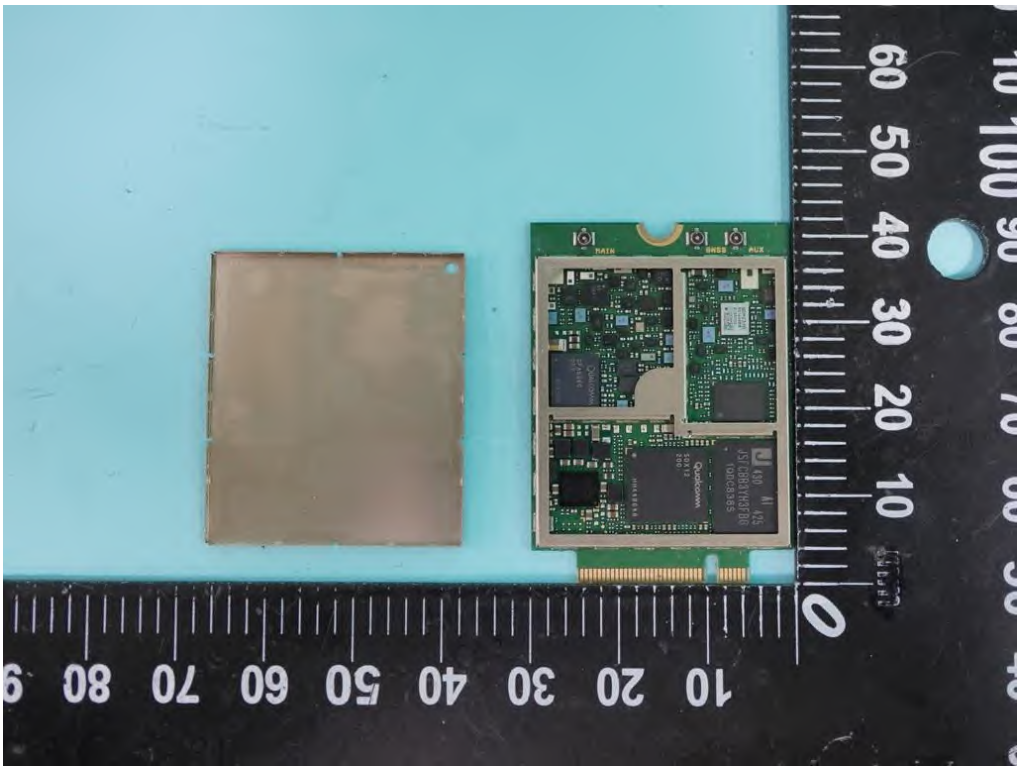


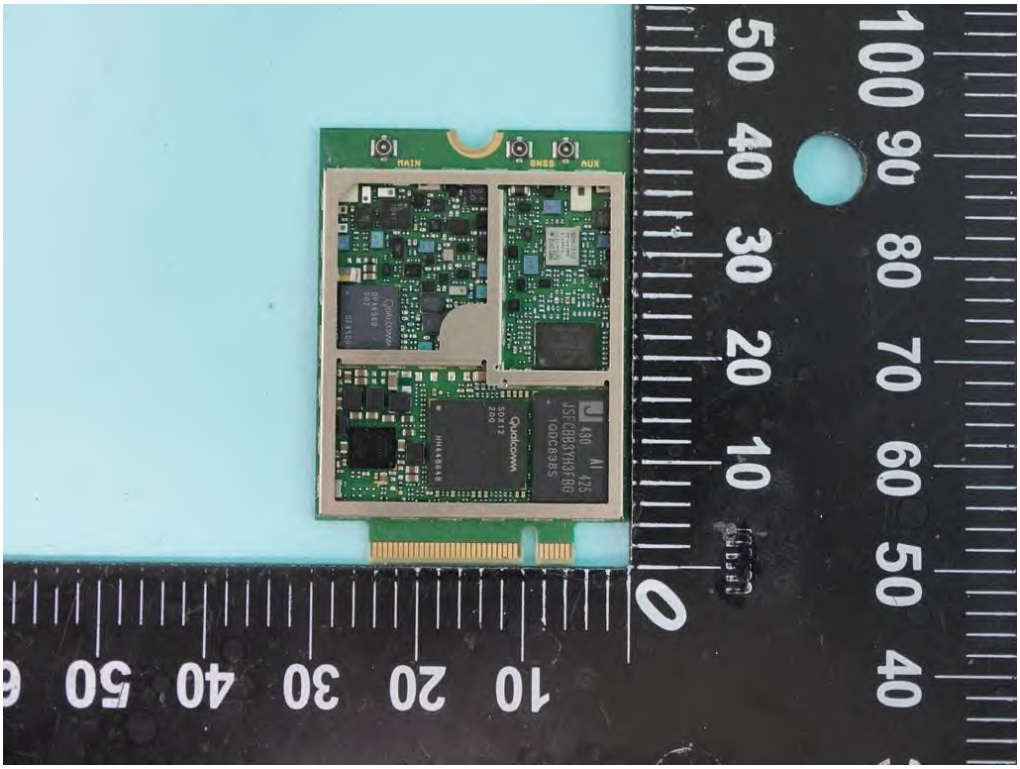

MAIN
GNSS
AUX
Qualcomm
SDX12
200
JSFCBB3YH3FBG
1QDC838S

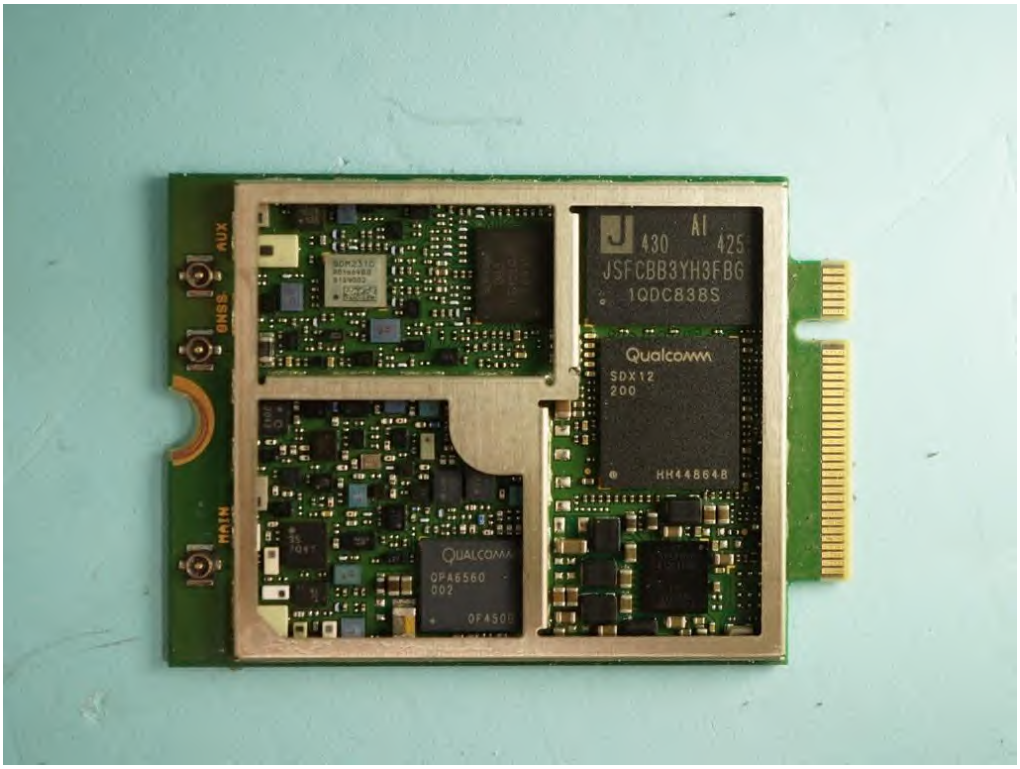

AUX
GNSS
MAIN
Qualcomm
SDX12
200
JSFCBB3YH3FBG
1QDC838S
HH448648
QUALCOMM
QPA6560
002

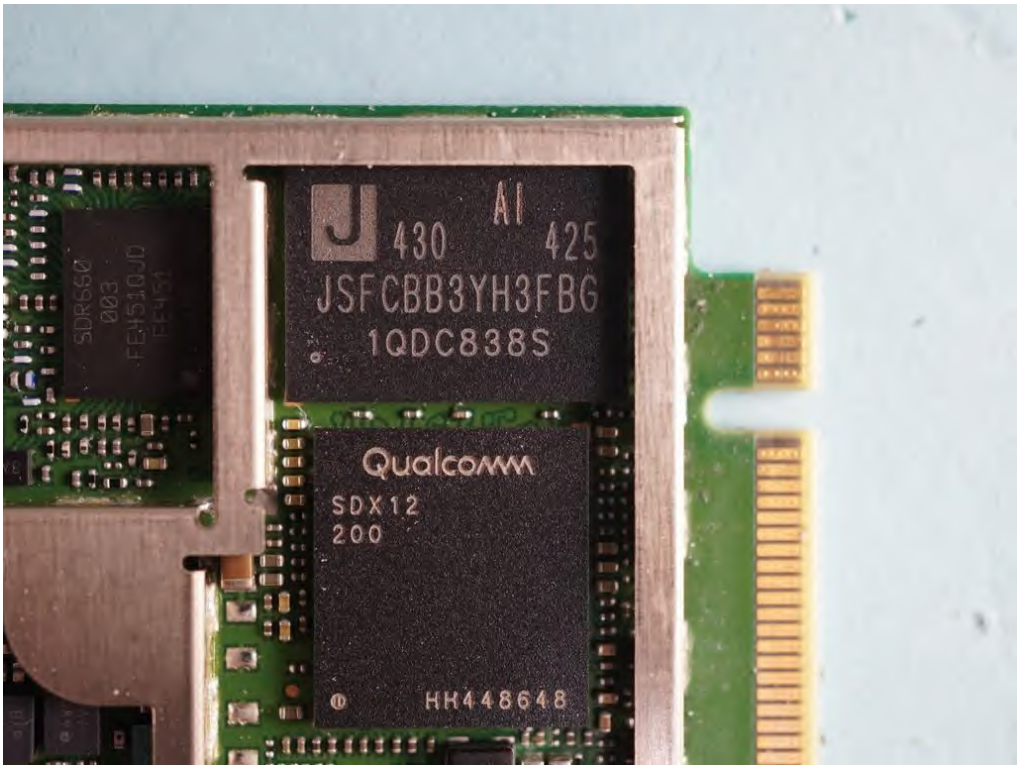

AI
430
425
JSFCBB3YH3FBG
1QDC838S
Qualcomm
SDX12
200
HH448648

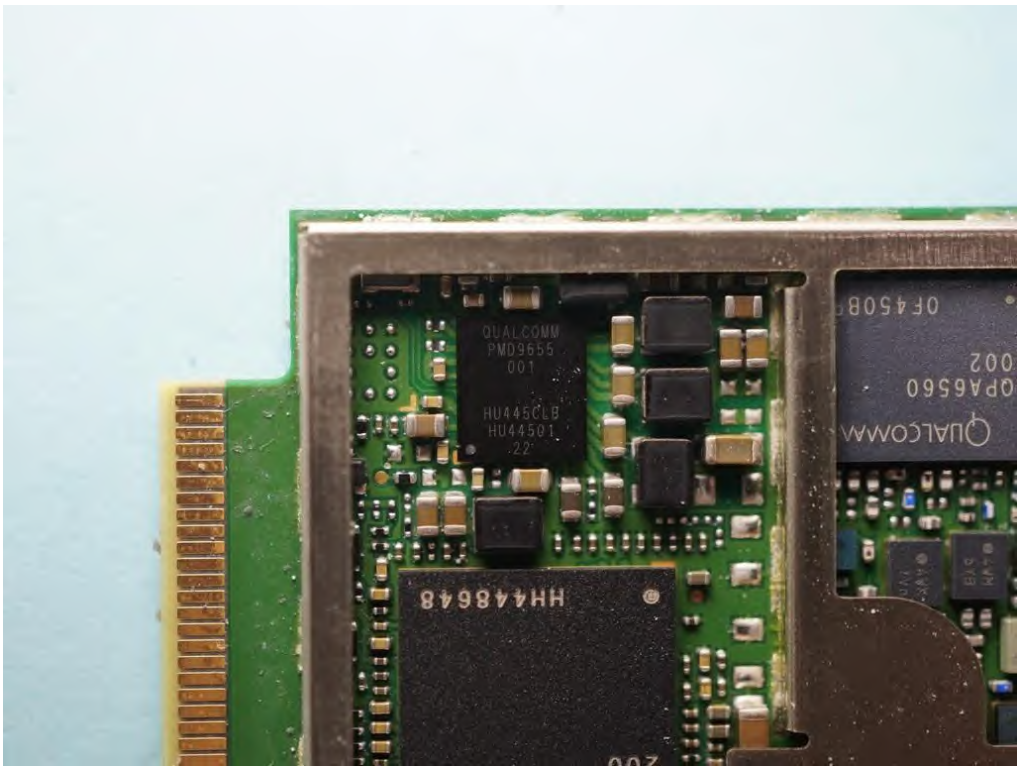

QUALCOMM
PMD9655
001
HU445CLB
HU44501
.22
HH448648

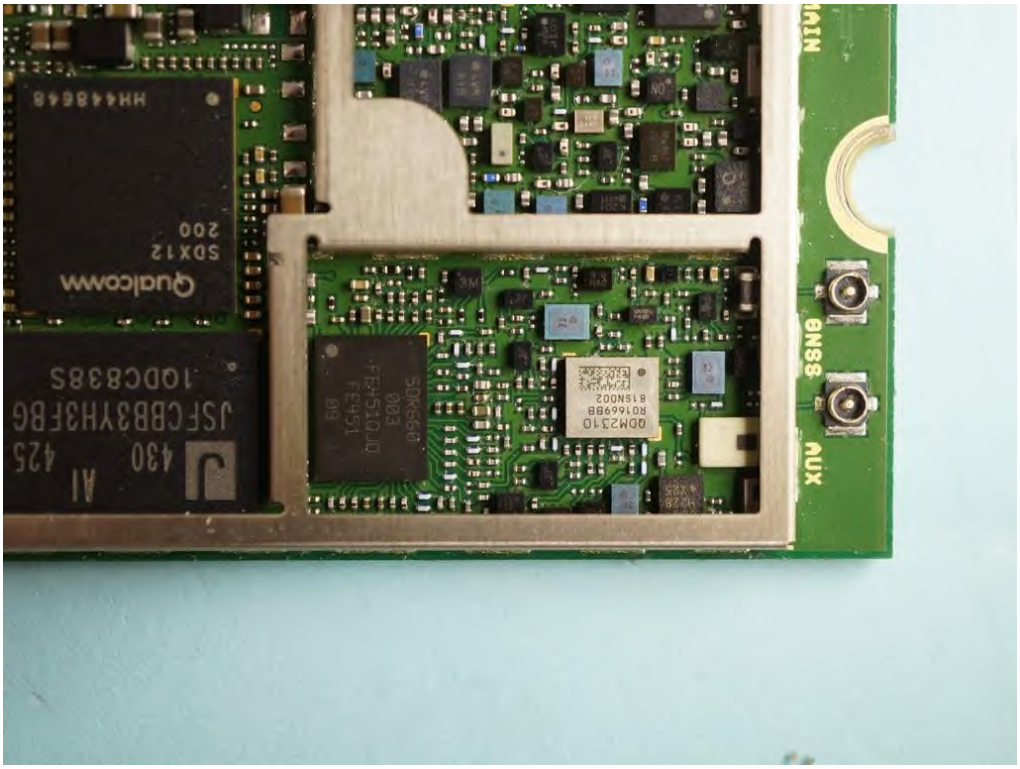

MAIN
GNSS
AUX
Qualcomm
SDX12
200
HH448648
JSFCBB3YH3FBG
10DC838S
430
425
AI
QDM2310
R0166988
81SN002
F4515
Qualcomm
SDX12
200
HH4486
OPA6560
002
QUALCOMM
MAIN
GN

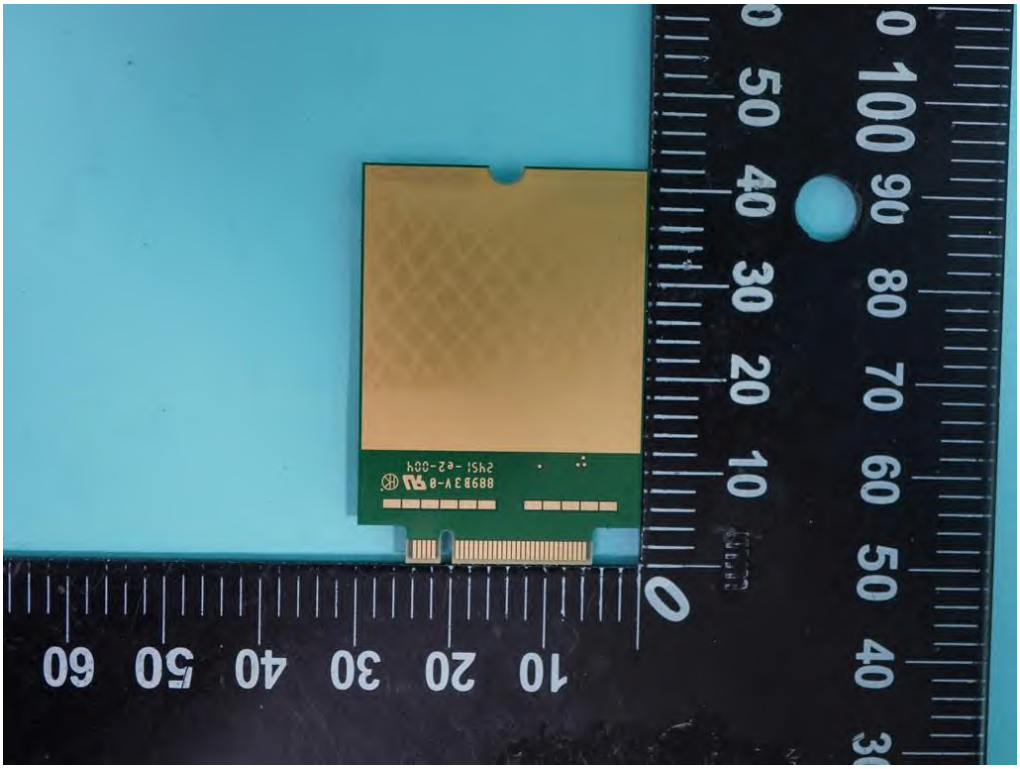


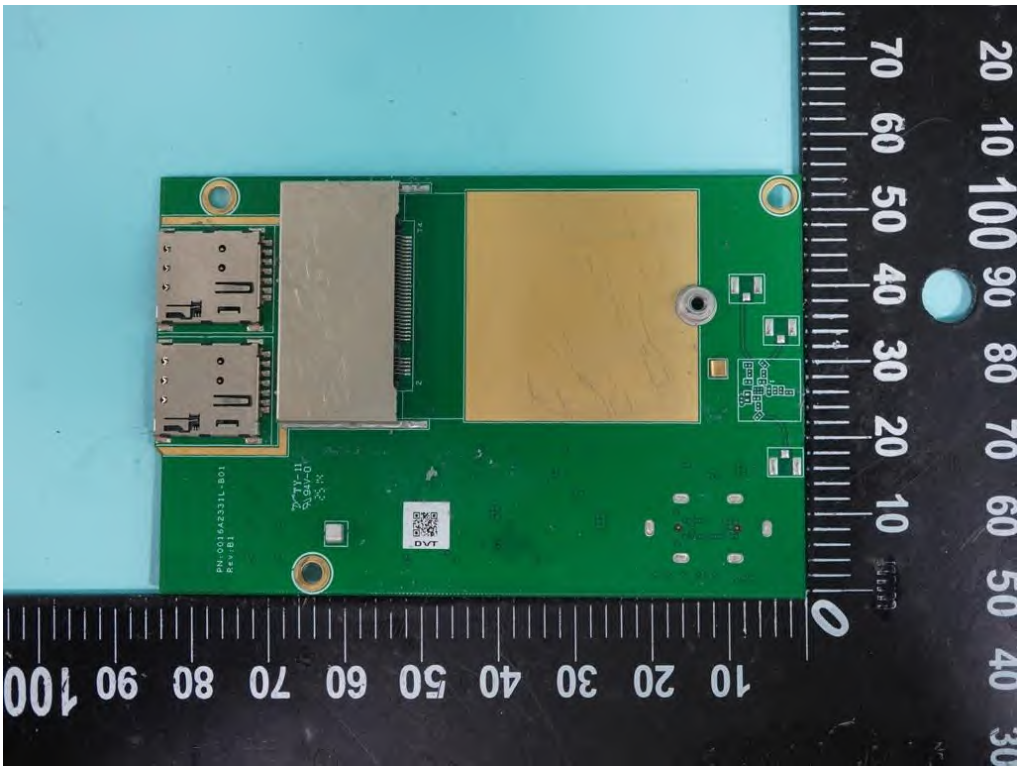


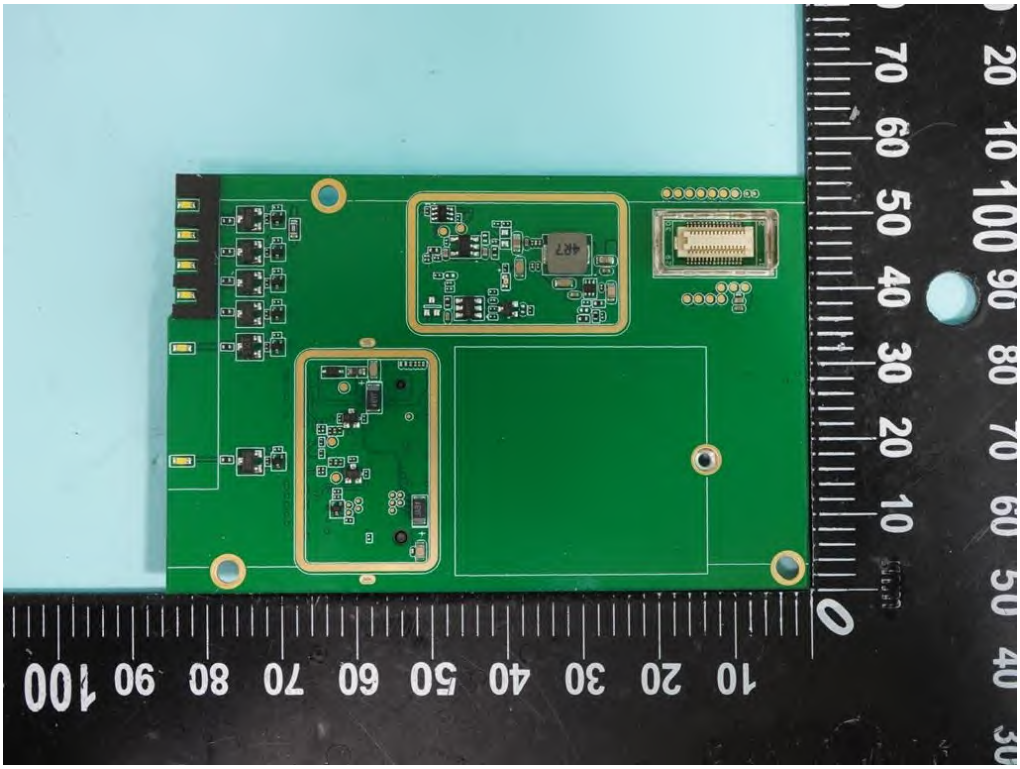


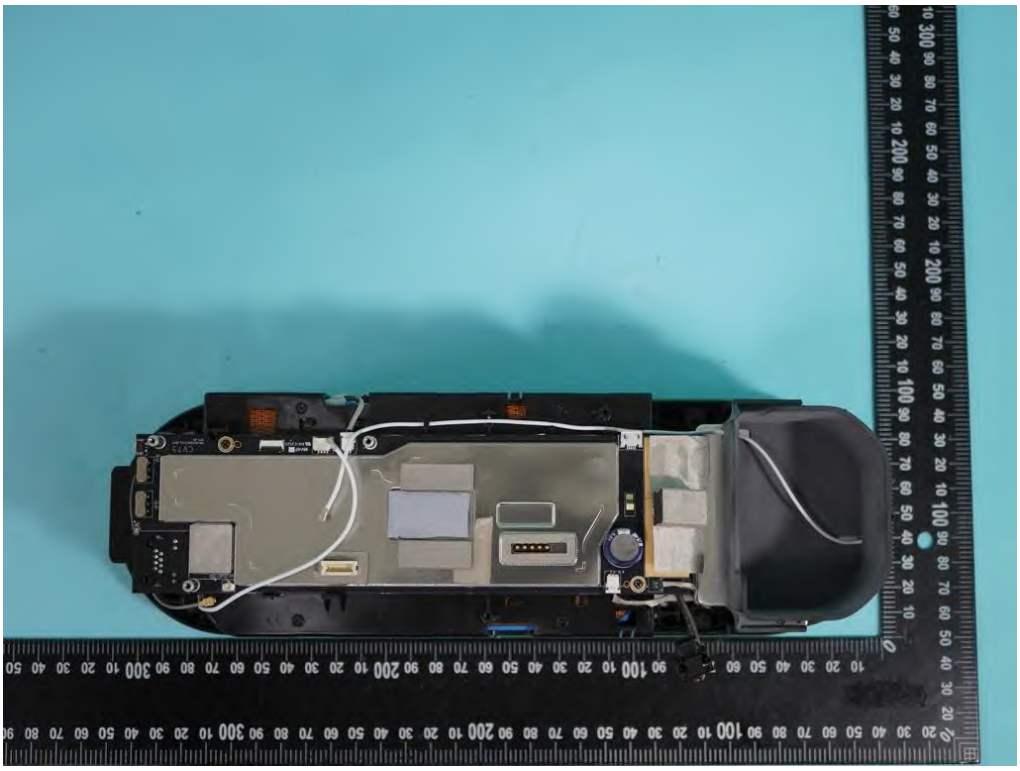


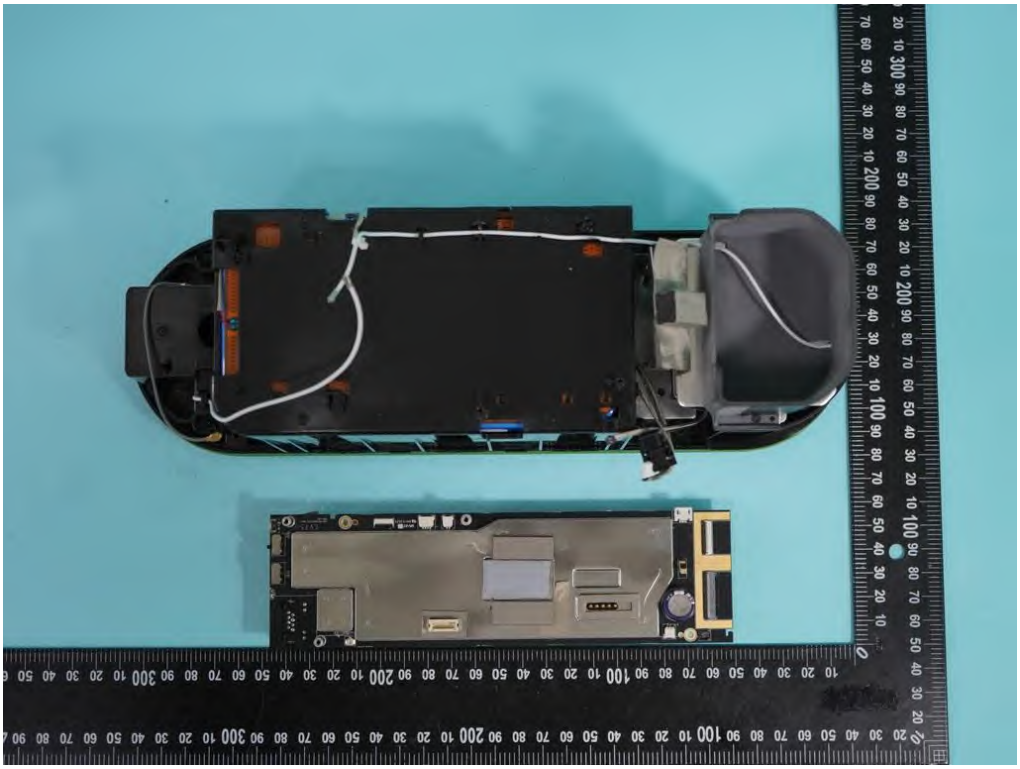


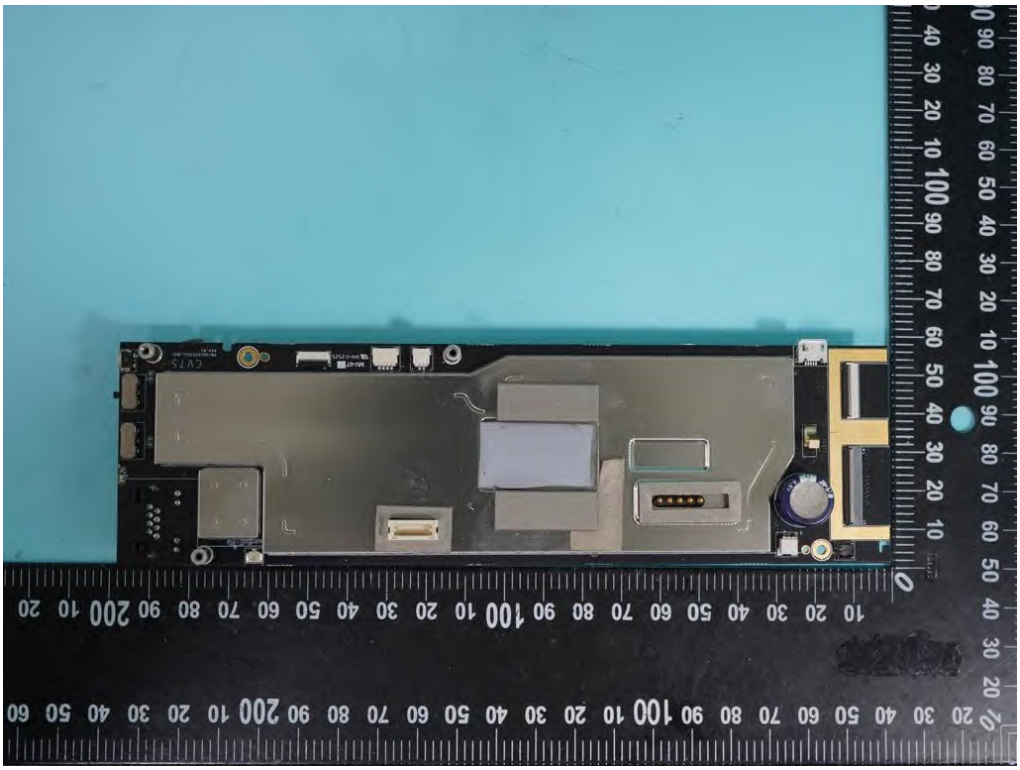


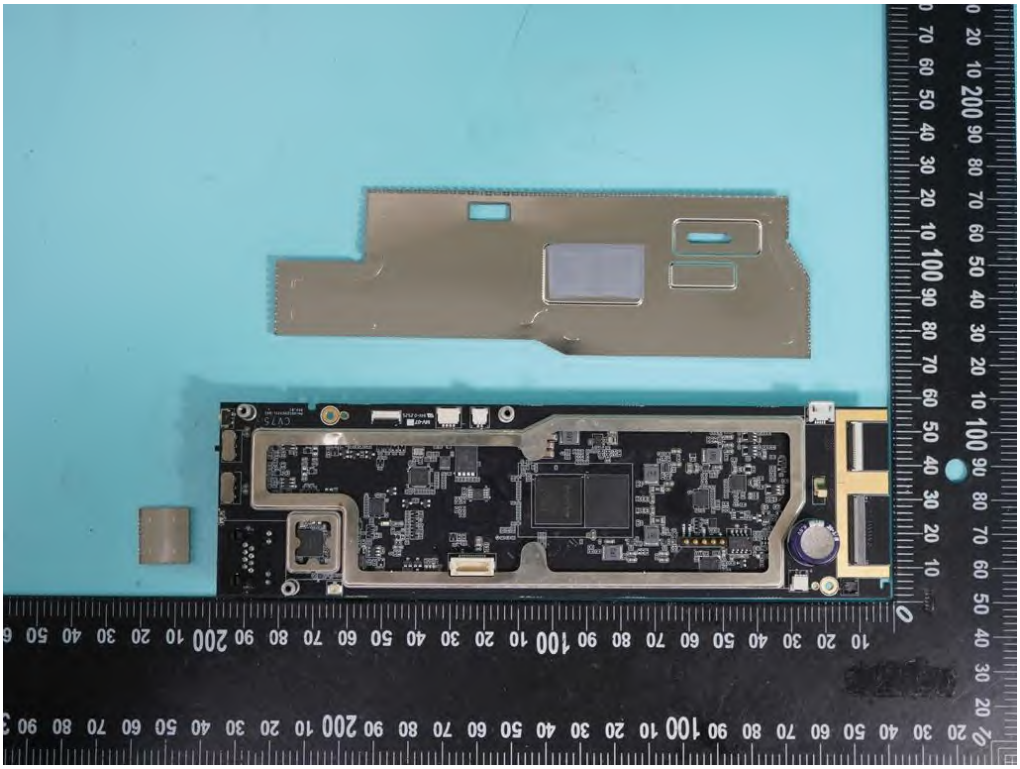


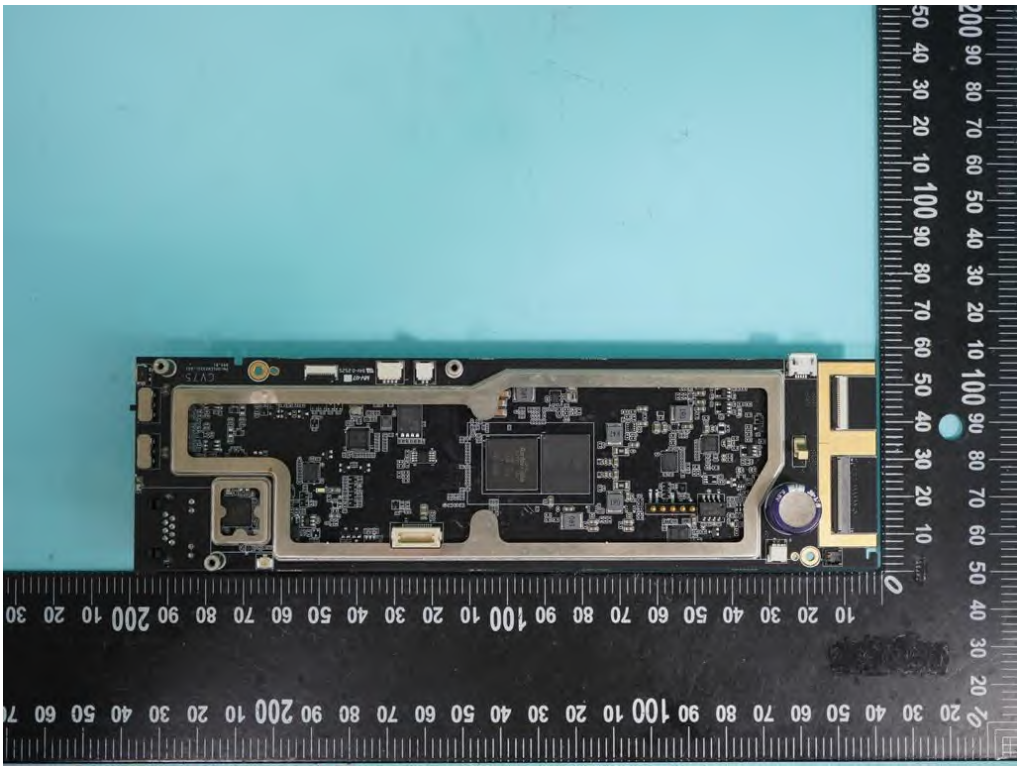


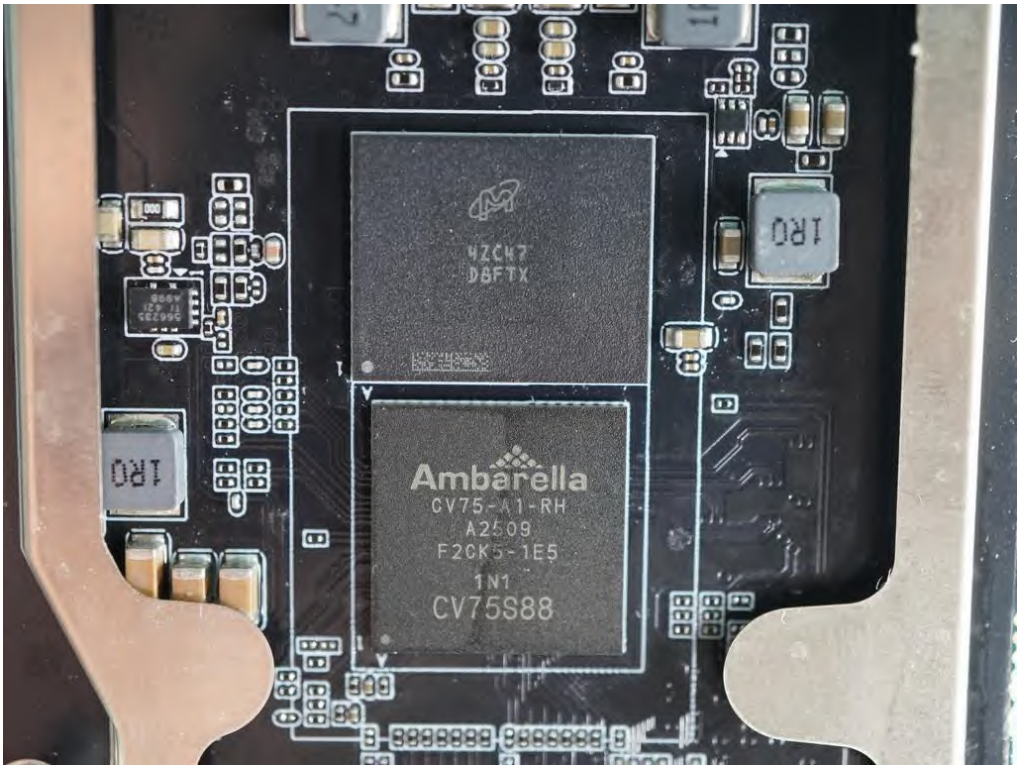

4ZC47
D8FTX
Ambarella
CV75-A1-RH
A2509
F2CK5-1E5
1N1
CV75S88
1R0
1R0

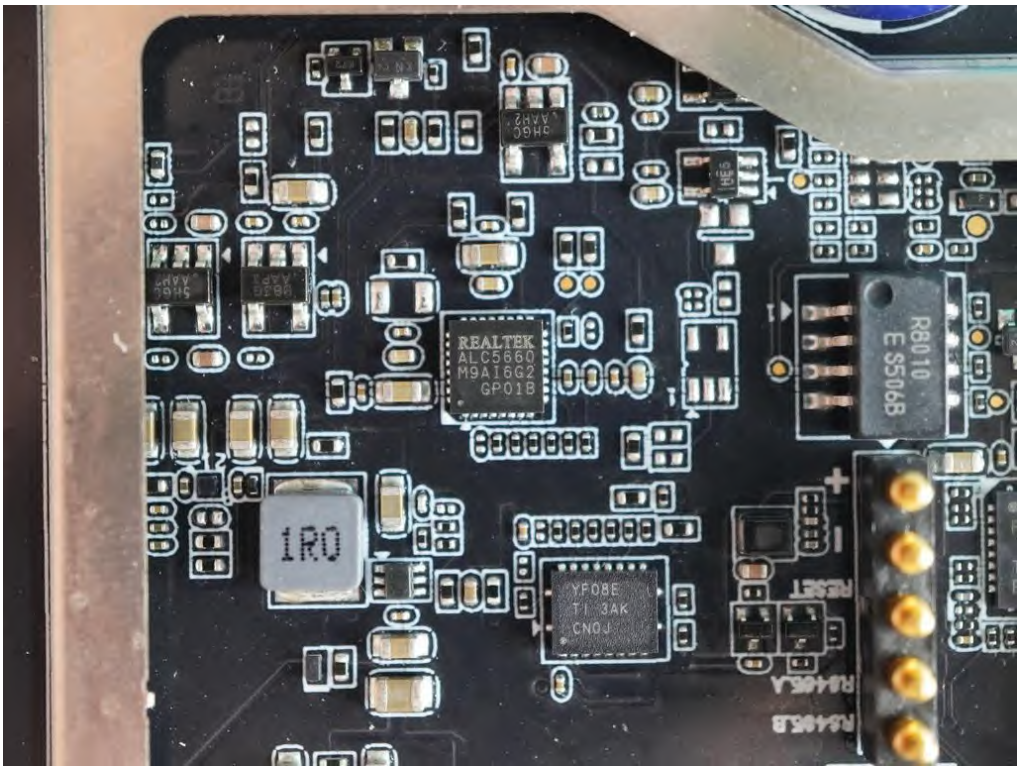

REALTEK
ALC5660
M9AI6G2
GP01B
R8010
E S506B
1R0
RESET

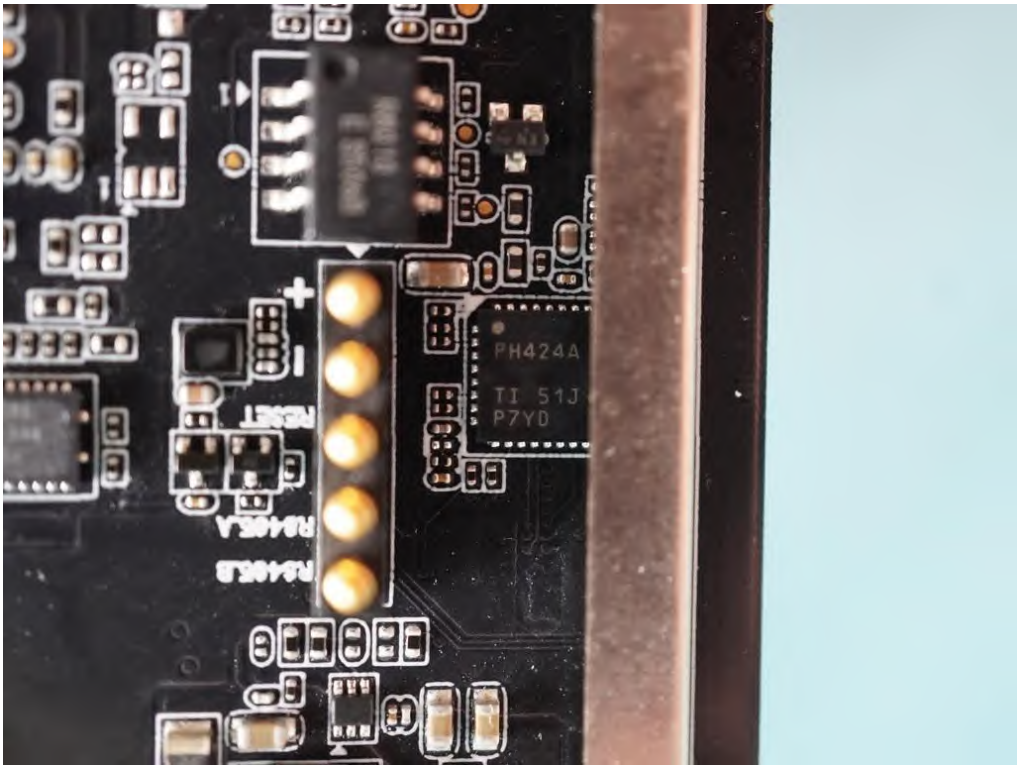
PH424A
TI 51J
P7YD
RESET

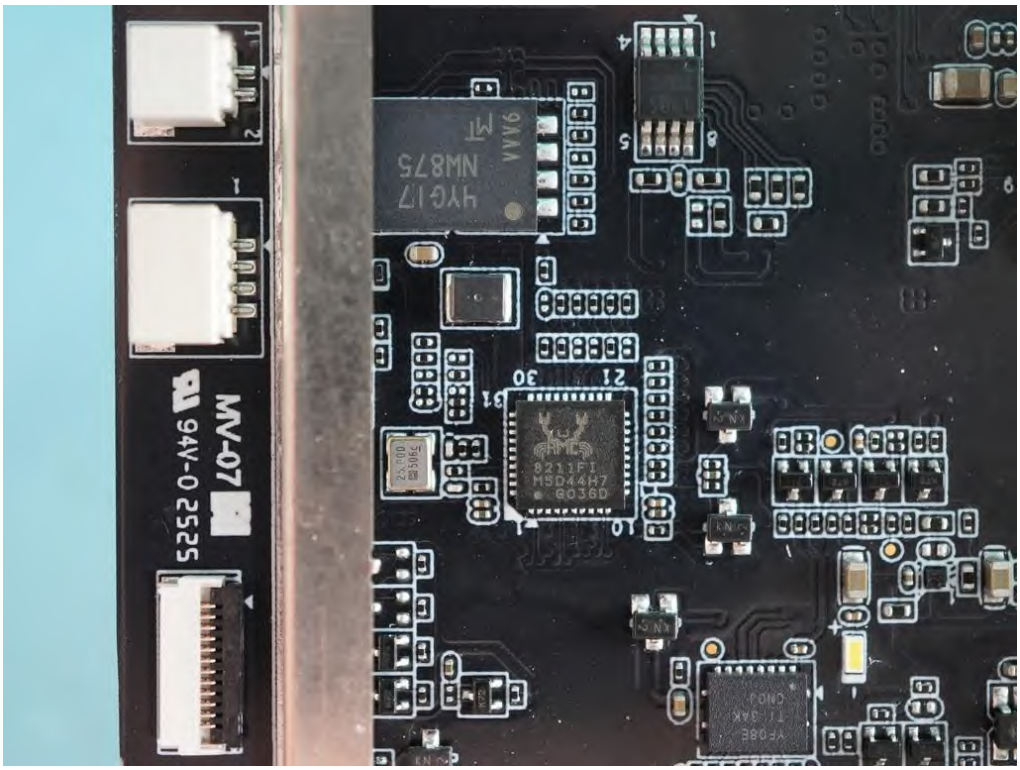

MV-07
94V-0 2525
NW875
HYG17
9MAA
8211FI
M5D44H7
G036D

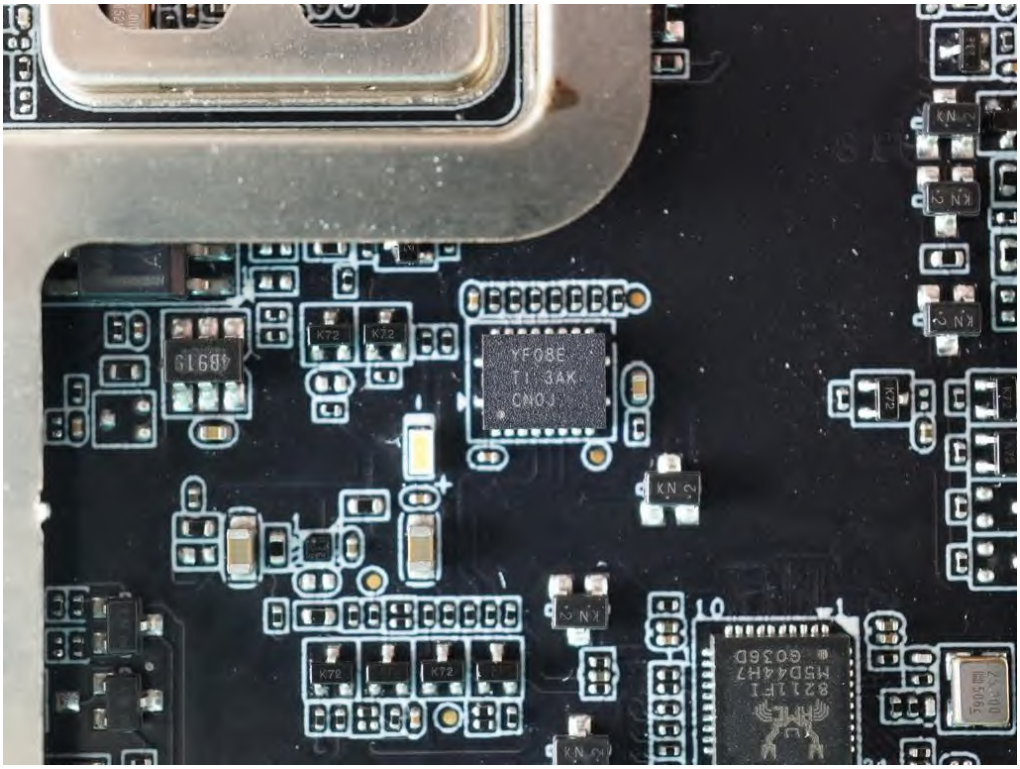

YF08E
TI 3AK
CNOJ

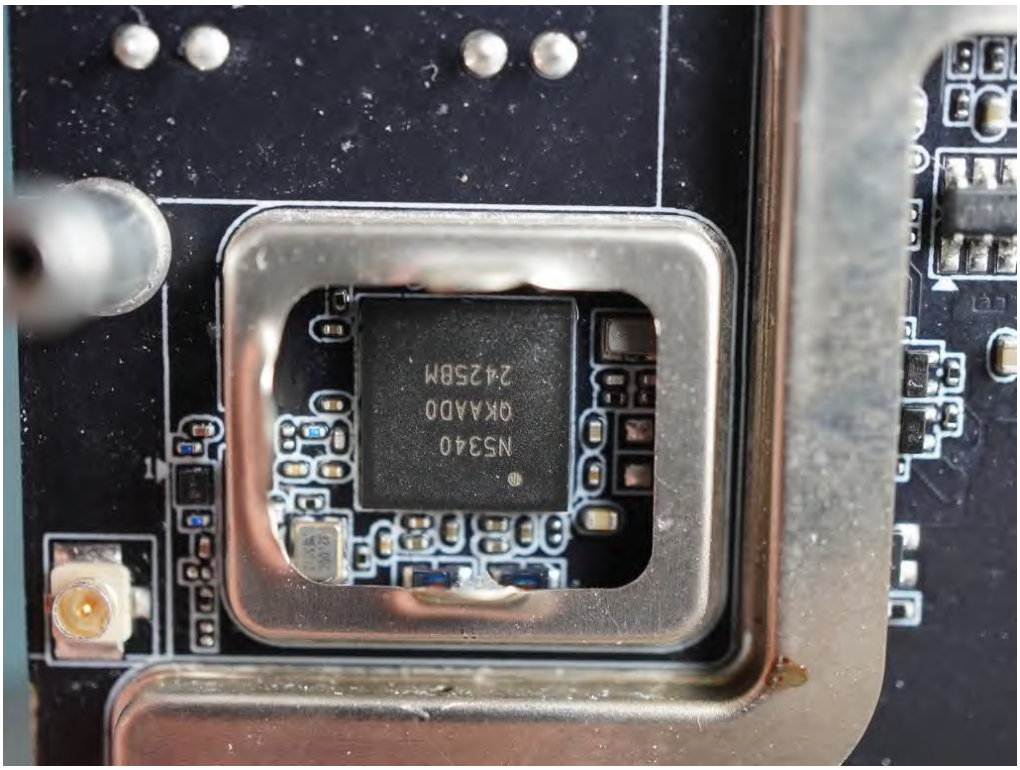

NS340
0KAADO
2425BM

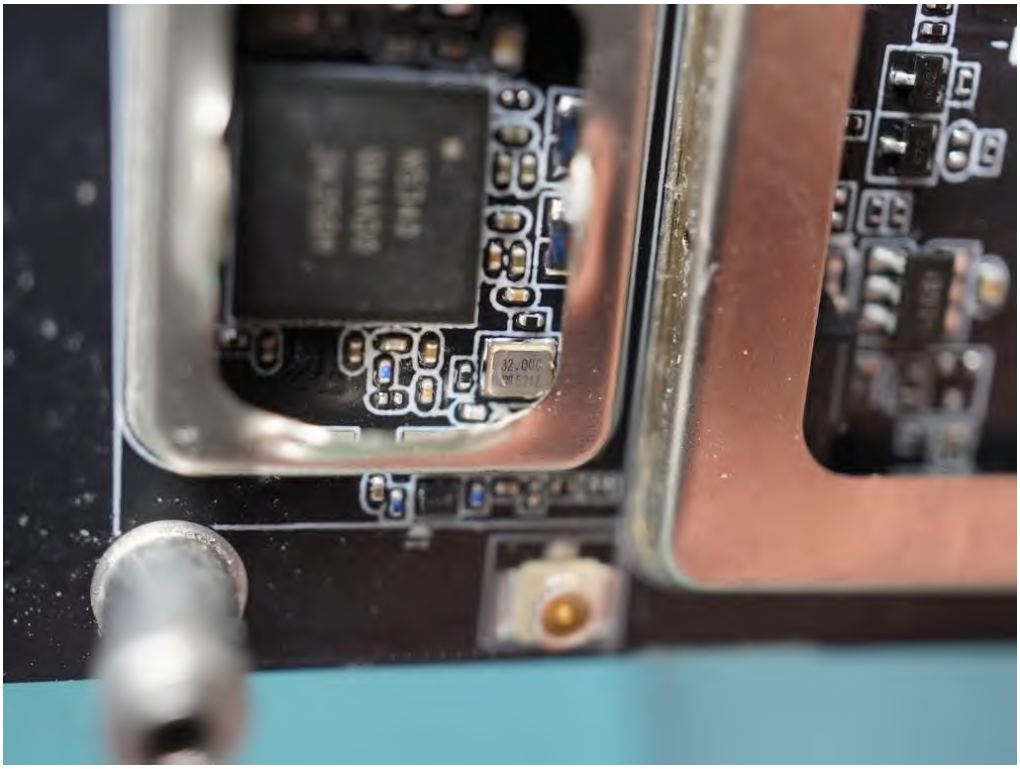





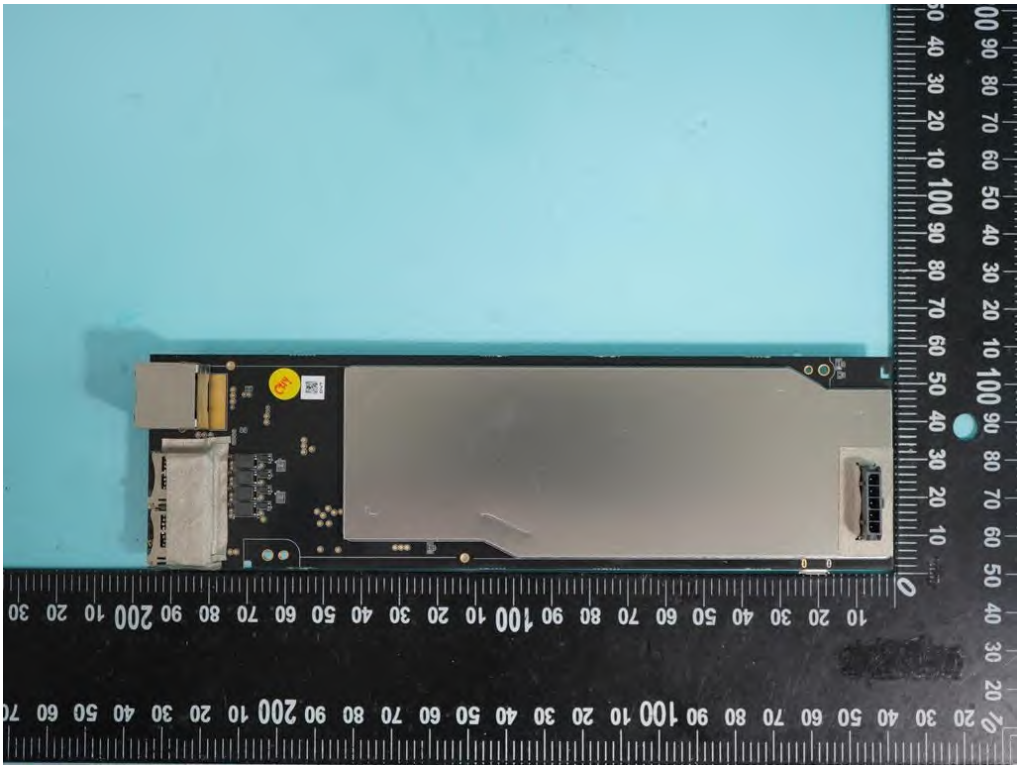


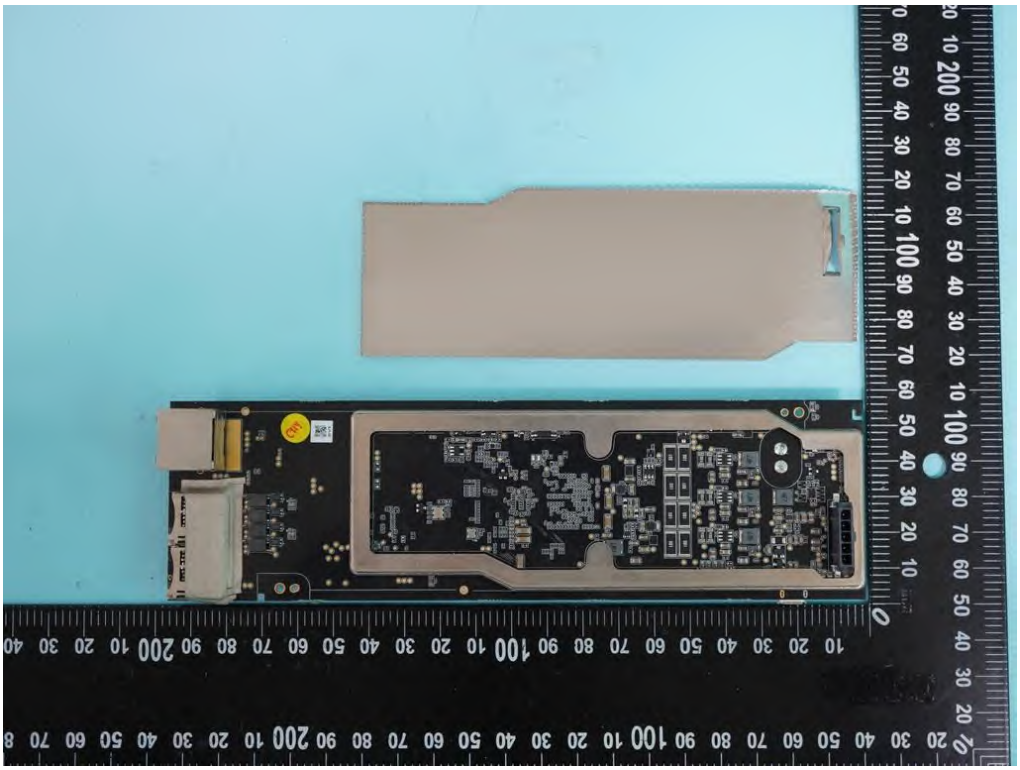


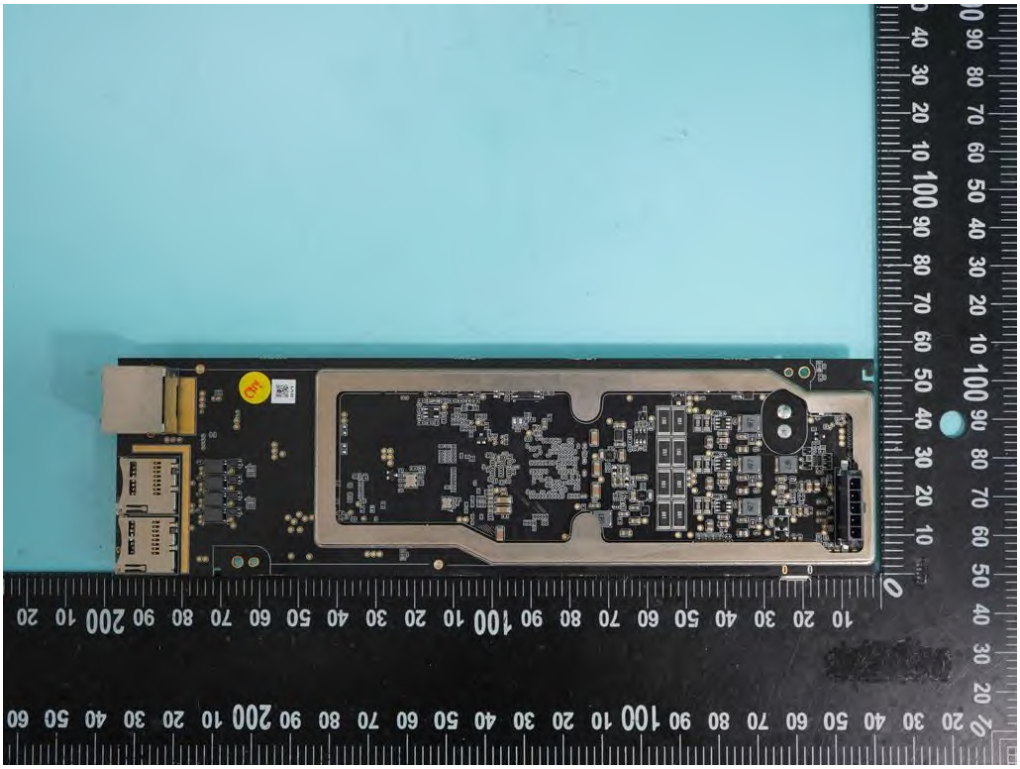


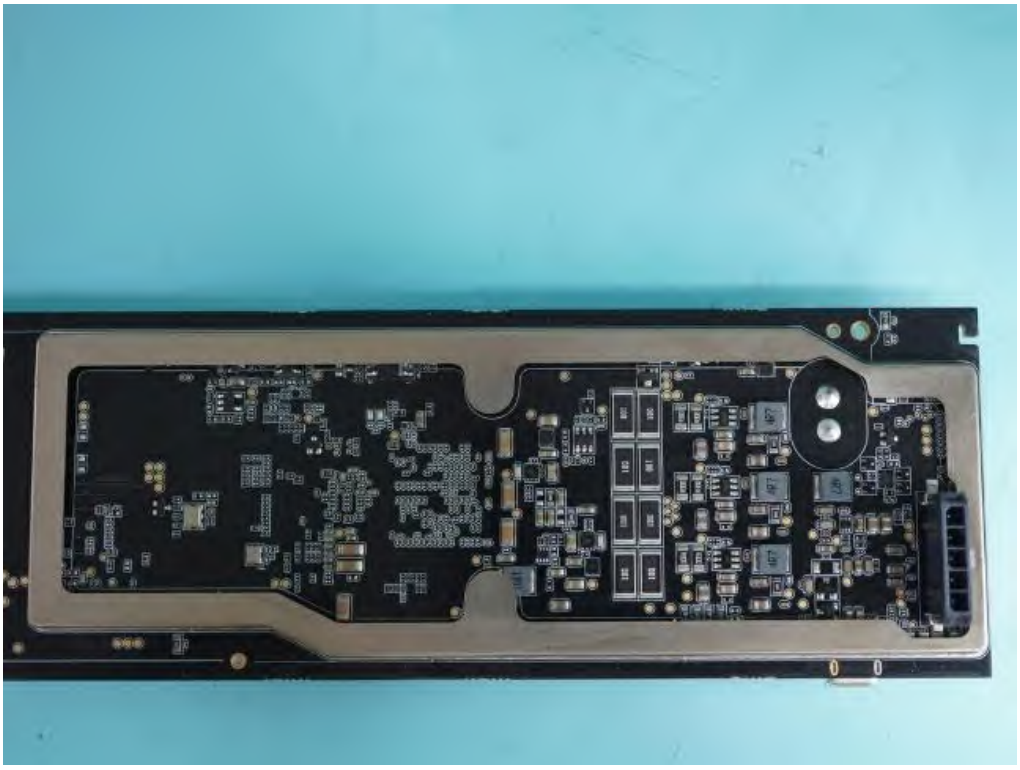


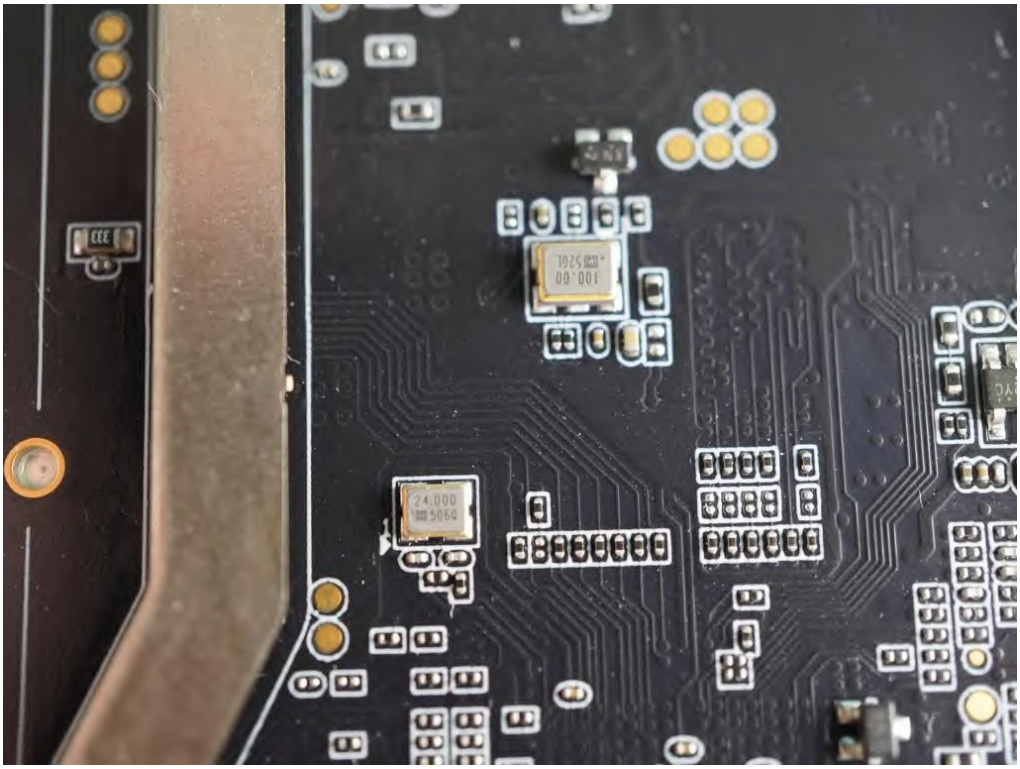


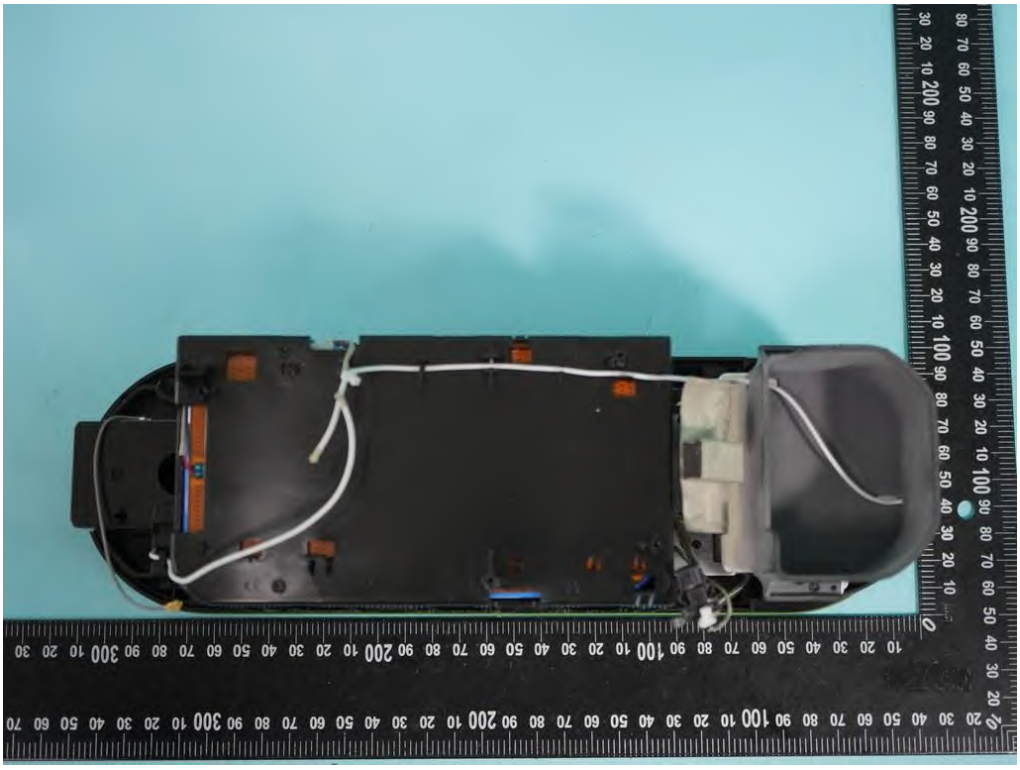


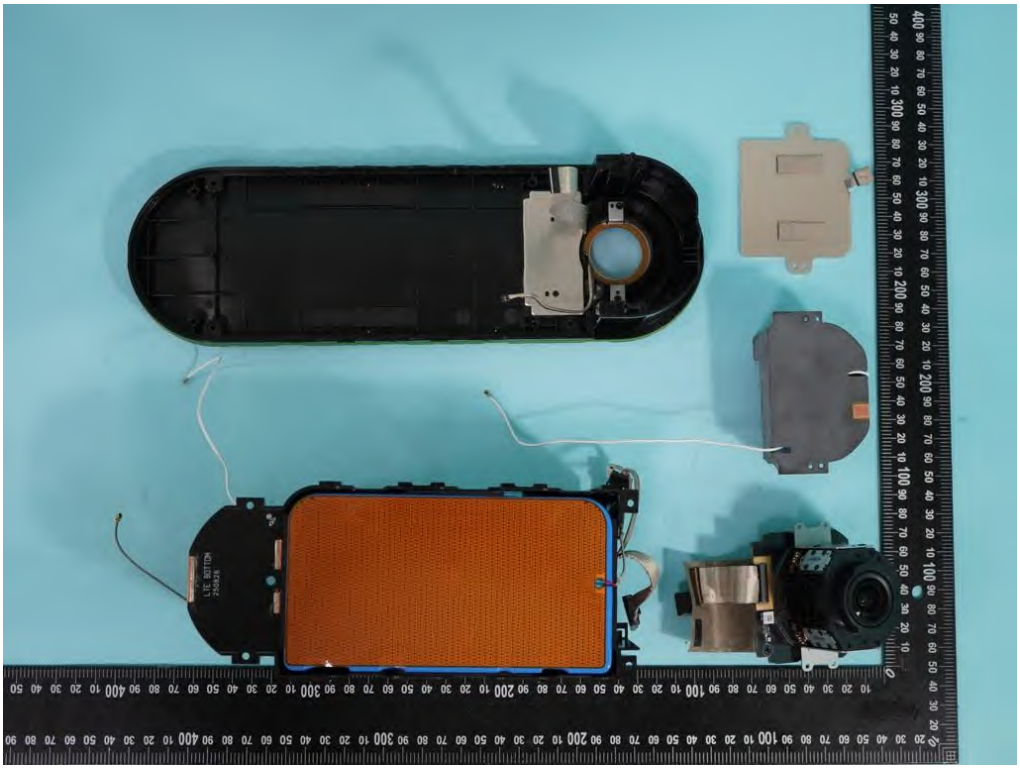

LTE BOTTOM
250826

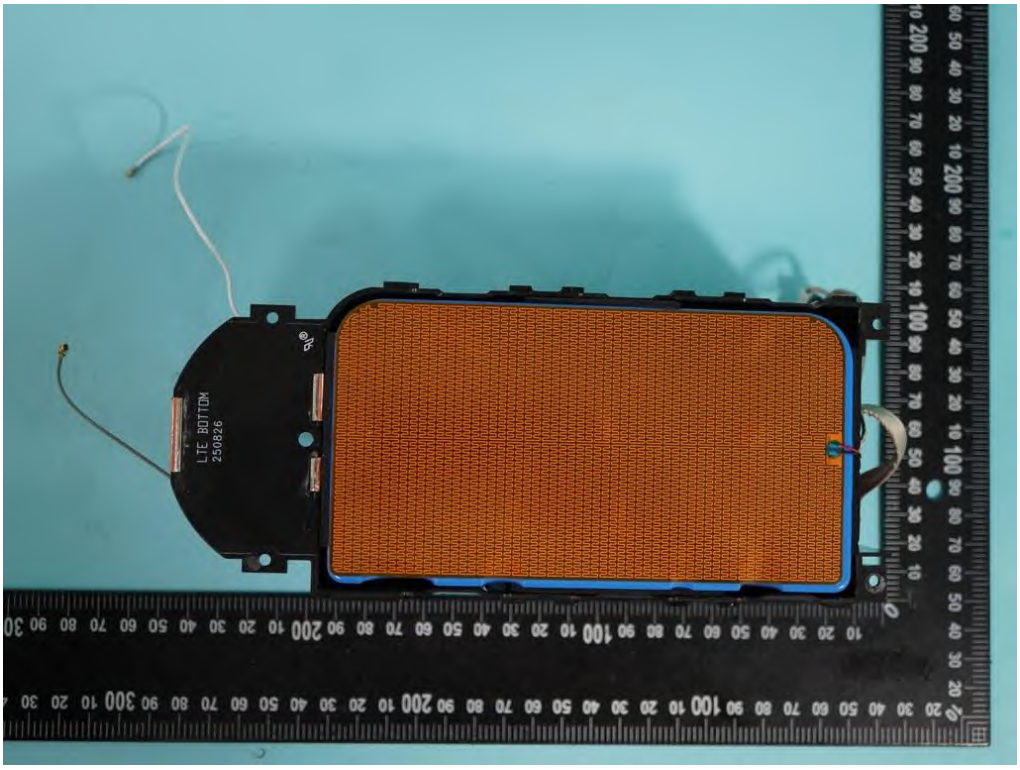

LTE BOTTOM
250826

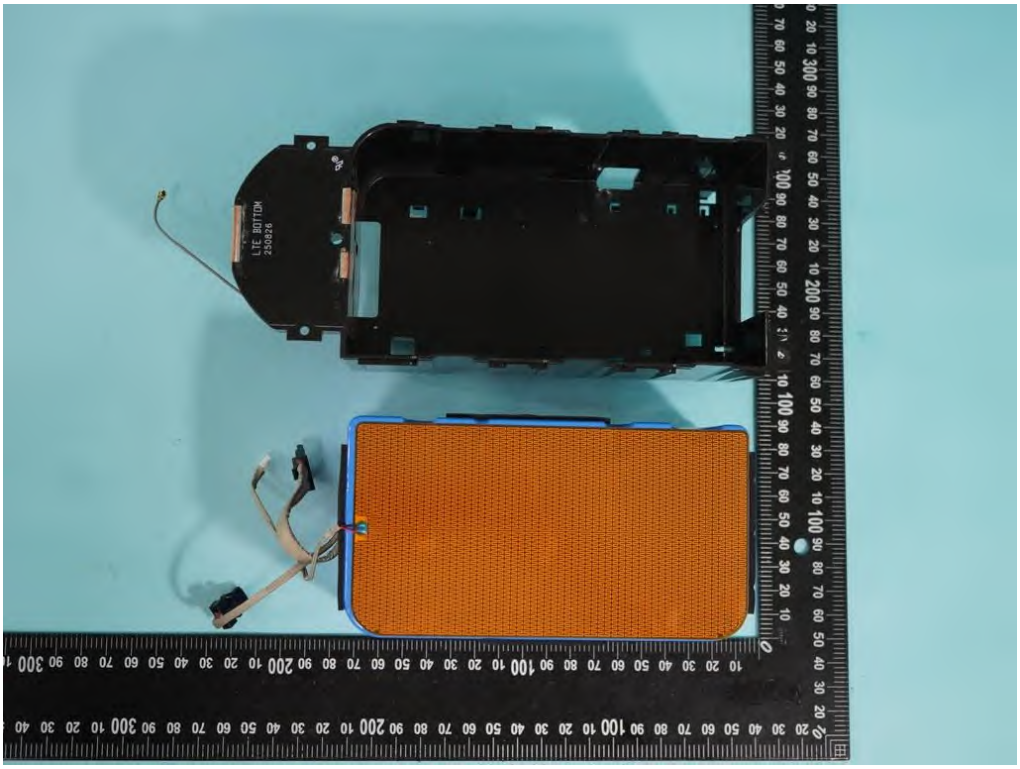

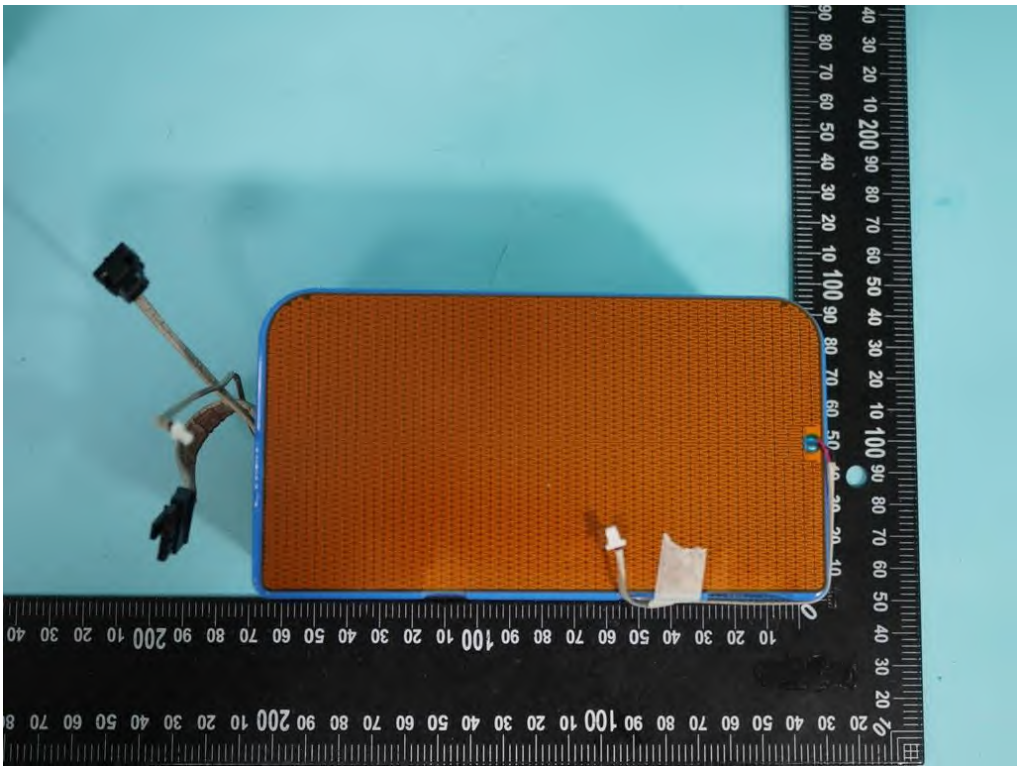


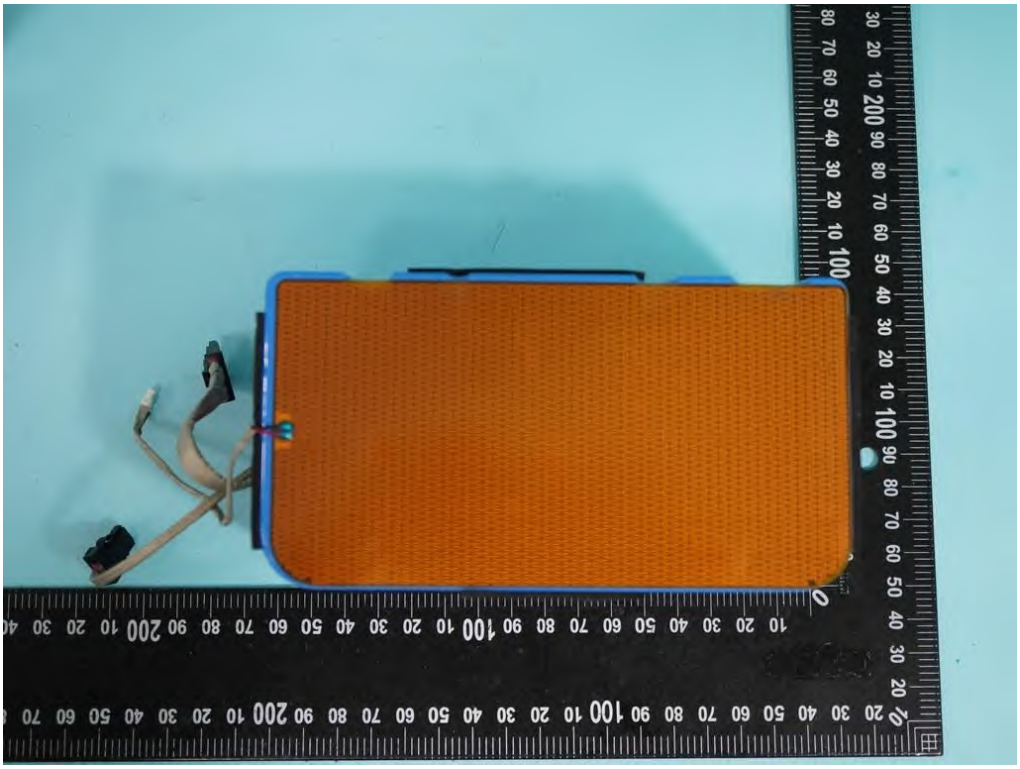


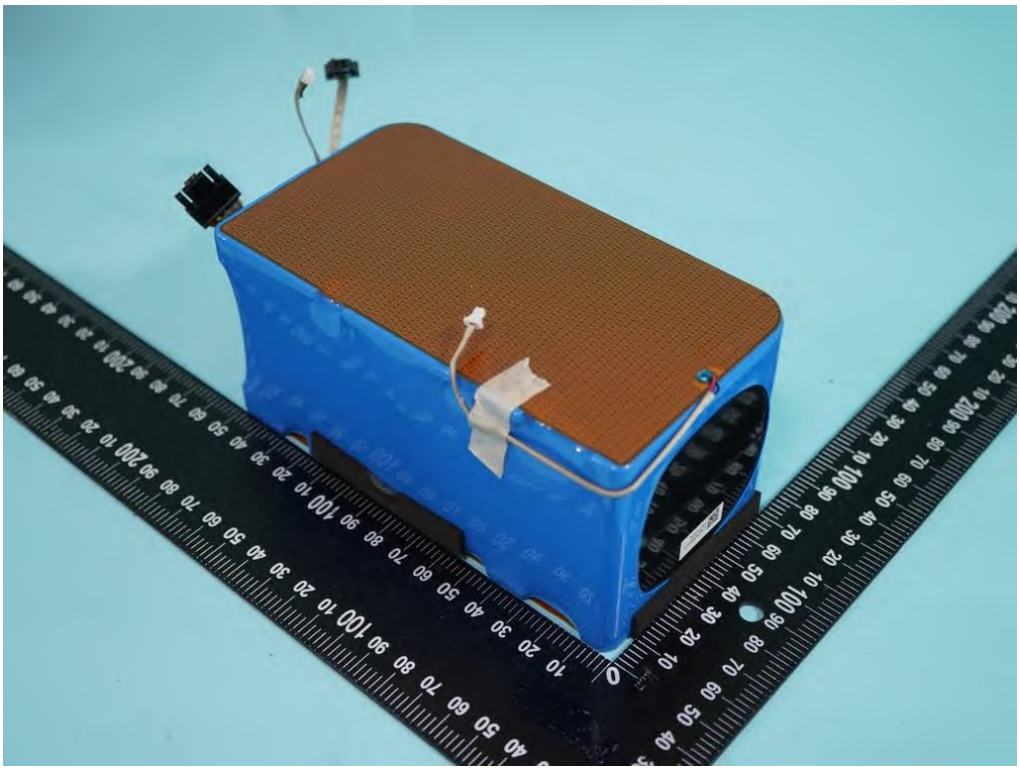


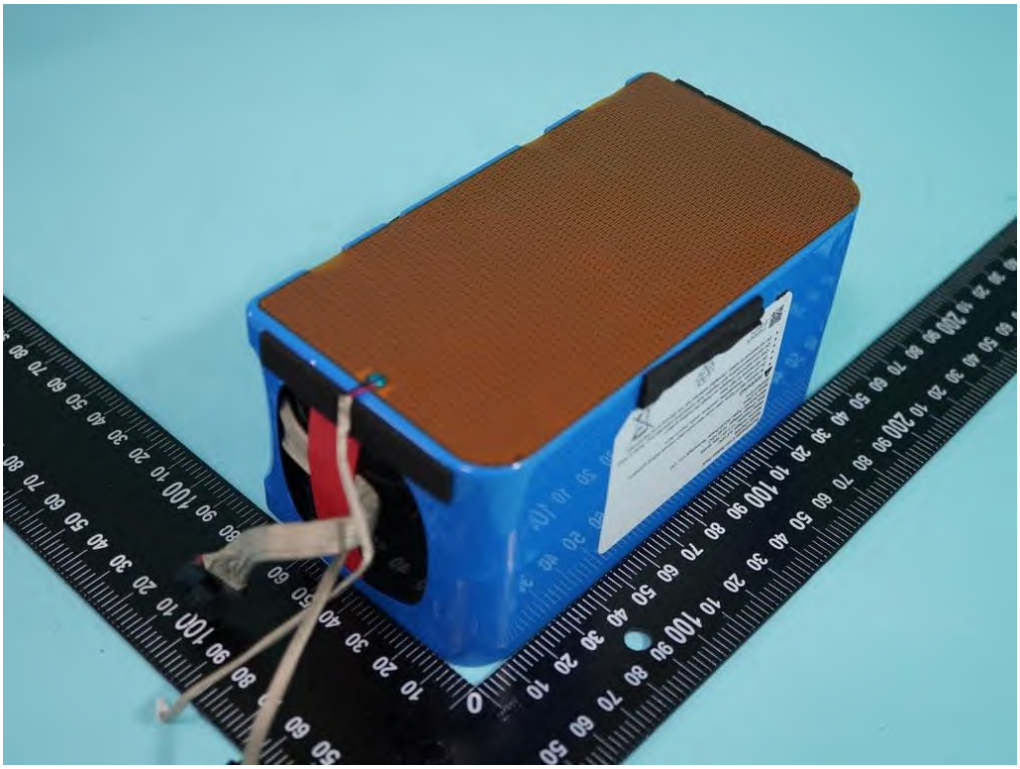




Rechargeable Li-ion Battery Pack
Model: CA0306
Nominal Voltage: 9.6 VDC
Rated Capacity: 17.1 Ah / 164.16 Wh
Max. Charge Voltage: 10.95 VDC
Manufacturer: Fujian SCUD Power Technology Co., Ltd.
Made in China
3IFpR27/72-4
WARNING
To reduce risk of injury, user must read instruction manual before operation.
Do not open, disassemble, puncture, crush, heat or burn.
Do not expose to high heat.
Only use approved chargers to charge the battery system.
Do not connect positive and negative with conductive materials (e.g. metal or wire).
Do not exposed to water, damaged batteries are not allowed to be transported.
CA030625
510007X

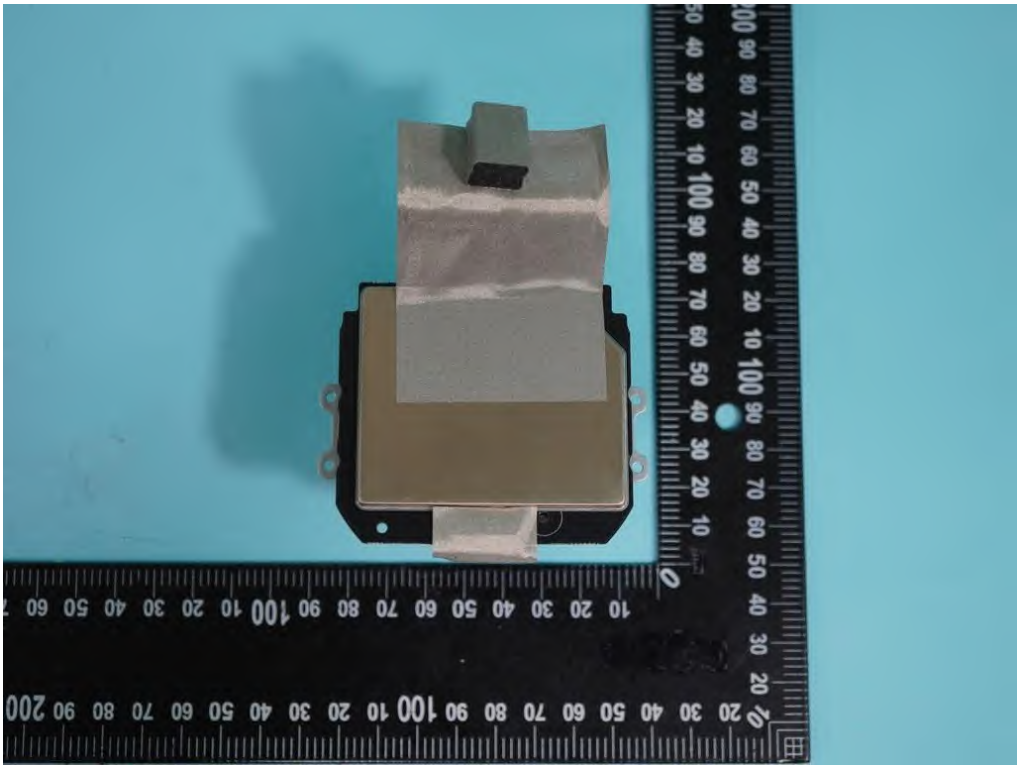


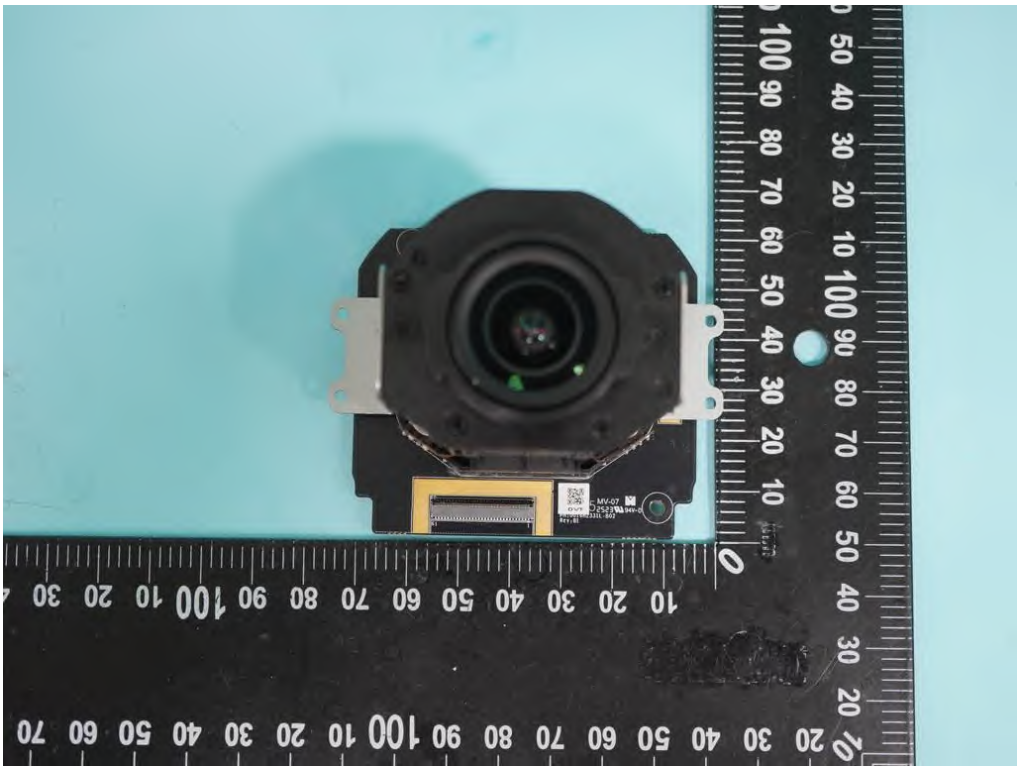


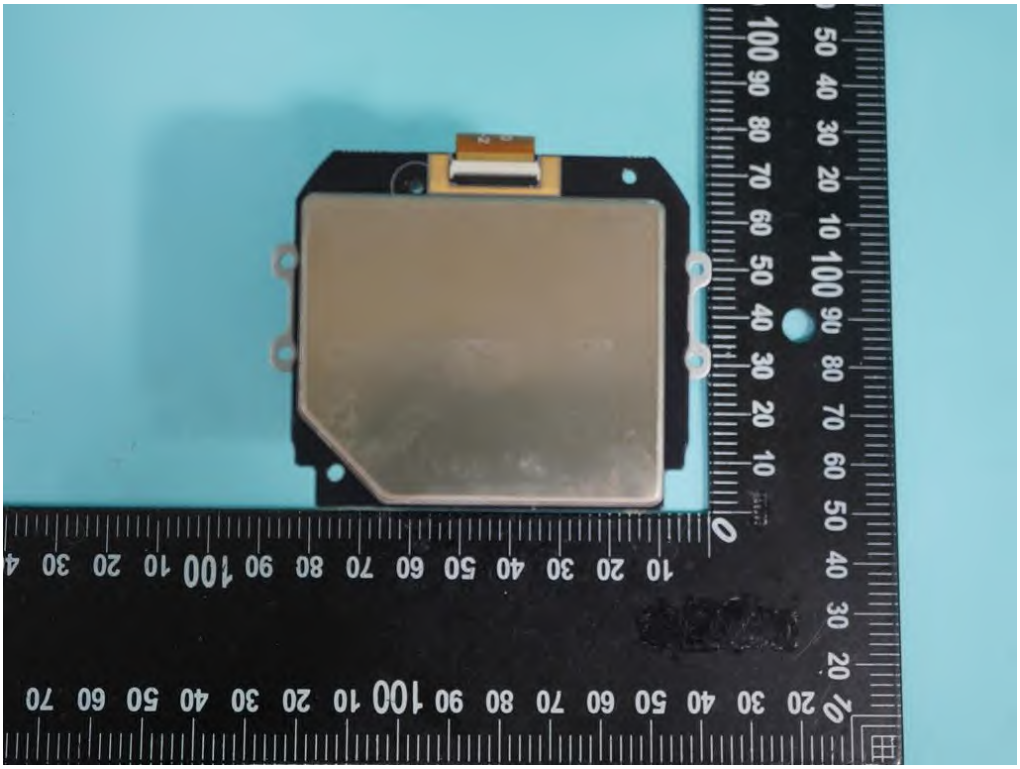


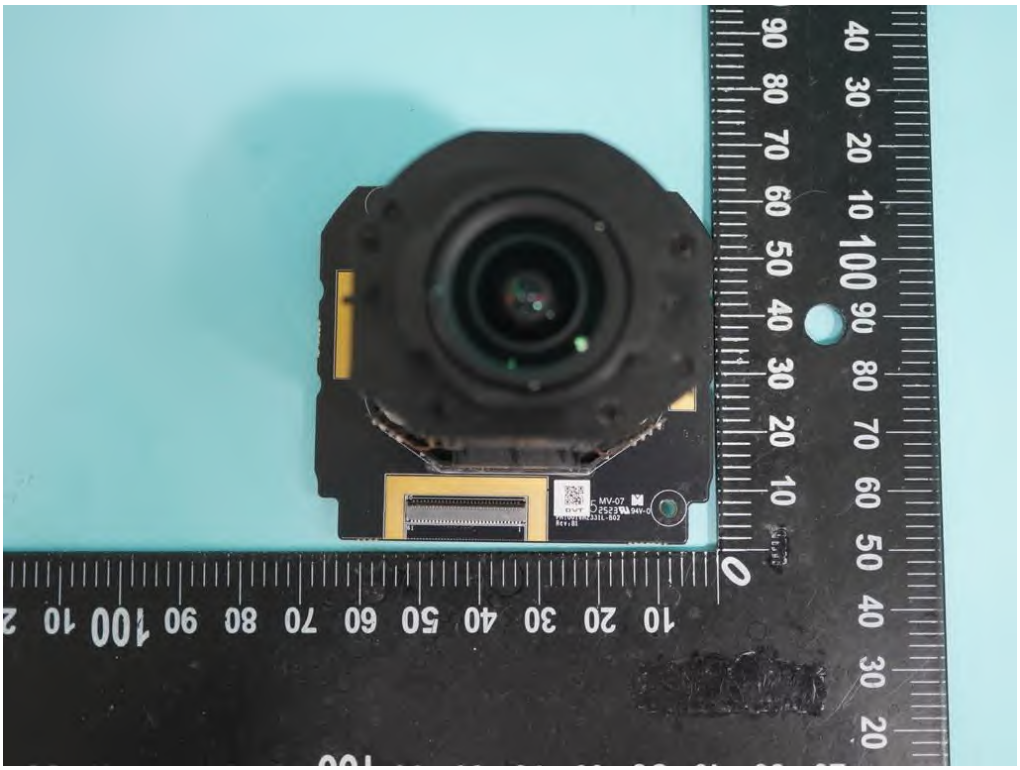

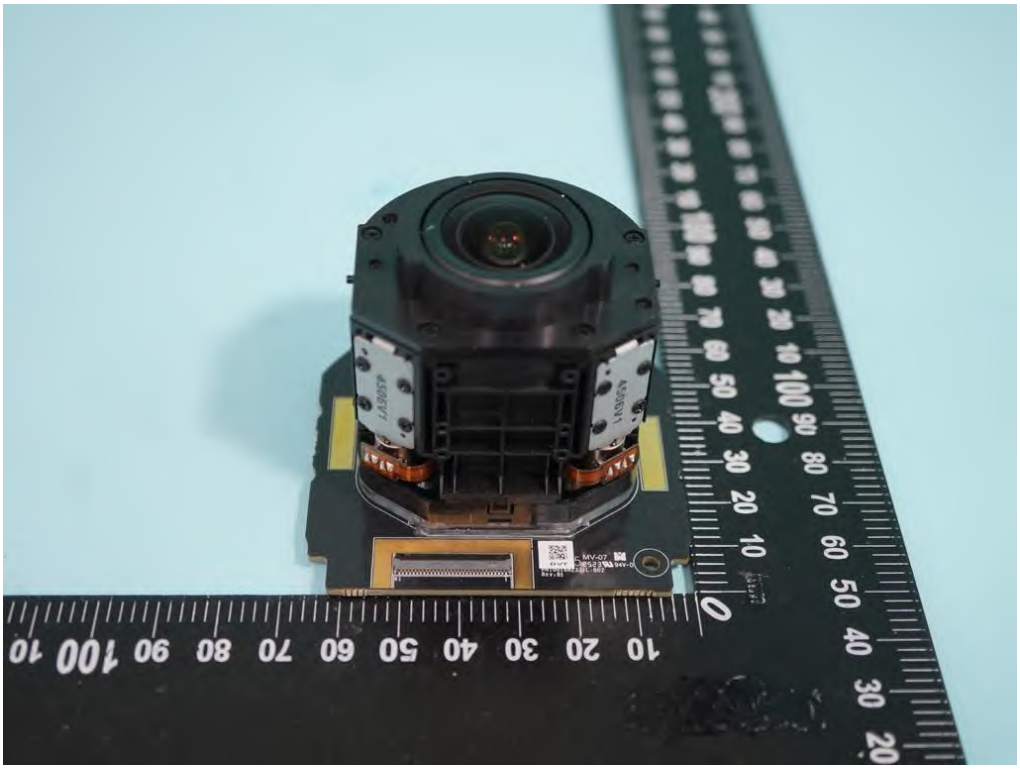


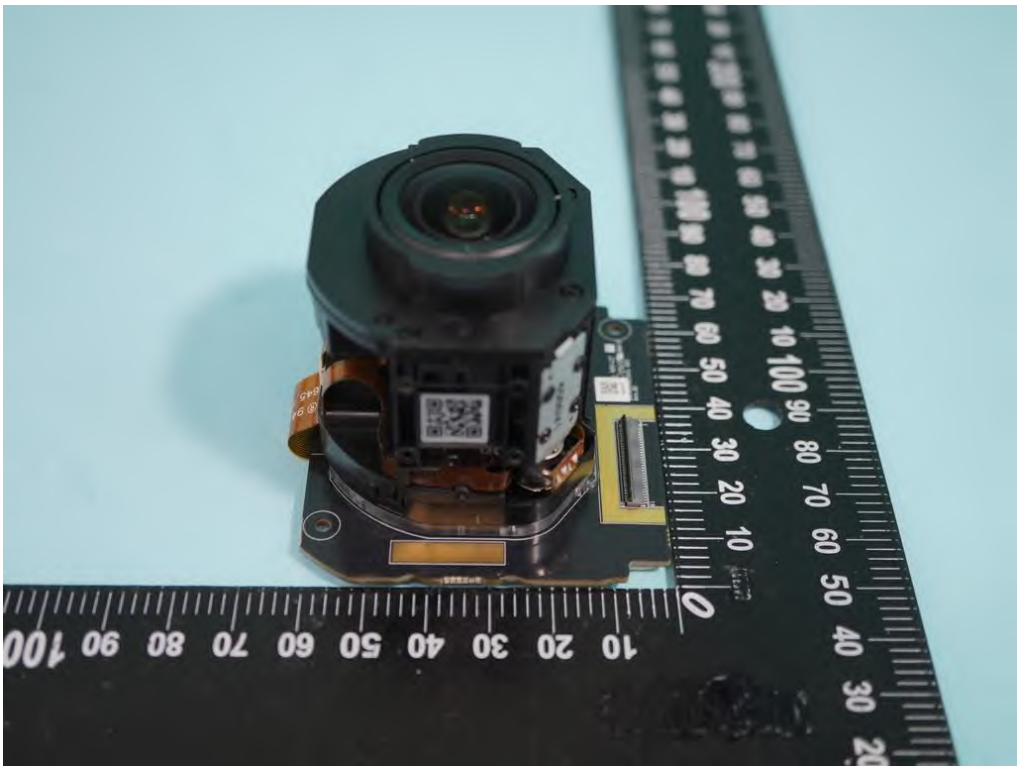


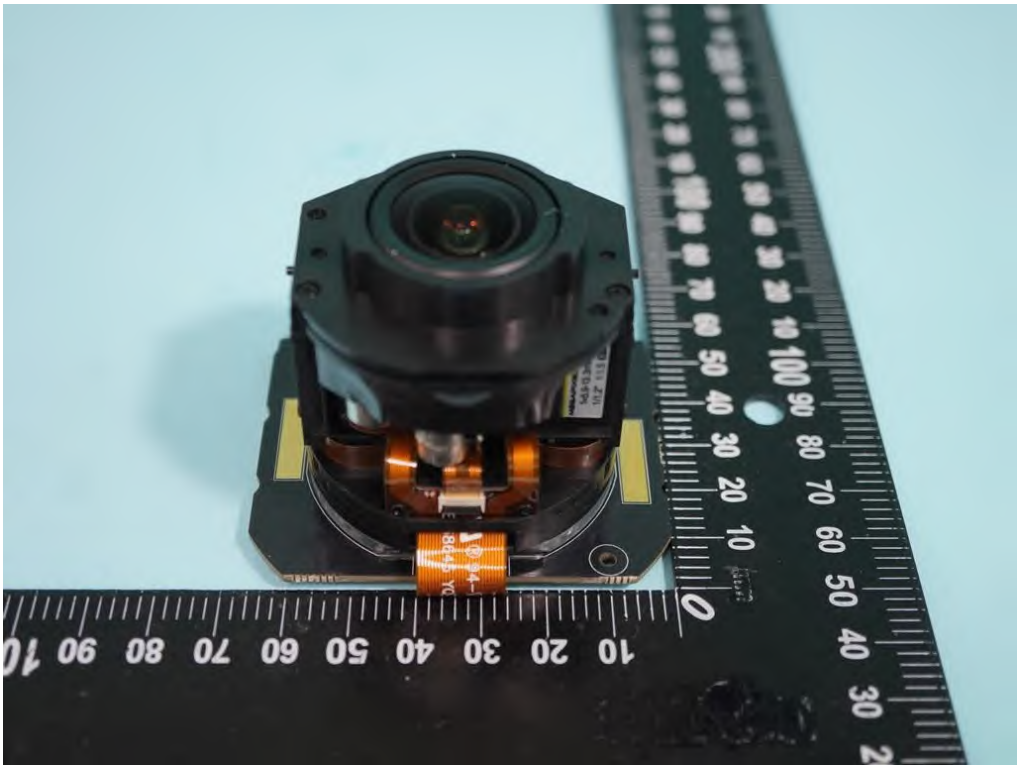

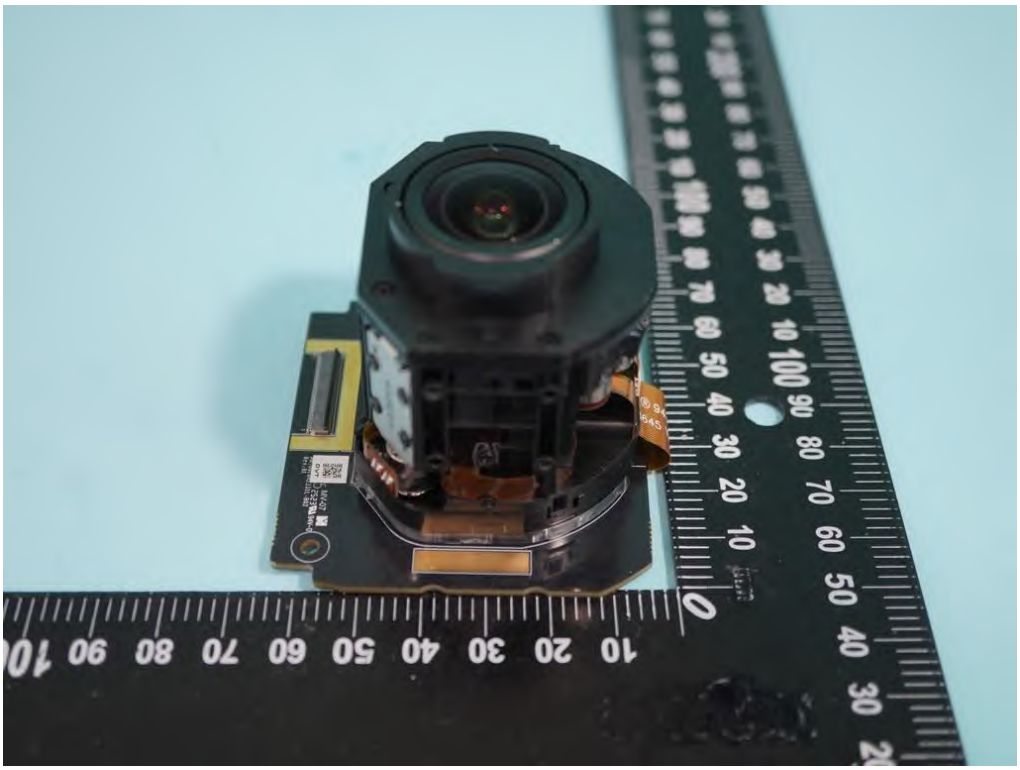




MEGAPIXEL
computar
f=5.9-13.3mm DN
1/1.2" 1:1.5 Piris

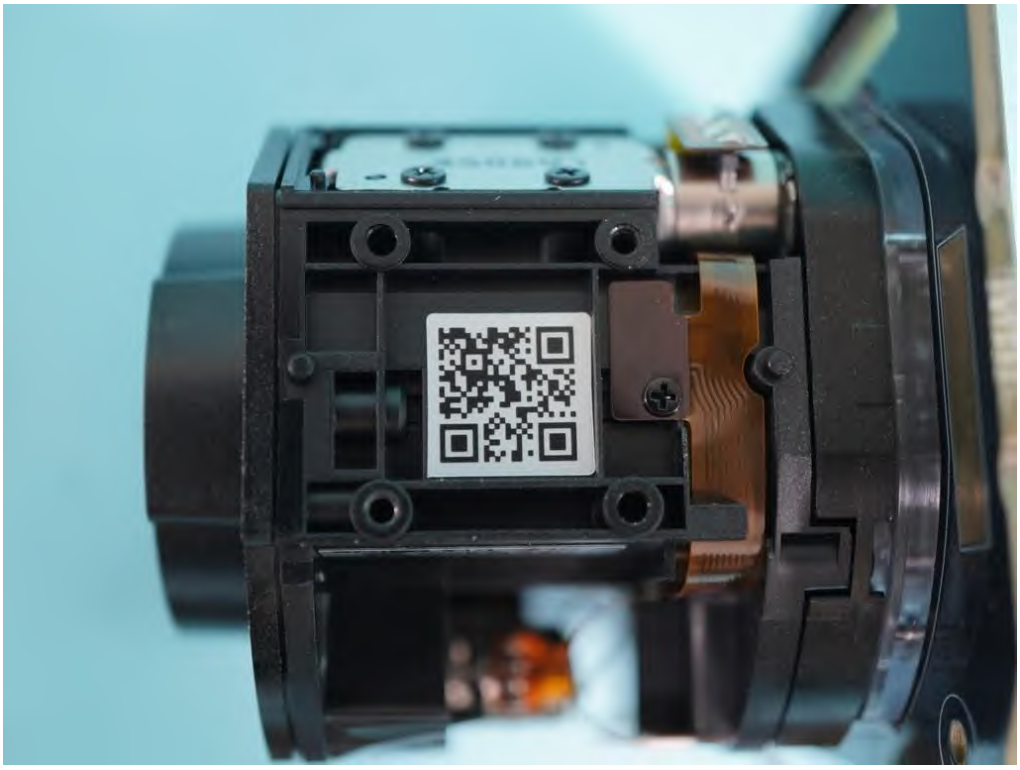

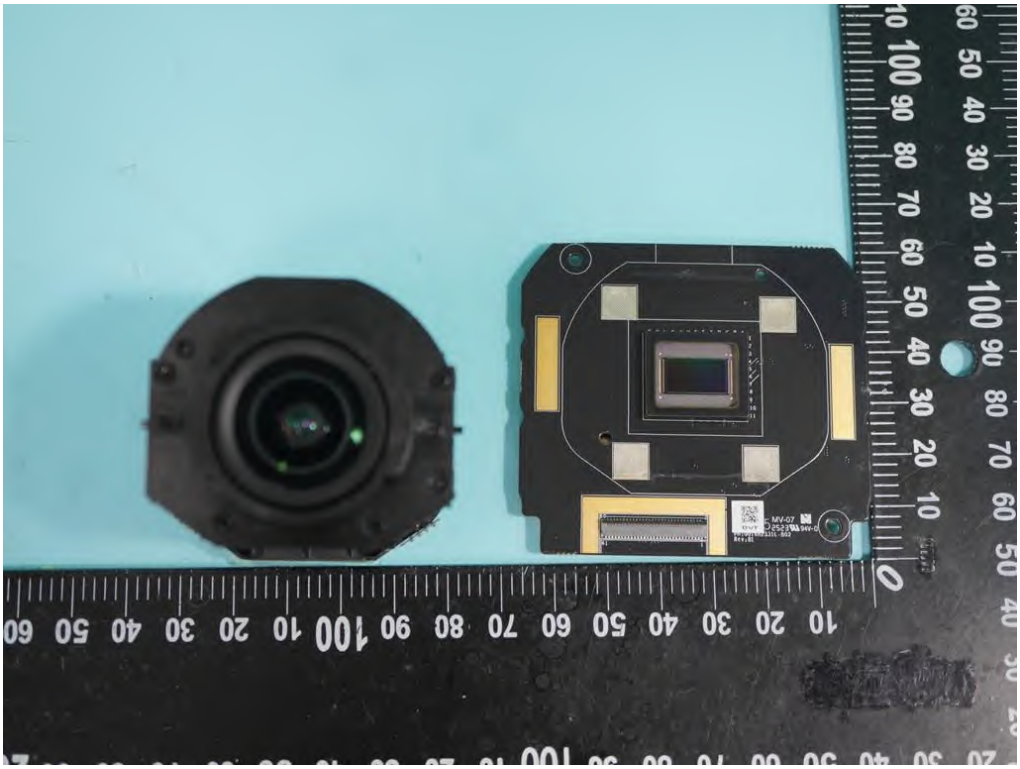





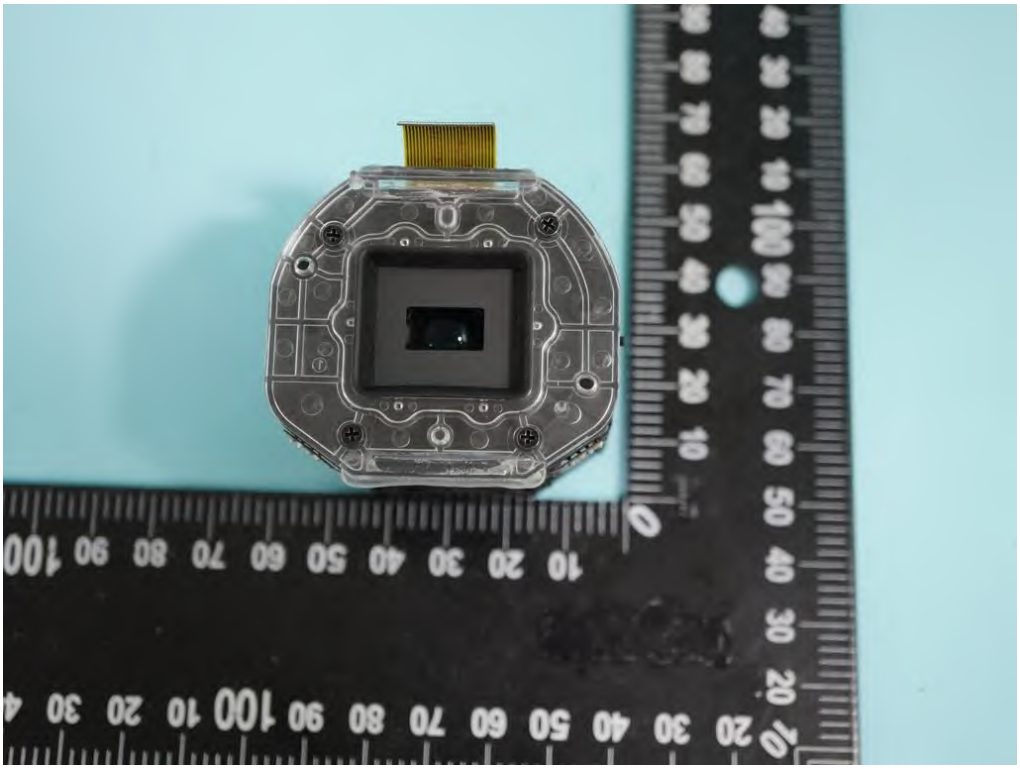


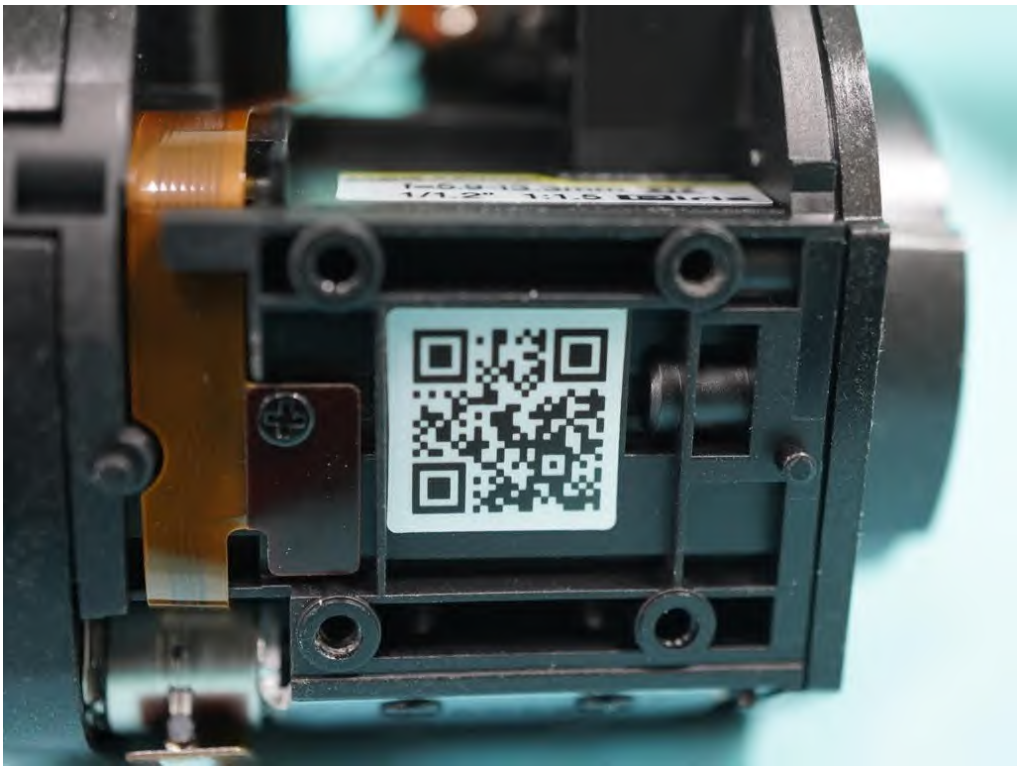




computar
MEGAPIXEL
f=5.9-13.3mm DN
1/1.2" 1:1.5 P iris

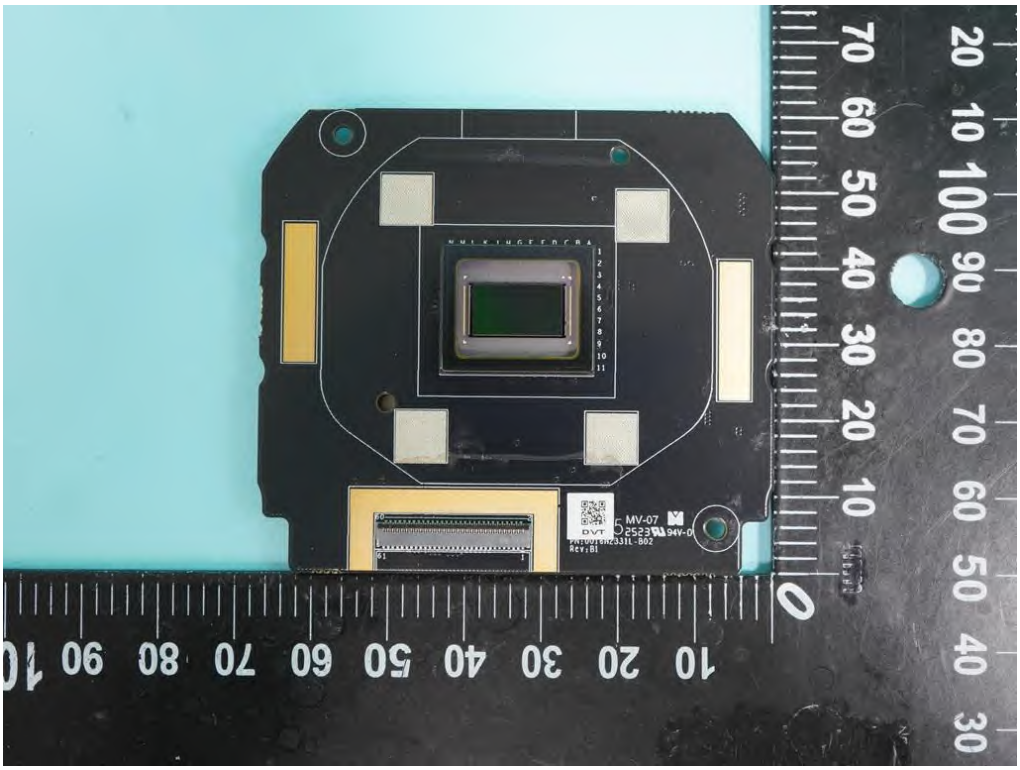


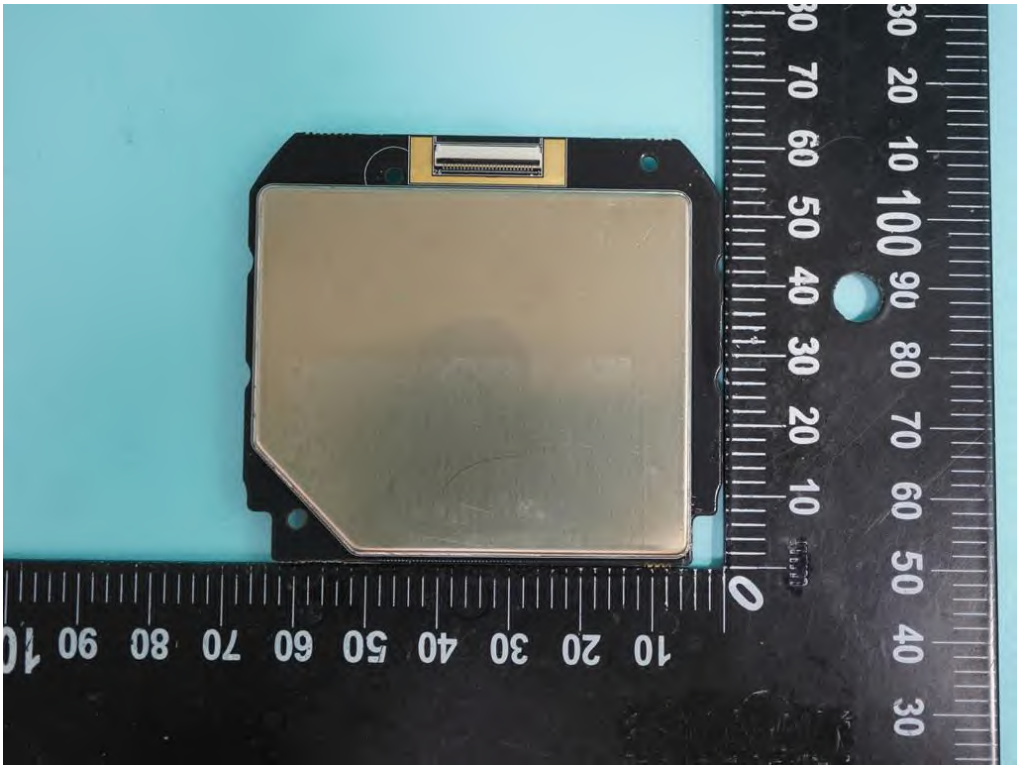


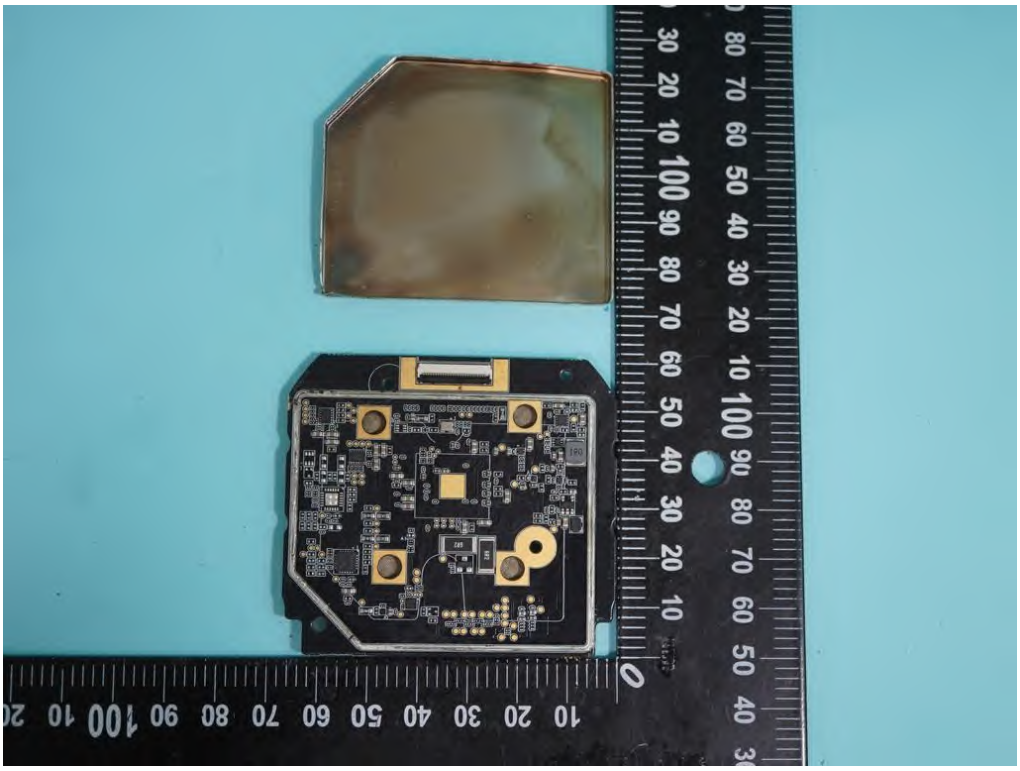

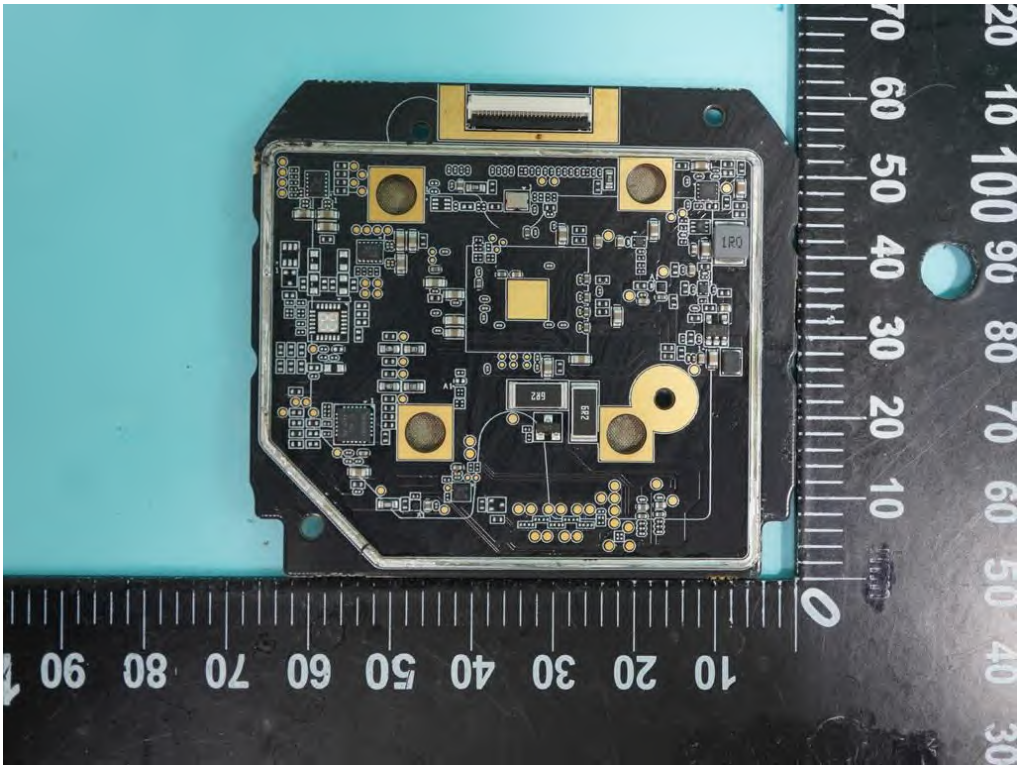


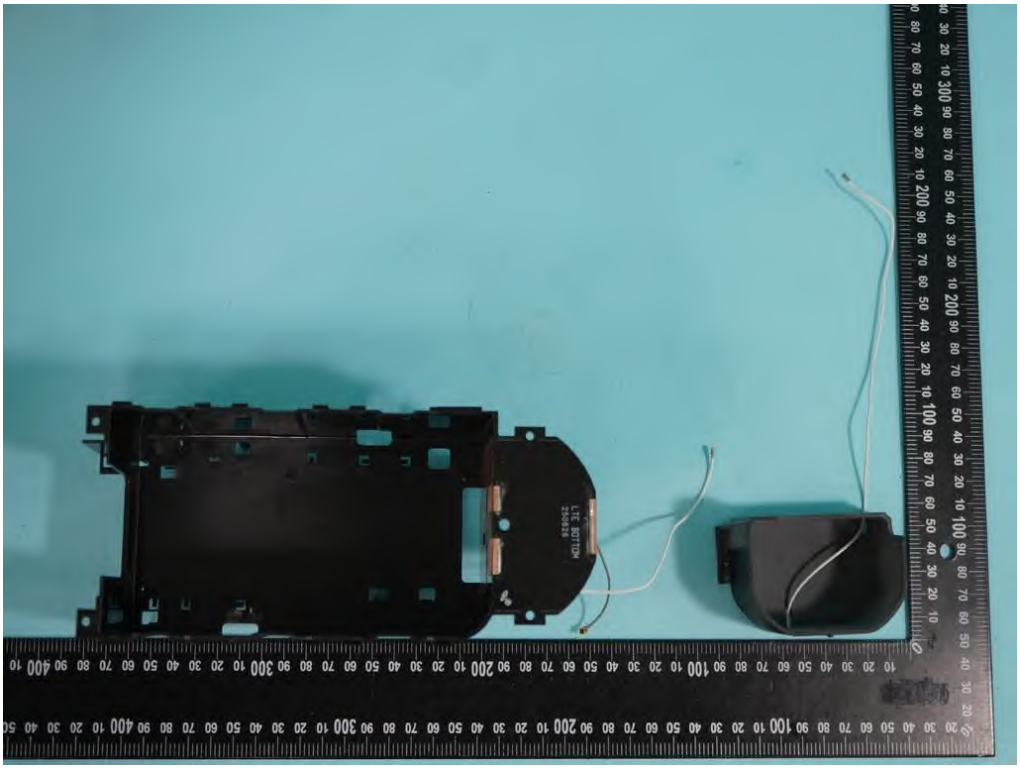


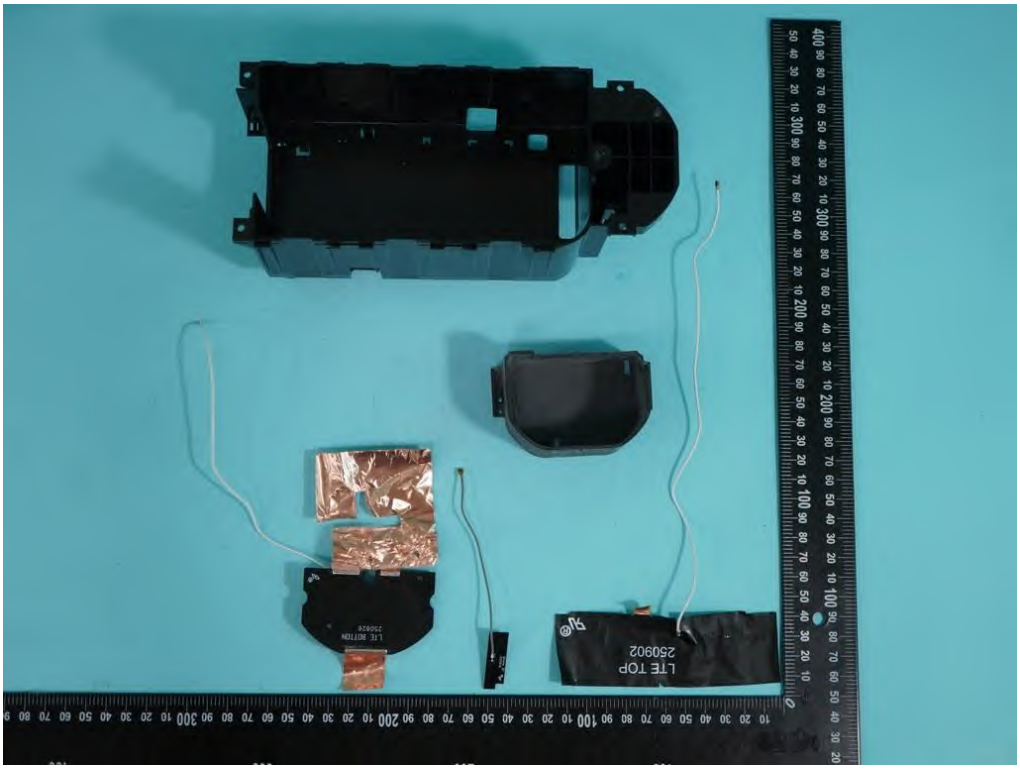

LTE TOP
250902

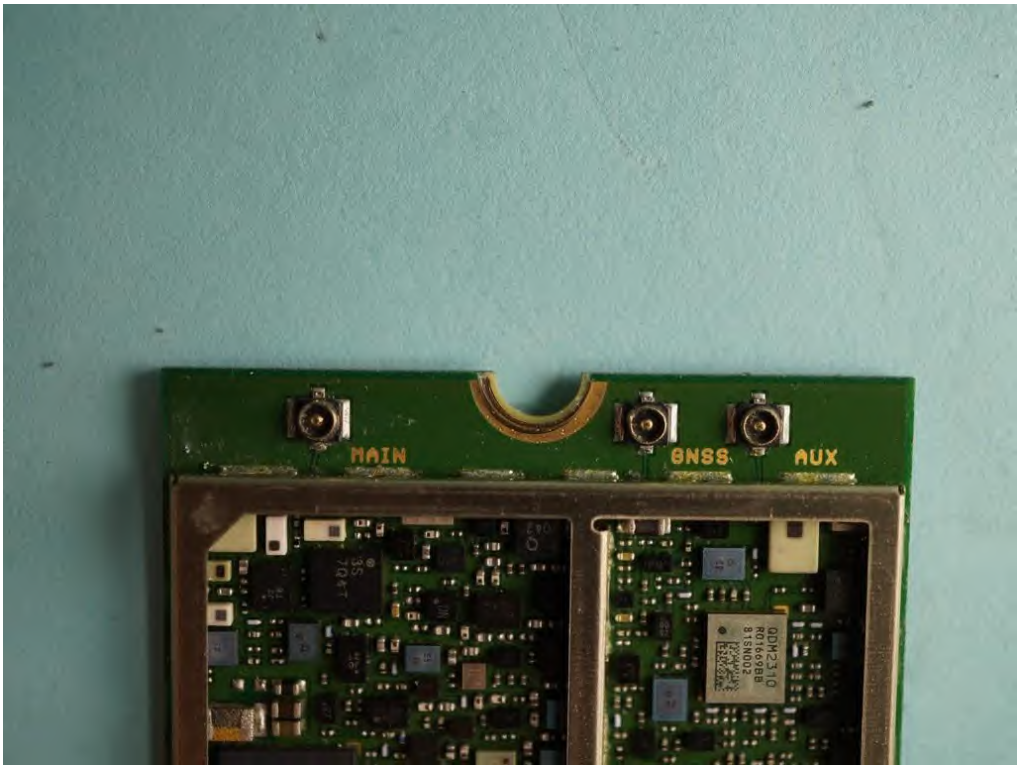
MAIN
GNSS
AUX

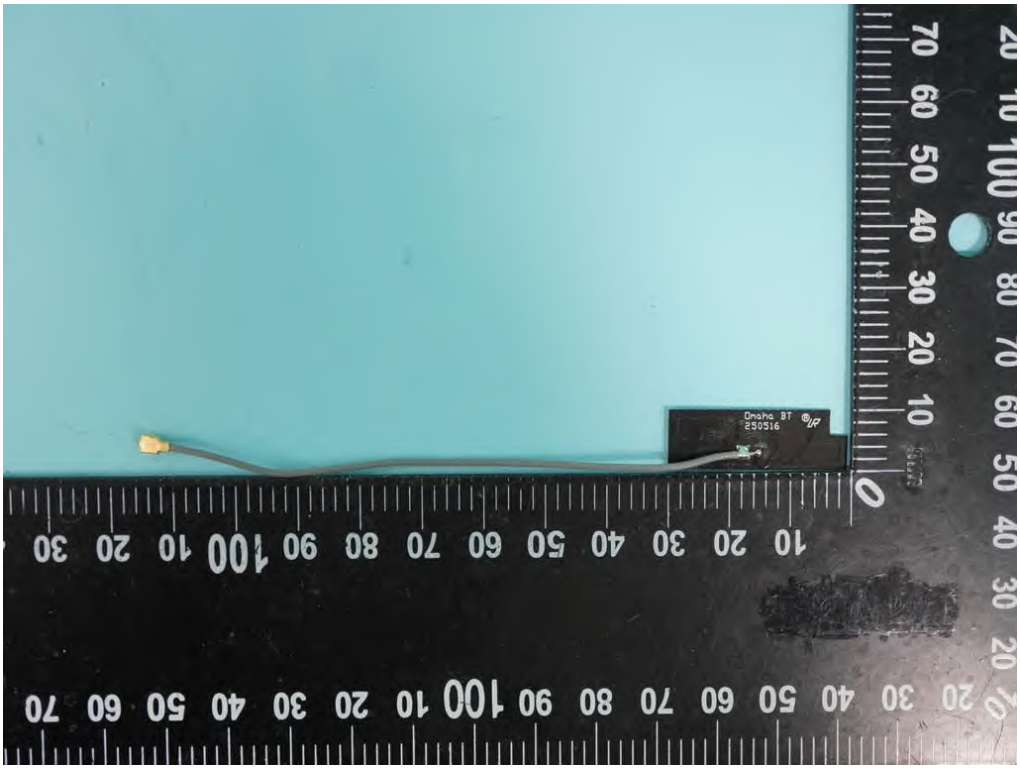




Omsha BT
250516

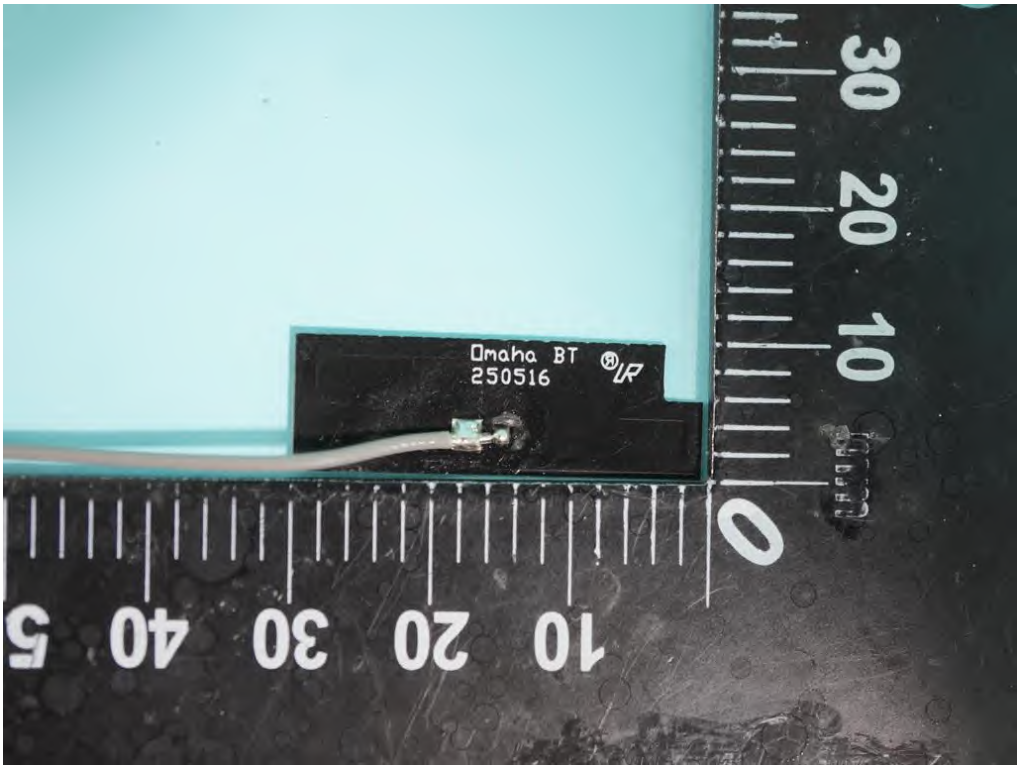
Omaha BT
250516

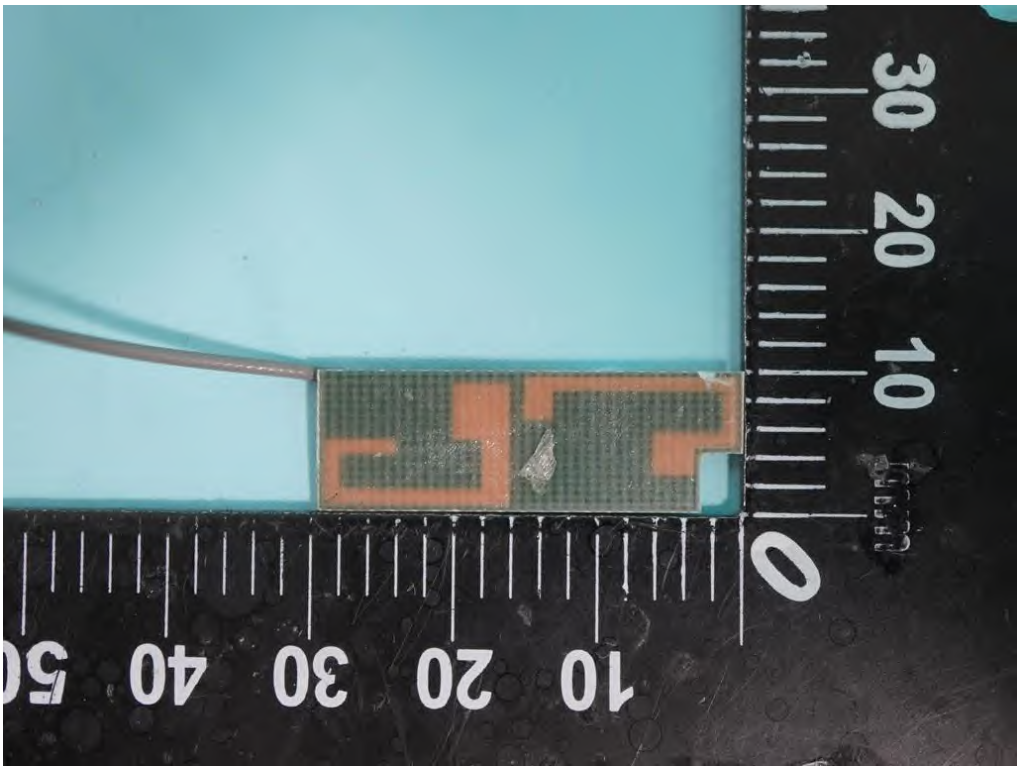

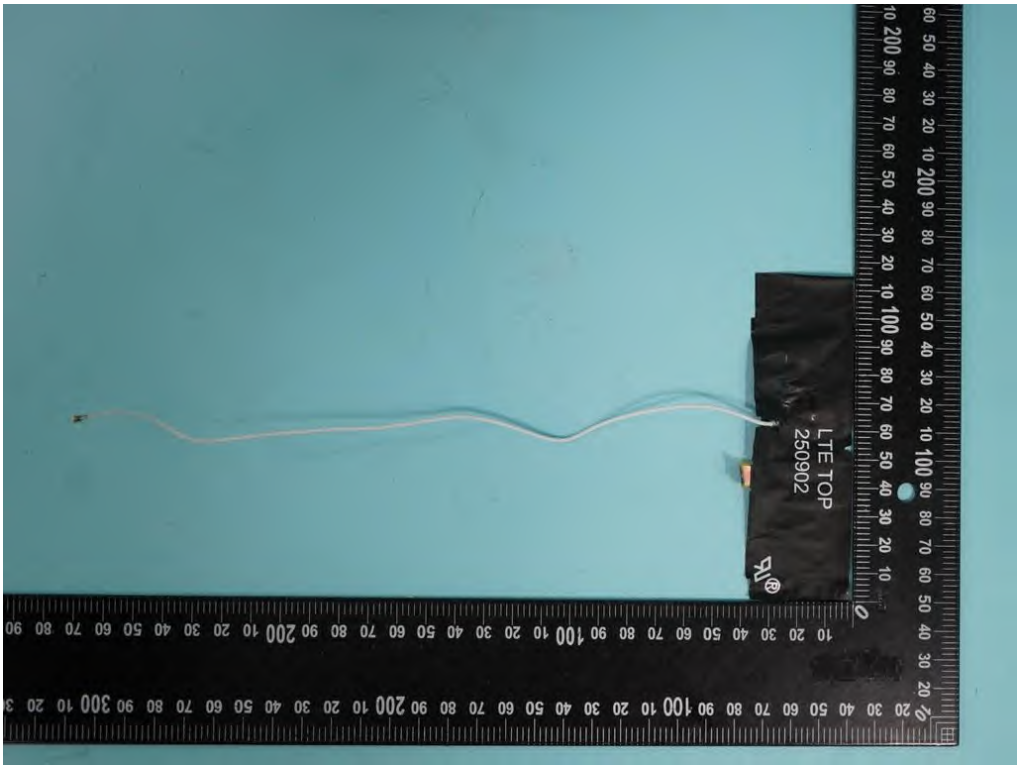




LTE TOP
250902

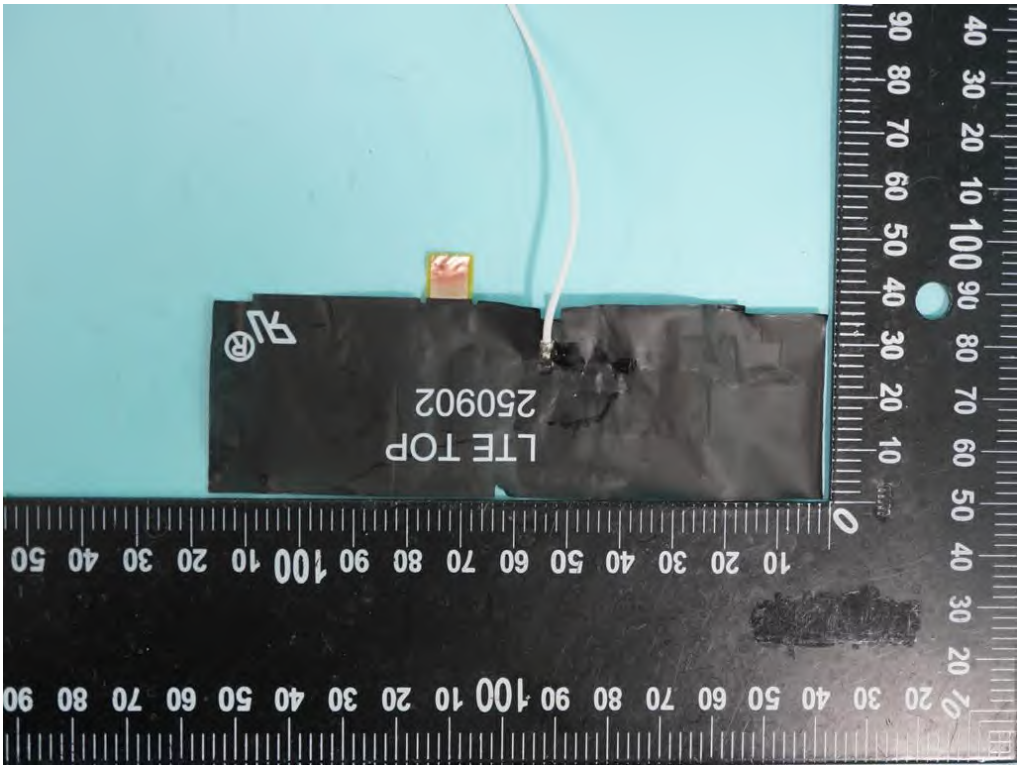

LTE TOP
250902





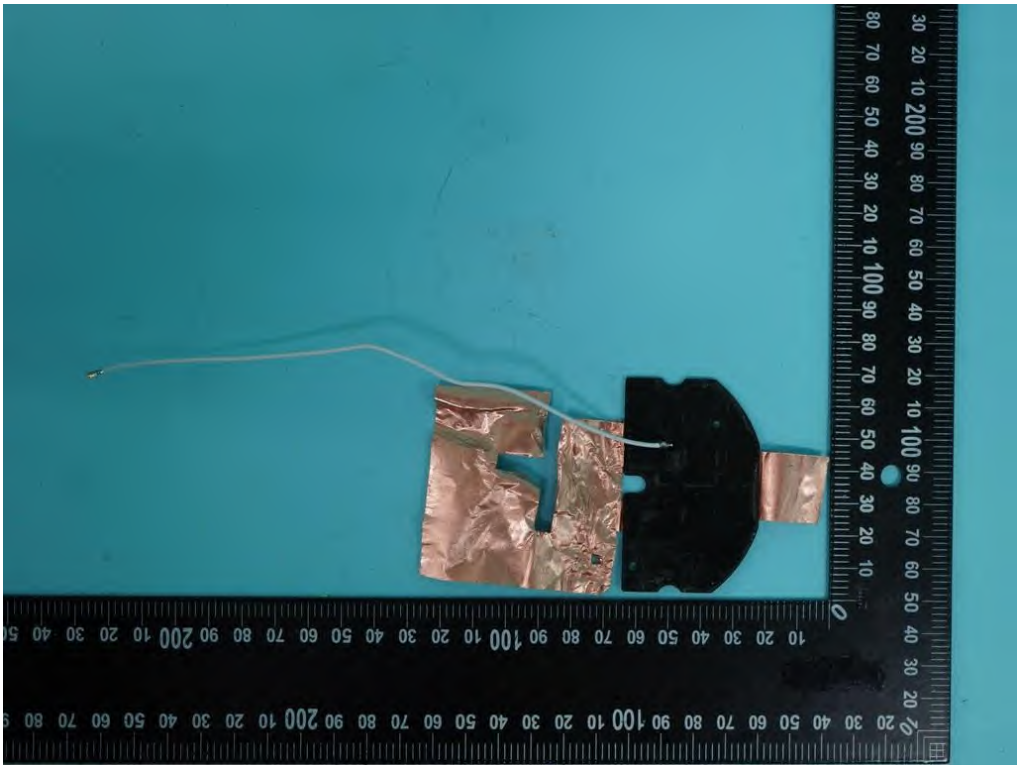

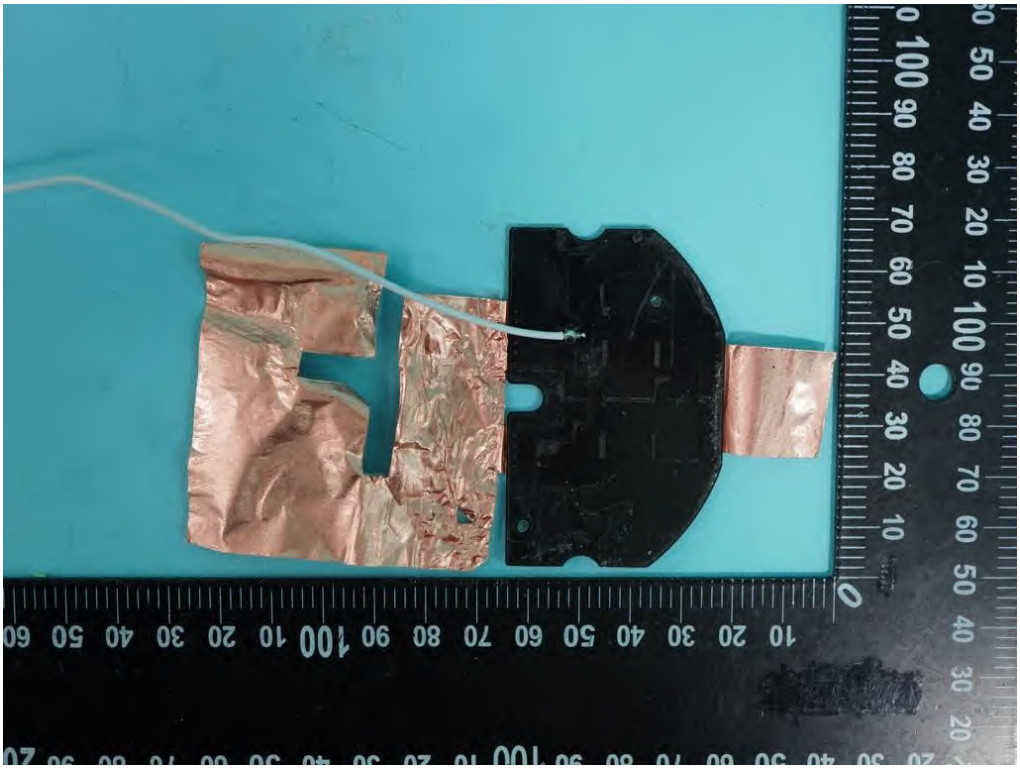

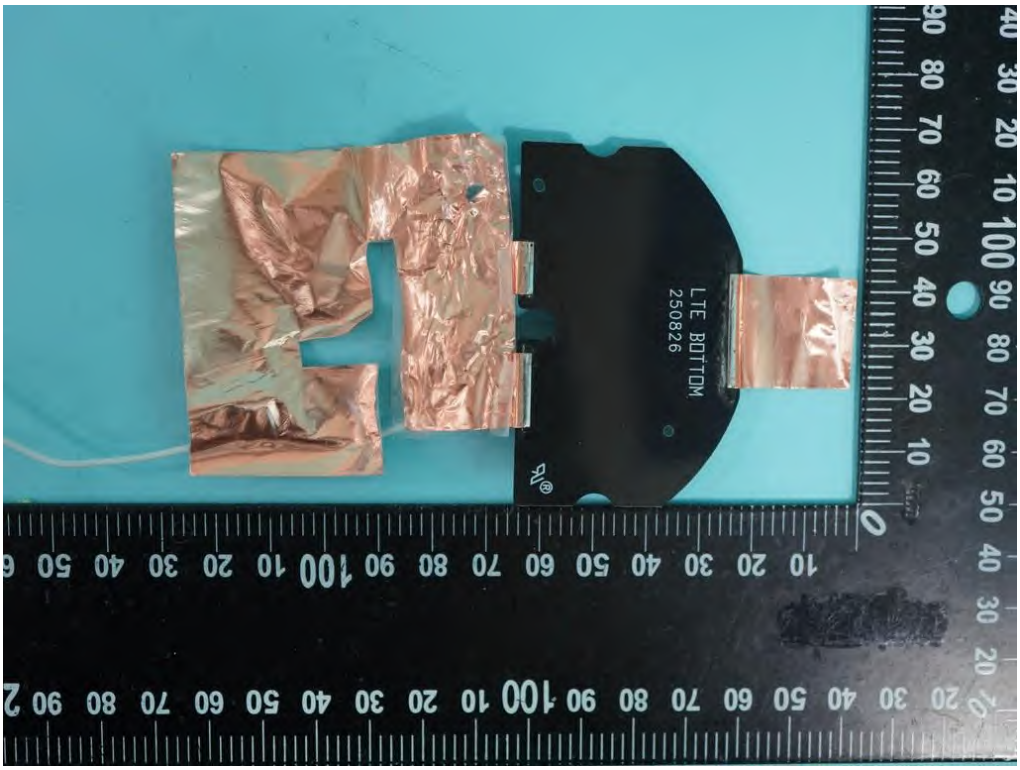
LTE BOTTOM
250826