



HuiZhou Speed Wireless Technology CO., LTD.
Taiwan Speed Wireless Technology CO.,LTD.

Antenna Specification Datasheet

Customer Name : Chicony

Date : 2025.10.23.

OEM P/N	0790A2331L-B01
SPEED P/N	F-0Q-51-6010-001-00
Version	S01

Prepared by	Signed by	Approved by Customer
RF Engineer	Gary Chen	
ME Engineer	陈晓斌	
Reviewed by	Signed by	
RF Manager	Eison Chou	
ME Manager	駱增周	
Project Manager	Owen	

天線製造商(中文): 惠州碩貝德无线科技股份有限公司

天線製造商地址(英文): Huizhou Speed Wireless Technology Co., Ltd.

天線製造商地址(中文): 广东省惠州市仲恺高新区东江高新科技产业园惠泽大道 138 号

天線製造商地址(英文): No.138 Huize Road, Hi-Tech Industrial Park of East River, Zhongkai Hi-tech District, Huizhou City, Guangdong Province

天線廠牌: SPEED

Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

Revision History

Date	Revision	Description of changes
2025-09-17	S01	First release

Antenna Specification Datasheet List

1. Test Criteria	3
1.1 Test setup, Processes and Criteria	3
1.2. Test Environment.....	3
1.2.1 Antenna Test Environment.....	4
1.2.2 Antenna Test Environment.....	4
1.2.3 Test Conditions	4
1.4 Antenna Drawing	5
2. Antenna Gain Specification	6
2.1 Antenna Requirements.....	6
2.2 Antenna Frequency Bands	6
3. S-Parameter Measurement Result.....	7
3.1. Reflection coefficient :	7
4. Antenna Performance Test	10
4.1 Antenna Measurement Antenna Gain Value	10
Appendi.....	12
Radiation characteristics of antennae Loaded in Host Platform 2400-2500MHz radiation characteristic.....	12

Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

1. Test Criteria

Test Criteria

Radiation gain measurement shall be made with the antennas installed in the intended notebook system. This specification evaluates performance of antenna at a system level with the antennas operating in a manner similar to customer use.

1.1 Test setup, Processes and Criteria

The gain measurement shall follow by following conditions:

- It is required that all the antenna gain to be measured spherically and computed by spatial average be computed of the resultant gain.
- During gain measurement, all other antennas not under test should be terminated by 50 Ohm load in end of cable.
- Space points of 3D gain measurement are increase by specific steps from Theta 0~180 degrees, and Phi, 0~360 degrees, as figure below. The increment steps are different steps are different by antenna functions, besides WiMAX defined in sections of WiMax antenna gain specifications, gain measurement to other function of antennas s should following steps table below.

Theta Start	15 degree	Phi Start	0 degree
Theta Stop	165 degree	Phi Stop	360 degree
Theta Increment	15 degree	Phi Increment	15 degree

1.2. Test Environment

The testing of antenna gain should be made at a CTIA qualified lab with an RF anechoic chamber with at least 3-meter separation from the receive antenna to the antenna under test. The antenna gain report from unqualified lab can't be referenced a passing. Besides, all test equipment including horn antennas, adapters, cables, network analyzers, and receivers shall be calibrated per manufacturer's minimum calibration requirements.

Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

1.4 Antenna Drawing

Antenna Type :PIFA

注意事項:

- 尺寸和公司管線依據標準: ASME Y14.3M-1994
- 3D 設計的 2D 圖面, 未指定尺寸的公差為 ± 0.15 毫米
- 尺寸檢驗 (100%) 參照客戶檢驗報告格式要求
- 關鍵尺寸檢查報告, 三個批次最低的 Cpk 為 1.4, Cp 為 1.8
- 完成的散裝是乾淨的, 沒有任何異物、污屑、油脂或其他的污染
- 用於組裝的材料必須符合 94 VTR-0 的易燃性等級
- 產品必須符合 RoHS 2.0 & 類似的有害物質限制

MARK NUMBER	DESCRIPTION	APPROVED	DATE	NOTE
	更新外形走线和线材	陈晓斌	24/9/18	
	更新线材	陈晓斌	24/9/20	
	更新外形走线	陈晓斌	24/11/08	
	更新外形走线和线长	陈晓斌	24/11/27	
	更新外形走线	陈晓斌	25/5/14	
	更新外形走线和线长	陈晓斌	25/8/22	
	更新料号	陈晓斌	25/8/22	

TITLE	LTE TOP	DESIGN	CHECK	DAY
PROJECT	Draho			DAY
PART NO	F-0Q-SI-6010-001-00	APPROVE		DAY
MODE	FOR DVT1 BUILD			DAY
SCALE	FREE			DAY
UNIT	MM			DAY

ITEM	PART NUMBER	PART NAME	QTY
3.	S-4S-FS-602P-001-00	NCF Connector Tube	1
2.	M-Z3-SI-6010-001-00	FPC, LTE TOP	1
1.	S-DI-SI-6010-001-V0	137mm COAXIAL CABLE ASSEMBLY / LTE MAIN	1

(CABLE LENGTH)

VCDNN + 尾代 (PEX)

CUSTOMER P/N : 0790A2331L-B01

HUIZHOU SPEED WIRELESS TECHNOLOGY CO., LTD.

惠州硕贝德无线科技股份有限公司

2. Antenna Gain Specification

In order to ensure compliance with customers and worldwide carrier specification, it's required that antenna gain should be measured to meet customers antenna specification. It should be measured spherically and spatial average be computed of the resultant gain, and cover all the necessary required frequencies listed in the latest antenna format.

2.1 Antenna Requirements

This specification evaluates performance of antenna at a system level with the antennas operating in a manner similar to customer use. It is required that all the antenna gain should be measured spherically and a spatial average be computed of the resultant gain.

2.2 Antenna Frequency Bands

The following table documents the frequency requirements of antenna assemblies for customers products.

Description	Frequency
LTE	617 -960MHz
	1710-2690MHz
	3550-3700MHz

Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

3. S-Parameter Measurement Result

3.1. Reflection coefficient :

- (1) Instrument : Network Analyzer.
- (2) Setup :
- (3) Calibrate the Network Analyzer by one port calibration using O.S.L. calibration kits.
- (4) Connect the antenna under test to the Network Analyzer.
- (5) Measure the S11(reflection coefficient) shown in Fig. 1.
- (6) Generally, the S11 is less than -10dB to ensure the 90% power into antenna and only less than 10% power back to system.


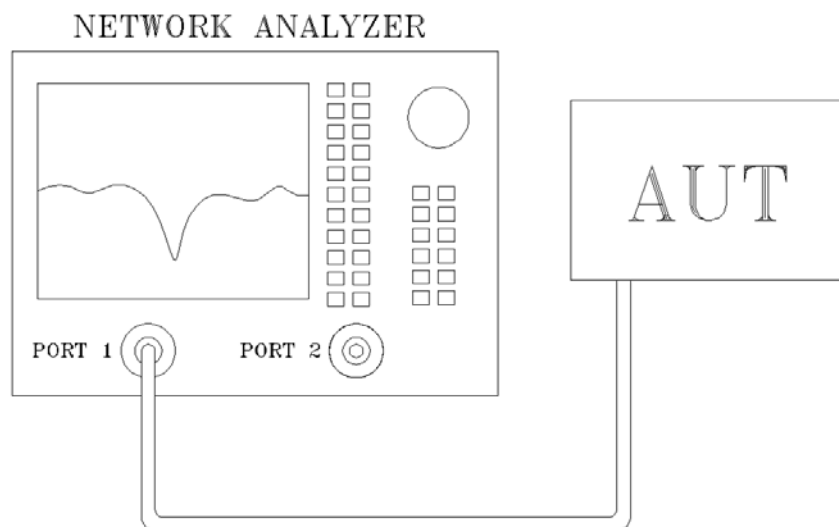



Fig.1 Antenna measured in Network Analyzer

Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

TOP VSWR

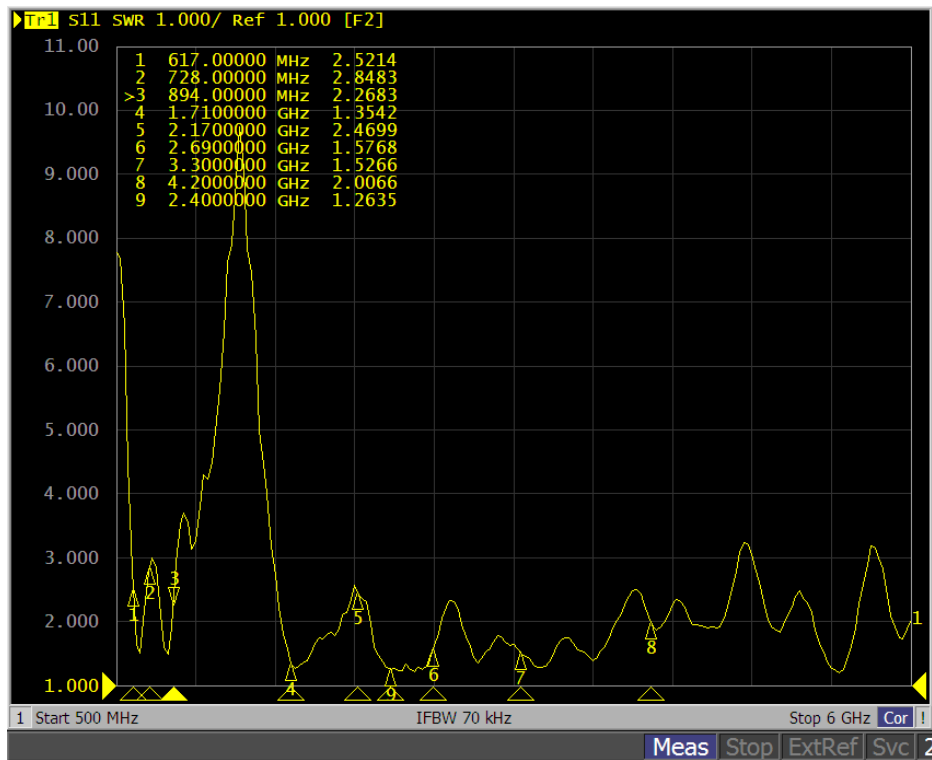


TOP&BOTTOM Isolation

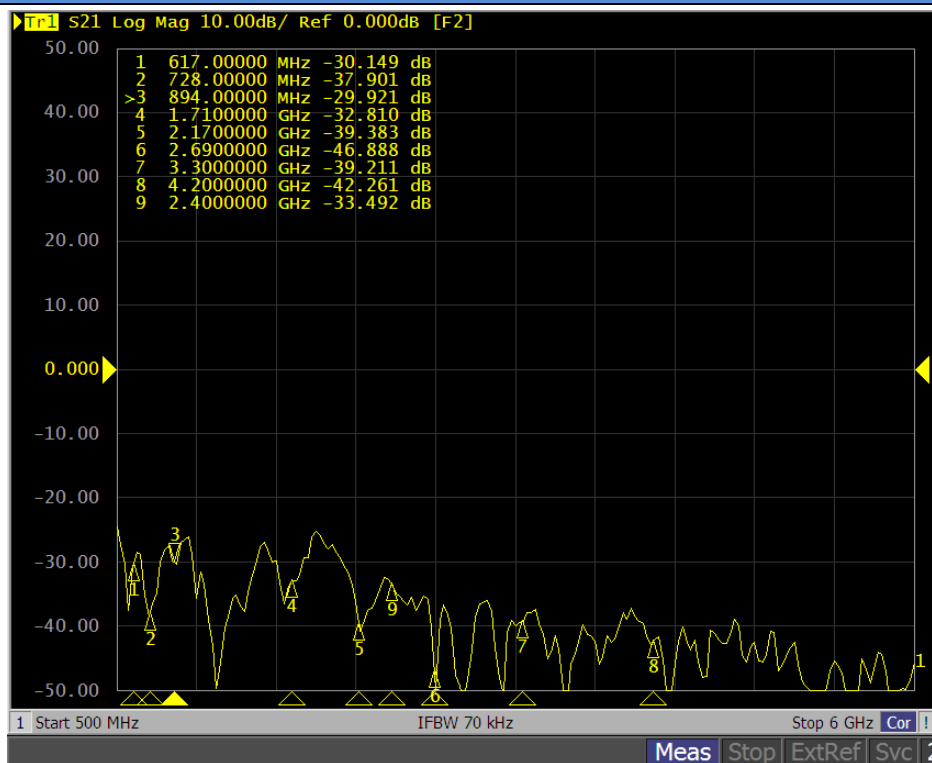


Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

TOP&BT Isolation

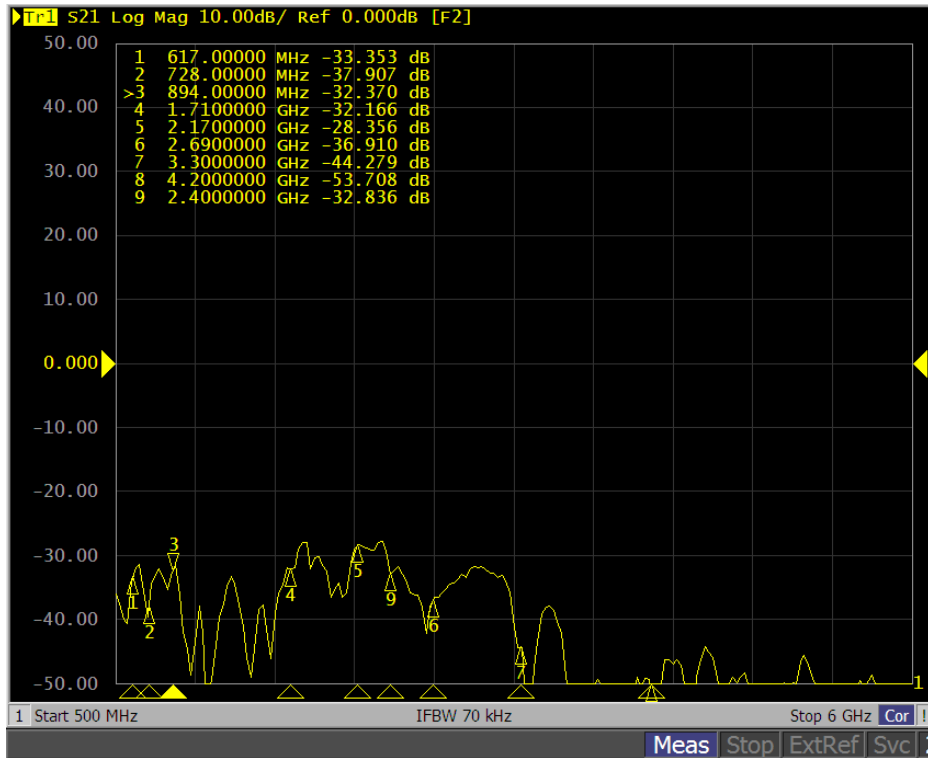

BOTTOM&BT Isolation

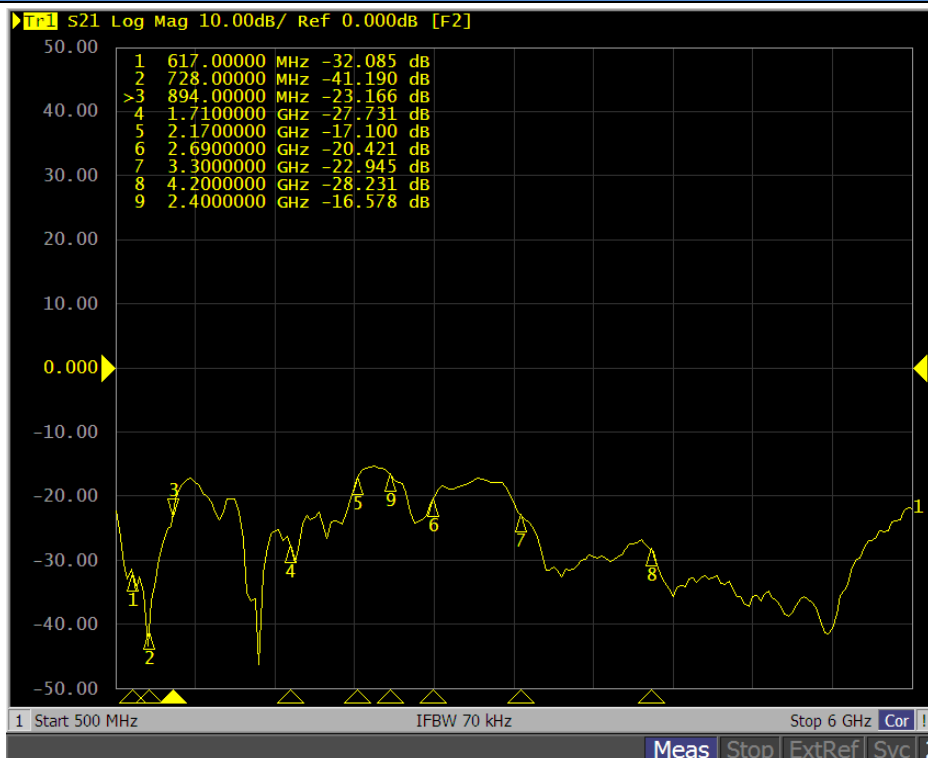

Project Name : Omaha

Author : Gary Chen

File Name :
0790A2331L-B01(F-0Q-51-6010-001-00)

Date : 2025.10.23

Rev : S01

Check : Eison Chou

HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.

4. Antenna Performance Test

4.1 Antenna Measurement Antenna Gain Value

Frequency (MHz)	Peak Gain (dBi)	3D-Avg Gain (dB)	Efficiency (%)
617	-2.81	-6.60	21.89
634.5	-2.6	-6.51	22.33
652	-2.36	-6.38	23.00
663	-1.91	-6.16	24.22
680.5	-1.02	-6.50	22.36
698	-0.53	-5.33	29.31
699	-0.57	-5.31	29.43
707.5	-0.38	-5.27	29.73
716	-0.38	-5.12	30.78
729	-0.5	-4.59	34.79
737.5	-0.15	-4.73	33.63
746	0.14	-4.46	35.83
824	-0.77	-5.53	27.98
836.5	-0.67	-5.27	29.75
849	0.26	-4.92	32.24
869	0.45	-4.89	32.42
881.5	-0.57	-5.09	30.98
894	-0.71	-5.37	29.07
915	-0.46	-5.67	27.07
920	-0.37	-5.54	27.94
940	0.14	-5.09	31.01
960	-0.07	-4.86	32.63
1710	1.66	-3.01	49.98
1732.5	1.95	-2.69	53.85
1745	1.87	-2.45	56.89

Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

1755	2.1	-2.26	59.38
1780	2.38	-2.36	58.13
1850	2.97	-2.61	54.81
1880	2.73	-2.55	55.61
1882.5	2.53	-2.57	55.39
1910	2.86	-2.70	53.74
1915	2.62	-2.72	53.41
1930	2.82	-2.82	52.29
1960	3.01	-2.75	53.04
1962.5	2.92	-2.74	53.17
1990	2.34	-3.00	50.14
1995	2.07	-2.59	55.05
2110	1.71	-3.11	48.83
2132.5	0.28	-3.39	45.84
2155	0.94	-4.12	38.73
2200	0.83	-4.11	38.82
2496	0.89	-1.52	70.43
2593	2.08	-1.71	67.44
2690	1.78	-2.41	57.47
3550	0.63	-1.77	66.46
3625	0.88	-2.22	59.93
3700	0.95	-3.32	46.59





Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

Appendi





Radiation characteristics of antennae Loaded in Host Platform

2400-2500MHz radiation characteristic

746MHz

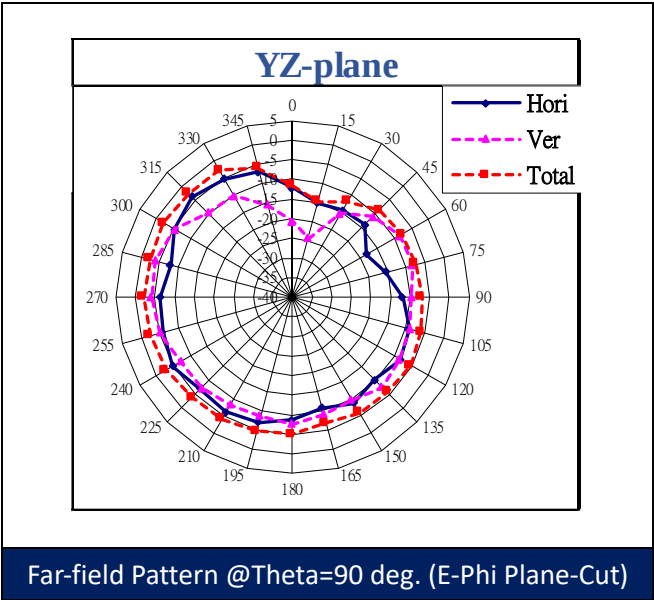
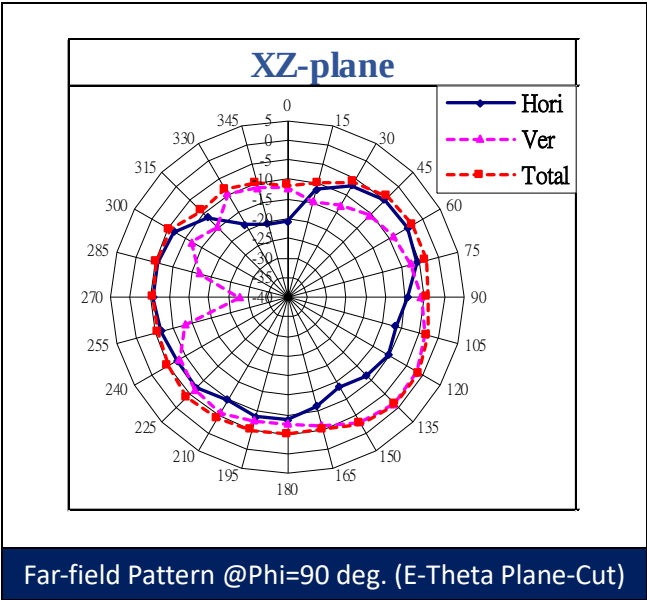
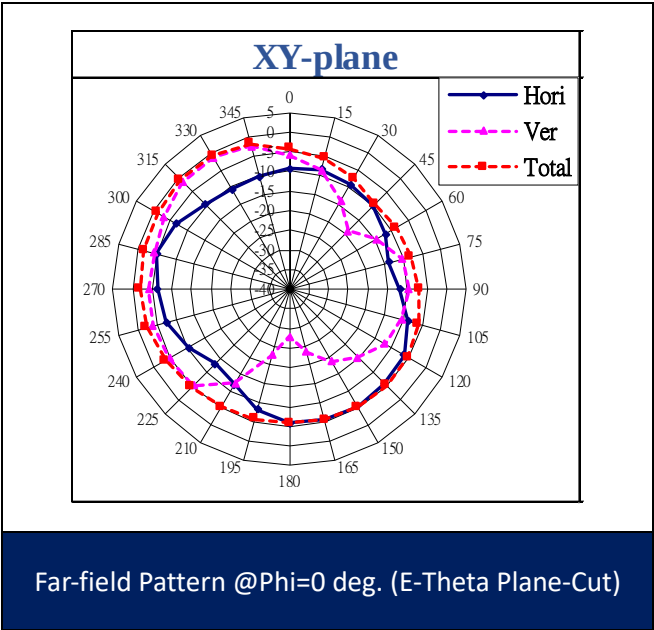
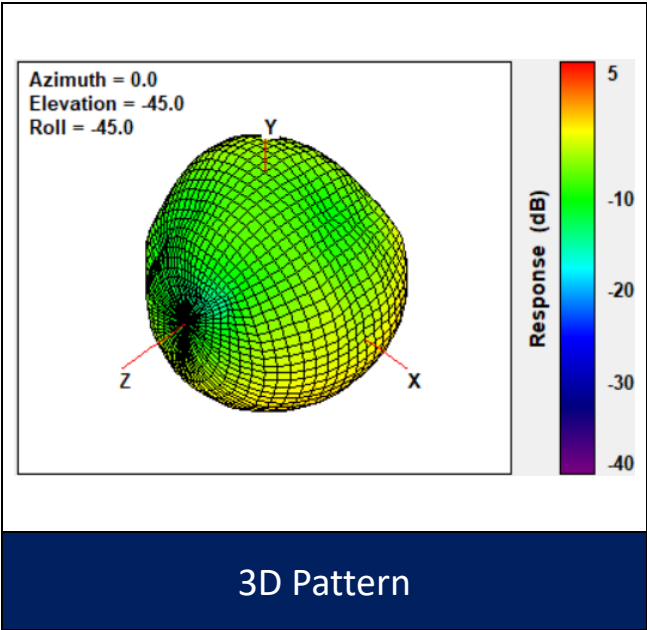


Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

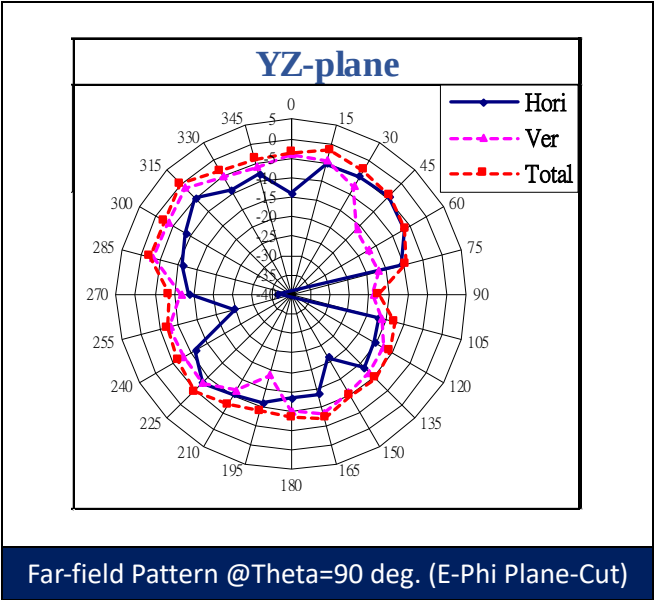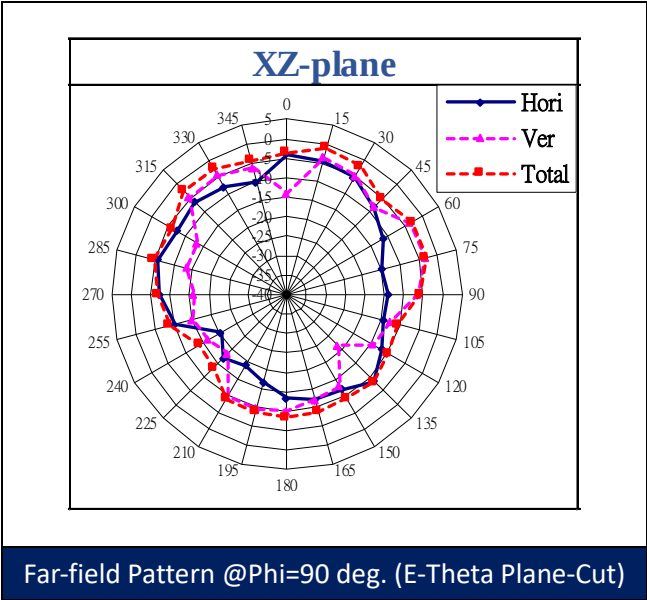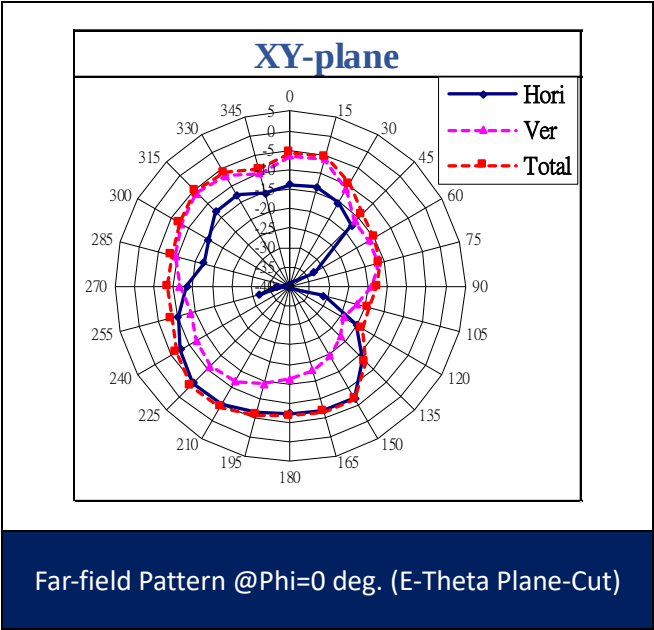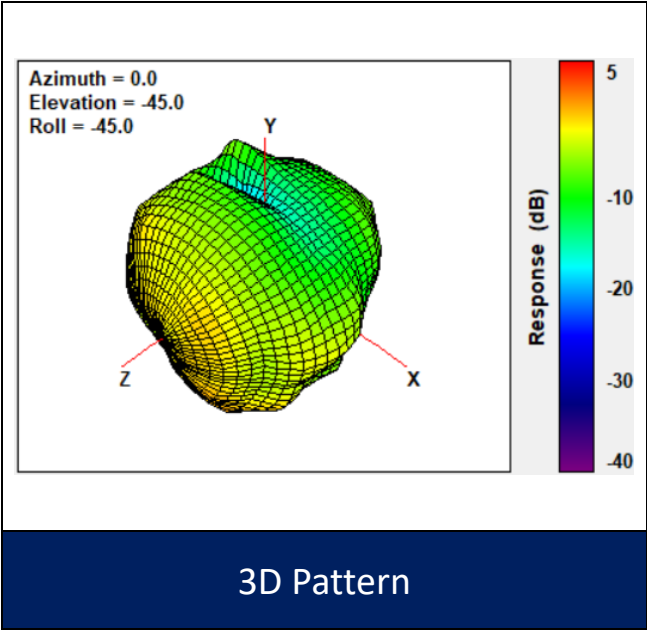

Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

3625MHz

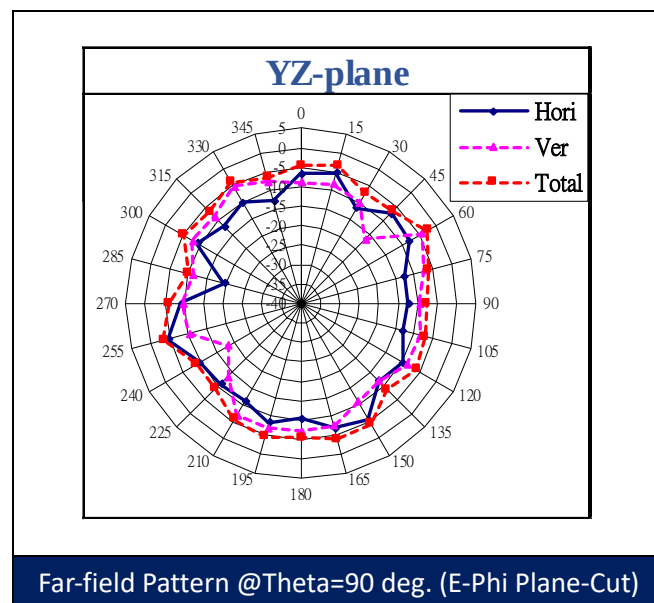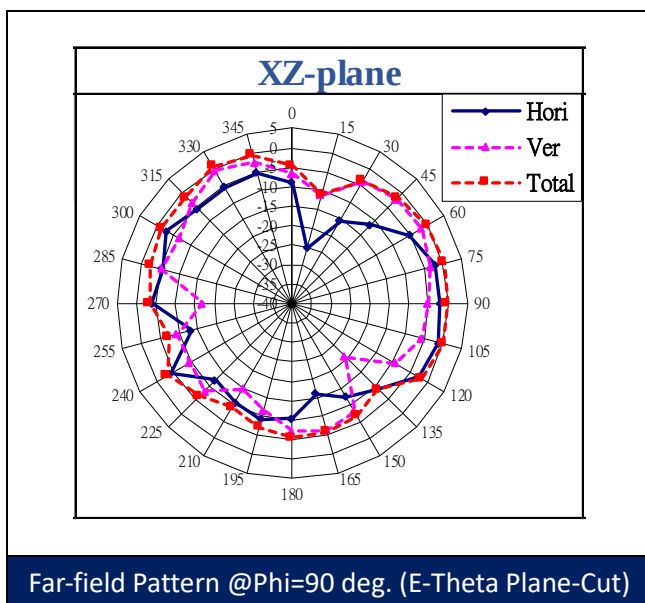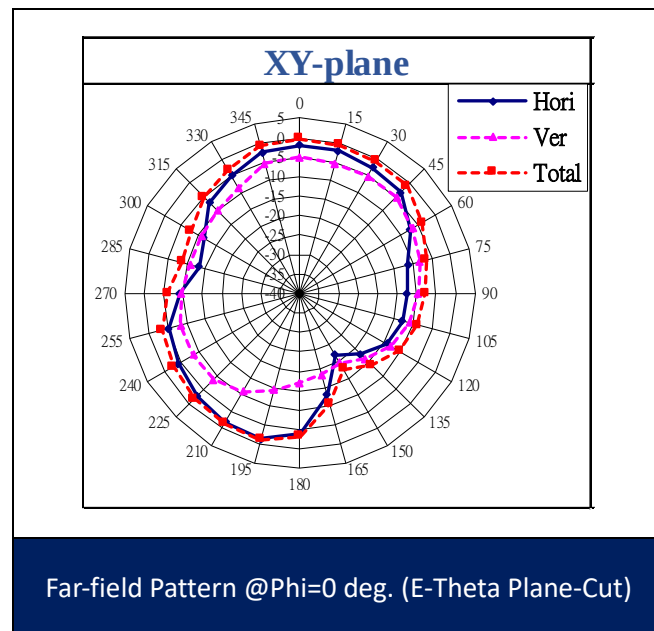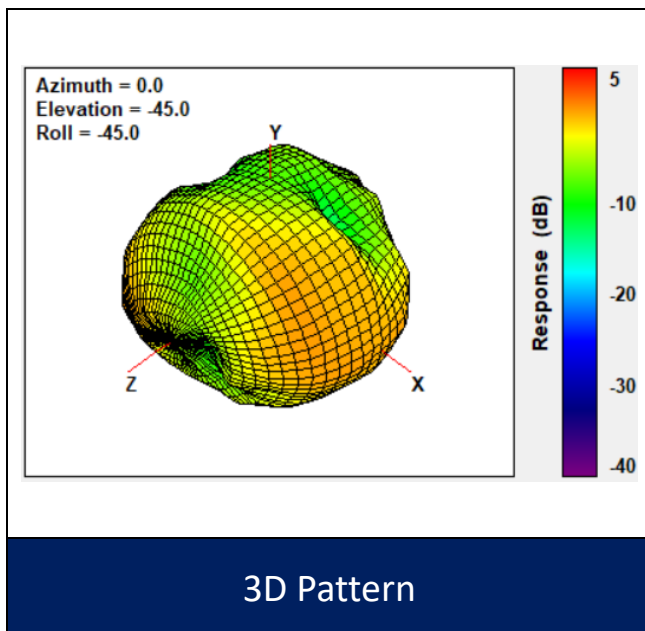

Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-B01(F-0Q-51-6010-001-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		