


1.2.1 Antenna Test Environment

The RF anechoic chamber must be lined with absorptive material rated at a minimum frequency range from 700 MHz to 6 GHz.

1.2.2 Antenna Test Environment

The RF anechoic chamber must be lined with absorptive material rated at a minimum frequency range from 0.7 GHz to 6 GHz.

1.2.3 Test Conditions

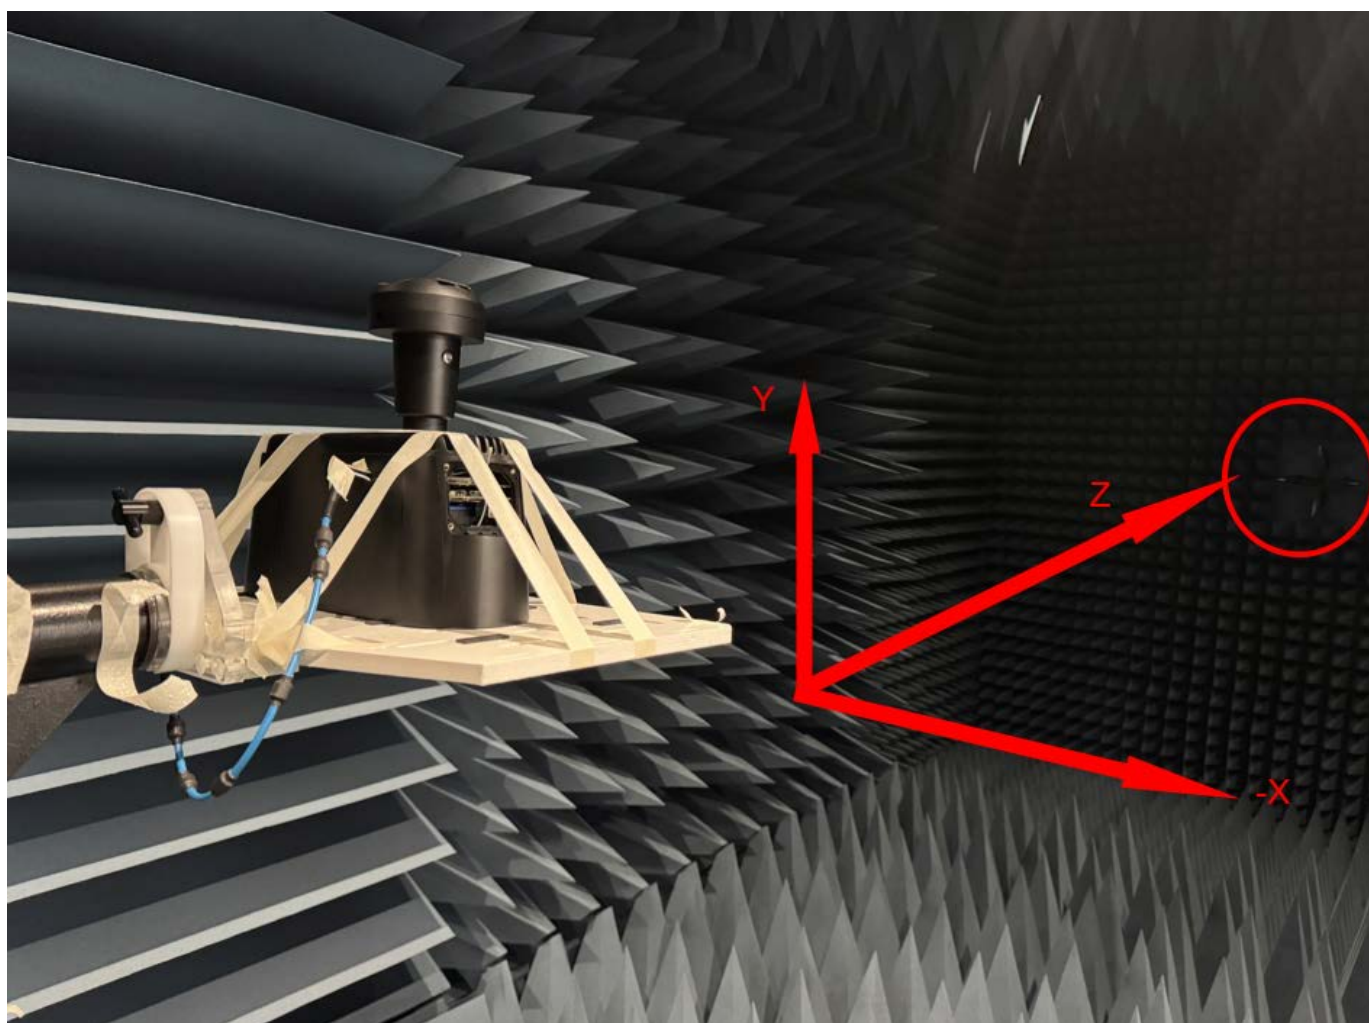

Project Name : Omaha	Author : Gary Chen	File Name : 0790A2331L-C06(F-0Q-51-6010-002-00)
Date : 2025.10.23	Check : Eison Chou	
Rev : S01		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		