


Test report No:
25B0460R.702B

FCC TEST REPORT

Product Name	Insta360 X6
Trademark	Insta360
Model and /or type reference	CINSABXA
FCC ID	2AWWH-CINSABXA
Applicant's name / address	Arashi Vision Inc. 11th Floor, Building 2, Jinlitong Financial Center, Bao'an District, 518000 Shenzhen, Guangdong, China
Test method requested, standard	47 CFR FCC Part 15 (Section 15.247) ANSI C63.10: 2020
Verdict Summary	IN COMPLIANCE
Tested By (name / position & signature)	Tim Cao / Project Manager 
Approved by (name / position & signature)	Frank He / Technical Manager 
Date of issue	2026-03-03
Report Version	V1.0
Report template No.	Template_FCC Part 15C-RF-V1.0

INDEX

	page
Competences and Guarantees	4
General conditions	4
Document History	6
Test Summary	7
Used Equipment	8
Uncertainty	10
1 General Information.....	11
Power setting in test.....	11
2 Description of Test Setup	12
3 Verdict summary section	13
3.1 Standards.....	13
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	13
4 Test Results.....	14
4.1 AC Power Line Conducted Emission	14
4.1.1 Limit	14
4.1.2 Test Setup.....	14
4.1.3 Test Procedure.....	14
4.2 Emissions in restricted frequency bands	15
4.2.1 Limit	15
4.2.2 Test Setup.....	16
4.2.3 Test Procedure.....	17
4.3 Emissions in non-restricted frequency band.....	18
4.3.1 Limit	18
4.3.2 Test Setup.....	18
4.3.3 Test Procedure.....	18
4.4 Duty cycle	错误!未定义书签。
4.4.1 Limit	错误!未定义书签。
4.4.2 Test Setup.....	错误!未定义书签。
4.4.3 Test Procedure.....	错误!未定义书签。
4.5 Radiated Emission Band Edge	19
4.5.1 Limit	19
4.5.2 Test Setup.....	19
4.5.3 Test Procedure.....	19
4.6 20dB Emission Bandwidth	20
4.6.1 Limit	20

4.6.2	Test Setup.....	20
4.6.3	Test Procedure.....	20
4.7	Fundamental emission output power	21
4.7.1	Limit	21
4.7.2	Test Setup.....	21
4.7.3	Test Procedure.....	21
4.8	Carrier Frequency Separation.....	22
4.8.1	Limit	22
4.8.2	Test Setup.....	22
4.9.3	Test Procedure	22
4.9	Time of Occupancy	23
4.9.1	Limit	23
4.9.2	Test Setup.....	23
4.9.3	Test Procedure	23
4.10	Number of hopping Frequencies.....	24
4.10.1	Limit	24
4.10.2	Test Setup.....	24
4.10.3	Test Procedure.....	24
4.11	Antenna Requirement.....	25
4.11.1	Limit	25
4.11.2	Antenna Connector Construction	25
5	Test setup photo and EUT Photo.....	26
	20dB Emission Bandwidth.....	27
	Maximum Conducted Output Power	35
	Carrier Frequency Separation	36
	Time of Occupancy	38
	Number of Hopping Frequencies.....	42
	Band edge measurements	44
	Conducted Spurious Emission.....	56
	Duty cycle	72
	Emissions in Restricted Bands	76
	AC Power Line Conducted Emission	98

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location A	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Test Facility A	A2LA (Certificate No. 3235.01) CNAS (Certificate No. L5313) FCC - Designation Number: CN1199 Test Firm Registration Number: 566524 ISED - CAB identifier: CN0040 IC#: 4075B
Test Location B	No. 8213, Fanhua Avenue, Baohe District, Hefei City, Anhui Province, China
Test Facility B	A2LA (Certificate No. 6579.01) CNAS (Certificate No. L21125) FCC - Designation Number: CN1231 Test Firm Registration Number: 690292 ISED - CAB identifier: CN0175 IC#: 32222
Date(receive sample)	Nov. 21, 2025
Date (start test)	Nov. 25, 2025
Date (finish test)	Dec. 23, 2025

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

5. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, it is not necessary to account the uncertainty associated with the measurement result.



DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
25B0460R.702B	V1.0	Initial issue of report.	2026-03-03

TEST SUMMARY

Requirement – Test Item	Standard(s)	Location	Verdict	Remark
20dB Emission Bandwidth	FCC 15.247(a)(1)	A	PASS	Test data please refer to Appendix
Maximum conducted output power	FCC 15.247(b)(1)	A	PASS	Test data please refer to Appendix
Carrier Frequency Separation	FCC 15.247(a)(1)	A	PASS	Test data please refer to Appendix
Time of Occupancy (Dwell Time)	FCC 15.247(a)(1)(iii)	A	PASS	Test data please refer to Appendix
Number of Hopping Frequencies	FCC 15.247(a)(1)(iii)	A	PASS	Test data please refer to Appendix
Band edge measurements	FCC 15.247(d)	B	PASS	Test data please refer to Appendix
Conducted Spurious Emission	FCC 15.247(d) FCC 15.209	A	PASS	Test data please refer to Appendix
Duty Cycle	ANSI C63.10	A	PASS	Test data please refer to Appendix
Emissions in Restricted Bands	FCC 15.247(b)(3)	B	PASS	Test data please refer to Appendix
AC Power Line Conducted Emission	FCC 15.207	A	PASS	Test data please refer to Appendix
Antenna Requirement	FCC 15.203	PASS	PASS	---
Notes:				
1. Radiated Emission and Radiated Emission Band Edge were completed at Test Location B, and other tests were completed at Test Location A.				

USED EQUIPMENT

Test Location A: Conducted Test – TR8

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Wireless Connectivity Tester	R&S	CMW 270	102593	2025.05.10	2026.05.09
High and low temperature and fast	ASTUOD	ASTD-FBT-225K	N/A	2025.03.15	2026.03.14
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2025.06.17	2026.06.16
MAX Signal Analyzer	Keysight	N9020B	MY59050482	2025.05.10	2026.05.09
RF Control Unit	Tonscend	JS0806-2	22G8060594	2025.01.26	2026.01.25
Vector Signal Generator	R&S	SMM 100A	101853	2025.09.20	2026.09.19
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2025.05.10	2026.05.09
Test Software	Tonscend	TS1120	JS1120-3	N/A	N/A

Test Location A: Radiated Emission(9KHz-1GHz) / AC2

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Anechoic chamber	Quietek	9m*6m*6m	AC2	2024.07.07	2027.07.06
EMI Test Receiver	R&S	ESCI	100573	2025.01.11	2026.01.10
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2025.03.24	2026.03.23
Temperature/Humidity Meter	RTS	RTS-1909	THM-021	2025.04.30	2026.04.29
Dekra test software	Dekra	N/A	N/A	N/A	N/A

Test Location A: AC Power Line Conducted Emission / TR1

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Anechoic chamber	Quietek	9m*6m*6m	AC2	2024.07.07	2027.07.06
EMI Test Receiver	R&S	ESCI	100573	2025.01.11	2026.01.10
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2025.03.24	2026.03.23
Temperature/Humidity Meter	RTS	RTS-1909	THM-021	2025.04.30	2026.04.29
Dekra test software	Dekra	N/A	N/A	N/A	N/A

Test Location B: Radiated Emission Band Edge / AC103

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Fully-anechoic chamber	Maorui	9m*6m*6m	AC103	2023.08.23	2028.08.22
MAX Signal Analyzer	Keysight	N9020B	MY63490118	2025.08.08	2026.08.07
Horn Antenna	RF SPIN	DRH18-E	KV2D11A18ES	2025.09.06	2026.09.05
Low Noise Amplifier	Tonscend	TAP01018048S	AP23J8060307	2025.10.17	2026.10.16
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	01312	2025.10.18	2026.10.17
Low Noise Amplifier	ESE	LNA1840	LNA23070301	2025.10.17	2026.10.16
Temperature/Humidity Meter	RITERS	RTS-8S	029	2025.08.25	2026.08.24
Temperature/Humidity Meter	RITERS	RTS-8S	010	2025.08.25	2026.08.24
Test Software	Tonscend	J536	JS36-RSE	N/A	N/A

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item Test Location A	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.8 dB 150kHz~30MHz: 2.4 dB
Peak Power Output	± 1.3 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.5 dB 300MHz~1GHz: 3.6 dB Vertical: 30MHz~200MHz: 3.6 dB 300MHz~1GHz: 3.5 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.0 dB Vertical: 1GHz~18GHz: 4.8 dB Horizontal: 18GHz~26.5GHz: 5.3 dB Vertical: 18GHz~26.5GHz: 4.9 dB
RF antenna conducted test	± 1.3 dB
Carrier Frequency Separation	± 1.0 kHz
Number of Hopping Frequencies	± 1.0 kHz
Time of Occupancy (Dwell Time)	± 0.10 us
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 1.0 kHz
Occupied Bandwidth	± 1.0 kHz
Power Density	± 1.3 dB

Test item Test Location B	Uncertainty
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 4.9 dB 300MHz~1GHz: 4.9 dB Vertical: 30MHz~200MHz: 4.9 dB 300MHz~1GHz: 4.9 dB
Radiated Emission(1GHz~40GHz)	Horizontal: 1GHz~18GHz: 6.0 dB Vertical: 1GHz~18GHz: 5.8 dB Horizontal: 18GHz~40GHz: 6.0 dB Vertical: 18GHz~40GHz: 5.8 dB
Radiated Emission Band Edge	± 6.0 dB

1 GENERAL INFORMATION


Product Name	Insta360 X6	
Model No.	CINSABXA	
Trademark.....	Insta360	
FCC ID.....	2AWWH-CINSABXA	
Hardware Version.....	V0.0.6	
Software Version.....	V0.5.118	
Manufacturer	Arashi Vision Inc.	
Manufacturer Address	11th Floor, Building 2, Jinlitong Financial Center, Bao'an District, 518000 Shenzhen, Guangdong, China	
Power Supply	3.91 Vdc, EUT is equipped with an adapter to power it via AC/DC.	
SN	RF Conducted	BXEALSCMYPTVU
	RSE	BXEALXS9KW4XD
Wireless specifiction.....	Bluetooth	
Operating frequency range(s).....	2402~2480MHz	
Type of modulation.....	GFSK	
Number of channels	79	
Data Rate.....	GFSK 1Mbit/s, Pi/4 DQPSK 1Mbit/s, 8DPSK 3Mbit/s	
Antenna type.....	FPC	
Antenna Gain	Ant1: 1.6 dBi; Ant2: -1.7 dBi	
Remark: 1.As above information is provided and confirmed by the applicant. DEKRA is not liable to the accuracy, suitability, reliability or/and integrity of the information. 2.We have evaluated each antenna and both ANT 1 and ANT 2 mode, only worst data shown in report.		

Power setting in test

Mode	Power setting
BR / EDR	Default

2 DESCRIPTION OF TEST SETUP

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
(1) Notebook	Think pad x220	Lenovo	Adapter
(2) Ethernet cable	N/A	N/A	N/A
(3) Ethernet cable	N/A	N/A	N/A
Software	Type / Version	Manufacturer	Supplied by
ADB	N/A	N/A	N/A

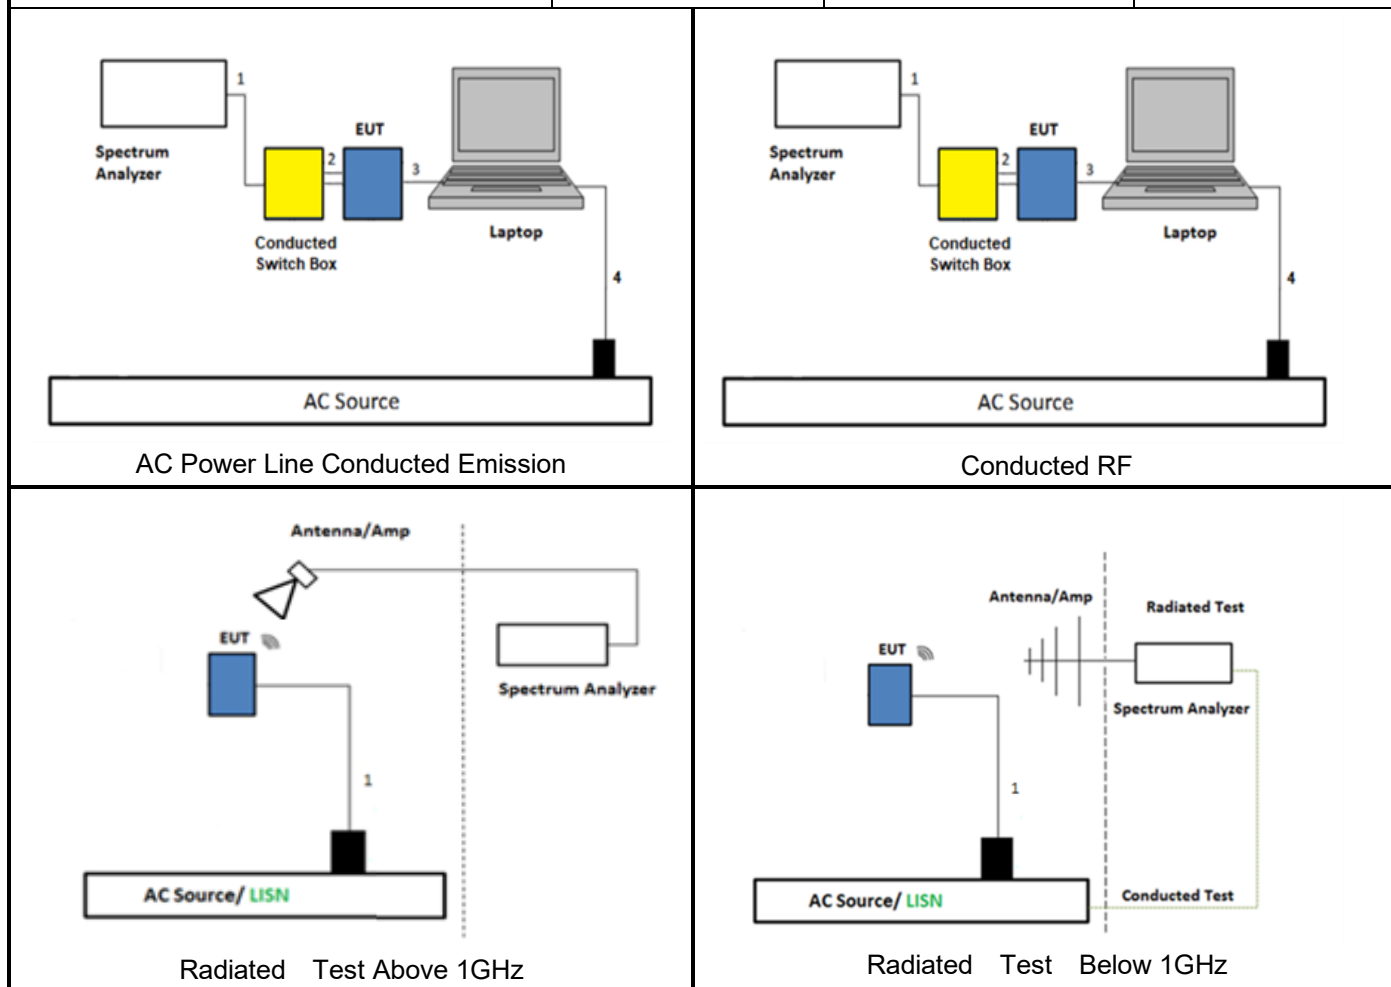

Accessories Information	Cable		
	Length used during test [m]	Attached during test	Shielded
(2) Ethernet cable	1	☒	☒
(3) Ethernet cable	8	☒	☒

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2020	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01V05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: PASS


4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50

¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

4.1.2 Test Setup

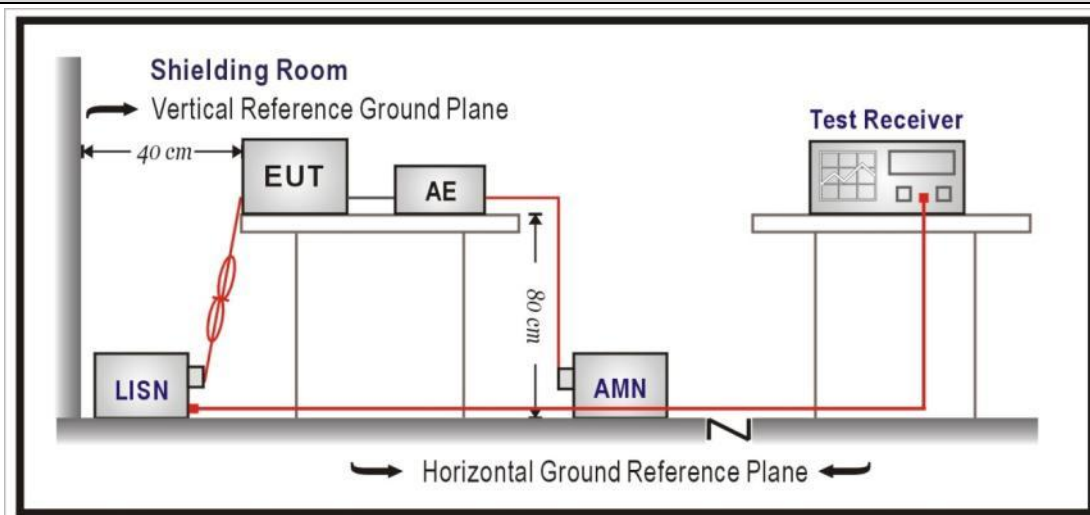

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.205; 15.209

Restricted Bands of operation for FCC

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6
13.36 – 13.41	--	--	--

Restricted Band Emissions Limit

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation


factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

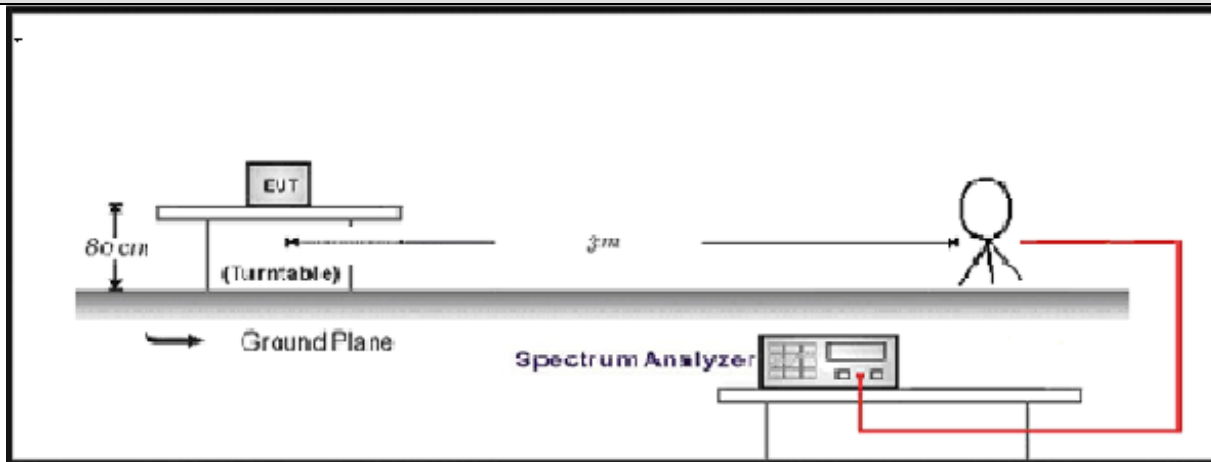

30MHz-1GHz Test Setup:

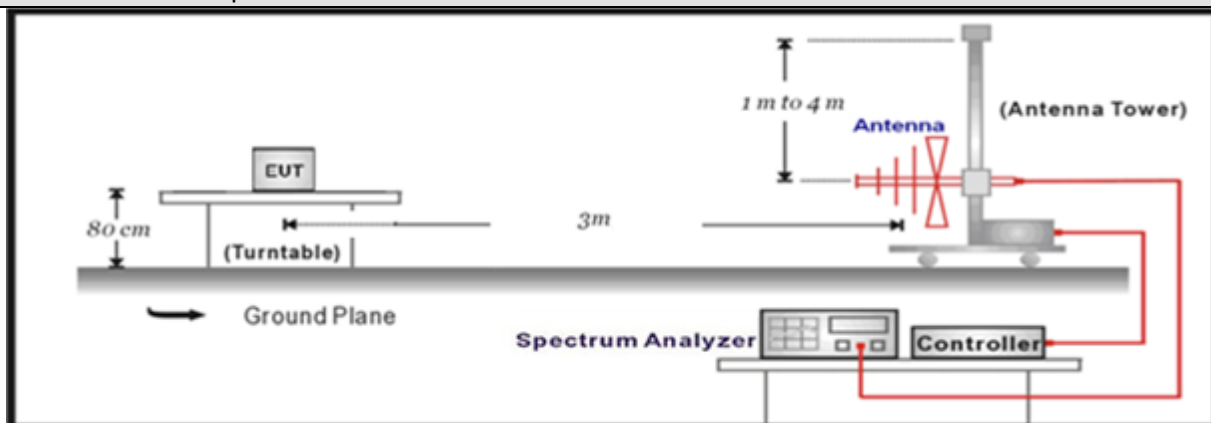

Above 1GHz Test Setup:

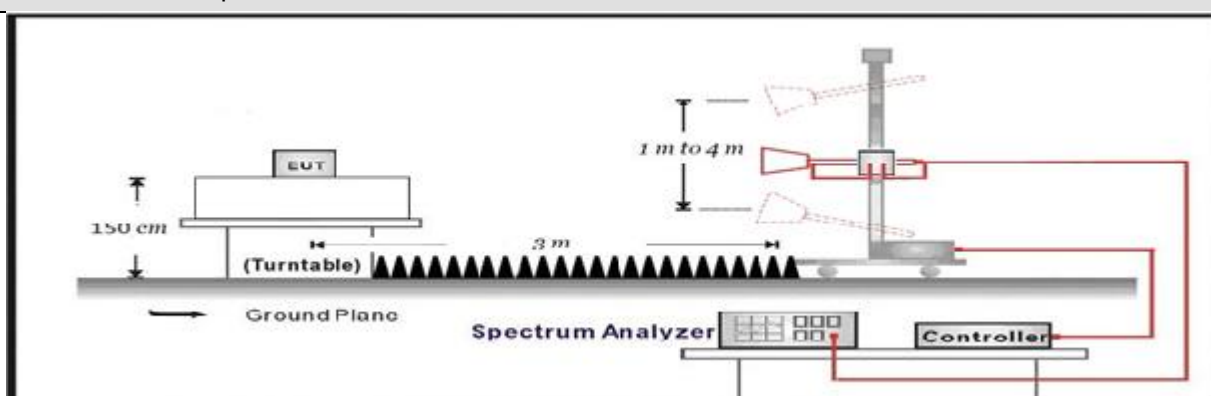

4.2.3 Test Procedure


	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	6.3	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.3 Emissions in non-restricted frequency band**VERDICT: PASS****4.3.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

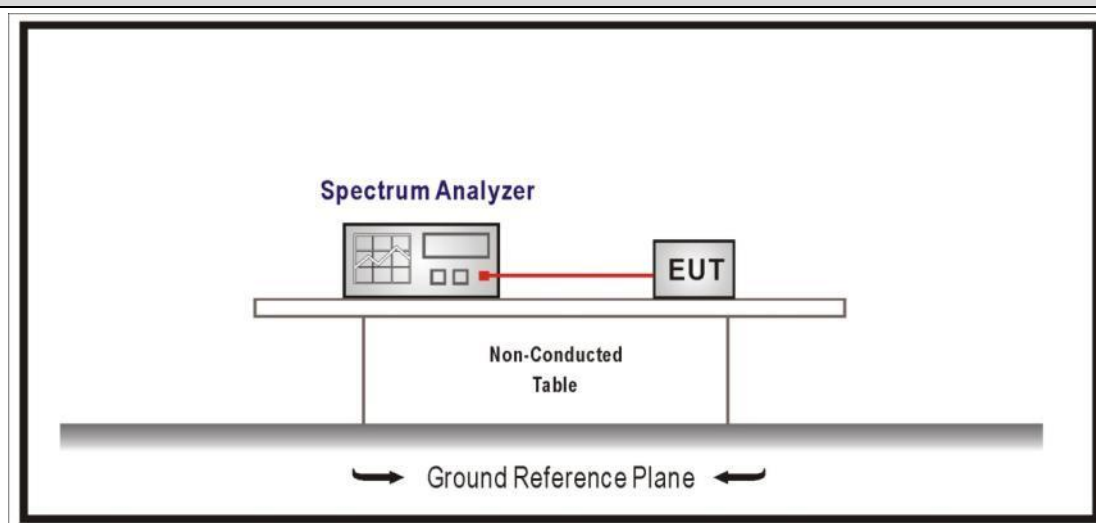4.3.2 Test Setup**4.3.3 Test Procedure**

References Rule	Chapter	Description
☒ ANSI C63.10	7.8.7	Conducted spurious emissions test methodology
☒ ANSI C63.10	7.8.7.1	General
☒ ANSI C63.10	7.8.7.2	Band-edges


4.4 Radiated Emission Band Edge**VERDICT: PASS****4.4.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.205, 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.4.2 Test Setup

Above 1GHz Test Setup:

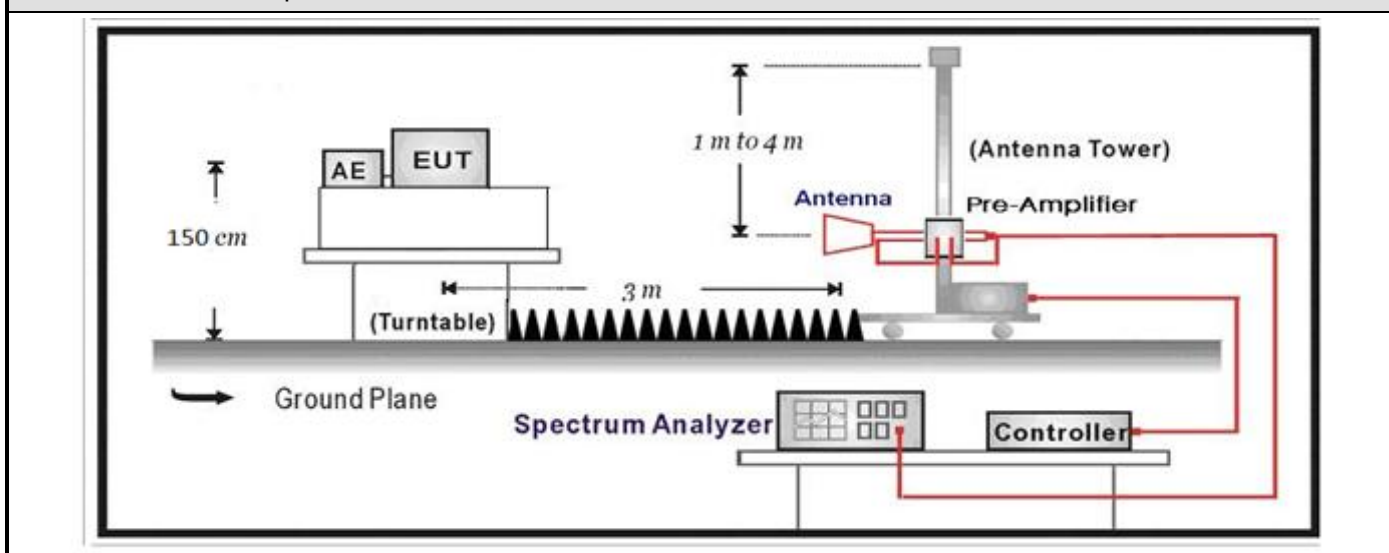**4.4.3 Test Procedure**

	References Rule	Chapter	Description
☒	ANSI C63.10	7.8.8	Band-edge testing


4.5 20dB Emission Bandwidth**VERDICT: PASS****4.5.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(2)
-----------------	---

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

Standard	ANSI C63.10 Paragraph 6.7
-----------------	---------------------------

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs. The occupied bandwidth should be within the required frequency range.

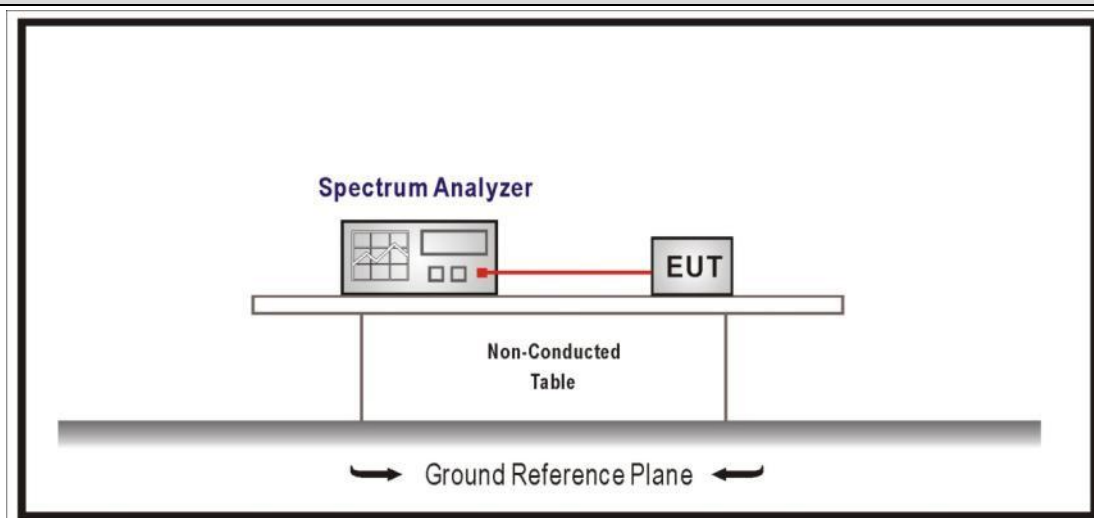4.5.2 Test Setup**4.5.3 Test Procedure**

	Reference Rule	Chapter	Description
☒	ANSI C63.10	7.8.6	Occupied bandwidth

4.6 Fundamental emission output power**VERDICT: PASS****4.6.1 Limit****Standard**


FCC Part 15 Subpart C Paragraph 15.247 (b)(3)

Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum conducted output power .

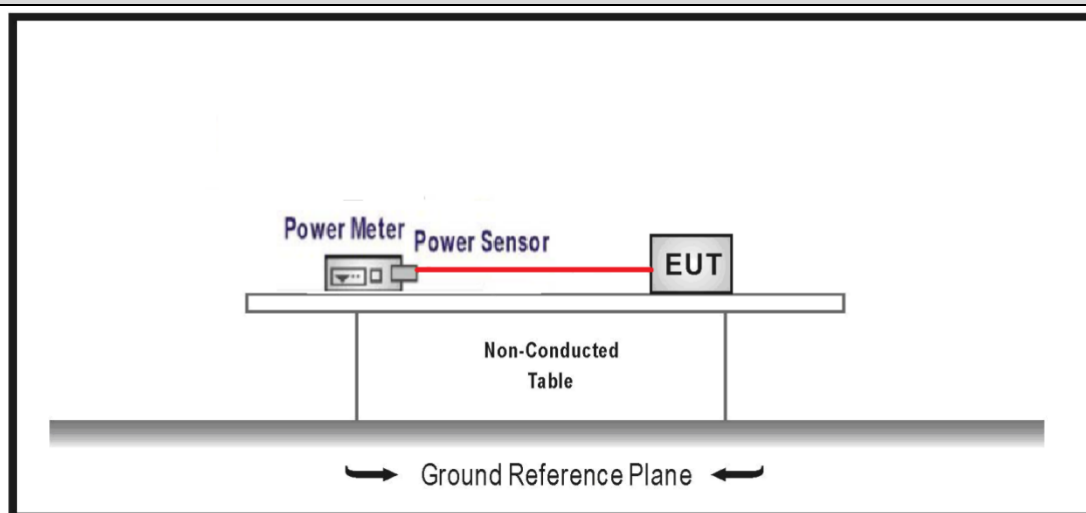4.6.2 Test Setup**4.6.3 Test Procedure**

	References Rule		Chapter	Description
☒	ANSI C63.10		7.8	Fundamental emission output power
☒	ANSI C63.10		7.8.5	Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices


4.8 Carrier Frequency Separation

VERDICT: PASS

4.8.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(a);
☐	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
☒	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.
☐	The 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period;
☐	The 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
☐	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz.

4.8.2 Test Setup

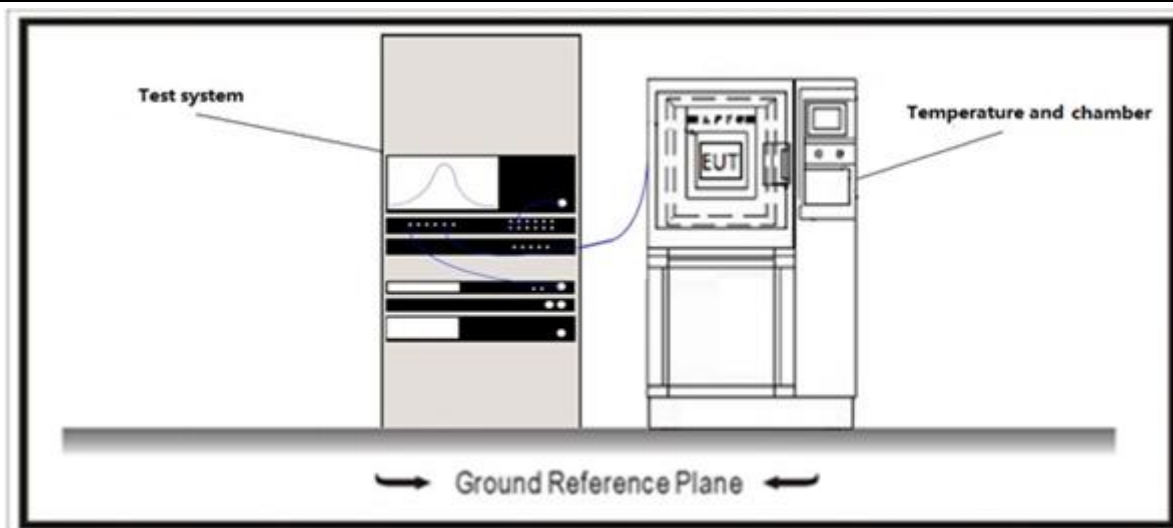


4.9.3 Test Procedure

References Rule	Chapter	Description
☒ ANSI C63.10	7.8	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.2	Carrier frequency separation

4.9 Time of Occupancy**VERDICT: PASS****4.9.1 Limit**


Standard	FCC Part 15 Subpart C Paragraph 15.247(a);
☒	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
☐	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period
☐	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.
☐	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

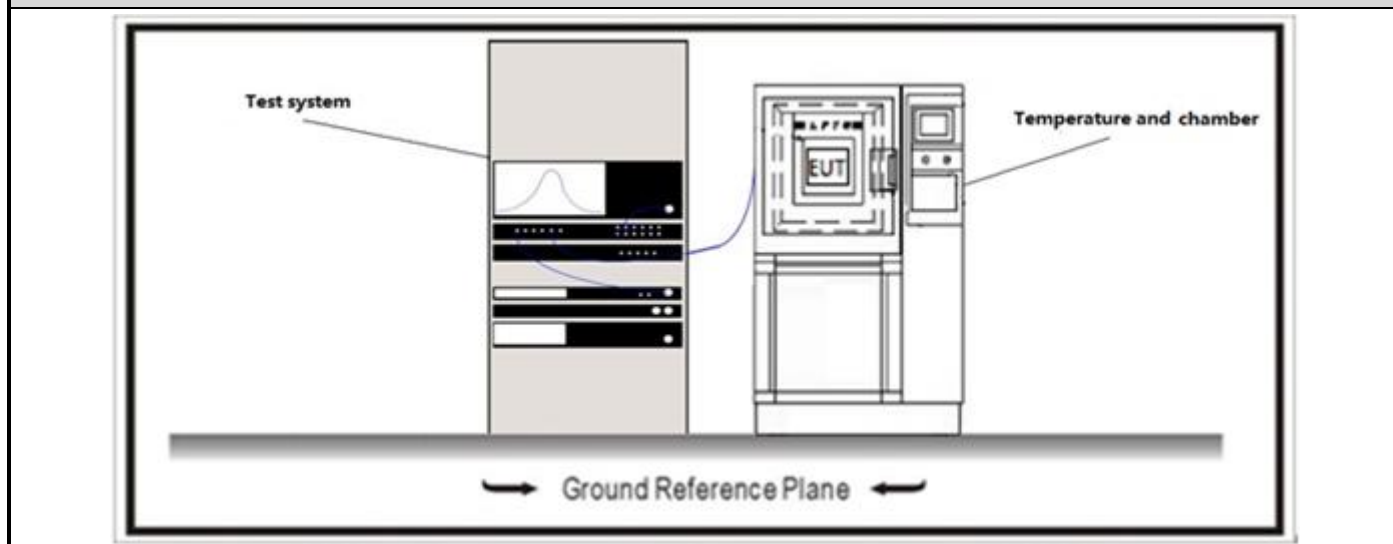4.9.2 Test Setup**4.9.3 Test Procedure**

References Rule	Chapter	Description
☒ ANSI C63.10	7.8	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.4	Time of occupancy (dwell time)

4.10 Number of hopping Frequencies**VERDICT: PASS****4.10.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(a);
☒	For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.
☐	For frequency hopping systems operating in 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is less than 250 kHz, shall use at least 50 hopping frequencies.
☐	For frequency hopping systems operating in 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is higher than 250 kHz, shall use at least 25 hopping frequencies.
☐	For frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies.

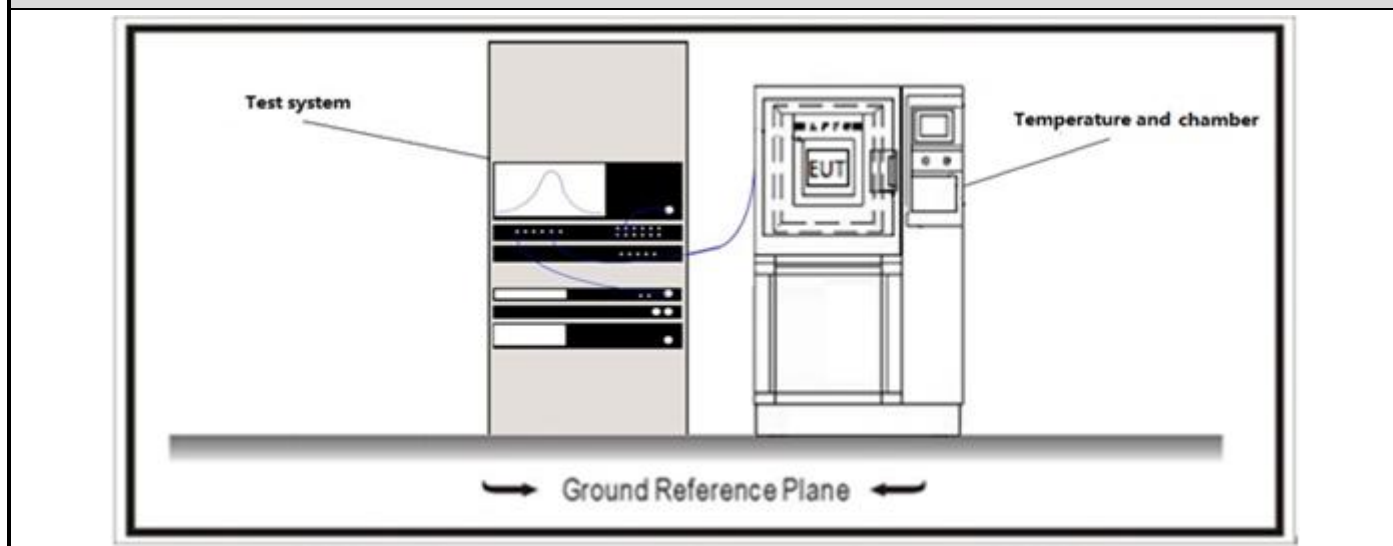4.10.2 Test Setup**4.10.3 Test Procedure**

References Rule	Chapter	Description
☒ ANSI C63.10	7.8.	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.3	Number of Hopping Frequencies

4.11 Antenna Requirement**VERDICT: PASS****4.11.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.11.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

20dB Emission Bandwidth

20dB Emission Bandwidth:

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.969	2401.544	2402.513	---	---
		2441	0.936	2440.559	2441.495	---	---
		2480	0.984	2479.511	2480.495	---	---
2DH5	Ant1	2402	1.356	2401.340	2402.696	---	---
		2441	1.335	2440.343	2441.678	---	---
		2480	1.347	2479.325	2480.672	---	---
3DH5	Ant1	2402	1.314	2401.361	2402.675	---	---
		2441	1.329	2440.349	2441.678	---	---
		2480	1.335	2479.334	2480.669	---	---

Test Graphs

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402



2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480




99% Occupied bandwidth:

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.88611	2401.5804	2402.4666	---	---
		2441	0.87857	2440.5733	2441.4519	---	---
		2480	0.85607	2479.5716	2480.4277	---	---
2DH5	Ant1	2402	1.2043	2401.4158	2402.6201	---	---
		2441	1.1970	2440.4151	2441.6121	---	---
		2480	1.1955	2479.4037	2480.5992	---	---
3DH5	Ant1	2402	1.2073	2401.4076	2402.6149	---	---
		2441	1.2022	2440.4078	2441.6100	---	---
		2480	1.2068	2479.3936	2480.6004	---	---


Test Graphs



2DH5_Ant1_2402

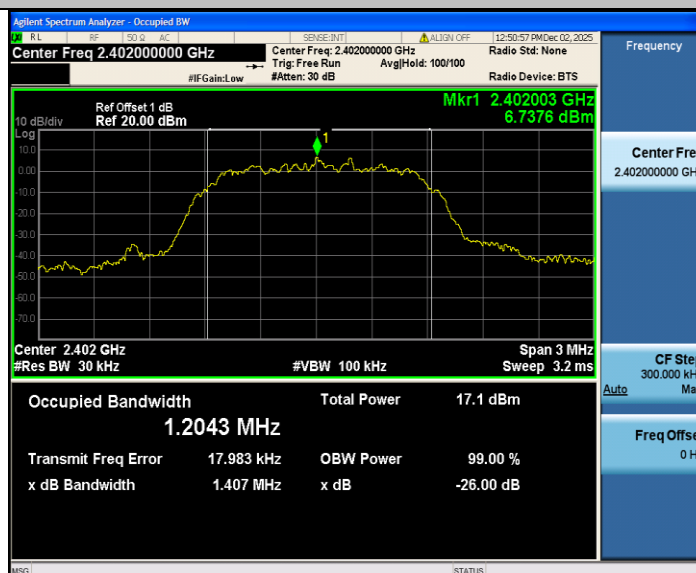


2DH5_Ant1_2441

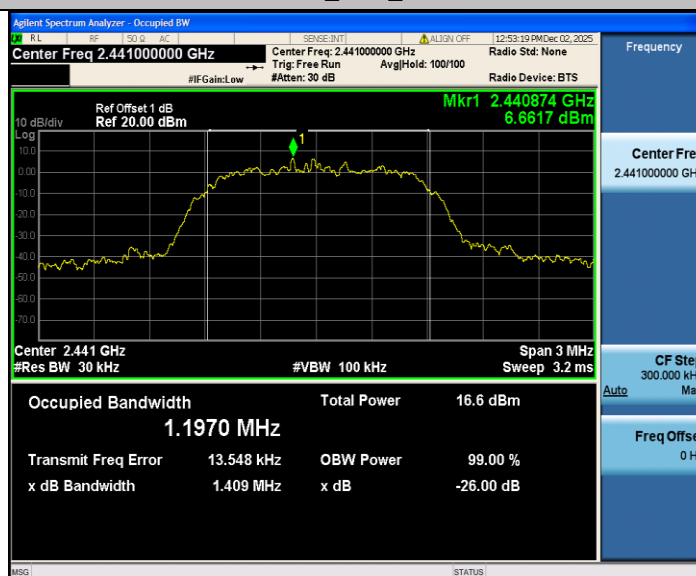


2DH5_Ant1_2480




3DH5_Ant1_2402

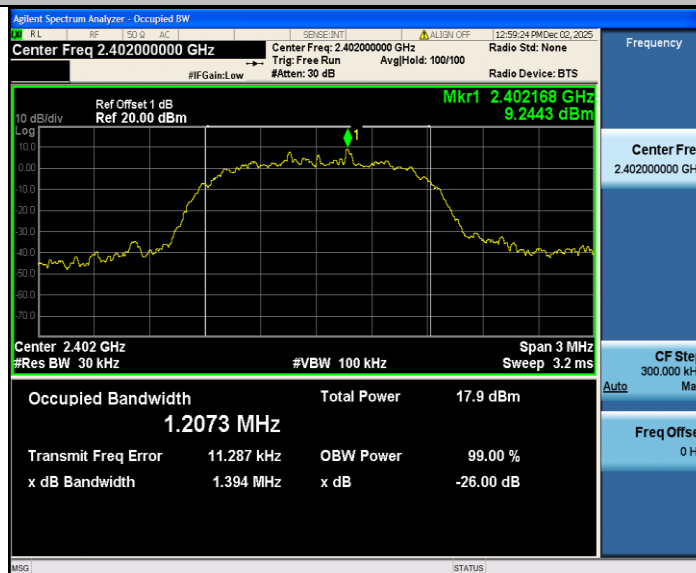

3DH5_Ant1_2441

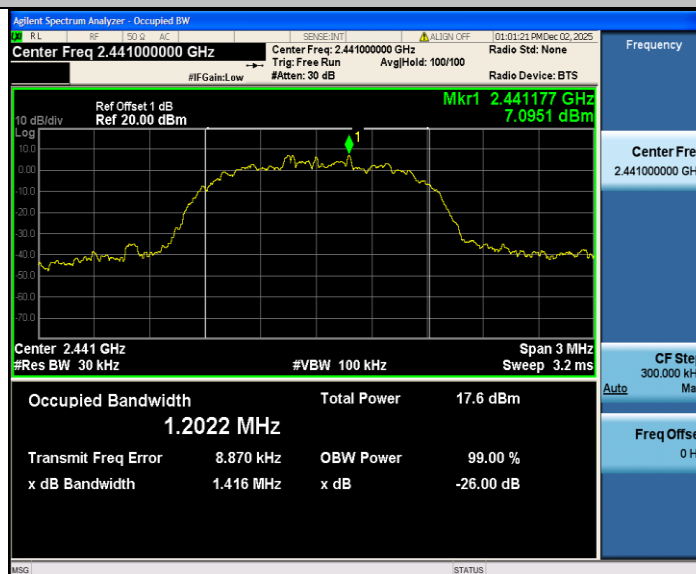

3DH5_Ant1_2480

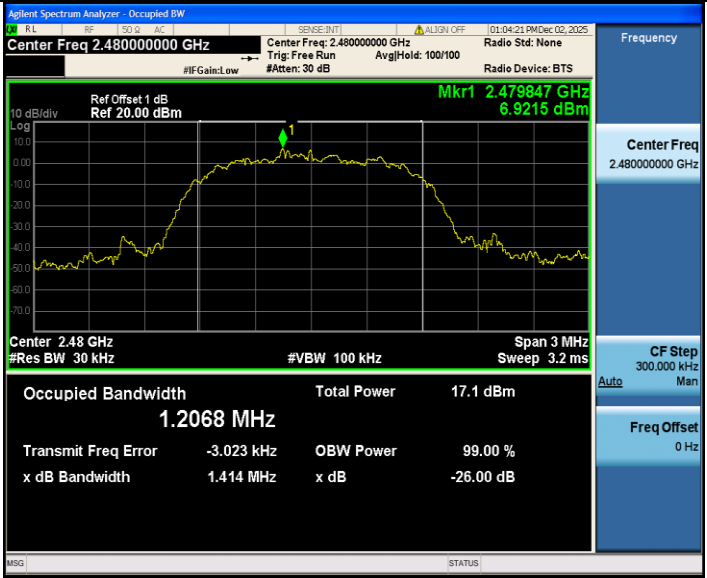

Maximum Conducted Output Power


	Mode	Channel	Frequency (MHz)	Peak Power (dBm)		Limit (dBm)
				ANT 1	ANT 2	
Bluetooth	DH5	0	2402	14.55	14.31	30.00
		39	2441	14.17	15.08	30.00
		78	2480	14.75	15.73	30.00
	2DH5	0	2402	11.33	11.87	30.00
		39	2441	10.94	11.81	30.00
		78	2480	10.87	11.11	30.00
	3DH5	0	2402	11.35	10.95	30.00
		39	2441	11.18	11.38	30.00
		78	2480	10.57	10.36	30.00

Carrier Frequency Separation

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.846	≥ 0.656	PASS
2DH5	Ant1	Hop	1.02	≥ 0.904	PASS
3DH5	Ant1	Hop	1.01	≥ 0.890	PASS

Test Graphs

DH5_Ant1_Hop

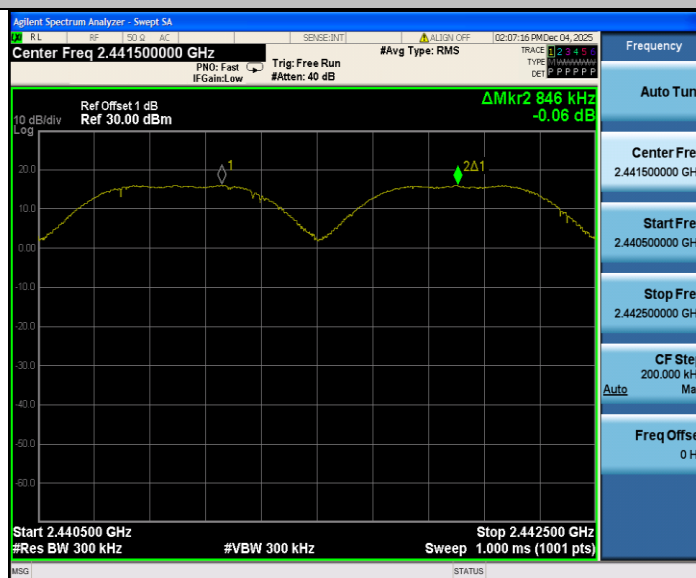

2DH5_Ant1_Hop




3DH5_Ant1_Hop




Time of Occupancy


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.379	320	0.121	≤0.4	PASS
DH3	Ant1	Hop	0.388	160	0.062	≤0.4	PASS
DH5	Ant1	Hop	0.388	106.67	0.041	≤0.4	PASS
2DH1	Ant1	Hop	0.385	320	0.123	≤0.4	PASS
2DH3	Ant1	Hop	1.638	160	0.262	≤0.4	PASS
2DH5	Ant1	Hop	2.885	106.67	0.308	≤0.4	PASS
3DH1	Ant1	Hop	0.385	320	0.123	≤0.4	PASS
3DH3	Ant1	Hop	1.635	160	0.262	≤0.4	PASS
3DH5	Ant1	Hop	2.888	106.67	0.308	≤0.4	PASS

Test Graphs

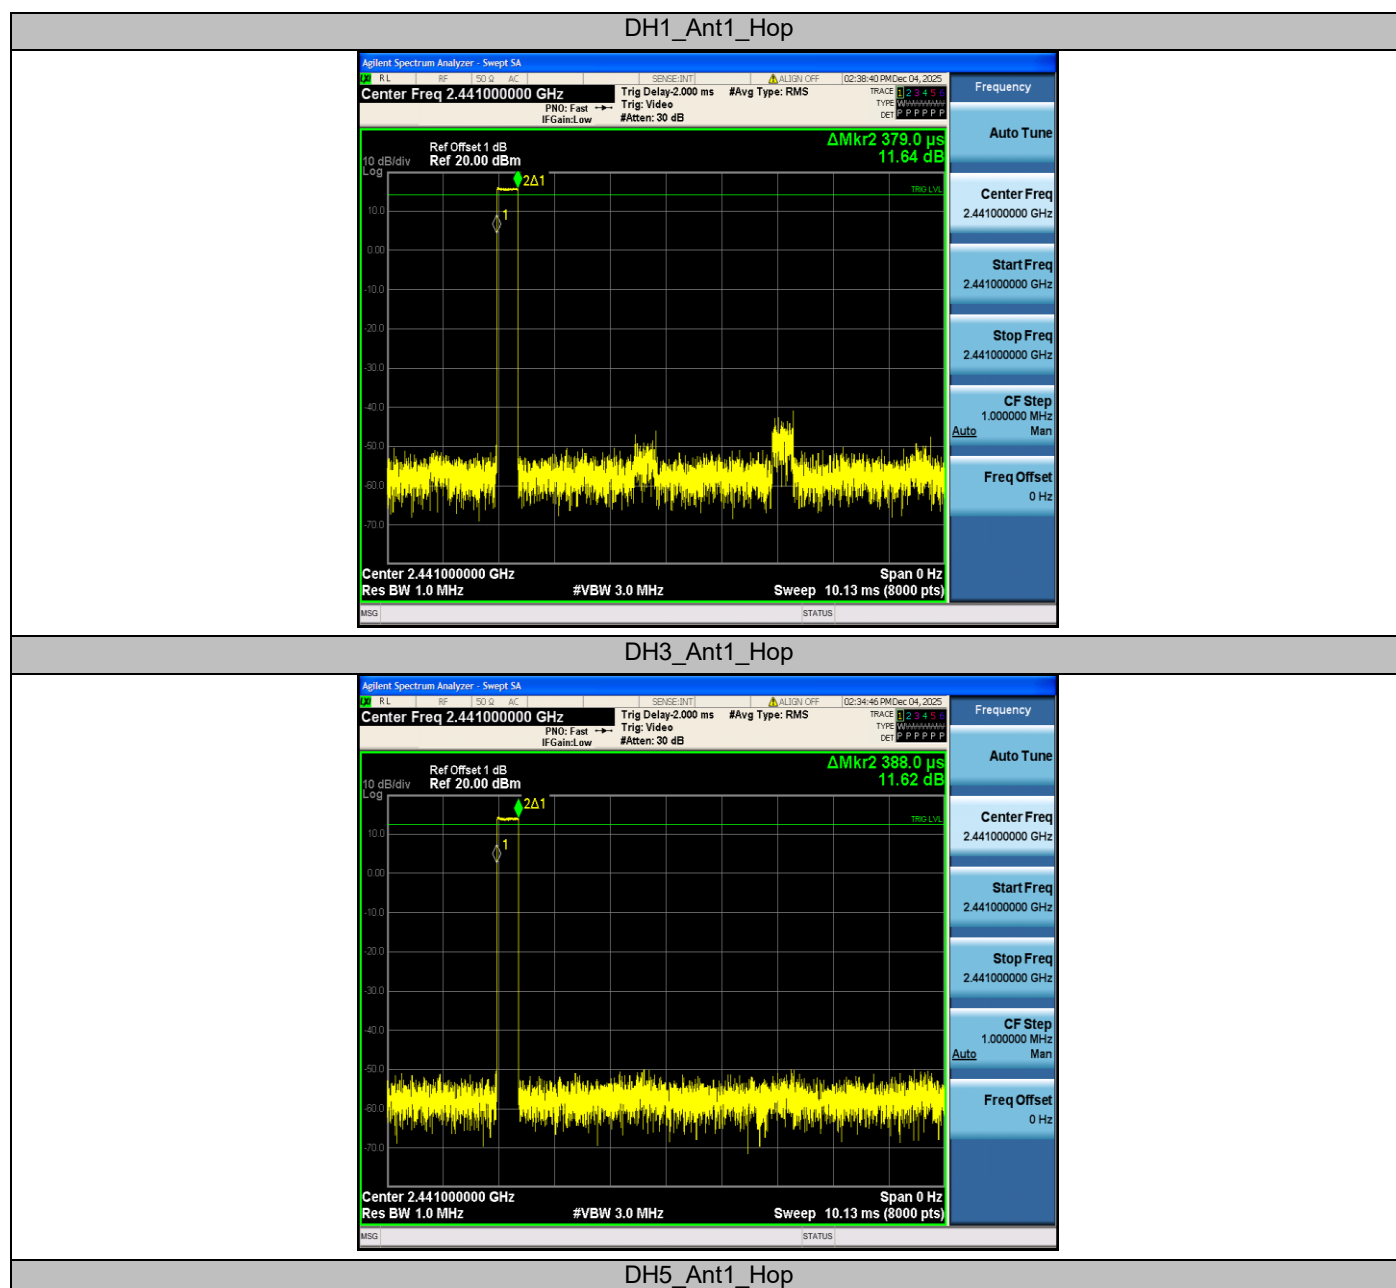


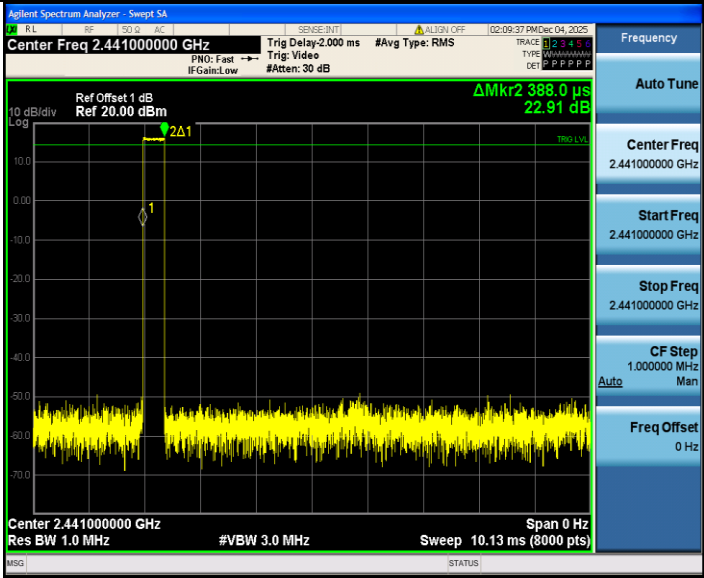


2DH1_Ant1_Hop

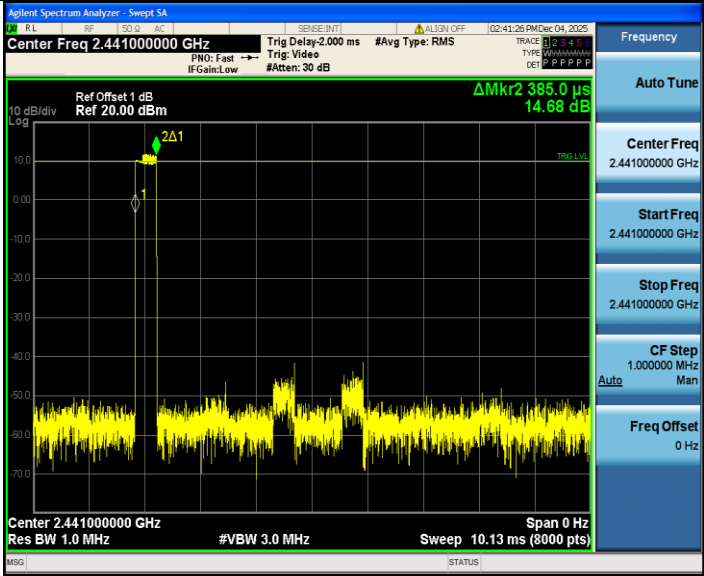


2DH3_Ant1_Hop

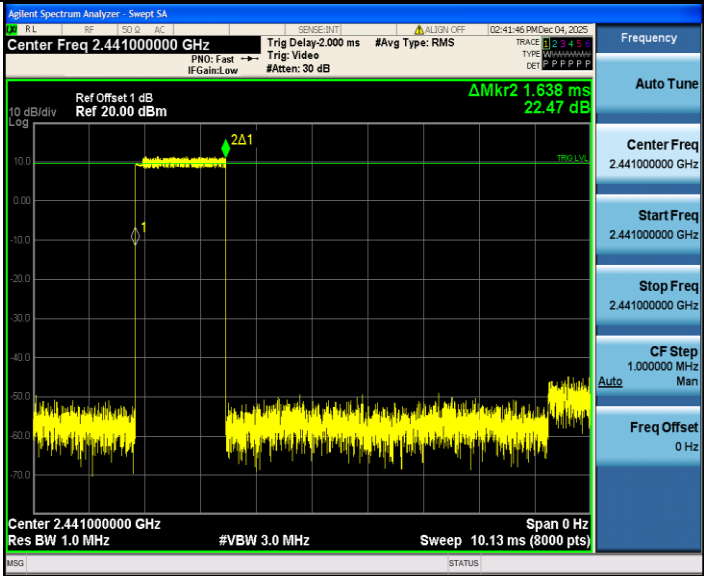


2DH5_Ant1_Hop

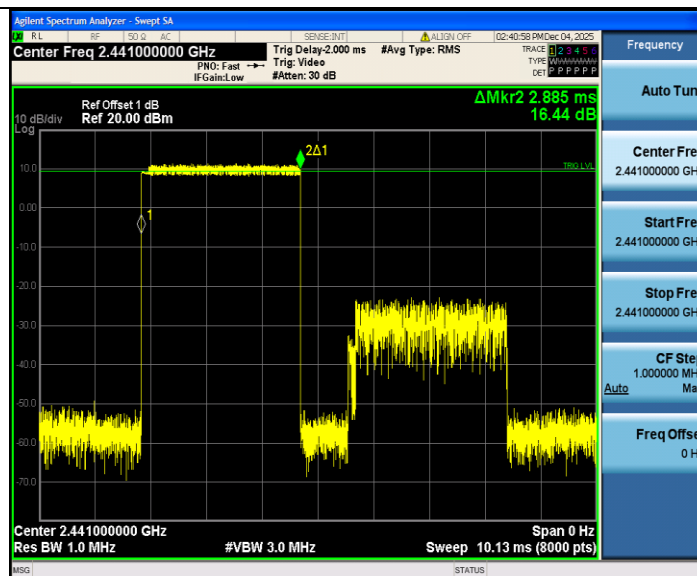


3DH1_Ant1_Hop

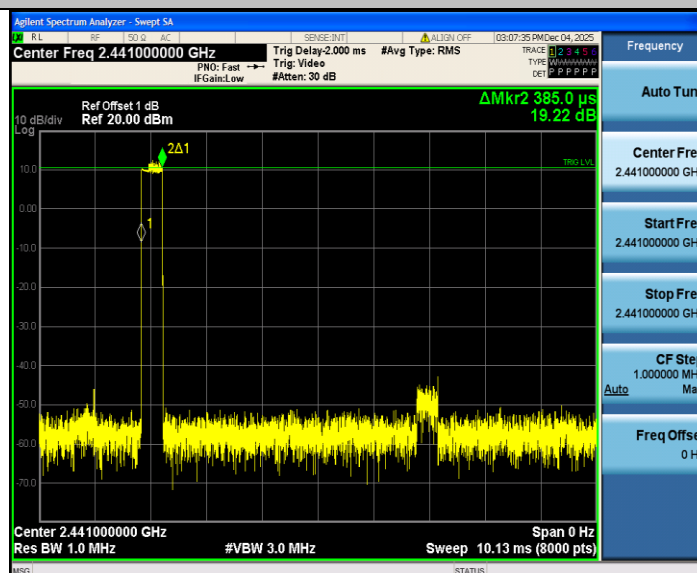

3DH3_Ant1_Hop

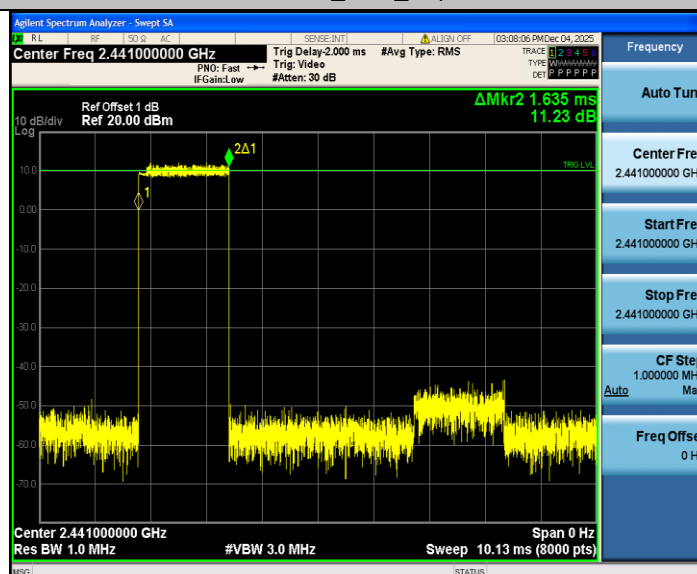


3DH5_Ant1_Hop

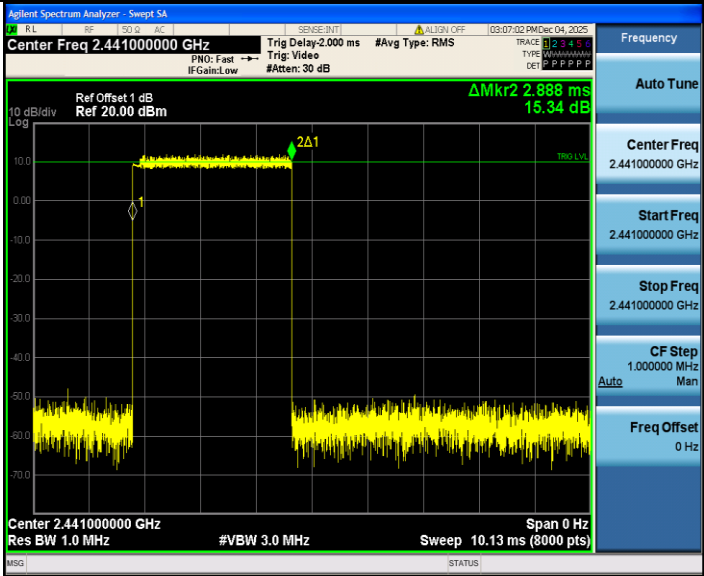


Number of Hopping Frequencies

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

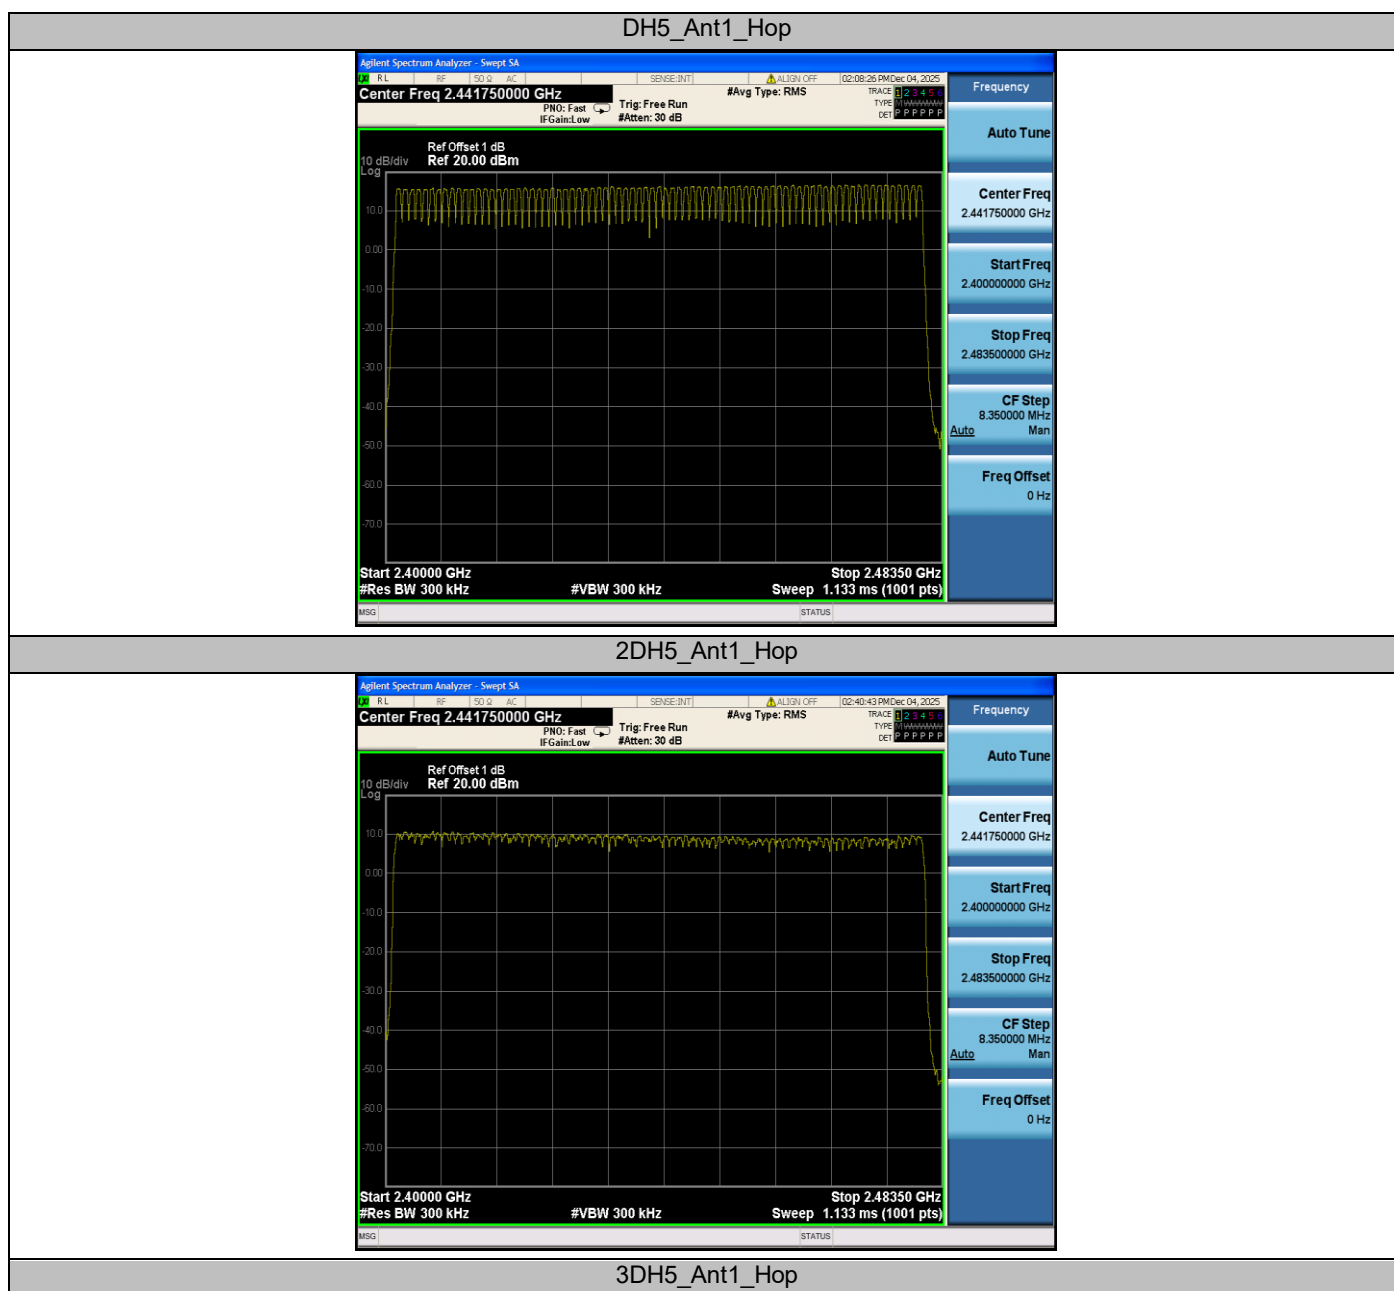


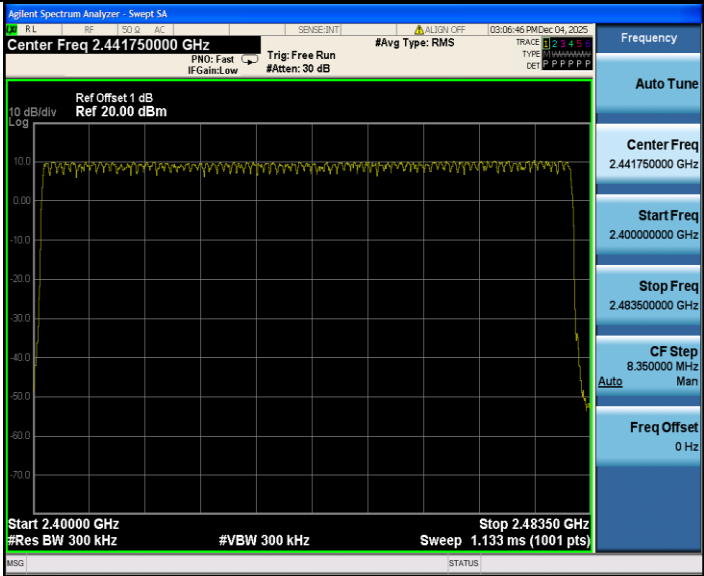

Band edge measurements

Transmit at 2402MHz by DH5

Test Graph

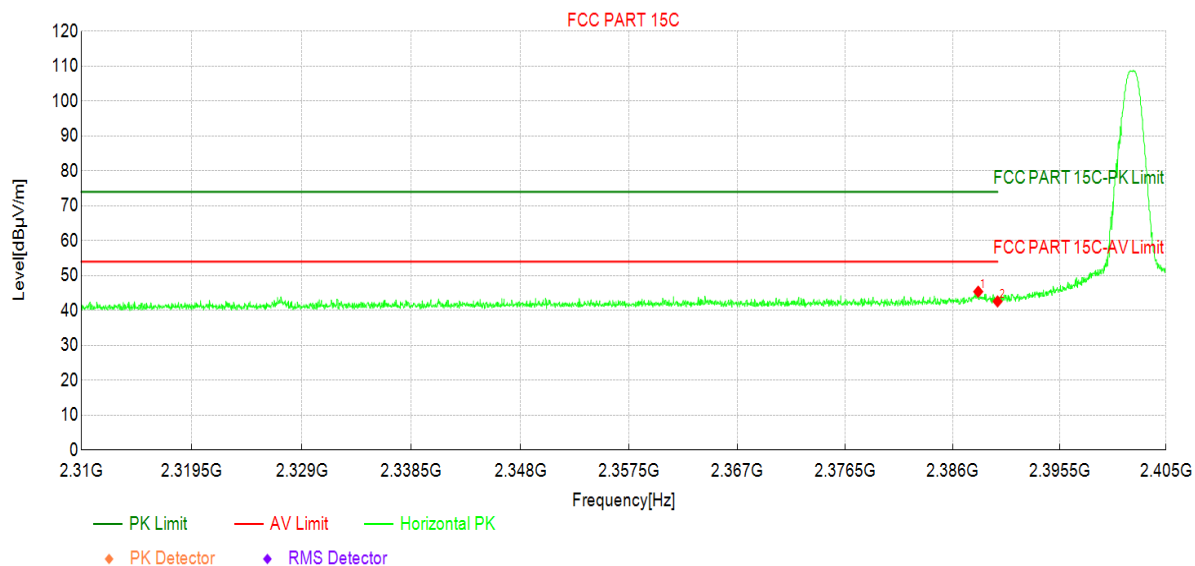


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2388.28	40.30	45.42	5.12	74.00	28.58	PK	Horizo	PASS
	2388.28	-	20.63	-	54.00	33.37	AV	Horizo	PASS
2	2390.00	37.48	42.62	5.14	74.00	31.38	PK	Horizo	PASS
	2390.00	-	17.83	-	54.00	36.17	AV	Horizo	PASS

Transmit at 2402MHz by DH5

Test Graph

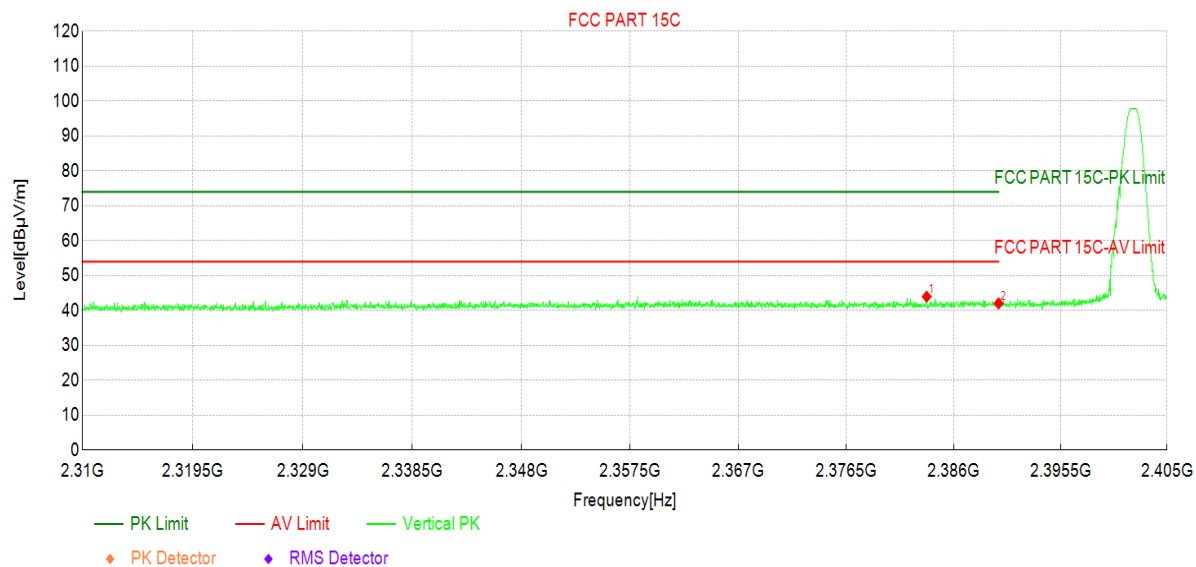


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2383.63	38.90	44.00	5.10	74.00	30.00	PK	Vertic	PASS
	2383.63	-	19.21	-	54.00	34.79	AV	Vertic	PASS
2	2390.00	36.90	42.04	5.14	74.00	31.96	PK	Vertic	PASS
	2390.00	-	17.25	-	54.00	36.75	AV	Vertic	PASS

Transmit at 2480MHz by DH5

Test Graph

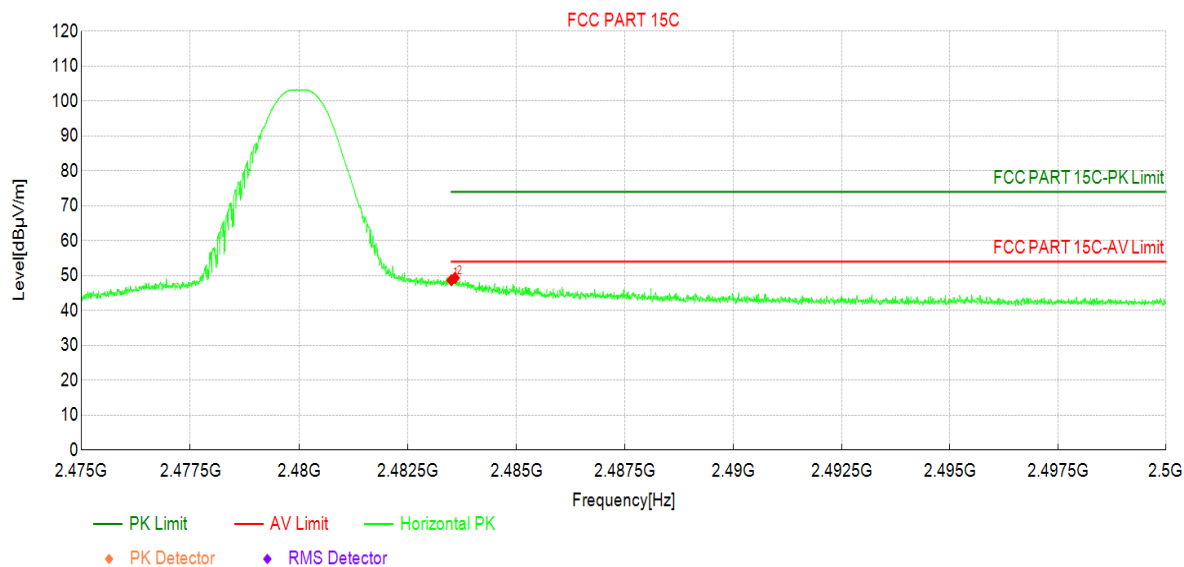


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	43.20	48.71	5.51	74.00	25.29	PK	Horizo	PASS
	2483.50	-	23.92	-	54.00	30.08	AV	Horizo	PASS
2	2483.58	43.84	49.35	5.51	74.00	24.65	PK	Horizo	PASS
	2483.58	-	24.56	-	54.00	29.44	AV	Horizo	PASS

Transmit at 2480MHz by DH5

Test Graph

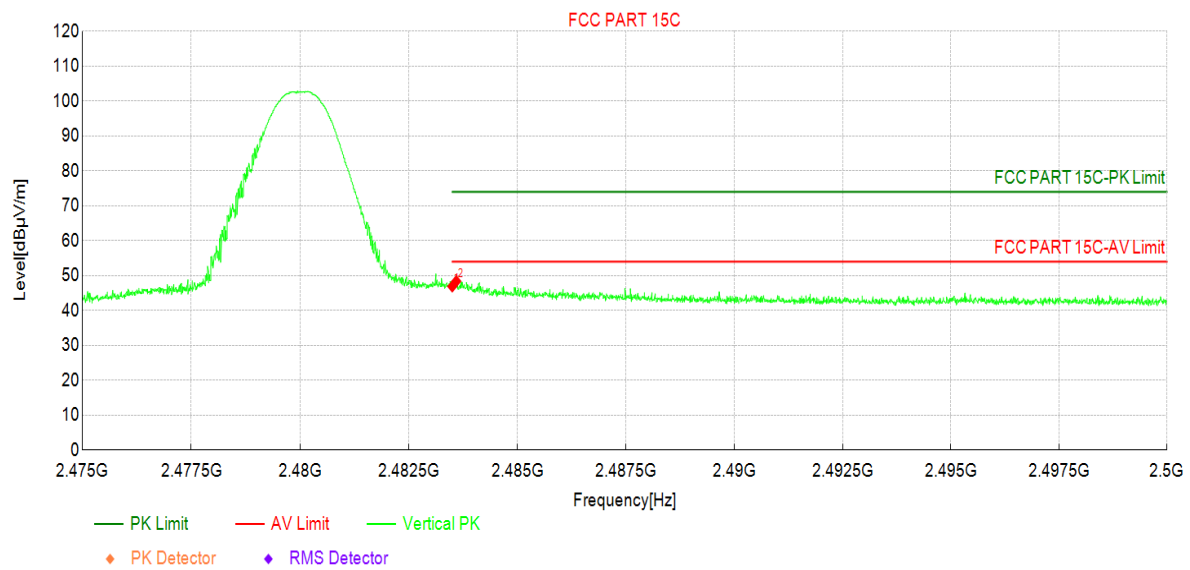


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	41.41	46.92	5.51	74.00	27.08	PK	Vertic	PASS
	2483.50	-	22.13	-	54.00	31.87	AV	Vertic	PASS
2	2483.59	42.91	48.42	5.51	74.00	25.58	PK	Vertic	PASS
	2483.59	-	23.63	-	54.00	30.37	AV	Vertic	PASS

Transmit at 2402MHz by 2DH5

Test Graph

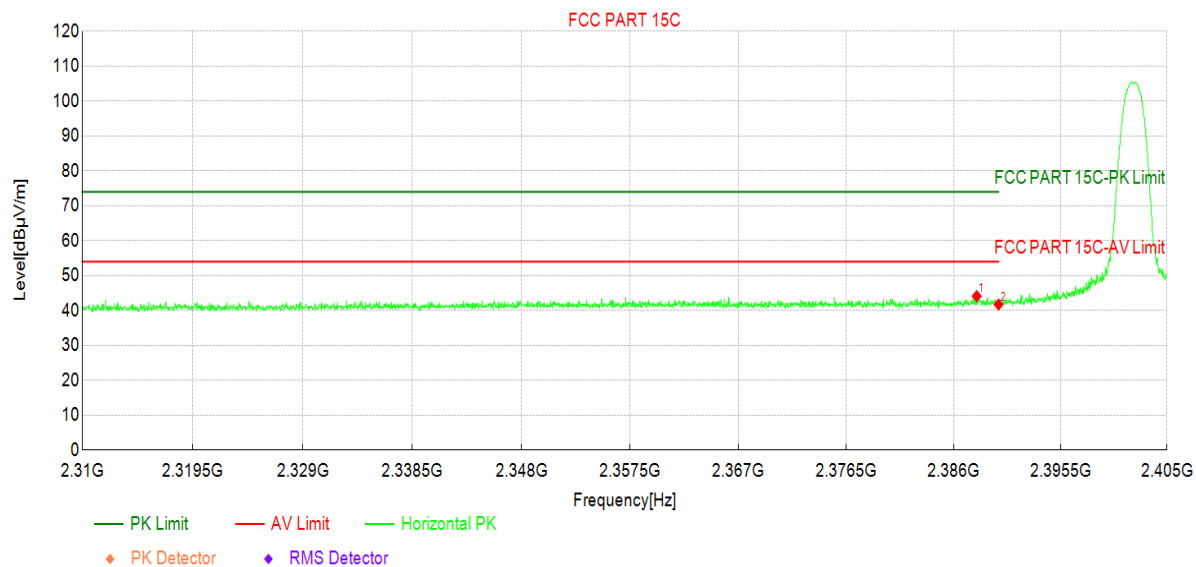


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2388.06	39.01	44.13	5.12	74.00	29.87	PK	Horizo	PASS
	2388.06	-	19.34	-	54.00	34.66	AV	Horizo	PASS
2	2390.00	36.60	41.74	5.14	74.00	32.26	PK	Horizo	PASS
	2390.00	-	16.95	-	54.00	37.05	AV	Horizo	PASS

Transmit at 2402MHz by 2DH5

Test Graph

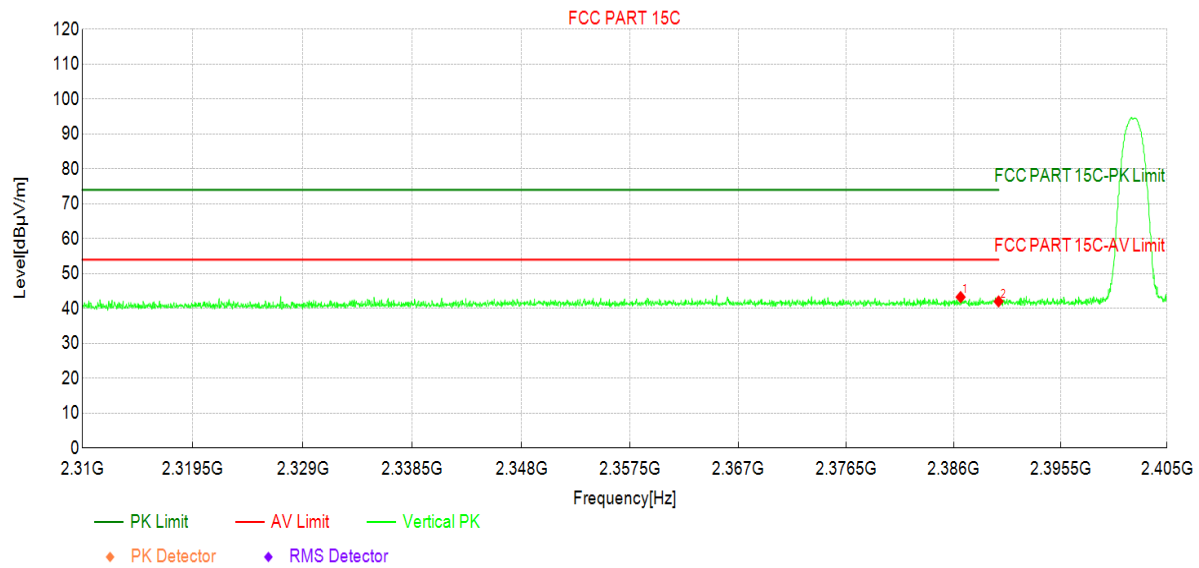


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2386.63	38.17	43.29	5.12	74.00	30.71	PK	Vertic	PASS
	2386.63	-	18.50	-	54.00	35.50	AV	Vertic	PASS
2	2390.00	36.91	42.05	5.14	74.00	31.95	PK	Vertic	PASS
	2390.00	-	17.26	-	54.00	36.74	AV	Vertic	PASS

Transmit at 2480MHz by 2DH5

Test Graph

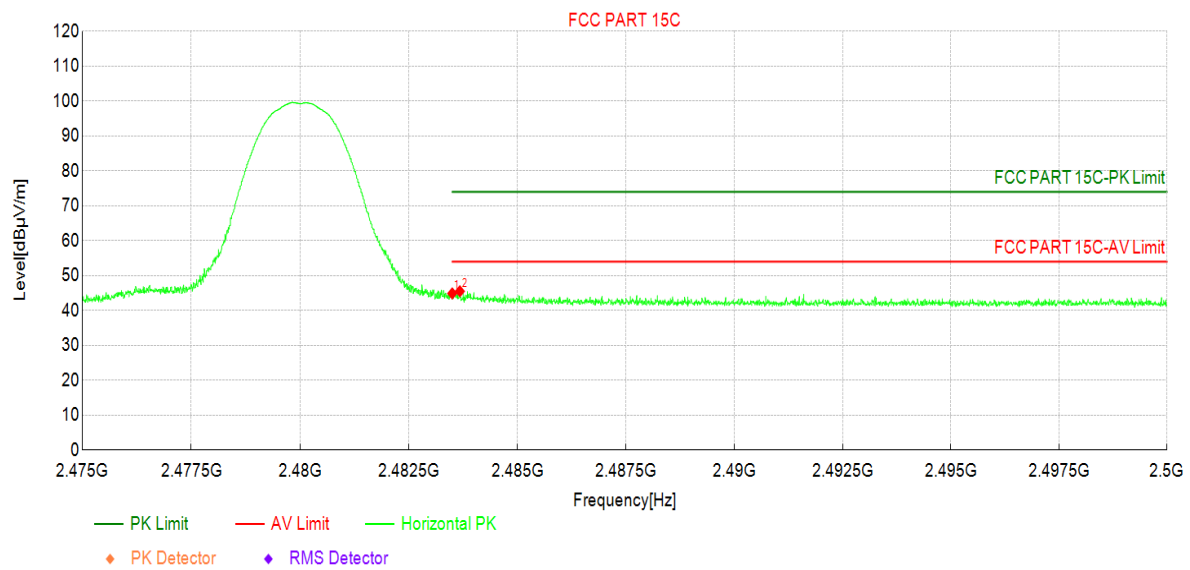


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	39.40	44.91	5.51	74.00	29.09	PK	Horizo	PASS
	2483.50	-	20.12	-	54.00	33.88	AV	Horizo	PASS
2	2483.68	40.02	45.53	5.51	74.00	28.47	PK	Horizo	PASS
	2483.68	-	20.74	-	54.00	33.26	AV	Horizo	PASS

Transmit at 2480MHz by 2DH5

Test Graph

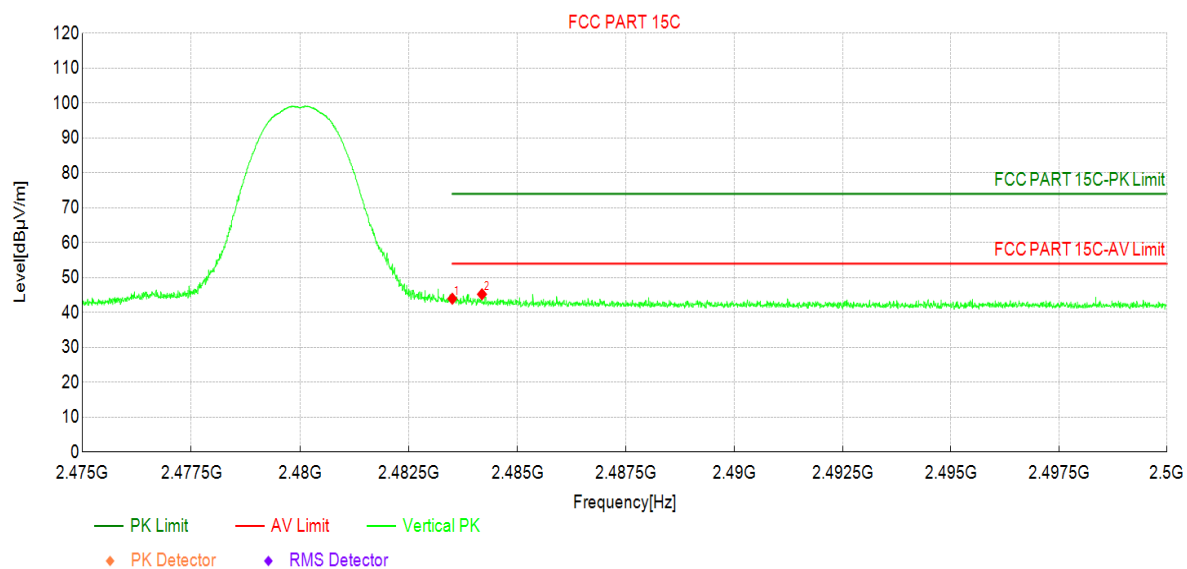


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	38.46	43.97	5.51	74.00	30.03	PK	Vertic	PASS
	2483.50	-	19.18	-	54.00	34.82	AV	Vertic	PASS
2	2484.18	39.73	45.25	5.52	74.00	28.75	PK	Vertic	PASS
	2484.18	-	20.46	-	54.00	33.54	AV	Vertic	PASS

Transmit at 2402MHz by 3DH5

Test Graph

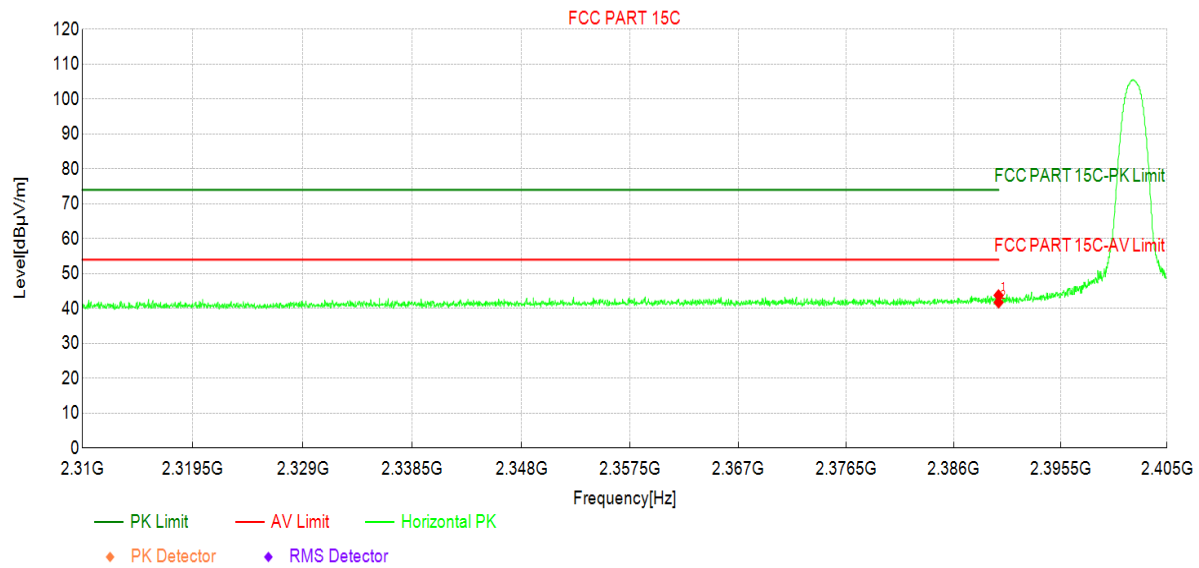


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2389.99	38.66	43.80	5.14	74.00	30.20	PK	Horizo	PASS
	2389.99	-	19.01	-	54.00	34.99	AV	Horizo	PASS
2	2390.00	36.61	41.75	5.14	74.00	32.25	PK	Horizo	PASS
	2390.00	-	16.96	-	54.00	37.04	AV	Horizo	PASS

Transmit at 2402MHz by 3DH5

Test Graph

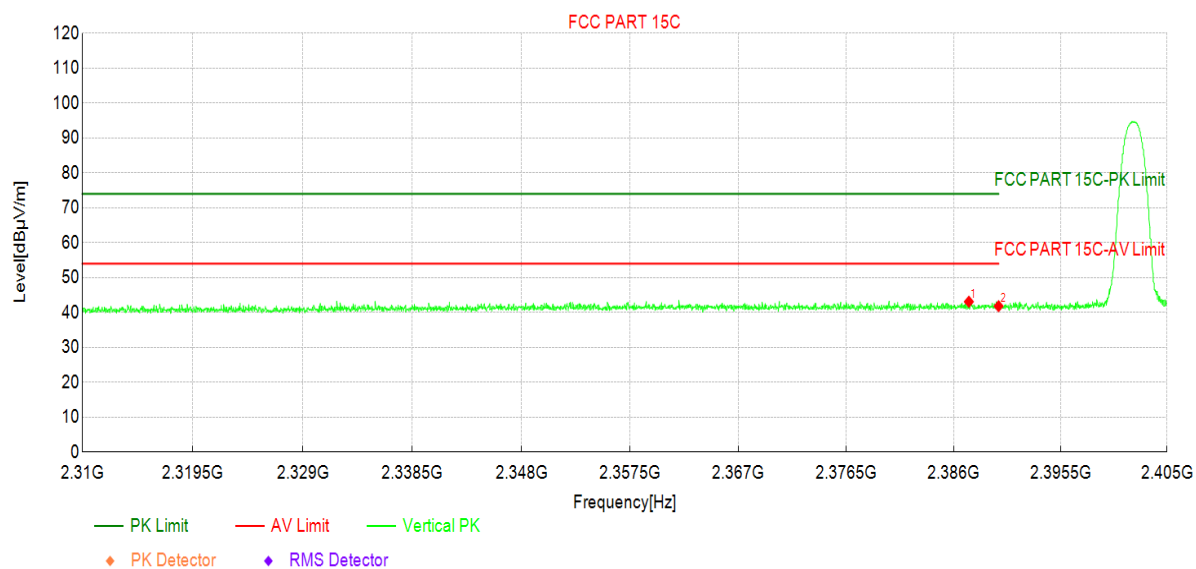


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2387.36	38.00	43.12	5.12	74.00	30.88	PK	Vertic	PASS
	2387.36	-	18.33	-	54.00	35.67	AV	Vertic	PASS
2	2390.00	36.70	41.84	5.14	74.00	32.16	PK	Vertic	PASS
	2390.00	-	17.05	-	54.00	36.95	AV	Vertic	PASS

Transmit at 2480MHz by 3DH5

Test Graph

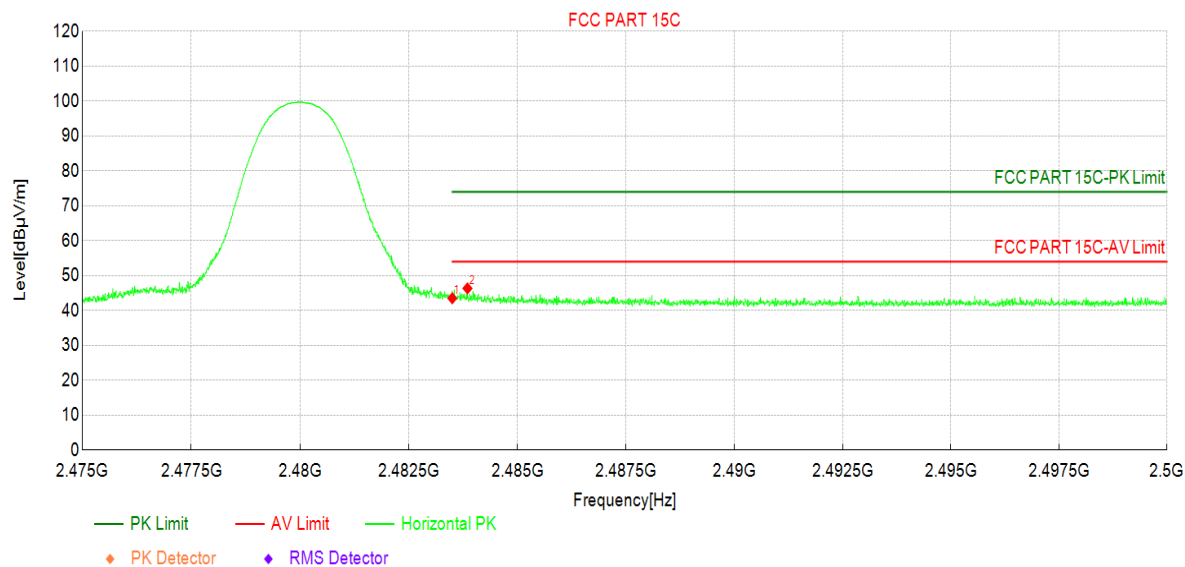


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	38.02	43.53	5.51	74.00	30.47	PK	Horizo	PASS
	2483.50	-	18.74	-	54.00	35.26	AV	Horizo	PASS
2	2483.85	40.85	46.36	5.51	74.00	27.64	PK	Horizo	PASS
	2483.85	-	21.57	-	54.00	32.43	AV	Horizo	PASS

Transmit at 2480MHz by 3DH5

Test Graph

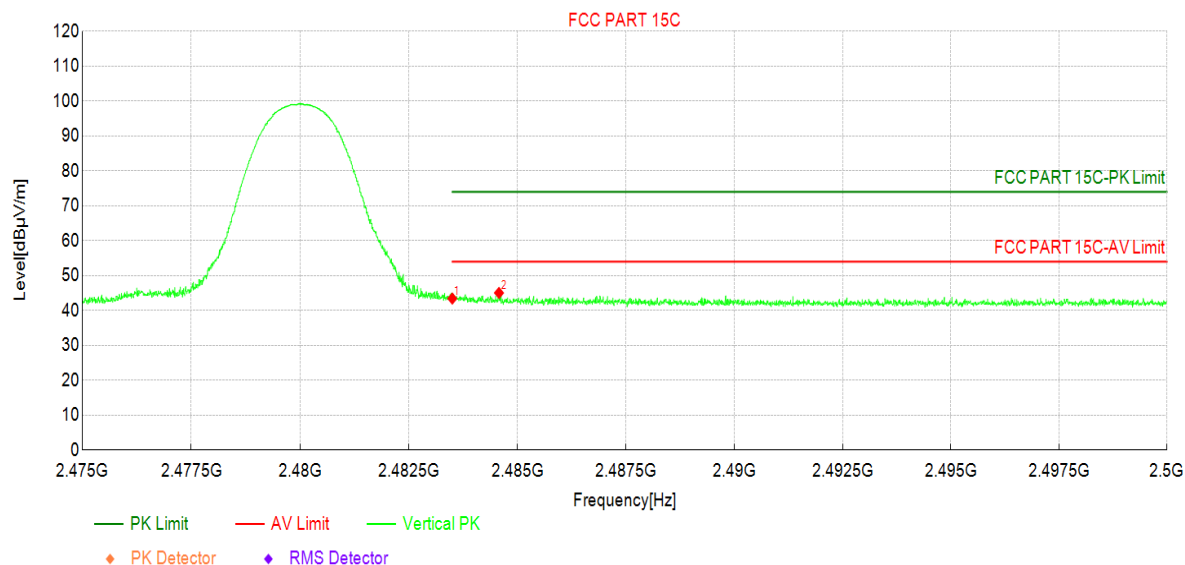

Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	37.94	43.45	5.51	74.00	30.55	PK	Vertic	PASS
	2483.50	-	18.66	-	54.00	35.34	AV	Vertic	PASS
2	2484.58	39.53	45.06	5.53	74.00	28.94	PK	Vertic	PASS
	2484.58	-	20.27	-	54.00	33.73	AV	Vertic	PASS

Note: Level = Reading + Factor (Antenna factor + Amplifier factor + Cable loss)

Note: We have evaluated each antenna as well as the ANT 1 and ANT 2 modes, and the report only shows the worst ANT 1 data.


Conducted Spurious Emission

Test Graphs for Reference level

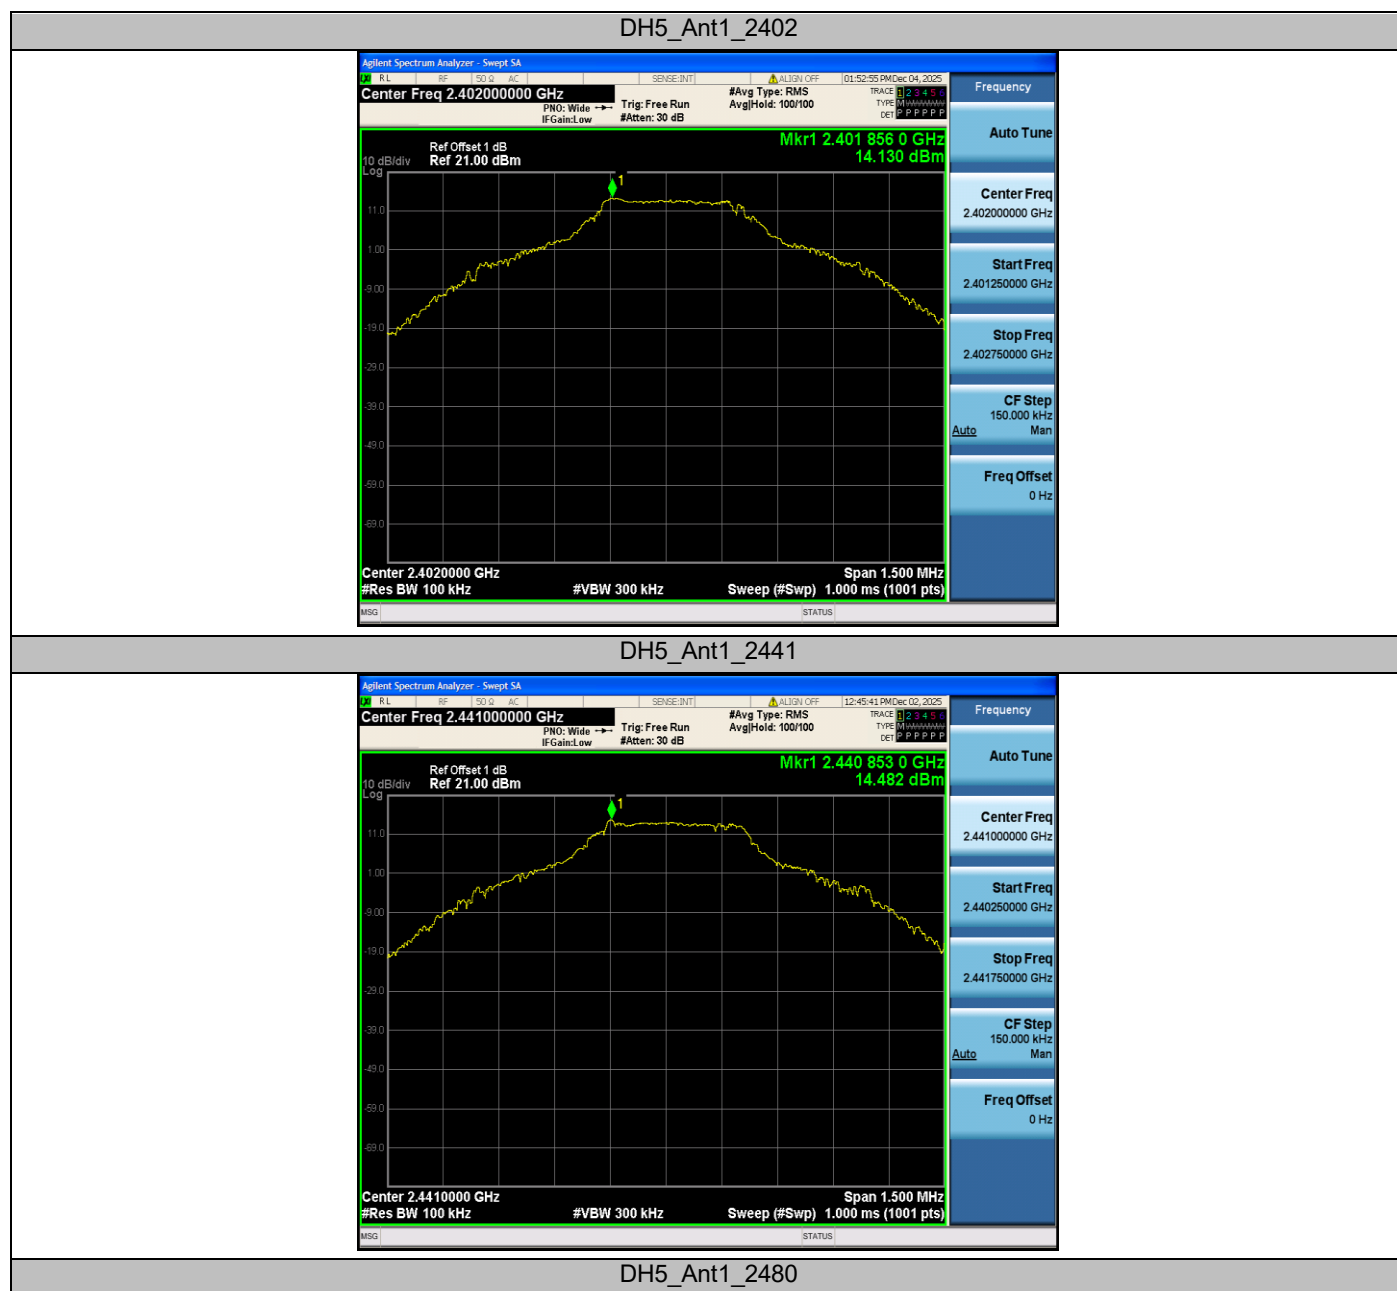




2DH5_Ant1_2402

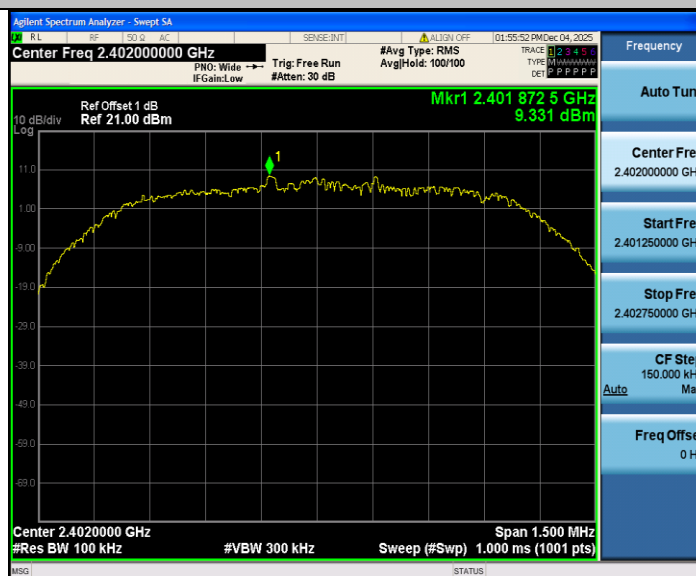


2DH5_Ant1_2441




2DH5_Ant1_2480

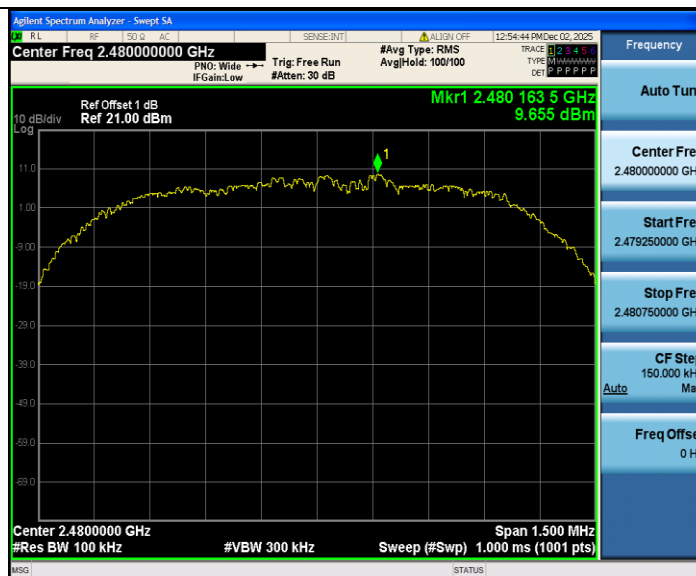

3DH5_Ant1_2402

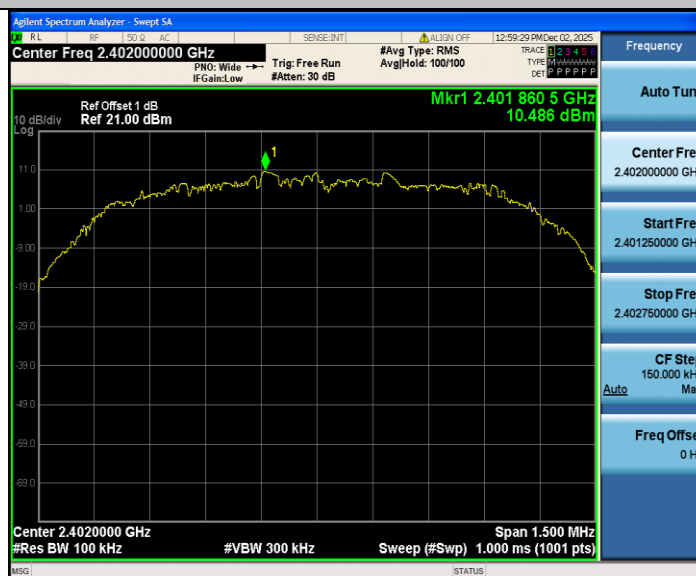

3DH5_Ant1_2441

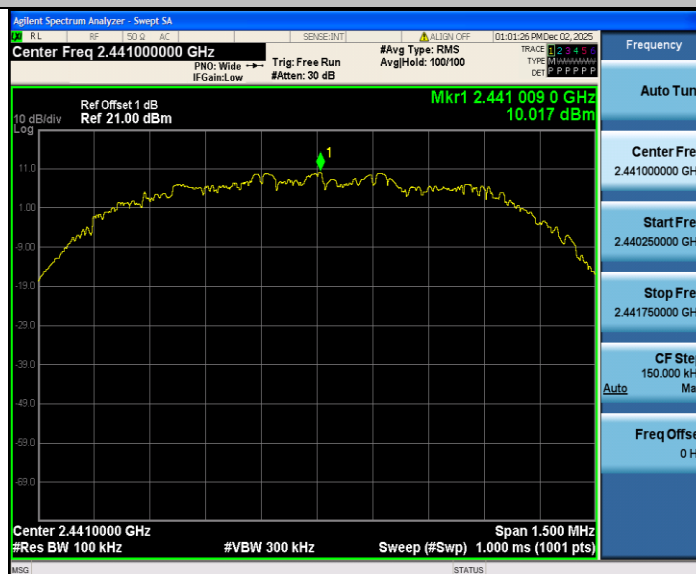


3DH5_Ant1_2480




Test Graphs for Band edge


DH5_Ant1_Low_2402

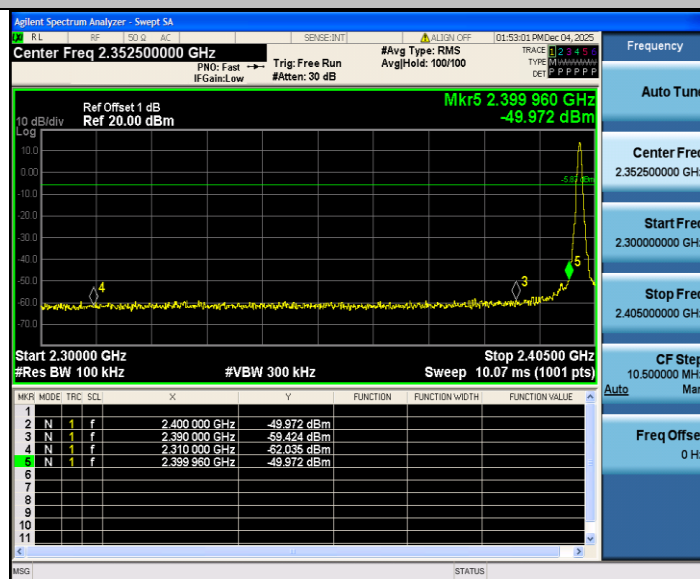


DH5_Ant1_High_2480

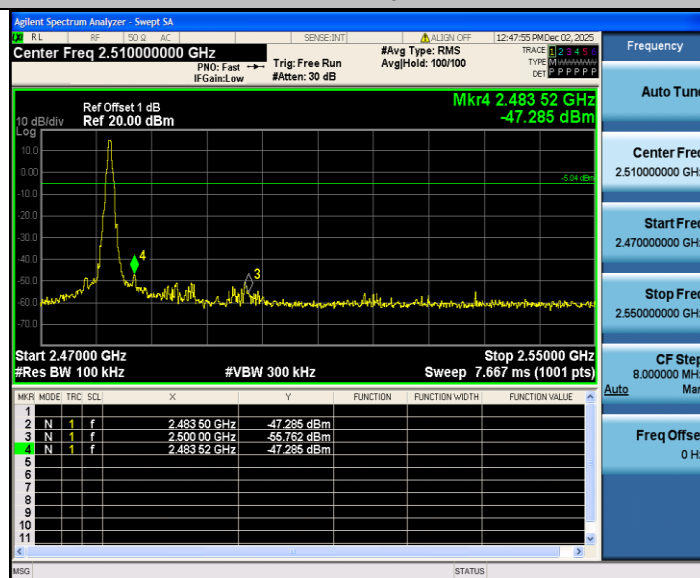


DH5_Ant1_Low_Hop_2402

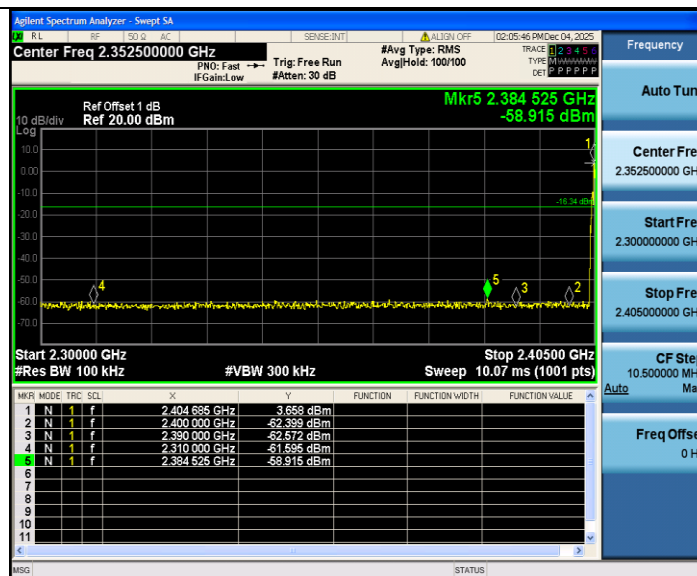


DH5_Ant1_High_Hop_2480

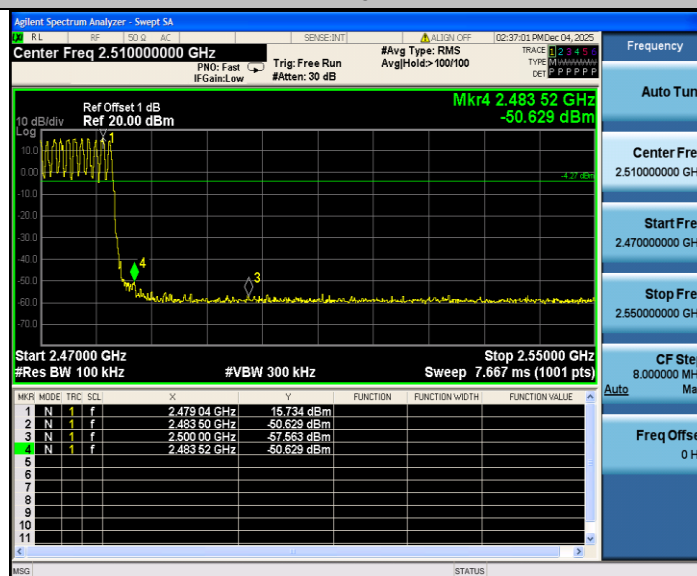


2DH5_Ant1_Low_2402

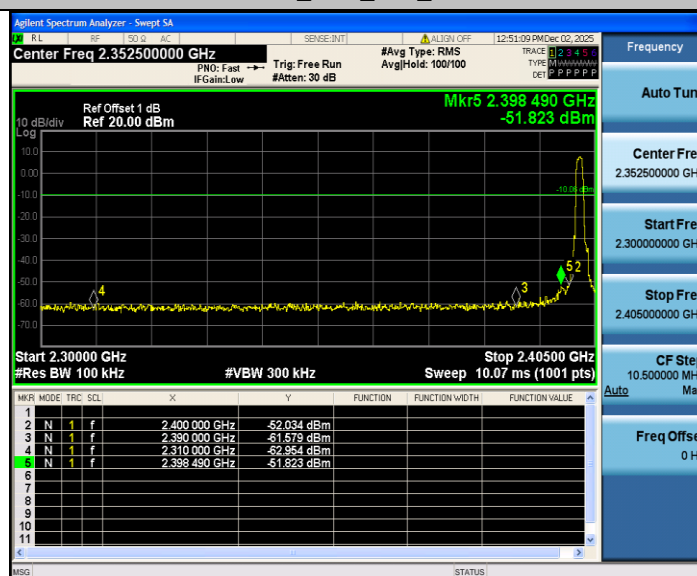


2DH5_Ant1_High_2480

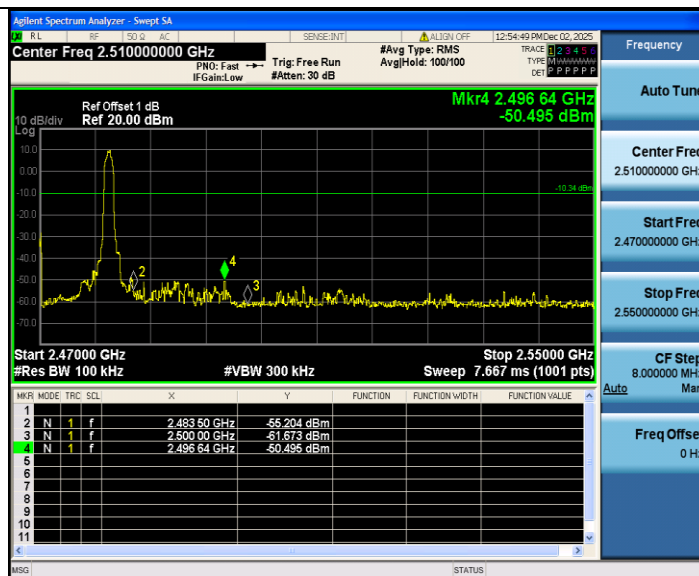

2DH5_Ant1_Low_Hop_2402

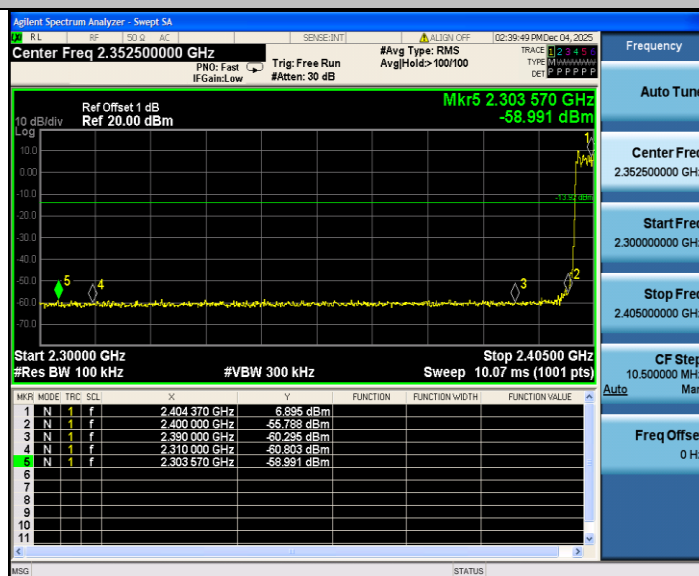

2DH5_Ant1_High_Hop_2480

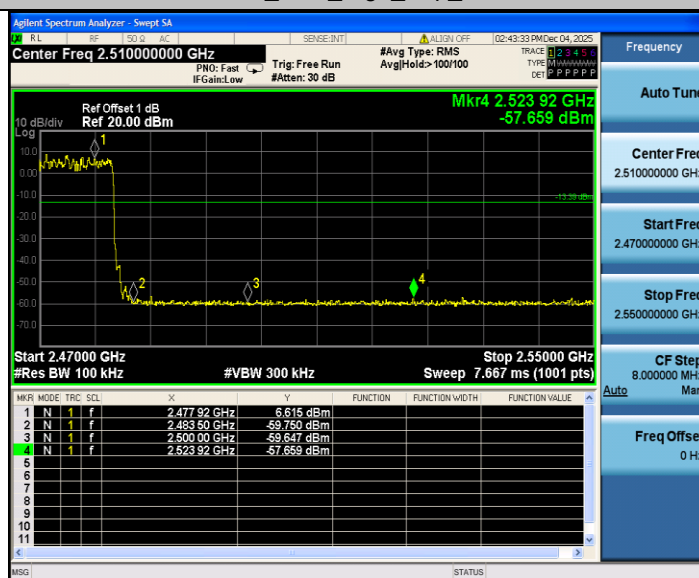

3DH5_Ant1_Low_2402