



RADIO TEST REPORT

Applicant	:	Arashi Vision Inc.
Address of Applicant	:	11th Floor, Building 2, Jinlitong Financial Center, Bao'an District, 518000 Shenzhen, Guangdong, China
Manufacturer	:	Arashi Vision Inc.
Address of Manufacturer	:	11th Floor, Building 2, Jinlitong Financial Center, Bao'an District, 518000 Shenzhen, Guangdong, China
Equipment under Test	:	2-in-1 Flash + Fill Light
Model No.	:	CINSCBUU
FCC ID	:	2AWWH-CINSCBUU
IC	:	26293-CINSCBUU
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10-2020+Cor.1-2023, RSS-247 Issue 4 July 24, 2025, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021), ANSI C63.10-2020+Cor.1-2023+C63.10a- 2024+Errata to C63.10a-2024
Report No.	:	DDT-RE26060928-1E04
Issue Date	:	2026/09/18
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	9
2.6.	Test environment conditions	9
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	6 dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	14
4.5.	Test graphs	15
5.	99% Bandwidth	17
5.1.	Block diagram of test setup	17
5.2.	Limits	17
5.3.	Test procedure	17
5.4.	Test result.....	18
5.5.	Test graphs	19
6.	Maximum Peak Output Power.....	21
6.1.	Block diagram of test setup	21
6.2.	Limits	21
6.3.	Test procedure	21
6.4.	Test result.....	22
6.5.	Test graphs	23
7.	Power Spectral Density	26
7.1.	Block diagram of test setup	26
7.2.	Limits	26
7.3.	Test procedure	26
7.4.	Test result.....	27
7.5.	Test graphs	28
8.	Band Edge Compliance (Conducted Method).....	31

8.1.	Block diagram of test setup	31
8.2.	Limits	31
8.3.	Test procedure	31
8.4.	Test result.....	32
8.5.	Test graphs	33
9.	RF Conducted Spurious Emissions.....	35
9.1.	Block diagram of test setup	35
9.2.	Limits	35
9.3.	Test procedure	35
9.4.	Test result.....	36
9.5.	Test graphs	37
10.	Duty Cycle	45
10.1.	Block diagram of test setup	45
10.2.	Limit.....	45
10.3.	Test procedure	45
10.4.	Test result.....	46
10.5.	Test graphs	47
11.	Antenna Requirements.....	50
11.1.	Limit.....	50
11.2.	Result	50
12.	Radiated Emission	51
12.1.	Test equipment.....	51
12.2.	Block diagram of test setup	52
12.3.	Limits	53
12.4.	Assistant equipment used for test	55
12.5.	Test procedure	55
12.6.	Test data	57
13.	Band Edge Compliance.....	77
13.1.	Test equipment.....	77
13.2.	Block diagram of test setup	77
13.3.	Limits	78
13.4.	Assistant equipment used for test	78
13.5.	Test procedure	78
13.6.	Test result.....	78
13.7.	Test data	79
14.	Power Line Conducted Emissions.....	87
14.1.	Test equipment.....	87
14.2.	Block diagram of test setup	87

14.3. Limits87

14.4. Assistant equipment used for test87

14.5. Test procedure88

14.6. Test result.....88

14.7. Test data89

15. Test Setup Photograph93

16. Photos of the EUT97

Test Report Declare

Applicant	:	Arashi Vision Inc.
Address of Applicant	:	11th Floor, Building 2, Jinlitong Financial Center, Bao'an District, 518000 Shenzhen, Guangdong, China
Equipment under Test	:	2-in-1 Flash + Fill Light
Model No.	:	CINSCBUU
Manufacturer	:	Arashi Vision Inc.
Address of Manufacturer	:	11th Floor, Building 2, Jinlitong Financial Center, Bao'anDistrict, 518000 Shenzhen, Guangdong, China

Test Standard Used:
FCC Rules and Regulations Part 15 Subpart C,
ANSI C63.10-2020+Cor.1-2023,
RSS-247 Issue 4 July 24, 2025,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021),
ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

We Declare:
The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE26060928-1E04		
Date of Receipt:	2026/08/07	Date of Test:	2026/08/07 - 2026/09/16

Created: Zoe Peng	Reviewed: Chen Ziqin	Approved: Ella Gong
		
2026/09/16	2026/09/17	2026/09/18

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/09/18	Ella Gong

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	47 CFR Part 15 15.247(a)(2), RSS-247 clause 6.3.1, RSS-Gen clause 6.7	/	Pass
2	Peak Output Power	47 CFR Part 15 15.247(b)(3), RSS-247 clause 6.3.2	/	Pass
3	Power Spectral Density	47 CFR Part 15 15.247(e), RSS-247 clause 6.3.1	/	Pass
4	RF Conducted Spurious Emissions	47 CFR Part 15 15.247(d), RSS-247 clause 6.6	/	Pass
5	Radiated Emission	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d), RSS-247 clause 6.6, RSS-Gen clause 8.9, RSS-Gen clause 8.10	/	Pass
6	Band Edge Compliance	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d), RSS-247 clause 6.6, RSS-Gen clause 8.9, RSS-Gen clause 8.10	/	Pass
7	Antenna Requirement	47 CFR Part 15 15.203, RSS-Gen clause 6.8	/	Pass
8	Power Line Conducted Emissions	47 CFR Part 15 15.207(a), RSS-Gen clause 8.8	/	Pass

Note1: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

Note2: The power amplifier chips of the test sample in this report comprise two models, GC1103 and KCT8206L-1. They differ only in manufacturer, whereas their RF performance is identical. The test data for 6 dB Bandwidth and 99% Bandwidth are obtained from GC1103 only, all other test data are obtained from power amplifier of GC1103 and KCT8206L-1.

2. General Test Information

2.1. Description of EUT

EUT Name	: 2-in-1 Flash + Fill Light
Model Number	: CINSBUU
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 5V by external adapter or DC 3.7V by battery
Hardware Version	: V22
Software Version	: V1.0.0.14
Antenna Type	: FPC Antenna
Max Antenna Gain(dBi)	: 1.48dBi

Radio Specification	: Bluetooth LE
Operation Frequency	: 2402 MHz to 2480 MHz
Modulation	: GFSK

Bluetooth LE 1Mbps Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
Charging cable	Liangang	LS1653-230301	Length: 59cm, without core

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: RF_Test.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table:

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Channel, and Frequency			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK 1M	Default	CH0	2402
	Default	CH19	2440
	Default	CH39	2480

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.9%
Peak Output Power (Conducted) (Spectrum analyzer)	0.98 dB
Peak Output Power (Conducted) (Power Sensor)	1.18 dB
Power Spectral Density (Base EIRP)	1.51 dB
Power Spectral Density (Spectrum analyzer)	0.98 dB
Frequencies Stability	1.9 kHz
Conducted spurious emissions	1.21 dB ($9\text{ kHz} \leq f < 7\text{ GHz}$);
	3.31 dB ($7\text{ GHz} \leq f < 40\text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	5.5×10^{-8}
Time	0.11%
Temperature	0.3 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.28 dB (Antenna Polarize: V)
	4.14 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.22 dB (1 - 6 GHz)
	4.52 dB (6 GHz - 18 GHz)
	4.58 dB (18 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 4#)				
Signal &Spectrum Analyzer	R&S	FSV3044	101173	2027/02/27
Wideband Radio Communication Tester	R&S	CMW500	168801	2027/02/27
MXG Vector Signal Generator	Agilent	N5182A	MY19060405	2027/03/18
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2027/06/21
RF Control Unit	Tonscend	JS0806-2	21I8060485	2027/02/27
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2027/02/27
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

4. 6 dB Bandwidth

4.1. Block diagram of test setup

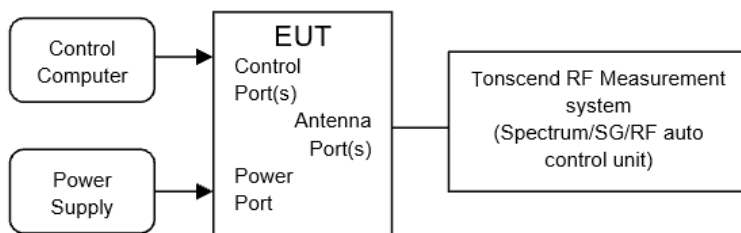

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report.


4.4. Test result

Test Engineer:	Tyang	Test Site:	RF Measurement System 4#
Ambient Condition:	27℃,35%RH	Test Date:	2026.08.28-2026.09.02
Test Power Supply:	Battery	Sample Number:	S26060928-008

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.76	2401.61	2402.36	0.5	PASS
		2440	0.75	2439.61	2440.36	0.5	PASS
		2480	0.75	2479.61	2480.36	0.5	PASS


4.5. Test graphs



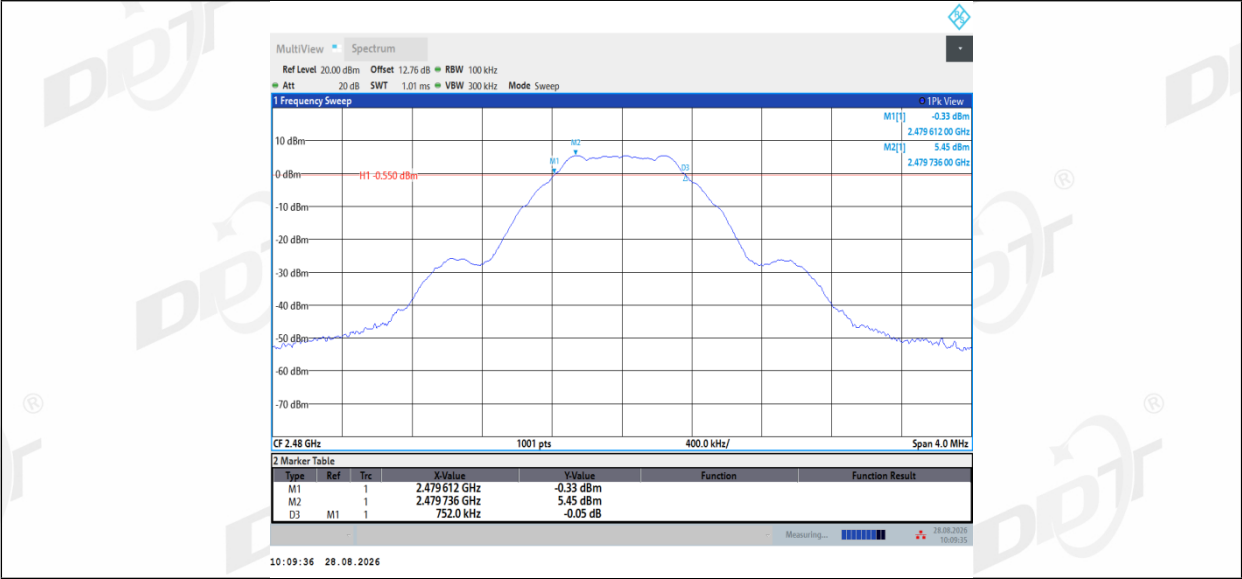

5. 99% Bandwidth

5.1. Block diagram of test setup

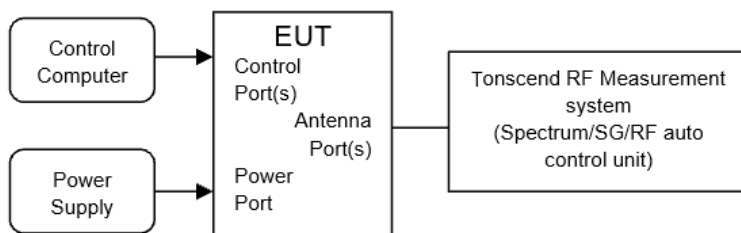

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:


RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


5.4. Test result

Test Engineer:	Tyang	Test Site:	RF Measurement System 4#
Ambient Condition:	27℃,35%RH	Test Date:	2026.08.28-2026.09.02
Test Power Supply:	Battery	Sample Number:	S26060928-008

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	1.0194	2401.4802	2402.4996	---	---
		2440	1.0173	2439.4813	2440.4986	---	---
		2480	1.0115	2479.4826	2480.4940	---	---


5.5. Test graphs

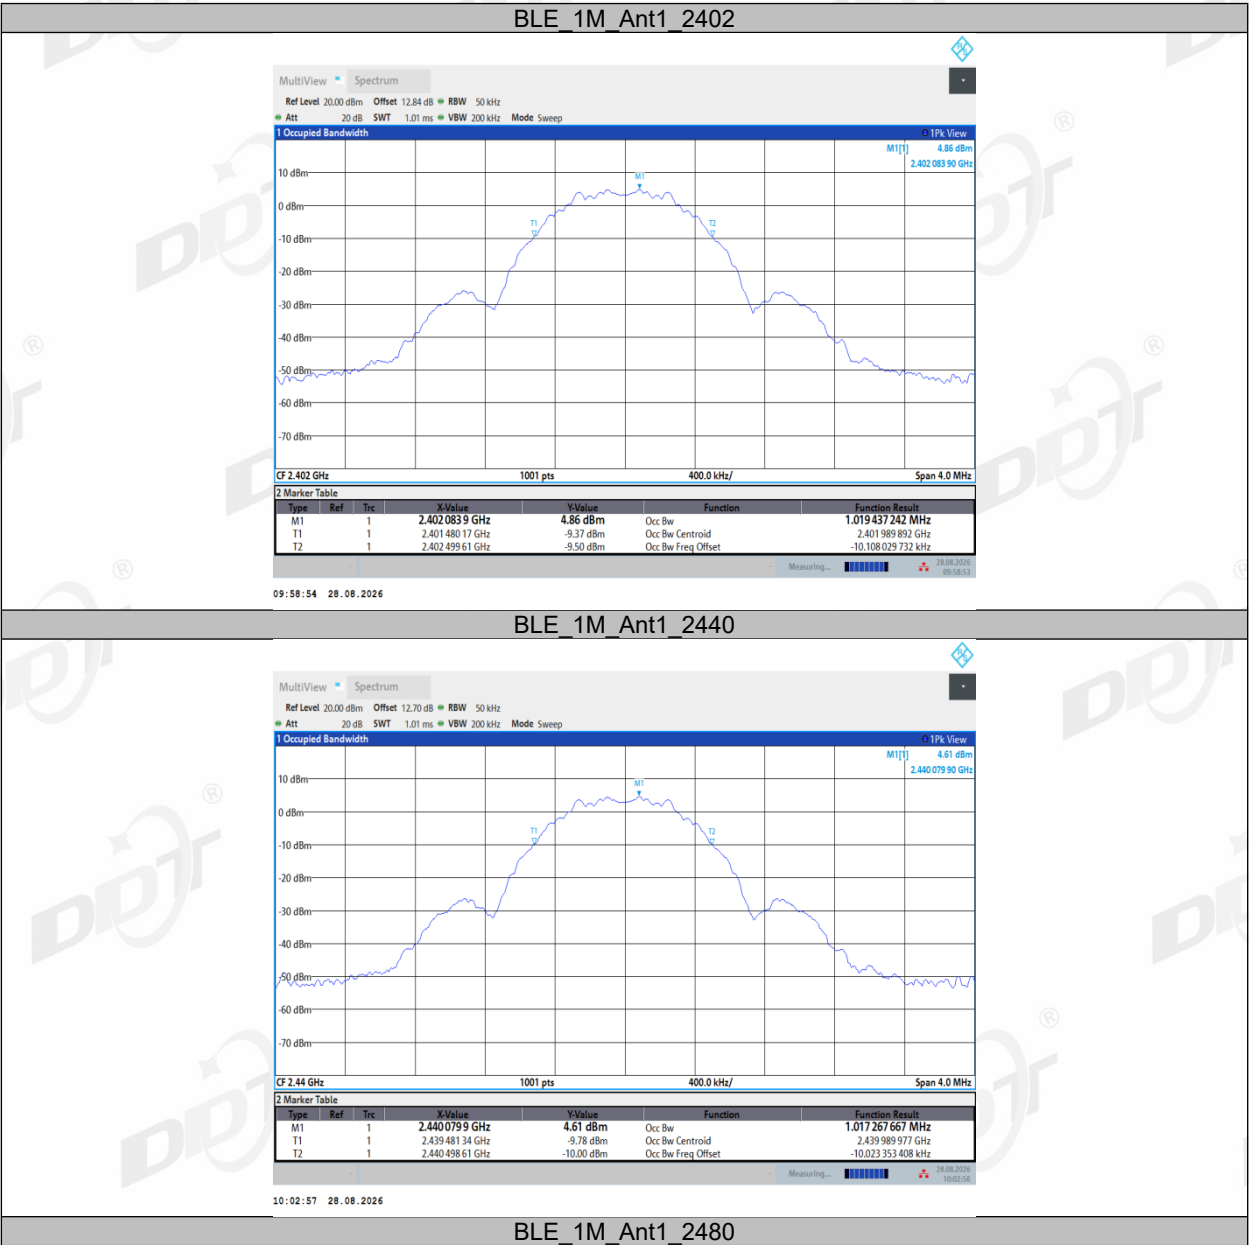

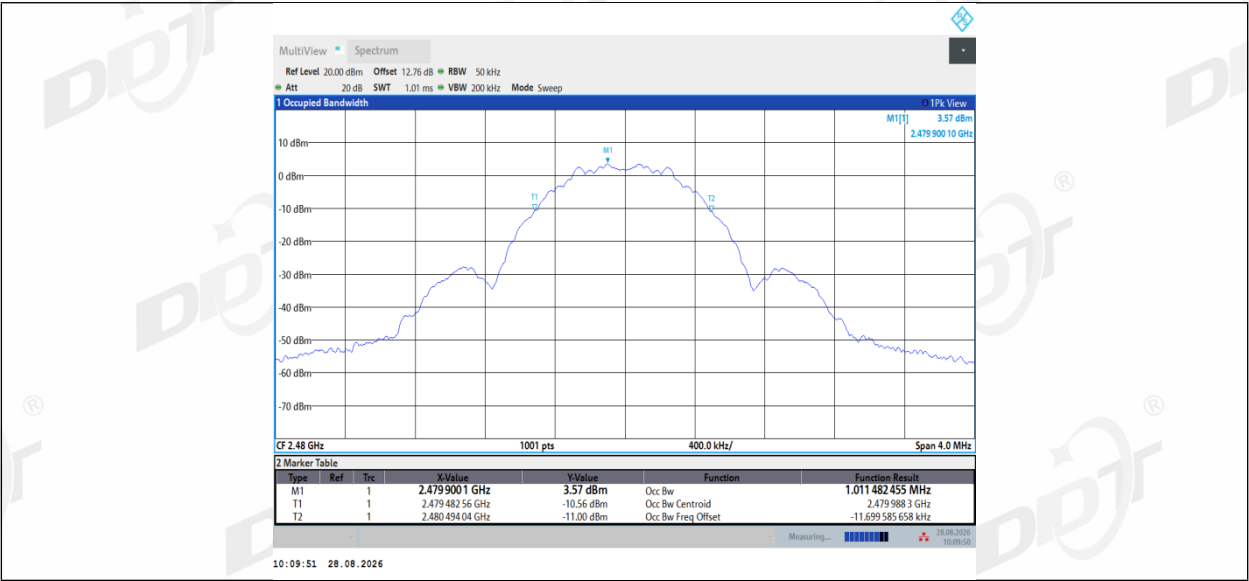

6. Maximum Peak Output Power

6.1. Block diagram of test setup

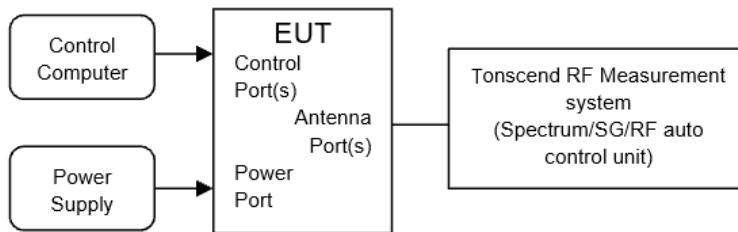

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.9.1.1.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	≥DTS bandwidth
VBW:	≥3 x RBW
Span	≥3 x RBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, use peak marker function to determine the peak amplitude level.

6.4. Test result

Test Engineer:	Tyang	Test Site:	RF Measurement System 4#
Ambient Condition:	266.1-27°C,43.1-48.3%RH	Test Date:	2026.08.28-2026.09.03
Test Power Supply:	Battery	Sample Number:	S26060928-008 S26080622-005

PA model: GC1103


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Ant1	2402	8.27	≤30	9.75	≤36	PASS
		2440	7.94	≤30	9.42	≤36	PASS
		2480	6.81	≤30	8.29	≤36	PASS


PA model: KCT8206L-1

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Ant1	2402	7.87	≤30	9.35	≤36	PASS
		2440	8.35	≤30	9.83	≤36	PASS
		2480	7.39	≤30	8.87	≤36	PASS



6.5. Test graphs


PA model: GC1103

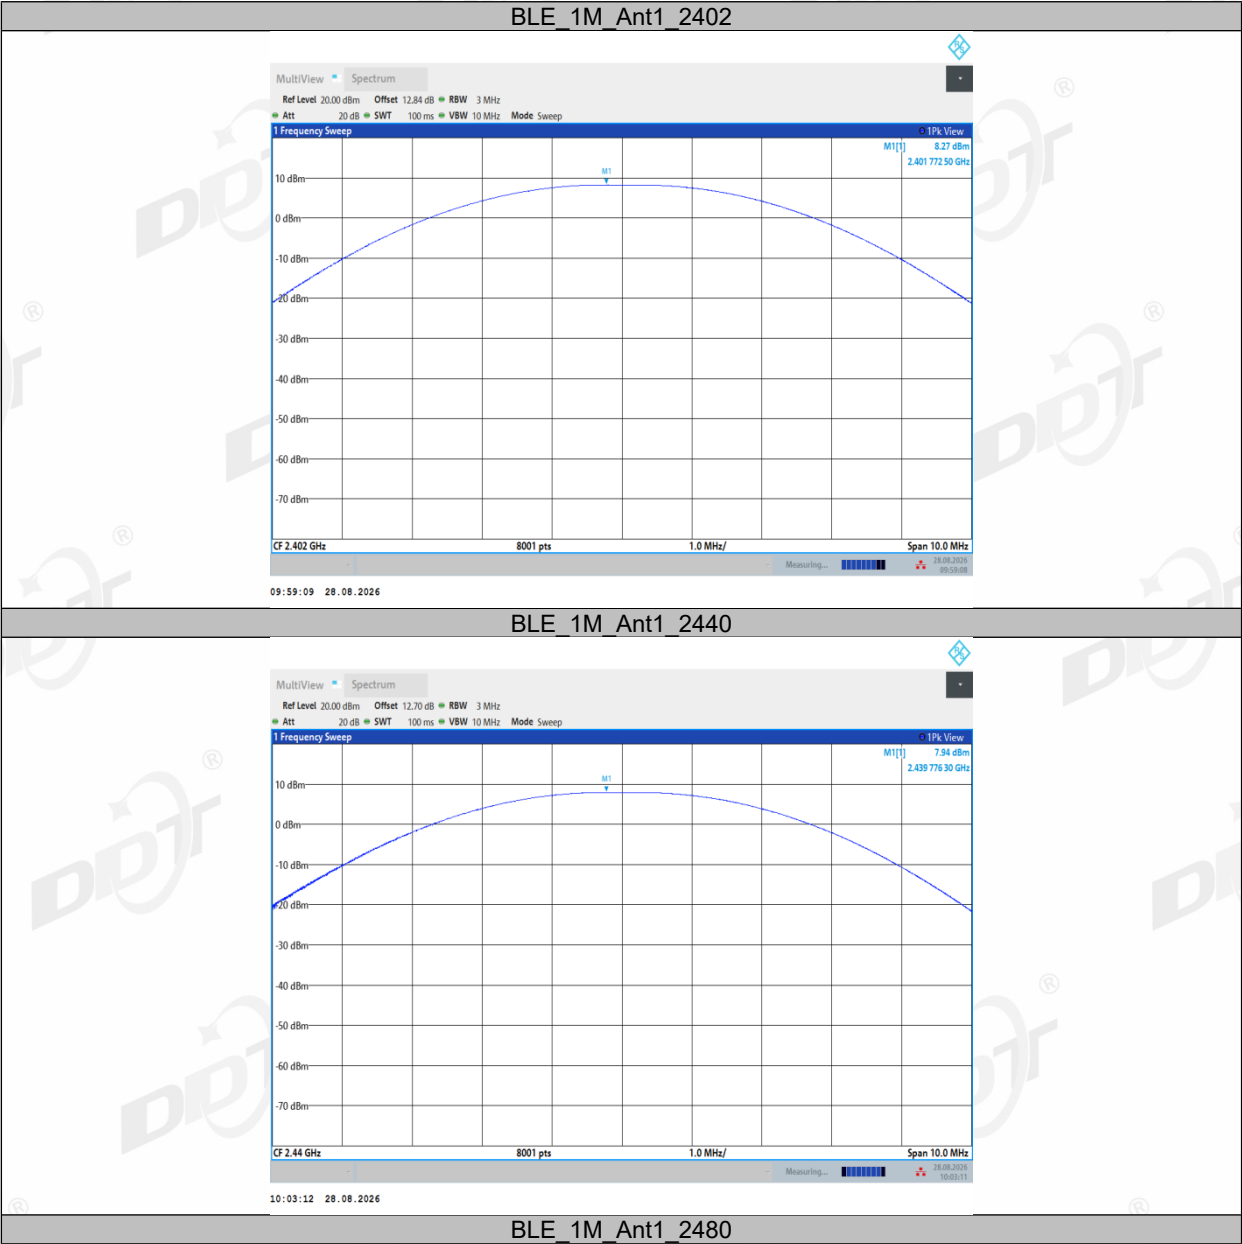

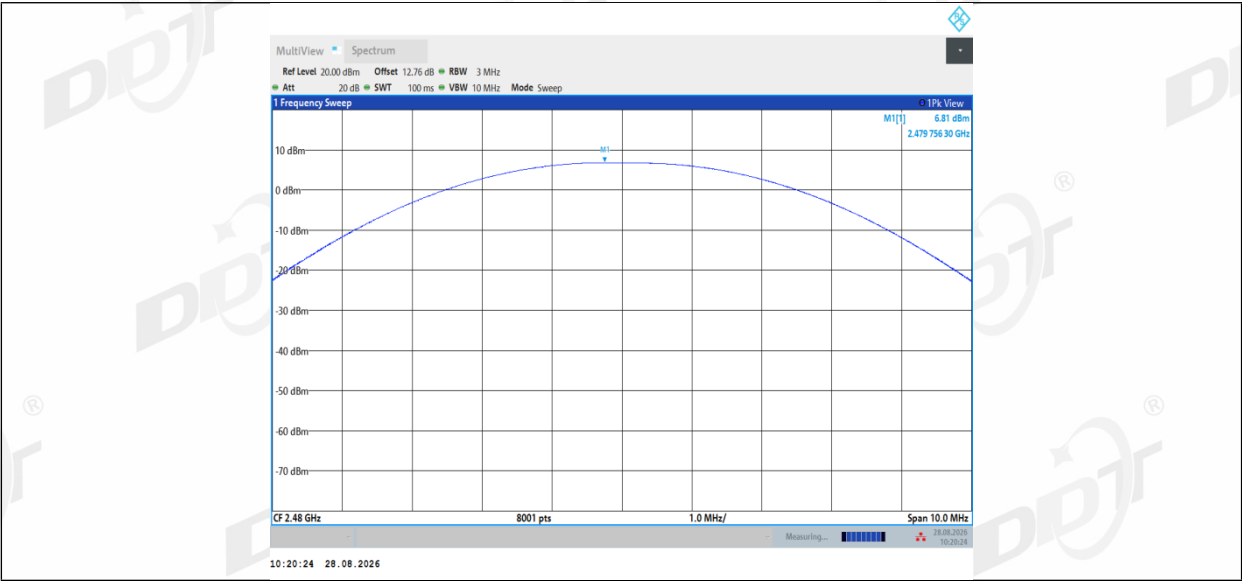


PA model: KCT8206L-1

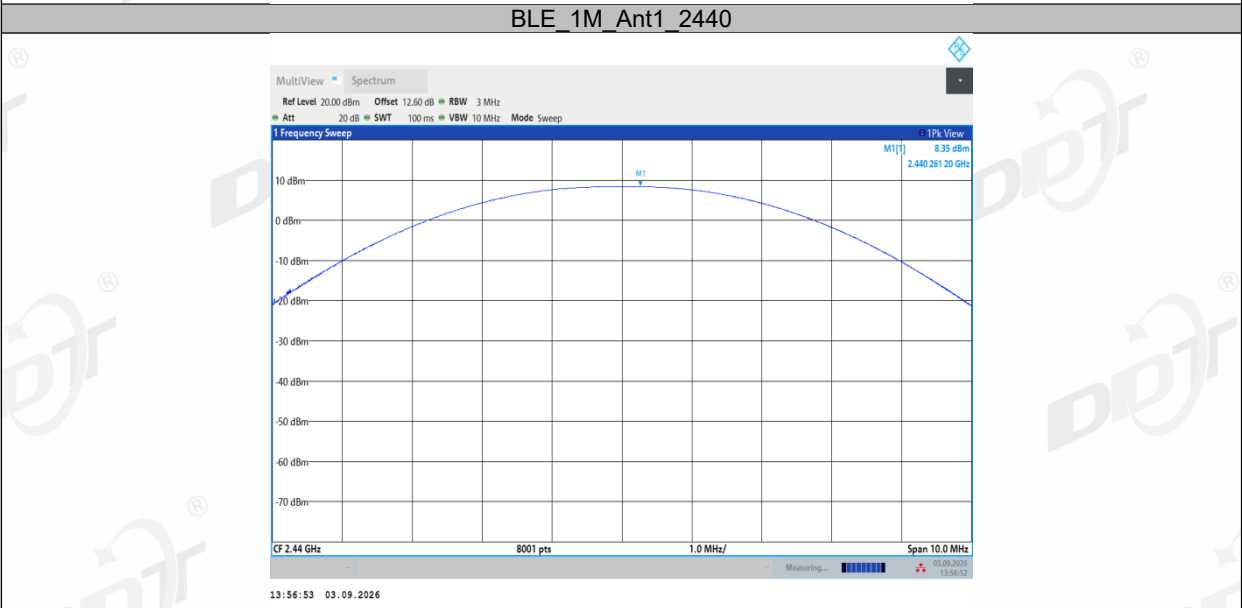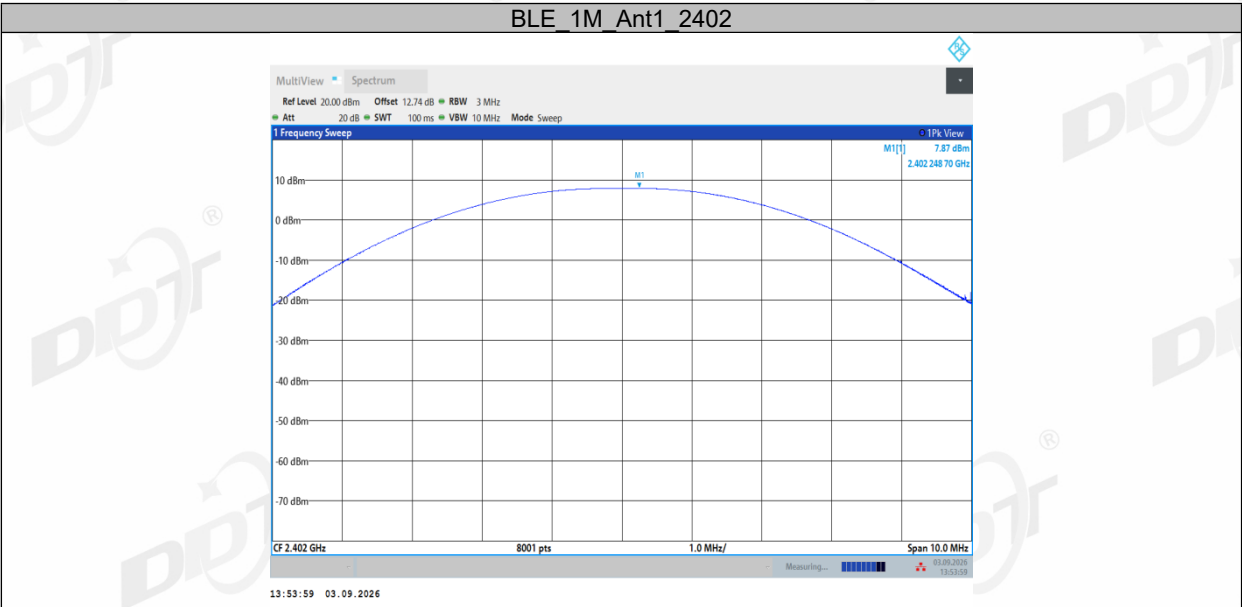

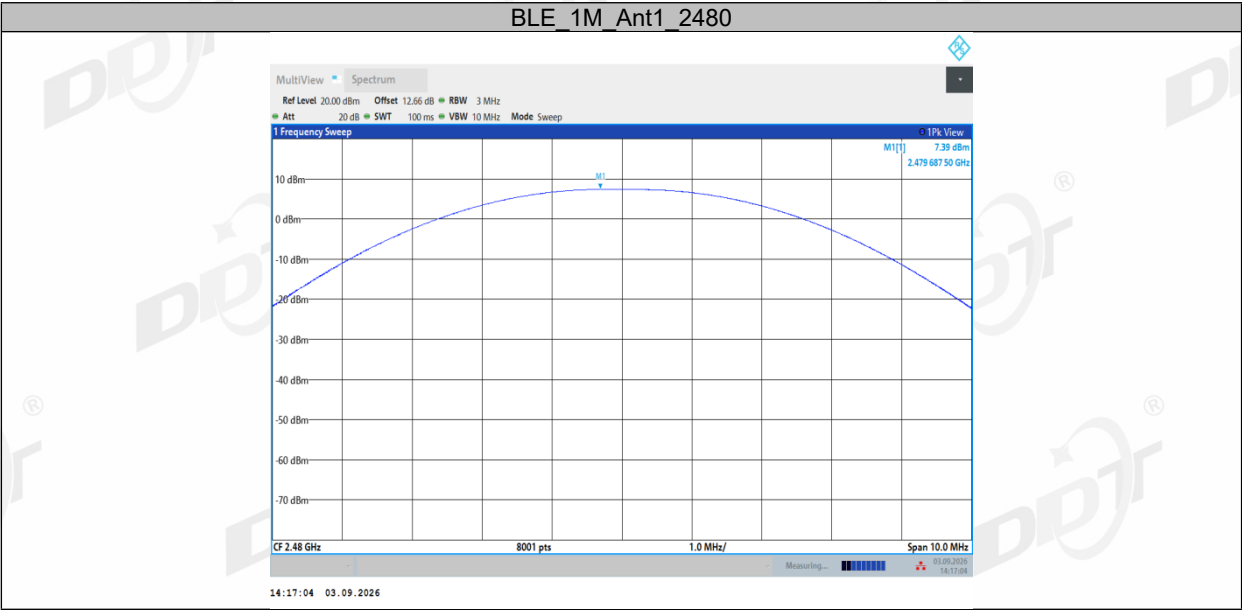

7. Power Spectral Density

7.1. Block diagram of test setup

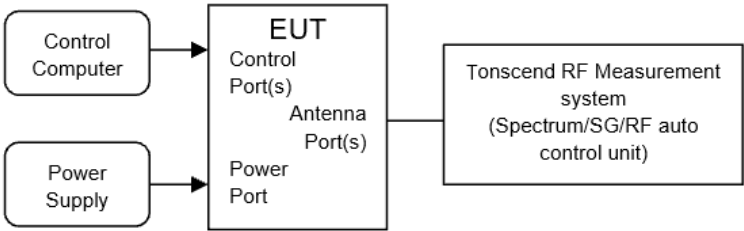

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.10.2.
 - (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
 - (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
 - (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:

Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
 - (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.4. Test result

Test Engineer:	Tyang	Test Site:	RF Measurement System 4#
Ambient Condition:	266.1-27°C,43.1-48.3%RH	Test Date:	2026.08.28-2026.09.03
Test Power Supply:	Battery	Sample Number:	S26060928-008 S26080622-005

PA model: GC1103


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-8.41	≤8.00	PASS
		2440	-8.61	≤8.00	PASS
		2480	-9.71	≤8.00	PASS


PA model: KCT8206L-1

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-9.03	≤8.00	PASS
		2440	-8.29	≤8.00	PASS
		2480	-9.36	≤8.00	PASS


7.5. Test graphs

PA model: GC1103

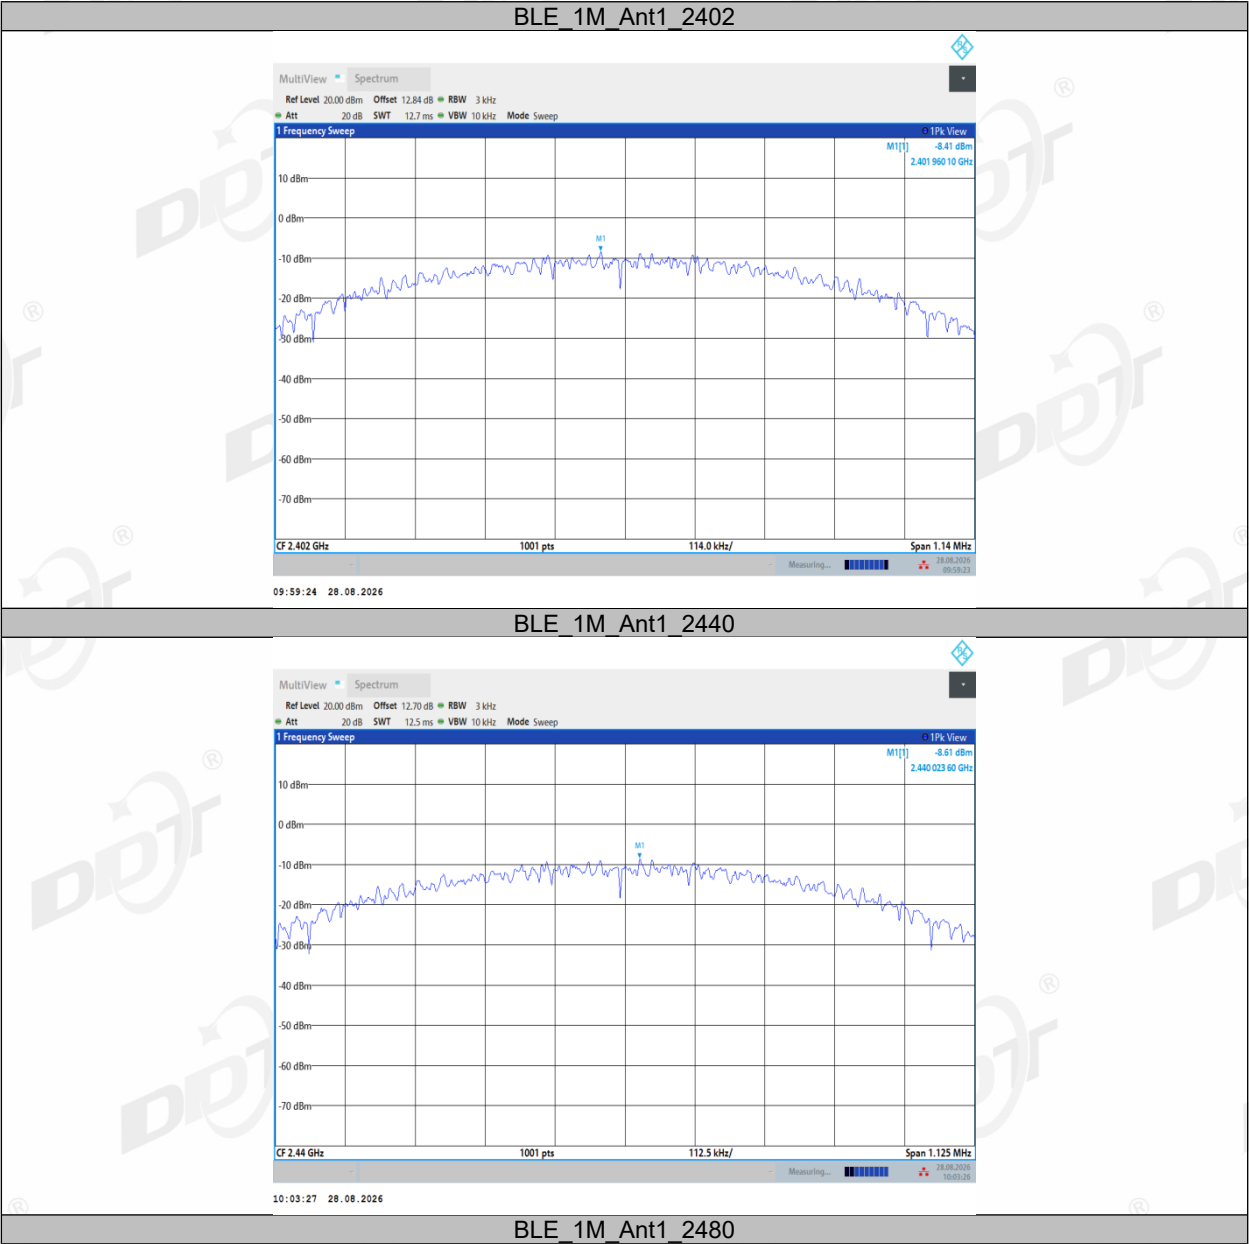

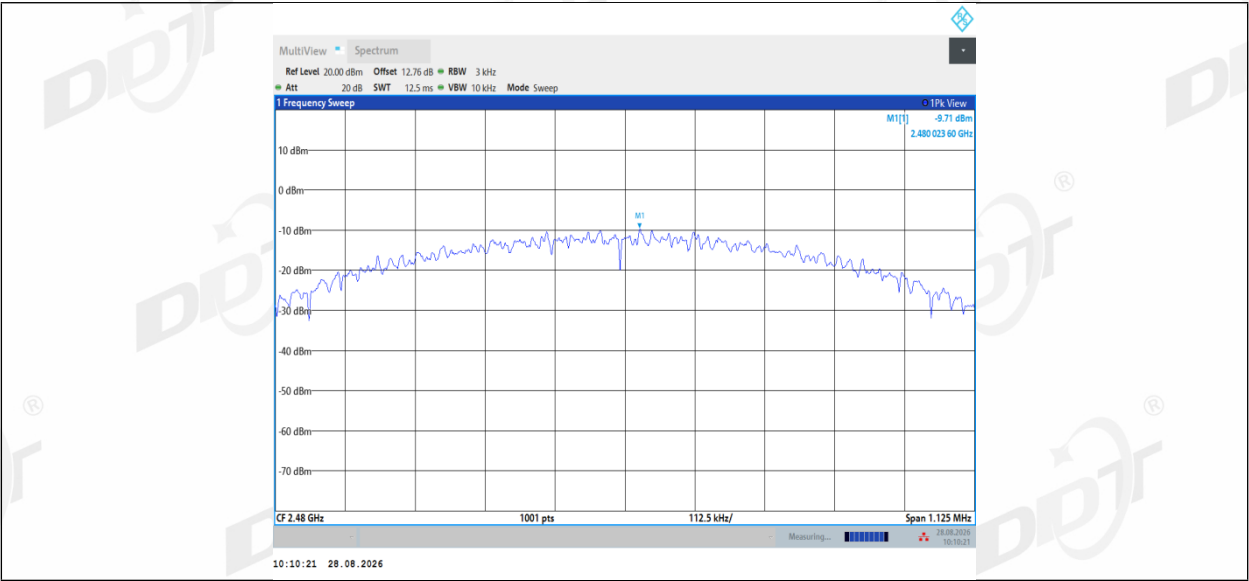


PA model: KCT8206L-1

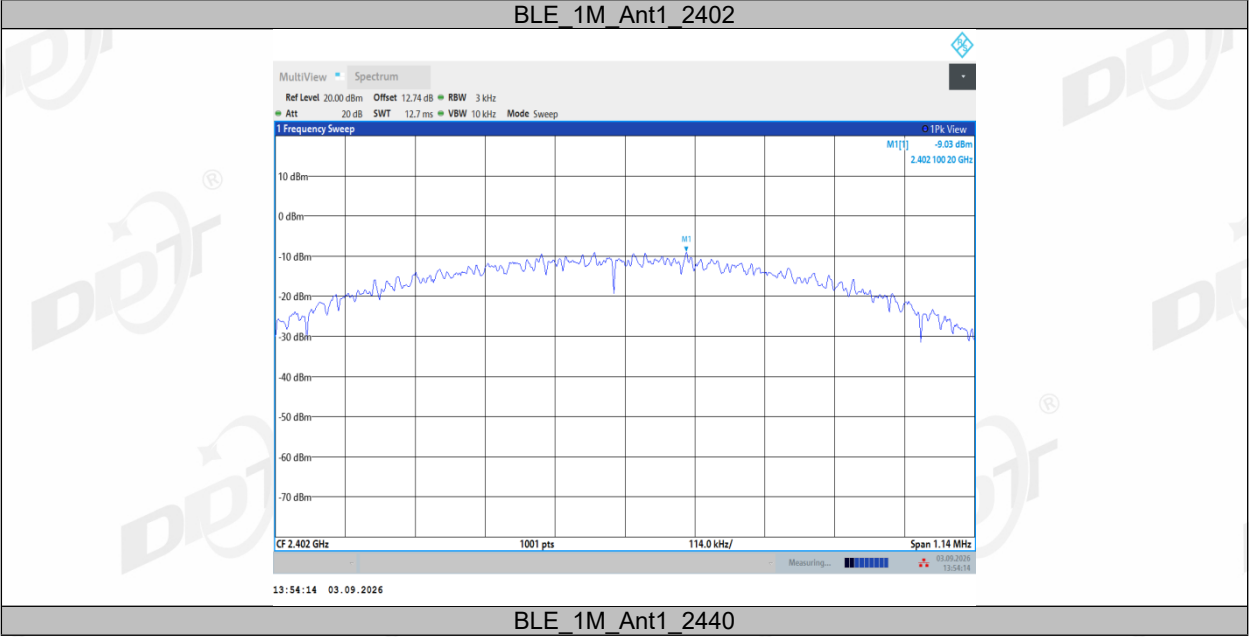



8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

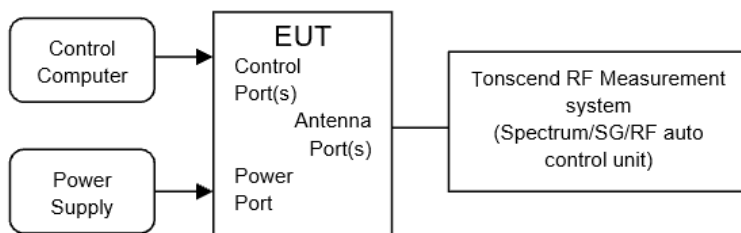

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

8.4. Test result

Test Engineer:	Tyang	Test Site:	RF Measurement System 4#
Ambient Condition:	266.1-27°C,43.1-48.3%RH	Test Date:	2026.08.28-2026.09.03
Test Power Supply:	Battery	Sample Number:	S26060928-008 S26080622-005

PA model: GC1103


Mode	Frequency [MHz]	Measured Range	Verdict
GFSK 1M	2402	2.310 GHz - 2.410 GHz	Pass
	2480	2.470 GHz - 2.500 GHz	Pass

PA model: KCT8206L-1


Mode	Frequency [MHz]	Measured Range	Verdict
GFSK 1M	2402	2.310 GHz - 2.410 GHz	Pass
	2480	2.470 GHz - 2.500 GHz	Pass

8.5. Test graphs

PA model: GC1103

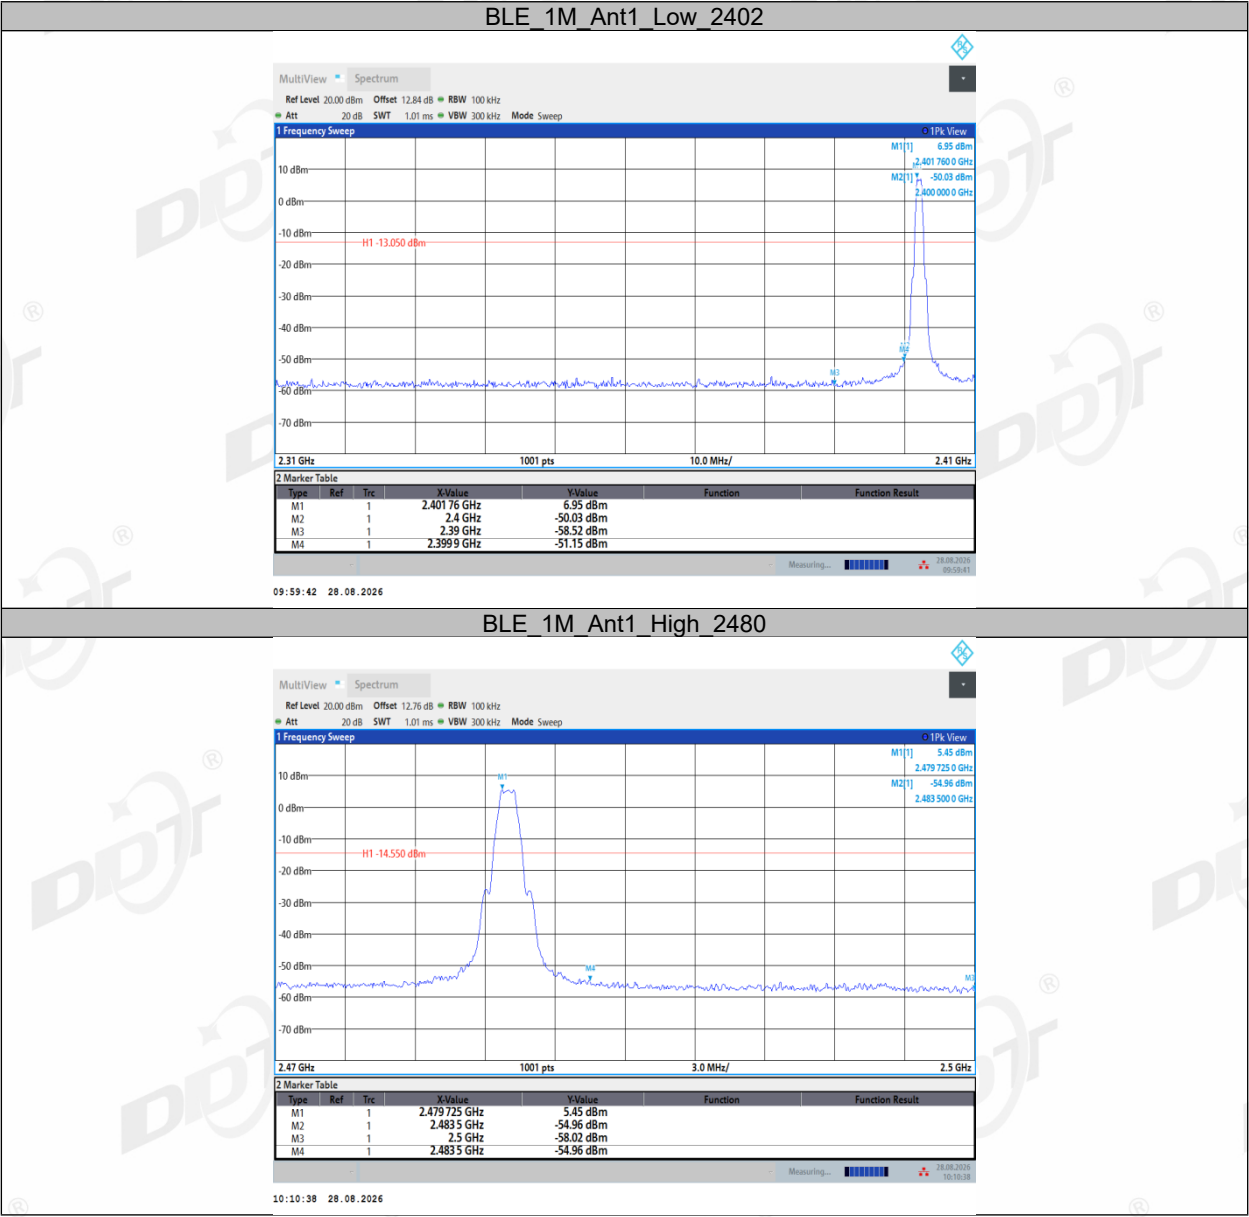


PA model: KCT8206L-1





9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

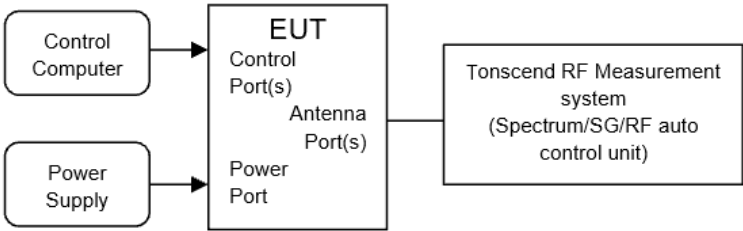

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

- (1) Connect EUT’s antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	≥Span/RBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold

Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test result

Test Engineer:	Tyang	Test Site:	RF Measurement System 4#
Ambient Condition:	266.1-27°C,43.1-48.3%RH	Test Date:	2026.08.28-2026.09.03
Test Power Supply:	Battery	Sample Number:	S26060928-008 S26080622-005

PA model: GC1103


Mode	Frequency [MHz]	Verdict
GFSK 1M	2402	Pass
	2440	Pass
	2480	Pass


PA model: KCT8206L-1

Mode	Frequency [MHz]	Verdict
GFSK 1M	2402	Pass
	2440	Pass
	2480	Pass


9.5. Test graphs

PA model: GC1103

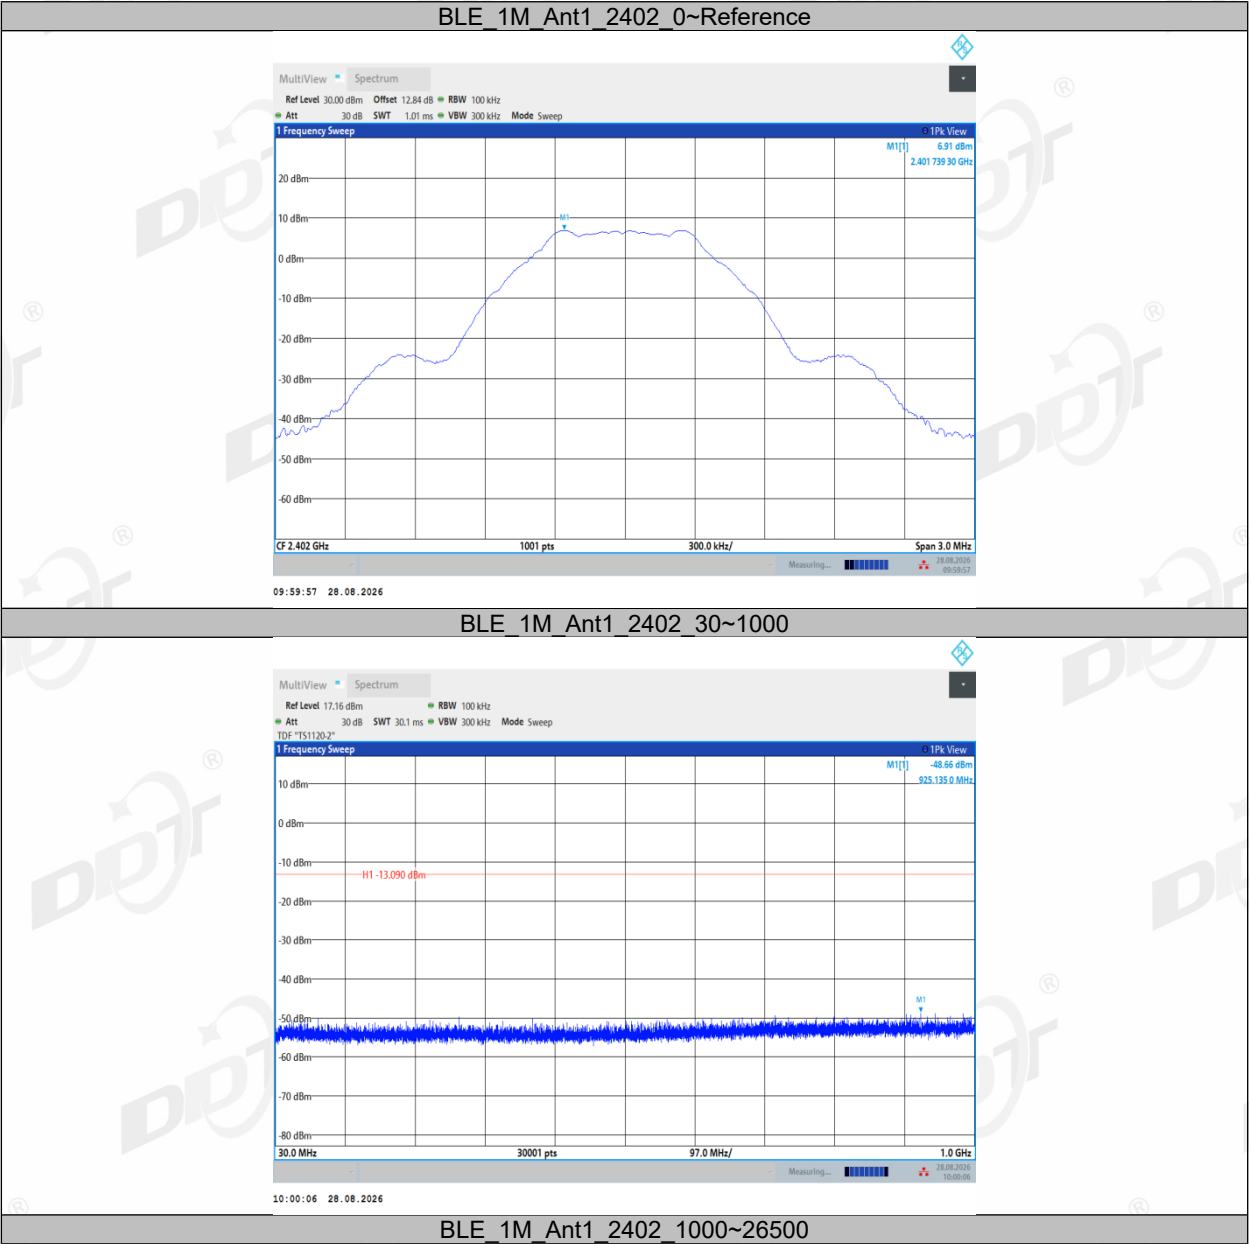


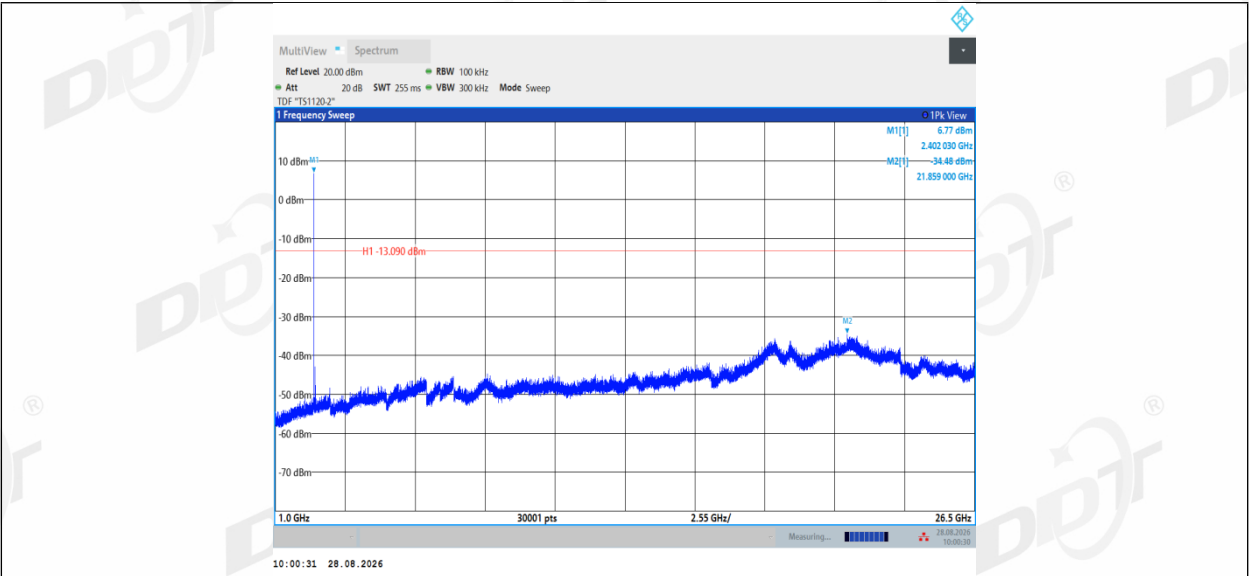


BLE 1M_Ant1_2440_0~Reference

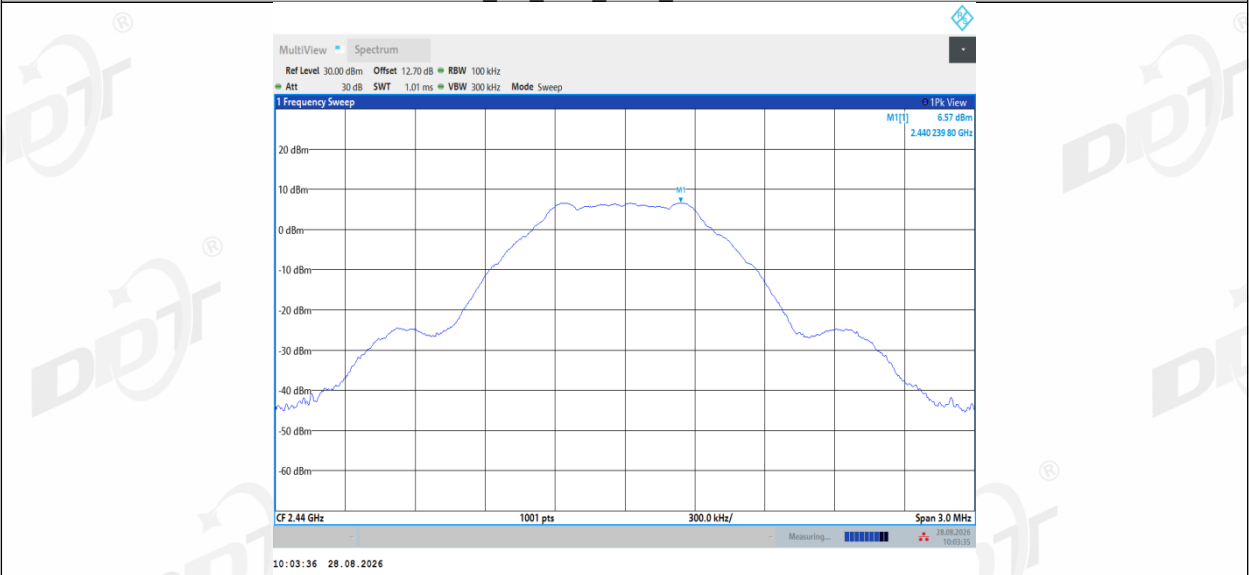


BLE 1M_Ant1_2440_30~1000

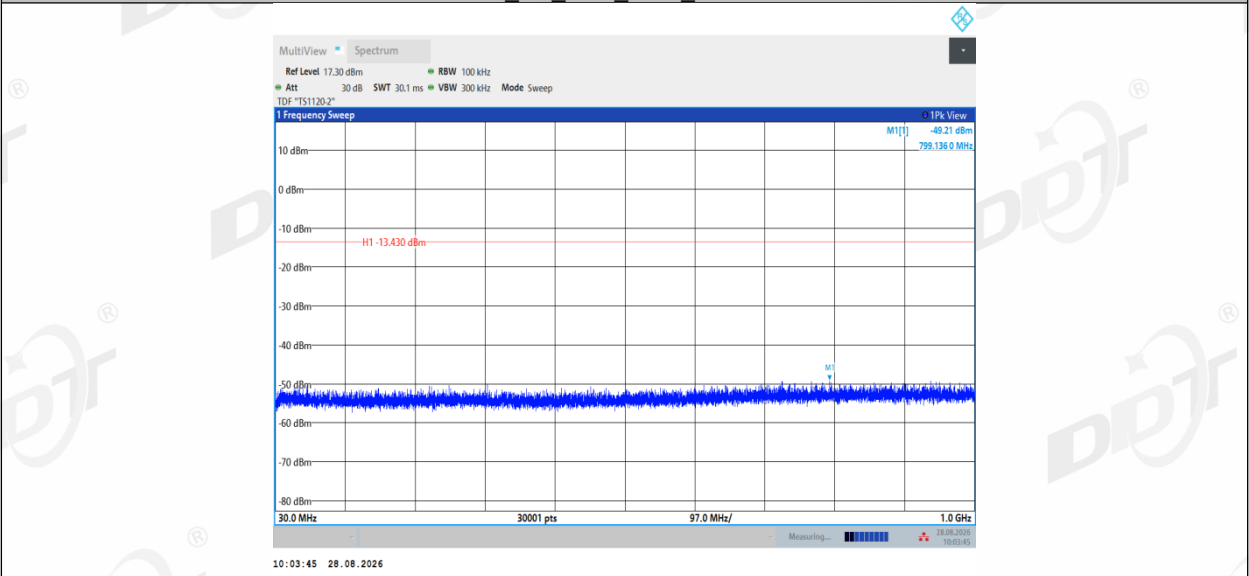


BLE 1M_Ant1_2440_1000~26500

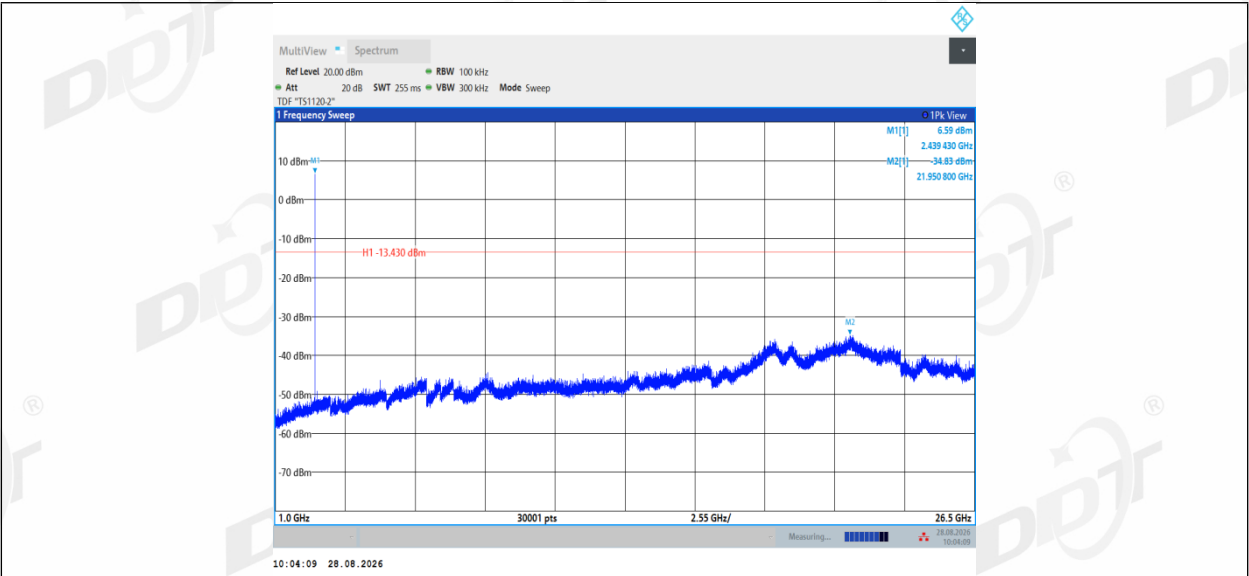


BLE 1M_Ant1_2480_0~Reference

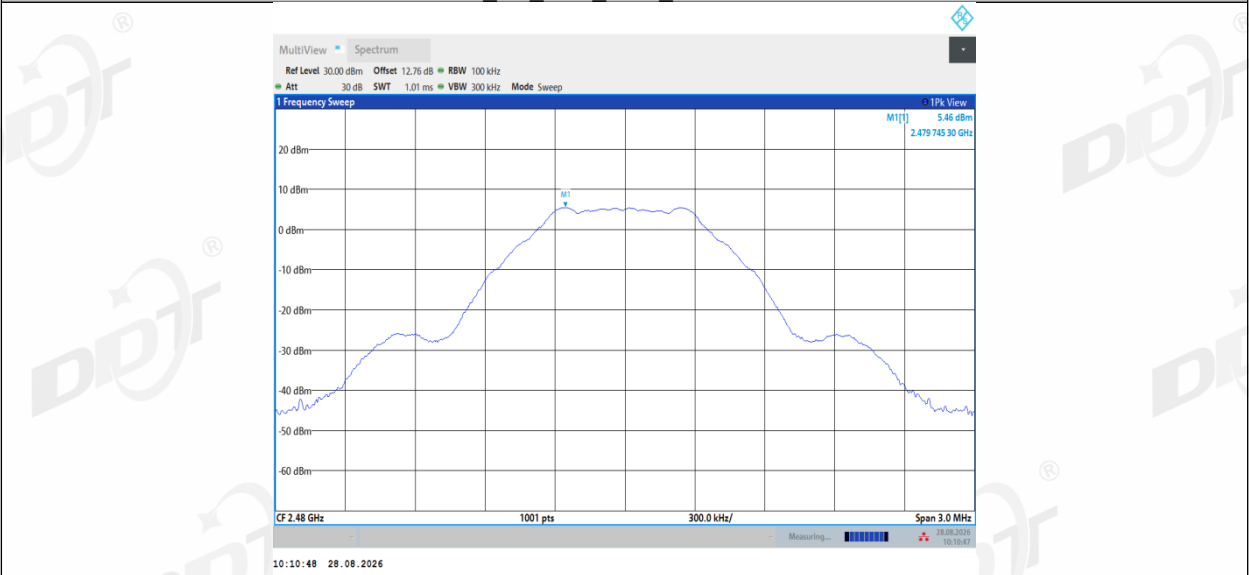


BLE 1M_Ant1_2480_30~1000

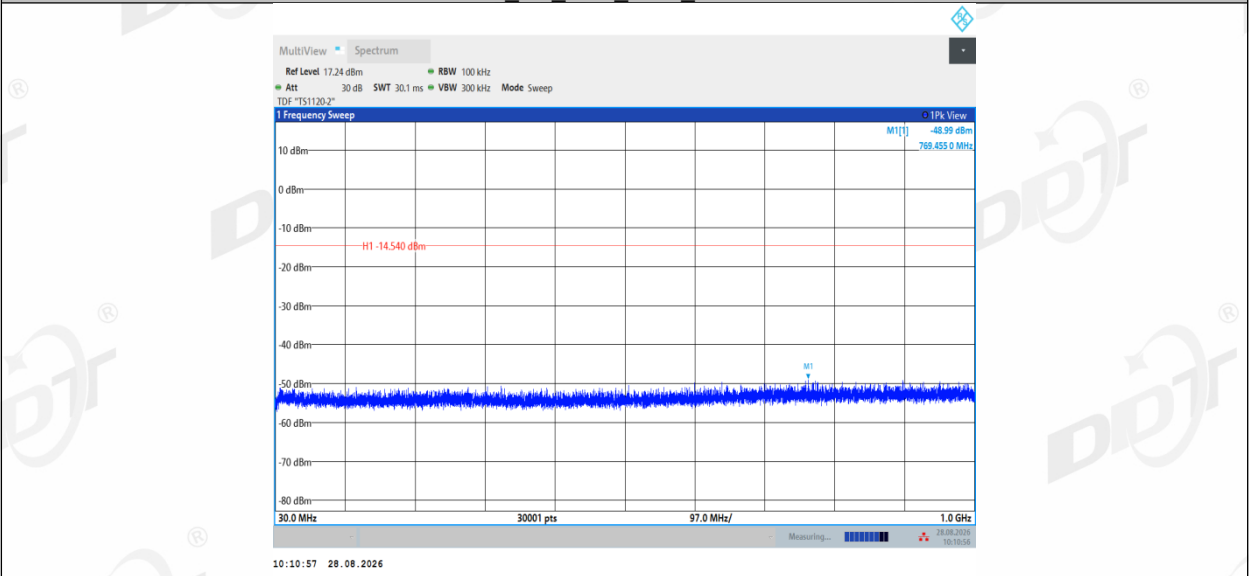


BLE 1M_Ant1_2480_1000~26500

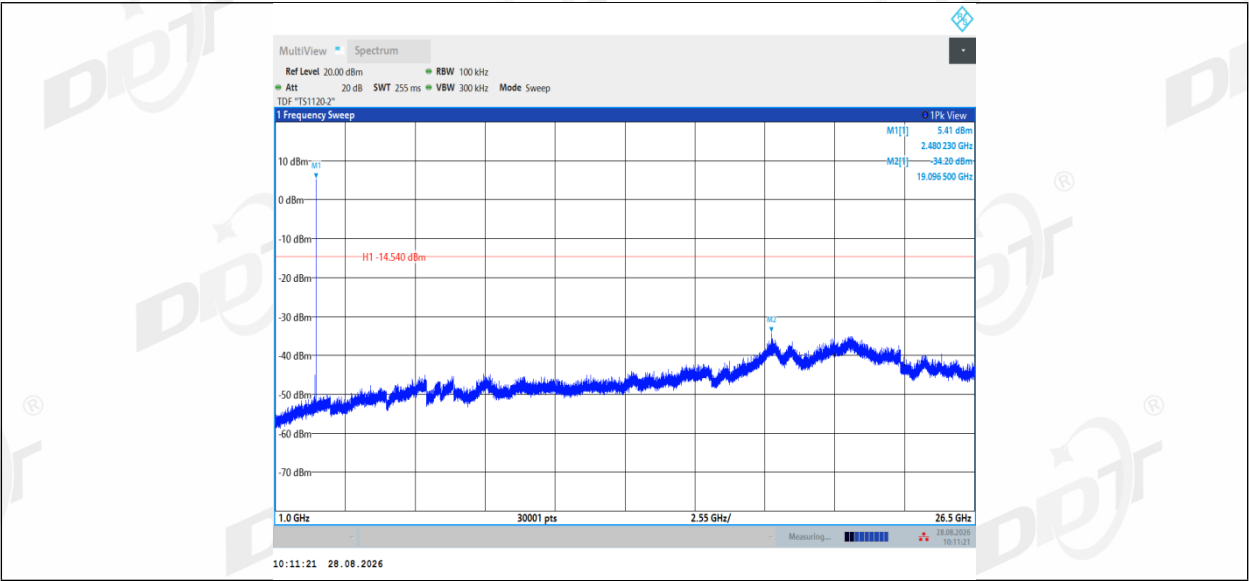


PA model: KCT8206L-1

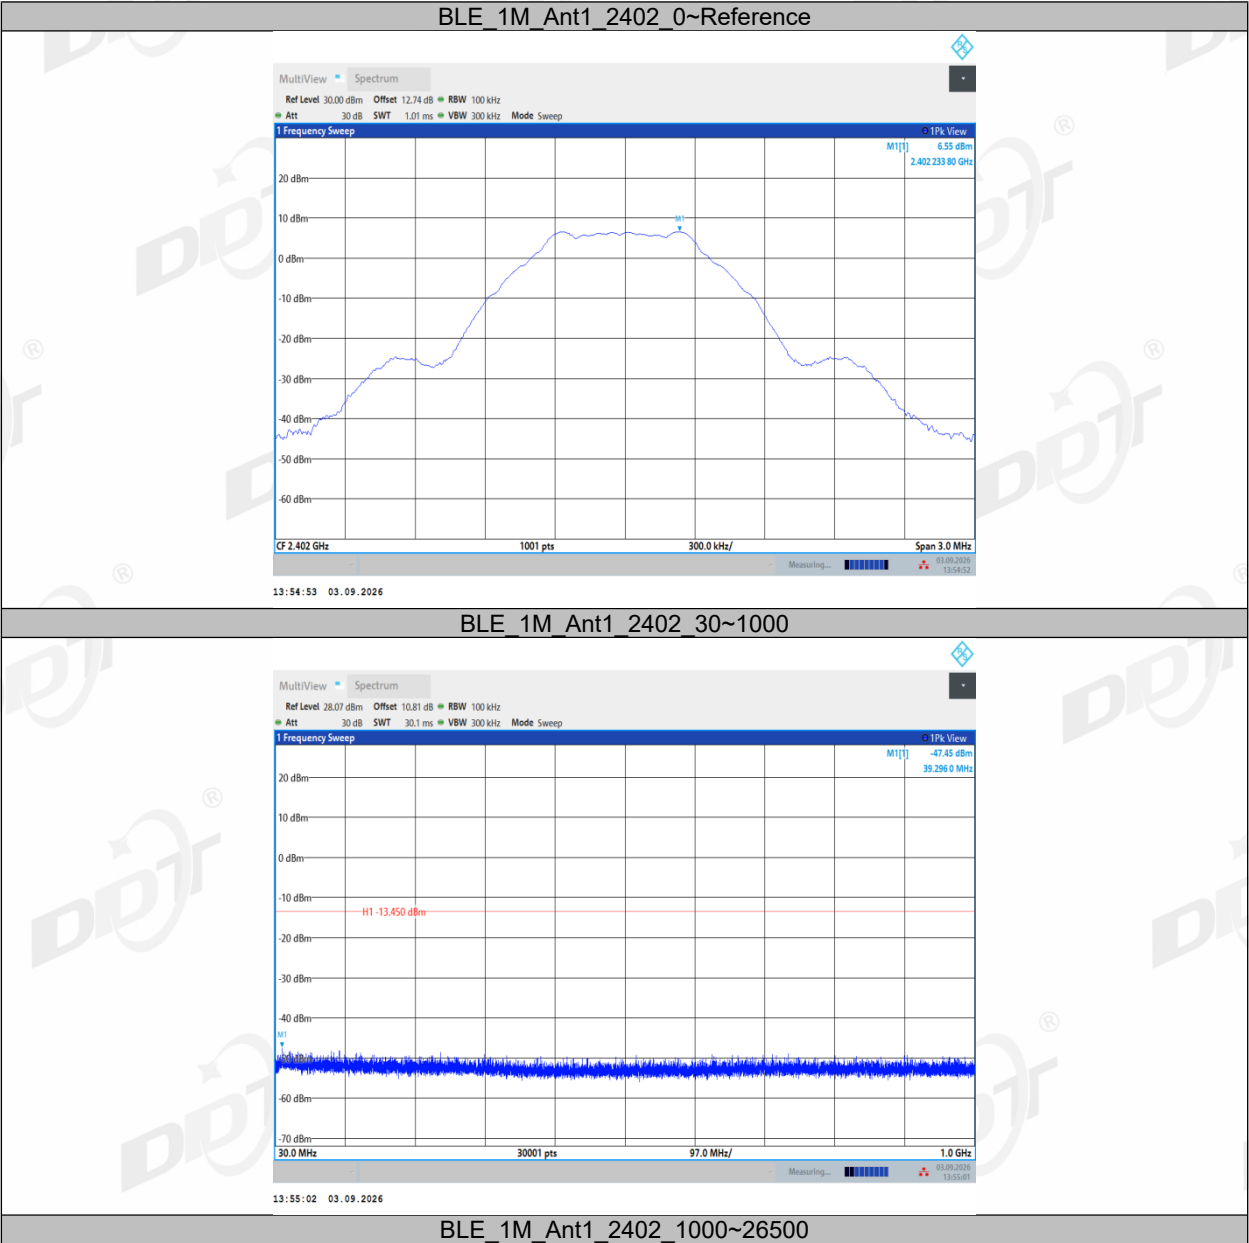


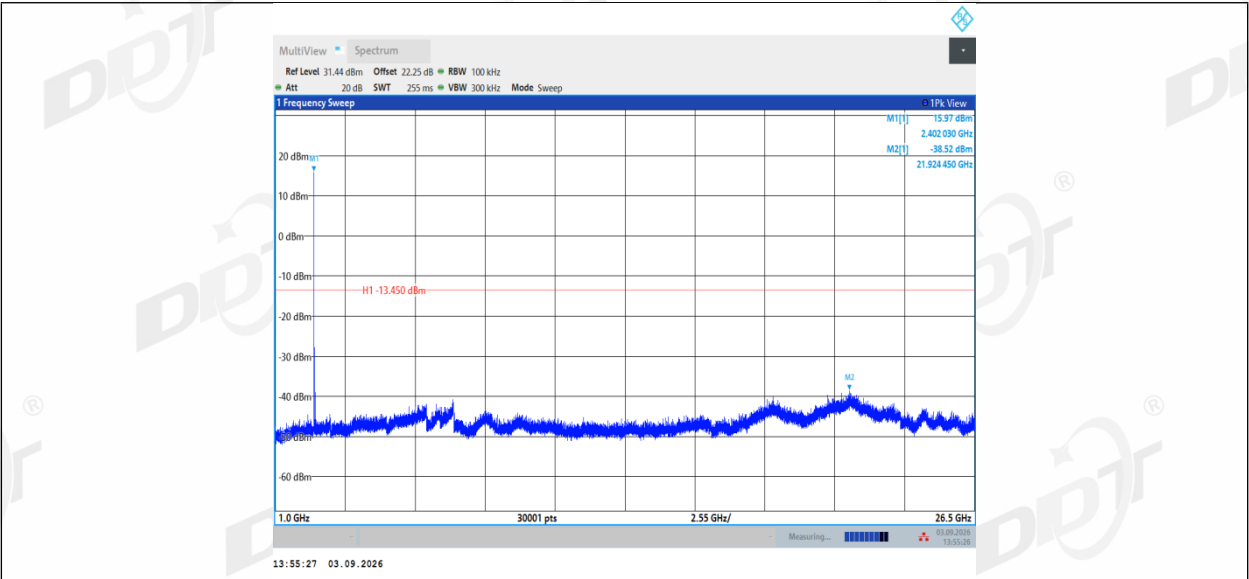


BLE 1M_Ant1_2440_0~Reference

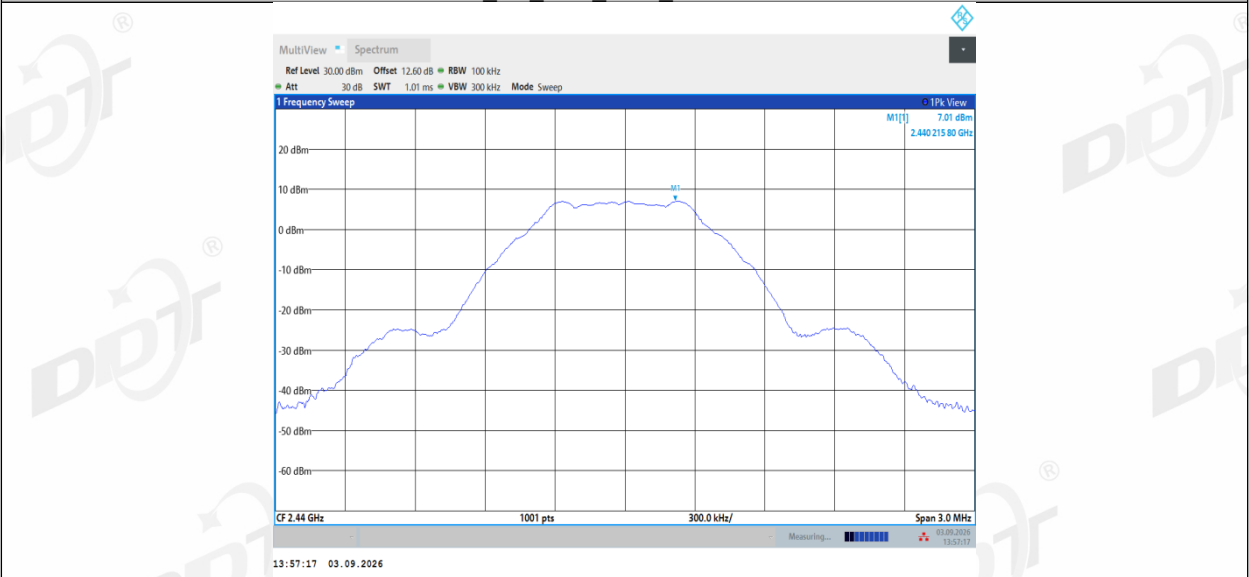


BLE 1M_Ant1_2440_30~1000

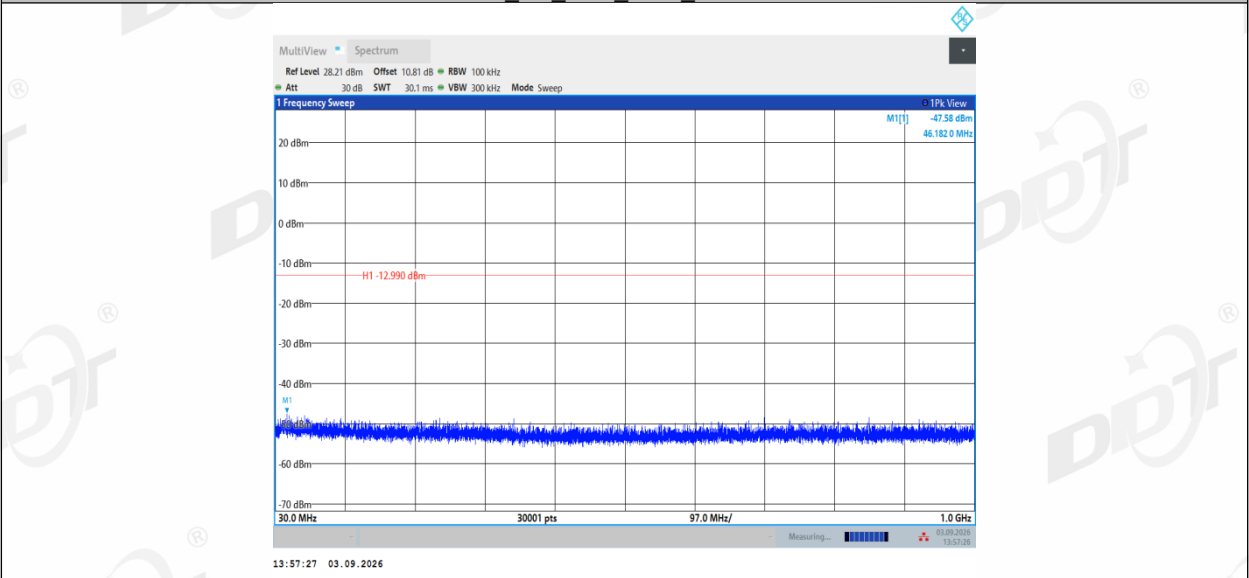


BLE 1M_Ant1_2440_1000~26500

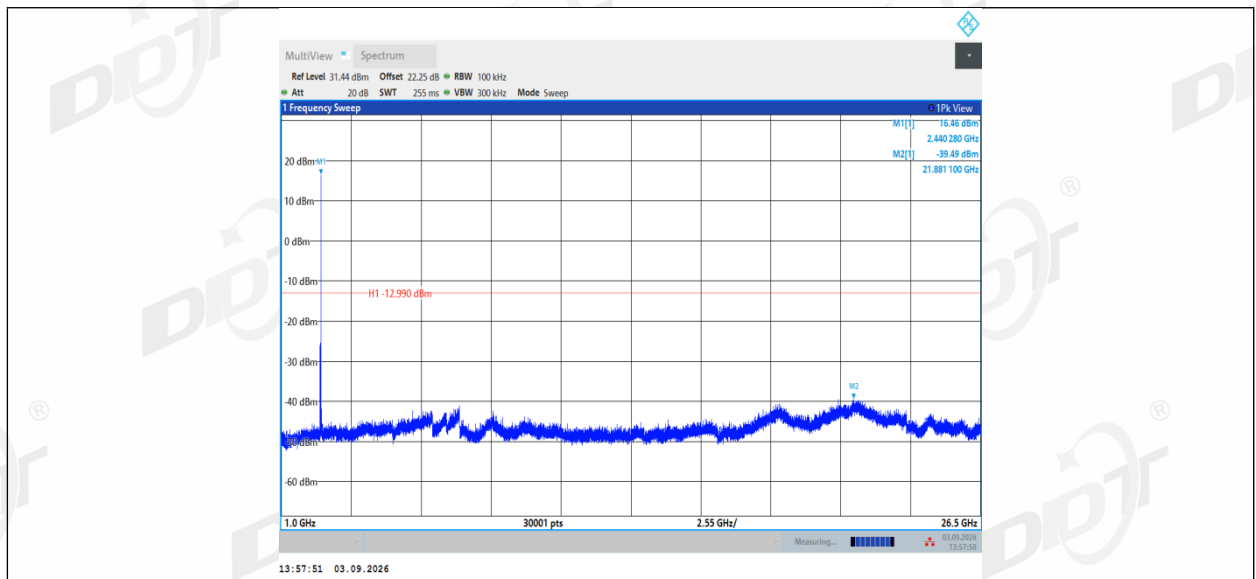


BLE_1M_Ant1_2480_0~Reference

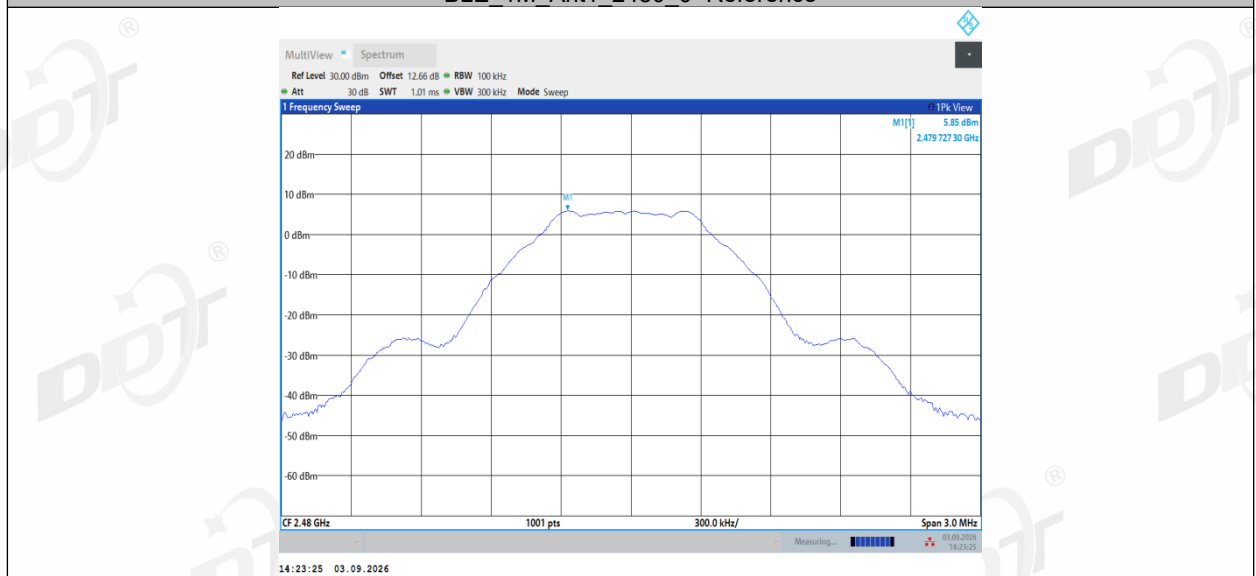

BLE_1M_Ant1_2480_30~1000

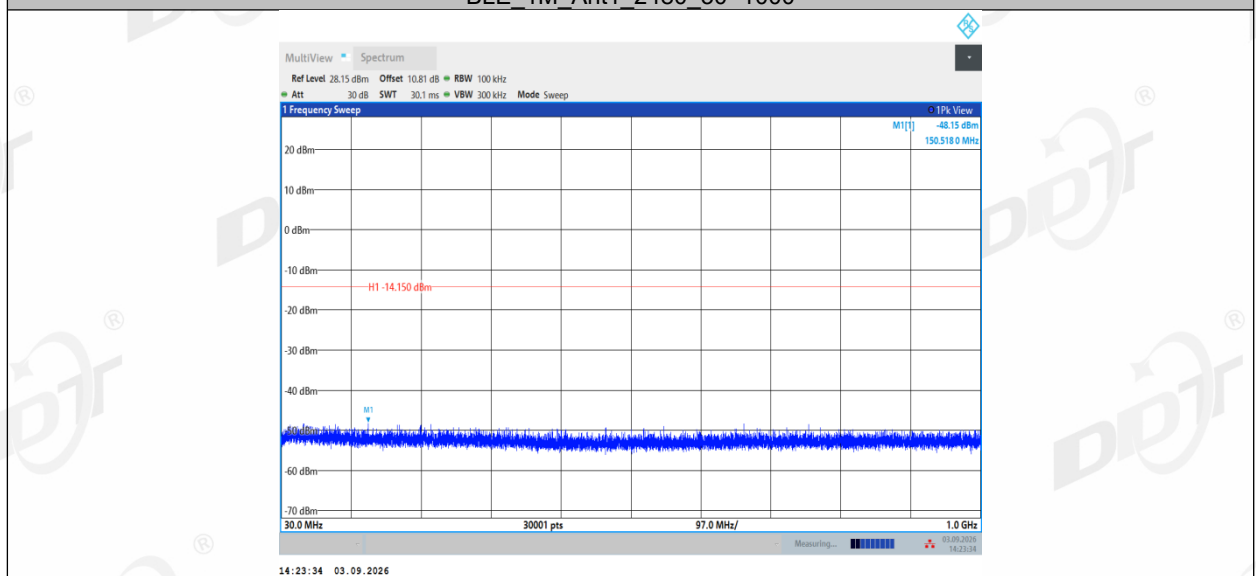


BLE	1M	Ant1	2480	1000~26500
-----	----	------	------	------------

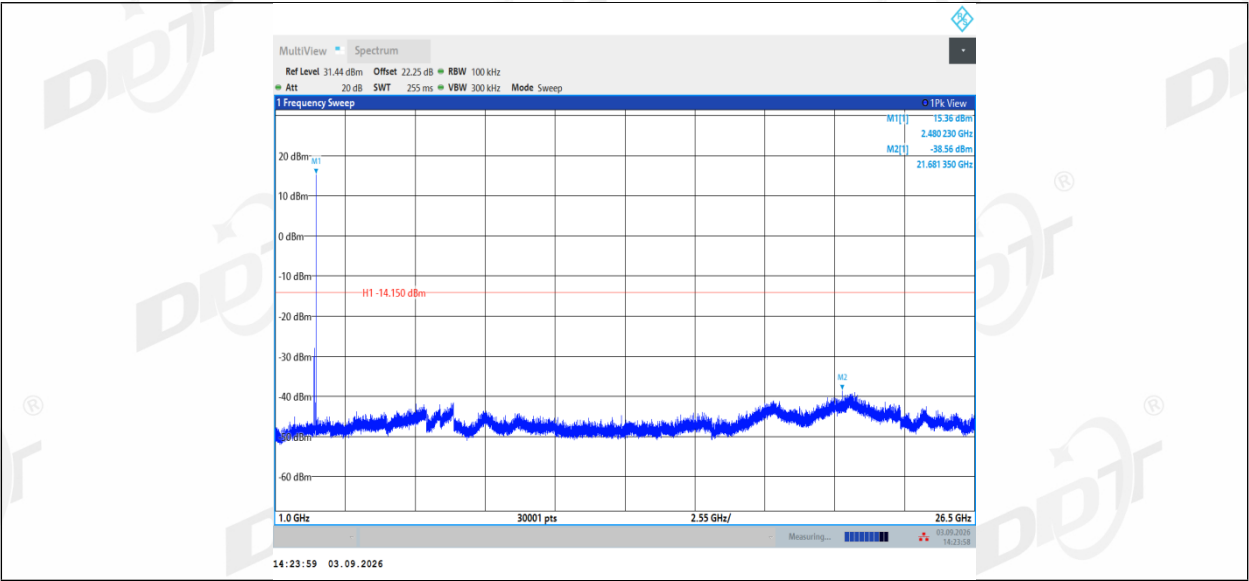

10. Duty Cycle

10.1. Block diagram of test setup

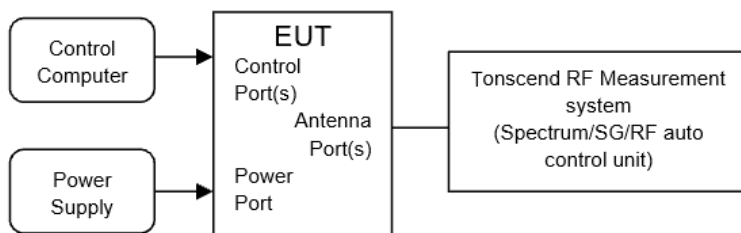

10.2. Limit

Just for Report.

10.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.
set the Spectrum Analyzer as below:
 - Centre Frequency: The centre frequency of the middle hopping channel.
 - Resolution BW: 10 MHz.
 - Video BW: 10 MHz.
 - Span: Zero span.
 - Detector: Peak.
 - Trace Mode: Clear Write.
 - Sweep: Video Trigger
- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
Duty cycle= Pulse's on time / Burst cycle

10.4. Test result

Test Engineer:	Tyang	Test Site:	RF Measurement System 4#
Ambient Condition:	266.1-27°C,43.1-48.3%RH	Test Date:	2026.08.28-2026.09.03
Test Power Supply:	Battery	Sample Number:	S26060928-008 S26080622-005

PA model: GC1103


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.00	0.00	100	0
		2440	0.00	0.00	100	0
		2480	0.00	0.00	100	0

PA model: KCT8206L-1


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.00	0.00	100	0
		2440	0.00	0.00	100	0
		2480	0.00	0.00	100	0

10.5. Test graphs



PA model: GC1103

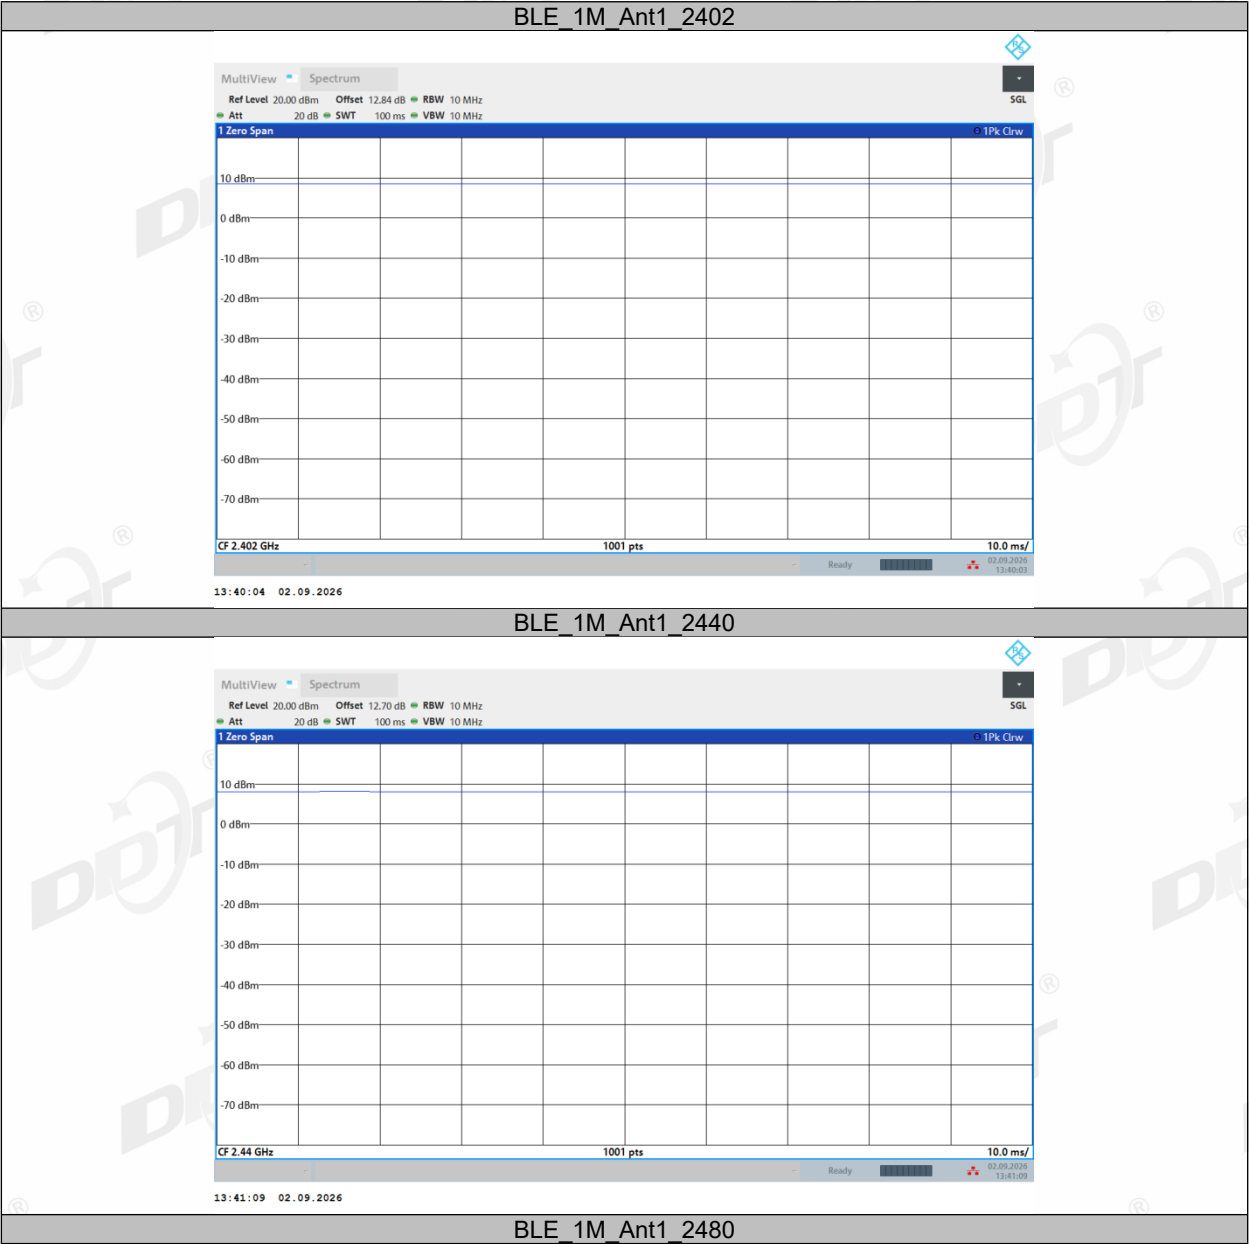


BLE_1M_Ant1_2480

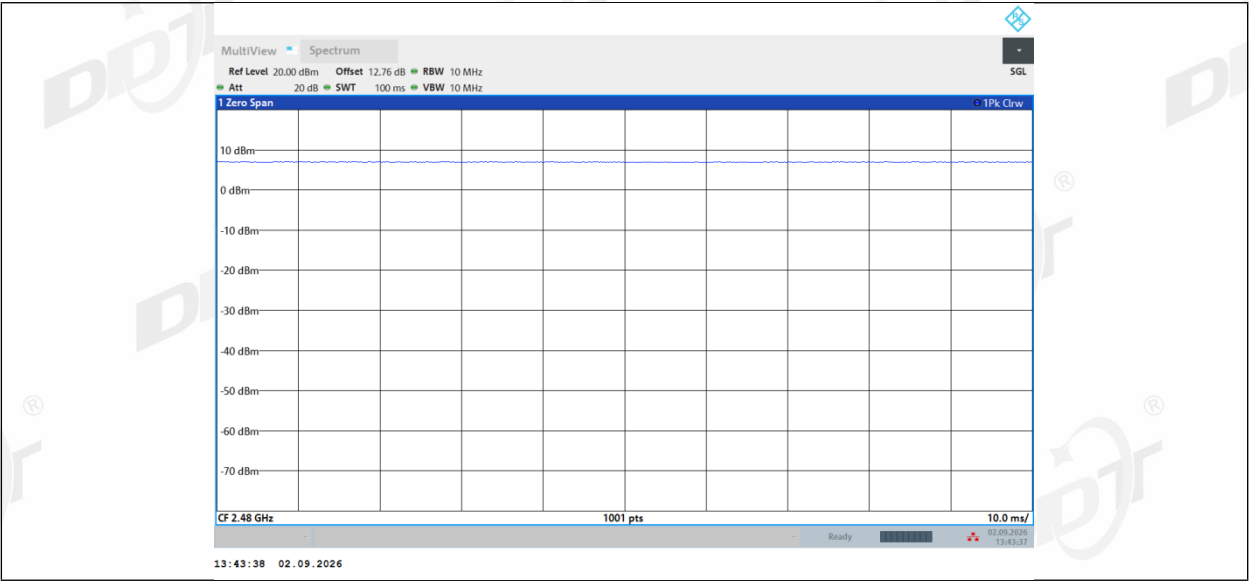

PA model: KCT8206L-1

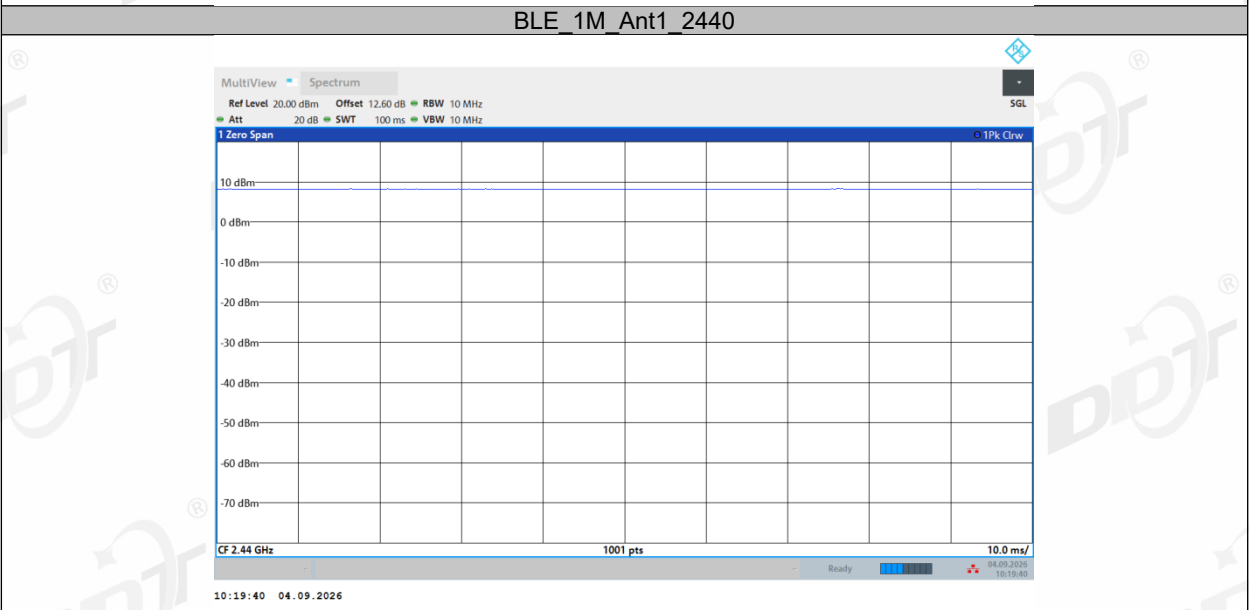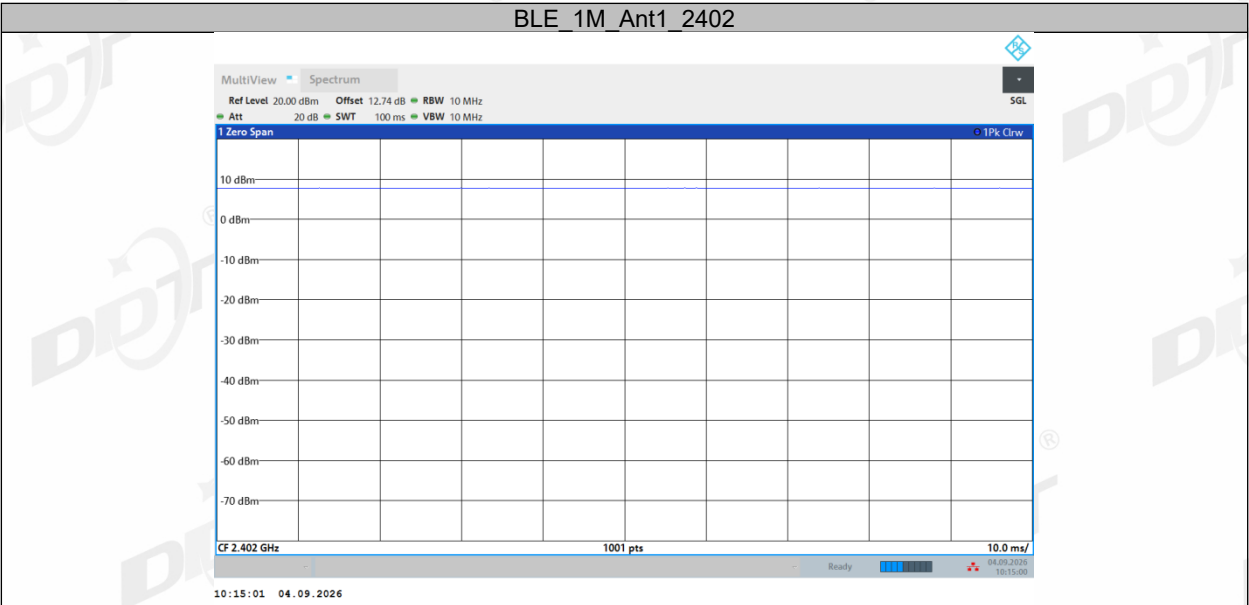

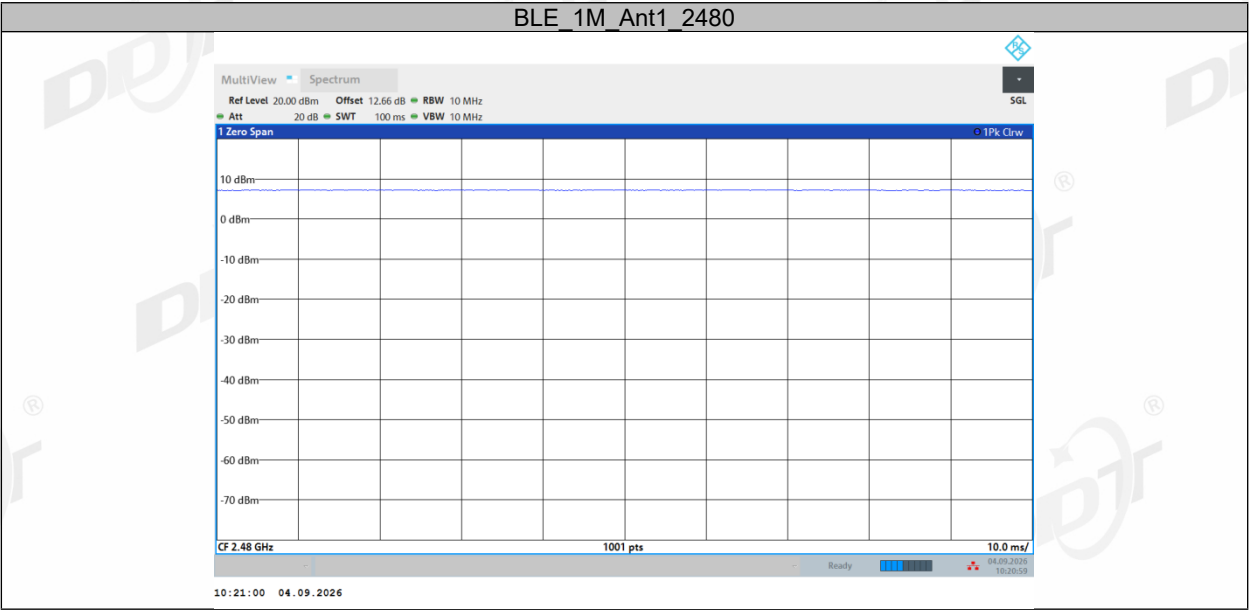

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

11.2. Result

The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.