



Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.169 Spurious emission measurements in 2.4835 - 18 GHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #1
RBW = 1 MHz; VBW = 3MHz

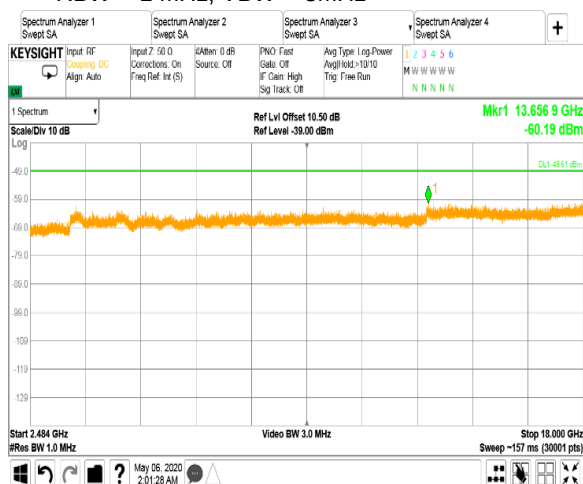


RBW = 1 MHz; VBW = 10 kHz

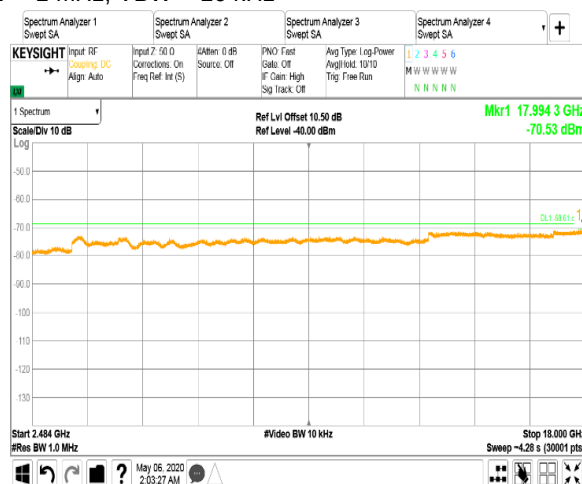

Plot 7.5.170 Spurious emission measurements in 2.4835 - 18 GHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #1
RBW = 1 MHz; VBW = 3MHz

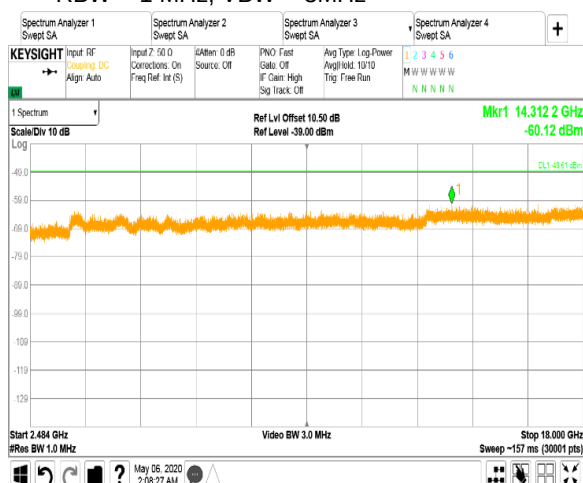

RBW = 1 MHz; VBW = 10 kHz

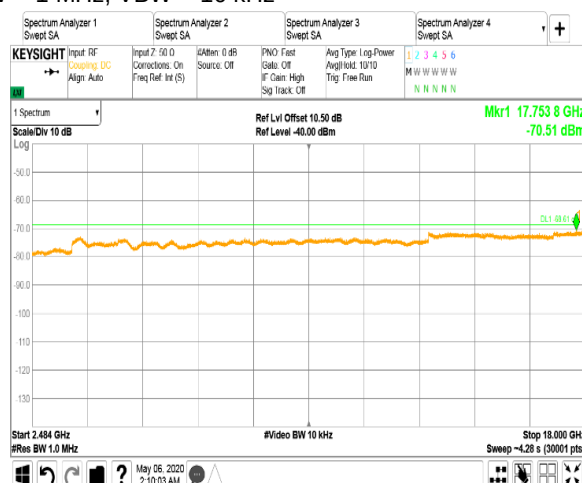



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.171 Spurious emission measurements in 2.4835 - 18 GHz range at high carrier frequency

CHANNEL BANDWIDTH:

10 MHz

CONFIGURATION:



4 Non-Overlapping Beams

ANTENNA PORT:

#1

RBW = 1 MHz; VBW = 3MHz

RBW = 1 MHz; VBW = 10 kHz

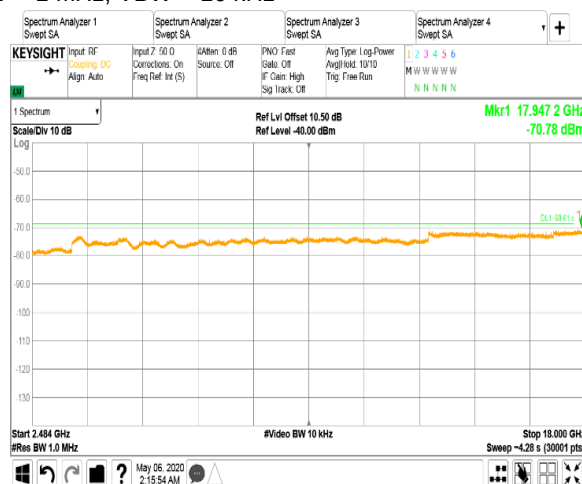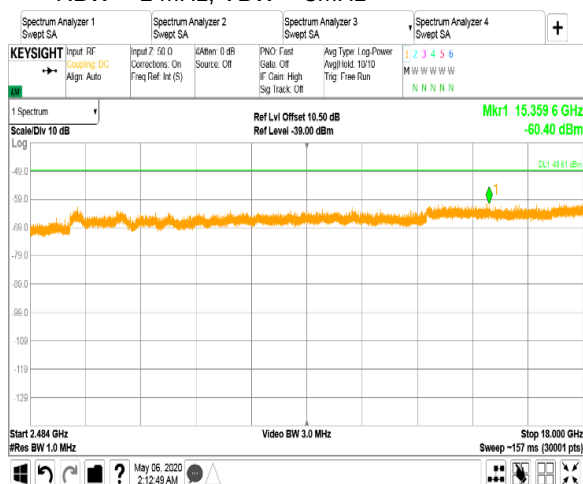

Plot 7.5.172 Spurious emission measurements in 2.4835 - 18 GHz range at low carrier frequency

CHANNEL BANDWIDTH:

10 MHz

CONFIGURATION:



4 Non-Overlapping Beams

ANTENNA PORT:

#2


RBW = 1 MHz; VBW = 3MHz

RBW = 1 MHz; VBW = 10 kHz

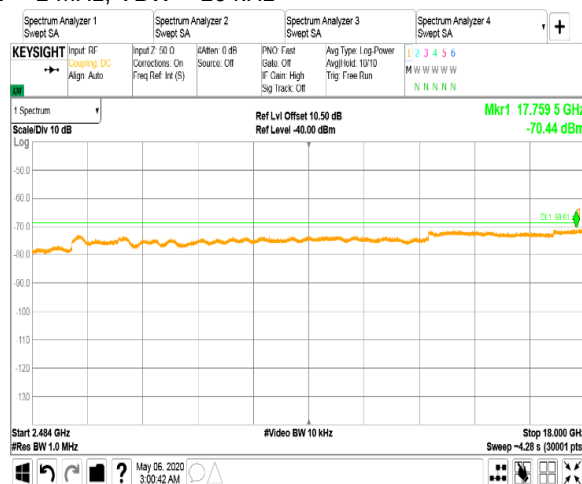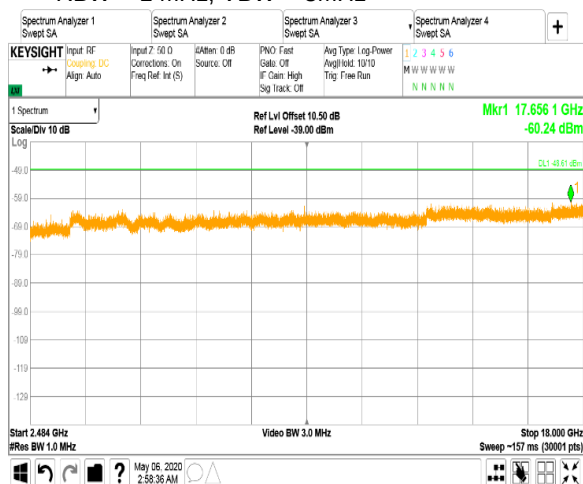


Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.173 Spurious emission measurements in 2.4835 - 18 GHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #2
RBW = 1 MHz; VBW = 3MHz

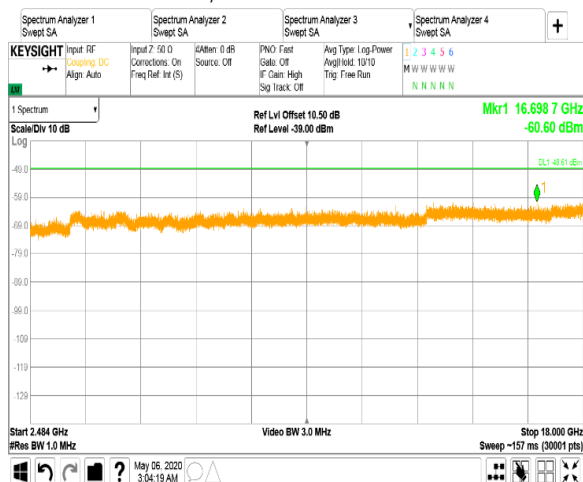


RBW = 1 MHz; VBW = 10 kHz

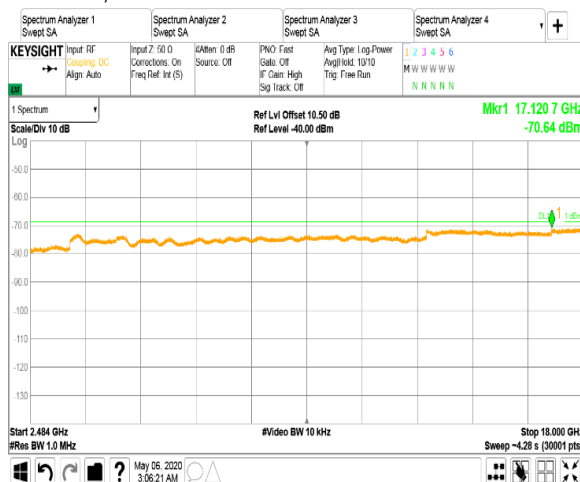

Plot 7.5.174 Spurious emission measurements in 2.4835 - 18 GHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #2
RBW = 1 MHz; VBW = 3MHz

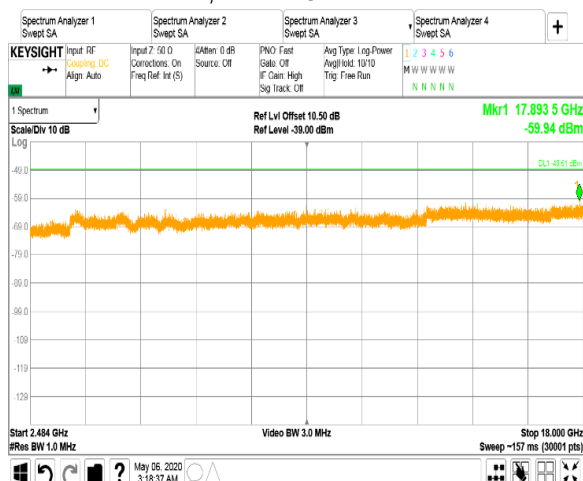


RBW = 1 MHz; VBW = 10 kHz

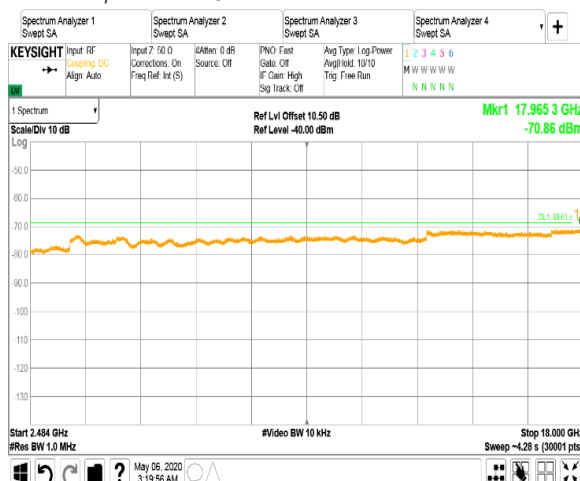


Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.175 Spurious emission measurements in 2.4835 - 18 GHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #3
RBW = 1 MHz; VBW = 3MHz

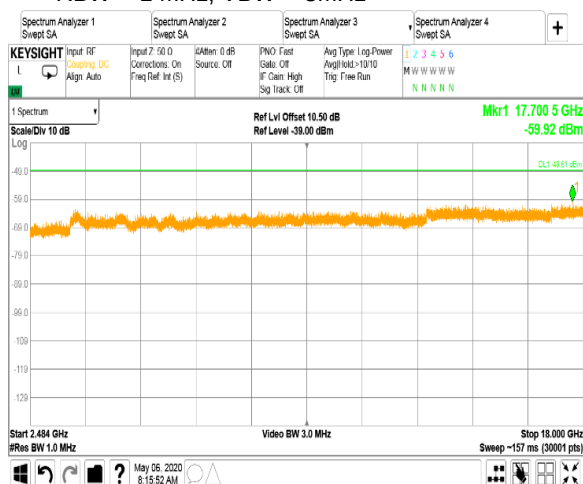


RBW = 1 MHz; VBW = 10 kHz

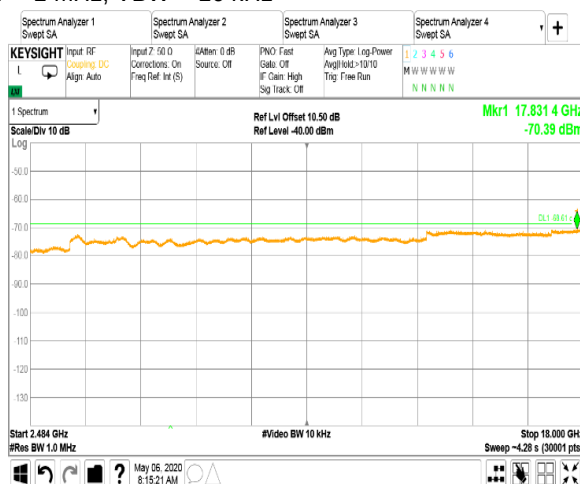

Plot 7.5.176 Spurious emission measurements in 2.4835 - 18 GHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #3
RBW = 1 MHz; VBW = 3MHz

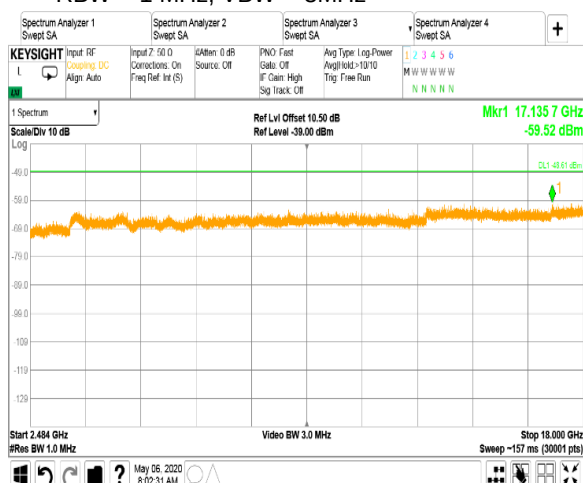


RBW = 1 MHz; VBW = 10 kHz

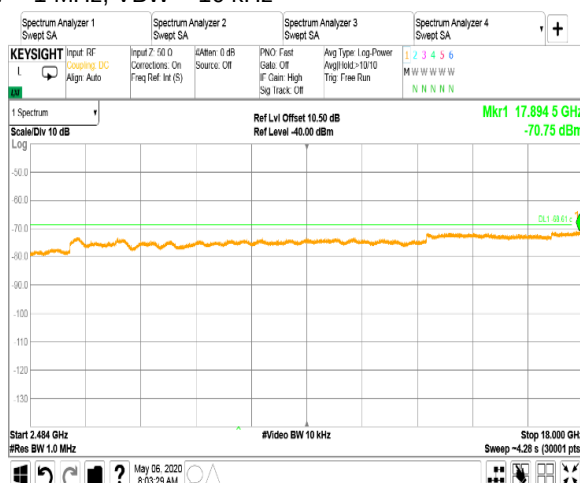


Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.177 Spurious emission measurements in 2.4835 - 18 GHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #3
RBW = 1 MHz; VBW = 3MHz

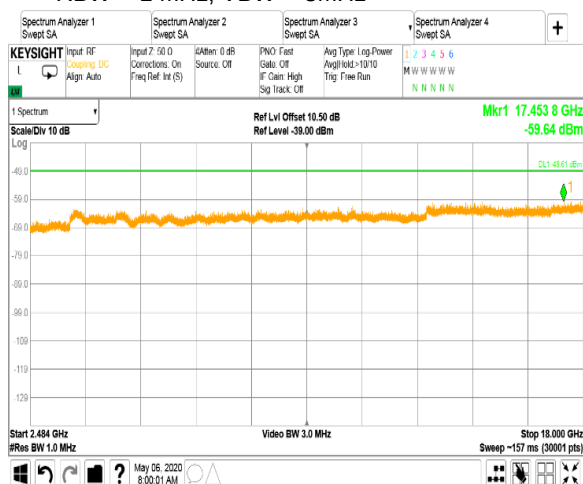


RBW = 1 MHz; VBW = 10 kHz

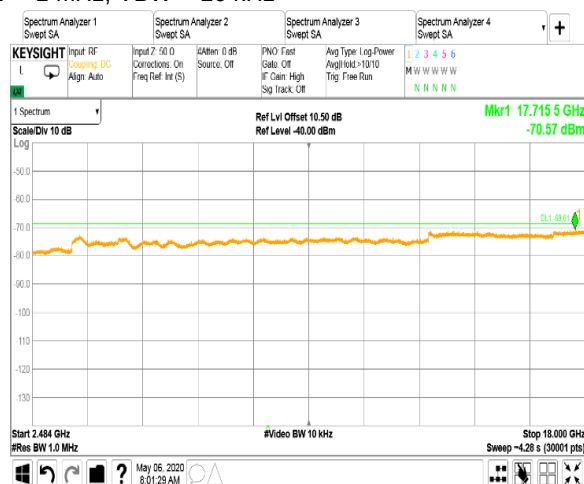

Plot 7.5.178 Spurious emission measurements in 2.4835 - 18 GHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #4
RBW = 1 MHz; VBW = 3MHz

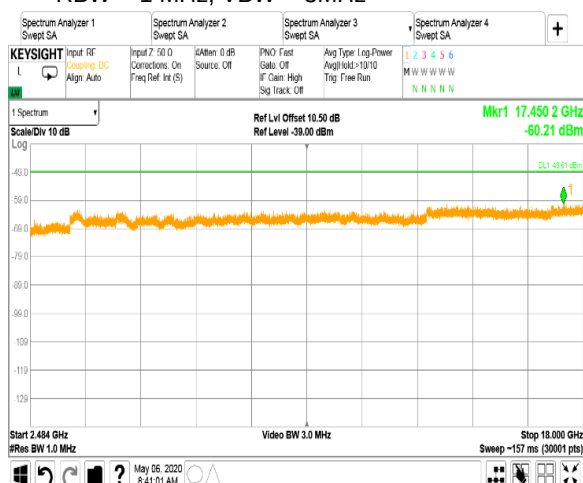


RBW = 1 MHz; VBW = 10 kHz

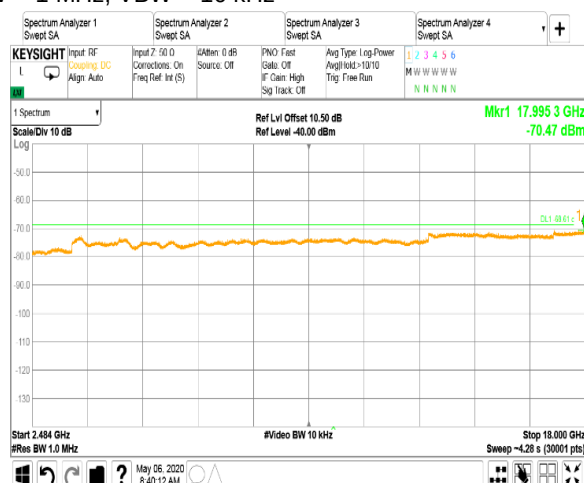


Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.179 Spurious emission measurements in 2.4835 - 18 GHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #4
RBW = 1 MHz; VBW = 3MHz

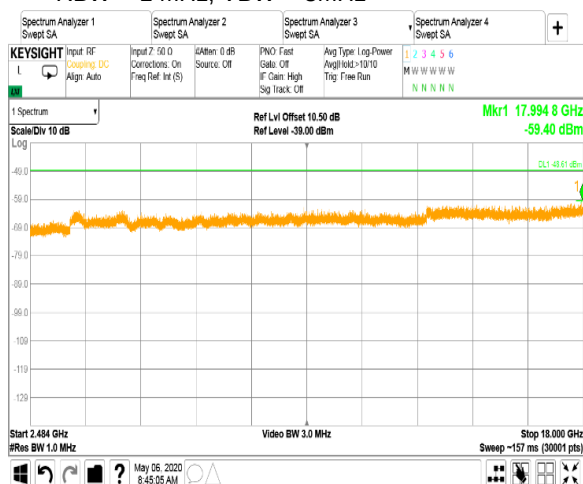


RBW = 1 MHz; VBW = 10 kHz

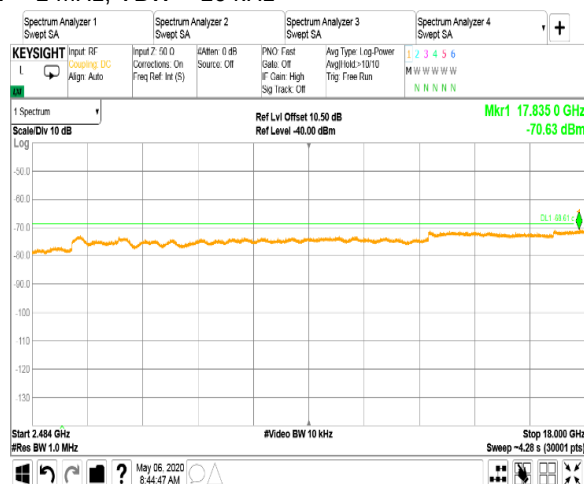

Plot 7.5.180 Spurious emission measurements in 2.4835 - 18 GHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #4
RBW = 1 MHz; VBW = 3MHz

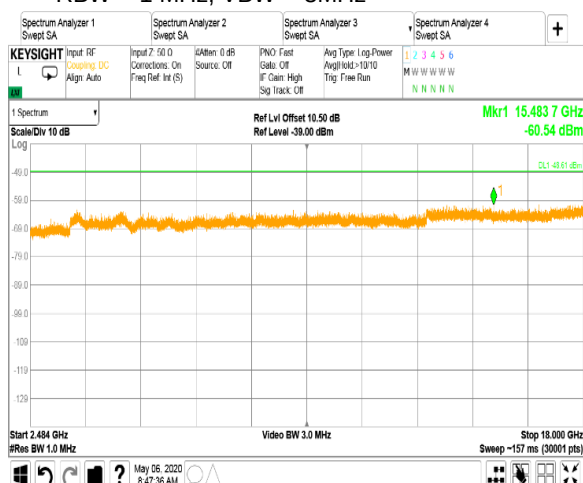

RBW = 1 MHz; VBW = 10 kHz

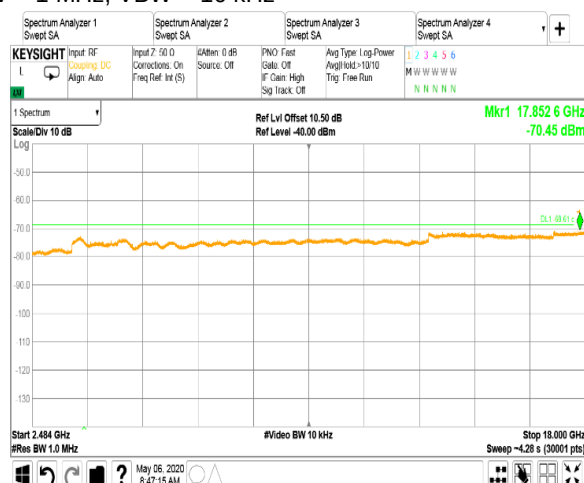



HERMON LABORATORIES

Report ID: DAGRAD_FCC.41601_RRU

Date of Issue: 3-Jun-21

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.181 Spurious emission measurements in 2.4835 - 18 GHz range at low carrier frequency

CHANNEL BANDWIDTH:

10 MHz

CONFIGURATION:



4 Non-Overlapping Beams

ANTENNA PORT:

#5

RBW = 1 MHz; VBW = 3MHz

RBW = 1 MHz; VBW = 10 kHz

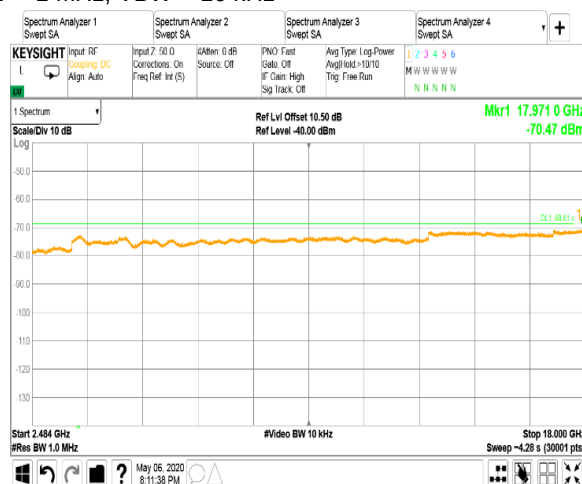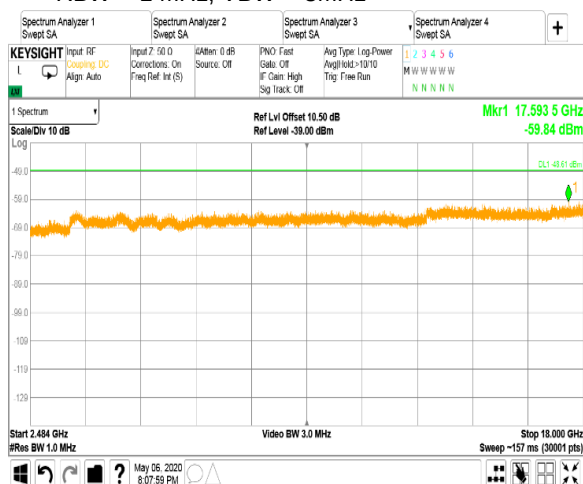

Plot 7.5.182 Spurious emission measurements in 2.4835 - 18 GHz range at mid carrier frequency

CHANNEL BANDWIDTH:

10 MHz

CONFIGURATION:



4 Non-Overlapping Beams

ANTENNA PORT:

#5


RBW = 1 MHz; VBW = 3MHz

RBW = 1 MHz; VBW = 10 kHz

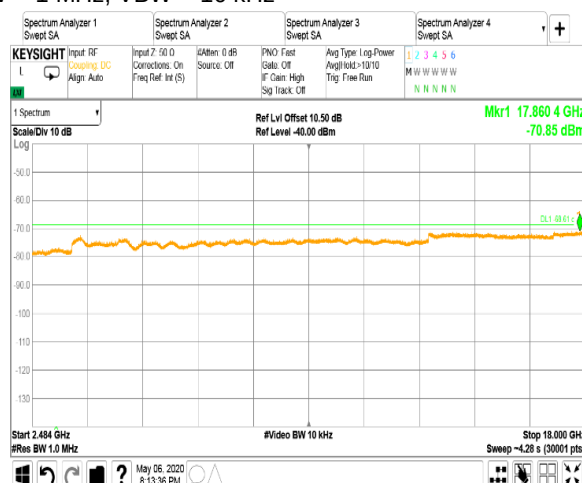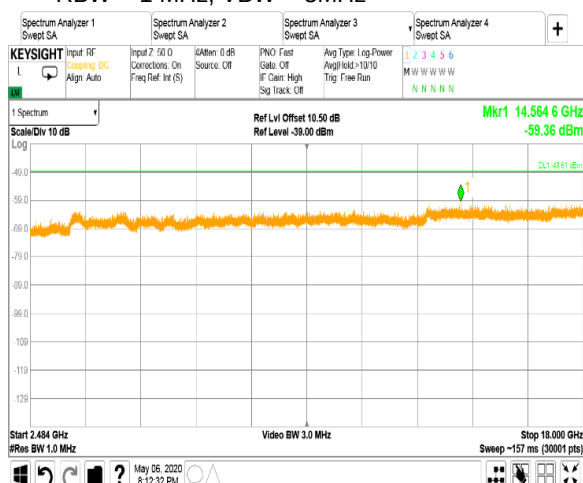


Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.183 Spurious emission measurements in 2.4835 - 18 GHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #5
RBW = 1 MHz; VBW = 3MHz

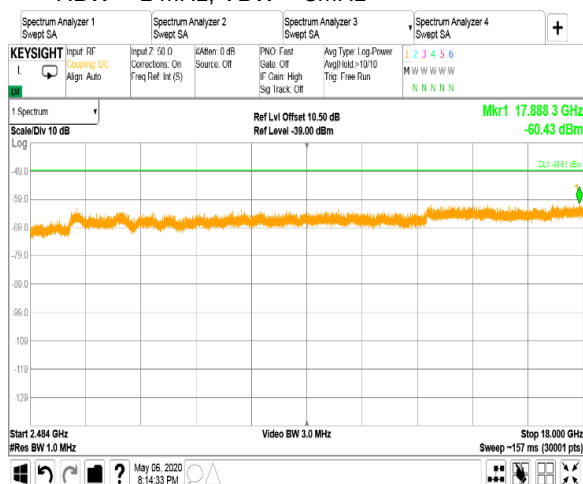


RBW = 1 MHz; VBW = 10 kHz

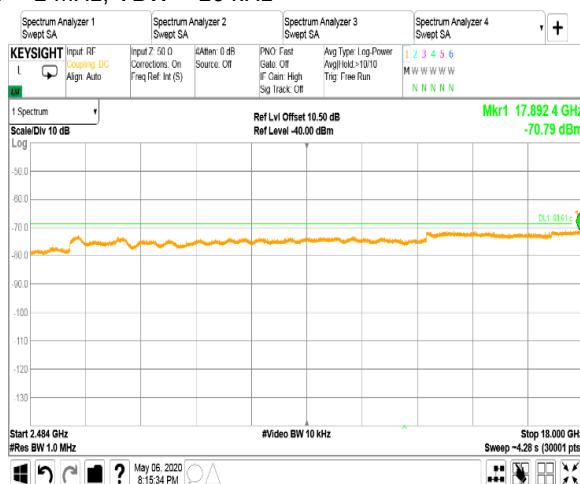

Plot 7.5.184 Spurious emission measurements in 2.4835 - 18 GHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #6
RBW = 1 MHz; VBW = 3MHz

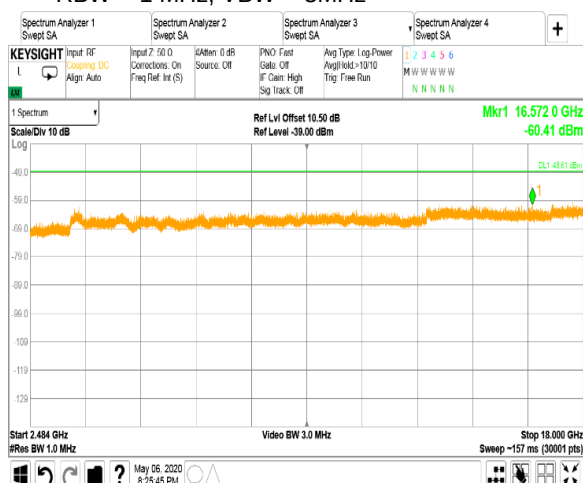


RBW = 1 MHz; VBW = 10 kHz

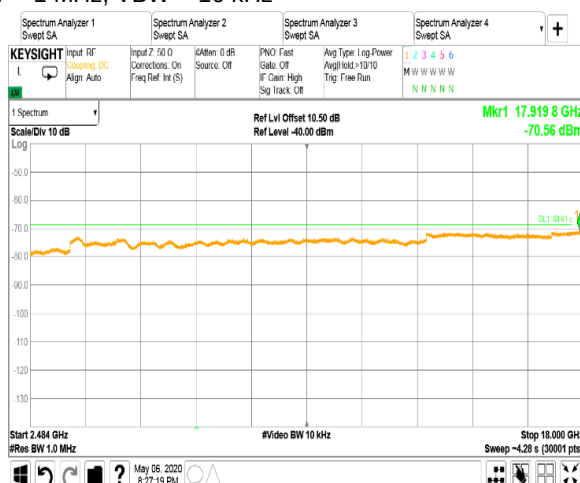


Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.185 Spurious emission measurements in 2.4835 - 18 GHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #6
RBW = 1 MHz; VBW = 3MHz

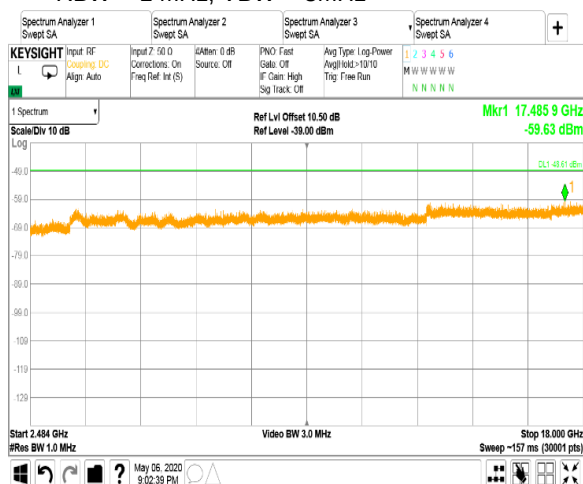


RBW = 1 MHz; VBW = 10 kHz

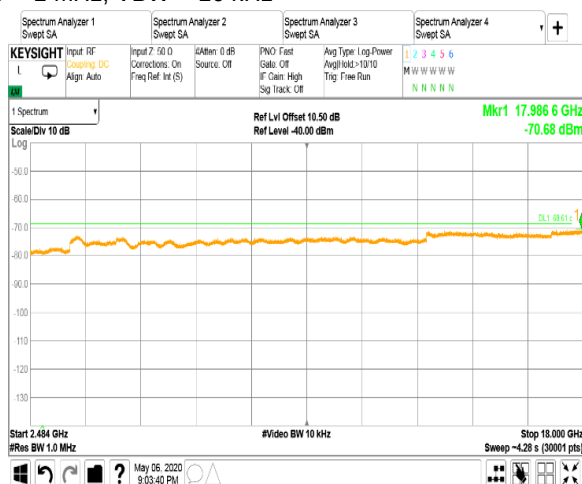

Plot 7.5.186 Spurious emission measurements in 2.4835 - 18 GHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #6
RBW = 1 MHz; VBW = 3MHz

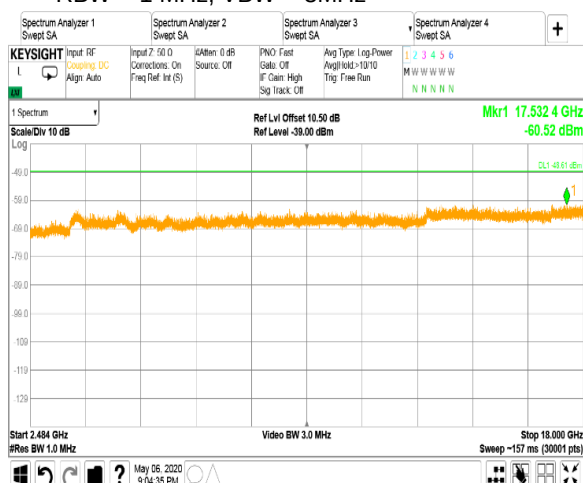


RBW = 1 MHz; VBW = 10 kHz

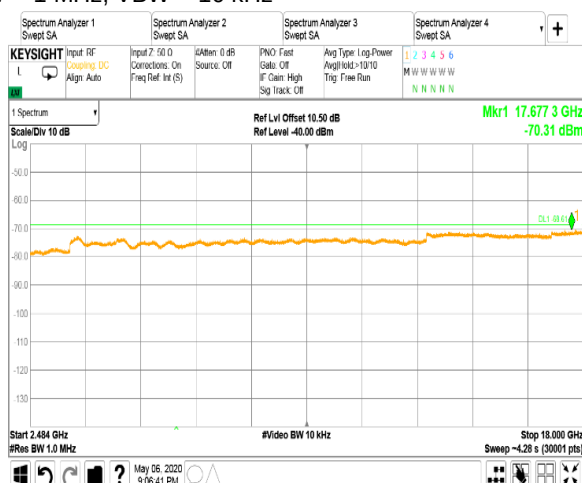


Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.187 Spurious emission measurements in 2.4835 - 18 GHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #7
RBW = 1 MHz; VBW = 3MHz

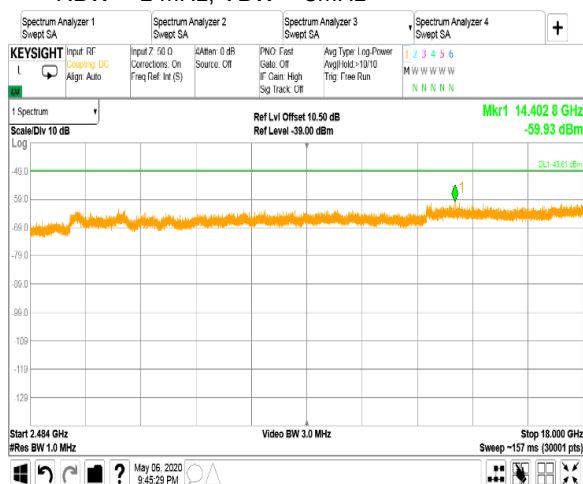


RBW = 1 MHz; VBW = 10 kHz

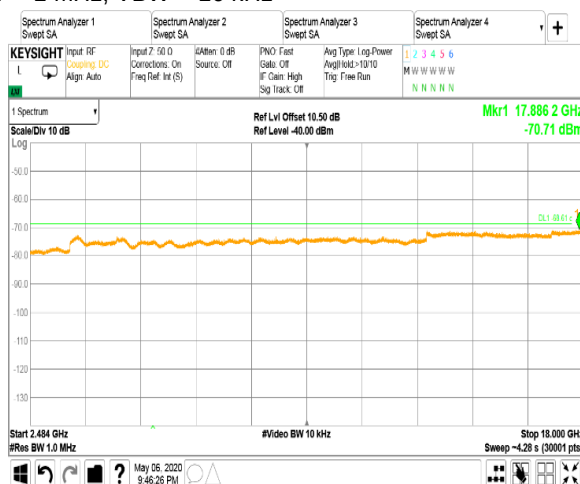

Plot 7.5.188 Spurious emission measurements in 2.4835 - 18 GHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #7
RBW = 1 MHz; VBW = 3MHz

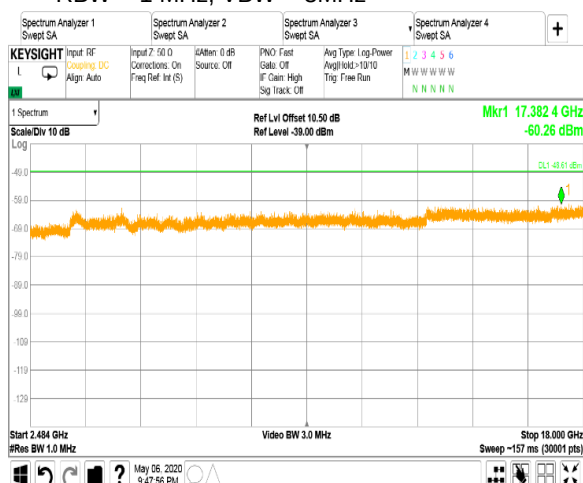

RBW = 1 MHz; VBW = 10 kHz

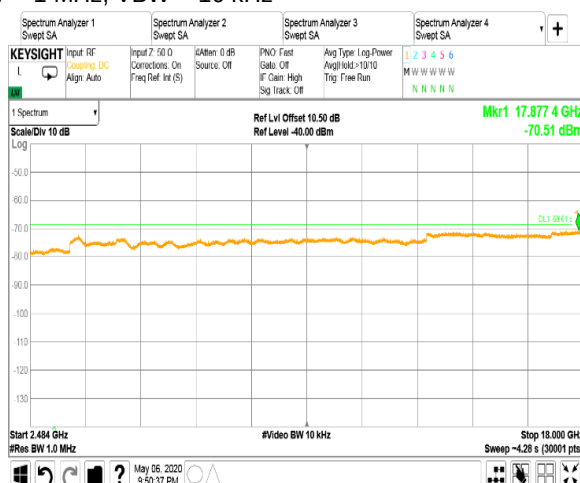





Plot 7.5.189 Spurious emission measurements in 2.4835 - 18 GHz range at high carrier frequency

CHANNEL BANDWIDTH:	10 MHz
CONFIGURATION:	4 Non-Overlapping Beams
ANTENNA PORT:	#7
RBW = 1 MHz: VBW = 3MHz	RBW = 1 MHz: VBW = 10 kHz

RBW = 1 MHz: VBW = 10 kHz

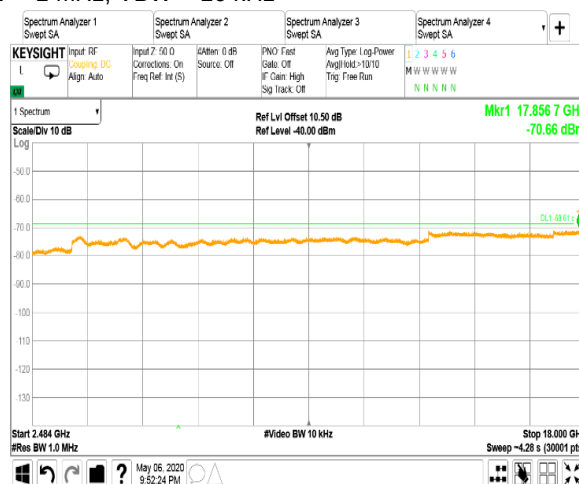


RBW = 1 MHz: VBW = 10 kHz

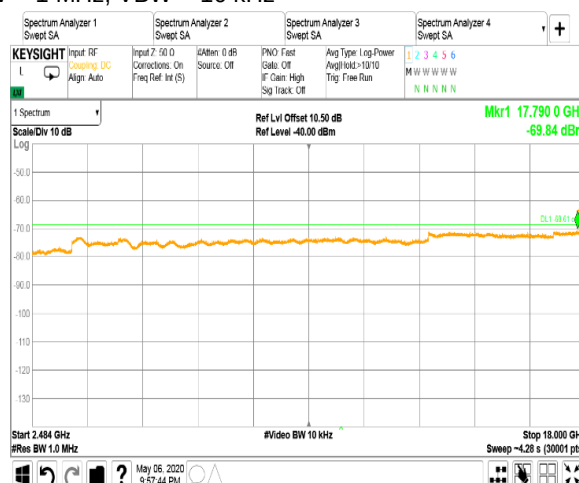


Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.191 Spurious emission measurements in 2.4835 - 18 GHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #8
RBW = 1 MHz; VBW = 3MHz

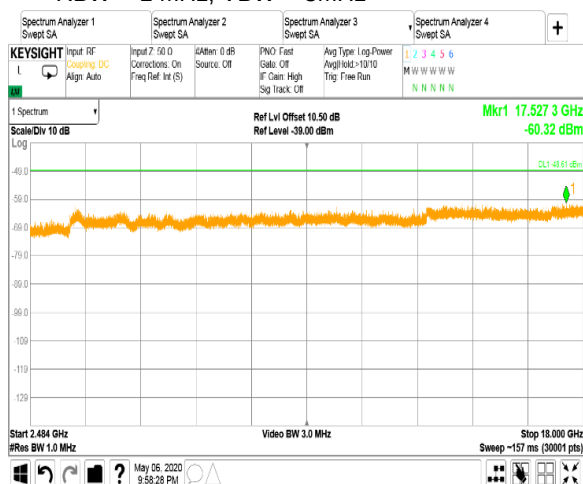


RBW = 1 MHz; VBW = 10 kHz

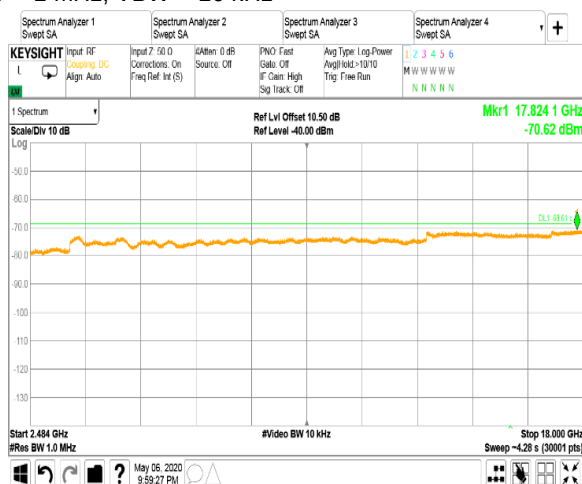

Plot 7.5.192 Spurious emission measurements in 2.4835 - 18 GHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #8
RBW = 1 MHz; VBW = 3MHz

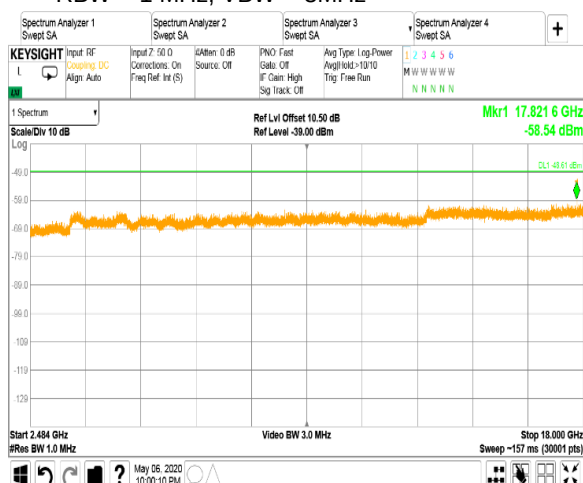

RBW = 1 MHz; VBW = 10 kHz

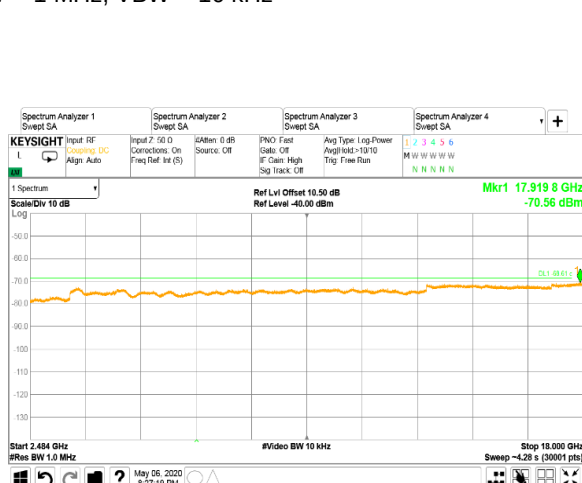



HERMON LABORATORIES


Report ID: DAGRAD_FCC.41601_RRU

Date of Issue: 3-Jun-21

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.193 Spurious emission measurements in 18 - 25 GHz range at low carrier frequency

CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #1

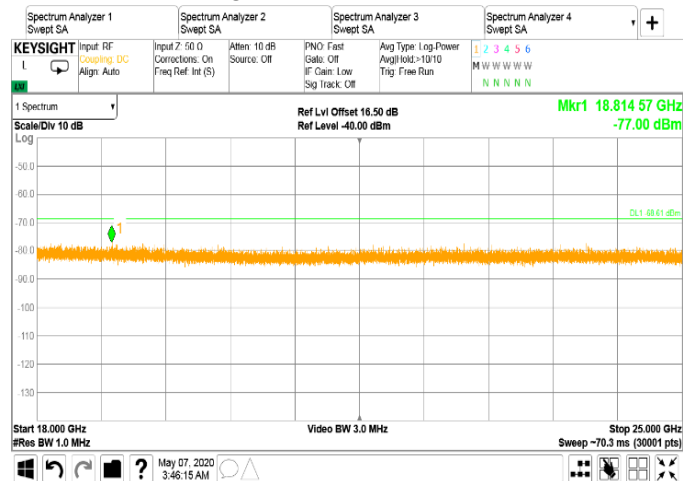

Plot 7.5.194 Spurious emission measurements in 18 - 25 GHz range at mid carrier frequency

CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #1

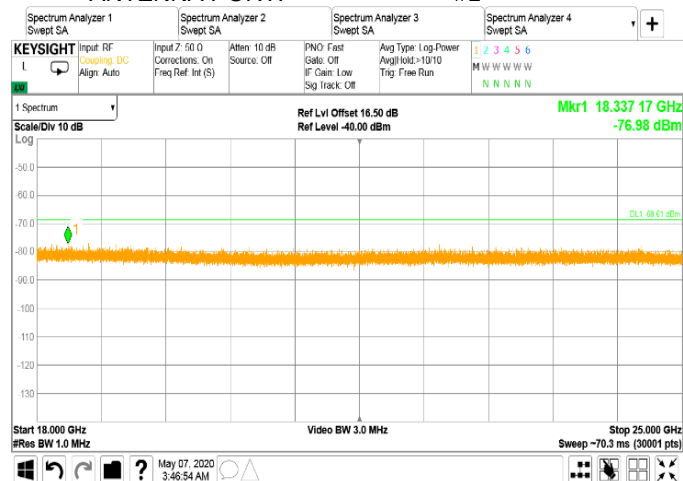



HERMON LABORATORIES


Report ID: DAGRAD_FCC.41601_RRU

Date of Issue: 3-Jun-21

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.195 Spurious emission measurements in 18 - 25 GHz range at high carrier frequency

CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #1

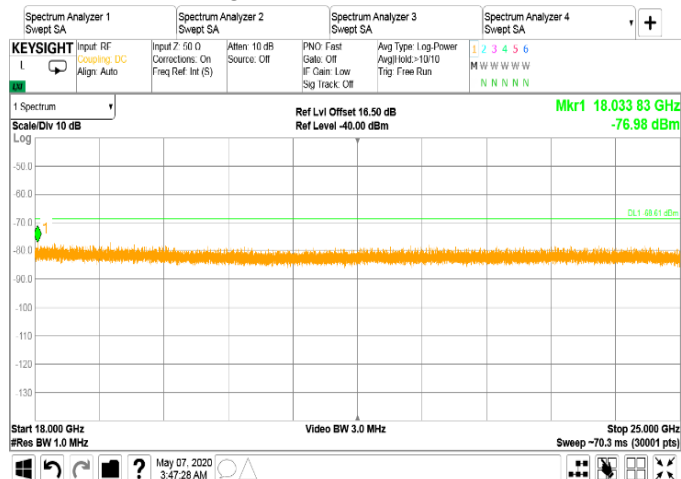

Plot 7.5.196 Spurious emission measurements in 18 - 25 GHz range at low carrier frequency

CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #2

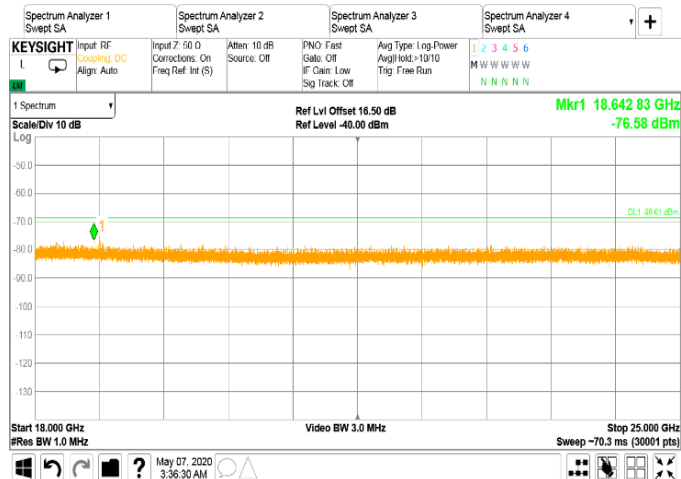



HERMON LABORATORIES


Report ID: DAGRAD_FCC.41601_RRU

Date of Issue: 3-Jun-21

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.197 Spurious emission measurements in 18 - 25 GHz range at mid carrier frequency

CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #2

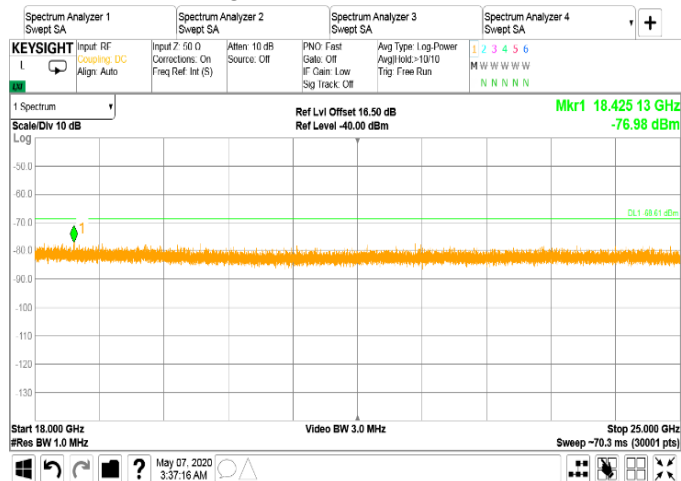

Plot 7.5.198 Spurious emission measurements in 18 - 25 GHz range at high carrier frequency

CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 4 Non-Overlapping Beams
ANTENNA PORT: #2

