


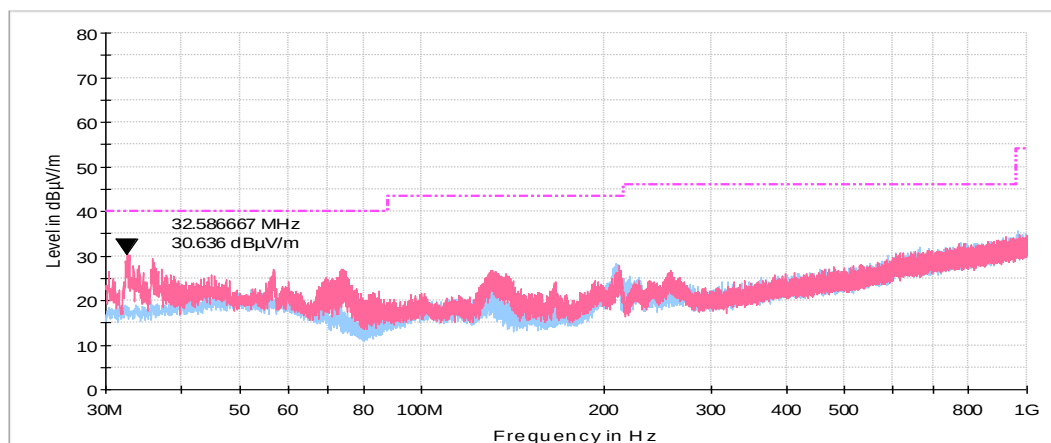


Test specification: FCC 47 CFR, Section 15.109 / ICES-003, Section 6.2, Class B, Radiated emissions			
Test procedure: ANSI C63.4, Section 8.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 06-Jun-19			
Temperature: 24.8 °C	Relative Humidity: 40 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

**Plot 8.2.2 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization**

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

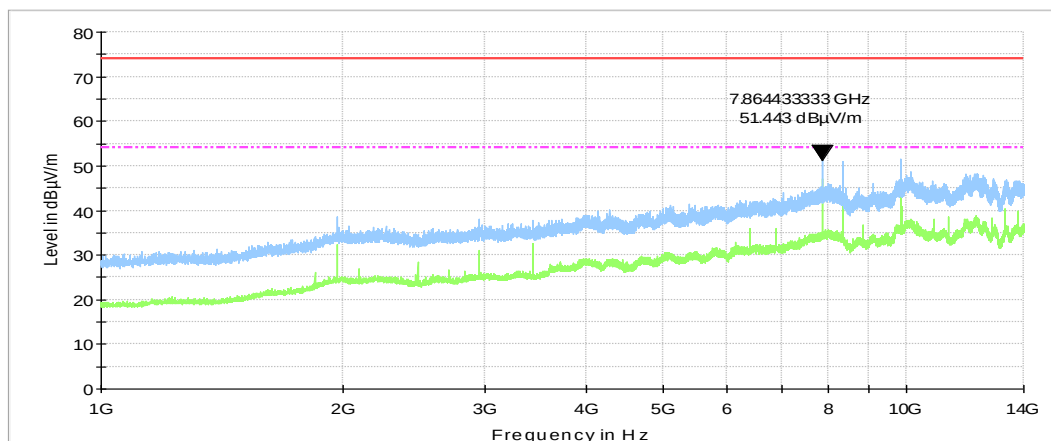

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A01877	08-Oct-19	08-Oct-20
1809	HygroThermometer, Min/Max Memory	Delta TRAK	13301	NA	11-Aug-19	11-Aug-20
2888	LISN Two-line V-Network 50 Ohm / 50 uH + 5 Ohm, 16A, MIL STD 461E, CISPR 16-1	Rolf Heine	NNB-2/16Z	02/10018	19-Mar-19	19-Mar-20
3047	AC Power Supply, 0 - 130 & 260v, 45 - 2000 Hz	BEHLMAN	150-C-202	5033	28-Oct-19	28-Oct-20
3301	Power Meter, P-series, 50 MHz to 40 GHz	Agilent Technologies	N1911A	MY45101057	28-Apr-19	28-Apr-20
3302	Power sensor, P-Series, 50 MHz to 40 GHz, -35/30 to 20 dBm	Agilent Technologies	N1922A	MY45240586	28-Apr-19	28-Apr-20
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1225/2A	07-Apr-19	07-Apr-20
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	07-Apr-19	07-Apr-20
4011	Temp. & Humidity Meter, (-50 - +70) deg, (20 - 99) % RH	Mad Electronics	HTC-1	NA	11-Aug-19	11-Aug-20
4068	Attenuator, SMA, 30 dB, DC to 12.4 GHz	Midwest Microwave	ATT-0527-30-SMA-07	NA	12-Aug-19	12-Aug-20
4070	Attenuator, SMA, 30 dB, DC to 18 GHz, 5 W	Weinschel	WA7	NA	12-Aug-19	12-Aug-20
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	101630	04-Aug-19	04-Aug-20
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	20-Jan-20	20-Jan-21
4366	Directional coupler, 1 GHz to 18 GHz, 10 dB, SMA Female	Tiger Micro-Electronics Institute	TGD-A1101-10	01e-JSDE805-007	21-May-18	21-May-20
4778	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL4777	Hewlett Packard	8542E	30807A00262, 3427A00123	04-Nov-19	04-Nov-20
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	06-Jan-20	06-Jan-21
4956	Active horn antenna, 18 to 40 GHz	COM-POWER CORPORATION	AHA-840	105004	29-Jan-20	29-Jan-21
5085	Attenuator, 4 dB, DC - 6 GHz, 1 W	Mini-Circuits	UNAT-4+	NA	08-Feb-19	08-Feb-20
5111	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/11SK/11SK/5500MM	502493/2EA	14-Aug-19	14-Aug-20



HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
5175	Medium Power Fixed Coaxial Attenuator DC to 40 GHz, 20 dB, 5 W	API Weinschel, Inc	75A-20- 12	TE289	07-Apr-19	07-Apr-20
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX- 8000E	00809	08-Feb-19	08-Feb-22
5309	Antenna Mast, 1-4 meter, Pneumatic polarization	Dolev Ltd	FMB 1-4	NA	24-Apr-19	24-Apr-20
5311	Controller	Dolev Ltd	FC-06	FC06.1- 2016-024	24-Apr-19	24-Apr-20
5376	EXA Signal Analyzer, 10 Hz - 32 GHz	Keysight Technologies	N9010B	MY574704 04	18-Mar-19	18-Mar-20
5405	RF cable, 18 GHz, N-N, 6 m	Huber-Suhner	SF118/11 N(x2)	500023/11 8	11-Aug-19	11-Aug-20
5409	RF cable, 40 GHz, SMA-SMA, 2 m	Huber-Suhner	SF102EA/ 11SK/11S K/2000M M	503973/2E A	11-Aug-19	11-Aug-20
5476	Cable, BNC/BNC, 10.5 m	Western wire	MIL-C- 17G	NA	30-Jan-19	30-Jan-20

10 APPENDIX B Test equipment correction factors

HL 2888 LISN Two-line V-Network 50 Ohm / 50 uH + 5 Ohm, 16A

Rolf Heine, model: NNB-2/16Z, s/n 02/10018, HL 2888

Voltage division factor (insertion loss)

Frequency,	L1, dB	L2, dB	Uncertainty, dB
150	0.09	0.07	±0.09
170	0.08	0.07	±0.09
200	0.08	0.06	±0.09
250	0.09	0.06	±0.09
300	0.09	0.06	±0.09
350	0.09	0.07	±0.09
400	0.09	0.07	±0.09
500	0.09	0.07	±0.09
600	0.09	0.07	±0.09
700	0.10	0.08	±0.09
800	0.10	0.08	±0.09
900	0.11	0.08	±0.09
1000	0.11	0.08	±0.09
1200	0.11	0.09	±0.16
1500	0.12	0.10	±0.16
2000	0.14	0.12	±0.16
2500	0.15	0.12	±0.16
3000	0.16	0.14	±0.16
4000	0.19	0.16	±0.16
5000	0.23	0.19	±0.16
7000	0.30	0.25	±0.16
10000	0.46	0.40	±0.16
15000	0.71	0.62	±0.16
20000	0.94	0.85	±0.16
30000	1.41	1.33	±0.32

HL 4933: Active Horn Antenna
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

HL 4956: Active horn antenna
COM-POWER Corp., model: AHA-840, s/n 105004

Frequency, MHz	Measured antenna factor, dB/m	Frequency, MHz	Measured antenna factor, dB/m
18000	5.1	29500	1.4
18500	3.6	30000	2.9
19000	2.2	30500	2.9
19500	0.7	31000	2.9
20000	0.7	31500	1.2
20500	0.8	32000	0.7
21000	0.5	32500	0.2
21500	-1.3	33000	-1.7
22000	-2.1	33500	-2.2
22500	-2.0	34000	2.3
23000	-1.6	34500	-1.1
23500	-2.9	35000	0.7
24000	-2.3	35500	-1.1
24500	-2.6	36000	0.1
25000	-1.8	36500	1.4
25500	-1.2	37000	3.7
26000	-0.5	37500	5.8
26500	-1.2	38000	6.6
27000	-0.1	38500	7.3
27500	-1.0	39000	6.5
28000	-0.7	39500	7.3
28500	0.5	40000	7.1

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

HL 5111: RF cable

Huber-Suhner, SF102EA/11SK/11SK/5500MM, s/n 502493/2EA

Set / Applied, MHz	Measured, dB	Uncertainty, dB
100	0.70	±0.07
200	0.99	±0.08
300	1.21	±0.08
500	1.56	±0.08
1000	2.20	±0.08
1500	2.69	±0.08
2000	3.11	±0.08
2500	3.50	±0.10
3000	3.85	±0.10
3500	4.16	±0.10
4000	4.47	±0.10
4500	4.74	±0.10
5000	5.03	±0.10
5500	5.30	±0.10
6000	5.57	±0.10
6500	5.76	±0.10
7000	6.00	±0.10
7500	6.20	±0.10
8000	6.44	±0.10
8500	6.67	±0.10
9000	6.82	±0.10
9500	7.04	±0.10
10000	7.18	±0.10
10500	7.36	±0.10
11000	7.55	±0.10
11500	7.75	±0.10
12000	7.90	±0.10
12500	8.08	±0.13
13000	8.19	±0.13
13500	8.39	±0.13
14000	8.58	±0.13
14500	8.76	±0.18
15000	8.92	±0.18
15500	9.03	±0.18
16000	9.18	±0.18
16500	9.34	±0.18
17000	9.51	±0.18
17500	9.66	±0.18
18000	9.80	±0.18
18500	9.94	±0.23
19000	10.05	±0.23
19500	10.22	±0.23

Set / Applied, MHz	Measured, dB	Uncertainty, dB
20000	10.32	±0.23
20500	10.48	±0.23
21000	10.60	±0.23
21500	10.73	±0.23
22000	10.87	±0.23
22500	10.97	±0.29
23000	11.09	±0.29
23500	11.26	±0.29
24000	11.37	±0.29
24500	11.50	±0.29
25000	11.61	±0.23
25500	11.72	±0.23
26000	11.87	±0.23
26500	11.99	±0.23
27000	12.09	±0.33
27500	12.24	±0.33
28000	12.34	±0.40
28500	12.47	±0.40
29000	12.61	±0.40
29500	12.70	±0.40
30000	12.86	±0.40
30500	12.92	±0.33
31000	13.09	±0.33
31500	13.16	±0.33
32000	13.33	±0.33
32500	13.40	±0.33
33000	13.62	±0.33
33500	13.70	±0.33
34000	13.88	±0.33
34500	13.97	±0.40
35000	14.05	±0.40
35500	14.23	±0.40
36000	14.25	±0.40
36500	14.46	±0.40
37000	14.49	±0.33
37500	14.72	±0.33
38000	14.77	±0.33
38500	14.97	±0.33
39000	15.04	±0.33
39500	15.22	±0.33
40000	15.63	±0.47



HL 5405: RF Cable
Huber-Suhner, model: SF118/11N(x2), s/n: 500023/118
Calibration date: 01-Aug-2018

Set / Applied, MHz	Measured, dB	Uncertainty, dB
0.1	0.01	±0.07
50	0.23	±0.07
100	0.32	±0.07
200	0.45	±0.08
300	0.55	±0.08
400	0.64	±0.08
500	0.71	±0.08
600	0.78	±0.08
700	0.85	±0.08
800	0.91	±0.08
900	0.97	±0.08
1000	1.02	±0.08
1100	1.07	±0.08
1200	1.12	±0.08
1300	1.16	±0.08
1400	1.21	±0.08
1500	1.25	±0.08
1600	1.30	±0.08
1700	1.34	±0.08
1800	1.38	±0.08
1900	1.42	±0.08
2000	1.47	±0.08
2500	1.64	±0.10
3000	1.81	±0.10
3500	1.97	±0.10
4000	2.11	±0.10
4500	2.25	±0.10
5000	2.38	±0.10
5500	2.48	±0.10
6000	2.59	±0.10
6500	2.72	±0.10
7000	2.84	±0.13
7500	2.97	±0.13
8000	3.08	±0.13
8500	3.21	±0.13
9000	3.31	±0.13
9500	3.42	±0.13
10000	3.52	±0.13

HL 5476 Cable, 10.5 m, BNC/BNC
Cable , 10.5 m, BNC/BNC,
Western Wire, MIL-C-17G, s/n NA HL 5476

Insertion loss

Set / Applied, MHz	Measured, dB	Uncertainty, dB
0.01	0.12	±0.07
10	0.56	±0.07
20	0.79	±0.07
30	0.97	±0.07
40	1.11	±0.07
50	1.25	±0.07
60	1.37	±0.07
70	1.48	±0.07
80	1.58	±0.07
90	1.68	±0.07
100	1.79	±0.07
110	1.88	±0.08
120	1.96	±0.08
130	2.05	±0.08
140	2.12	±0.08
150	2.20	±0.08
160	2.29	±0.08
170	2.37	±0.08
180	2.44	±0.08
190	2.51	±0.08
200	2.58	±0.08
210	2.66	±0.08
220	2.74	±0.08
230	2.80	±0.08
240	2.87	±0.08
250	2.93	±0.08
260	3.01	±0.08

Set / Applied, MHz	Measured, dB	Uncertainty, dB
270	3.07	±0.08
280	3.13	±0.08
290	3.19	±0.08
300	3.26	±0.08
310	3.32	±0.10
320	3.40	±0.10
330	3.46	±0.10
340	3.52	±0.10
350	3.58	±0.10
360	3.62	±0.10
370	3.70	±0.10

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

12 APPENDIX D Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

13 APPENDIX E

Specification references

FCC 47CFR part 15: 2019

ANSI C63.10: 2013

ANSI C63.4: 2014

RSS-247 Issue 2: 2017

RSS-Gen Issue 5: 2019

ICES-003: 2016, Issue 6

Radio Frequency Devices

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices

General Requirements for Compliance of Radio Apparatus

Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement



HERMON LABORATORIES

Report ID: DAGRAD_FCC.41601_RRU
Date of Issue: 3-Jun-21

14 APPENDIX F Manufacturer's declaration



HERMON LABORATORIES

Ver 1p0
March -7
2021
Document:
FCC Declaration Of Identity 2AWXX-ARRU14885CVT
Proprietary Information. Copyright 2021, Wireless Systems Solutions, L.L.C. All rights reserved



Declaration of Identity

We, the undersigned,

Company: Wireless Systems Solutions LLC
Address: 630 Davis Dr Suite 250
Country: Morrisville, North Carolina 27560
Telephone number: 646-828-7615
Fax number: NA

declare under our sole responsibility that the following equipment:

Brand/Item	Type/Model	Short Product description
RRU	ARRU-148-85	Remote Radio Unit

is electronically/electrically/mechanically identical to the following equipment.
The RRU software version is now Build 1.4.9-rc1.4 released at March 9, 2021. All release notes are documented at ARRU-148-85 releases.txt.



ARRU-148-85
releases.txt

The hardware revision remains the same.

Brand/Item	Type/Model	Short Product description
RRH	ARRH-048-85	Remote Radio Head

The reason for name change is:

- Supporting four (4) nonoverlapping beams with feed loss of 0.15dB instead of three (3) nonoverlapping beams with feed loss of 1.23dB.
- Name change from Remote Radio Head to Remote Radio Unit.

March 21, 2021

(date)
(signature)

Boaz B Reuven

Boaz B Reuven
(printed name)

Certification and Integration Engineer
(position)



(company stamp)

15 APPENDIX G Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT