

TEST REPORT

Product : Access Control Camera
Trade mark : N/A
Model/Type reference : 3S-07TW-T1, 3S-07TW-T2, 3S-07TW-T3,
3S-07TW-T4, 3S-07TW-T5, 3S-07TW-T6,
3S-07TW-T7, 3S-07TW-T8, 3S-07TW-T9,
3S-07TW-T10, 3S-07TW-T11, 3S-07TW-T12,
3S-07TW-T13, 3S-07TW-T14, 3S-07TW-T15,
3S-08TW-T1, 3S-08TW-T2, 3S-08TW-T3,
3S-08TW-T4, 3S-08TW-T5, 3S-08TW-T6,
3S-08TW-T7, 3S-08TW-T8, 3S-08TW-T9,
3S-08TW-T10, 3S-08TW-T11, 3S-08TW-T12,
3S-08TW-T13, 3S-08TW-T14, 3S-08TW-T15
Serial Number : N/A
Report Number : EED32M00194001
FCC ID : 2AWYV3S-07TW
Date of Issue : Aug. 31, 2020
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

Safe Space Scan Technology LLC
5300 West Atlantic Avenue 612

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Sunlight Sun

Sunlight Sun

Reviewed by:

Jok Yang

Jok Yang

Approved by:

Sam Chuang

Sam Chuang

Date:

Aug. 31, 2020



Check No.3096343597

2 Version

Version No.	Date	Description
00	Aug. 31, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.

Model No.: 3S-07TW-T1, 3S-07TW-T2, 3S-07TW-T3, 3S-07TW-T4, 3S-07TW-T5, 3S-07TW-T6, 3S-07TW-T7, 3S-07TW-T8, 3S-07TW-T9, 3S-07TW-T10, 3S-07TW-T11, 3S-07TW-T12, 3S-07TW-T13, 3S-07TW-T14, 3S-07TW-T15, 3S-08TW-T1, 3S-08TW-T2, 3S-08TW-T3, 3S-08TW-T4, 3S-08TW-T5, 3S-08TW-T6, 3S-08TW-T7, 3S-08TW-T8, 3S-08TW-T9, 3S-08TW-T10, 3S-08TW-T11, 3S-08TW-T12, 3S-08TW-T13, 3S-08TW-T14, 3S-08TW-T15

Only the model 3S-07TW-T2 was tested, The difference between each model is only for the product name is different, the color is different, the rest circuit principle, the internal structure, the PCB Layout and the safety key parts are the same, does not affect the EMC and safety test.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	8
6.1 CLIENT INFORMATION	8
6.2 GENERAL DESCRIPTION OF EUT	8
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	8
6.4 DESCRIPTION OF SUPPORT UNITS	10
6.5 TEST LOCATION	10
6.6 DEVIATION FROM STANDARDS	10
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	10
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, $K=2$)	10
7 EQUIPMENT LIST	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A): Conducted Peak Output Power	19
Appendix B): 6dB Occupied Bandwidth	25
Appendix C): Band-edge for RF Conducted Emissions	31
Appendix D): RF Conducted Spurious Emissions	36
Appendix E): Power Spectral Density	50
Appendix F): Antenna Requirement	56
Appendix G): AC Power Line Conducted Emission	58
Appendix H): Restricted bands around fundamental frequency (Radiated)	61
Appendix I): Radiated Spurious Emissions	94
PHOTOGRAPHS OF TEST SETUP	103
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	106

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

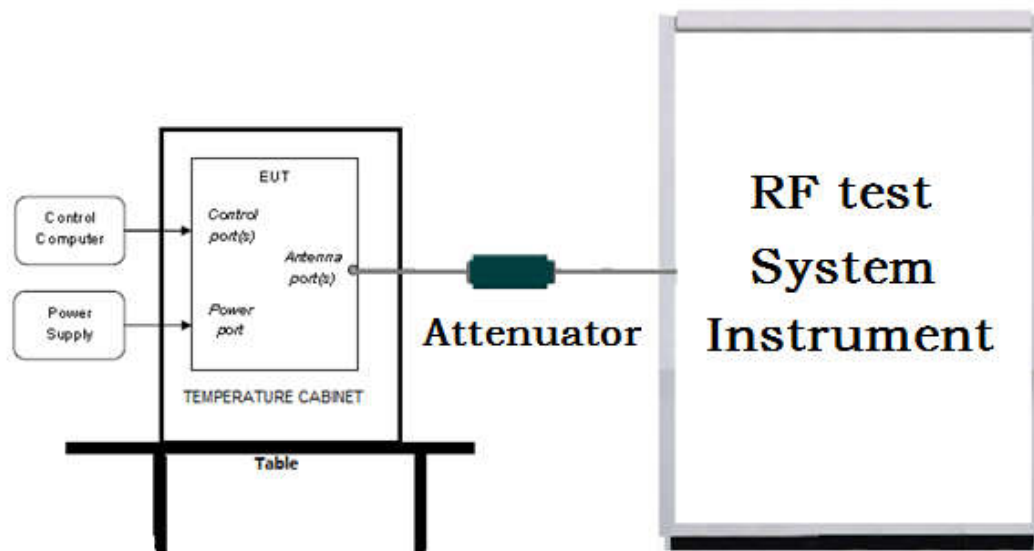

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

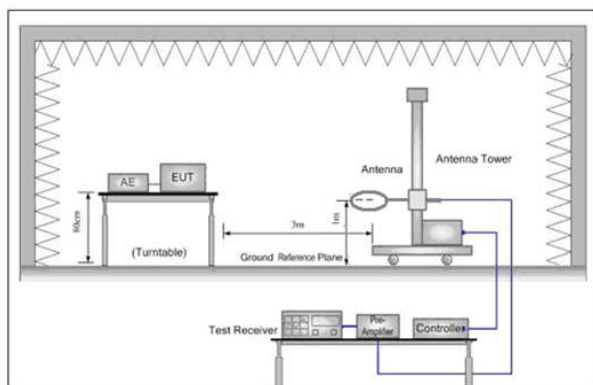


Figure 1. Below 30MHz

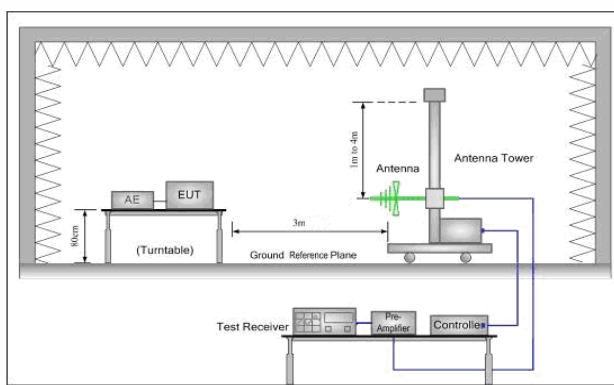


Figure 2. 30MHz to 1GHz


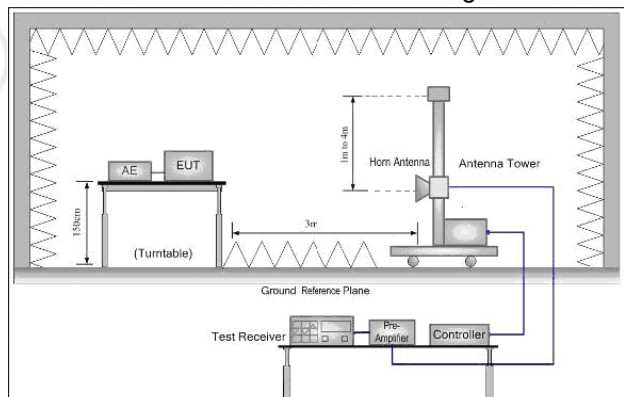


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

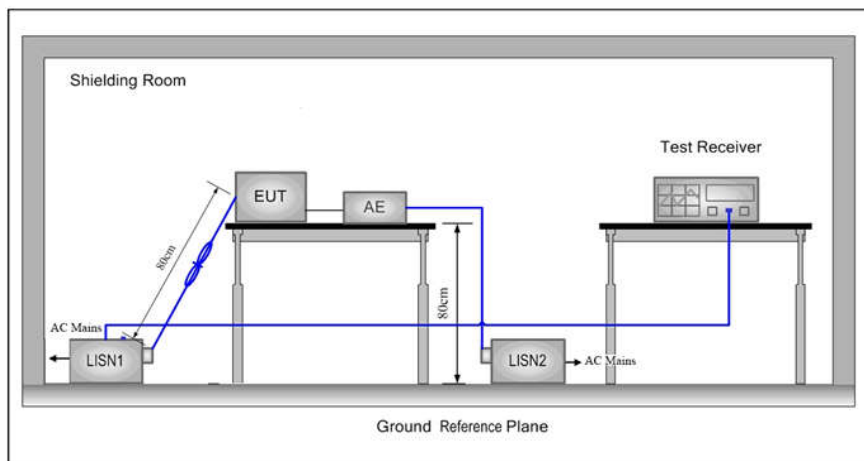

5.2 Test Environment

Operating Environment:	
Temperature:	23.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
802.11n(HT40)	2422MHz ~2452 MHz	Channel 3	Channel 6	Channel9
		2422MHz	2437MHz	2452MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

Test mode:

Pre-scan under all rate at lowest channel

200m and 400m at lowest channel.

Mode	802.11b							
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power(dBm)	18.01	17.99	17.96	17.94				
Mode	802.11g							
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power(dBm)	18.7	18.68	18.66	18.63	18.61	18.6	18.59	18.57
Mode	802.11n (HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power(dBm)	18.57	18.55	18.53	18.51	18.49	18.48	18.46	18.43
Mode	802.11n (HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power(dBm)	18.81	18.79	18.77	18.74	18.71	18.69	18.67	18.64

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

6 General Information

6.1 Client Information

Applicant:	Safe Space Scan Technology LLC
Address of Applicant:	5300 West Atlantic Avenue 612
Manufacturer:	Safe Space Scan Technology LLC
Address of Manufacturer:	5300 West Atlantic Avenue 612
Factory:	Safe Space Scan Technology LLC
Address of Factory:	5300 West Atlantic Avenue 612

6.2 General Description of EUT

Product Name:	Access Control Camera	
Model No.(EUT):	3S-07TW-T1, 3S-07TW-T2, 3S-07TW-T3, 3S-07TW-T4, 3S-07TW-T5, 3S-07TW-T6, 3S-07TW-T7, 3S-07TW-T8, 3S-07TW-T9, 3S-07TW-T10, 3S-07TW-T11, 3S-07TW-T12, 3S-07TW-T13, 3S-07TW-T14, 3S-07TW-T15, 3S-08TW-T1, 3S-08TW-T2, 3S-08TW-T3, 3S-08TW-T4, 3S-08TW-T5, 3S-08TW-T6, 3S-08TW-T7, 3S-08TW-T8, 3S-08TW-T9, 3S-08TW-T10, 3S-08TW-T11, 3S-08TW-T12, 3S-08TW-T13, 3S-08TW-T14, 3S-08TW-T15	
Test Model No.:	3S-07TW-T2	
Trade mark:	N/A	
EUT Supports Radios application:	IEEE 802.11 b/g/n(HT20)(HT40): 2412MHz to 2462MHz	
Power Supply:	Adapter	MODEL:SA36D-120300 INPUT:100-240V~ 50/60Hz 1A OUTPUT:12V---3A
Sample Received Date:	Jul. 01, 2020	
Sample tested Date:	Jul. 01, 2020 to Aug.17, 2020	

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,QPSK,BPSK)
Test Power Grade:	Default
Test Software of EUT:	QATool_Dbg.exe
Antenna Type and Gain:	Type: Dipole antenna Gain:1.5 dBi
Test Voltage:	DC 12V

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name		Manufacture	model	S/N serial number	Supplied by	Certification
AE1	Notebook	DELL	DELL 3490	D245DX2	DELL	CE&FCC

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	02-17-2020	02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	02-17-2020	02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-29-2020	06-28-2021
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	02-17-2020	02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	02-17-2020	02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	02-17-2020	02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-28-2020	04-27-2021
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-05-2020	03-04-2021
Barometer	changchun	DYM3	1188	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2020	05-15-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019	10-20-2020
Multi device Controller	maturo	NCD/070/107 11112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	06-29-2020	06-28-2021
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-05-2020	03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-20-2020	05-19-2021
Preamplifier	EMCI	EMC001330	980563	04-22-2020	04-21-2021
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-27-2020	04-26-2021
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

8 Radio Technical Requirements Specification


Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices


Test Results List:


Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

EUT DUTY CYCLE

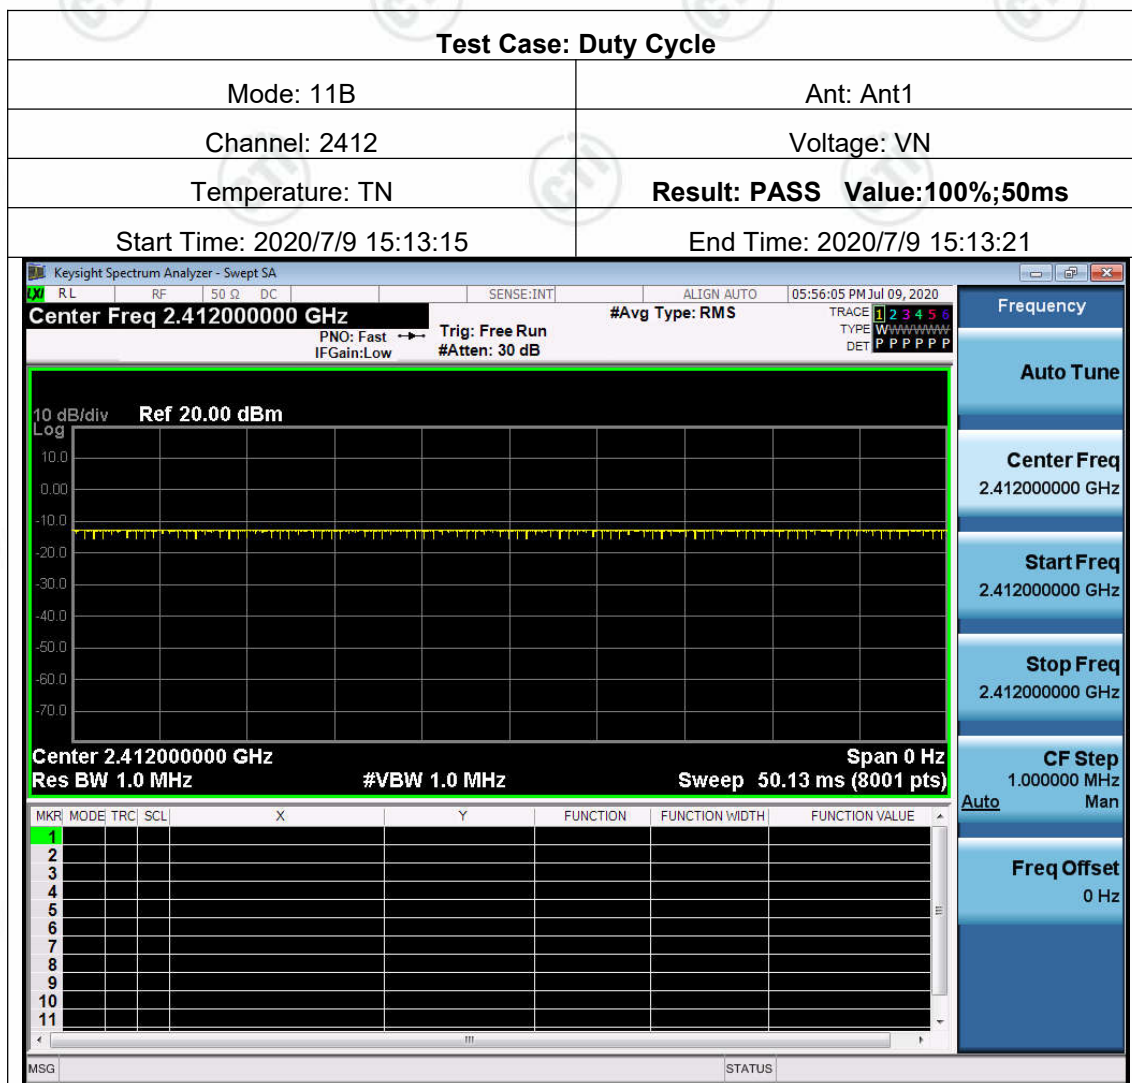

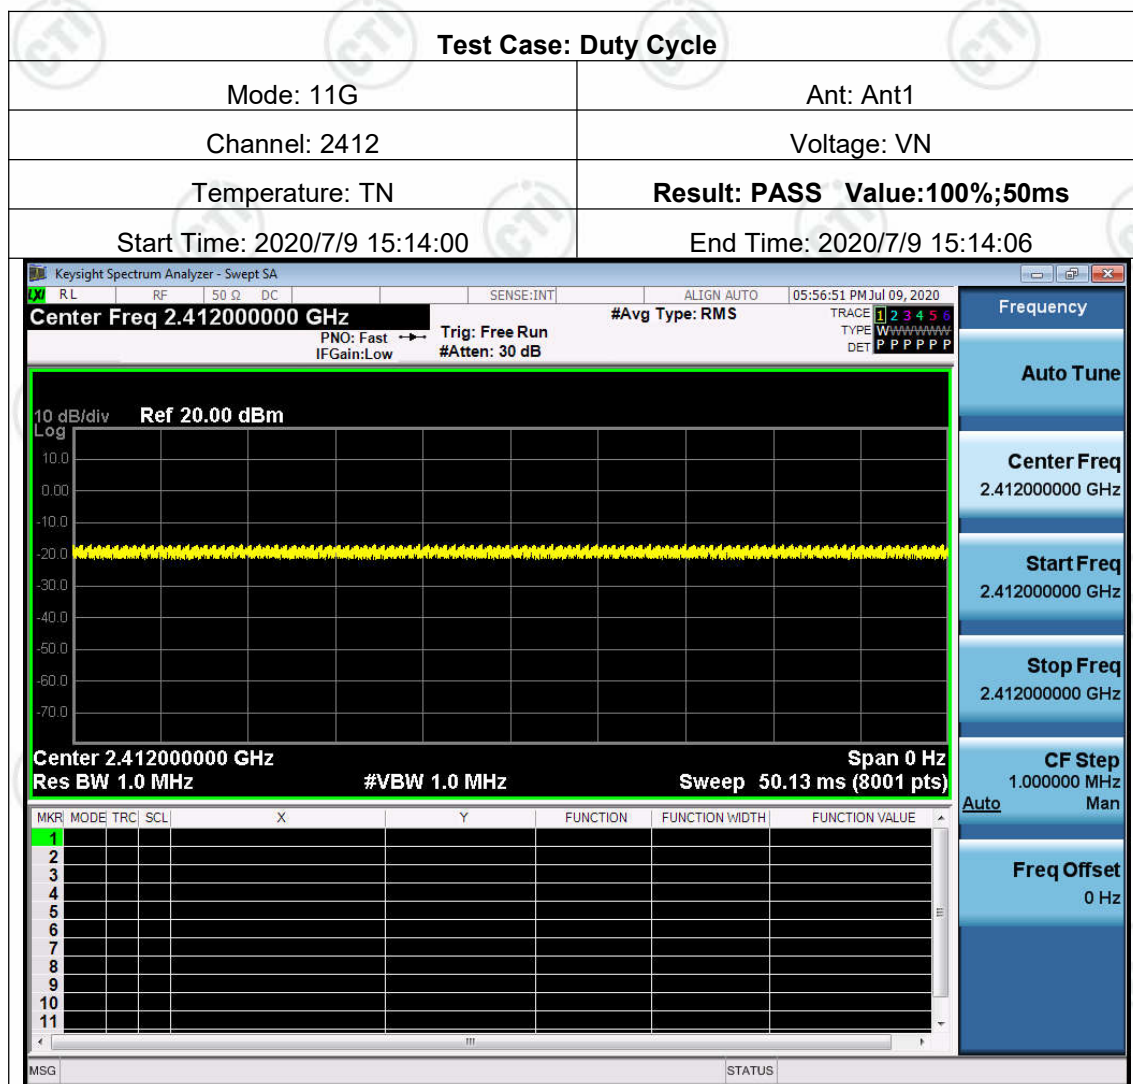

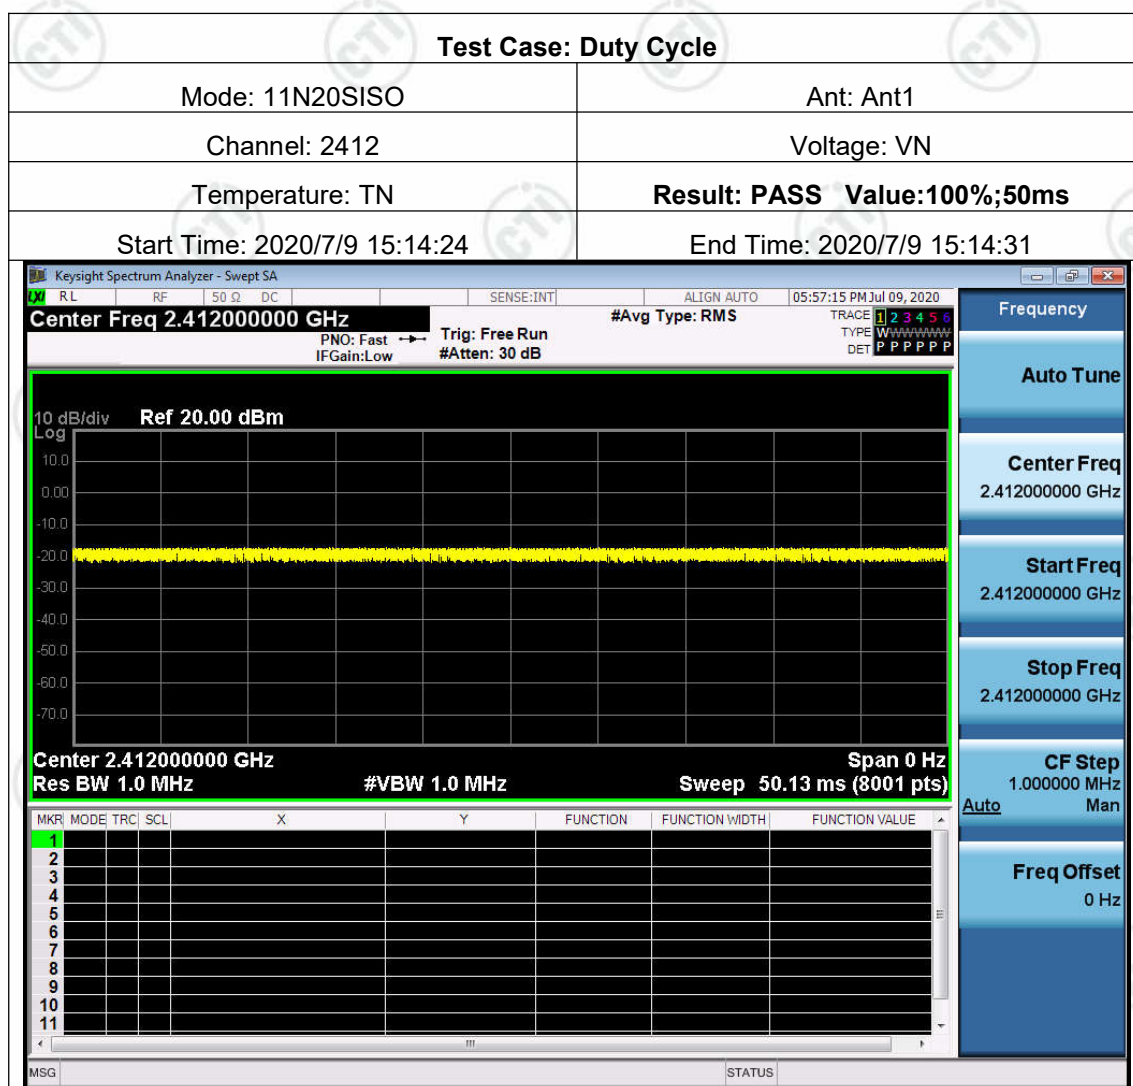

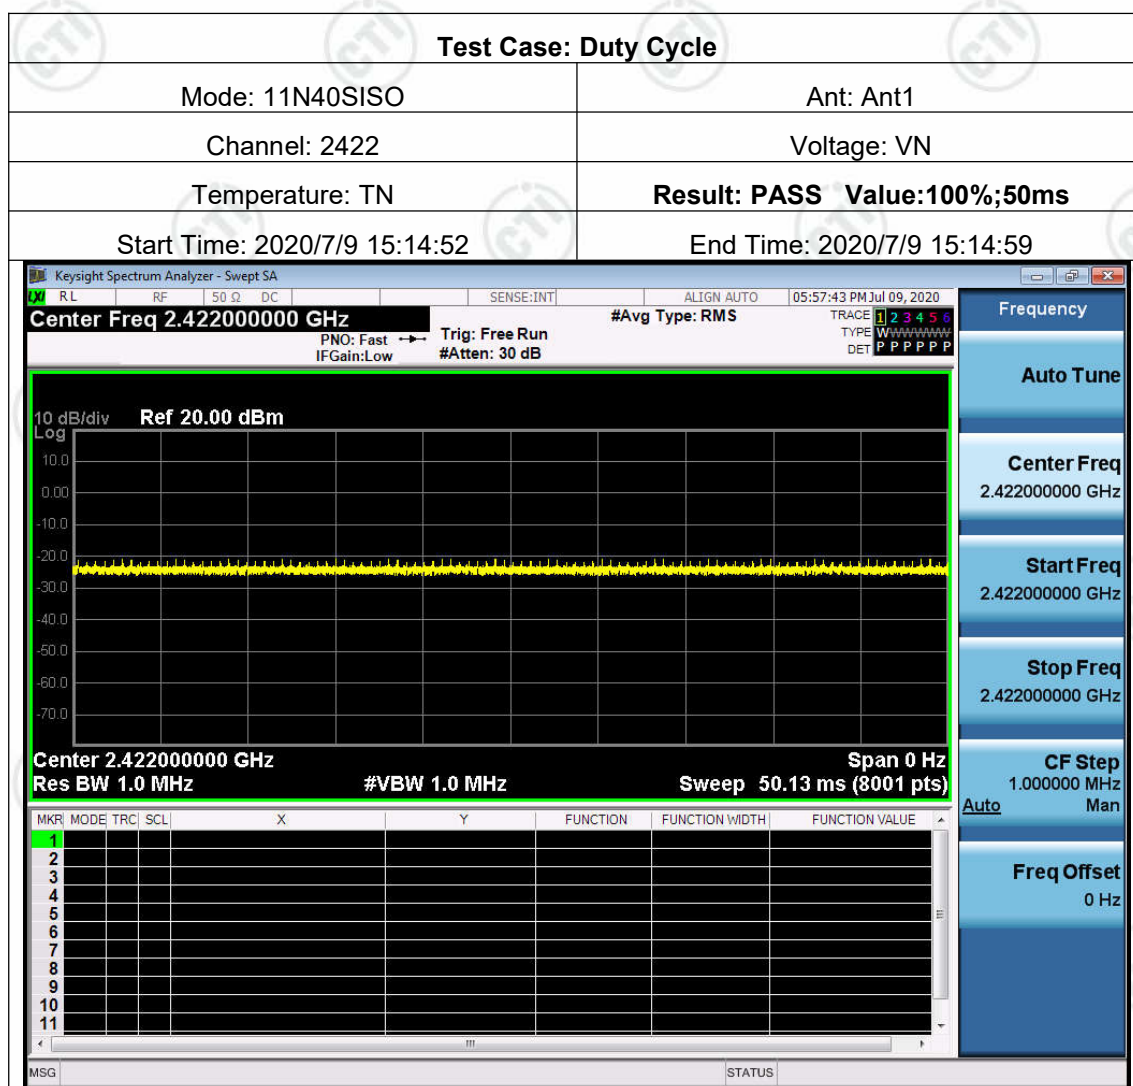

Appendix A): Conducted Peak Output Power

Test Limit

According to §15.247(b)(3),

Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi. If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	☒ Antenna not exceed 6 dBi : 30dBm ☐ Antenna with DG greater than 6 dBi : [Limit = 30 – (DG – 6)] ☐ Point-to-point operation :
-------	---

Average output power : For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. Spectrum analyzer settings are as follows :
 - a) Set the RBW = 1 MHz.
 - b) Set the VBW $\geq [3 \times \text{RBW}]$.
 - c) Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
 - d) Detector = peak.
 - e) Sweep time = auto couple.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges
4. Measure and record the result in the test report.

Test Setup








Result Table




Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	18.01	PASS
11B	MCH	18.15	PASS
11B	HCH	18.11	PASS
11G	LCH	18.7	PASS
11G	MCH	19.91	PASS
11G	HCH	19.94	PASS
11N20SISO	LCH	18.57	PASS
11N20SISO	MCH	19.7	PASS
11N20SISO	HCH	19.72	PASS
11N40SISO	LCH	18.81	PASS
11N40SISO	MCH	19.3	PASS
11N40SISO	HCH	19.41	PASS

Test Graph

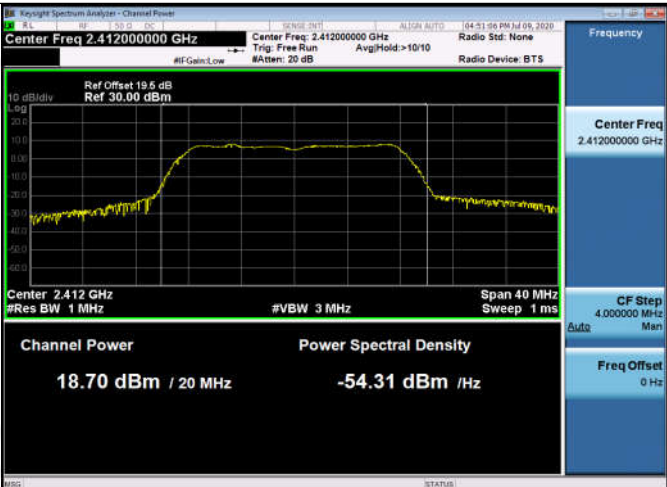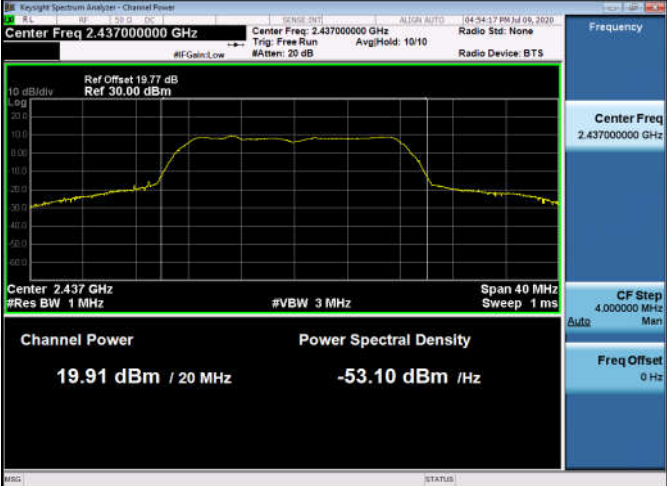

11G/LCH	 Keyight Spectrum Analyzer - Channel Power Center Freq 2.412000000 GHz Ref Offset 19.5 dB Ref 30.00 dBm Center 2.412 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms Channel Power 18.70 dBm / 20 MHz Power Spectral Density -54.31 dBm / Hz Frequency Center Freq 2.412000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz
11G/MCH	 Keyight Spectrum Analyzer - Channel Power Center Freq 2.437000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms Channel Power 19.91 dBm / 20 MHz Power Spectral Density -53.10 dBm / Hz Frequency Center Freq 2.437000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz
11G/HCH	 Keyight Spectrum Analyzer - Channel Power Center Freq 2.462000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Center 2.462 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms Channel Power 19.94 dBm / 20 MHz Power Spectral Density -53.07 dBm / Hz Frequency Center Freq 2.462000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz

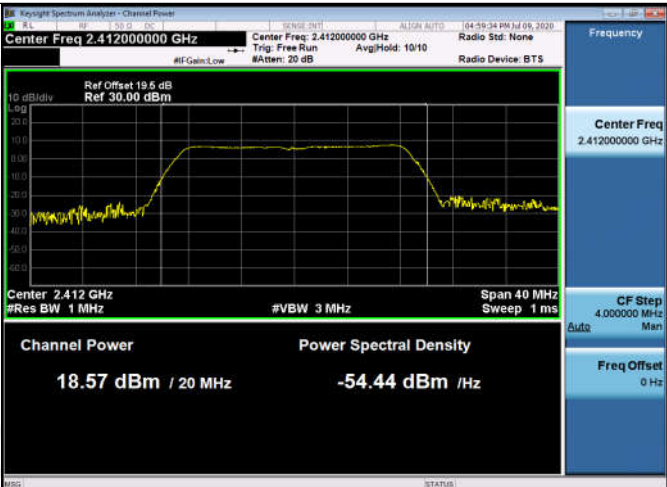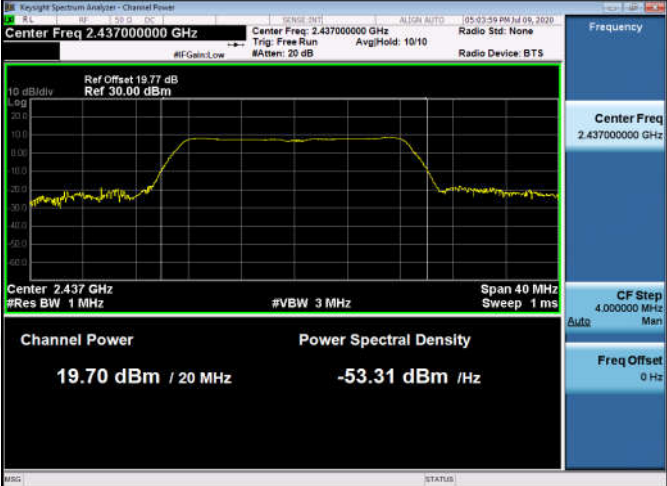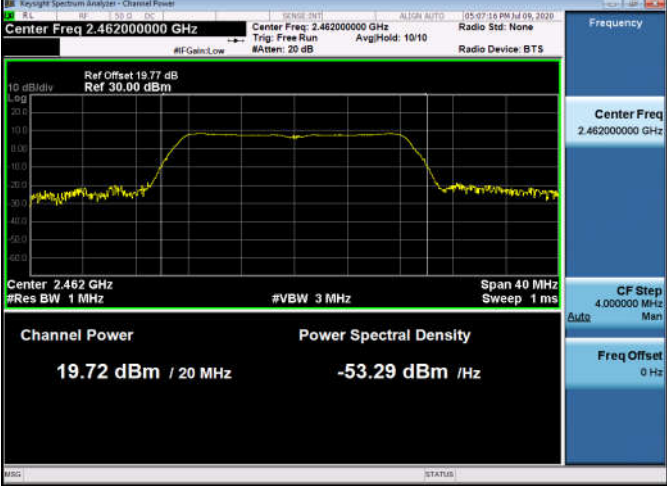11N20SISO/LCH	 Key: Keysight Spectrum Analyzer - Channel Power Center Freq 2.412000000 GHz Ref Offset 19.5 dB Ref 30.00 dBm Channel Power: 18.57 dBm / 20 MHz Power Spectral Density: -54.44 dBm / Hz Center 2.412 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms Frequency: Center Freq 2.412000000 GHz CF Step 4.000000 MHz Auto Man Freq Offset 0 Hz
11N20SISO/MCH	 Key: Keysight Spectrum Analyzer - Channel Power Center Freq 2.437000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Channel Power: 19.70 dBm / 20 MHz Power Spectral Density: -53.31 dBm / Hz Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms Frequency: Center Freq 2.437000000 GHz CF Step 4.000000 MHz Auto Man Freq Offset 0 Hz
11N20SISO/HCH	 Key: Keysight Spectrum Analyzer - Channel Power Center Freq 2.462000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Channel Power: 19.72 dBm / 20 MHz Power Spectral Density: -53.29 dBm / Hz Center 2.462 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms Frequency: Center Freq 2.462000000 GHz CF Step 4.000000 MHz Auto Man Freq Offset 0 Hz

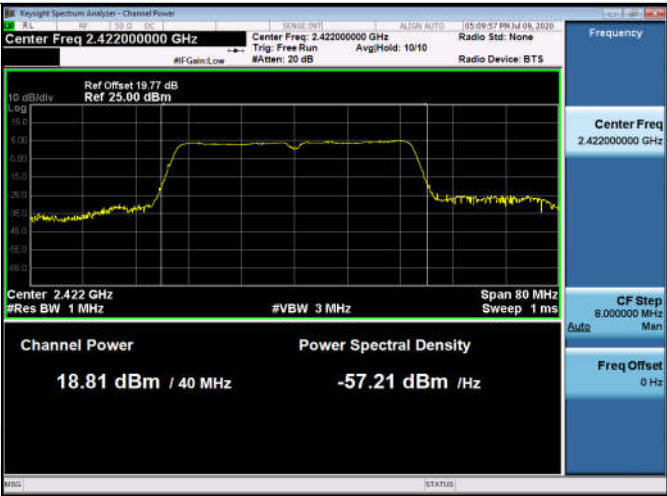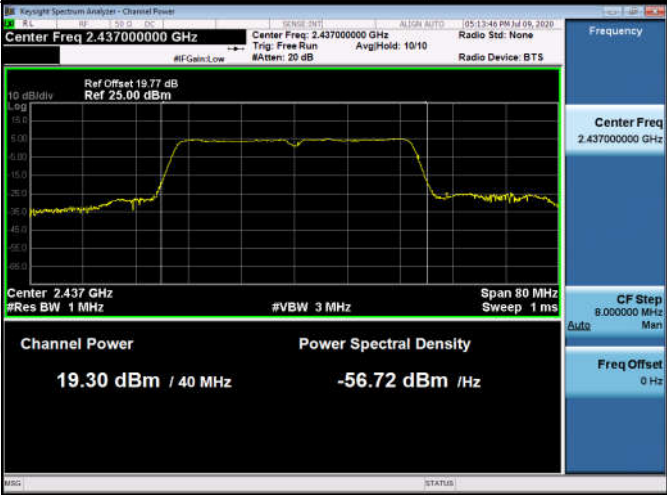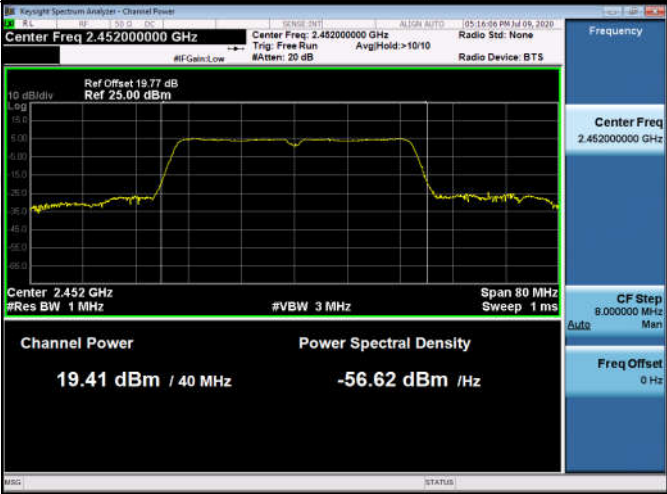11N40SISO/LCH	 KeySight Spectrum Analyzer - Channel Power Center Freq 2.422000000 GHz Ref Offset 19.77 dB Ref 25.00 dBm Channel Power: 18.81 dBm / 40 MHz Power Spectral Density: -57.21 dBm / Hz Center Freq: 2.422 GHz #Res BW: 1 MHz #VBW: 3 MHz Span: 80 MHz Sweep: 1 ms CF Step: 8.000000 MHz Freq Offset: 0 Hz
11N40SISO/MCH	 KeySight Spectrum Analyzer - Channel Power Center Freq 2.437000000 GHz Ref Offset 19.77 dB Ref 25.00 dBm Channel Power: 19.30 dBm / 40 MHz Power Spectral Density: -56.72 dBm / Hz Center Freq: 2.437 GHz #Res BW: 1 MHz #VBW: 3 MHz Span: 80 MHz Sweep: 1 ms CF Step: 8.000000 MHz Freq Offset: 0 Hz
11N40SISO/HCH	 KeySight Spectrum Analyzer - Channel Power Center Freq 2.452000000 GHz Ref Offset 19.77 dB Ref 25.00 dBm Channel Power: 19.41 dBm / 40 MHz Power Spectral Density: -56.62 dBm / Hz Center Freq: 2.452 GHz #Res BW: 1 MHz #VBW: 3 MHz Span: 80 MHz Sweep: 1 ms CF Step: 8.000000 MHz Freq Offset: 0 Hz

Appendix B): 6dB Occupied Bandwidth

Test Limit

According to §15.247(a)(2),

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------

Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01 and ANSI C63.10: 2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100KHz , VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.


Test Setup









Result Table




Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
11B	LCH	10.08	12.257	PASS
11B	MCH	10.07	12.297	PASS
11B	HCH	10.08	12.352	PASS
11G	LCH	16.34	16.445	PASS
11G	MCH	16.35	16.457	PASS
11G	HCH	16.36	16.459	PASS
11N20SISO	LCH	17.09	17.517	PASS
11N20SISO	MCH	17.29	17.527	PASS
11N20SISO	HCH	17.06	17.521	PASS
11N40SISO	LCH	35.33	35.851	PASS
11N40SISO	MCH	35.30	35.849	PASS
11N40SISO	HCH	35.34	35.856	PASS

Test Graph

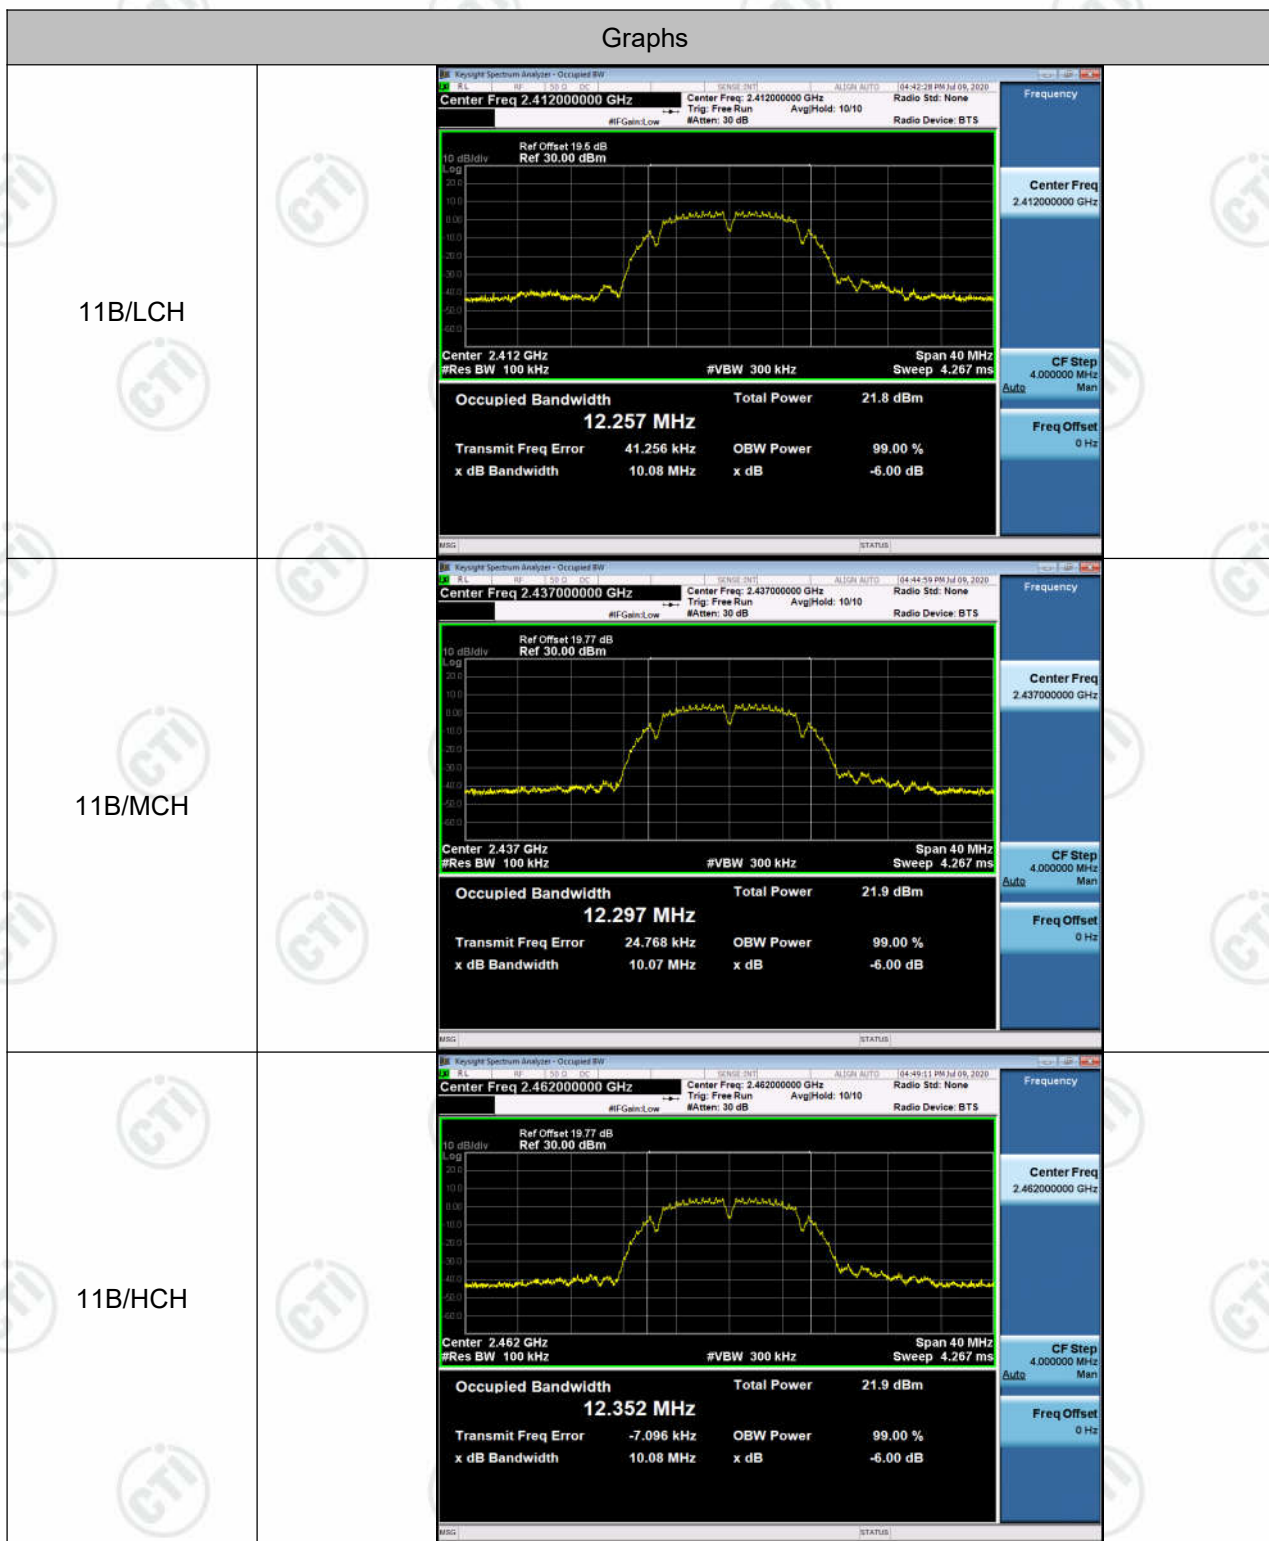

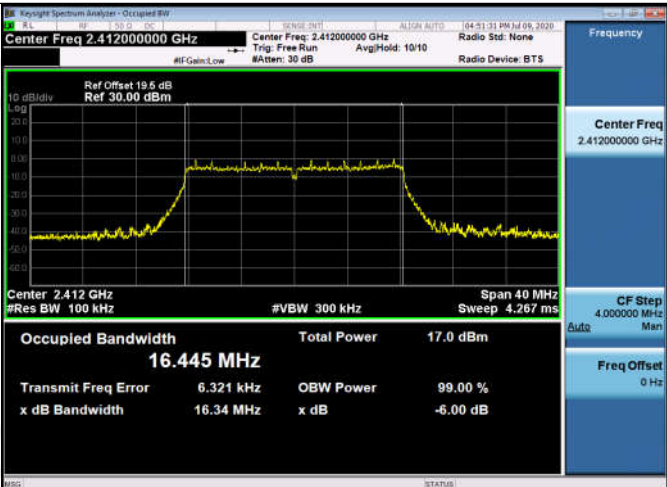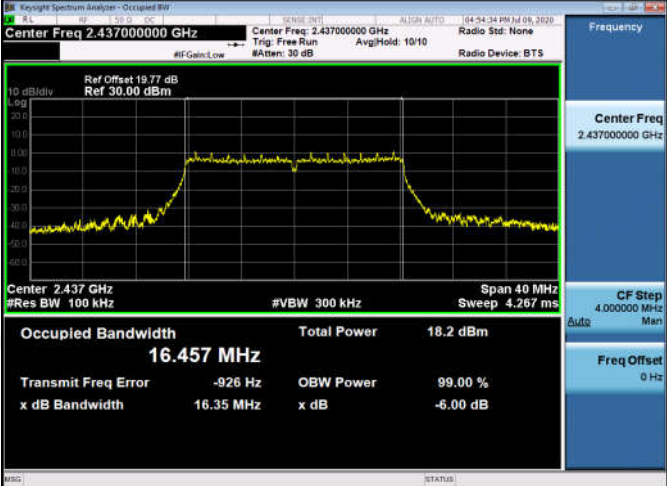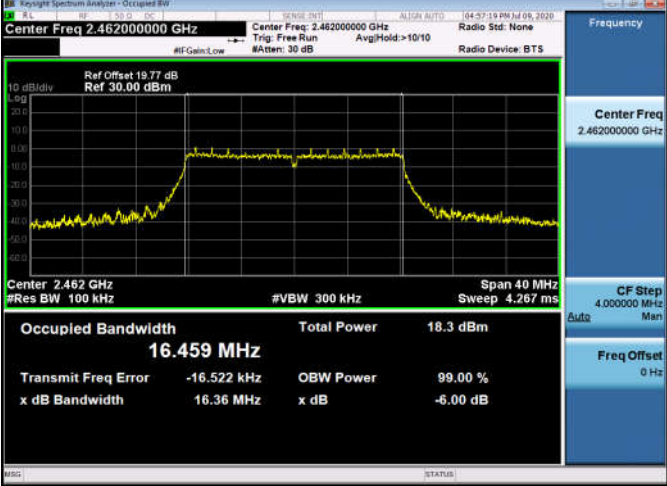11G/LCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 19.5 dB Ref 30.00 dBm Center 2.412 GHz #Res BW 100 kHz Occupied Bandwidth 16.445 MHz Total Power 17.0 dBm Transmit Freq Error 6.321 kHz x dB Bandwidth 16.34 MHz
11G/MCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Center 2.437 GHz #Res BW 100 kHz Occupied Bandwidth 16.457 MHz Total Power 18.2 dBm Transmit Freq Error -926 Hz x dB Bandwidth 16.35 MHz
11G/HCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Center 2.462 GHz #Res BW 100 kHz Occupied Bandwidth 16.459 MHz Total Power 18.3 dBm Transmit Freq Error -16.522 kHz x dB Bandwidth 16.36 MHz

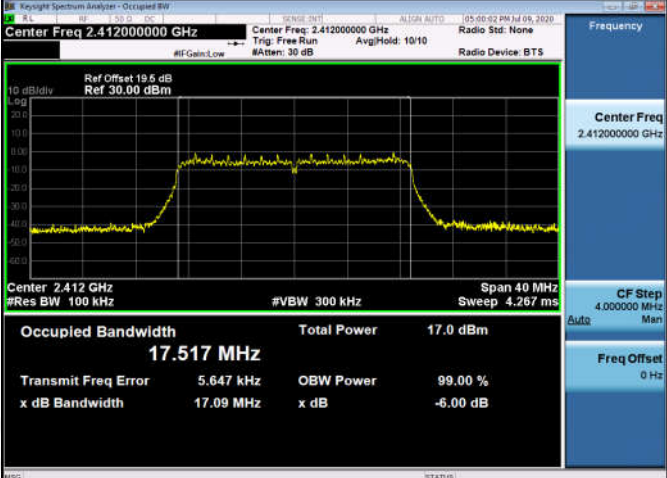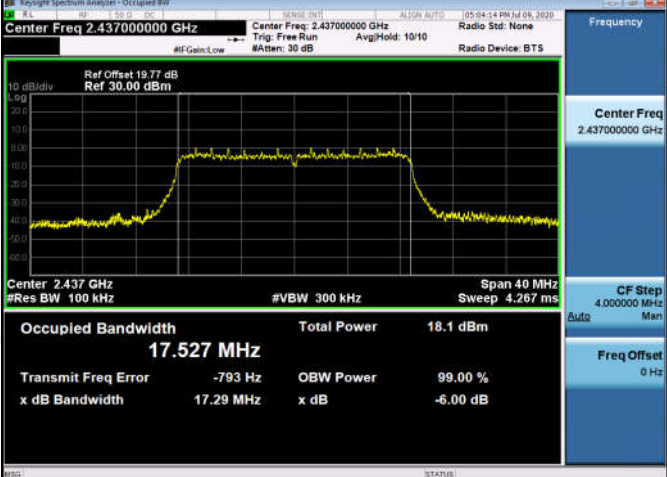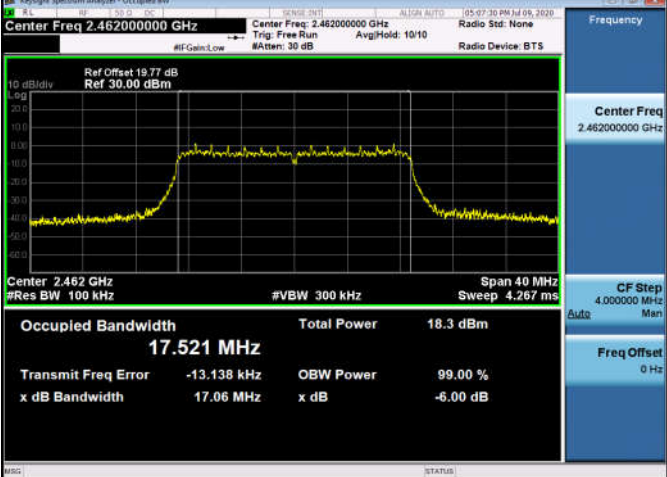11N20SISO/LCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 19.5 dB Ref 30.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms Occupied Bandwidth 17.517 MHz Total Power 17.0 dBm Transmit Freq Error 5.647 kHz OBW Power 99.00 % x dB Bandwidth 17.09 MHz x dB -6.00 dB Frequency 2.412000000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
11N20SISO/MCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms Occupied Bandwidth 17.527 MHz Total Power 18.1 dBm Transmit Freq Error -793 Hz OBW Power 99.00 % x dB Bandwidth 17.29 MHz x dB -6.00 dB Frequency 2.437000000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
11N20SISO/HCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms Occupied Bandwidth 17.521 MHz Total Power 18.3 dBm Transmit Freq Error -13.138 kHz OBW Power 99.00 % x dB Bandwidth 17.06 MHz x dB -6.00 dB Frequency 2.462000000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz

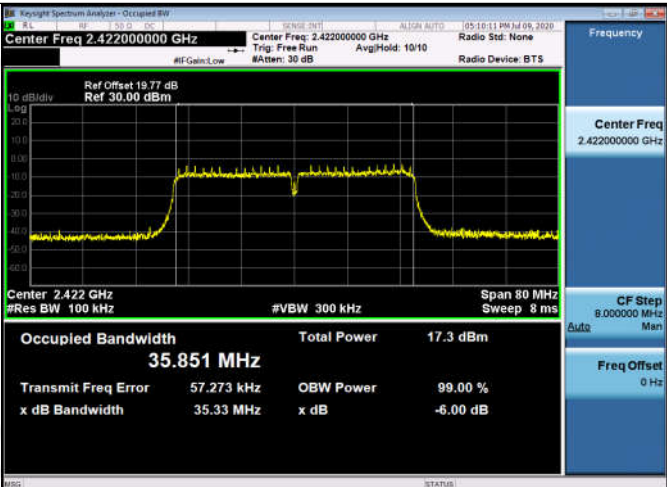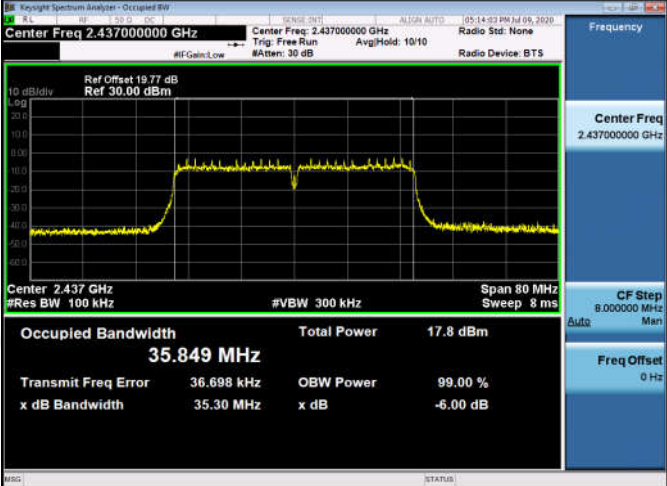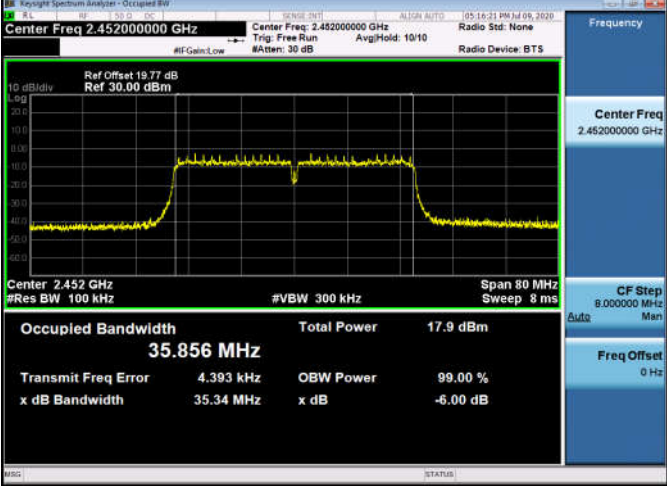11N40SISO/LCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Center 2.422 GHz #Res BW 100 kHz Span 80 MHz Sweep 8 ms Occupied Bandwidth 35.851 MHz Total Power 17.3 dBm Transmit Freq Error 57.273 kHz OBW Power 99.00 % x dB Bandwidth 35.33 MHz x dB -6.00 dB Frequency Center Freq 2.422000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz
11N40SISO/MCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Center 2.437 GHz #Res BW 100 kHz Span 80 MHz Sweep 8 ms Occupied Bandwidth 35.849 MHz Total Power 17.8 dBm Transmit Freq Error 36.698 kHz OBW Power 99.00 % x dB Bandwidth 35.30 MHz x dB -6.00 dB Frequency Center Freq 2.437000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz
11N40SISO/HCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset 19.77 dB Ref 30.00 dBm Center 2.452 GHz #Res BW 100 kHz Span 80 MHz Sweep 8 ms Occupied Bandwidth 35.856 MHz Total Power 17.9 dBm Transmit Freq Error 4.393 kHz OBW Power 99.00 % x dB Bandwidth 35.34 MHz x dB -6.00 dB Frequency Center Freq 2.452000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz

Appendix C): Band-edge for RF Conducted Emissions

Test Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup






Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	5.458	-49.968	-24.54	PASS
11B	HCH	4.893	-49.933	-25.11	PASS
11G	LCH	-0.343	-46.159	-30.34	PASS
11G	HCH	0.952	-44.222	-29.05	PASS
11N20SISO	LCH	0.080	-47.489	-29.92	PASS
11N20SISO	HCH	0.925	-42.419	-29.08	PASS
11N40SISO	LCH	-4.047	-45.989	-34.05	PASS
11N40SISO	HCH	-2.649	-39.703	-32.65	PASS

Test Graph

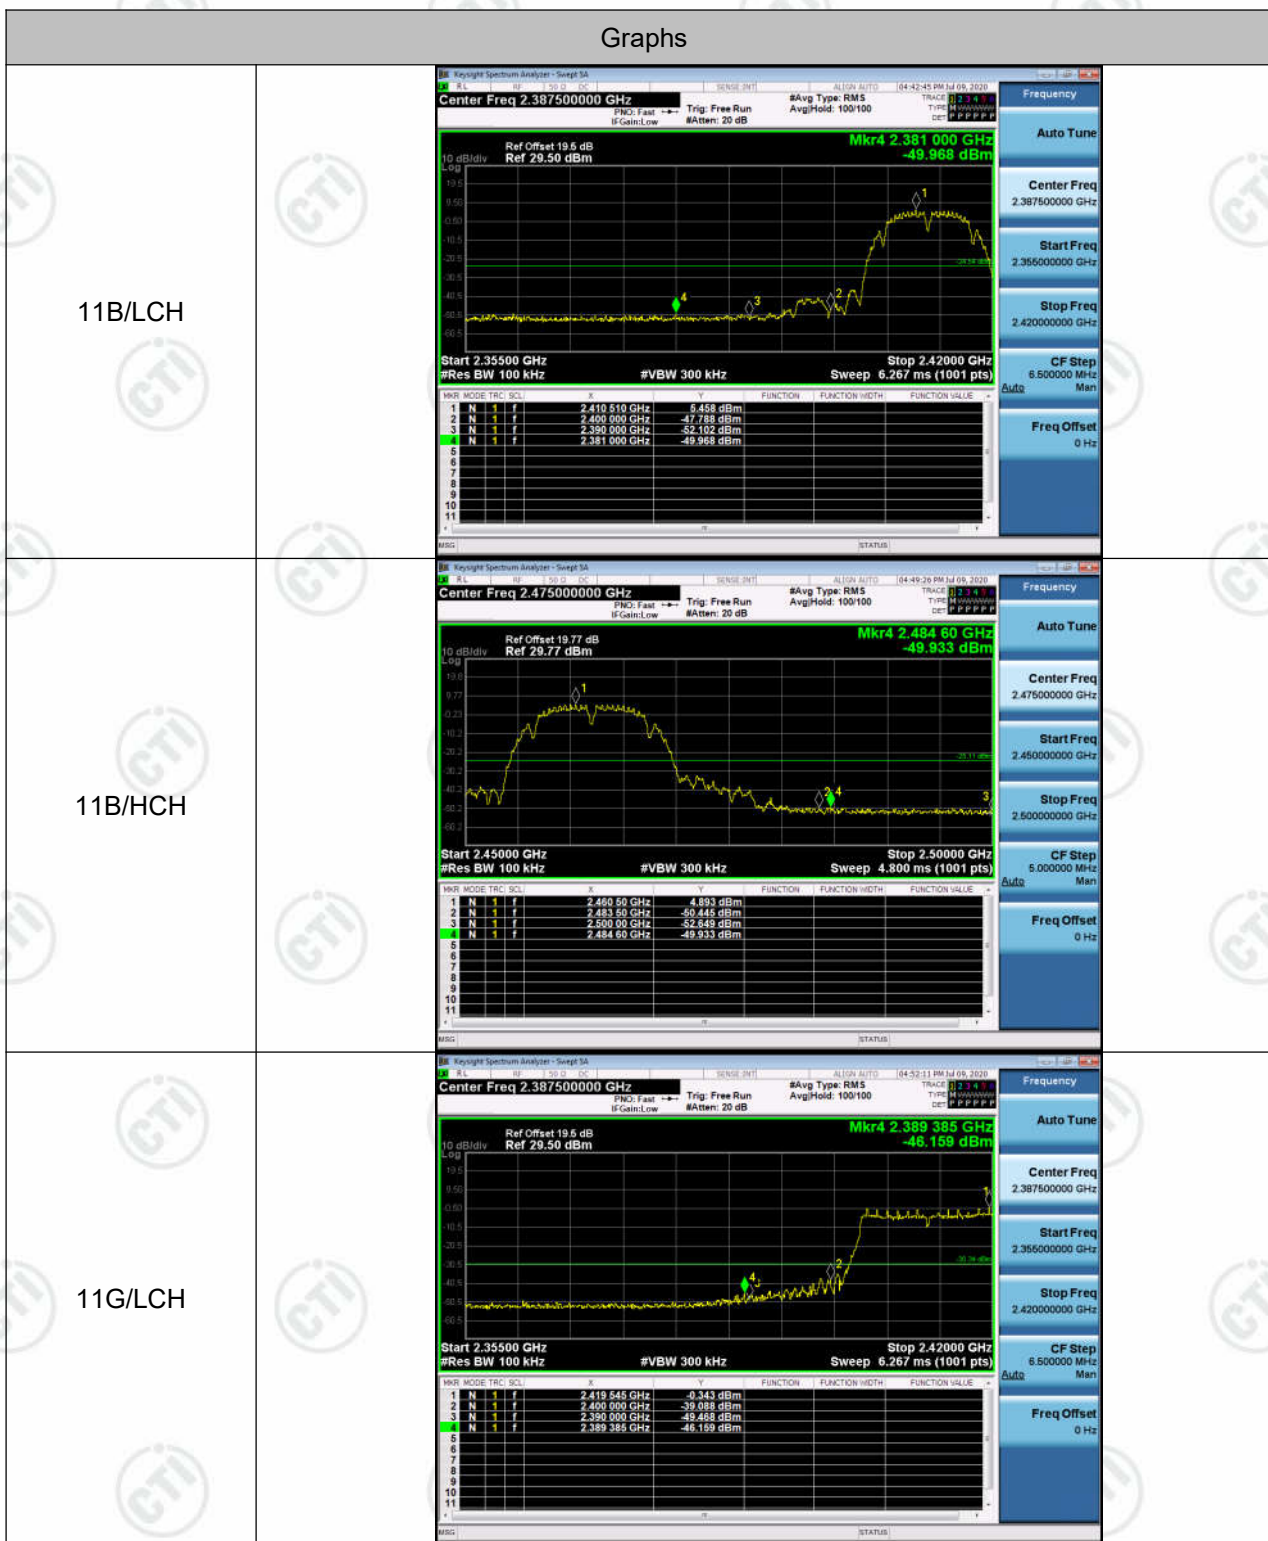

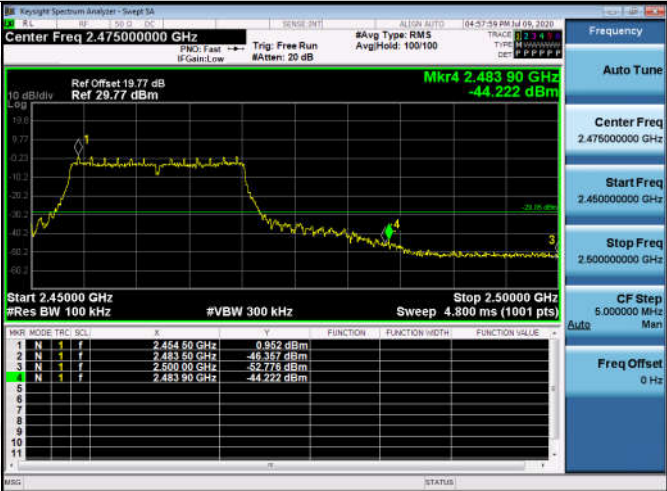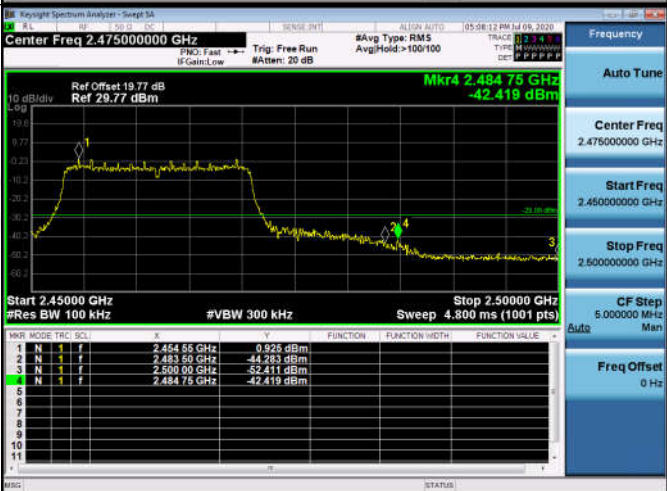11G/HCH	
11N20SISO/LCH	
11N20SISO/HCH	

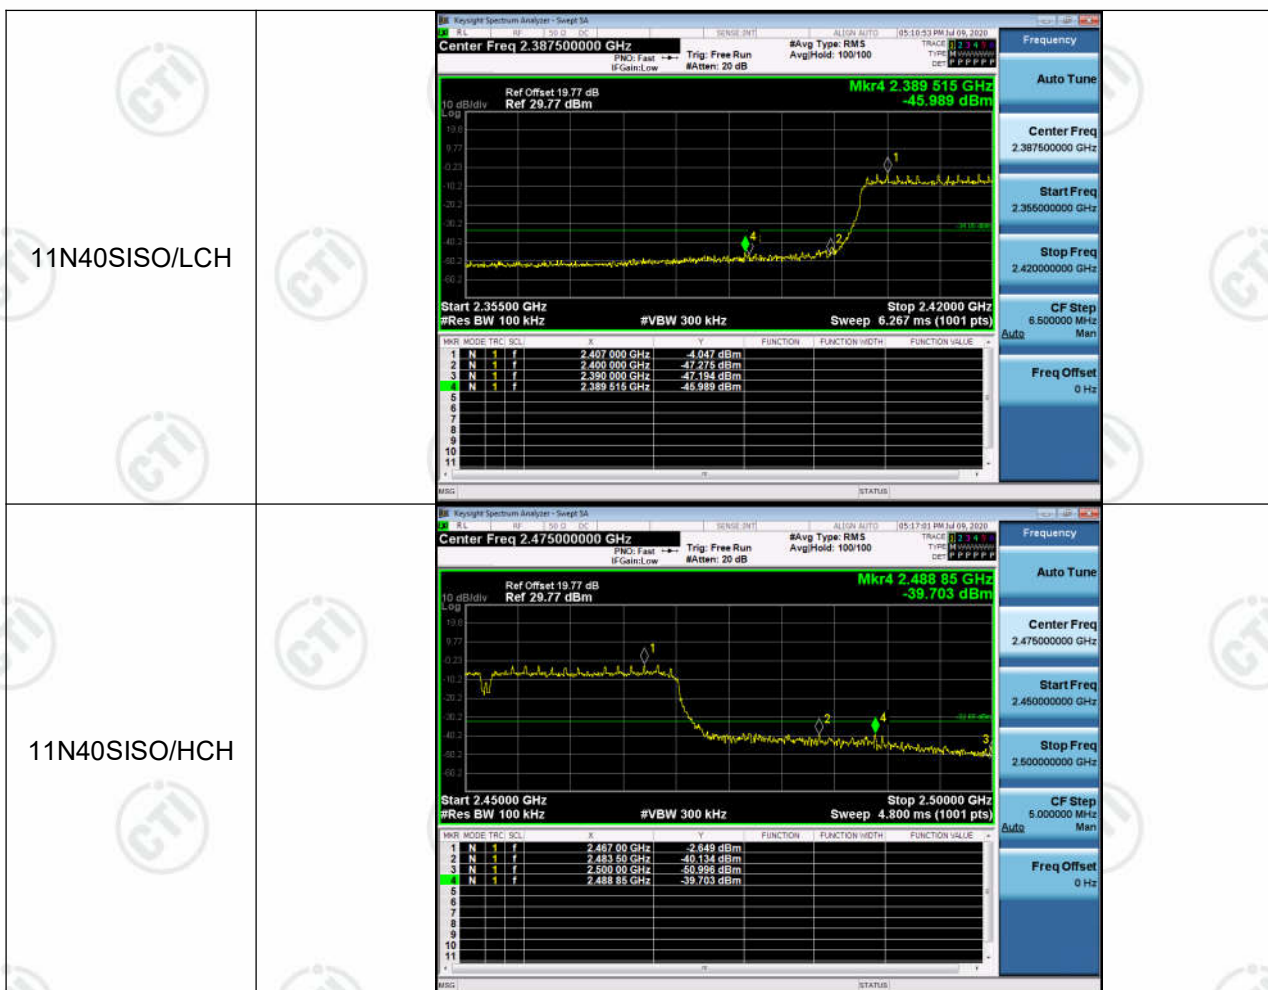

Appendix D): RF Conducted Spurious Emissions

Test Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Setup





Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	4.911	<Limit	PASS
11B	MCH	5.011	<Limit	PASS
11B	HCH	4.994	<Limit	PASS
11G	LCH	0.157	<Limit	PASS
11G	MCH	0.893	<Limit	PASS
11G	HCH	1.247	<Limit	PASS
11N20SISO	LCH	0.055	<Limit	PASS
11N20SISO	MCH	0.674	<Limit	PASS
11N20SISO	HCH	0.749	<Limit	PASS
11N40SISO	LCH	-2.665	<Limit	PASS
11N40SISO	MCH	-2.522	<Limit	PASS
11N40SISO	HCH	-2.584	<Limit	PASS


Test Graph




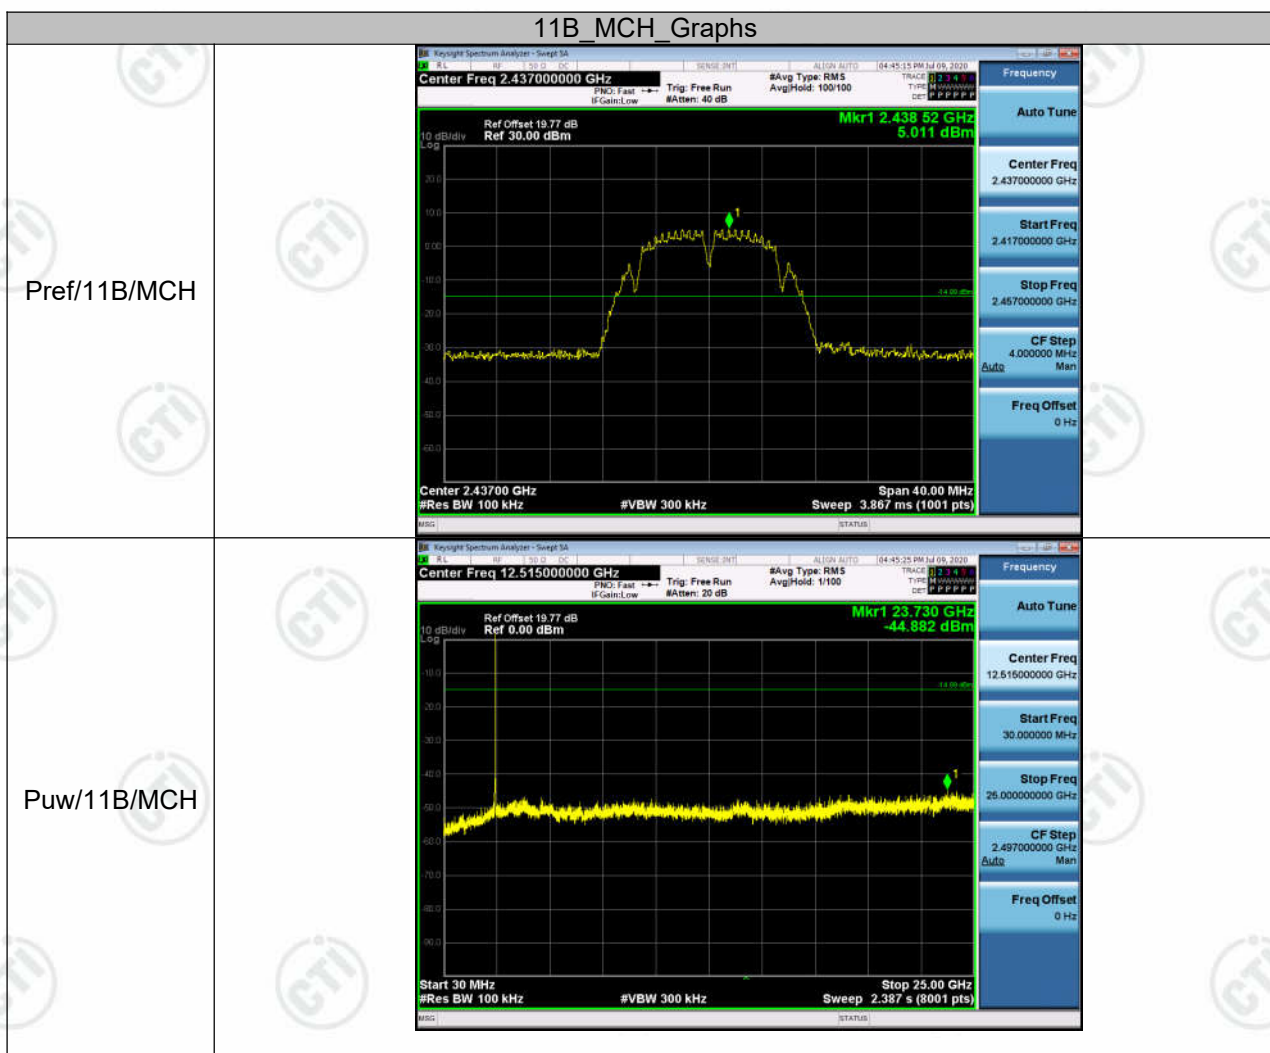


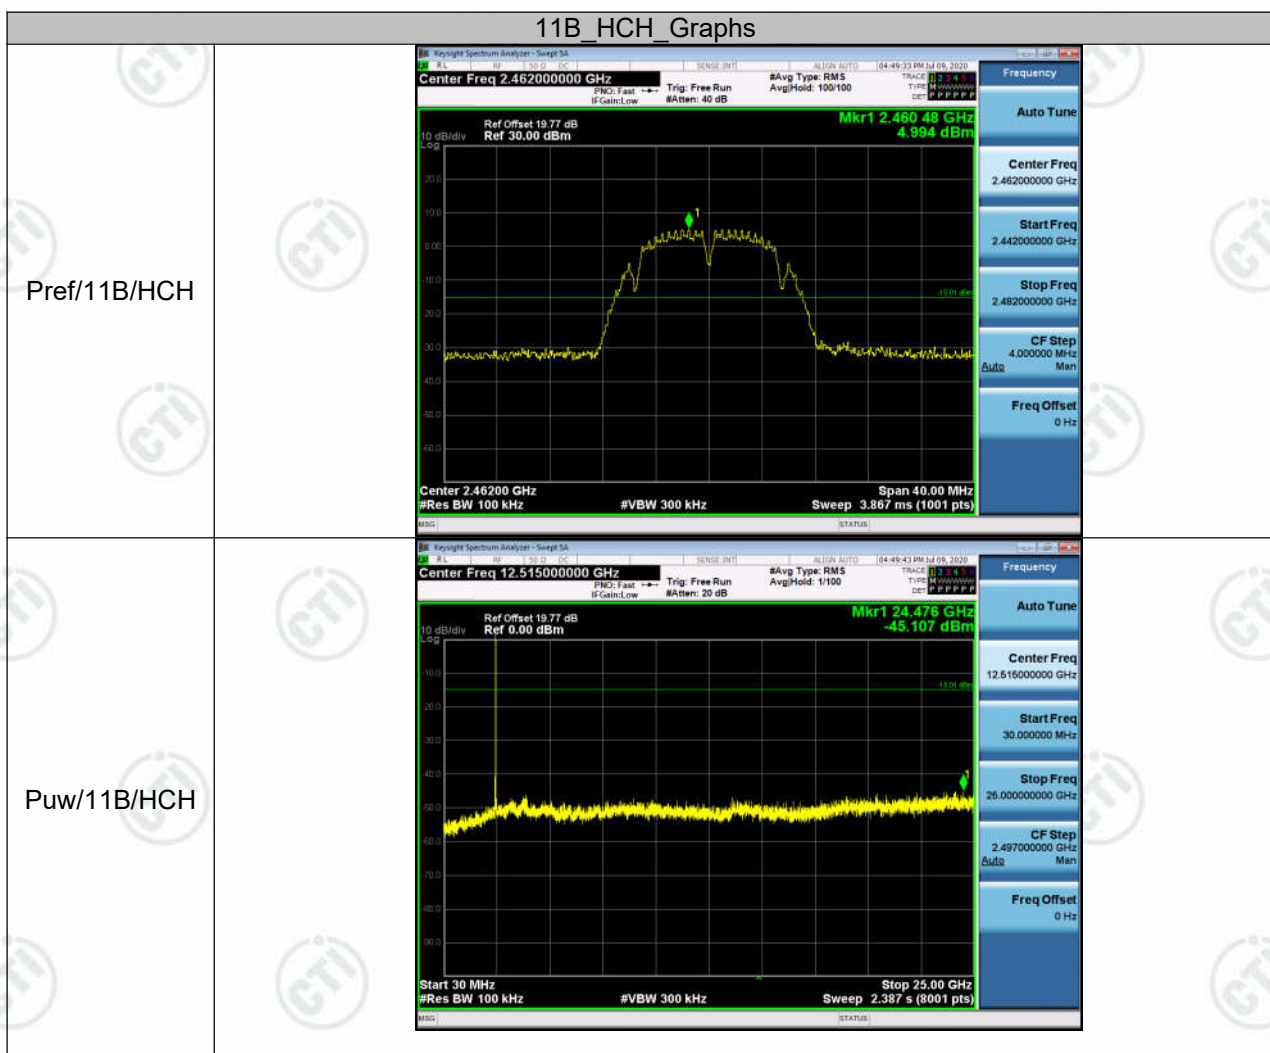


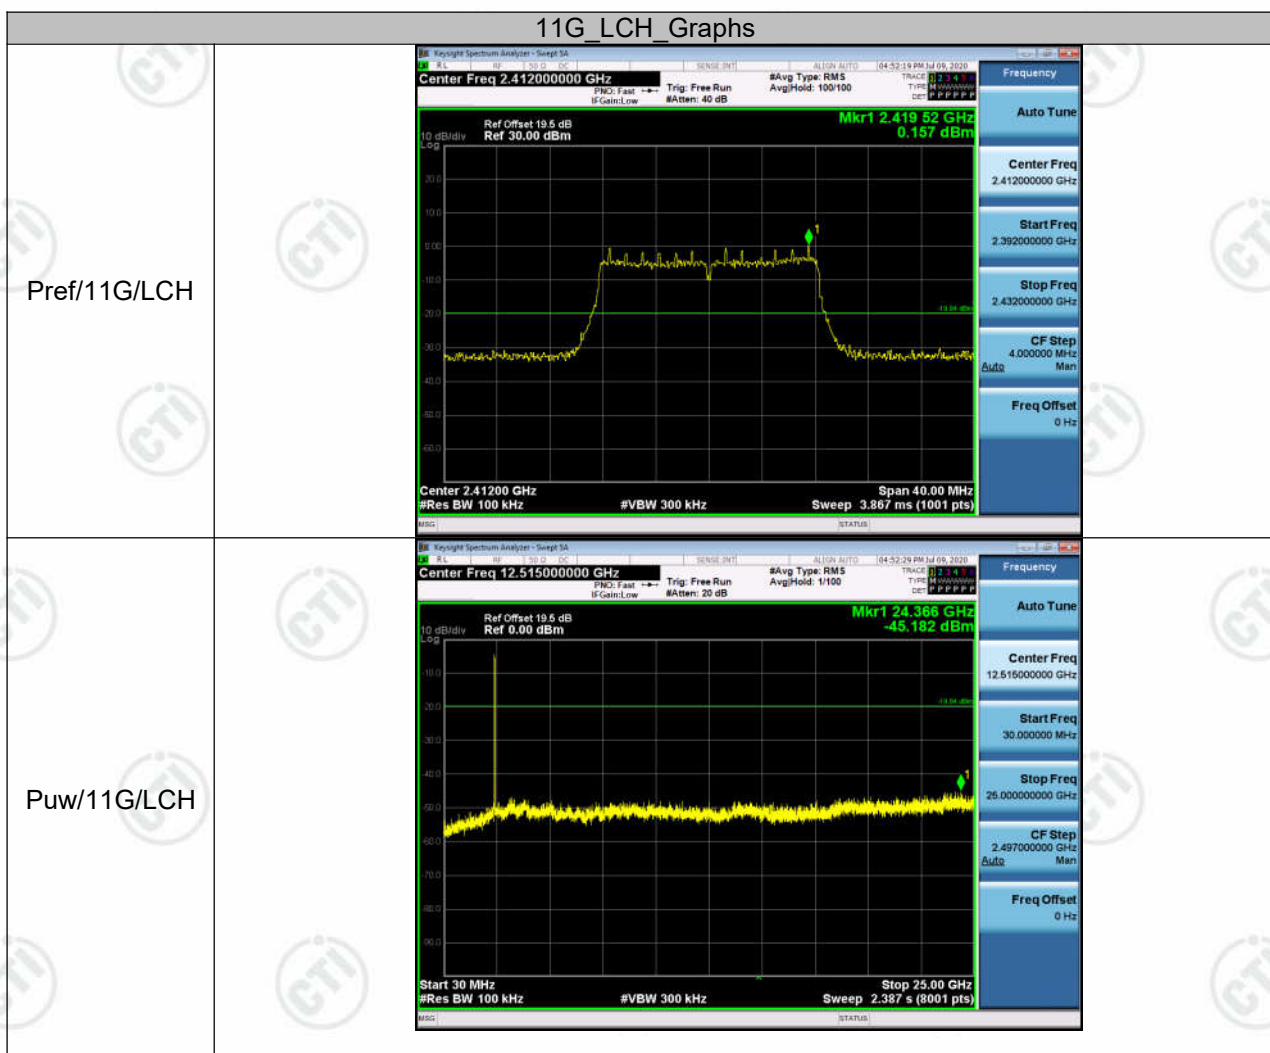


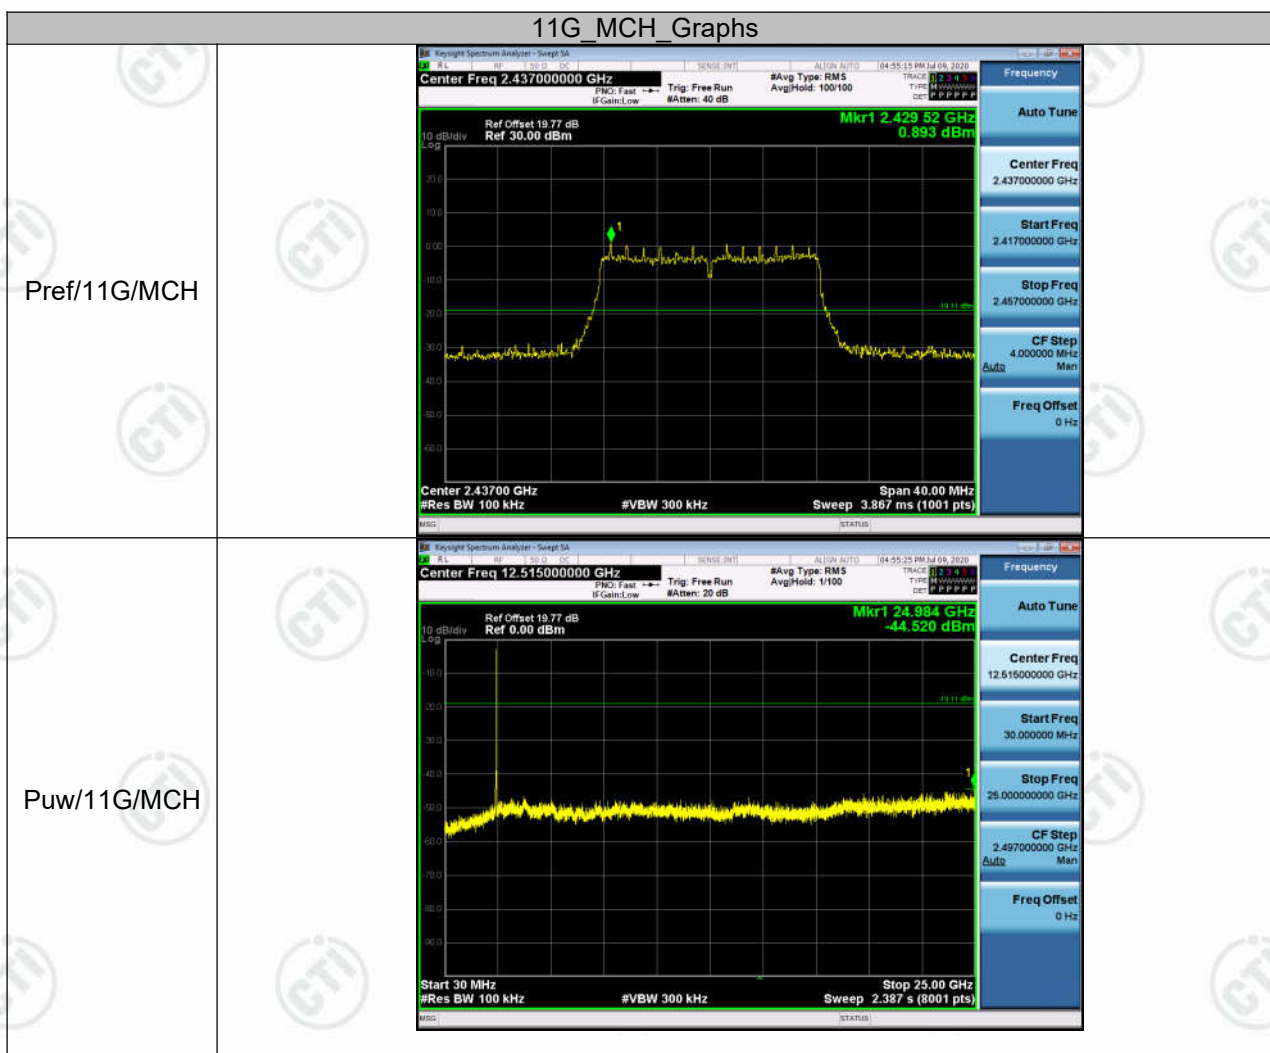


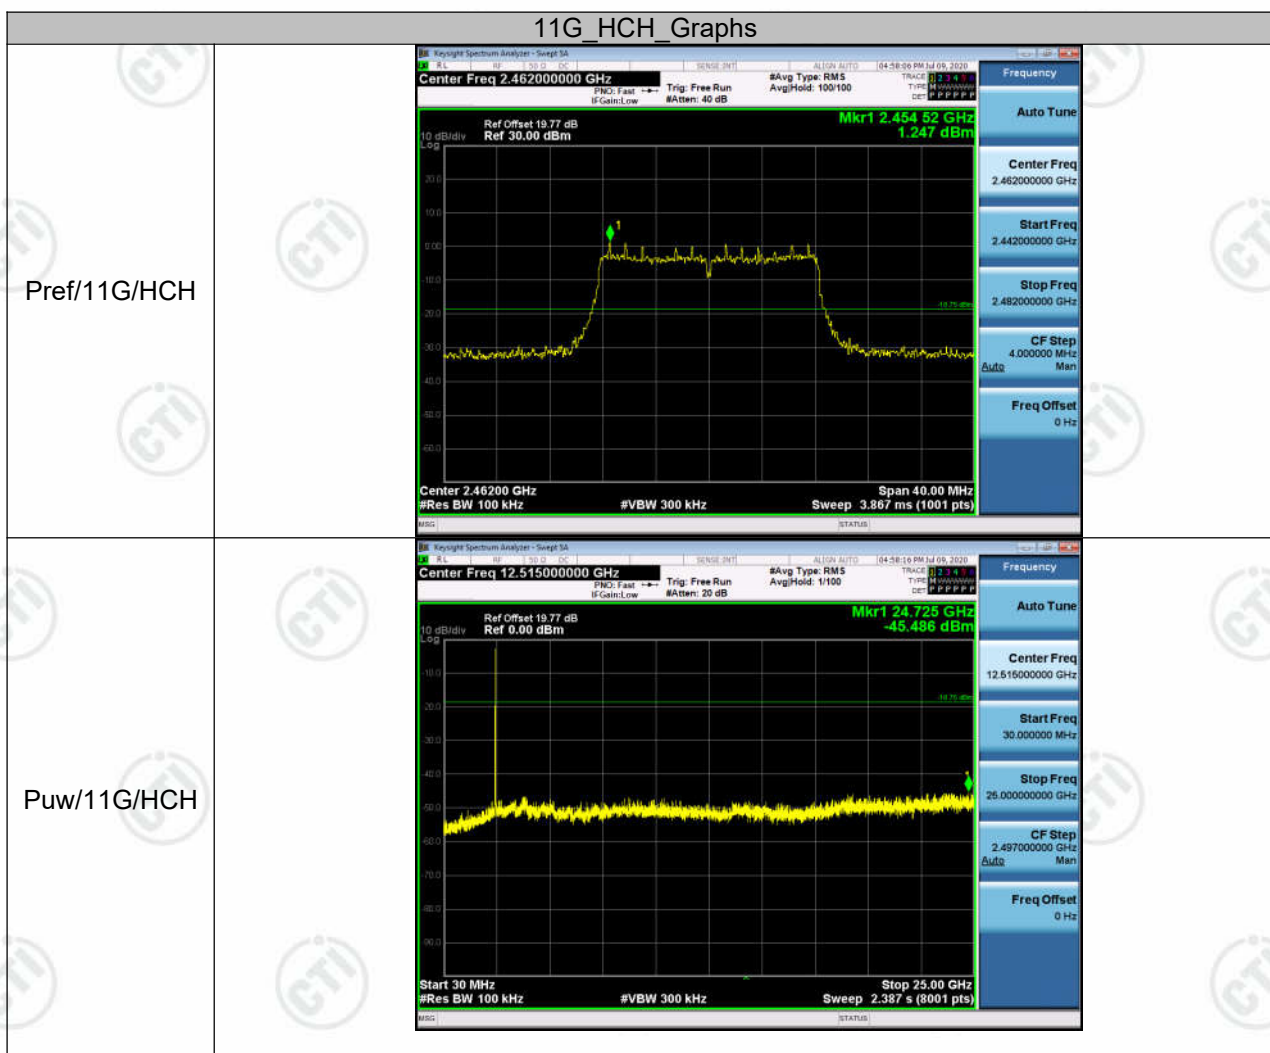


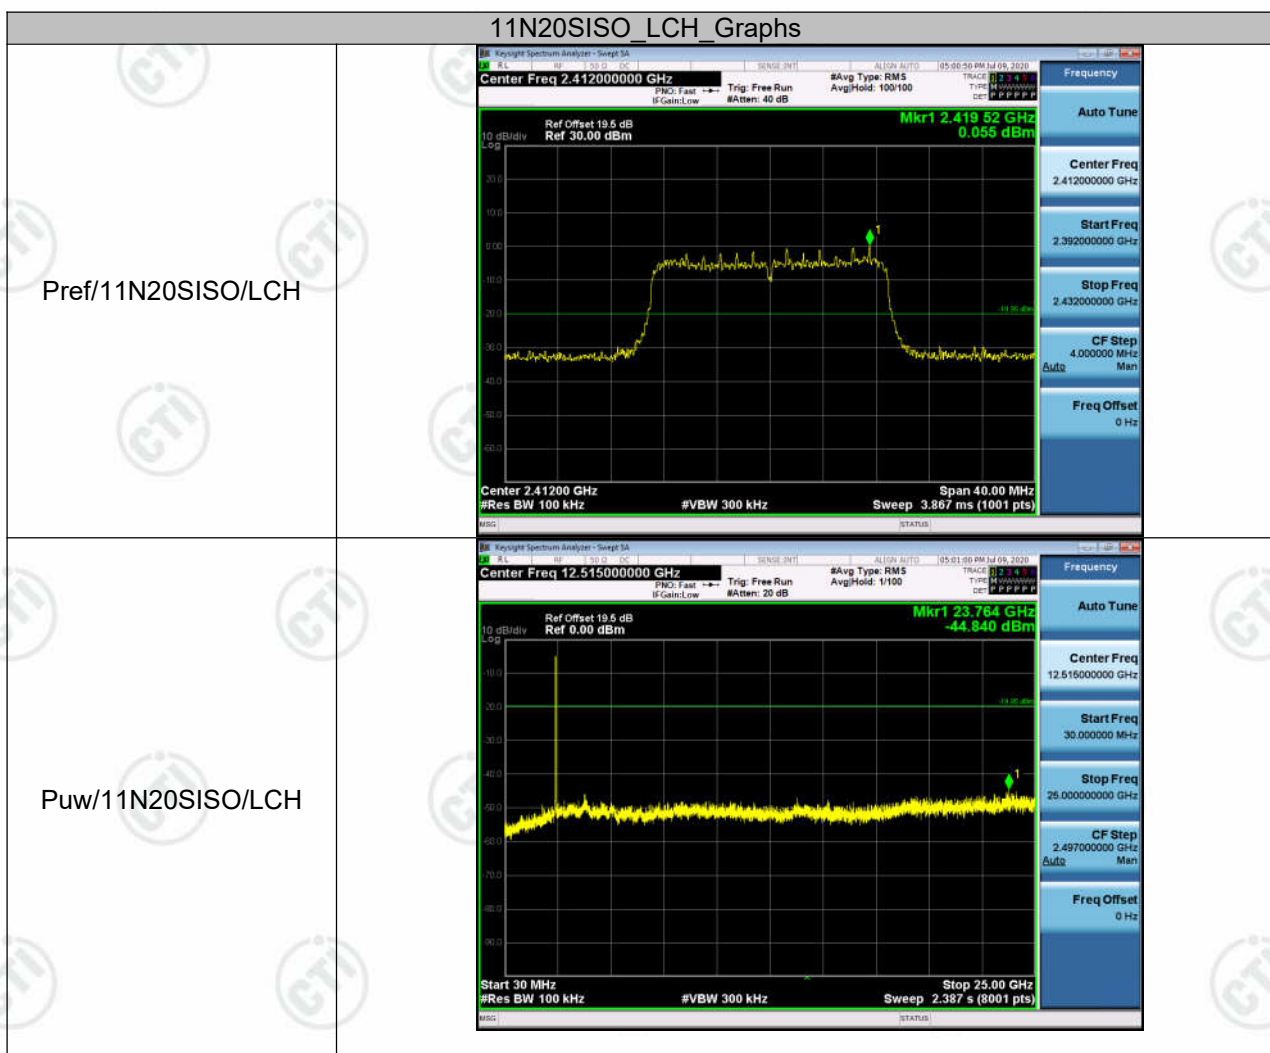


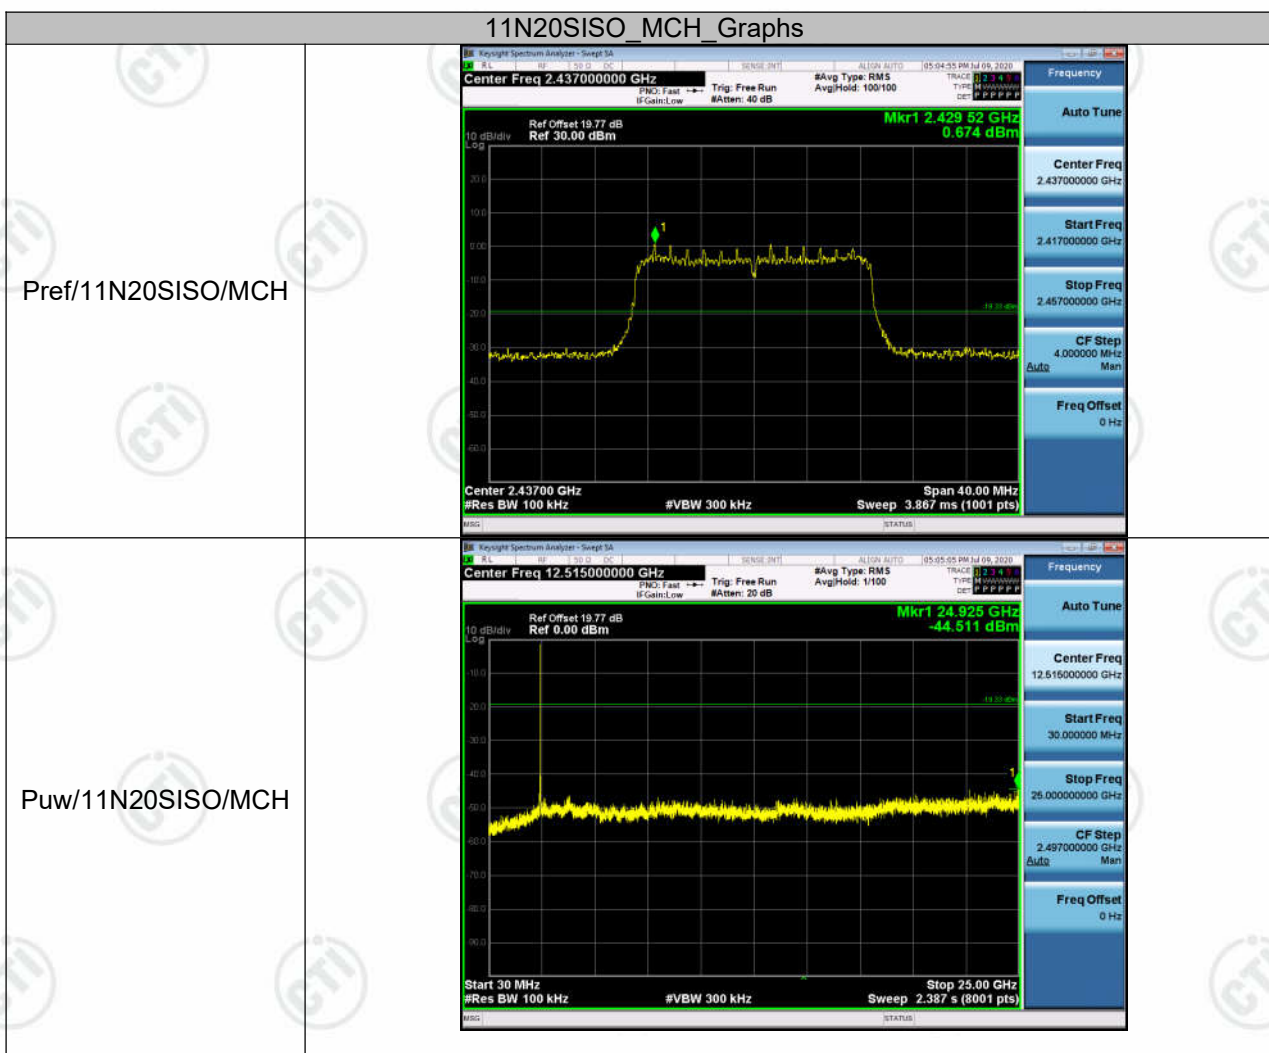

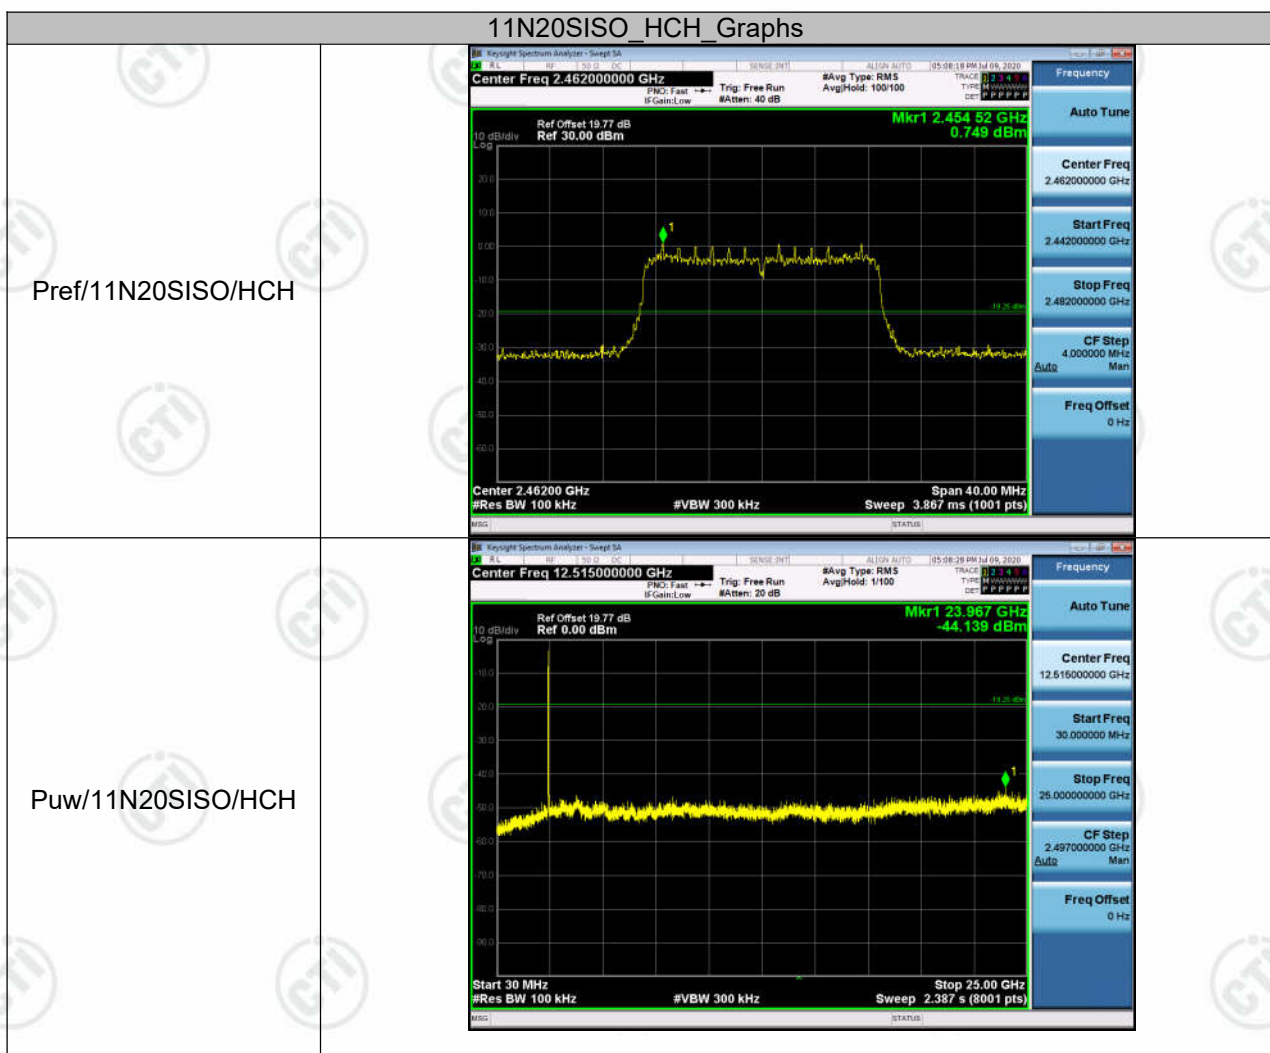

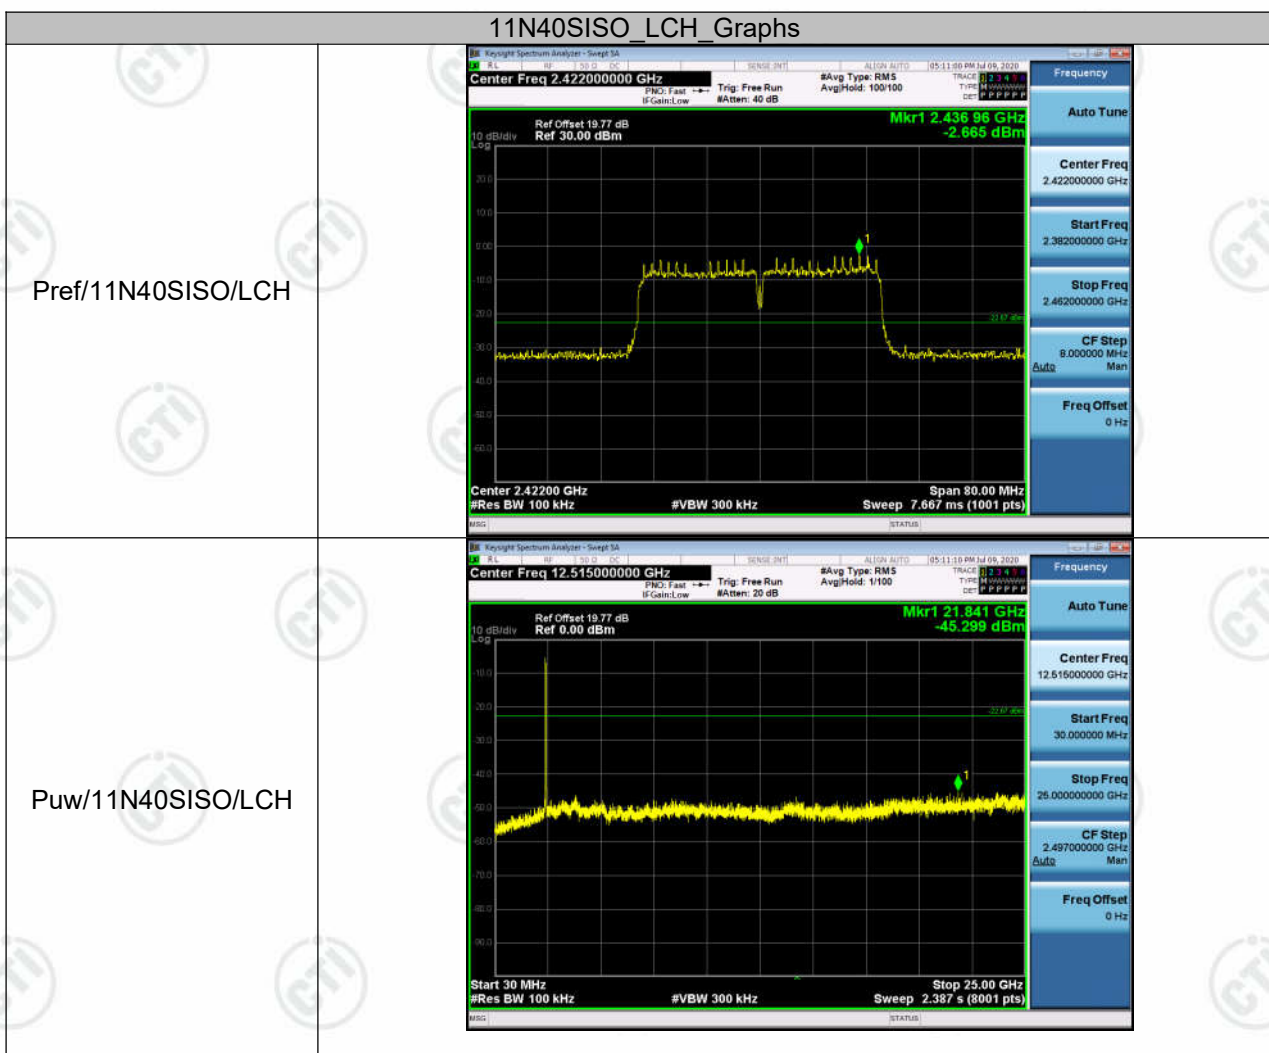

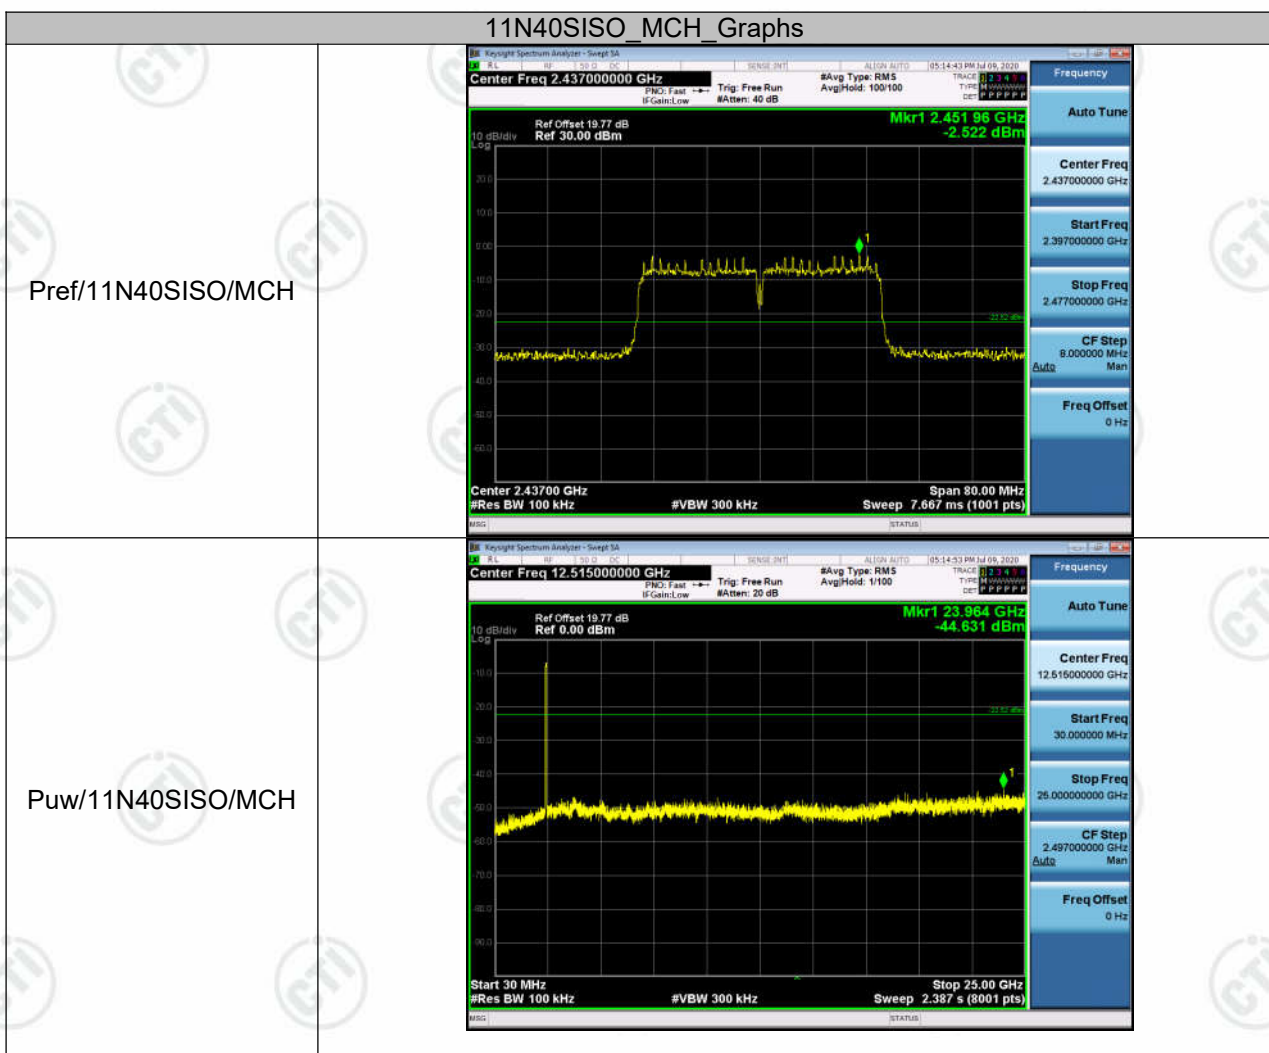

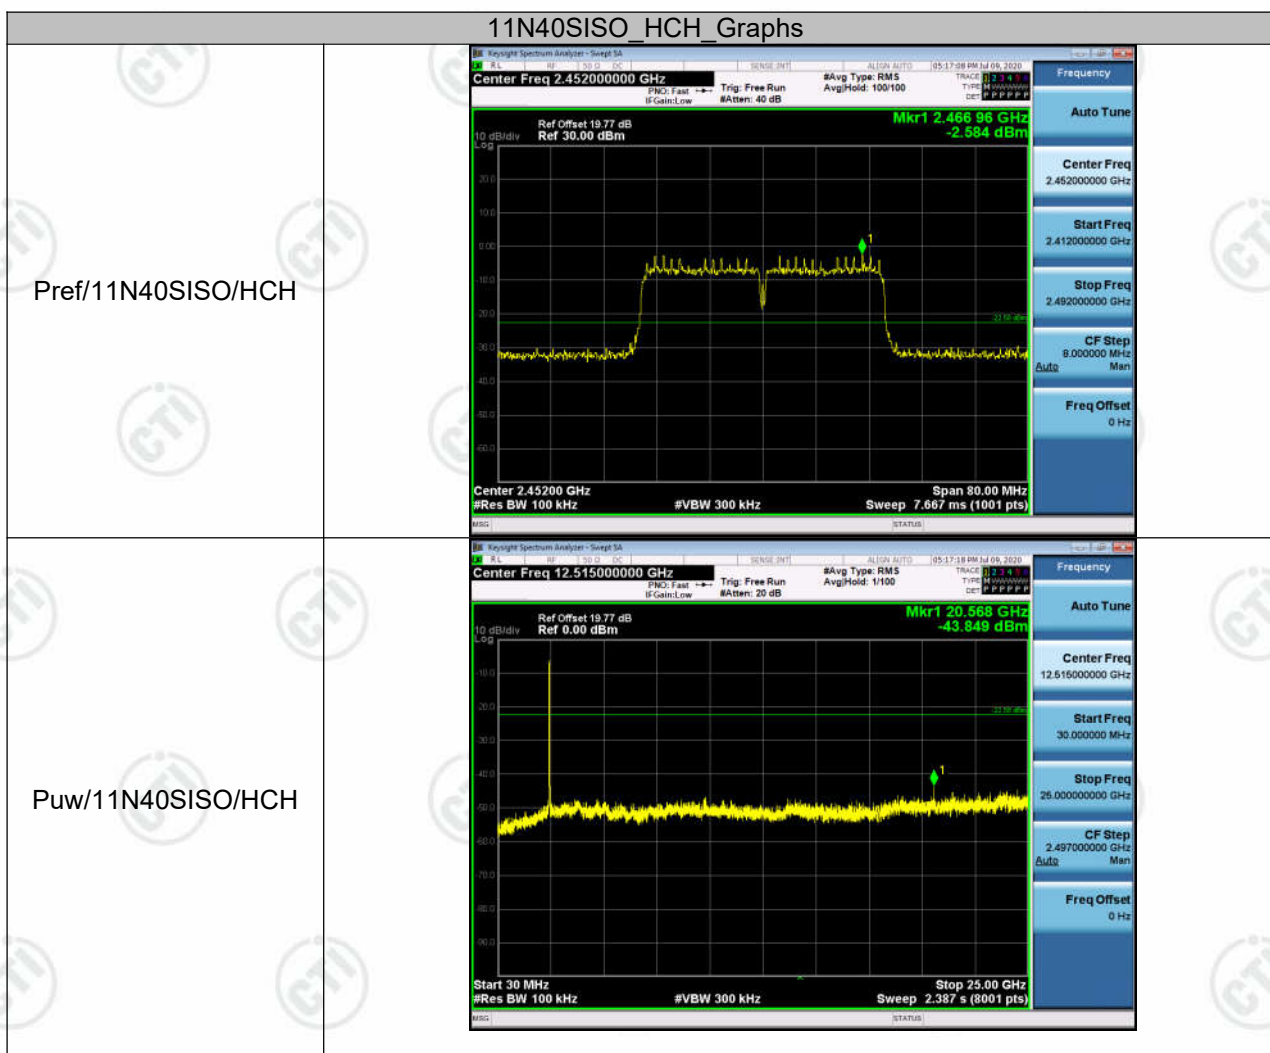

Appendix E): Power Spectral Density

Test Limit

According to §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Limit	☒ Antenna not exceed 6 dBi : 8dBm ☐ Antenna with DG greater than 6 dBi : [Limit = 8 – (DG – 6)] ☐ Point-to-point operation :
-------	---

Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 10kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss was compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.


Result Table




Mode	Channel	Power Spectral Density [dBm]	Verdict
11B	LCH	-10.277	PASS
11B	MCH	-10.985	PASS
11B	HCH	-10.950	PASS
11G	LCH	-15.424	PASS
11G	MCH	-15.130	PASS
11G	HCH	-15.097	PASS
11N20SISO	LCH	-15.762	PASS
11N20SISO	MCH	-14.645	PASS
11N20SISO	HCH	-14.447	PASS
11N40SISO	LCH	-15.626	PASS
11N40SISO	MCH	-15.224	PASS
11N40SISO	HCH	-15.022	PASS

Test Graph



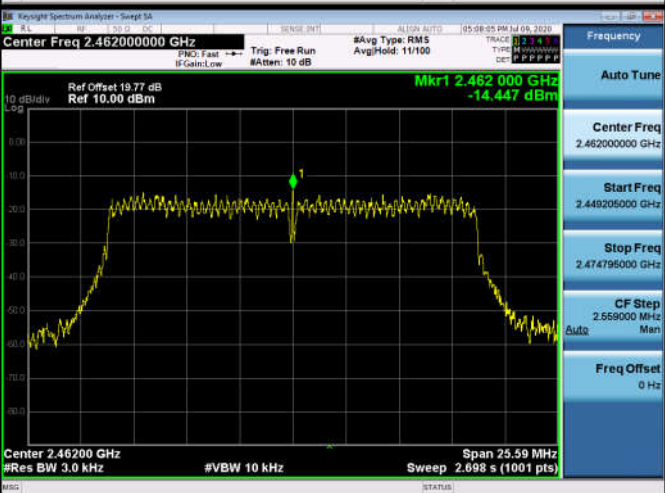

11N20SISO/LCH	
11N20SISO/MCH	
11N20SISO/HCH	

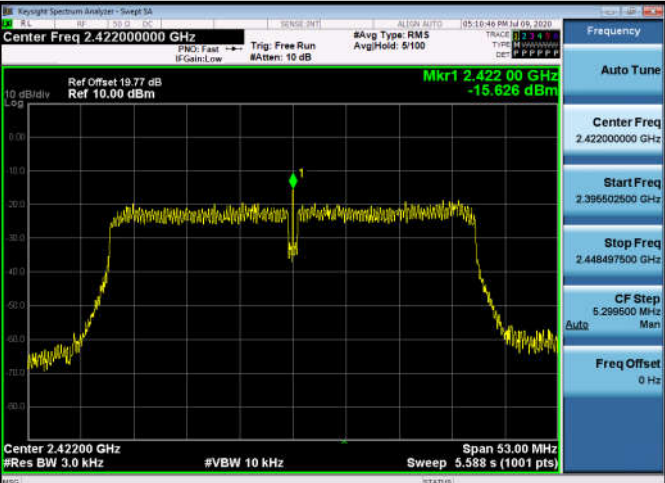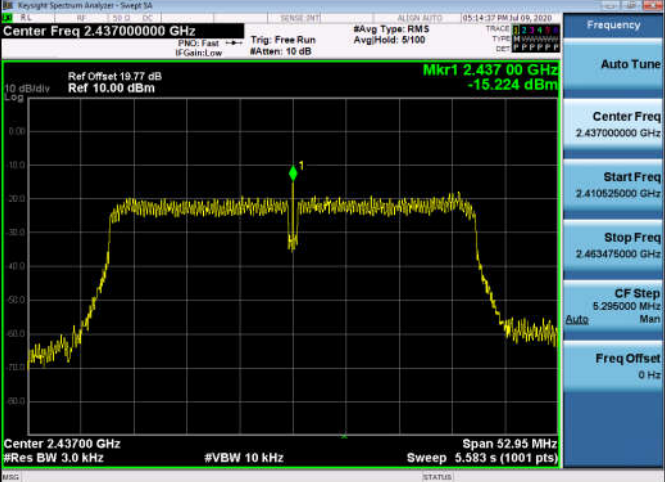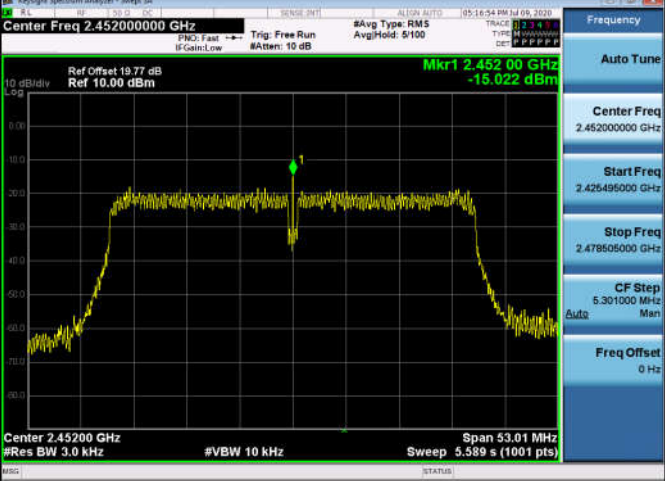11N40SISO/LCH	
11N40SISO/MCH	
11N40SISO/HCH	

Appendix F): Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:





The antenna type is Dipole antenna with reverse SMA connector. It is compliant with the requirement for 15.203. The best case gain of the antenna is 1.5 dBi.

Appendix G): AC Power Line Conducted Emission


Test Procedure:	Test frequency range :150KHz-30MHz 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.															
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency		Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)															
	Quasi-peak	Average														
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

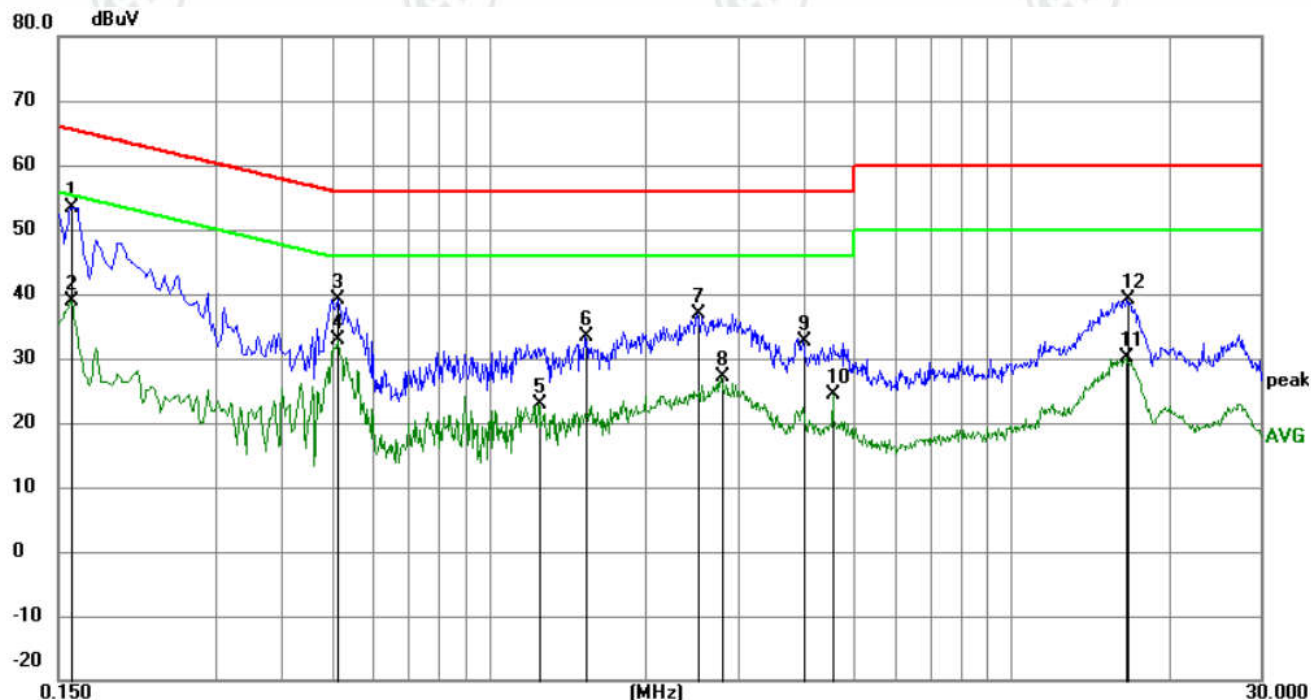

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1590	43.59	9.87	53.46	65.52	-12.06	QP	
2		0.1590	29.08	9.87	38.95	55.52	-16.57	AVG	
3		0.5144	29.21	9.97	39.18	56.00	-16.82	QP	
4		0.5144	22.92	9.97	32.89	46.00	-13.11	AVG	
5		1.2480	12.96	9.82	22.78	46.00	-23.22	AVG	
6		1.5315	23.55	9.81	33.36	56.00	-22.64	QP	
7		2.5080	27.13	9.79	36.92	56.00	-19.08	QP	
8		2.7825	17.38	9.79	27.17	46.00	-18.83	AVG	
9		3.9975	22.79	9.78	32.57	56.00	-23.43	QP	
10		4.5734	14.50	9.78	24.28	46.00	-21.72	AVG	
11		16.6064	20.22	9.94	30.16	50.00	-19.84	AVG	
12		16.7370	29.09	9.94	39.03	60.00	-20.97	QP	

Neutral line:

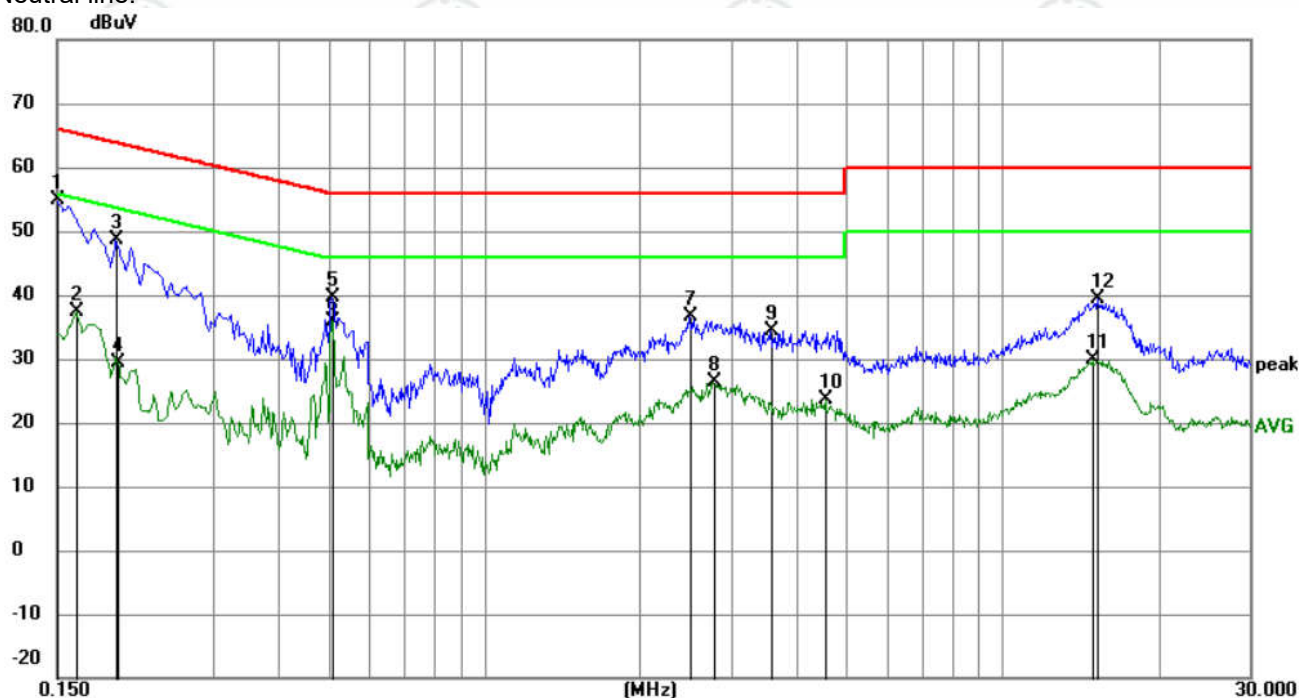

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	45.04	9.87	54.91	66.00	-11.09	QP	
2		0.1635	27.41	9.87	37.28	55.28	-18.00	AVG	
3		0.1949	38.82	9.87	48.69	63.83	-15.14	QP	
4		0.1965	19.39	9.87	29.26	53.76	-24.50	AVG	
5		0.5100	29.65	9.96	39.61	56.00	-16.39	QP	
6	*	0.5100	25.97	9.96	35.93	46.00	-10.07	AVG	
7		2.4990	26.92	9.79	36.71	56.00	-19.29	QP	
8		2.7690	16.49	9.79	26.28	46.00	-19.72	AVG	
9		3.5700	24.70	9.78	34.48	56.00	-21.52	QP	
10		4.5734	13.86	9.78	23.64	46.00	-22.36	AVG	
11		14.9190	19.86	9.93	29.79	50.00	-20.21	AVG	
12		15.3015	29.48	9.93	39.41	60.00	-20.59	QP	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: Test method Refer as KDB 558074 D01 - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		

Test plot as follows:

Mode:	802.11 b(1Mbps) Transmitting	Channel:	2412
Remark:	PK		

Test Graph

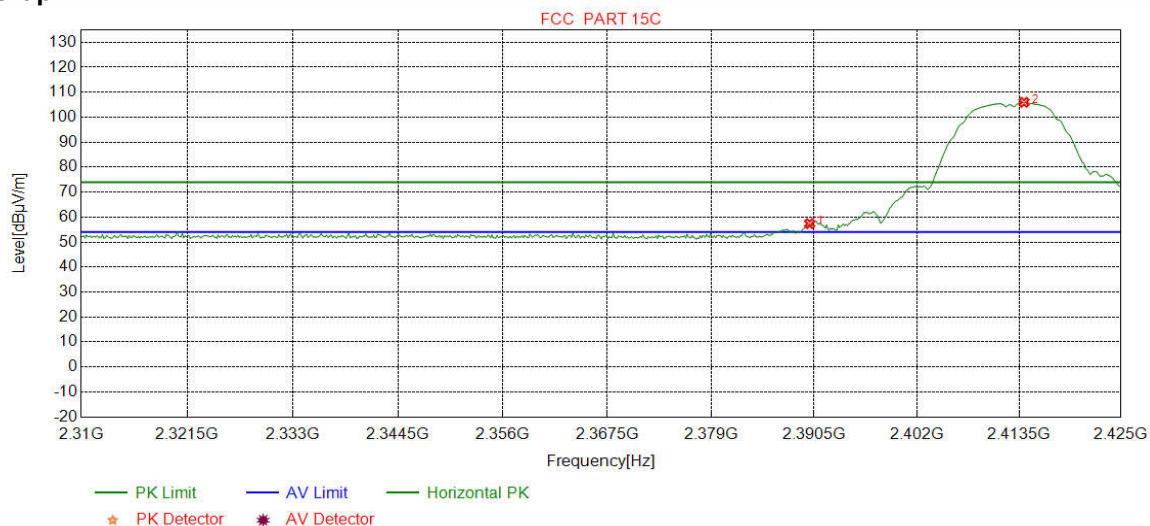

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	54.88	57.38	74.00	16.62	Pass	Horizontal
2	2414.0613	32.28	13.36	-43.11	103.42	105.95	74.00	-31.95	Pass	Horizontal