






N71(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

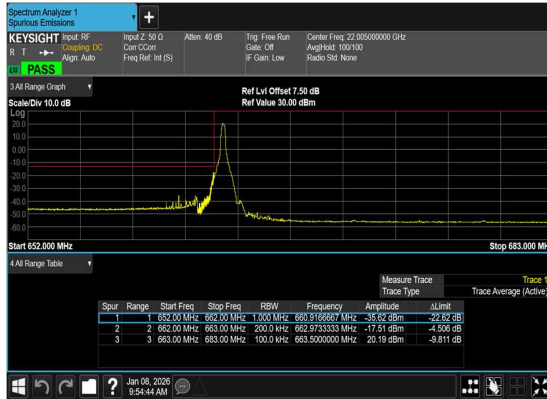


N71(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

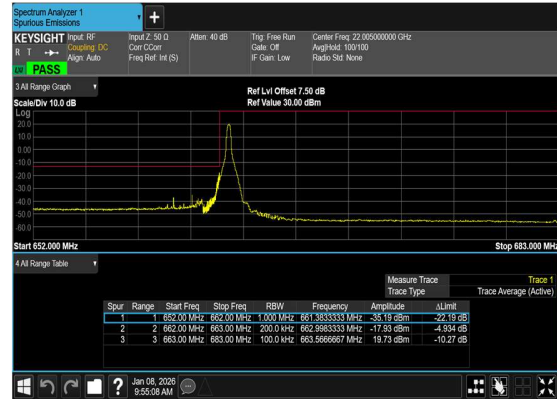

N71(20M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

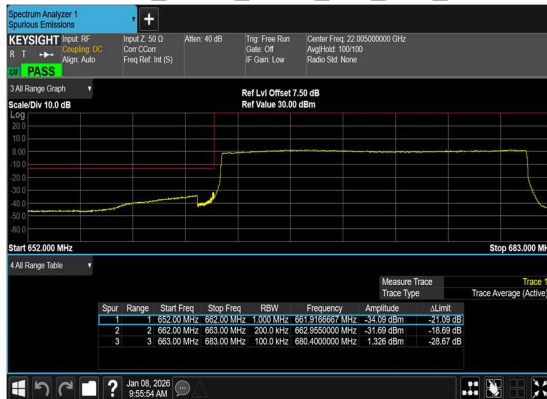

N71(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

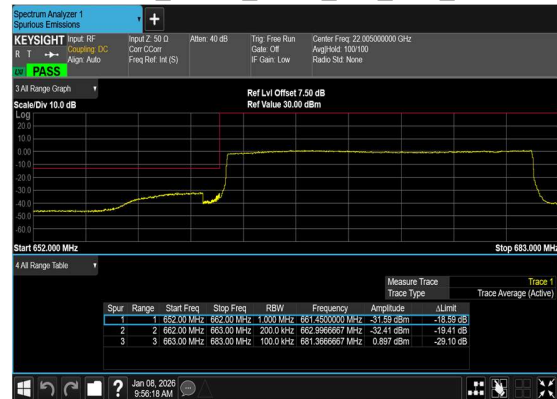




N71(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH




N71(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

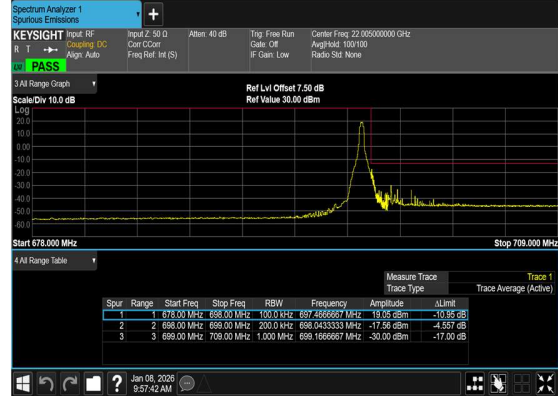

N71(20M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH



N71(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

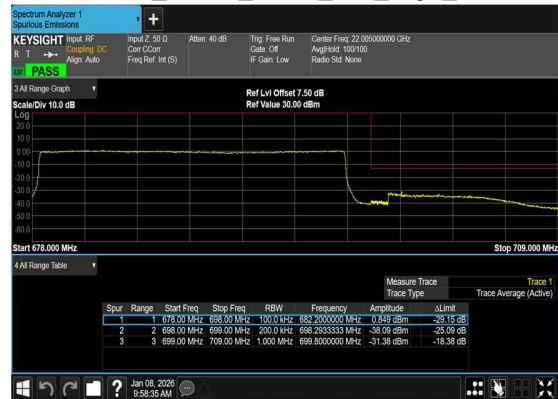



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Jia Kuang	Temperature :	22~25°C
		Relative Humidity :	48~52%

n25 SA / NR 40MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3701	-61.78	-13	-48.78	-79.80	-68.54	5.82	12.58	H
	5551.5	-59.72	-13	-46.72	-81.67	-65.44	7.28	13.00	H
	7402	-55.55	-13	-42.55	-81.69	-58.71	8.32	11.48	H
	3701	-61.79	-13	-48.79	-79.71	-68.55	5.82	12.58	V
	5551.5	-59.95	-13	-46.95	-82.08	-65.67	7.28	13.00	V
	7402	-55.47	-13	-42.47	-81.63	-58.63	8.32	11.48	V
Middle	3726	-61.45	-13	-48.45	-79.51	-68.20	5.85	12.60	H
	5589	-59.50	-13	-46.50	-81.49	-65.30	7.30	13.10	H
	7452	-55.63	-13	-42.63	-81.63	-58.78	8.35	11.50	H
	3726	-61.38	-13	-48.38	-79.35	-68.13	5.85	12.60	V
	5589	-59.41	-13	-46.41	-81.59	-65.21	7.30	13.10	V
	7452	-55.65	-13	-42.65	-81.65	-58.80	8.35	11.50	V
Highest	3751	-61.20	-13	-48.20	-79.32	-67.94	5.88	12.62	H
	5626.5	-59.13	-13	-46.13	-81.58	-64.94	7.32	13.13	H
	7502	-55.70	-13	-42.70	-81.60	-58.86	8.38	11.54	H
	3751	-61.29	-13	-48.29	-79.34	-68.03	5.88	12.62	V
	5626.5	-59.72	-13	-46.72	-81.89	-65.53	7.32	13.13	V
	7502	-56.02	-13	-43.02	-81.91	-59.18	8.38	11.54	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC 48A n25A / LTE 10MHz + NR 40MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n25 Lowest	3701	-55.49	-13	-42.49	-40.77	-62.25	5.82	12.58	H
	5551.5	-62.79	-13	-49.79	-50.48	-68.51	7.28	13.00	H
	7402	-60.51	-13	-47.51	-54.69	-63.67	8.32	11.48	H
	9252.5	-51.83	-13	-38.83	-50.98	-53.98	9.83	11.98	H
	3701	-54.72	-13	-41.72	-39.9	-61.48	5.82	12.58	V
	5551.5	-61.32	-13	-48.32	-49.19	-67.04	7.28	13.00	V
	7402	-59.83	-13	-46.83	-54.03	-62.99	8.32	11.48	V
	9252.5	-47.17	-13	-34.17	-45.48	-49.32	9.83	11.98	V
LTE Band48 Lowest	7241.00	-61.14	-40	-21.14	-54.82	-67.39	6.30	12.55	H
	10861.50	-53.25	-40	-13.25	-53.54	-56.65	8.25	11.65	H
	14482.00	-50.25	-40	-10.25	-56.61	-52.60	9.50	11.85	H
	7241.00	-59.03	-40	-19.03	-53.02	-65.28	6.30	12.55	V
	10861.50	-49.53	-40	-9.53	-49.46	-52.93	8.25	11.65	V
	14482.00	-49.01	-40	-9.01	-54.78	-51.36	9.50	11.85	V
NR n25 Middle	3726	-57.19	-13	-44.19	-42.42	-63.94	5.85	12.60	H
	5589	-64.51	-13	-51.51	-52.28	-70.31	7.30	13.10	H
	7452	-60.92	-13	-47.92	-55.09	-64.07	8.35	11.50	H
	9315	-54.92	-13	-41.92	-54.27	-57.07	9.85	12.00	H
	3726	-53.93	-13	-40.93	-39.07	-60.68	5.85	12.60	V
	5589	-63.56	-13	-50.56	-51.52	-69.36	7.30	13.10	V
	7452	-60.38	-13	-47.38	-54.55	-63.53	8.35	11.50	V
	9315	-52.39	-13	-39.39	-50.87	-54.54	9.85	12.00	V
LTE Band48 Middle	7241.00	-61.32	-40	-21.32	-55.00	-67.57	6.45	12.70	H
	10861.50	-51.62	-40	-11.62	-51.91	-55.02	8.40	11.80	H
	14482.00	-50.21	-40	-10.21	-56.57	-52.56	9.65	12.00	H
	7241.00	-58.22	-40	-18.22	-52.21	-64.47	6.45	12.70	V
	10861.50	-51.48	-40	-11.48	-51.41	-54.88	8.40	11.80	V
	14482.00	-48.60	-40	-8.60	-54.37	-50.95	9.65	12.00	V
NR n25 Highest	3751	-58.41	-13	-45.41	-43.63	-65.15	5.88	12.62	H
	5626.5	-63.14	-13	-50.14	-51.39	-68.95	7.32	13.13	H
	7502	-60.84	-13	-47.84	-55.04	-64.00	8.38	11.54	H
	3751	-54.16	-13	-41.16	-39.31	-60.90	5.88	12.62	V
	5626.5	-62.31	-13	-49.31	-50.28	-68.12	7.32	13.13	V
	7502	-60.76	-13	-47.76	-54.95	-63.92	8.38	11.54	V
LTE Band48 Highest	7241.00	-60.97	-40	-20.97	-54.65	-67.22	6.61	12.86	H
	10861.50	-52.41	-40	-12.41	-52.70	-55.79	8.56	11.94	H
	14482.00	-49.98	-40	-9.98	-56.34	-52.33	9.81	12.16	H
	7241.00	-58.21	-40	-18.21	-52.2	-64.46	6.61	12.86	V
	10861.50	-50.96	-40	-10.96	-50.89	-54.34	8.56	11.94	V
	14482.00	-50.57	-40	-10.57	-56.34	-52.92	9.81	12.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



n26 SA / NR 20MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1649	-66.70	-13	-53.70	-76.21	-69.93	3.98	9.36	H
	2473.5	-63.95	-13	-50.95	-77.85	-67.50	4.85	10.55	H
	3298	-62.60	-13	-49.60	-78.66	-67.53	5.50	12.58	H
	1649	-66.77	-13	-53.77	-76.02	-70.00	3.98	9.36	V
	2473.5	-64.08	-13	-51.08	-77.95	-67.63	4.85	10.55	V
	3298	-62.84	-13	-49.84	-78.71	-67.77	5.50	12.58	V
Middle	1645	-64.38	-13	-51.38	-73.89	-67.63	4.00	9.40	H
	2467.5	-63.43	-13	-50.43	-77.39	-67.00	4.88	10.60	H
	3290	-62.28	-13	-49.28	-78.34	-67.21	5.52	12.60	H
	1645	-62.27	-13	-49.27	-71.52	-65.52	4.00	9.40	V
	2467.5	-62.72	-13	-49.72	-76.65	-66.29	4.88	10.60	V
	3290	-62.53	-13	-49.53	-78.40	-67.46	5.52	12.60	V
Highest	1659	-62.51	-13	-49.51	-72.07	-65.68	4.10	9.42	H
	2488.5	-63.30	-13	-50.30	-77.14	-66.88	4.90	10.63	H
	3318	-63.10	-13	-50.10	-79.02	-68.02	5.55	12.62	H
	1659	-62.06	-13	-49.06	-71.22	-65.23	4.10	9.42	V
	2488.5	-62.73	-13	-49.73	-76.53	-66.31	4.90	10.63	V
	3318	-62.81	-13	-49.81	-78.51	-67.73	5.55	12.62	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_7A_n26A / LTE 10MHz + NR 20MHz/ QPSK									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n26 Lowest	1649	-65.72	-13	-52.72	-75.23	-68.95	3.98	9.36	H
	2473.5	-64.09	-13	-51.09	-77.99	-67.64	4.85	10.55	H
	3298	-66.23	-13	-53.23	-50.23	-71.16	5.50	12.58	H
	1649	-65.15	-13	-52.15	-74.40	-68.38	3.98	9.36	V
	2473.5	-63.83	-13	-50.83	-77.70	-67.38	4.85	10.55	V
	3298	-66.55	-13	-53.55	-50.36	-71.48	5.50	12.58	V
LTE Band7 Lowest	5061.00	-64.17	-25	-39.17	-51.90	-69.73	7.12	12.68	H
	7591.50	-60.00	-25	-35.00	-53.89	-63.33	8.26	11.59	H
	10122.00	-56.44	-25	-31.44	-55.67	-57.97	10.45	11.98	H
	5061.00	-64.40	-25	-39.40	-52.27	-69.96	7.12	12.68	V
	7591.50	-60.40	-25	-35.40	-54.24	-63.73	8.26	11.59	V
	10122.00	-57.79	-25	-32.79	-55.65	-59.32	10.45	11.98	V
NR n26 Middle	1654	-64.65	-13	-51.65	-74.20	-67.90	4.00	9.40	H
	2481	-63.69	-13	-50.69	-77.59	-67.26	4.88	10.60	H
	3298	-66.20	-13	-53.20	-50.20	-71.13	5.52	12.60	H
	1654	-64.91	-13	-51.91	-74.20	-68.16	4.00	9.40	V
	2481	-63.98	-13	-50.98	-77.85	-67.55	4.88	10.60	V
	3298	-66.42	-13	-53.42	-50.23	-71.35	5.52	12.60	V
LTE Band7 Middle	5061.00	-64.61	-25	-39.61	-52.34	-70.17	7.14	12.70	H
	7591.50	-60.32	-25	-35.32	-54.21	-63.62	8.30	11.60	H



	10122.00	-56.12	-25	-31.12	-55.35	-57.64	10.48	12.00	H
	5061.00	-64.40	-25	-39.40	-52.27	-69.96	7.14	12.70	V
	7591.50	-60.25	-25	-35.25	-54.09	-63.55	8.30	11.60	V
	10122.00	-57.57	-25	-32.57	-55.43	-59.09	10.48	12.00	V
NR n26 Highest	1659	-63.69	-13	-50.69	-73.25	-66.86	4.10	9.42	H
	2488.5	-63.52	-13	-50.52	-77.36	-67.10	4.90	10.63	H
	3318	-66.51	-13	-53.51	-50.36	-71.43	5.55	12.62	H
	1659	-64.28	-13	-51.28	-73.44	-67.45	4.10	9.42	V
	2488.5	-62.99	-13	-49.99	-76.79	-66.57	4.90	10.63	V
	3318	-66.92	-13	-53.92	-50.55	-71.84	5.55	12.62	V
LTE Band7 Highest	5061.00	-64.25	-25	-39.25	-51.98	-69.81	7.16	12.72	H
	7591.50	-60.17	-25	-35.17	-54.06	-63.47	8.33	11.63	H
	10122.00	-56.32	-25	-31.32	-55.55	-57.92	10.50	12.10	H
	5061.00	-64.47	-25	-39.47	-52.34	-70.03	7.16	12.72	V
	7591.50	-60.25	-25	-35.25	-54.09	-63.55	8.33	11.63	V
	10122.00	-57.64	-25	-32.64	-55.5	-59.24	10.50	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

n66 SA / NR 40MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3422	-62.68	-13	-49.68	-78.88	-69.56	5.60	12.48	H
	5133	-60.09	-13	-47.09	-81.74	-65.77	7.10	12.78	H
	6844	-57.25	-13	-44.25	-82.33	-60.64	8.38	11.77	H
	3422	-62.73	-13	-49.73	-79.02	-69.61	5.60	12.48	V
	5133	-59.41	-13	-46.41	-81.28	-65.09	7.10	12.78	V
	6844	-56.60	-13	-43.60	-82.18	-59.99	8.38	11.77	V
Middle	3452	-62.41	-13	-49.41	-78.92	-69.26	5.65	12.50	H
	5178	-60.36	-13	-47.36	-81.92	-66.03	7.13	12.80	H
	6904	-56.53	-13	-43.53	-81.71	-59.93	8.40	11.80	H
	3452	-62.41	-13	-49.41	-78.96	-69.26	5.65	12.50	V
	5178	-59.37	-13	-46.37	-81.22	-65.04	7.13	12.80	V
	6904	-56.03	-13	-43.03	-81.69	-59.43	8.40	11.80	V
Highest	3483.2	-62.55	-13	-49.55	-79.36	-69.39	5.68	12.52	H
	5224.8	-60.70	-13	-47.70	-82.16	-66.37	7.15	12.82	H
	6966.4	-56.56	-13	-43.56	-82.07	-59.99	8.42	11.85	H
	3483.2	-62.36	-13	-49.36	-79.16	-69.20	5.68	12.52	V
	5224.8	-60.14	-13	-47.14	-81.77	-65.81	7.15	12.82	V
	6966.4	-55.91	-13	-42.91	-81.88	-59.34	8.42	11.85	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC 48A n66A / LTE 10MHz + NR 40MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n66 Lowest	3422	-62.06	-13	-49.06	-78.26	-68.94	5.60	12.48	H
	5133	-60.08	-13	-47.08	-81.73	-65.76	7.10	12.78	H
	6844	-61.64	-13	-48.64	-53.31	-65.03	8.38	11.77	H
	3422	-62.44	-13	-49.44	-78.73	-69.32	5.60	12.48	V
	5133	-58.59	-13	-45.59	-80.46	-64.27	7.10	12.78	V
	6844	-60.92	-13	-47.92	-53.09	-64.31	8.38	11.77	V
LTE Band48 Lowest	7241.00	-60.04	-40	-20.04	-53.72	-66.29	6.30	12.55	H
	10861.50	-55.40	-40	-15.40	-55.69	-58.80	8.25	11.65	H
	14482.00	-49.27	-40	-9.27	-55.63	-51.62	9.50	11.85	H
	7241.00	-59.40	-40	-19.40	-53.39	-65.65	6.30	12.55	V
	10861.50	-55.54	-40	-15.54	-55.47	-58.94	8.25	11.65	V
	14482.00	-49.68	-40	-9.68	-55.45	-52.03	9.50	11.85	V
NR n66 Middle	3452	-62.62	-13	-49.62	-79.13	-69.47	5.65	12.50	H
	5178	-60.50	-13	-47.50	-82.06	-66.17	7.13	12.80	H
	6904	-61.09	-13	-48.09	-53.08	-64.49	8.40	11.80	H
	3452	-62.31	-13	-49.31	-78.86	-69.16	5.65	12.50	V
	5178	-58.63	-13	-45.63	-80.48	-64.30	7.13	12.80	V
	6904	-60.76	-13	-47.76	-53.23	-64.16	8.40	11.80	V
LTE Band48 Middle	7241.00	-60.29	-40	-20.29	-53.97	-66.54	6.45	12.70	H
	10861.50	-54.97	-40	-14.97	-55.26	-58.37	8.40	11.80	H
	14482.00	-49.20	-40	-9.20	-55.56	-51.55	9.65	12.00	H
	7241.00	-57.81	-40	-17.81	-51.8	-64.06	6.45	12.70	V
	10861.50	-55.47	-40	-15.47	-55.4	-58.87	8.40	11.80	V
	14482.00	-49.87	-40	-9.87	-55.64	-52.22	9.65	12.00	V
NR n66 Highest	3483.2	-62.34	-13	-49.34	-79.15	-69.18	5.68	12.52	H
	5224.8	-58.90	-13	-45.90	-80.36	-64.57	7.15	12.82	H
	6966.4	-60.86	-13	-47.86	-53.31	-64.29	8.42	11.85	H
	3483.2	-61.64	-13	-48.64	-78.44	-68.48	5.68	12.52	V
	5224.8	-58.19	-13	-45.19	-79.82	-63.86	7.15	12.82	V
	6966.4	-60.25	-13	-47.25	-53.16	-63.68	8.42	11.85	V
LTE Band48 Highest	7241.00	-60.26	-40	-20.26	-53.94	-66.51	6.61	12.86	H
	10861.50	-54.74	-40	-14.74	-55.03	-58.12	8.56	11.94	H
	14482.00	-49.07	-40	-9.07	-55.43	-51.42	9.81	12.16	H
	7241.00	-59.57	-40	-19.57	-53.56	-65.82	6.61	12.86	V
	10861.50	-55.47	-40	-15.47	-55.4	-58.85	8.56	11.94	V
	14482.00	-50.02	-40	-10.02	-55.79	-52.37	9.81	12.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



n71 SA / NR 20MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1328	-65.40	-13	-52.40	-74.55	-68.63	3.98	9.36	H
	1992	-65.46	-13	-52.46	-76.35	-69.01	4.85	10.55	H
	2656	-63.08	-13	-50.08	-77.46	-68.01	5.50	12.58	H
	1328	-65.87	-13	-52.87	-74.66	-69.10	3.98	9.36	V
	1992	-63.29	-13	-50.29	-74.03	-66.84	4.85	10.55	V
	2656	-63.30	-13	-50.30	-77.65	-68.23	5.50	12.58	V
Middle	1343	-66.36	-13	-53.36	-75.64	-69.61	4.00	9.40	H
	2014.5	-65.37	-13	-52.37	-76.62	-68.94	4.88	10.60	H
	2686	-63.29	-13	-50.29	-77.86	-68.22	5.52	12.60	H
	1343	-66.46	-13	-53.46	-75.37	-69.71	4.00	9.40	V
	2014.5	-65.36	-13	-52.36	-76.50	-68.93	4.88	10.60	V
	2686	-63.24	-13	-50.24	-77.83	-68.17	5.52	12.60	V
Highest	1358	-65.83	-13	-52.83	-75.33	-69.00	4.10	9.42	H
	2037	-64.47	-13	-51.47	-76.04	-68.05	4.90	10.63	H
	2716	-62.90	-13	-49.90	-77.67	-67.82	5.55	12.62	H
	1358	-65.68	-13	-52.68	-74.79	-68.85	4.10	9.42	V
	2037	-63.88	-13	-50.88	-75.35	-67.46	4.90	10.63	V
	2716	-63.39	-13	-50.39	-78.22	-68.31	5.55	12.62	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_48A_n71A / LTE 10MHz + NR 20MHz / QPSK									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n71 Lowest	1328	-65.03	-13	-52.03	-74.18	-68.26	3.98	9.36	H
	1992	-65.87	-13	-52.87	-76.76	-69.42	4.85	10.55	H
	2656	-63.27	-13	-50.27	-77.65	-68.20	5.50	12.58	H
	3320	-50.24	-13	-37.24	-66.16	-54.71	5.98	12.60	H
	3984	-59.82	-13	-46.82	-78.67	-63.25	7.10	12.68	H
	1328	-65.99	-13	-52.99	-74.78	-69.22	3.98	9.36	V
	1992	-65.84	-13	-52.84	-76.58	-69.39	4.85	10.55	V
	2656	-63.20	-13	-50.20	-77.55	-68.13	5.50	12.58	V
	3320	-49.00	-13	-36.00	-64.70	-53.47	5.98	12.60	V
	3984	-50.09	-13	-37.09	-68.96	-53.52	7.10	12.68	V
LTE Band48 Lowest	7241.00	-59.98	-40	-19.98	-53.66	-63.31	8.25	11.58	H
	10861.50	-55.24	-40	-15.24	-55.53	-56.79	10.45	12.00	H
	14482.00	-49.33	-40	-9.33	-55.69	-51.04	11.74	13.45	H
	7241.00	-58.04	-40	-18.04	-52.03	-61.37	8.25	11.58	V
	10861.50	-55.43	-40	-15.43	-55.36	-56.98	10.45	12.00	V
	14482.00	-49.83	-40	-9.83	-55.60	-51.54	11.74	13.45	V
NR n71 Middle	1343	-65.43	-13	-52.43	-74.71	-68.68	4.00	9.40	H
	2014.5	-64.34	-13	-51.34	-75.59	-67.91	4.88	10.60	H
	2686	-62.58	-13	-49.58	-77.15	-67.51	5.52	12.60	H
	3357	-47.36	-13	-34.36	-63.09	-51.83	6.00	12.62	H



	4029	-61.43	-13	-48.43	-80.35	-64.84	7.14	12.70	H
	1343	-65.96	-13	-52.96	-74.87	-69.21	4.00	9.40	V
	2014.5	-65.15	-13	-52.15	-76.29	-68.72	4.88	10.60	V
	2686	-62.73	-13	-49.73	-77.32	-67.66	5.52	12.60	V
	3357	-46.58	-13	-33.58	-62.17	-51.05	6.00	12.62	V
	4029	-49.41	-13	-36.41	-68.35	-52.82	7.14	12.70	V
LTE Band48 Middle	7241.00	-59.91	-40	-19.91	-53.59	-63.21	8.30	11.60	H
	10861.50	-55.07	-40	-15.07	-55.36	-56.59	10.48	12.00	H
	14482.00	-49.39	-40	-9.39	-55.75	-51.09	11.80	13.50	H
	7241.00	-59.20	-40	-19.20	-53.19	-62.50	8.30	11.60	V
	10861.50	-55.48	-40	-15.48	-55.41	-57.00	10.48	12.00	V
	14482.00	-49.84	-40	-9.84	-55.61	-51.54	11.80	13.50	V
NR n71 Highest	1358	-65.61	-13	-52.61	-75.11	-68.78	4.10	9.42	H
	2037	-64.39	-13	-51.39	-75.96	-67.97	4.90	10.63	H
	2716	-62.98	-13	-49.98	-77.75	-67.90	5.55	12.62	H
	3395	-49.00	-13	-36.00	-65.03	-53.48	6.02	12.65	H
	4074	-61.82	-13	-48.82	-80.87	-65.24	7.15	12.72	H
	1358	-66.16	-13	-53.16	-75.27	-69.33	4.10	9.42	V
	2037	-63.97	-13	-50.97	-75.44	-67.55	4.90	10.63	V
	2716	-62.86	-13	-49.86	-77.69	-67.78	5.55	12.62	V
	3395	-44.22	-13	-31.22	-60.37	-48.70	6.02	12.65	V
	4074	-49.81	-13	-36.81	-68.87	-53.23	7.15	12.72	V
LTE Band48 Highest	7241.00	-60.15	-40	-20.15	-53.83	-63.45	8.32	11.62	H
	10861.50	-54.93	-40	-14.93	-55.22	-56.61	10.52	12.20	H
	14482.00	-49.37	-40	-9.37	-55.73	-51.07	11.85	13.55	H
	7241.00	-60.03	-40	-20.03	-54.02	-63.33	8.32	11.62	V
	10861.50	-55.44	-40	-15.44	-55.37	-57.12	10.52	12.20	V
	14482.00	-50.02	-40	-10.02	-55.79	-51.72	11.85	13.55	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.