

Date: 2025-08-15

#01_WCDMA II_RMC 12.2Kbps_Top_0mm_Ch9400

Communication System: UMTS-FDD ; Frequency: 1880.000 MHz

Medium: HSL_1900_250815 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.67, 7.38, 7.28); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.821 W/kg; SAR (10g) = 0.397 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.859 W/kg; SAR (8g) = 0.484 W/kg; SAR (10g) = 0.444 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.1 %

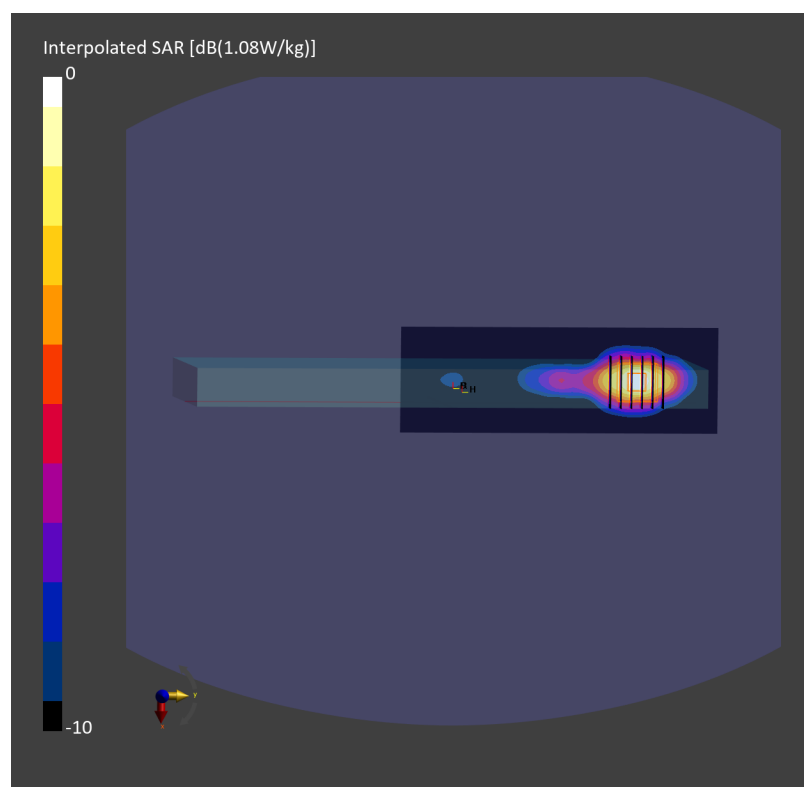

Date: 2025-08-15

#02_WCDMA IV_RMC 12.2Kbps_Top_0mm_Ch1413

Communication System: UMTS-FDD ; Frequency: 1732.600 MHz

Medium: HSL_1750_250815 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.9, 7.61, 7.5); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.343 W/kg; SAR (10g) = 0.177 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.352 W/kg; SAR (8g) = 0.208 W/kg; SAR (10g) = 0.192 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.7 %

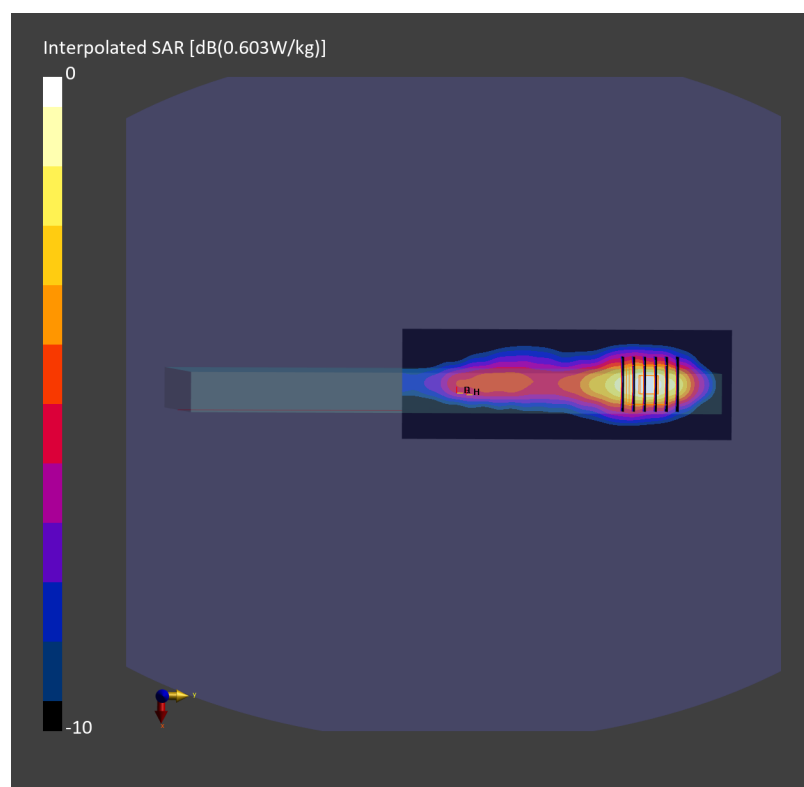

Date: 2025-08-14

#03_WCDMA V_RMC 12.2Kbps_Top_0mm_Ch4132

Communication System: UMTS-FDD ; Frequency: 826.400 MHz

Medium: HSL_835_250814 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.11, 8.77, 8.65); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.631 W/kg;


Zoom Scan (30.0 mm x 36.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 1.14 W/kg; SAR (8g) = 0.716 W/kg; SAR (10g) = 0.670 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 84.2 %

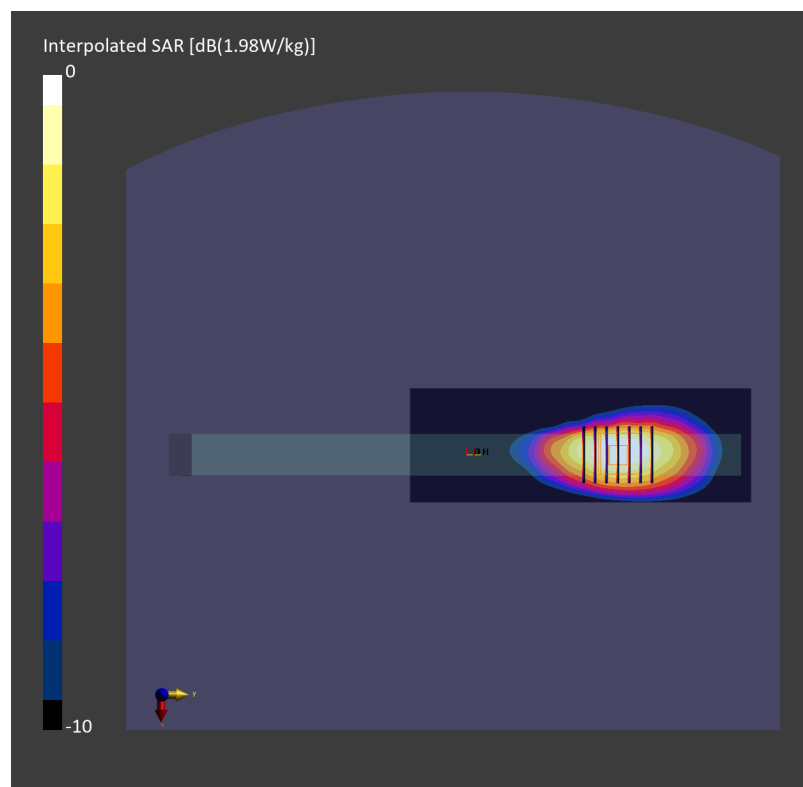

Date: 2025-08-16

#04_LTE Band 7_20M_QPSK_1_49_Top_0mm_Ch21100

Communication System: LTE-FDD ; Frequency: 2535.000 MHz

Medium: HSL_2600_250816 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.01, 6.75, 6.65); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.451 W/kg; SAR (10g) = 0.211 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.469 W/kg; SAR (8g) = 0.255 W/kg; SAR (10g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

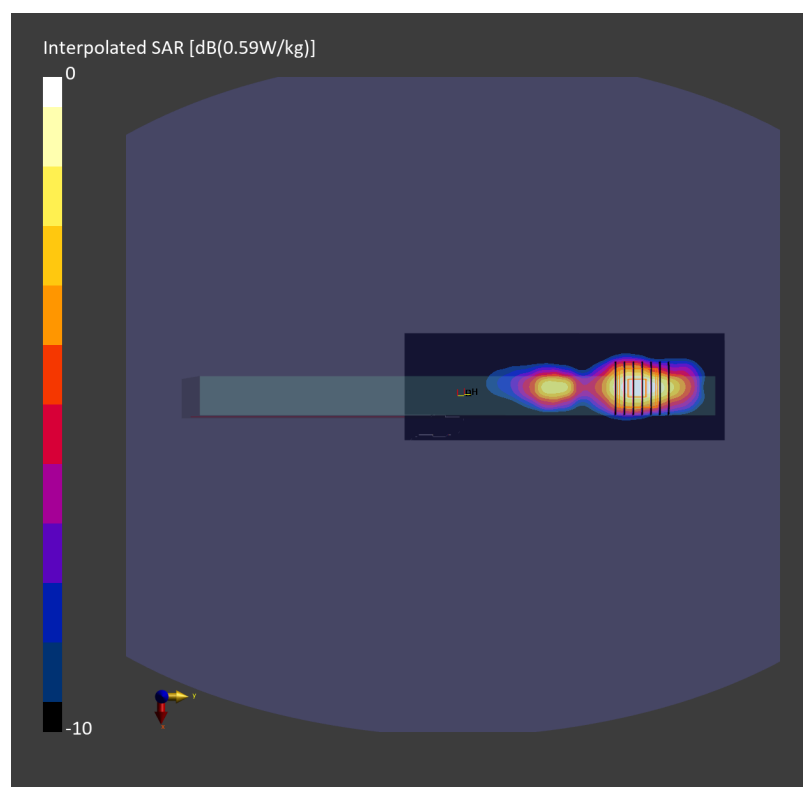

Date: 2025-08-14

#05_LTE Band 12_10M_QPSK_1_25_Top_0mm_Ch23095

Communication System: LTE-FDD ; Frequency: 707.500 MHz

Medium: HSL_750_250814 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.46, 9.11, 8.98); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.966 W/kg; SAR (10g) = 0.569 W/kg;


Zoom Scan (30.0 mm x 36.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.935 W/kg; SAR (8g) = 0.578 W/kg; SAR (10g) = 0.541 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 66.0 %

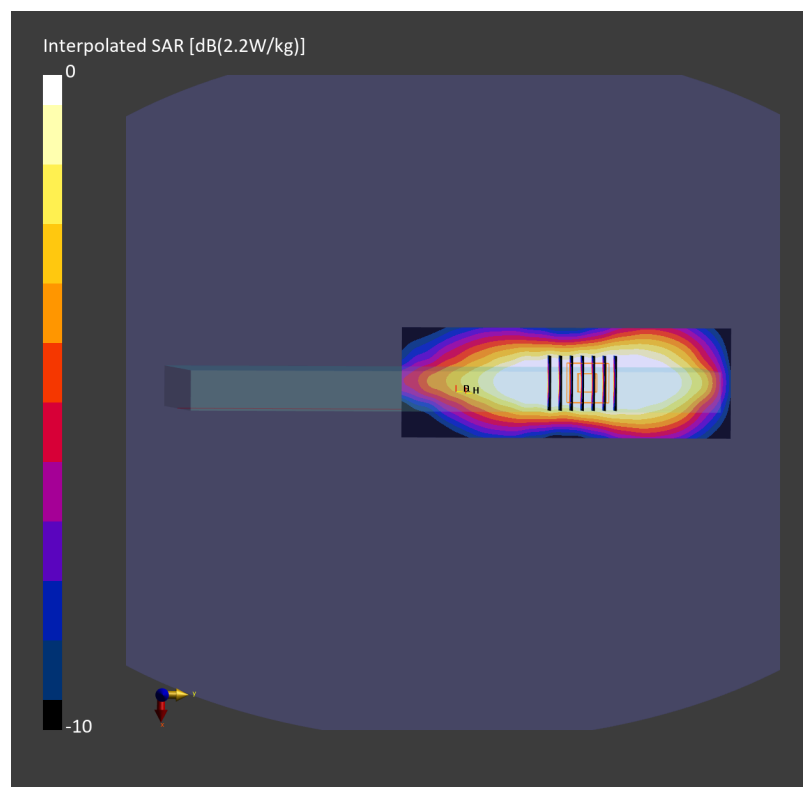

Date: 2025-08-14

#06_LTE Band 13_10M_QPSK_1_25_Top_0mm_Ch23230

Communication System: LTE-FDD ; Frequency: 782.000 MHz

Medium: HSL_750_250814 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.46, 9.11, 8.98); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.897 W/kg; SAR (10g) = 0.525 W/kg;


Zoom Scan (30.0 mm x 36.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.870 W/kg; SAR (8g) = 0.546 W/kg; SAR (10g) = 0.511 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

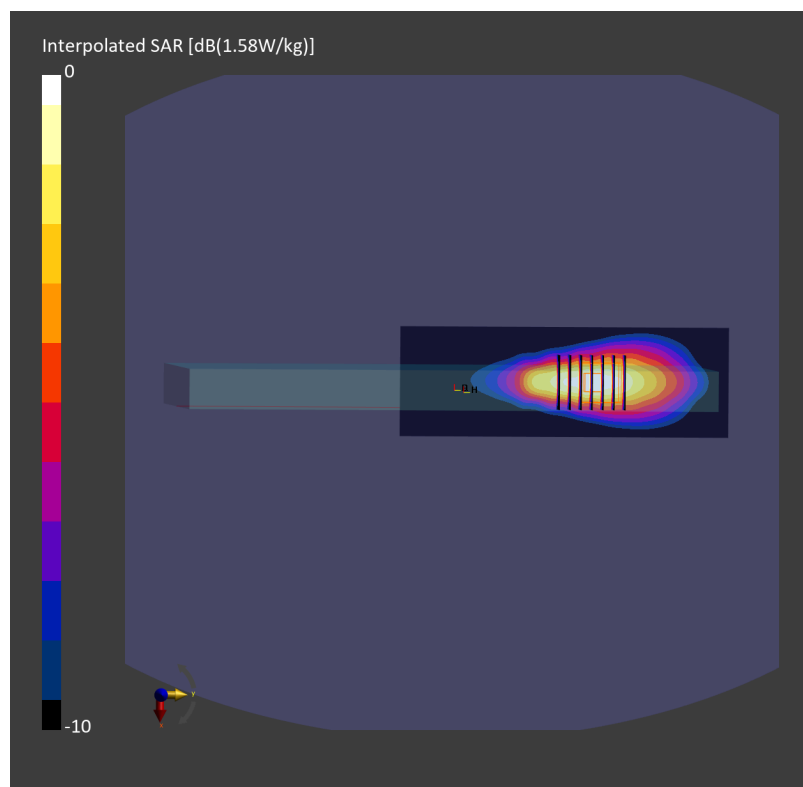

Date: 2025-08-14

#07_LTE Band 14_10M_QPSK_25_12_Top_0mm_Ch23330

Communication System: LTE-FDD ; Frequency: 793.000 MHz

Medium: HSL_750_250814 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.46, 9.11, 8.98); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.783 W/kg; SAR (10g) = 0.487 W/kg;


Zoom Scan (30.0 mm x 36.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.870 W/kg; SAR (8g) = 0.548 W/kg; SAR (10g) = 0.514 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

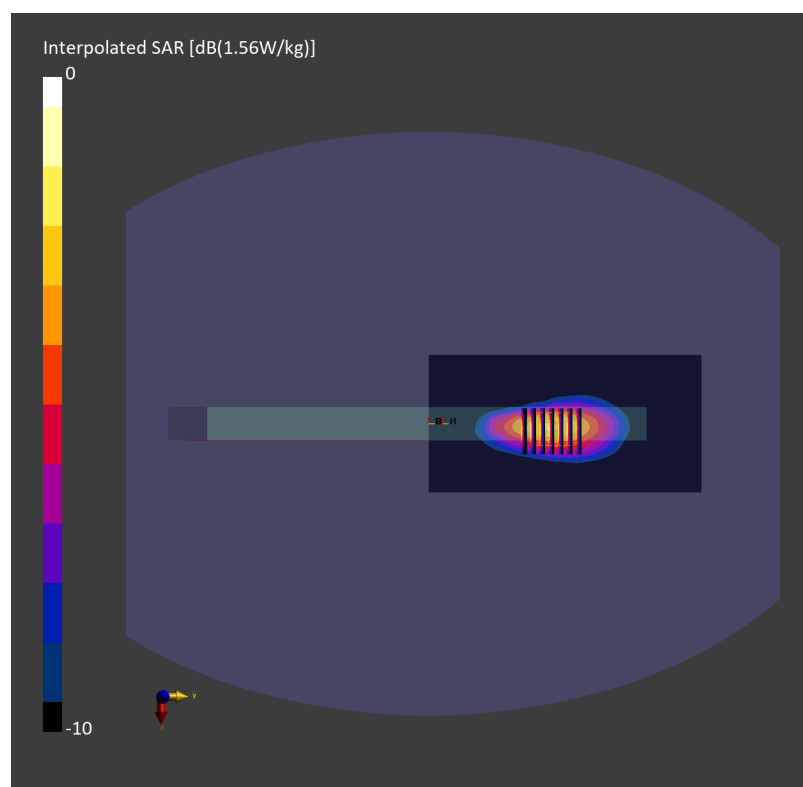

Date: 2025-08-15

#08_LTE Band 25_20M_QPSK_50_24_Top_0mm_Ch26140

Communication System: LTE-FDD ; Frequency: 1860.000 MHz

Medium: HSL_1900_250815 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.67, 7.38, 7.28); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.434 W/kg; SAR (10g) = 0.211 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.449 W/kg; SAR (8g) = 0.254 W/kg; SAR (10g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 86.6 %

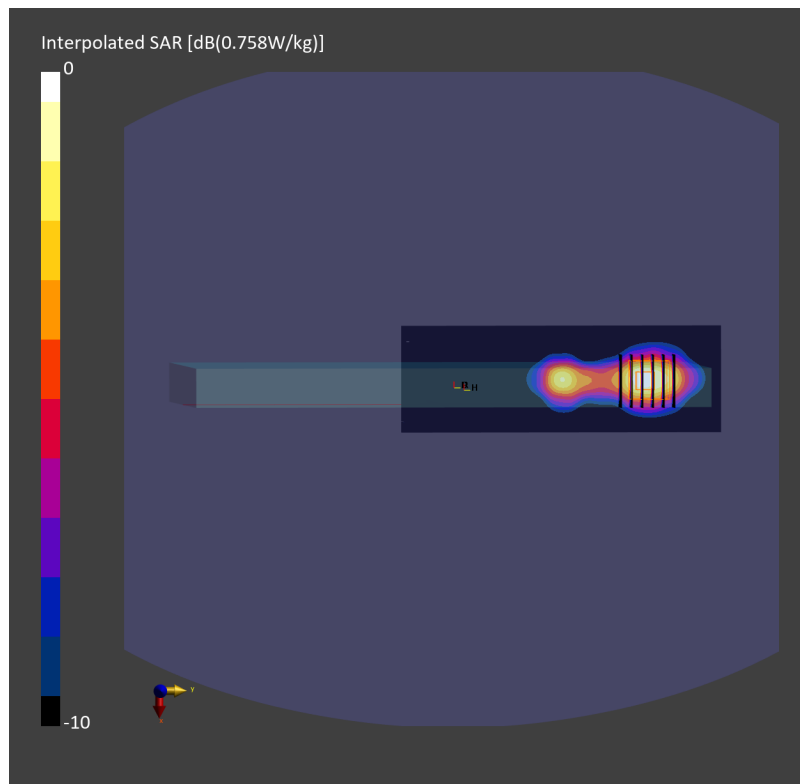

Date: 2025-08-14

#09_LTE Band 26_15M_QPSK_36_20_Top_0mm_Ch26865

Communication System: LTE-FDD ; Frequency: 831.500 MHz

Medium: HSL_835_250814 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.11, 8.77, 8.65); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10160-CAF

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.947 W/kg; SAR (10g) = 0.560 W/kg;


Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.917 W/kg; SAR (8g) = 0.578 W/kg; SAR (10g) = 0.542 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.8 %

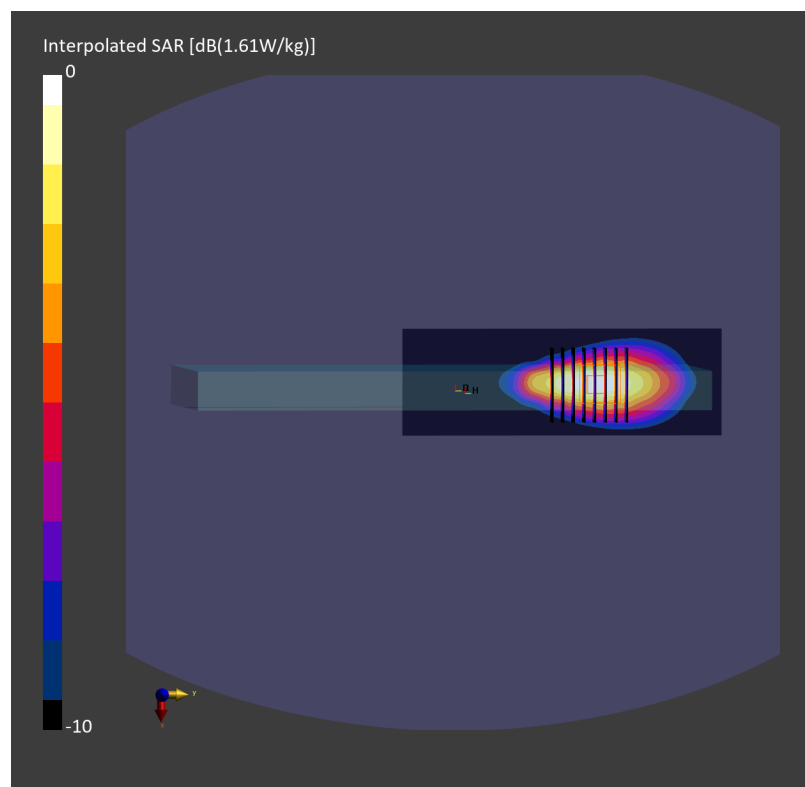

Date: 2025-08-16

#10_LTE Band 30_10M_QPSK_1_25_Top_0mm_Ch27710

Communication System: LTE-FDD ; Frequency: 2310.000 MHz

Medium: HSL_2300_250816 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.68$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.37, 7.09, 6.99); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.426 W/kg; SAR (10g) = 0.205 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.448 W/kg; SAR (8g) = 0.242 W/kg; SAR (10g) = 0.222 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.3 %

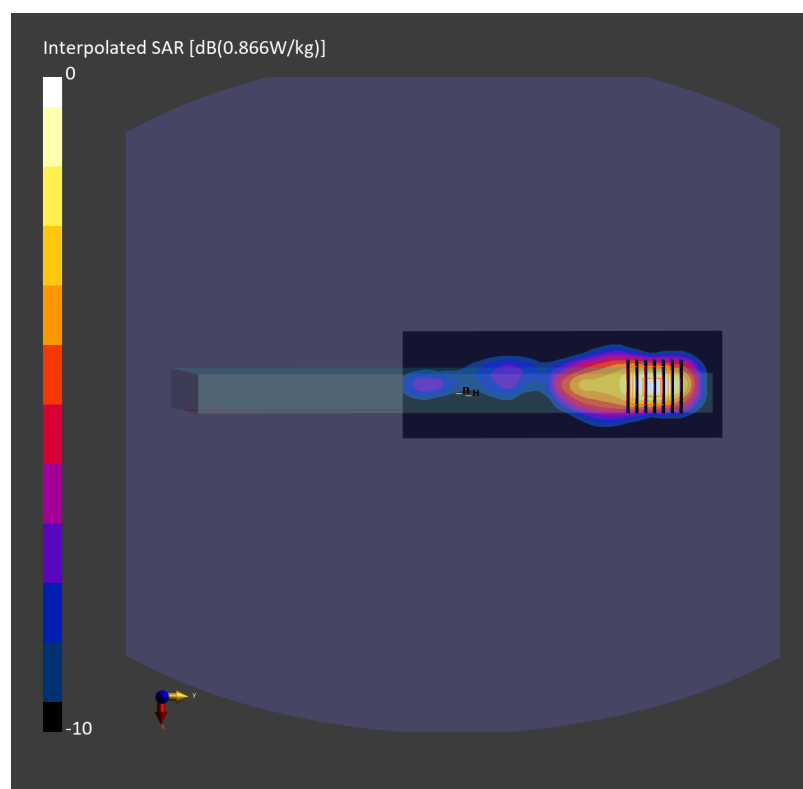

Date: 2025-08-15

#11_LTE Band 66_20M_QPSK_1_49_Top_0mm_Ch132572

Communication System: LTE-FDD ; Frequency: 1770.000 MHz

Medium: HSL_1750_250815 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.9, 7.61, 7.5); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.294 W/kg; SAR (10g) = 0.152 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.302 W/kg; SAR (8g) = 0.180 W/kg; SAR (10g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 85.7 %

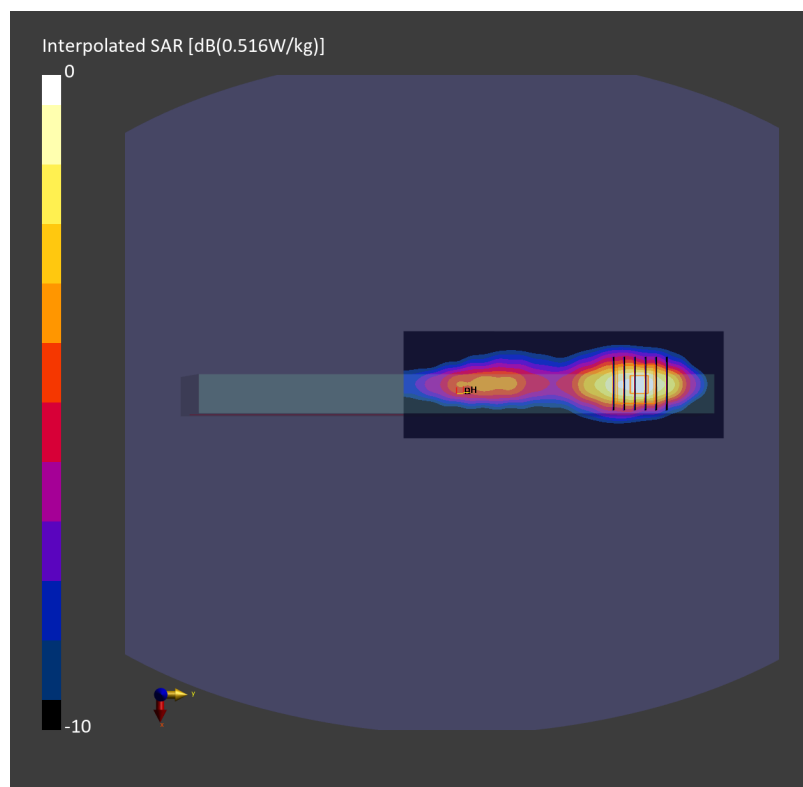

#12 LTE Band 71 20M QPSK 1 0 Top 0mm Ch133297

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

- UID: LTE-FDD, 10169-CAF

SAR (1g) = 0.620 W/kg; SAR (10g) = 0.361 W/kg;

Ratio of SAR at M2 to SAR at M1 = 68.0 %



Date: 2025-08-16

#13_LTE Band 41_20M_QPSK_1_99_Top_0mm_Ch41490

Communication System: LTE-TDD; Frequency: 2680.000 MHz

Medium: HSL_2600_250816 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.08$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.11, 6.99, 7.04); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.209 W/kg; SAR (10g) = 0.094 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.230 W/kg; SAR (8g) = 0.119 W/kg; SAR (10g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.1 %

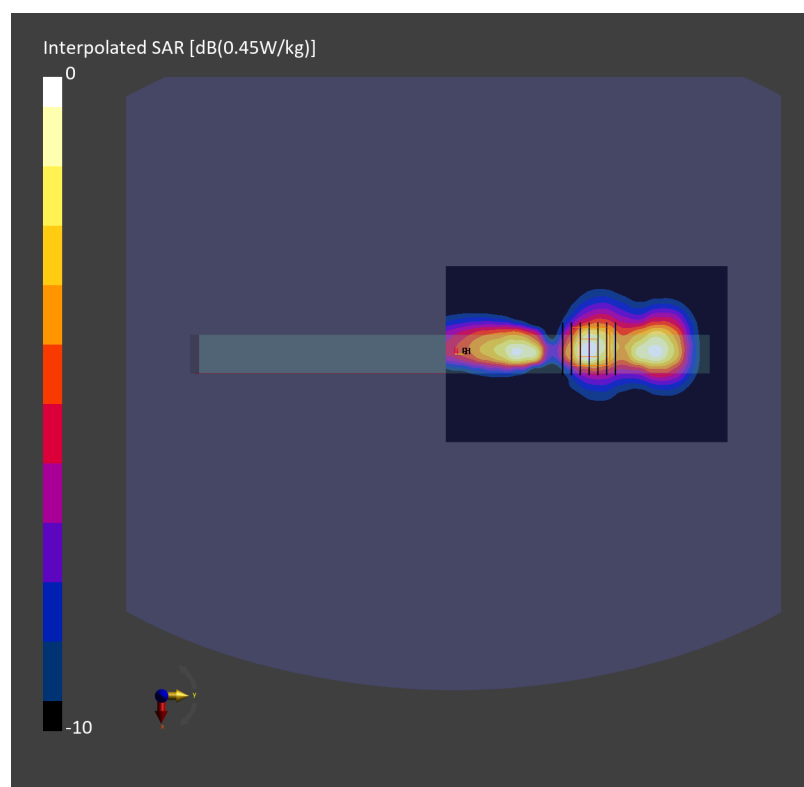

Date: 2025-08-13

#14_LTE Band 48_20M_QPSK_1_0_Top_0mm_Ch56640

Communication System: LTE-TDD ; Frequency: 3690.000 MHz

Medium: HSL_3700_250813 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 3.11$ S/m; $\epsilon_r = 38.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.54, 6.3, 6.21); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.359 W/kg; SAR (10g) = 0.137 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.399 W/kg; SAR (8g) = 0.170 W/kg; SAR (10g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 76.1 %

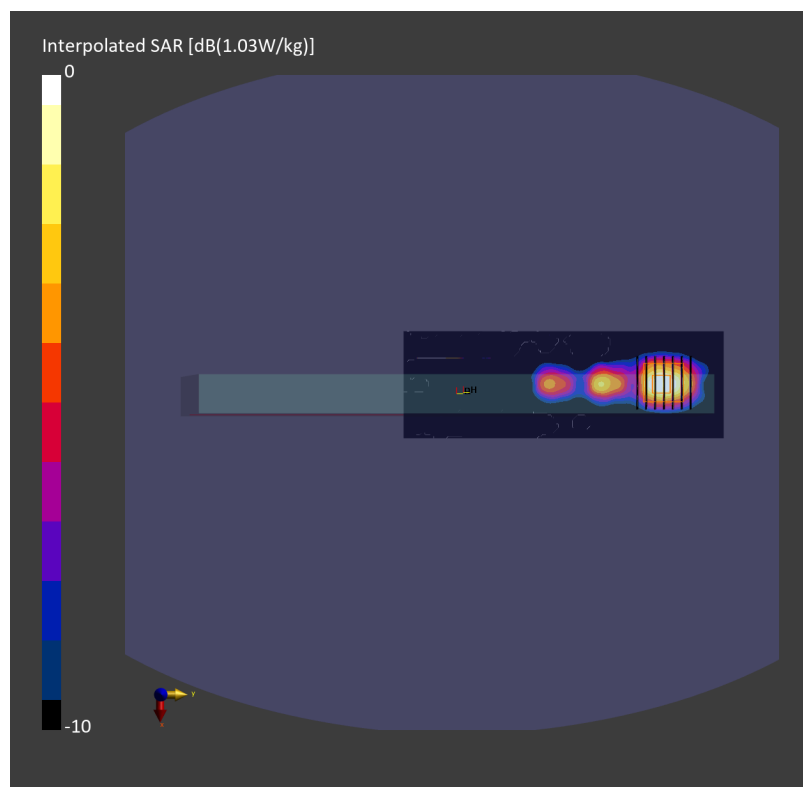

Date: 2025-08-15

#15_WCDMA II_RMC 12.2Kbps_Bottom Side_0mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_1900_250815 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.64, 7.52, 7.56); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.660 W/kg; SAR (10g) = 0.320 W/kg;


Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm

Power Drift = -0.13 dB

SAR (1g) = 0.913 W/kg; SAR (8g) = 0.443 W/kg; SAR (10g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.2 %

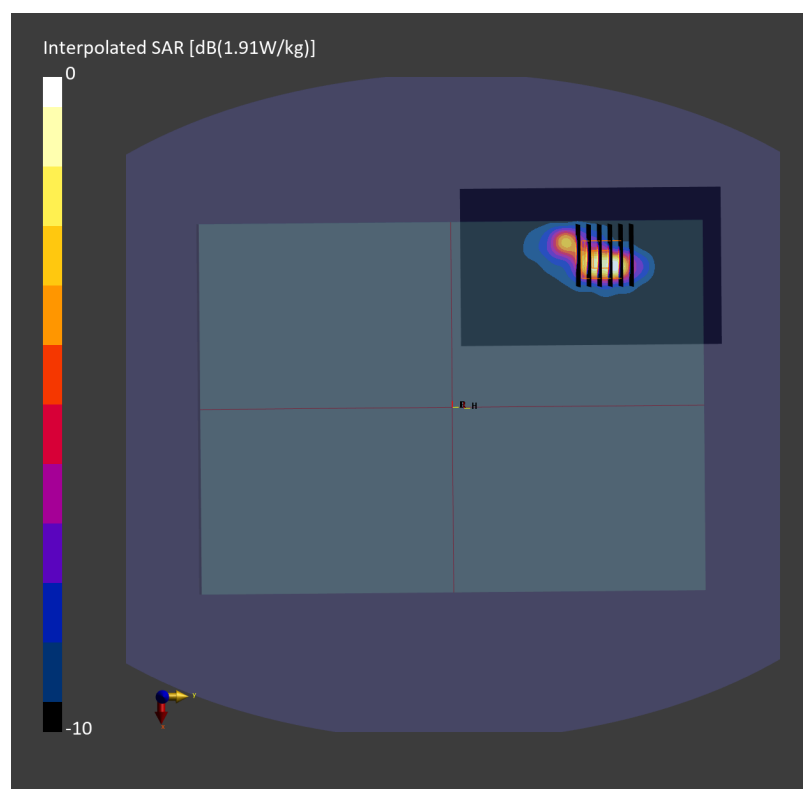

Date: 2025-08-15

#16_WCDMA IV_RMC 12.2Kbps_Bottom Side_0mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_1750_250815 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.96, 7.83, 7.88); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.746 W/kg; SAR (10g) = 0.383 W/kg;


Zoom Scan (44.1 mm x 44.1 mm x 33.4 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.885 W/kg; SAR (8g) = 0.464 W/kg; SAR (10g) = 0.421 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.7 %

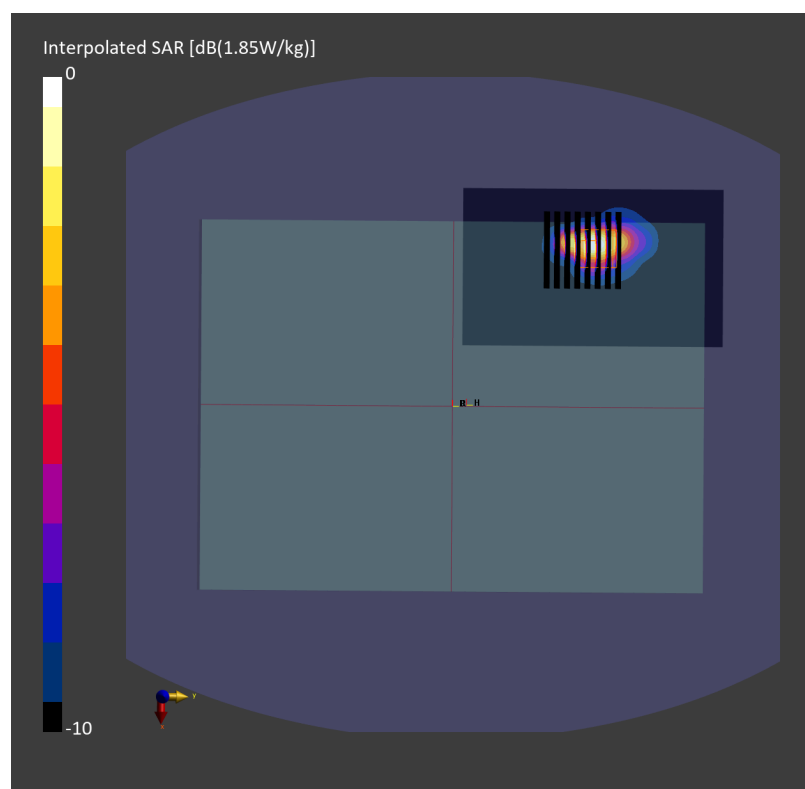

Date: 2025-08-14

#17_WCDMA V_RMC 12.2Kbps_Bottom Side_0mm_Ch4233

Communication System: UMTS-FDD ; Frequency: 846.600 MHz

Medium: HSL_835_250814 Medium parameters used: $f = 846.600$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.27, 9.12, 9.17); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.667 W/kg;


Zoom Scan (54.0 mm x 54.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.985 W/kg; SAR (8g) = 0.578 W/kg; SAR (10g) = 0.538 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 71.3 %

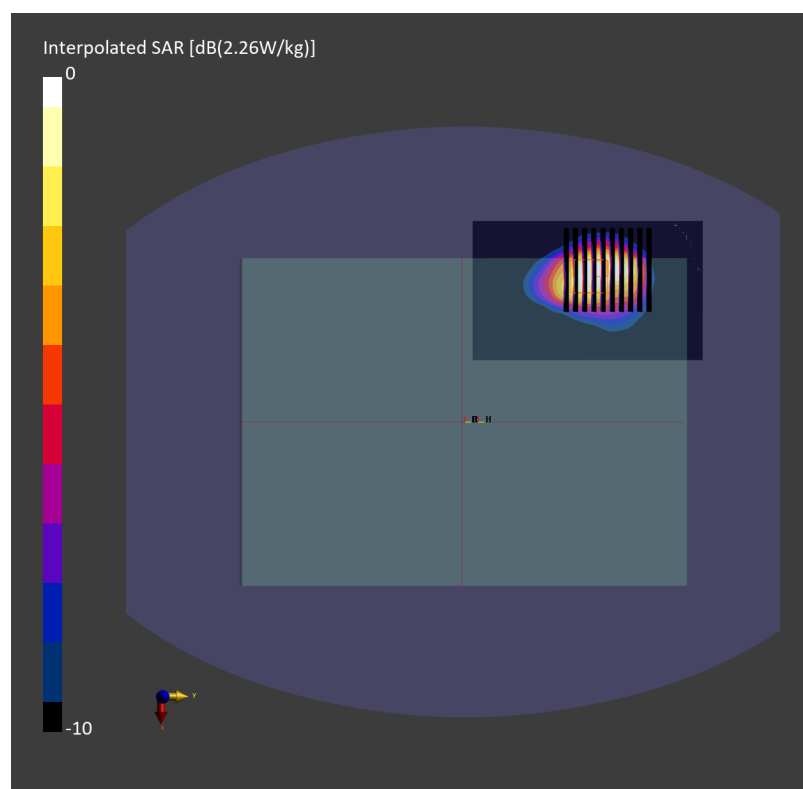

Date: 2025-08-16

#18_LTE Band 7_20M_QPSK_50_24_Bottom Side_0mm_Ch20850

Communication System: LTE-FDD; Frequency: 2510.000 MHz

Medium: HSL_2600_250816 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.11, 6.99, 7.04); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.716 W/kg; SAR (10g) = 0.288 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.746 W/kg; SAR (8g) = 0.333 W/kg; SAR (10g) = 0.295 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

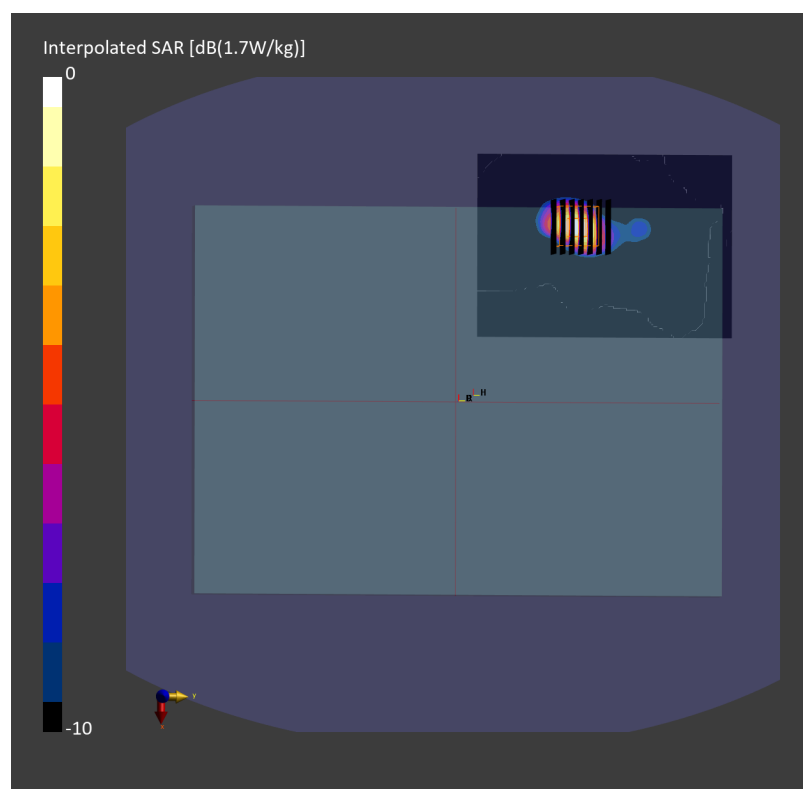

Date: 2025-08-14

#19_LTE Band 12_10M_QPSK_1_25_Bottom Side_0mm_Ch23095

Communication System: LTE-FDD Frequency: 707.500 MHz

Medium: HSL_750_250814 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.46, 9.11, 8.98); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.688 W/kg; SAR (10g) = 0.462 W/kg;


Zoom Scan (31.8 mm x 31.8 mm x 31.2 mm): Measurement Grid: 5.3 mm x 5.3 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.755 W/kg; SAR (8g) = 0.423 W/kg; SAR (10g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.6 %

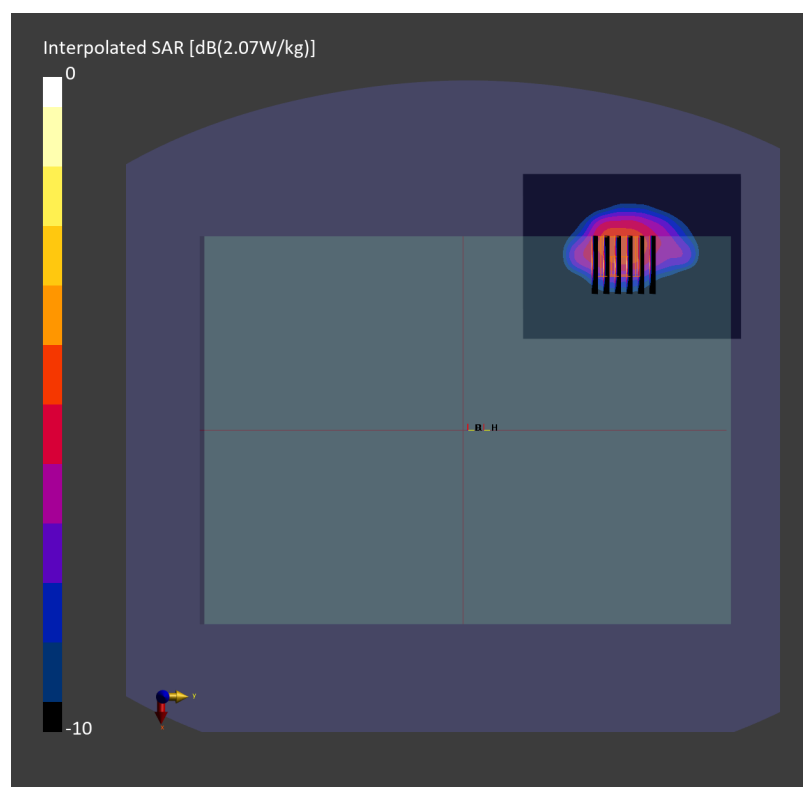

Date: 2025-08-14

#20_LTE Band 13_10M_QPSK_25_12_Bottom Side_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_750_250814 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.06 W/kg; SAR (10g) = 0.679 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.958 W/kg; SAR (8g) = 0.562 W/kg; SAR (10g) = 0.522 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

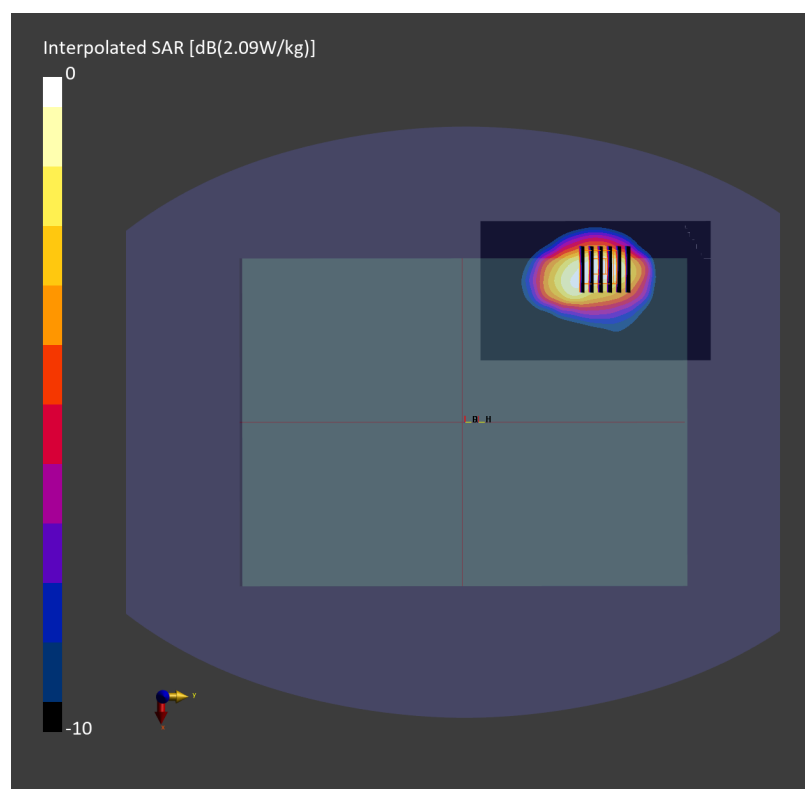

Date: 2025-08-14

#21_LTE Band 14_10M_QPSK_25_12_Bottom Side_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_750_250814 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.955 W/kg; SAR (10g) = 0.610 W/kg;


Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.885 W/kg; SAR (8g) = 0.515 W/kg; SAR (10g) = 0.481 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 70.3 %

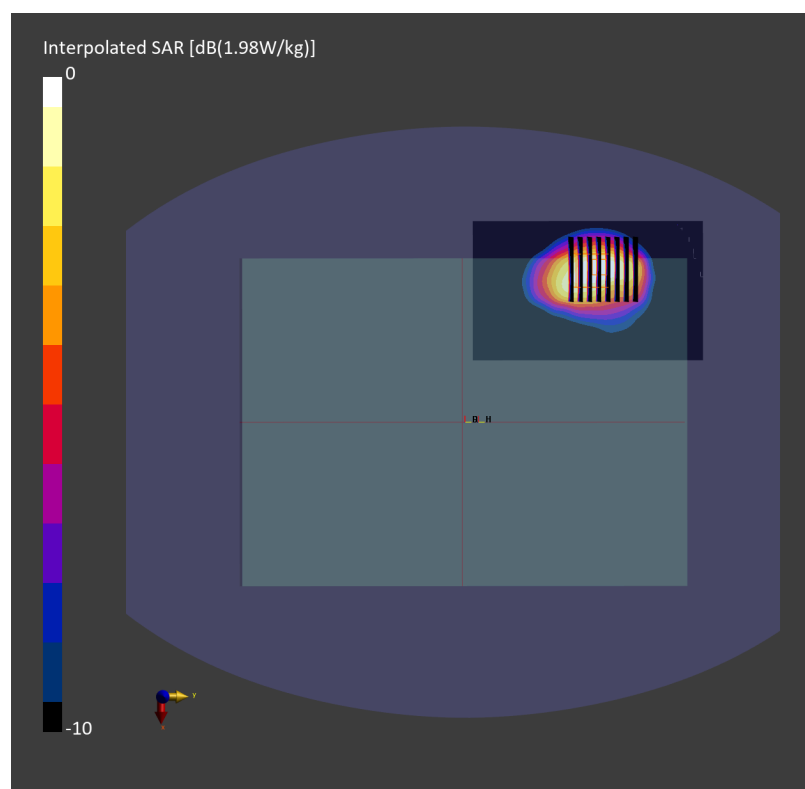

Date: 2025-08-15

#22_LTE Band 25_20M_QPSK_1_49_Bottom Side_0mm_Ch26590

Communication System: LTE-FDD; Frequency: 1905.000 MHz

Medium: HSL_1900_250815 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.64, 7.52, 7.56); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.609 W/kg; SAR (10g) = 0.275 W/kg;


Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = 0.16 dB

SAR (1g) = 0.831 W/kg; SAR (8g) = 0.383 W/kg; SAR (10g) = 0.342 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

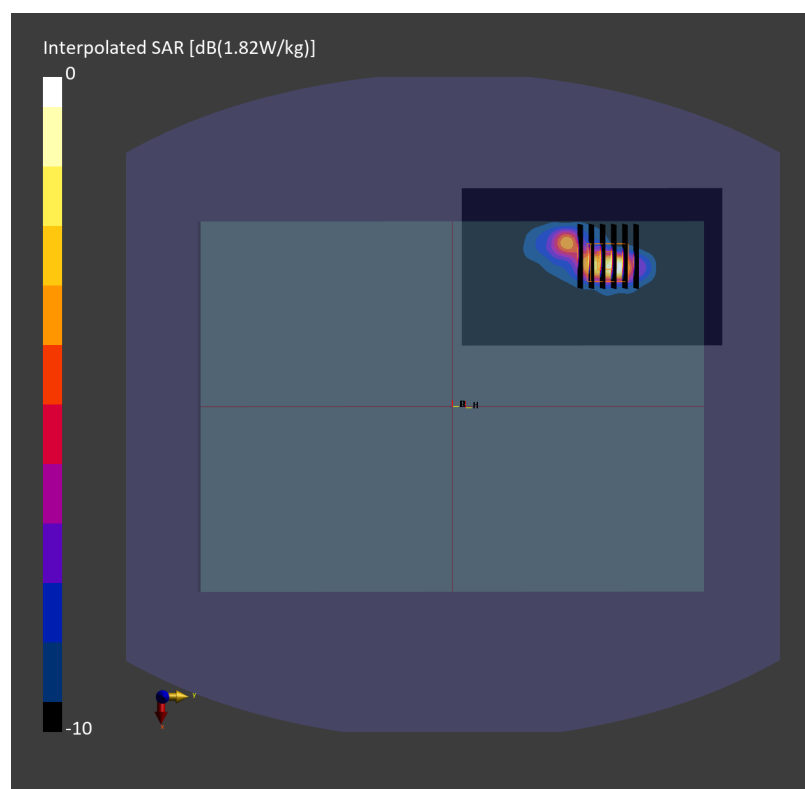

Date: 2025-08-14

#23_LTE Band 26_15M_QPSK_1_37_Bottom Side_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_835_250814 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.27, 9.12, 9.17); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.660 W/kg; SAR (10g) = 0.429 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.684 W/kg; SAR (8g) = 0.395 W/kg; SAR (10g) = 0.369 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

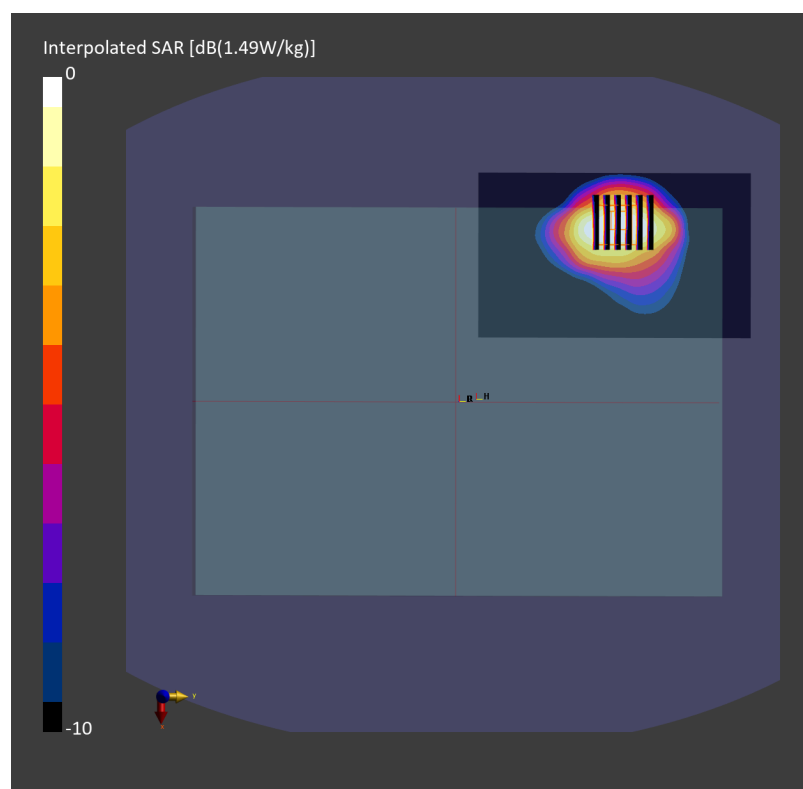

Date: 2025-08-16

#24_LTE Band 30_10M_QPSK_50_0_Bottom Side_0mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_2300_250816 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.68$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.37, 7.25, 7.29); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10108-CAH

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.883 W/kg; SAR (10g) = 0.387 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.16 dB

SAR (1g) = 0.923 W/kg; SAR (8g) = 0.433 W/kg; SAR (10g) = 0.387 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

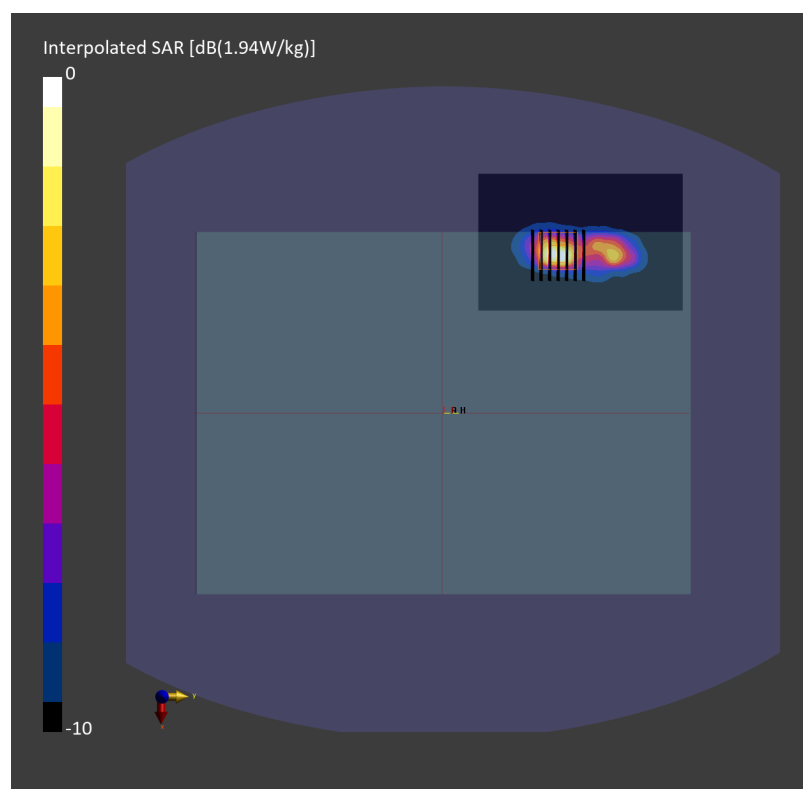

Date: 2025-08-15

#25_LTE Band 66_20M_QPSK_50_24_Bottom Side_0mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_1750_250815 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.96, 7.83, 7.88); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.619 W/kg; SAR (10g) = 0.337 W/kg;


Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.835 W/kg; SAR (8g) = 0.438 W/kg; SAR (10g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.9 %

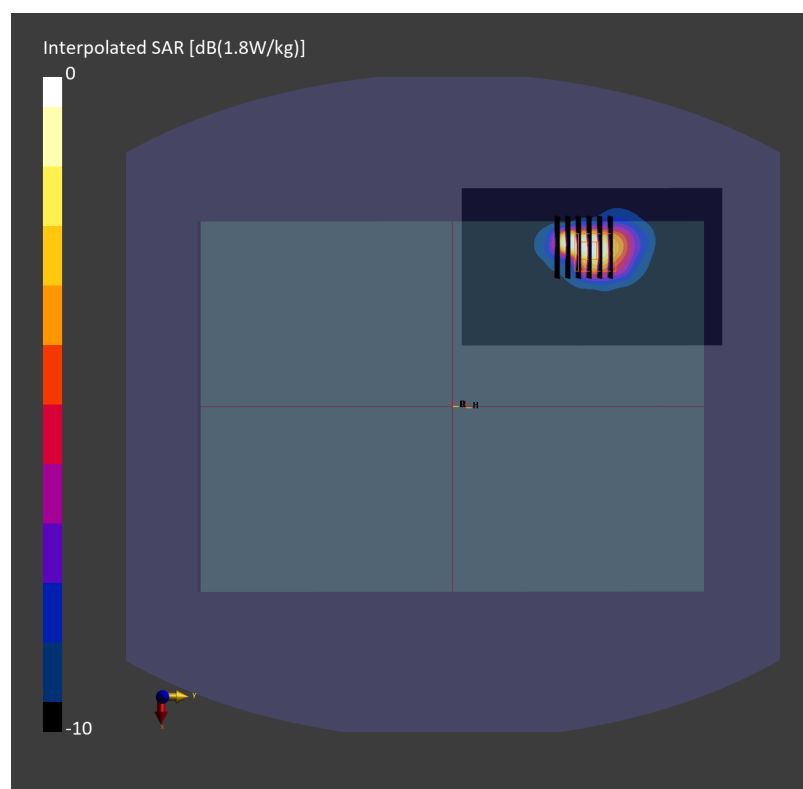

Date: 2025-08-14

#26_LTE Band 71_20M_QPSK_1_0_Bottom Side_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_750_250814 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.46, 9.11, 8.98); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1794; Calibrated: 2025-02-12
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.859 W/kg; SAR (10g) = 0.537 W/kg;


Zoom Scan (44.0 mm x 44.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.738 W/kg; SAR (8g) = 0.372 W/kg; SAR (10g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 66.2 %

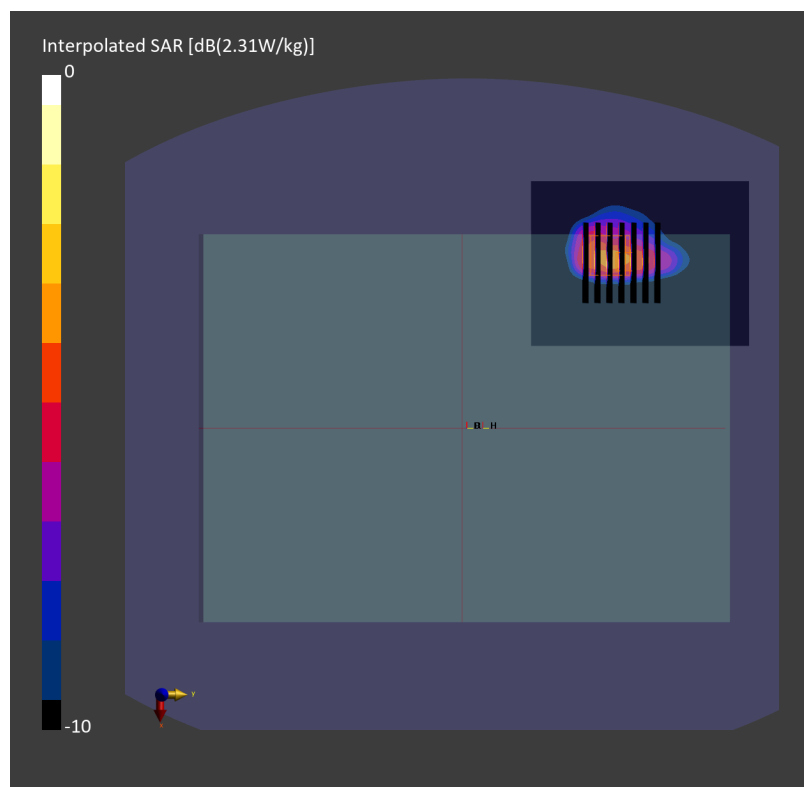

Date: 2025-08-16

#27_LTE Band 41_20M_QPSK_1_99_Bottom Side_0mm_Ch41490

Communication System: LTE-TDD; Frequency: 2680.000 MHz

Medium: HSL_2600_250816 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.08$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.11, 6.99, 7.04); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.777 W/kg; SAR (10g) = 0.324 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.16 dB

SAR (1g) = 0.858 W/kg; SAR (8g) = 0.380 W/kg; SAR (10g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

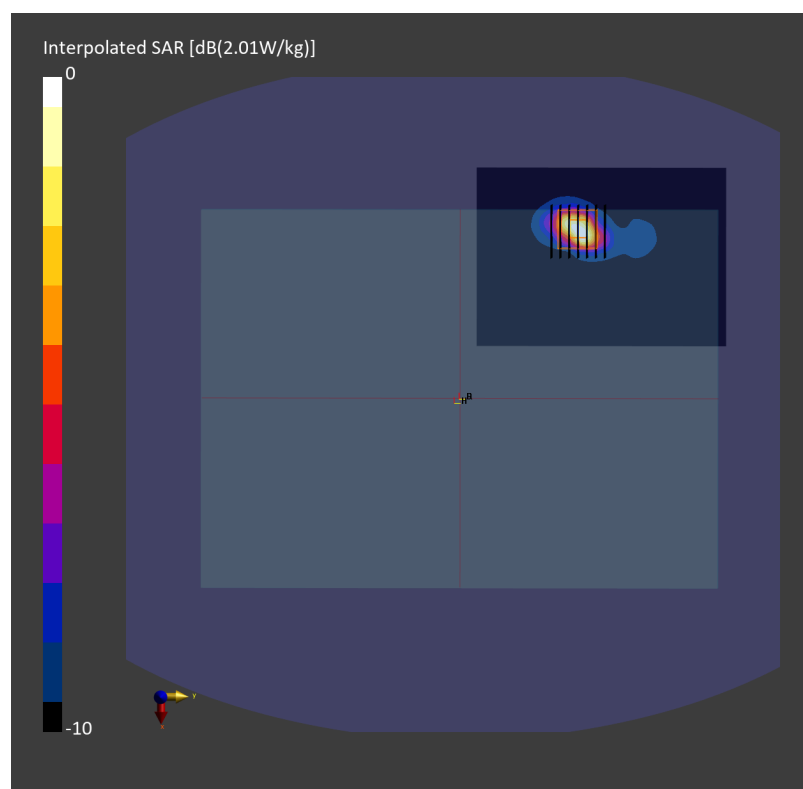

Date: 2025-08-16

#28_LTE Band 48_20M_QPSK_50_0_Bottom Side_0mm_Ch55990

Communication System: LTE-TDD; Frequency: 3625.000 MHz

Medium: HSL_3700_250816 Medium parameters used: $f = 3625.000$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(6.34, 6.24, 6.28); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.901 W/kg; SAR (10g) = 0.305 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 1.01 W/kg; SAR (8g) = 0.357 W/kg; SAR (10g) = 0.309 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.6 %

