

Appendix – BLE Test Data

Table of Contents

Table of Contents	2
1 Duty Cycle	3
2 Maximum Peak Conducted Output Power	7
3 -6dB Bandwidth	11
4 Occupied Channel Bandwidth	15
5 Maximum Power Spectral Density Level	19
6 Band Edge	23
7 Conducted RF Spurious Emission	28




1 Duty Cycle

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
BLE 1M	2402	85.10	0.70	0.47
	2440	85.85	0.66	0.93
	2480	85.10	0.70	0.47
BLE 2M	2402	85.88	0.66	0.93
	2440	85.88	0.66	0.93
	2480	85.88	0.66	0.93




Test Graphs

Duty Cycle BLE 1M 2402MHz

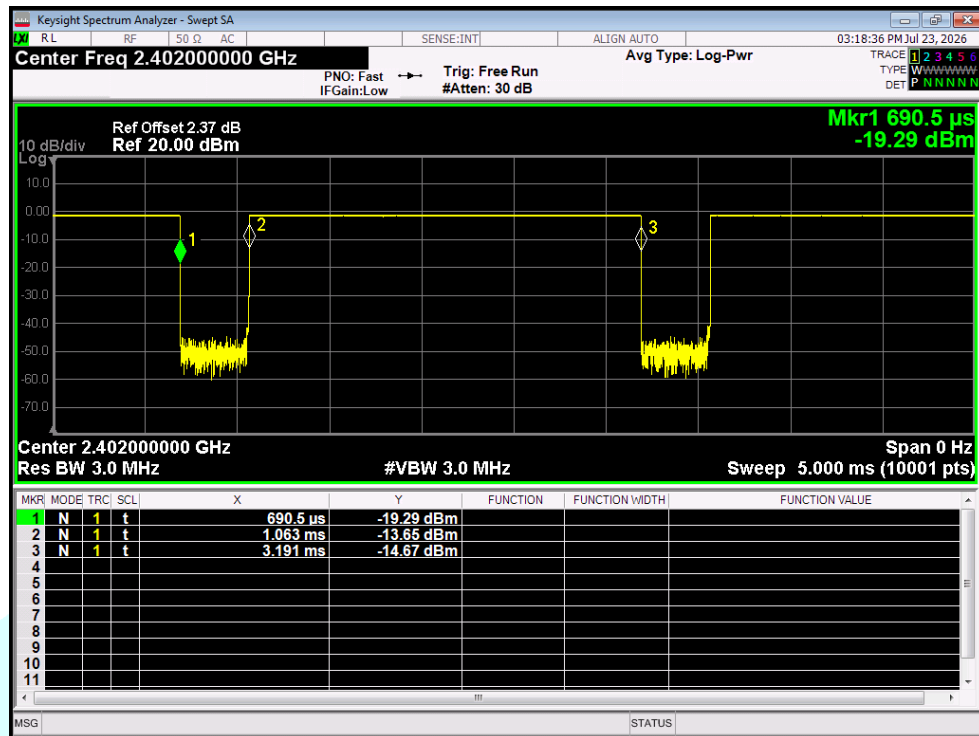

Duty Cycle BLE 1M 2440MHz

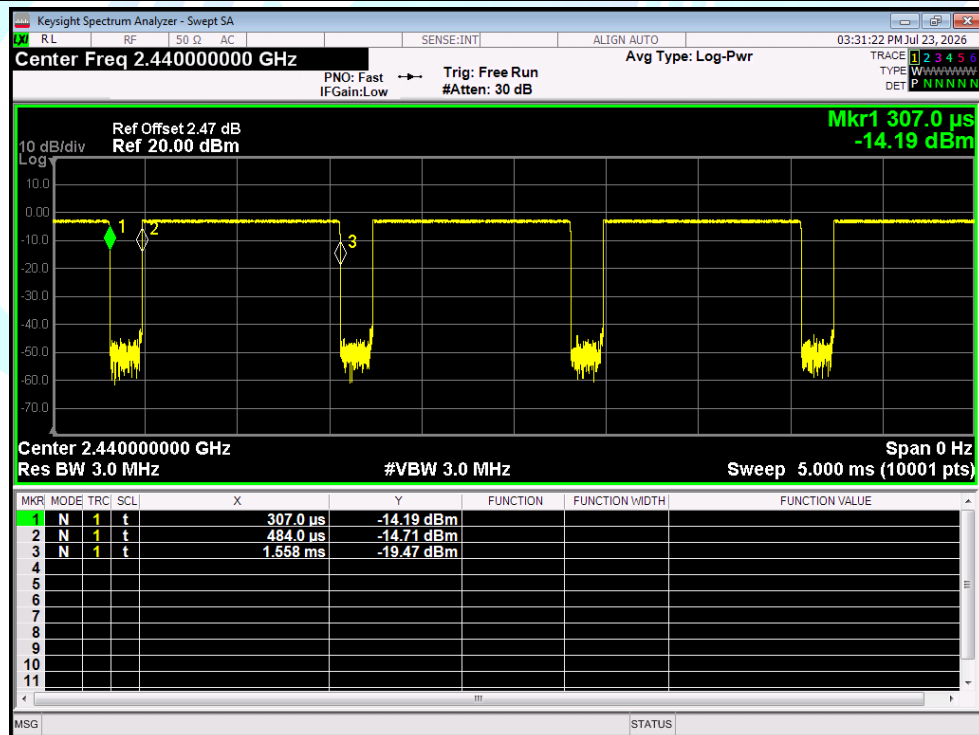








2 Maximum Peak Conducted Output Power

Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	-1.27	30	Pass
	2440	-2.60	30	Pass
	2480	-2.54	30	Pass
BLE 2M	2402	-1.32	30	Pass
	2440	-2.54	30	Pass
	2480	-2.58	30	Pass



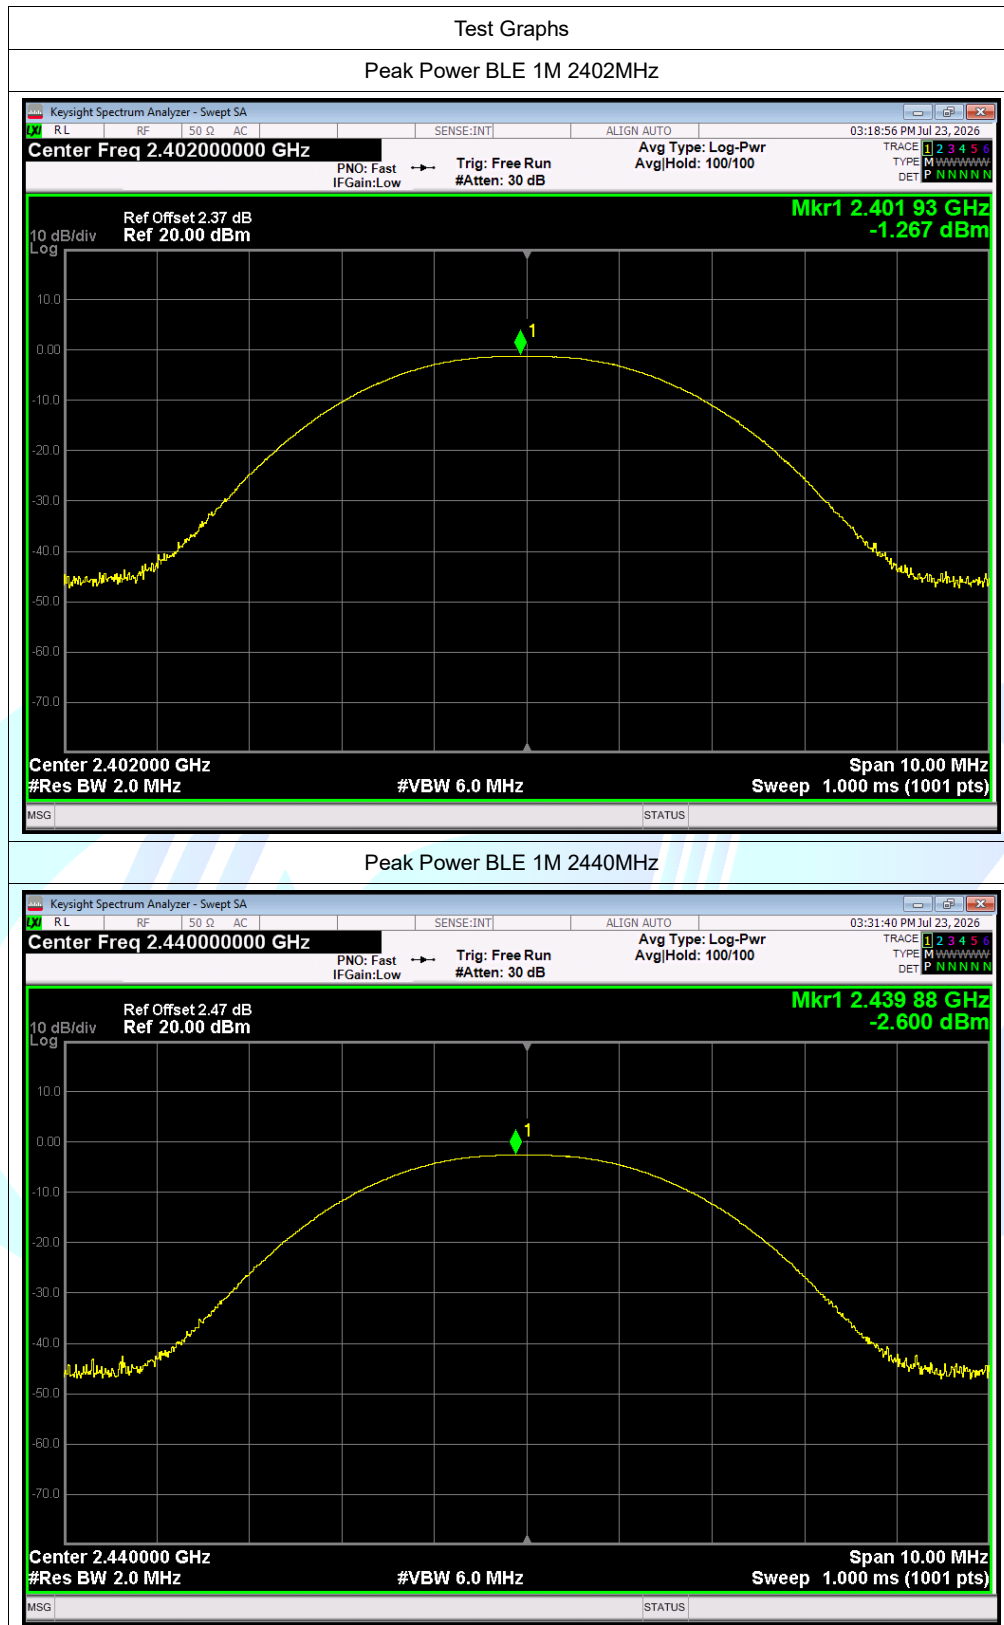

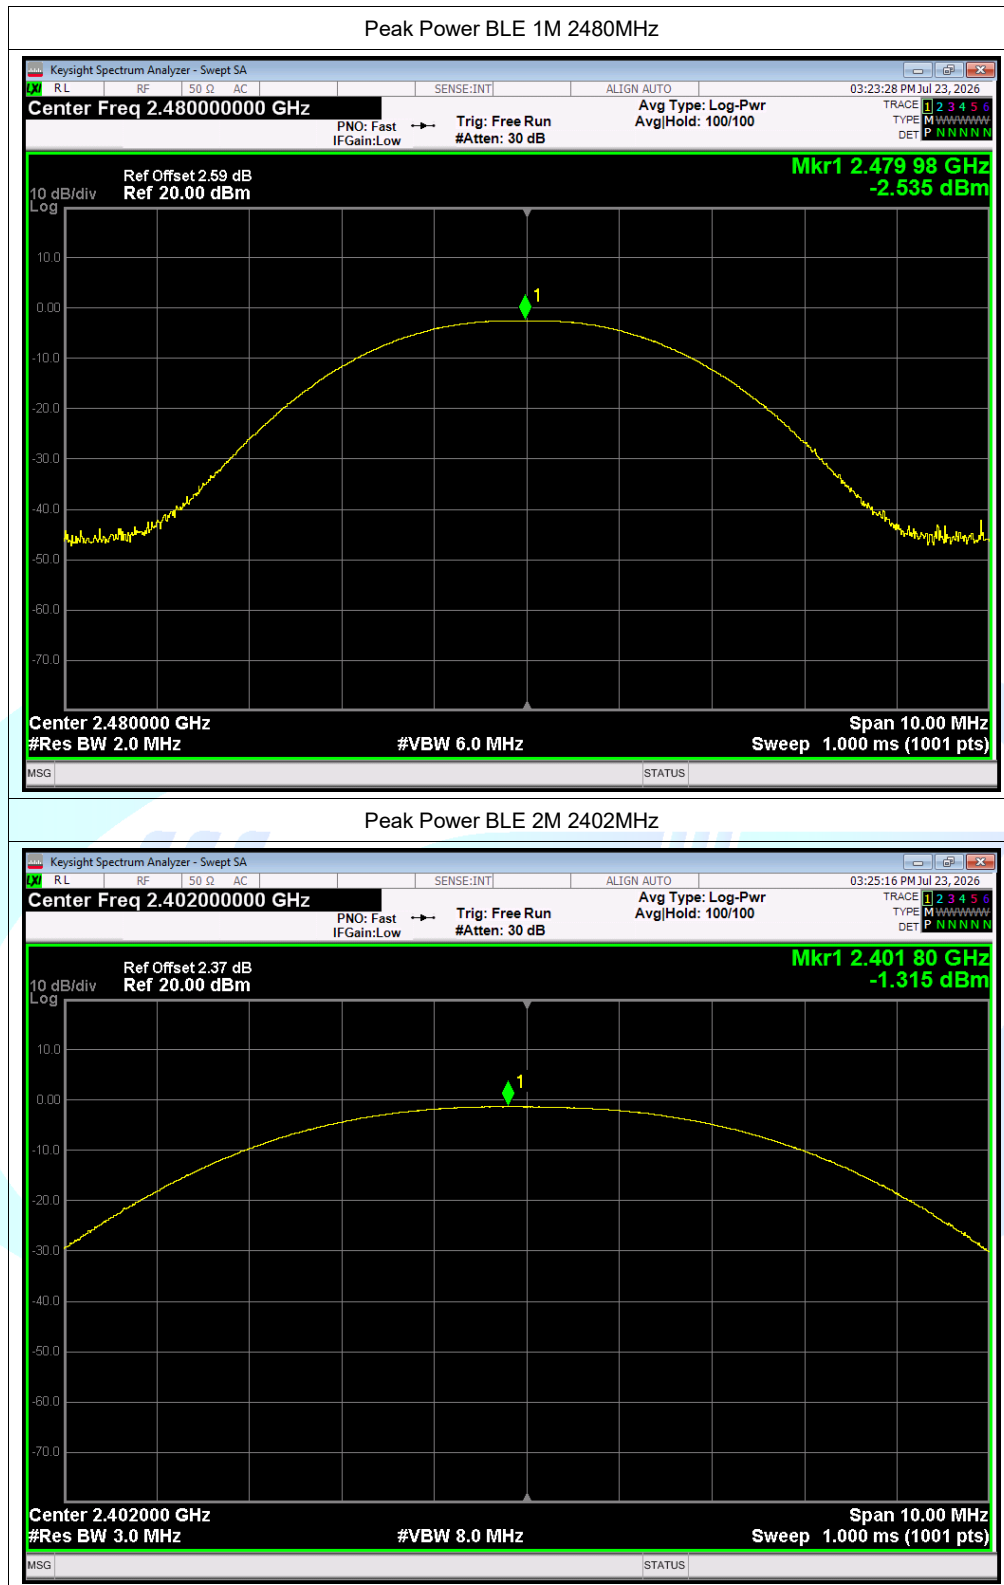

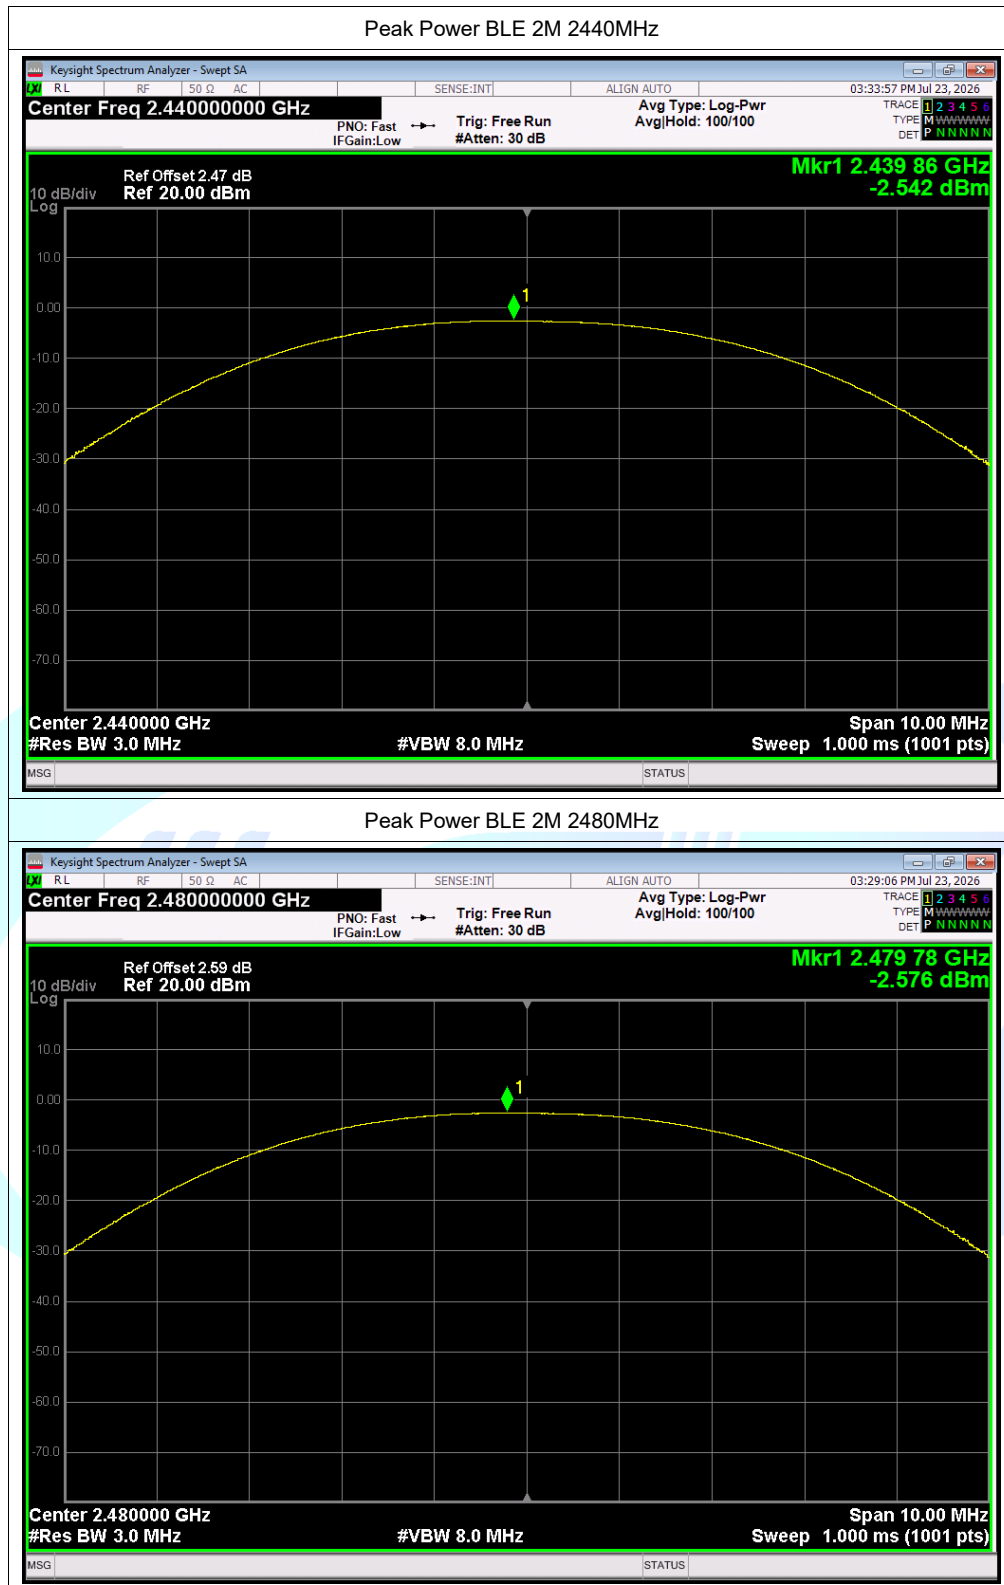

3 -6dB Bandwidth

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	0.7233	0.5	Pass
	2440	0.7254	0.5	Pass
	2480	0.7231	0.5	Pass
BLE 2M	2402	1.240	0.5	Pass
	2440	1.237	0.5	Pass
	2480	1.164	0.5	Pass










4 Occupied Channel Bandwidth

Mode	Frequency (MHz)	99% OBW (MHz)
BLE 1M	2402	1.0536
	2440	1.0536
	2480	1.0571
BLE 2M	2402	2.0523
	2440	2.0598
	2480	2.0618








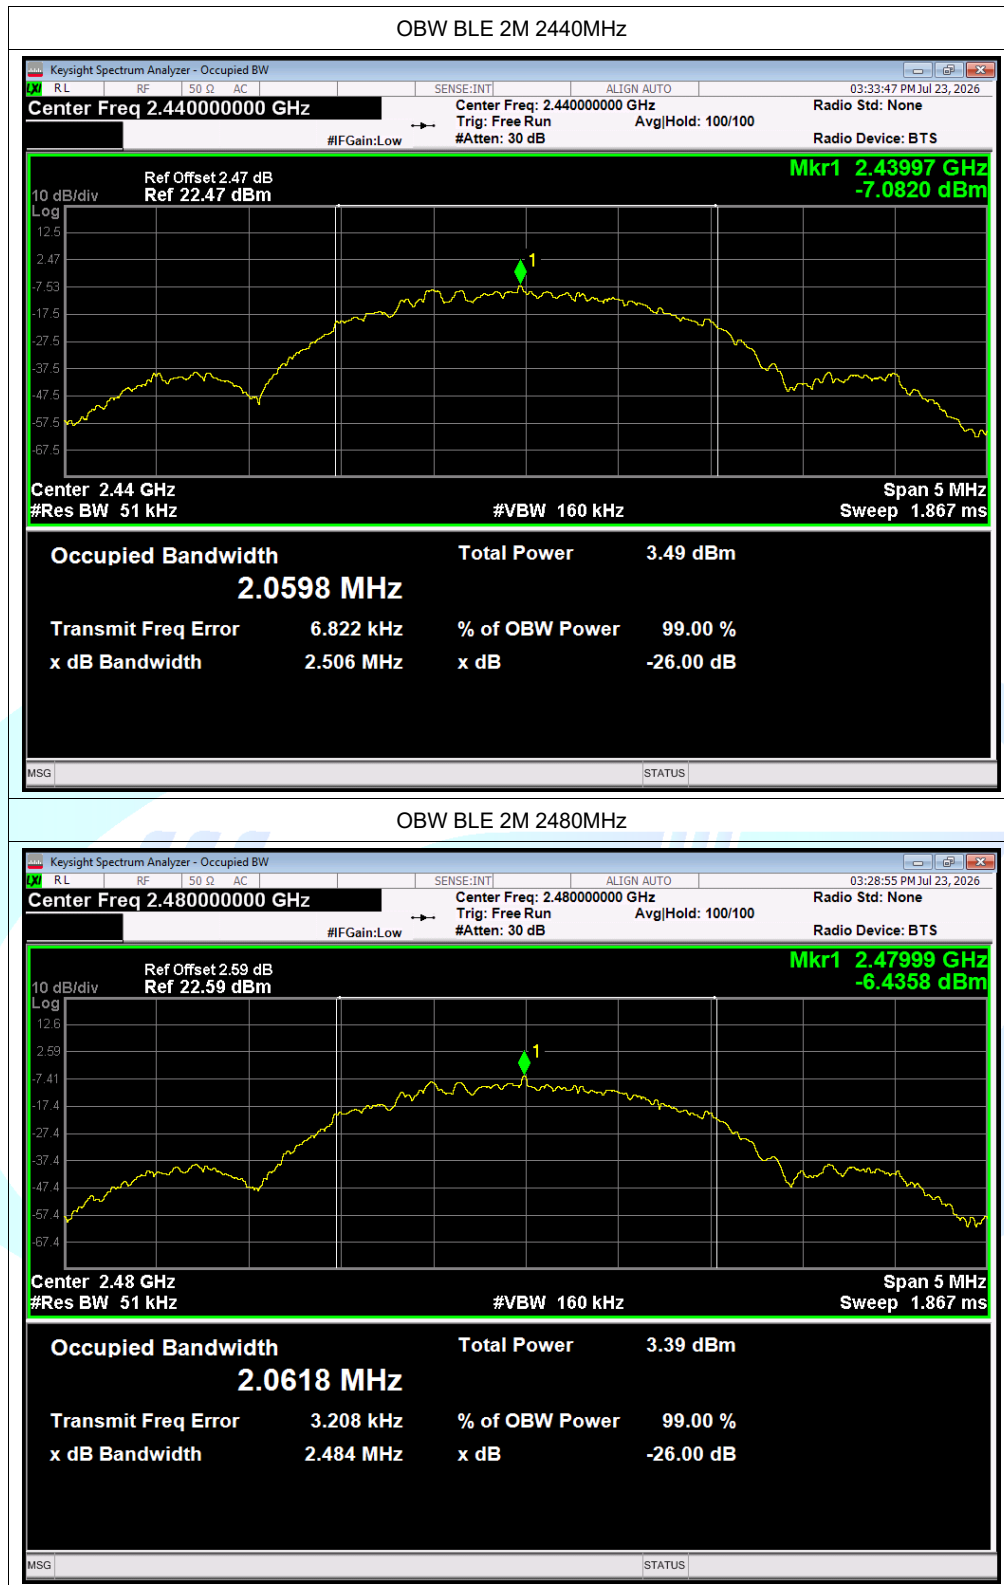



5 Maximum Power Spectral Density Level

Mode	Frequency (MHz)	Cond. PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	-16.94	0	-16.94	8	Pass
	2440	-18.42	0	-18.42	8	Pass
	2480	-18.36	0	-18.36	8	Pass
BLE 2M	2402	-20.39	0	-20.39	8	Pass
	2440	-21.45	0	-21.45	8	Pass
	2480	-21.62	0	-21.62	8	Pass



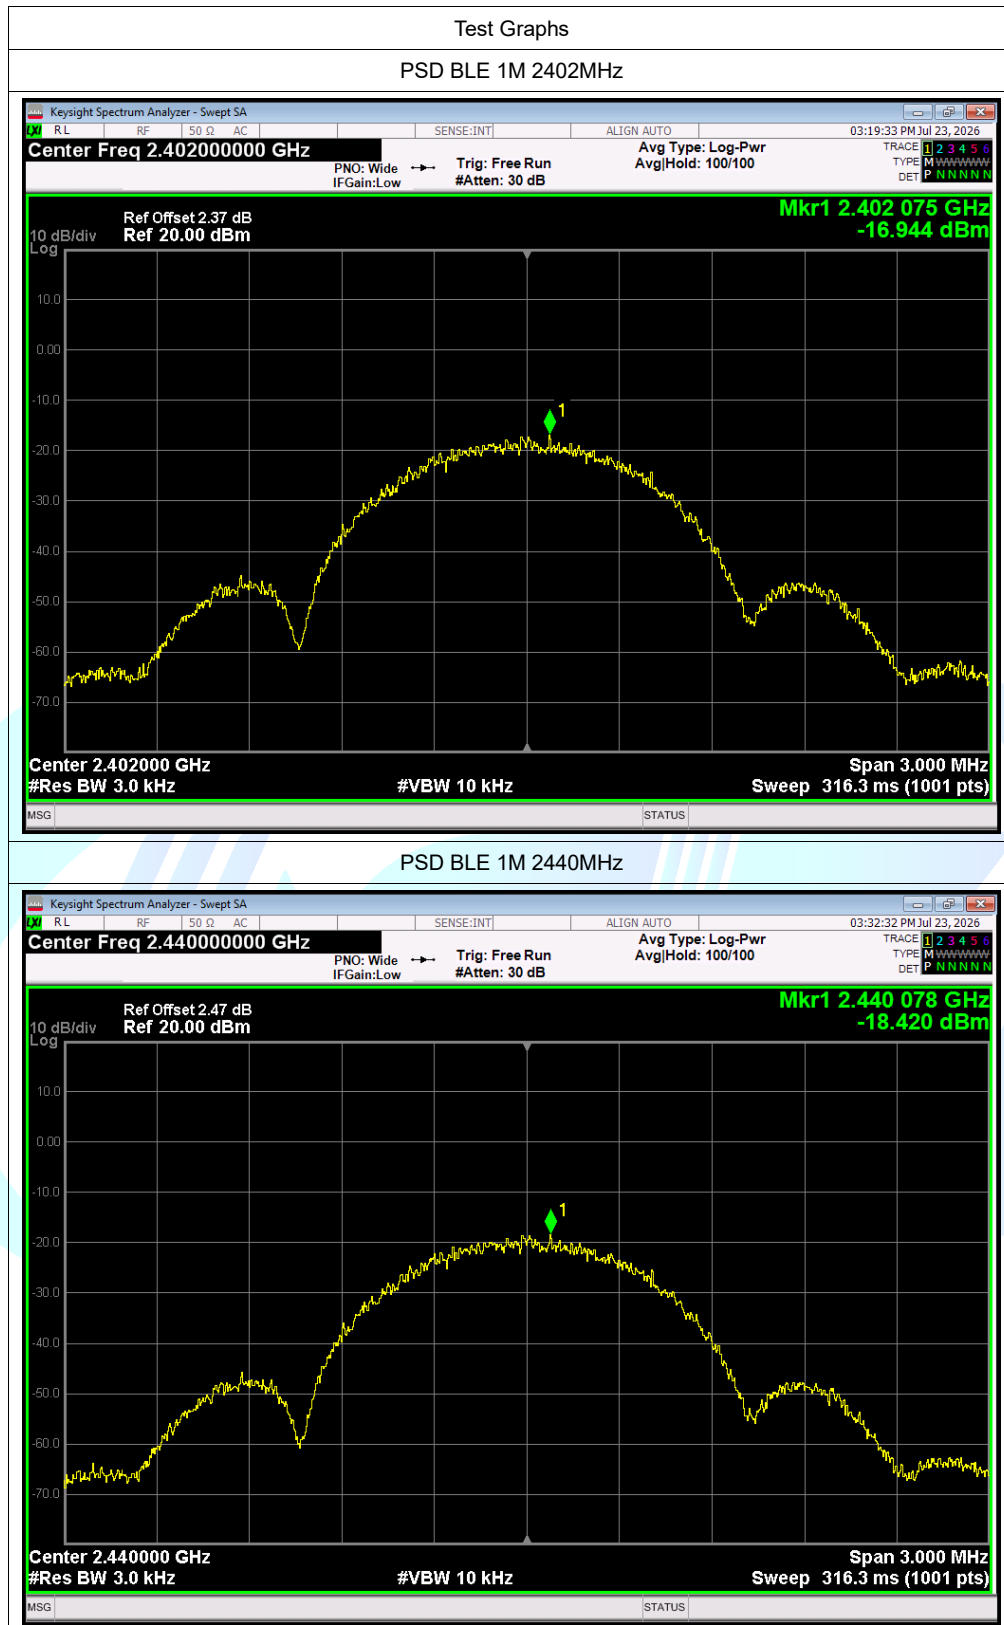

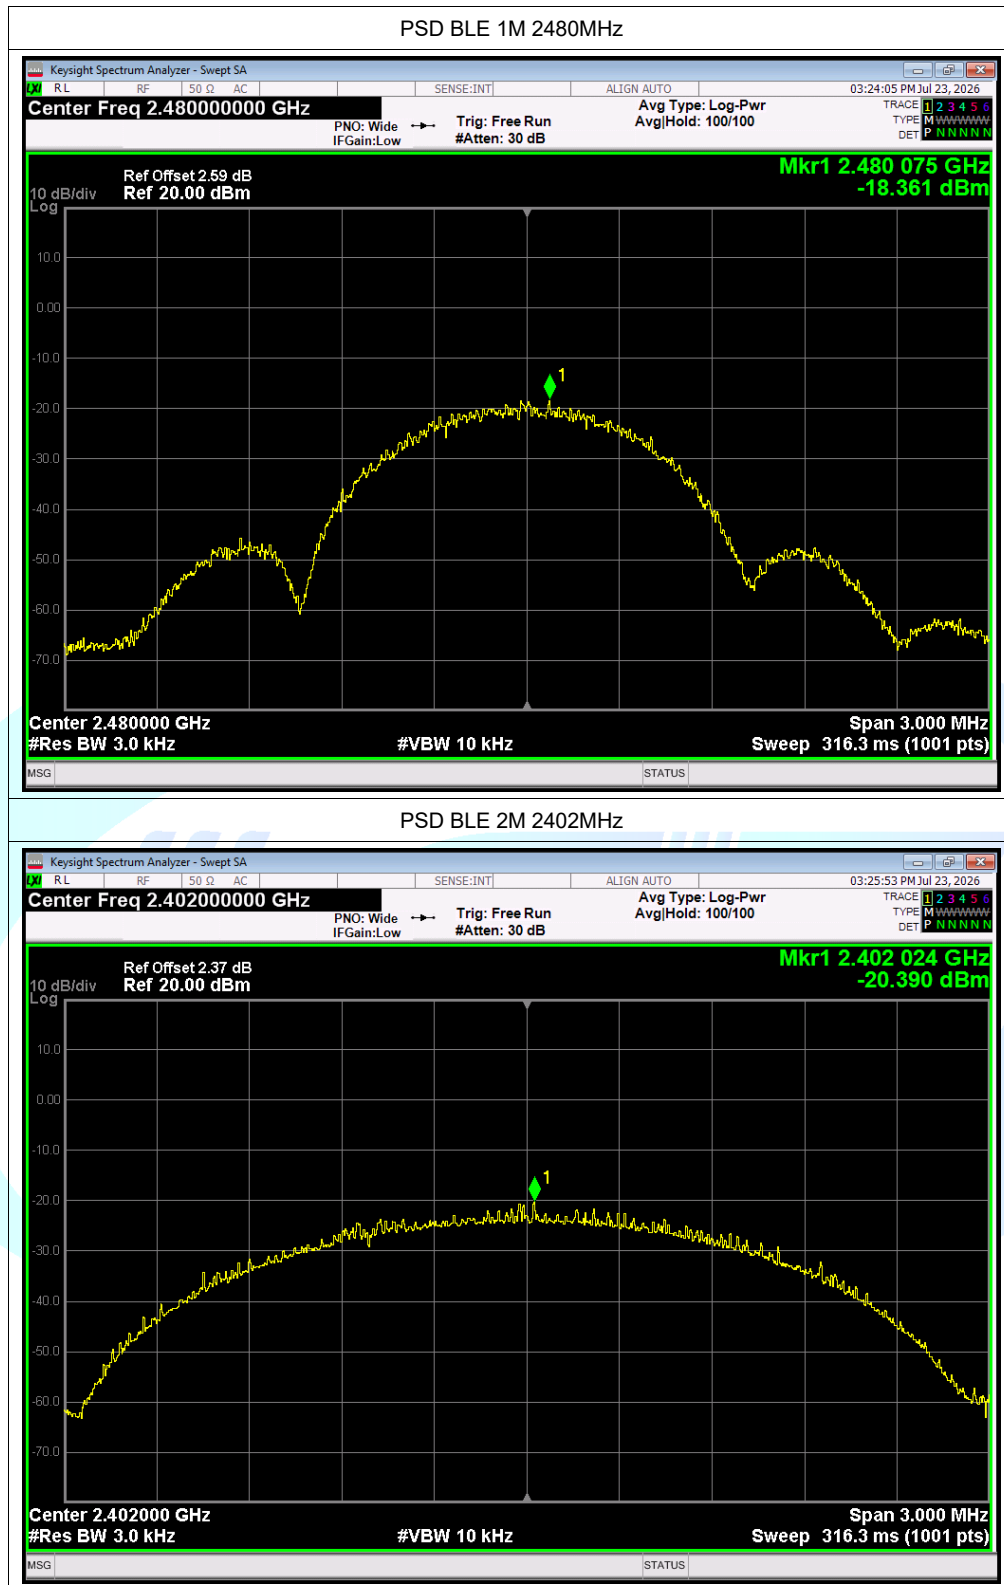


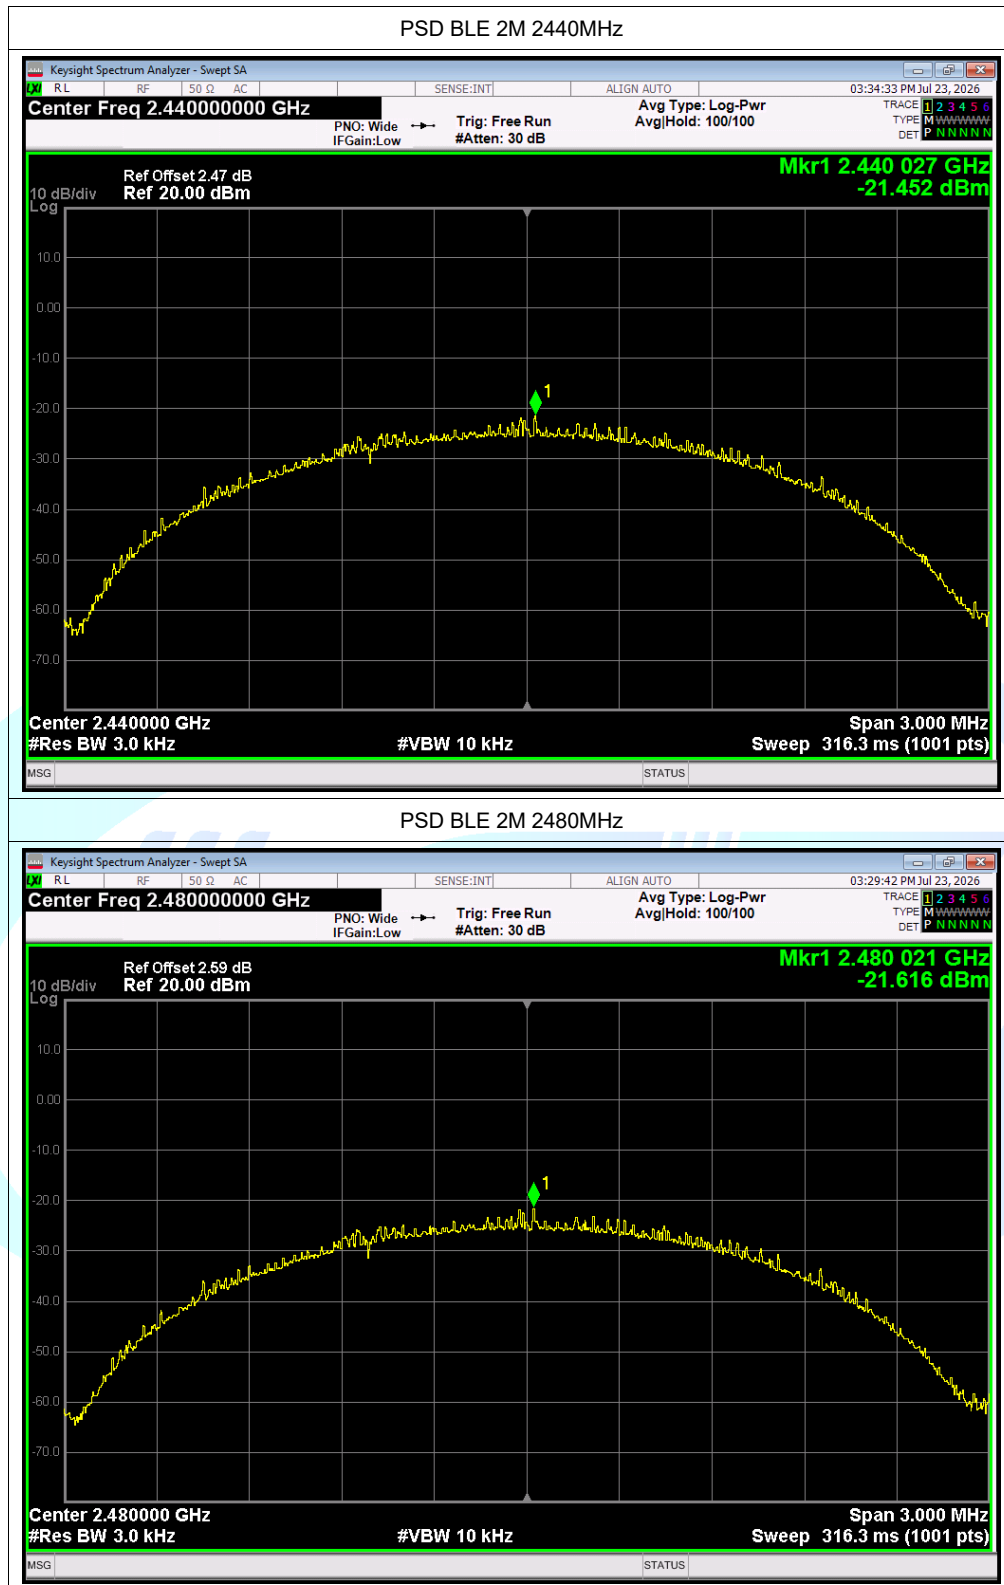



6 Band Edge


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-53.08	-20	Pass
	2480	-51.06	-20	Pass
BLE 2M	2402	-34.3	-20	Pass
	2480	-50.1	-20	Pass



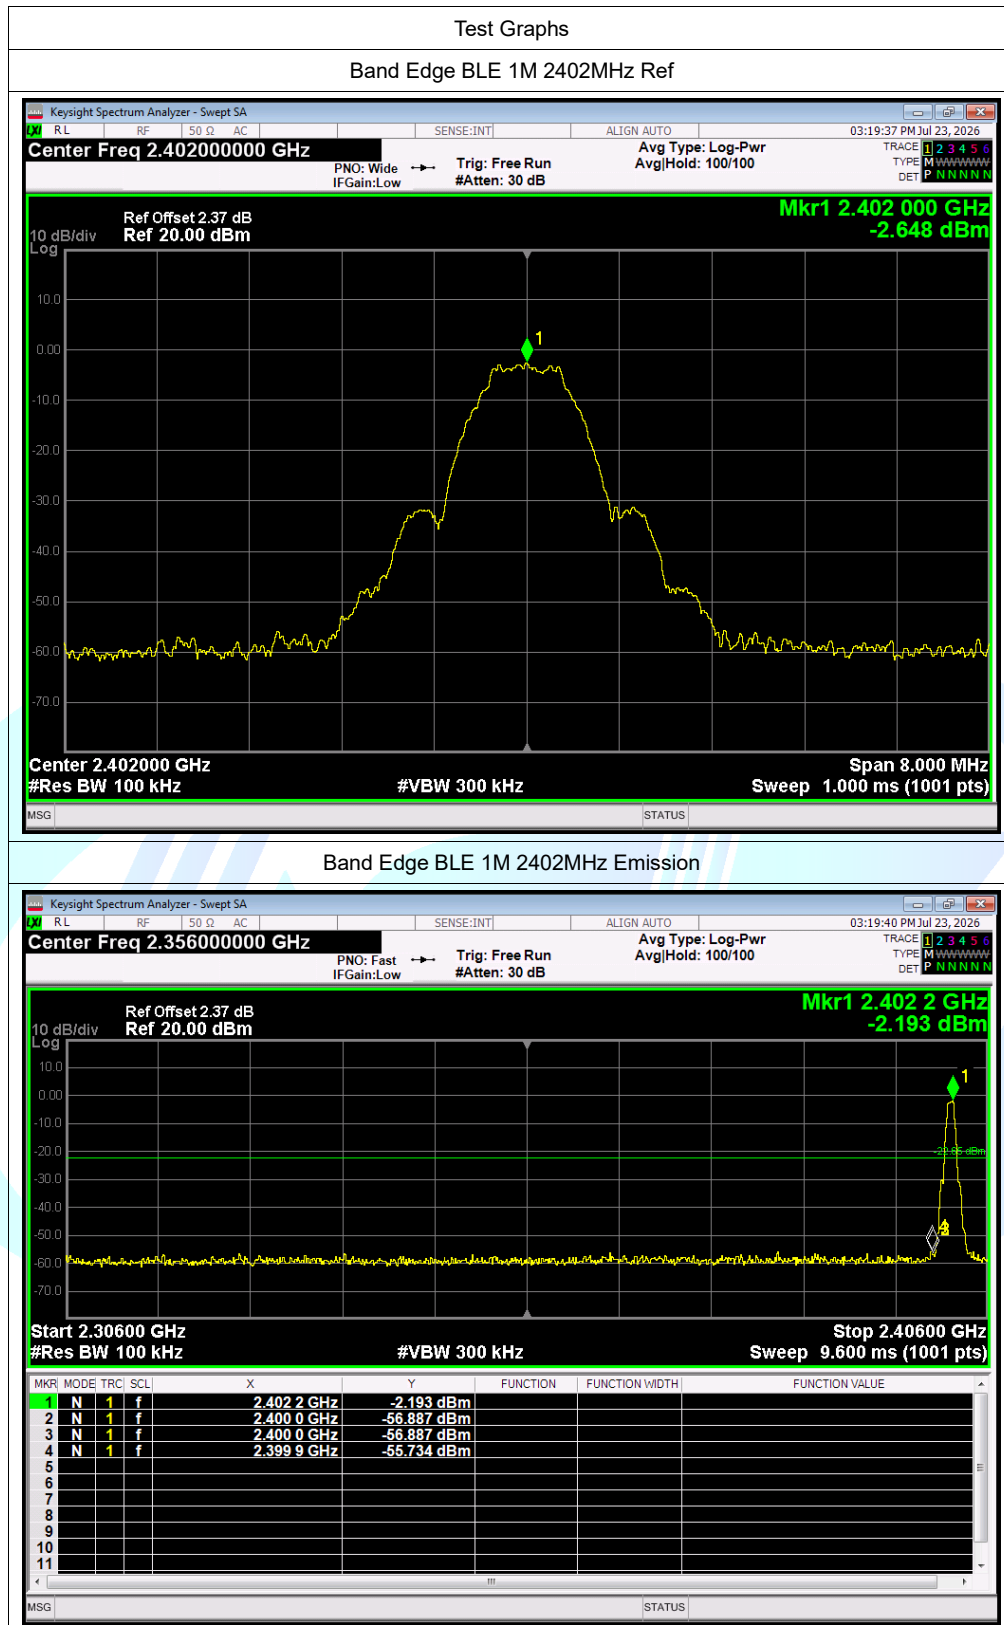

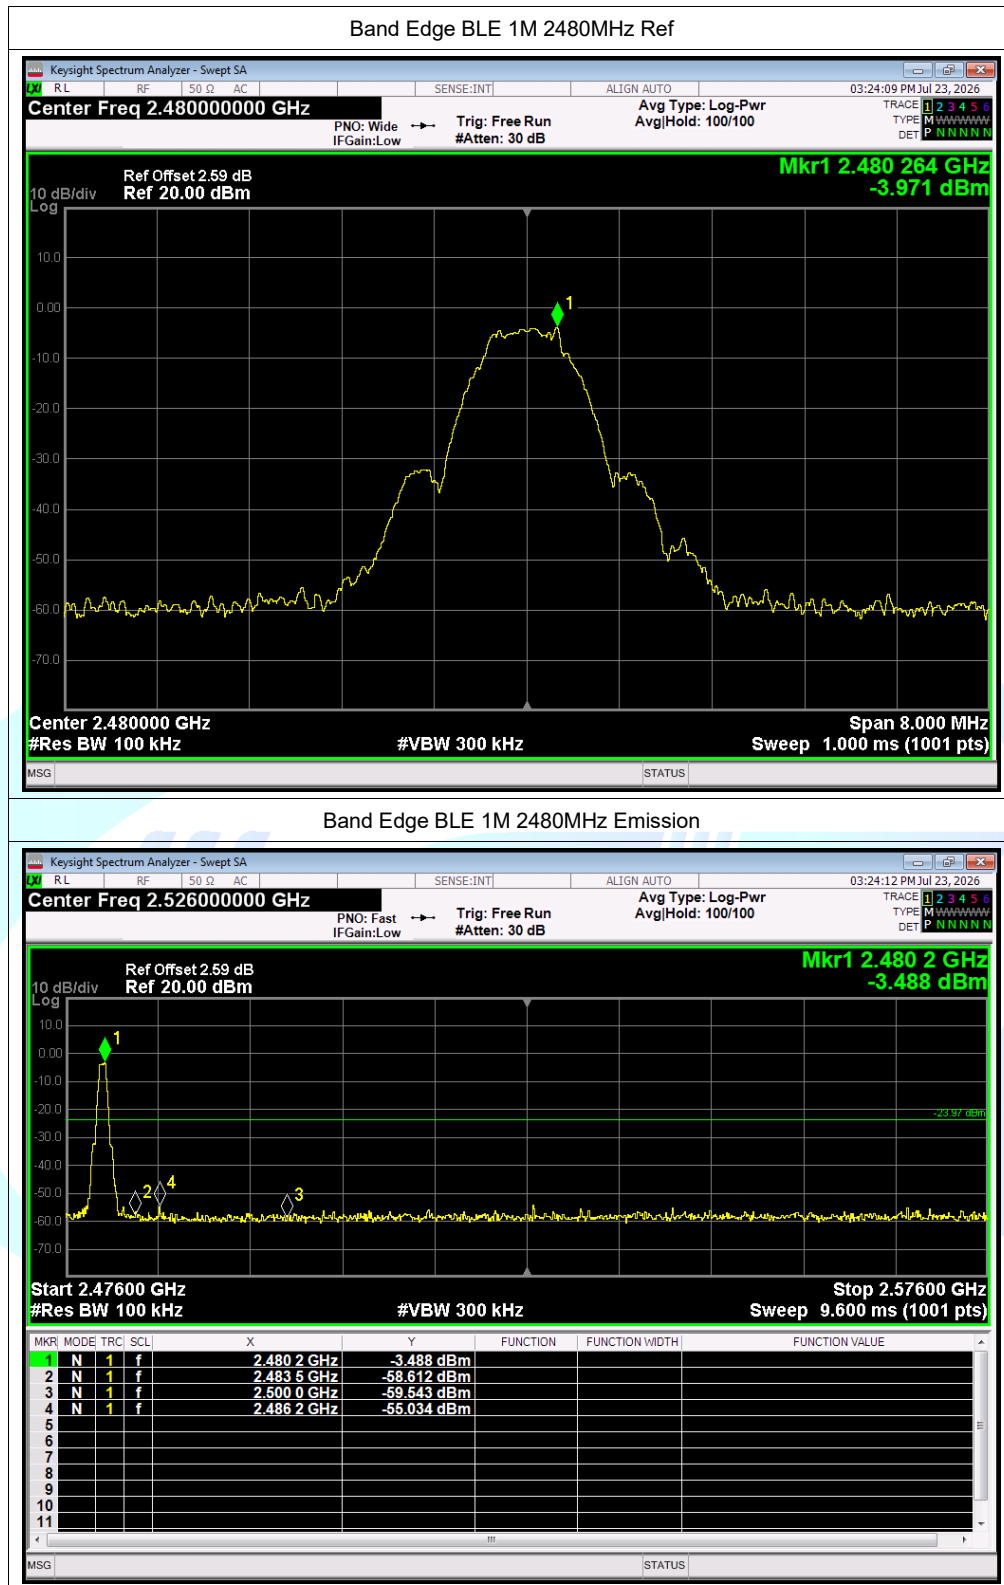

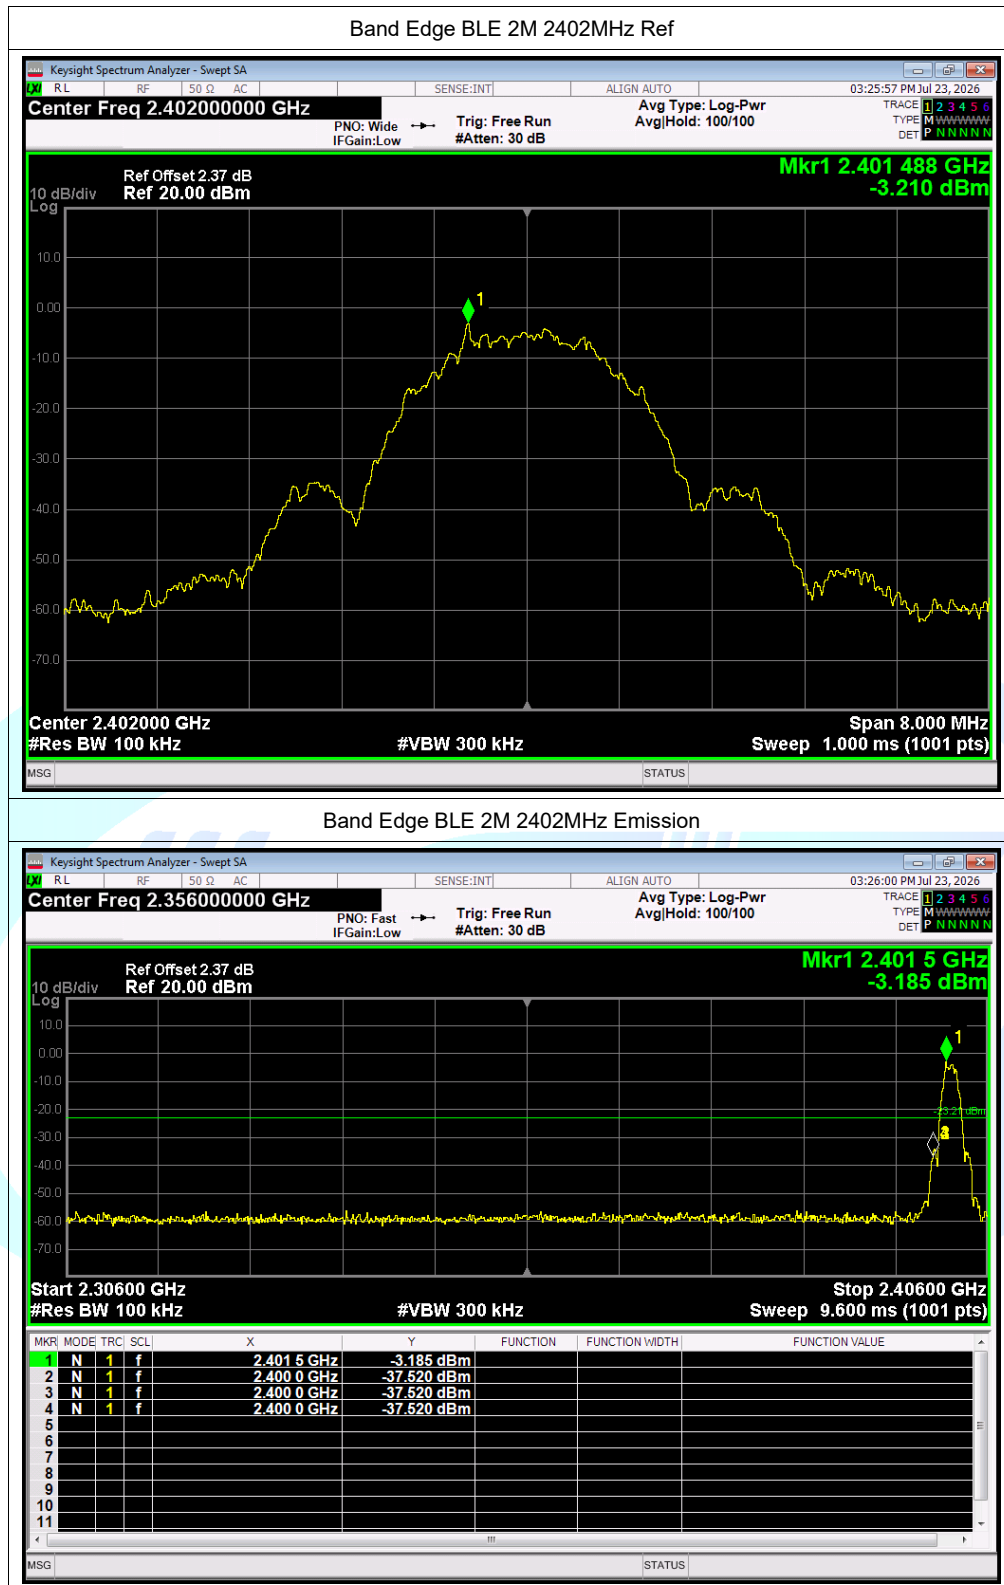

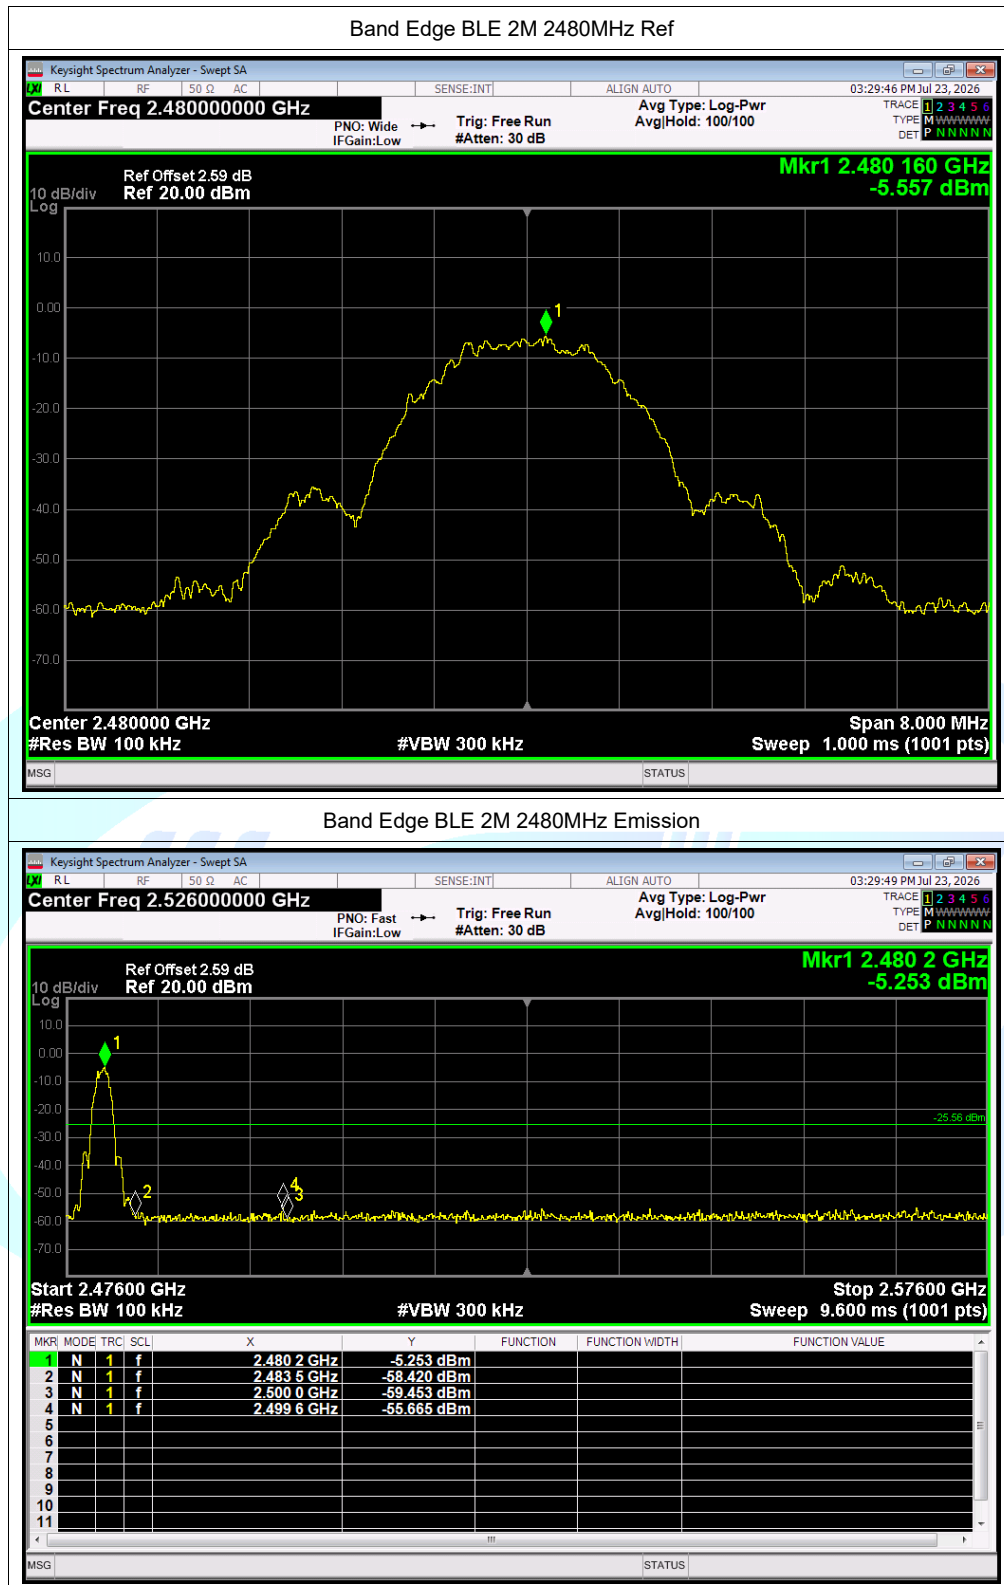


7 Conducted RF Spurious Emission

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-35.52	-20	Pass
	2440	-33.21	-20	Pass
	2480	-32.42	-20	Pass
BLE 2M	2402	-35.75	-20	Pass
	2440	-36.40	-20	Pass
	2480	-34.30	-20	Pass





Test Graphs


Tx. Spurious BLE 1M 2402MHz Ref

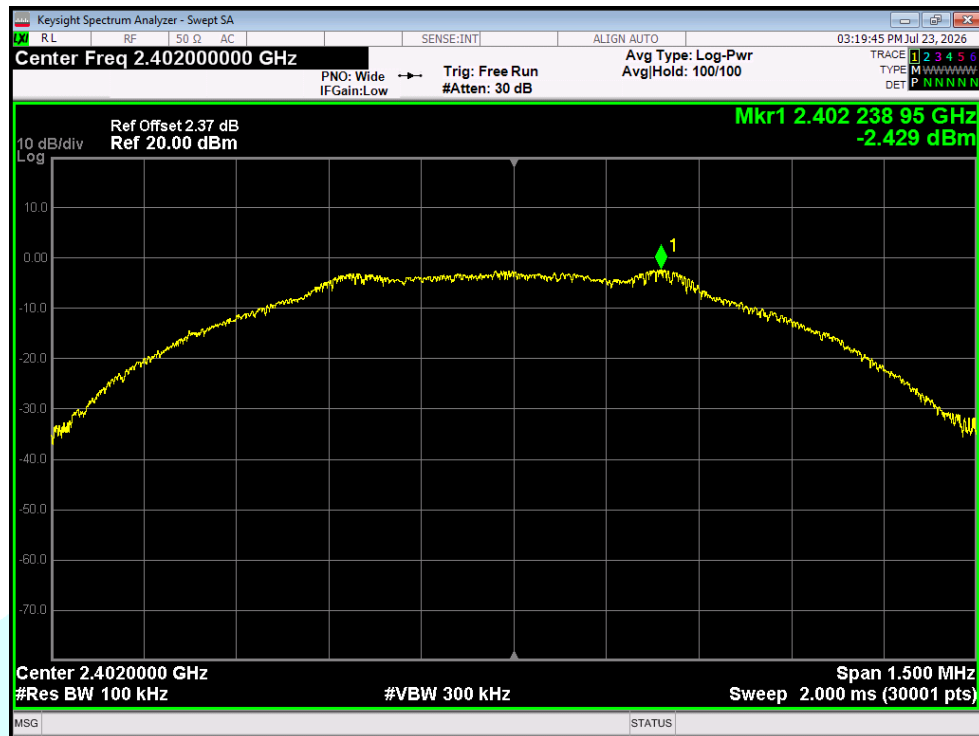



Tx. Spurious BLE 1M 2402MHz Emission

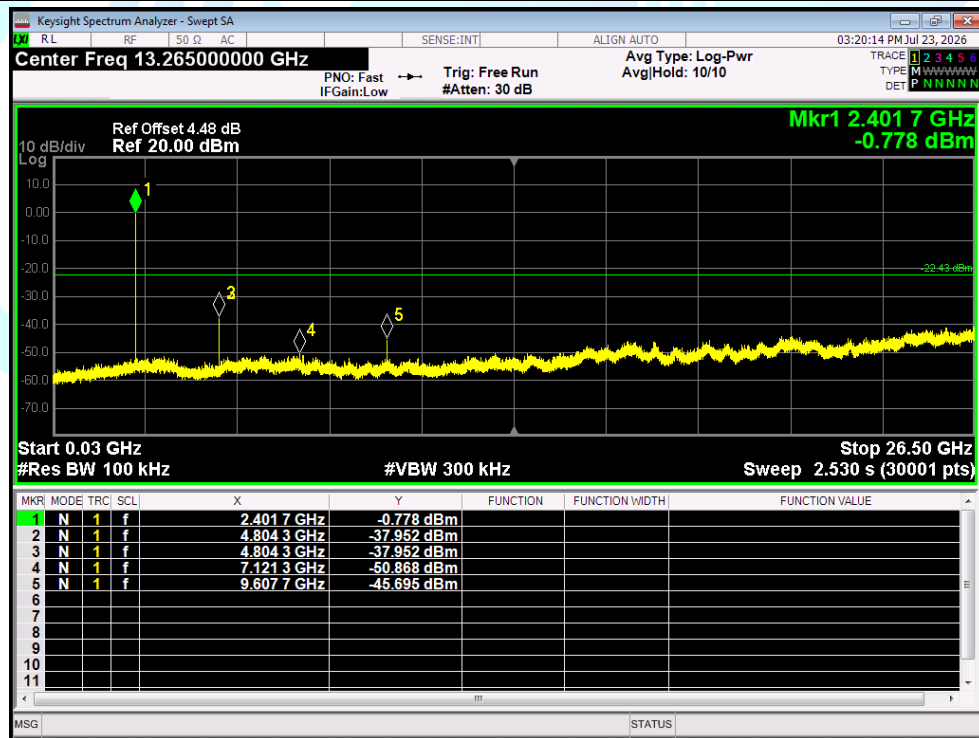


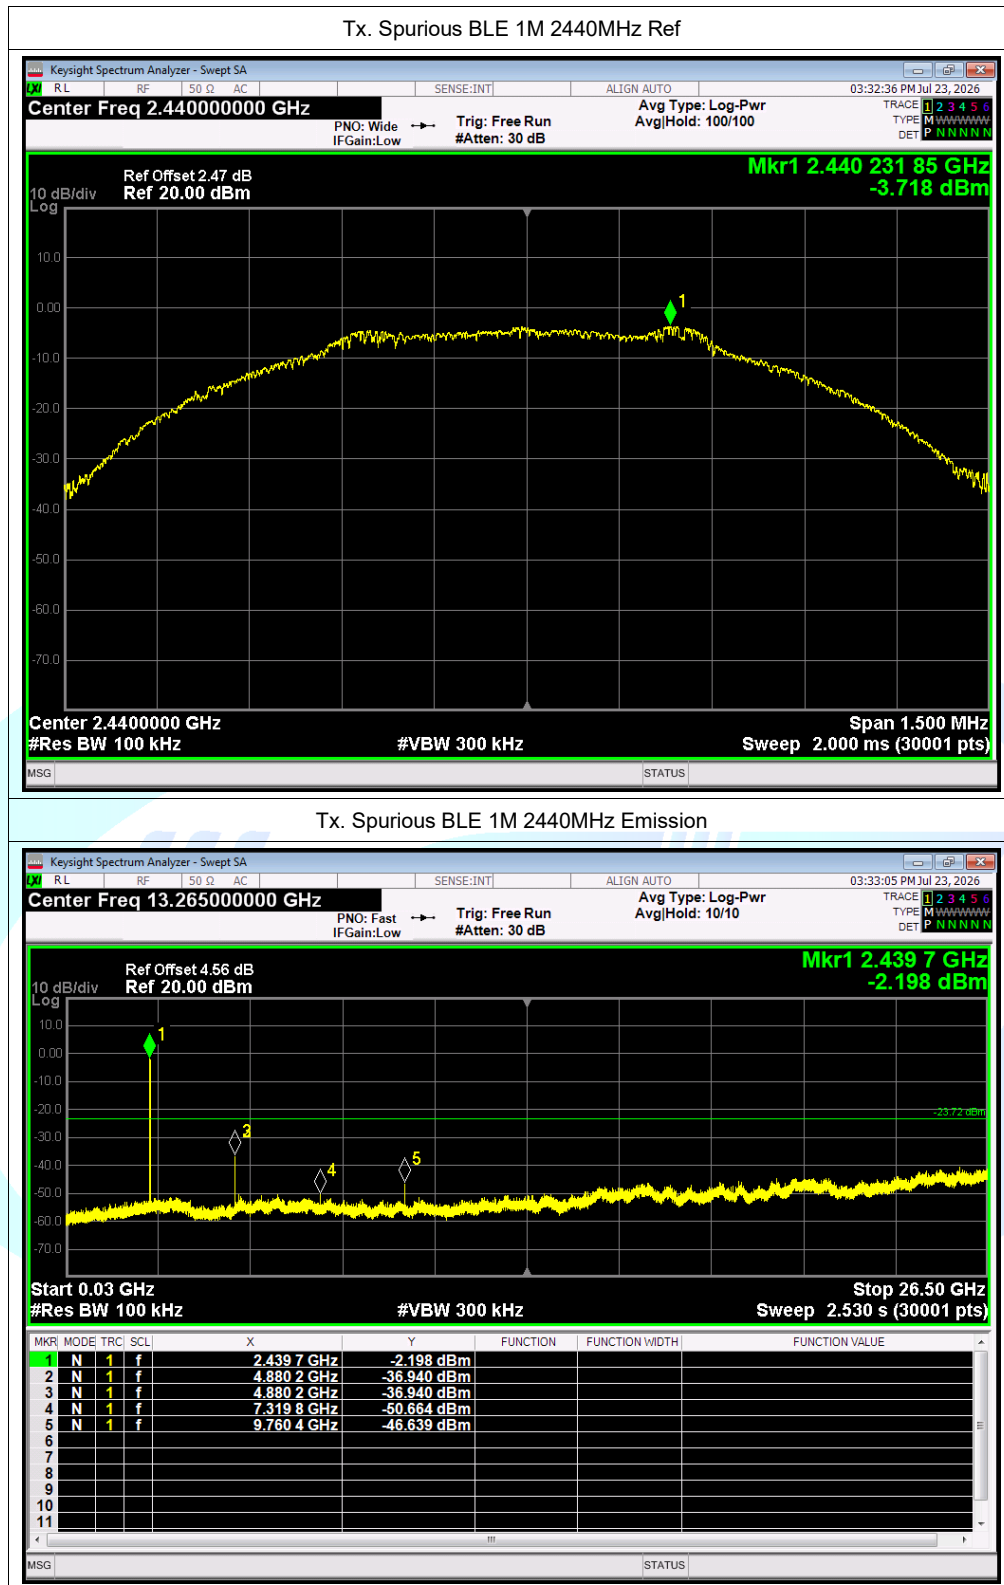

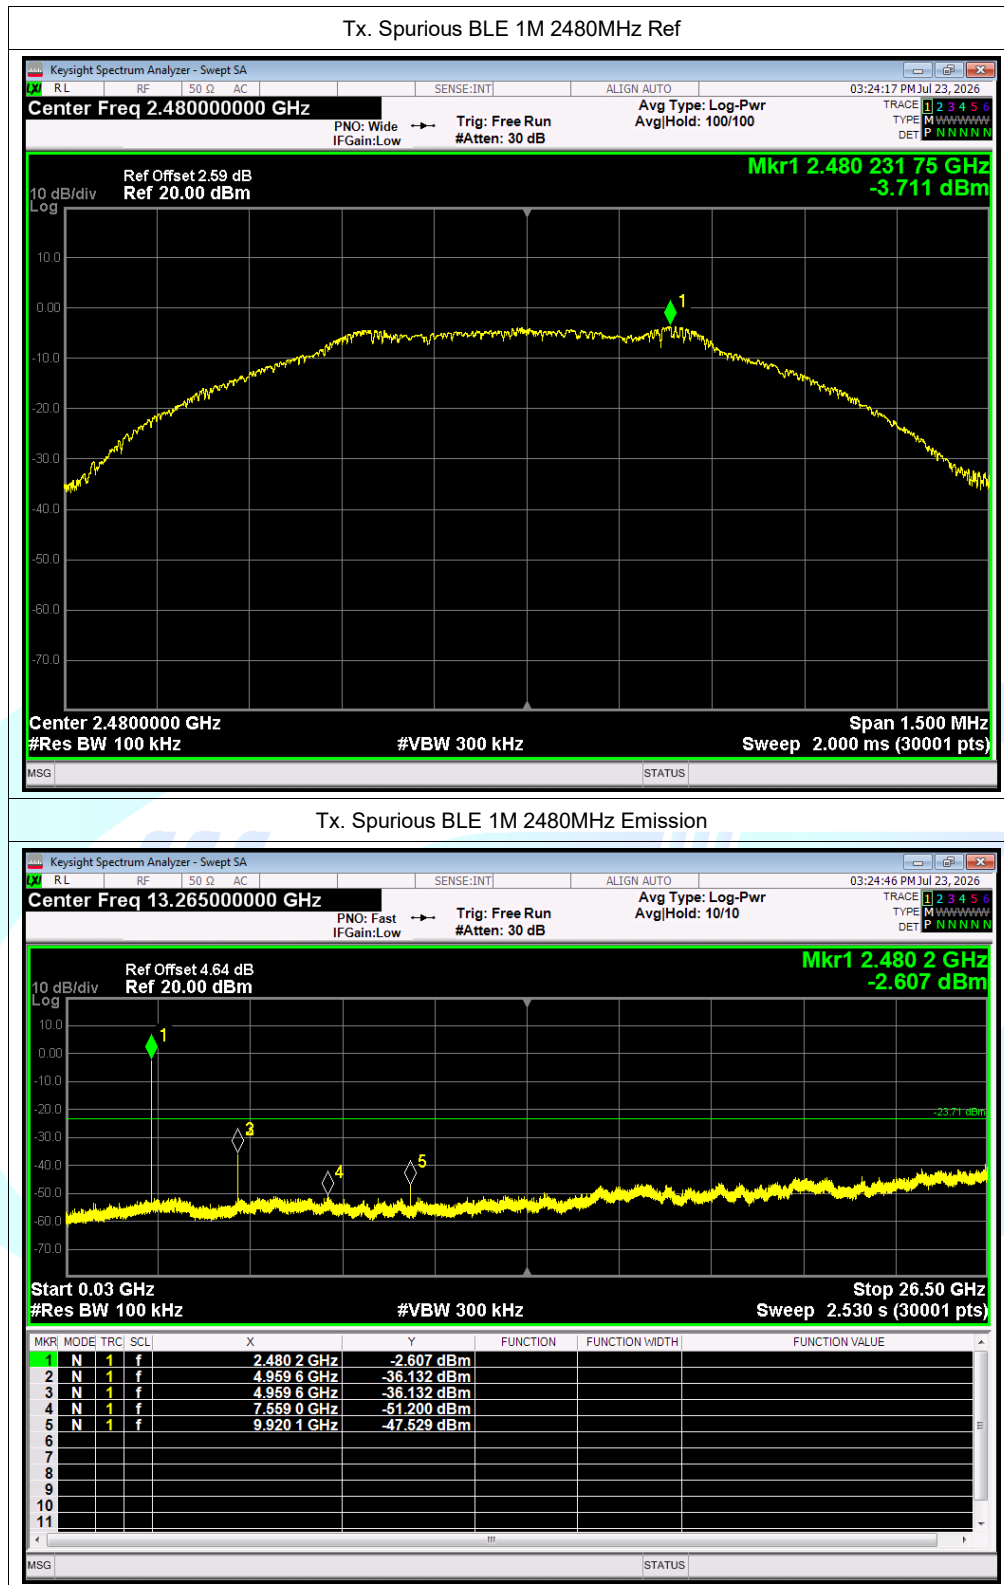

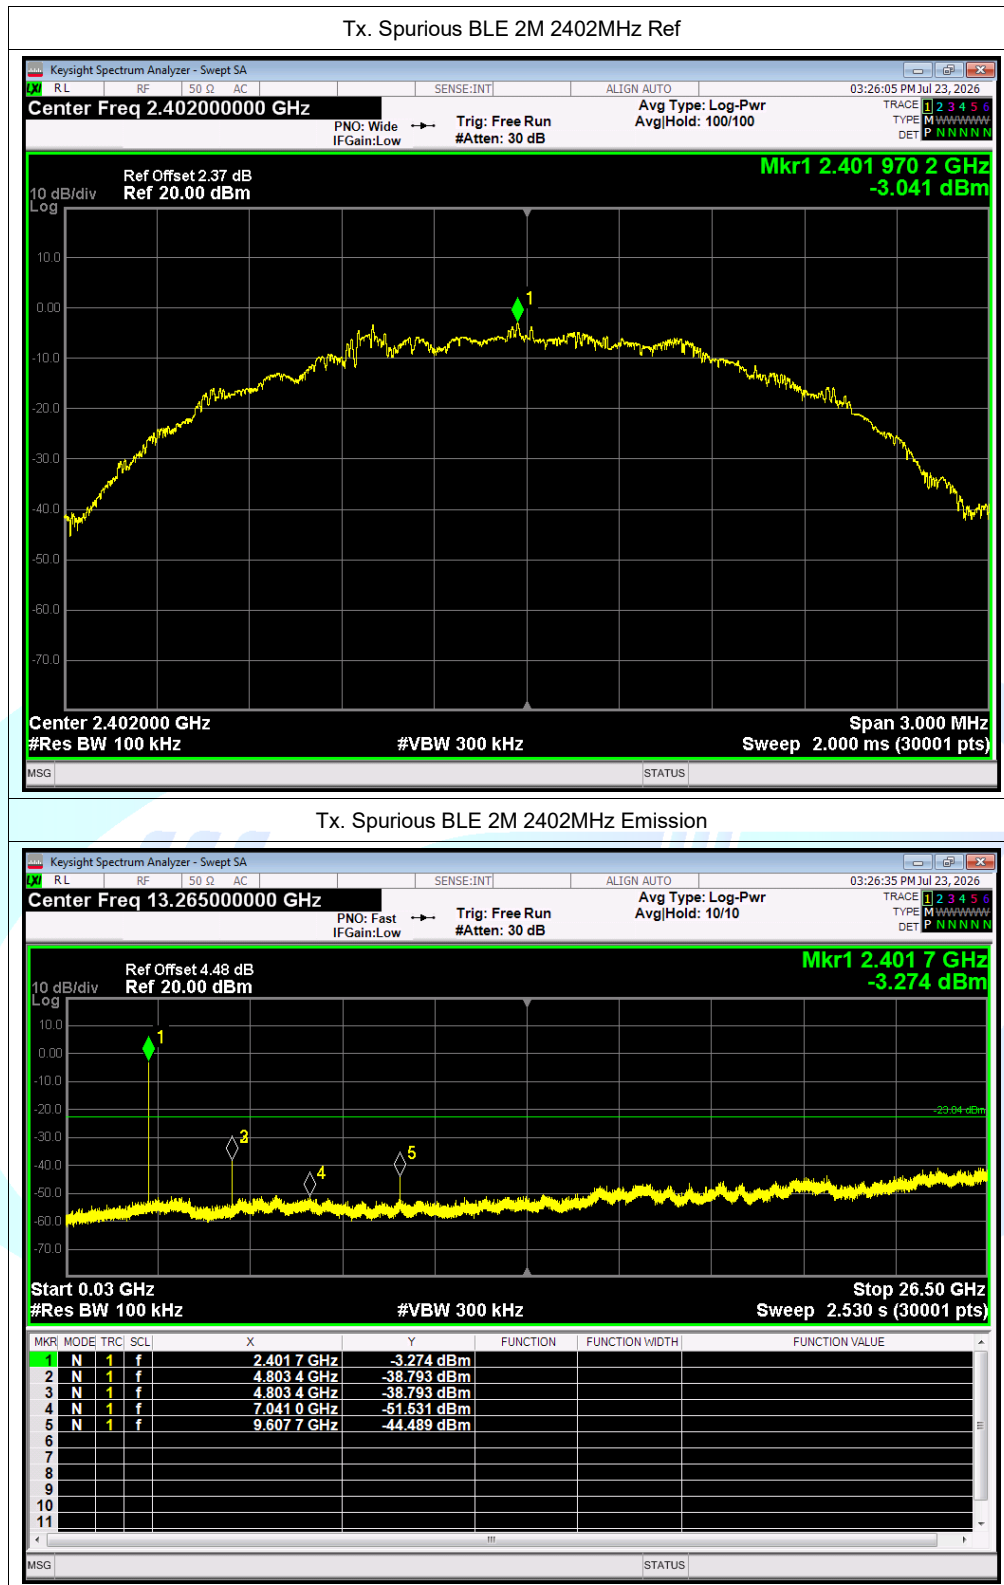

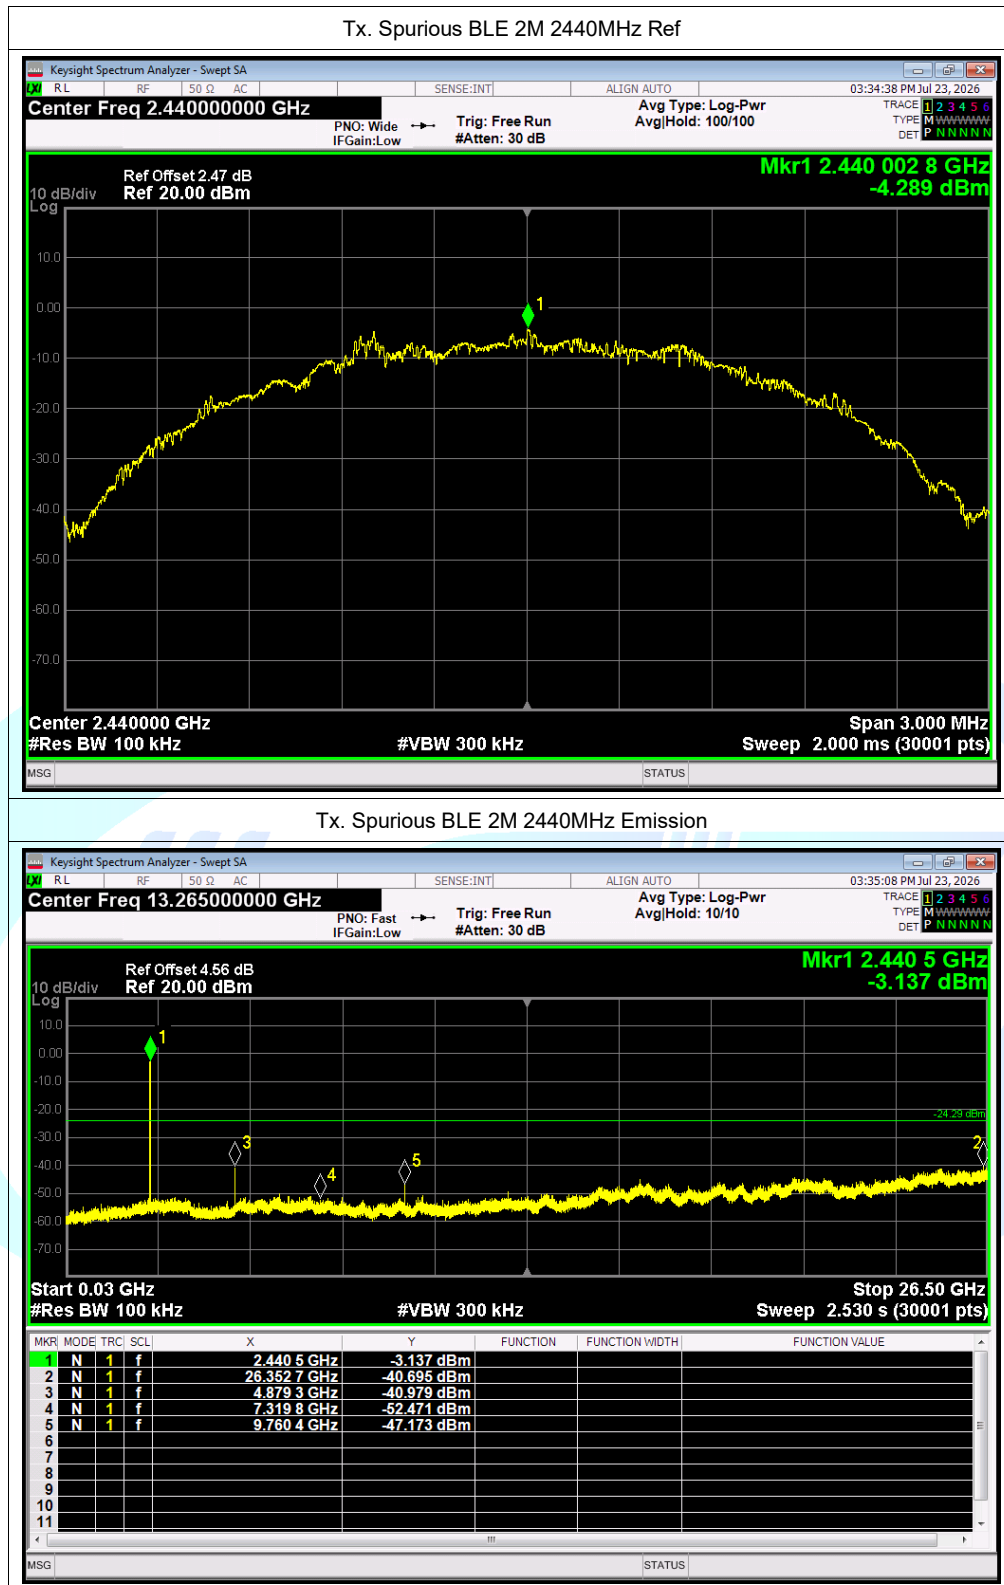

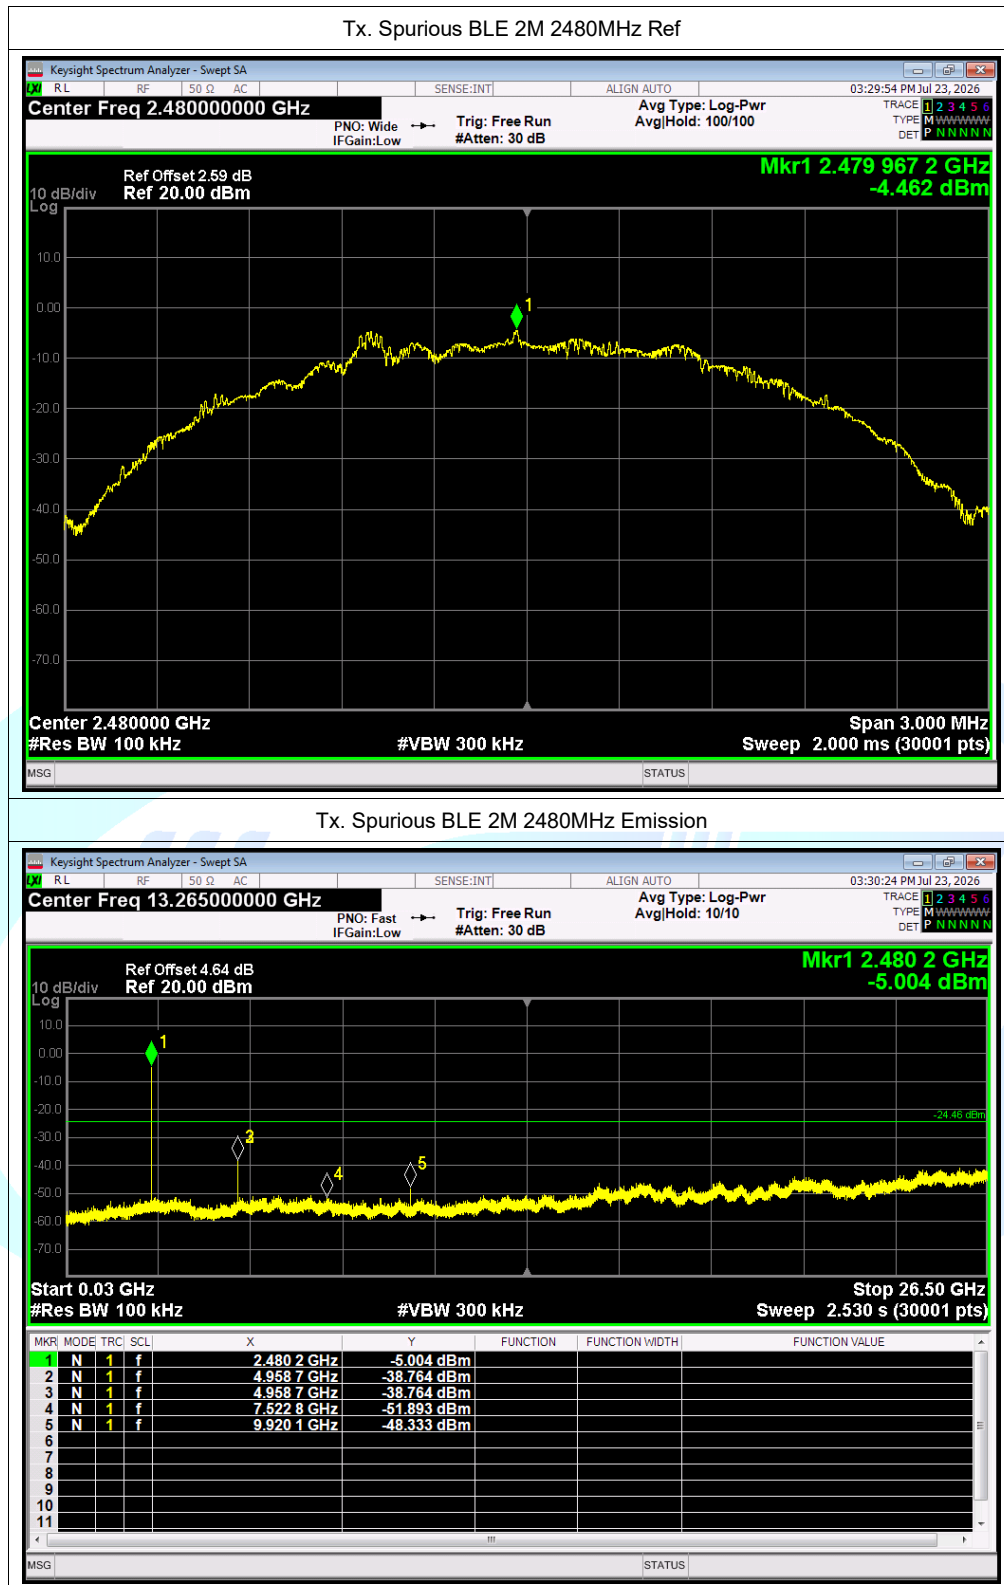

----END----