



RF Test Report

For

Applicant Name: Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address: B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
EUT Name: Smart Phone
Brand Name: DOOGEE
Model Number: M30
Series Model Number: M30 Pro, M30 Max, M30 Ultra, M30 Lite, M30 SE, M30 Power, M30 Play, M30 E, M40, M40 Pro, M40 Plus, M40 Pro Max, M40 Lite, M40 SE, M40 Turbo, M40 Play
FCC ID: 2AX4YM30

Issued By

Company name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Report number: BTF260410R00403
Test standards: FCC CFR Title 47 Part 15 Subpart C (§15.247)
Test conclusion: Pass
Date of sample receipt: 2026-01-28
Test date: 2026-01-28 to 2026-04-23
Date of issue: 2026-04-24
Test by: Sean He
Sean He / Tester

Prepared by: Chris Liu
Chris Liu / Project engineer

Approved by:



Ryan.CJ /EMC manager

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2026-04-24	Original
<i>Note: Once the revision has been made, then previous versions reports are invalid.</i>		

Table of Contents

1 INTRODUCTION	5
1.1 Laboratory Location	5
1.2 Laboratory Facility	5
1.3 Announcement	5
2 PRODUCT INFORMATION	6
2.1 Application Information	6
2.2 Manufacturer Information	6
2.3 Factory Information	6
2.4 General Description of Equipment under Test (EUT)	6
2.5 Technical Information	6
3 SUMMARY OF TEST RESULTS	8
3.1 Test Standards	8
3.2 Uncertainty of Test	8
3.3 Summary of Test Result	8
4 TEST CONFIGURATION	9
4.1 Test Equipment List	9
4.2 Test Auxiliary Equipment	10
4.3 Test Modes	10
4.4 Test software	10
4.5 Test Setup Block	11
5 EVALUATION RESULTS (EVALUATION)	13
5.1 Antenna requirement	13
5.1.1 Conclusion:	13
6 RADIO SPECTRUM MATTER TEST RESULTS (RF)	14
6.1 Conducted Emission at AC power line	14
6.1.1 E.U.T. Operation:	14
6.1.2 Test Setup	15
6.1.3 Test Data:	15
6.2 Occupied Bandwidth	17
6.2.1 E.U.T. Operation:	17
6.2.2 Test Setup	17
6.2.3 Test Data:	17
6.3 Maximum Conducted Output Power	18
6.3.1 E.U.T. Operation:	18
6.3.2 Test Setup	18
6.3.3 Test Data:	18
6.4 Power Spectral Density	19
6.4.1 E.U.T. Operation:	19
6.4.2 Test Setup	19
6.4.3 Test Data:	19
6.5 Emissions in non-restricted frequency bands	20
6.5.1 E.U.T. Operation:	20
6.5.2 Test Setup	20
6.5.3 Test Data:	20
6.6 Band edge emissions (Radiated)	21
6.6.1 E.U.T. Operation:	21

6.6.2 Test Setup	22
6.6.3 Test Data:	22
6.7 RADIATED EMISSIONS (below 1GHz)	26
6.7.1 E.U.T. Operation:	26
6.7.2 Test Setup	27
6.7.3 Test Data:	27
6.8 RADIATED EMISSIONS (above 1GHz)	29
6.8.1 E.U.T. Operation:	29
6.8.2 Test Setup	30
6.8.3 Test Data:	30
7 TEST SETUP PHOTOS	32
8 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	32

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**

BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 518915.

- **CNAS - Registration No.: CNAS L17568**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.

- **A2LA - Registration No.: 6660.01**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 Product Information

2.1 Application Information

Company Name:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China

2.2 Manufacturer Information

Company Name:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China

2.3 Factory Information

Company Name:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China

2.4 General Description of Equipment under Test (EUT)

EUT name	Smart Phone
Under test model name	M30
Series model name	M30 Pro, M30 Max, M30 Ultra, M30 Lite, M30 SE, M30 Power, M30 Play, M30 E, M40, M40 Pro, M40 Plus, M40 Pro Max, M40 Lite, M40 SE, M40 Turbo, M40 Play
Description of model name differentiation	There is no difference except the name of the model
Hardware Version	SC6202U_MB_V1.0.0
Software Version	DOOGEE-M30-EEA-Android16.0-20260112
Rating:	DC 3.84V from battery or DC 11V from Fast Charger

2.5 Technical Information

Operation frequency:	2412MHz ~ 2462MHz (for 802.11b/g/n-HT20) 2422MHz ~ 2452MHz (for 802.11n-HT40)
Channel numbers:	11 (for 802.11b/g/n-HT20), 7 (for 802.11n-HT40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	DSSS-DBPSK, DQPSK, CCK
Modulation technology: (IEEE 802.11g/802.11n)	OFDM-BPSK, QPSK, 16QAM, 64QAM
Fast Charger	Manufacturer: Shenzhen Huajin Electronics Co.,LTD Model: HJ-PD33W-US Input: 100-240V~50/60Hz 0.8A Output: 5.0V--- 3.0A 15.0W OR 9.0V--- 3.0A 27.0W OR 12.0V--- 2.75A 33.0W Max
Max. conducted output power Power:	11.55dBm
Antenna type:	PIFA Antenna
Antenna gain:	0.06dBi (declare by Applicant)

Antenna transmit mode:	SISO (1TX, 1RX)
------------------------	-----------------

Channel List:**For 802.11b/g/n(HT20)**

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	--	--

For 802.11n(HT40)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
--	--	4	2427MHz	7	2442MHz	--	--
--	--	5	2432MHz	8	2447MHz	--	--
3	2422MHz	6	2437MHz	9	2452MHz		

3 Summary of Test Results

3.1 Test Standards

Identity	Document Title
FCC CFR Title 47 Part 15 Subpart C (§15.247)	Intentional Radiators - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 +Errata to C63.10a-2024	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of The FCC Rules

3.2 Uncertainty of Test

Measurement	Value
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Supply voltages	±3 %
Time	±5 %
Conducted Emission for LISN (9kHz ~ 150kHz)	±2.97 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.45 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.80 dB
Radiated Emission (1GHz ~ 18GHz)	±4.82 dB

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.247	Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
Occupied Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in restricted frequency bands (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in restricted frequency bands (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass

4 Test Configuration

4.1 Test Equipment List

Radiated Emission Test					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI7	101032	2025/10/17	2026/10/16
Signal Analyzer	Rohde & Schwarz	FSQ40	100010	2025/10/17	2026/10/16
Log periodic antenna	Schwarzbeck	VULB 9168	01328	2025/10/18	2026/10/17
Preamplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9744	00246	2025/5/26	2026/5/25
BELOW-Cable	REBES Talent	9K1G	21101576	2025/8/23	2026/8/22
Horn Antenna	Schwarzbeck	BBHA9120D	2597	2025/10/18	2026/10/17
Preamplifier (1GHz ~ 18GHz)	Schwarzbeck	BBV9718D	00008	2025/5/26	2026/5/25
Preamplifier	TSTPASS	LNA10180G45	TS2215007	2025/5/26	2026/5/25
ABOVE-Cable	REBES Talent	1~18G	21101558	2025/8/23	2026/8/22
Horn Antenna	SCHWARZBECK	BBHA9170	1157	2025/10/18	2026/10/17
Low Noise Pre-amplifier	Sket	LNPA_1840G-50	SK2022032902	2025/10/17	2026/10/16
ABOVE-Cable2	REBES Talent	18~40G	21101686	2025/8/23	2026/8/22
ABOVE-Cable1	REBES Talent	18~40G	21101687	2025/8/23	2026/8/22
Test Software	Frad	EZ EMC	Version: FA-03A2 RE+		

Conducted Emission Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2025/10/17	2026/10/16
V-LISN	Schwarzbeck	NSLK 8127	01073	2025/8/23	2026/8/22
Coaxial Switcher	Schwarzbeck	CX210	CX210	/	/
Pulse Limiter	Schwarzbeck	VTSD 9561-F	00953	/	/
LISN-Cable	REBES Talent	LISN9K30M	21101580	2025/8/23	2026/8/22
Test Software	Frad	EZ EMC	Version: EMC-CON 3A1.1+		

LLAS radiated disturbance (9kHz-30MHz) Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2025/10/17	2026/10/16
Loop Antenna	ZHINAN	ZN30400	19049	2025/10/17	2026/10/16
LOOP-Cable	REBES Talent	LOOP9K30M	21101588	2025/8/23	2026/8/22
Test Software	Frad	EZ_EMC	Version: EMC-CON 3A1.1+		
Conducted test method					

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Cell Site Test Set	HP	8921A	US35010158	2025/10/17	2026/10/16
Spectrum Analyzer	Keysight	N9020A	MY50410020	2025/10/17	2026/10/16
ESG Vector Signal Generator	Agilent	E4438C	MY45094854	2025/10/17	2026/10/16
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2025/10/17	2026/10/16
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	161997	2025/10/17	2026/10/16
Programmable Constant Temperature And Humidity Test Chamber	ZZCKONG	ZZ-K02A	20210928007	2025/10/17	2026/10/16
DC Power Supply	Tongmen	etm-6050c	20211026123	2025/10/17	2026/10/16
RF Control Unit	Techy	TR1029-1	/	2025/10/17	2026/10/16
RF Sensor Unit	Techy	TR1029-2	/	2025/10/17	2026/10/16
RF shielding box	YinuoXin Electronics	50*50*50 cm	N/A	2025/5/26	2026/5/25
Test Software	TST Pass	/	Version: 2.0		

4.2 Test Auxiliary Equipment

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Fast Charger	Shenzhen Huajin Electronics Co.,LTD	HJ-PD33W-US	N/A	N/A
N/A	N/A	N/A	N/A	N/A	N/A

4.3 Test Modes


No.	Test Modes	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode.
TM4	802.11n(HT40) mode	Keep the EUT in 802.11n(HT40) transmitting mode.

4.4 Test software


Test software:	Engineering mode	Version:	DOOGEE-M30-EEA-Android16.0-20260112
Power Class:	Default		

4.5 Test Setup Block

1) Conducted emission measurement:

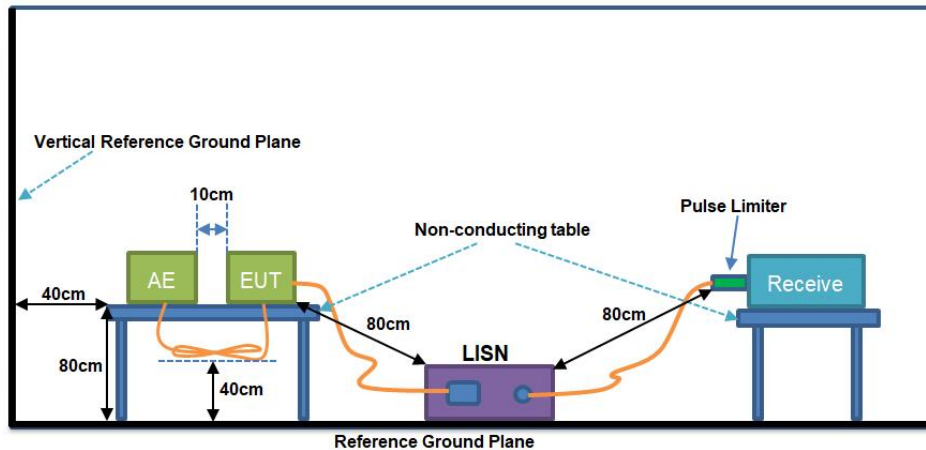


2) Conducted test method:

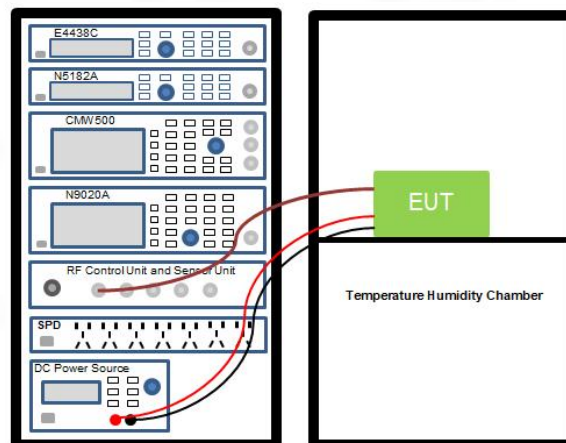

3) Radiated test method:

Below 1GHz

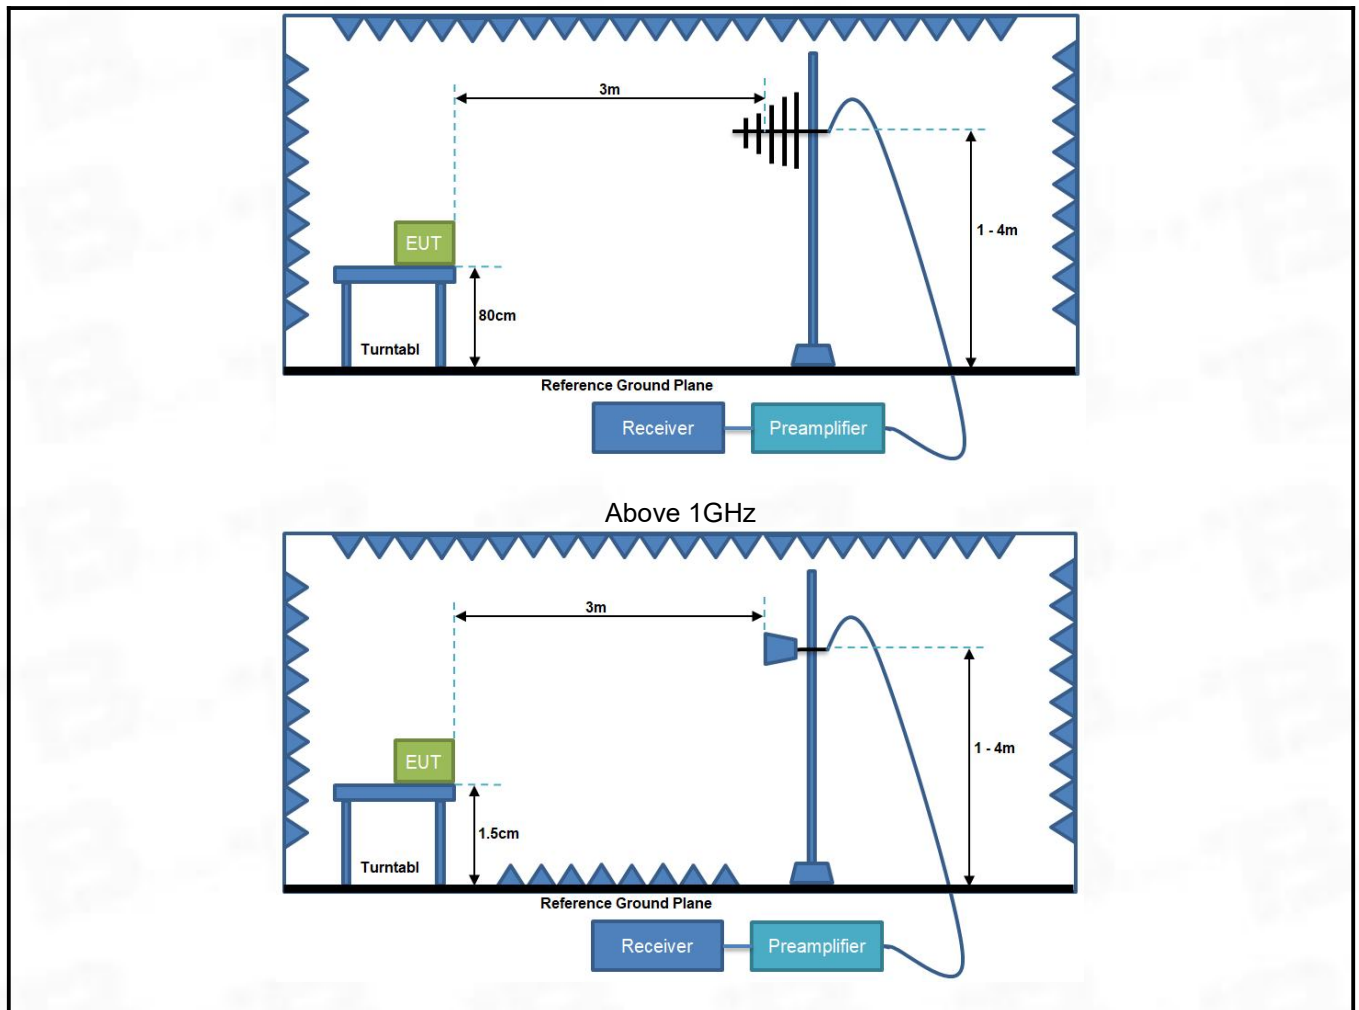


5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

5.1.1 Conclusion:

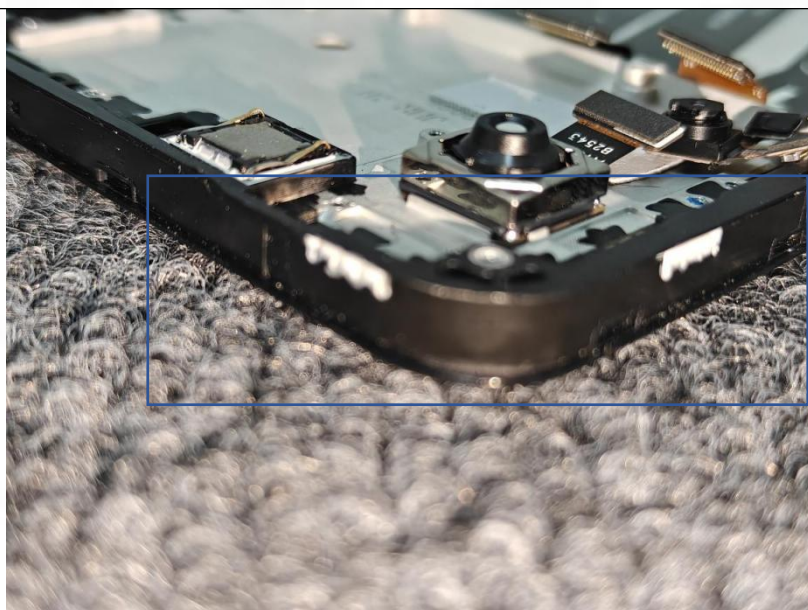

2.4GWIFI ANT

6 Radio Spectrum Matter Test Results (RF)

6.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Method:	Refer to ANSIC63.10-2020+Cor. 1-2023+C63.10a-2024 +Errata to C63.10a-2024 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			

6.1.1 E.U.T. Operation:

Operating Environment:	
Temperature:	22.6 °C
Humidity:	54.8 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz


6.1.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.1.3 Test Data:


All modes had been tested, only show the bellow worst mode data

TM1 / Line: Line / Band: 2.4G / BW: 20 / CH: M

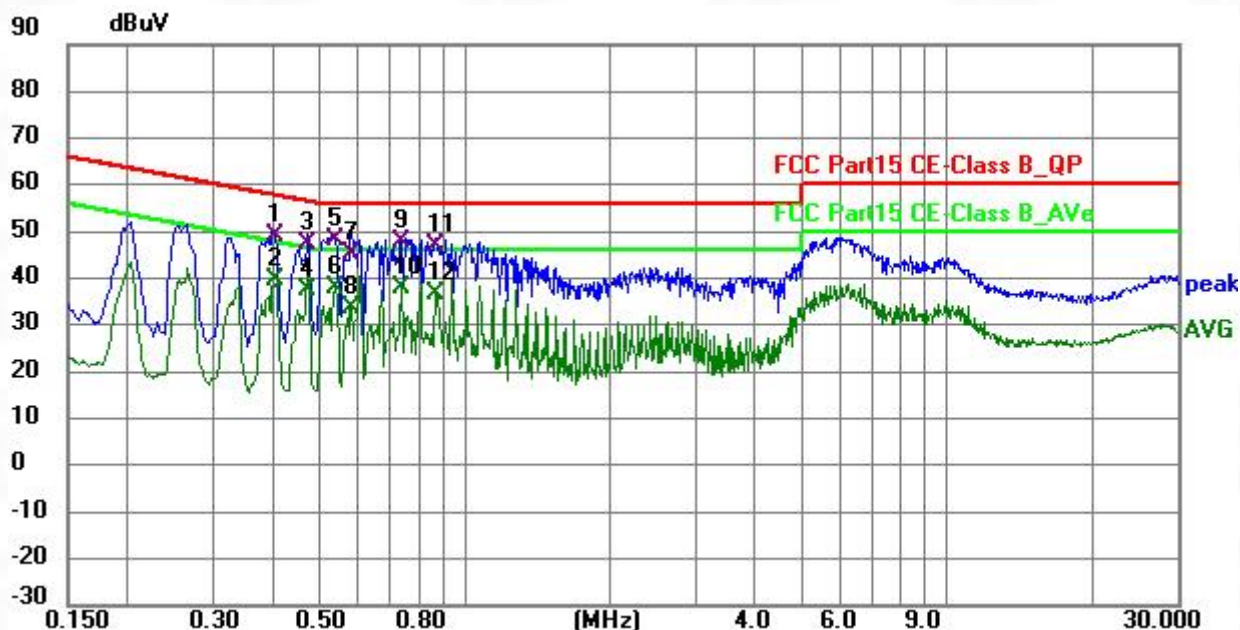

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4020	39.58	9.60	49.18	57.81	-8.63	QP	P	
2	0.4020	30.13	9.60	39.73	47.81	-8.08	AVG	P	
3	0.4700	37.95	9.61	47.56	56.51	-8.95	QP	P	
4	0.4700	27.86	9.61	37.47	46.51	-9.04	AVG	P	
5 *	0.5380	38.51	9.61	48.12	56.00	-7.88	QP	P	
6	0.5380	28.24	9.61	37.85	46.00	-8.15	AVG	P	
7	0.5820	35.81	9.61	45.42	56.00	-10.58	QP	P	
8	0.5820	24.16	9.61	33.77	46.00	-12.23	AVG	P	
9	0.7380	38.05	9.61	47.66	56.00	-8.34	QP	P	
10	0.7380	28.45	9.61	38.06	46.00	-7.94	AVG	P	
11	0.8740	37.26	9.63	46.89	56.00	-9.11	QP	P	
12	0.8740	26.84	9.63	36.47	46.00	-9.53	AVG	P	

TM1 / Line: Neutral / Band: 2.4G / BW: 20 / CH: M

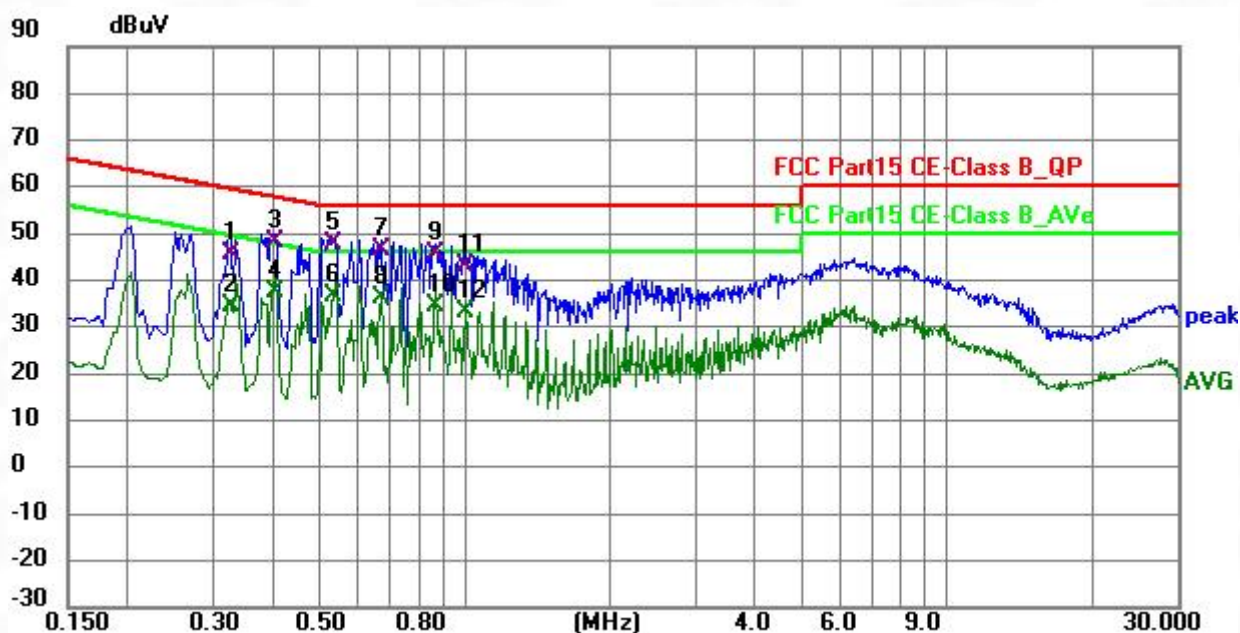

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3260	35.91	9.62	45.53	59.55	-14.02	QP	P	
2	0.3260	24.73	9.62	34.35	49.55	-15.20	AVG	P	
3	0.4020	38.77	9.63	48.40	57.81	-9.41	QP	P	
4	0.4020	27.88	9.63	37.51	47.81	-10.30	AVG	P	
5 *	0.5340	37.97	9.67	47.64	56.00	-8.36	QP	P	
6	0.5340	27.14	9.67	36.81	46.00	-9.19	AVG	P	
7	0.6700	36.71	9.65	46.36	56.00	-9.64	QP	P	
8	0.6700	26.36	9.65	36.01	46.00	-9.99	AVG	P	
9	0.8740	36.03	9.65	45.68	56.00	-10.32	QP	P	
10	0.8740	24.68	9.65	34.33	46.00	-11.67	AVG	P	
11	1.0060	33.49	9.66	43.15	56.00	-12.85	QP	P	
12	1.0060	23.53	9.66	33.19	46.00	-12.81	AVG	P	

Note:Margin=Level-Limit=Reading+factor-Limit

6.2 Occupied Bandwidth

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Procedure:	a) Set RBW = 100 kHz for DTS Bandwidth, RBW = 500 kHz for occupied channel Bandwidth b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.2.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa

6.2.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.2.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.3 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum Average conducted output power
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Procedure:	The EUT was directly connected to the tonscond test system and antenna output port as show in the block diagram below. The maximum conducted output power was performed in accordance with method 11.9.1.3(for Average power)of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

6.3.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa

6.3.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.3.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.4 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa

6.4.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.4.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.5 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Procedure:	ANSIC63.10-2020+Cor. 1-2023+C63.10a-2024 +Errata to C63.10a-2024 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz

6.5.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.5.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.6 Band edge emissions (Radiated)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSIC63.10-2020+Cor. 1-2023+C63.10a-2024 +Errata to C63.10a-2024 section 6.10.5.2		

6.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.6 °C
Humidity:	45.3 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz

6.6.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.6.3 Test Data:

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX B Mode Channel 01			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	74.87	-21.47	53.40	74.00	-20.60	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	79.40	-26.12	53.28	74.00	-20.72	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.73	-21.47	53.26	74.00	-20.74	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	78.96	-26.12	52.84	74.00	-21.16	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX B Mode Channel 11			
1	2483.5	H	78.47	-25.29	53.18	74.00	-20.82	Peak
2	2483.5	H	--	-25.35	--	54.00	--	Avg
1	2483.5	V	78.35	-25.29	53.06	74.00	-20.94	Peak
2	2483.5	V	--	-25.35	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX G Mode Channel 01			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	75.01	-21.47	53.54	74.00	-20.46	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	79.07	-26.12	52.95	74.00	-21.05	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.99	-21.47	53.52	74.00	-20.48	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	79.55	-26.12	53.43	74.00	-20.57	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX G Mode Channel 11			
1	2483.5	H	78.64	-25.29	53.35	74.00	-20.65	Peak
2	2483.5	H	--	-25.35	--	54.00	--	Avg
1	2483.5	V	79.03	-25.29	53.74	74.00	-20.26	Peak
2	2483.5	V	--	-25.35	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX N(HT20) Mode Channel 01			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	74.34	-21.47	52.87	74.00	-21.13	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	79.45	-26.12	53.33	74.00	-20.67	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.71	-21.47	53.24	74.00	-20.76	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	78.80	-26.12	52.68	74.00	-21.32	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX N(HT20) Mode Channel 11			
1	2483.5	H	79.00	-25.29	53.71	74.00	-20.29	Peak
2	2483.5	H	--	-25.35	--	54.00	--	Avg
1	2483.5	V	78.42	-25.29	53.13	74.00	-20.87	Peak
2	2483.5	V	--	-25.35	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX N(HT40) Mode Channel 03			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	74.65	-21.47	53.18	74.00	-20.82	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	78.84	-26.12	52.72	74.00	-21.28	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.67	-21.47	53.20	74.00	-20.80	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	78.69	-26.12	52.57	74.00	-21.43	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX N(HT40) Mode Channel 09			
1	2483.5	H	78.67	-25.29	53.38	74.00	-20.62	Peak
2	2483.5	H	--	-25.35	--	54.00	--	Avg
1	2483.5	V	78.39	-25.29	53.10	74.00	-20.90	Peak
2	2483.5	V	--	-25.35	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

6.7 RADIATED EMISSIONS (below 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSIC63.10-2020+Cor. 1-2023+C63.10a-2024 +Errata to C63.10a-2024 section 6.6.4		

6.7.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.6 °C
Humidity:	45.3 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz


6.7.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.7.3 Test Data:


All modes had been tested, only show the bellow worst mode data

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: M

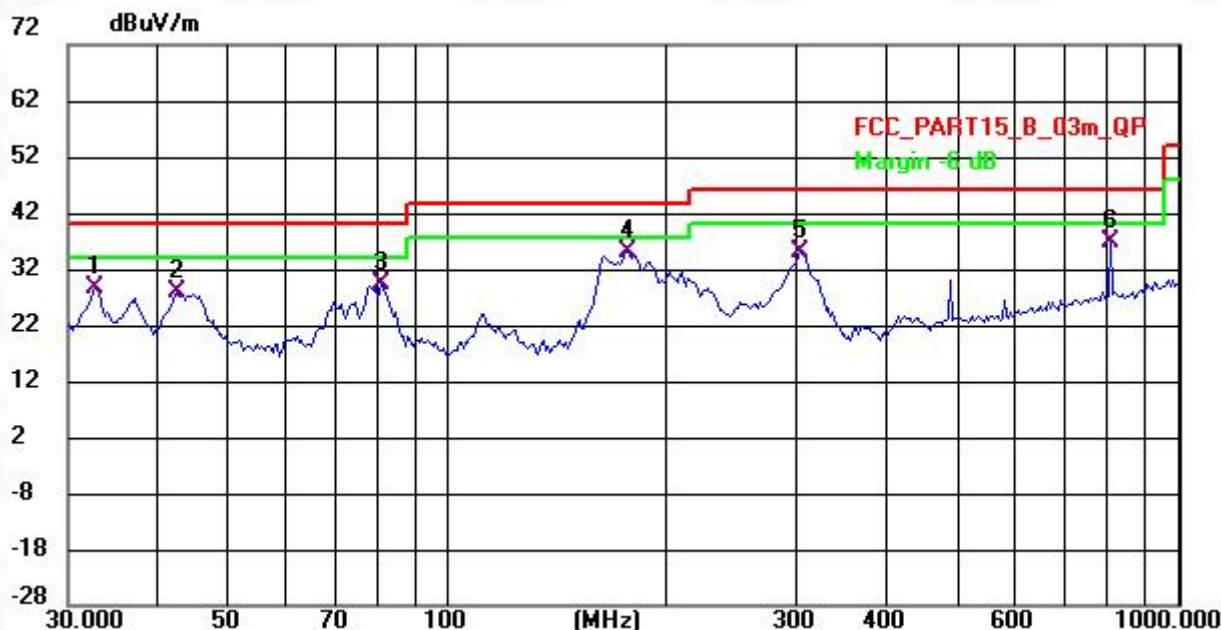

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	32.6395	44.68	-16.21	28.47	40.00	-11.53	QP	200	247	P	
2	42.3313	43.19	-15.41	27.78	40.00	-12.22	QP	100	5	P	
3	80.8041	48.60	-19.25	29.35	40.00	-10.65	QP	200	108	P	
4 *	176.2748	50.74	-15.83	34.91	43.50	-8.59	QP	100	316	P	
5	302.8193	49.40	-14.47	34.93	46.00	-11.07	QP	100	211	P	
6	809.9238	41.01	-4.12	36.89	46.00	-9.11	QP	200	339	P	

TM1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: M

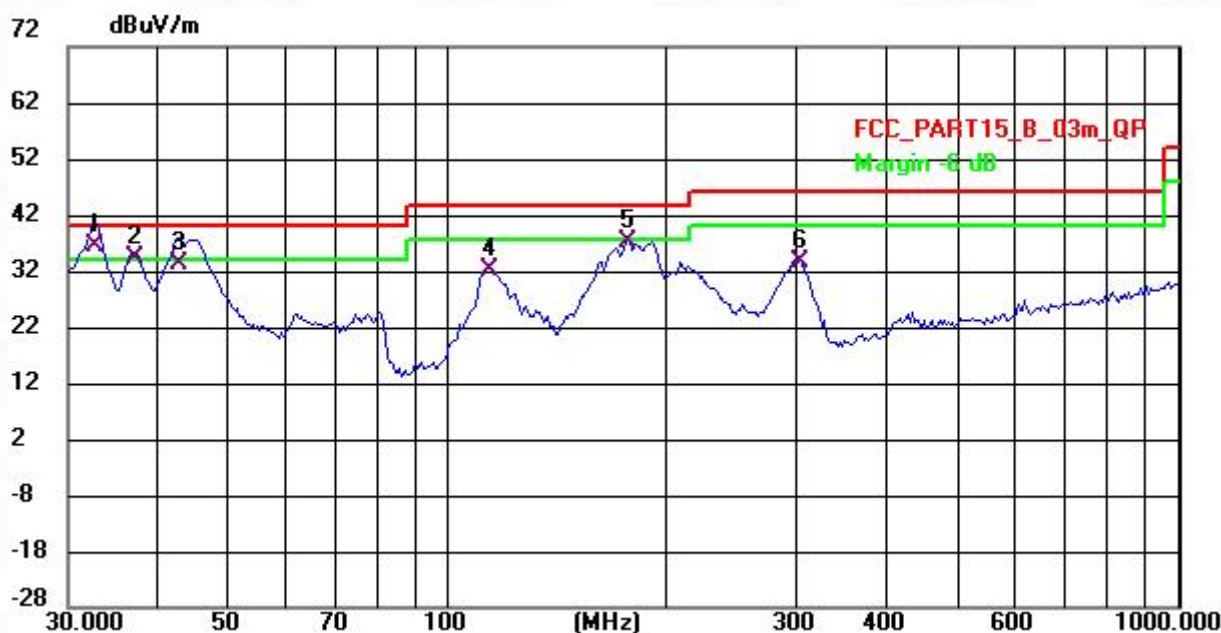

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	32.7690	52.64	-16.20	36.44	40.00	-3.56	QP	100	189	P	
2 !	37.0405	50.04	-15.66	34.38	40.00	-5.62	QP	100	50	P	
3	42.8939	48.55	-15.43	33.12	40.00	-6.88	QP	200	13	P	
4	114.0184	48.62	-16.55	32.07	43.50	-11.43	QP	200	272	P	
5	176.2748	52.84	-15.83	37.01	43.50	-6.49	QP	100	205	P	
6	302.8193	48.12	-14.47	33.65	46.00	-12.35	QP	100	153	P	

Note: Margin = Level - Limit = Reading + factor - Limit

6.8 RADIATED EMISSIONS (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSIC63.10-2020+Cor. 1-2023+C63.10a-2024 +Errata to C63.10a-2024 section 6.6.4		

6.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.6 °C
Humidity:	45.3 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz

6.8.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.8.3 Test Data:

Remark: During the test, pre-scan 802.11b, 802.11g, 802.11n20, 802.11n40 mode, found 802.11b was worse case mode. The report only reflects the test data of worst mode.

Channel 1 / 2412 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4824	H	53.95	51.3	-1.89	52.06	49.41	74	54	-21.94
7236	H	44.05	---	7.9	51.95	---	74	54	-22.05
---	H	---	---	---	---	---	---	---	---
4824	V	55.69	---	-1.89	53.80	---	74	54	-20.20
7236	V	42.75	---	7.9	50.65	---	74	54	-23.35
---	V	---	---	---	---	---	---	---	---

Channel 6 / 2437 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4874	H	55.15	52.31	-1.57	53.58	50.74	74	54	-20.42
7311	H	41.76	---	8.2	49.96	---	74	54	-24.04
---	H	---	---	---	---	---	---	---	---
4874	V	54.18	---	-1.57	52.61	---	74	54	-21.39
7311	V	43.82	---	8.2	52.02	---	74	54	-21.98
---	V	---	---	---	---	---	---	---	---

Channel 11 / 2462 MHz									
Frequency	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4924	H	53.62	52	-1.28	52.34	50.72	74	54	-21.66
7386	H	41.21	---	9.3	50.51	---	74	54	-23.49
---	H	---	---	---	---	---	---	---	---
4924	V	54.89	---	-1.28	53.61	---	74	54	-20.39
7386	V	43.69	---	9.3	52.99	---	74	54	-21.01
---	V	---	---	---	---	---	---	---	---

7 Test Setup Photos

Please refer to the Appendix I Test Setup Photos

8 EUT Constructional Details (EUT Photos)

Please refer to the Appendix II External Photos & Appendix III Internal Photos



Test Report Number: BTF260410R00403



BTF Testing Lab (Shenzhen) Co., Ltd.

101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --