




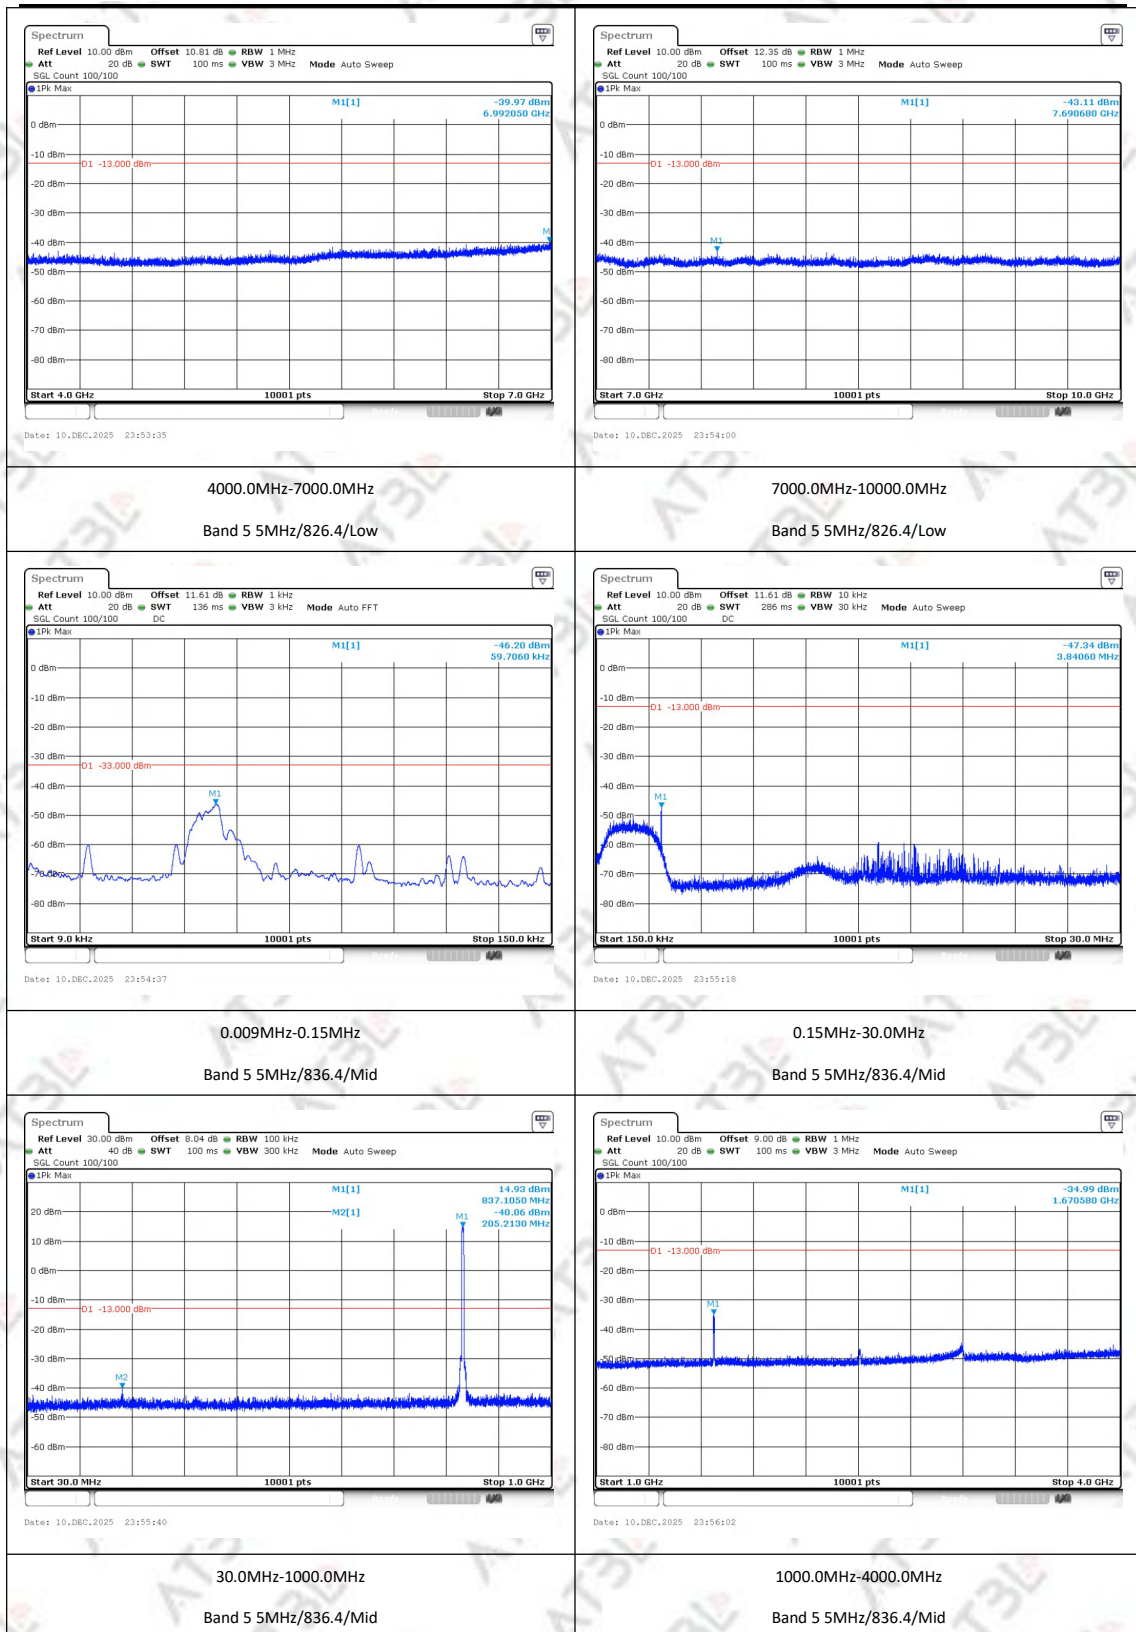

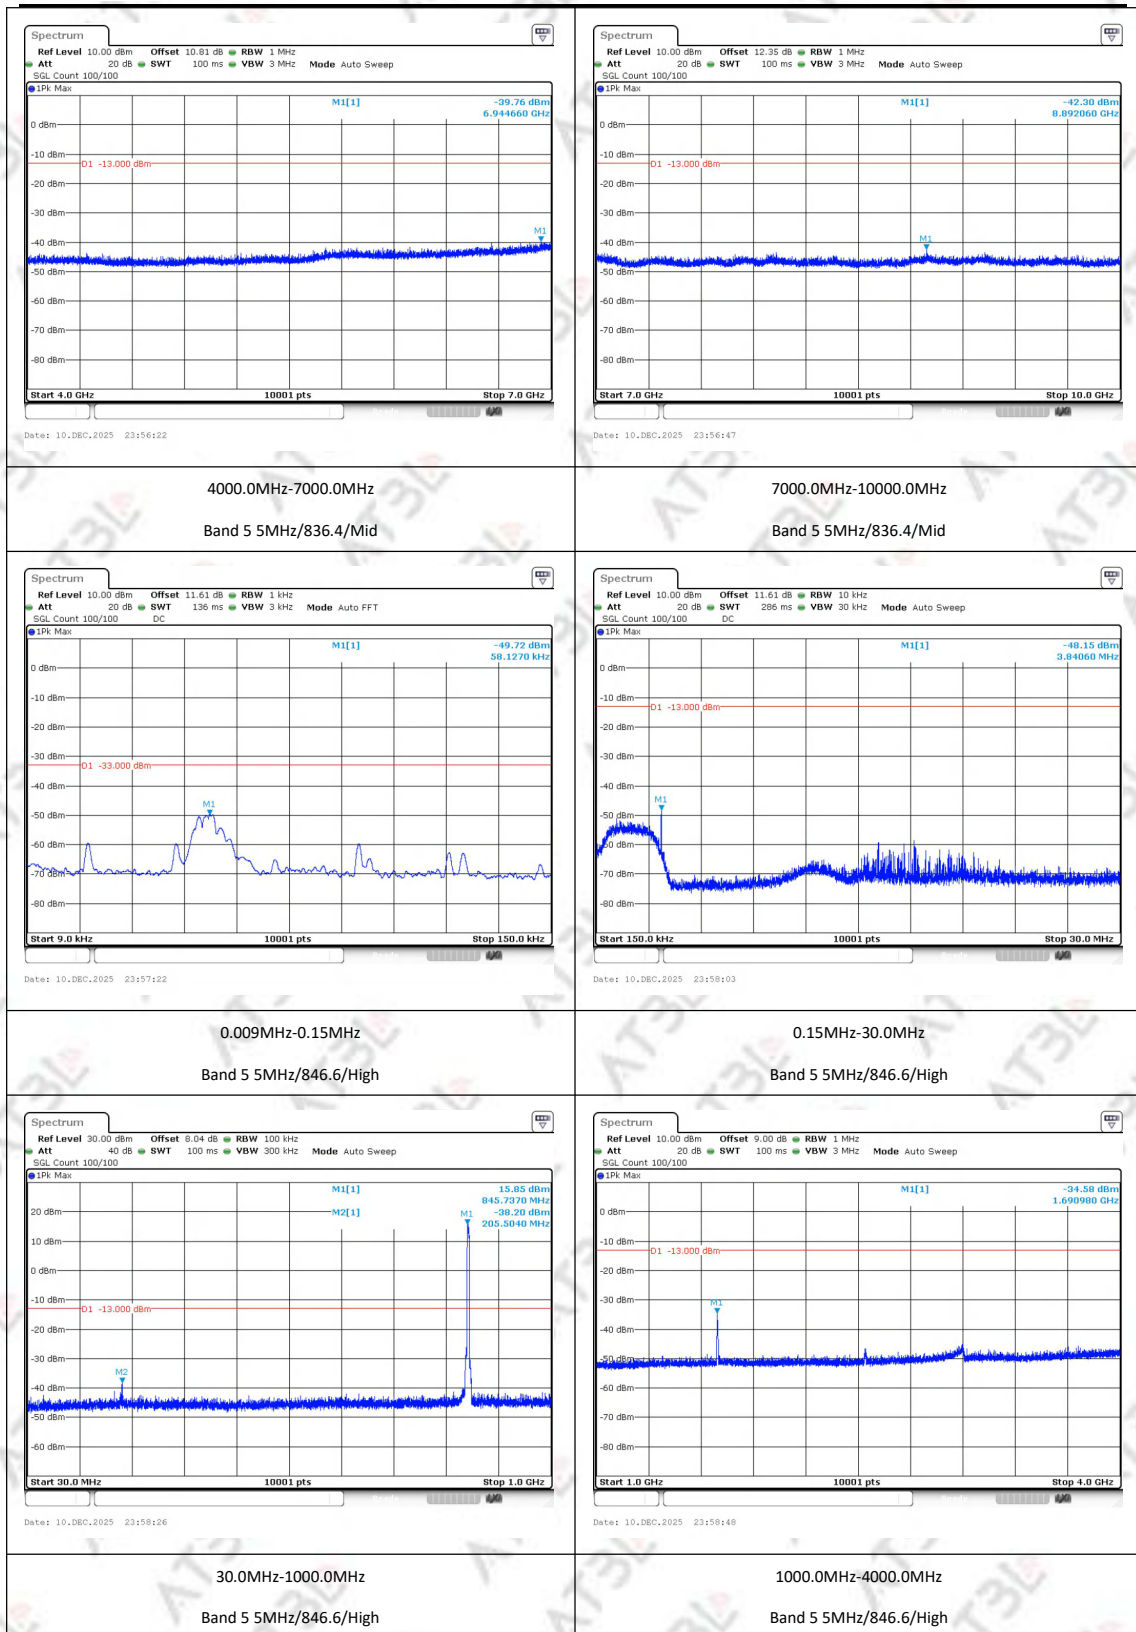

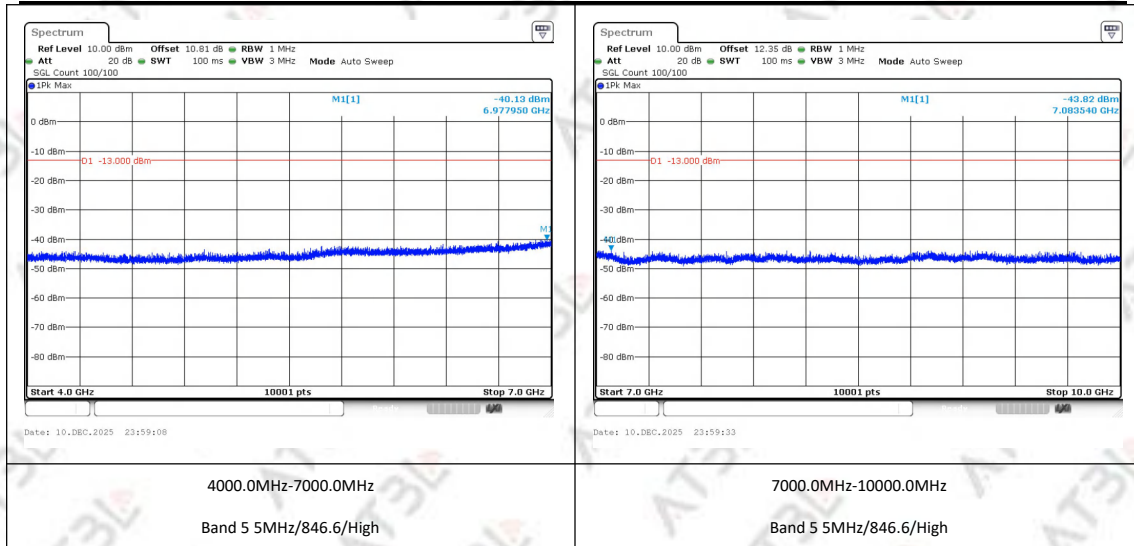

G6.Frequency Stability

Band	Channel	Freq (MHz)	Deviation (Hz)	Deviation (ppm)	Limit(ppm)	Verdict	Environment
2	9262	1852.4	0.36	0.000193	±2.5	PASS	TN/VN
2	9400	1880.0	0.24	0.000126	±2.5	PASS	TN/VN
2	9538	1907.6	-0.84	-0.000442	±2.5	PASS	TN/VN
4	1312	1712.4	1.18	0.000689	±2.5	PASS	TN/VN
4	1412	1732.4	1.31	0.000756	±2.5	PASS	TN/VN
4	1513	1752.6	-0.4	-0.000229	±2.5	PASS	TN/VN
5	4132	826.4	-0.84	-0.001013	±2.5	PASS	TN/VN
5	4182	836.4	1.31	0.001565	±2.5	PASS	TN/VN
5	4233	846.6	-0.87	-0.001022	±2.5	PASS	TN/VN
2	9262	1852.4	-0.54	-0.00029	±2.5	PASS	TH/VN
2	9400	1880.0	-0.62	-0.000331	±2.5	PASS	TH/VN
2	9538	1907.6	-0.86	-0.00045	±2.5	PASS	TH/VN
4	1312	1712.4	-1.87	-0.001094	±2.5	PASS	TH/VN
4	1412	1732.4	3.58	0.002064	±2.5	PASS	TH/VN
4	1513	1752.6	-2.79	-0.001592	±2.5	PASS	TH/VN
5	4132	826.4	-0.62	-0.000744	±2.5	PASS	TH/VN
5	4182	836.4	0.32	0.000385	±2.5	PASS	TH/VN
5	4233	846.6	-0.75	-0.000887	±2.5	PASS	TH/VN
2	9262	1852.4	-1.65	-0.000892	±2.5	PASS	TN/VH
2	9400	1880.0	0.32	0.00017	±2.5	PASS	TN/VH
2	9538	1907.6	2.0	0.001046	±2.5	PASS	TN/VH
4	1312	1712.4	-3.35	-0.001959	±2.5	PASS	TN/VH
4	1412	1732.4	3.79	0.002188	±2.5	PASS	TN/VH
4	1513	1752.6	-1.2	-0.000686	±2.5	PASS	TN/VH
5	4132	826.4	-2.37	-0.002873	±2.5	PASS	TN/VH
5	4182	836.4	0.32	0.000383	±2.5	PASS	TN/VH
5	4233	846.6	-0.29	-0.000338	±2.5	PASS	TN/VH
2	9262	1852.4	5.07	0.002738	±2.5	PASS	TN/VL
2	9400	1880.0	7.77	0.004136	±2.5	PASS	TN/VL
2	9538	1907.6	1.67	0.000877	±2.5	PASS	TN/VL
4	1312	1712.4	-5.02	-0.002932	±2.5	PASS	TN/VL
4	1412	1732.4	-3.49	-0.002015	±2.5	PASS	TN/VL
4	1513	1752.6	2.32	0.001322	±2.5	PASS	TN/VL
5	4132	826.4	-1.63	-0.001973	±2.5	PASS	TN/VL
5	4182	836.4	0.32	0.000383	±2.5	PASS	TN/VL
5	4233	846.6	-2.09	-0.002467	±2.5	PASS	TN/VL
2	9262	1852.4	-1.67	-0.000904	±2.5	PASS	TH/VH
2	9400	1880.0	-3.18	-0.001693	±2.5	PASS	TH/VH
2	9538	1907.6	-2.33	-0.001222	±2.5	PASS	TH/VH

4	1312	1712.4	-9.02	-0.005267	±2.5	PASS	TH/VH
4	1412	1732.4	-6.64	-0.003831	±2.5	PASS	TH/VH
4	1513	1752.6	2.22	0.001269	±2.5	PASS	TH/VH
5	4132	826.4	-1.85	-0.002233	±2.5	PASS	TH/VH
5	4182	836.4	-1.08	-0.001291	±2.5	PASS	TH/VH
5	4233	846.6	0.98	0.001157	±2.5	PASS	TH/VH
2	9262	1852.4	-2.0	-0.001081	±2.5	PASS	TH/VH
2	9400	1880.0	-1.57	-0.000837	±2.5	PASS	TH/VH
2	9538	1907.6	1.79	0.000937	±2.5	PASS	TH/VH
4	1312	1712.4	8.25	0.00482	±2.5	PASS	TH/VH
4	1412	1732.4	-2.45	-0.001416	±2.5	PASS	TH/VH
4	1513	1752.6	0.32	0.000183	±2.5	PASS	TH/VH
5	4132	826.4	-1.22	-0.00148	±2.5	PASS	TH/VH
5	4182	836.4	-0.39	-0.000462	±2.5	PASS	TH/VH
5	4233	846.6	2.1	0.002484	±2.5	PASS	TH/VH
2	9262	1852.4	-1.62	-0.000877	±2.5	PASS	TL/VH
2	9400	1880.0	-1.94	-0.001031	±2.5	PASS	TL/VH
2	9538	1907.6	0.32	0.000168	±2.5	PASS	TL/VH
4	1312	1712.4	1.49	0.000869	±2.5	PASS	TL/VH
4	1412	1732.4	-3.27	-0.001887	±2.5	PASS	TL/VH
4	1513	1752.6	2.27	0.001294	±2.5	PASS	TL/VH
5	4132	826.4	-1.65	-0.001999	±2.5	PASS	TL/VH
5	4182	836.4	0.81	0.000966	±2.5	PASS	TL/VH
5	4233	846.6	1.35	0.001597	±2.5	PASS	TL/VH
2	9262	1852.4	2.1	0.001135	±2.5	PASS	TL/VL
2	9400	1880.0	2.45	0.001301	±2.5	PASS	TL/VL
2	9538	1907.6	0.39	0.000206	±2.5	PASS	TL/VL
4	1312	1712.4	6.47	0.003776	±2.5	PASS	TL/VL
4	1412	1732.4	0.32	0.000185	±2.5	PASS	TL/VL
4	1513	1752.6	-1.19	-0.000682	±2.5	PASS	TL/VL
5	4132	826.4	-2.33	-0.002822	±2.5	PASS	TL/VL
5	4182	836.4	1.0	0.001197	±2.5	PASS	TL/VL
5	4233	846.6	1.06	0.00125	±2.5	PASS	TL/VL
2	9262	1852.4	1.22	0.000656	±2.5	PASS	TL/VN
2	9400	1880.0	1.44	0.000769	±2.5	PASS	TL/VN
2	9538	1907.6	2.28	0.001196	±2.5	PASS	TL/VN
4	1312	1712.4	5.44	0.003174	±2.5	PASS	TL/VN
4	1412	1732.4	-0.89	-0.000512	±2.5	PASS	TL/VN
4	1513	1752.6	-3.48	-0.001988	±2.5	PASS	TL/VN
5	4132	826.4	-0.39	-0.000476	±2.5	PASS	TL/VN
5	4182	836.4	1.09	0.001308	±2.5	PASS	TL/VN
5	4233	846.6	1.02	0.001208	±2.5	PASS	TL/VN