

TEST REPORT

Product Name : Wireless Access Point
Model Number : RG-RAP6202(G)
FCC ID : 2AX5J-RAP6202G

Prepared for : Ruijie Networks Co., Ltd.
Address : Building 19, Juyuanzhou Industrial Park, No.618 Jinshan Road, Cangshan District, Fuzhou, Fujian, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2211290160W00202R
Date(s) of Tests : December 08, 2022 to December 30, 2022
Date of issue : December 30, 2022

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION.....	4
2 EUT TECHNICAL DESCRIPTION.....	5
3 SUMMARY OF TEST RESULT.....	7
4 TEST METHODOLOGY.....	8
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	8
4.2 MEASUREMENT EQUIPMENT USED.....	8
4.3 DESCRIPTION OF TEST MODES.....	9
5 FACILITIES AND ACCREDITATIONS.....	14
5.1 FACILITIES.....	14
5.2 LABORATORY ACCREDITATIONS AND LISTINGS.....	14
6 TEST SYSTEM UNCERTAINTY.....	15
7 SETUP OF EQUIPMENT UNDER TEST.....	16
7.1 RADIO FREQUENCY TEST SETUP.....	16
7.2 RADIO FREQUENCY TEST SETUP.....	16
7.3 CONDUCTED EMISSION TEST SETUP.....	18
7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	19
7.5 SUPPORT EQUIPMENT.....	19
8 TEST REQUIREMENTS.....	20
8.1 BANDWIDTH MEASUREMENT.....	20
8.2 MAXIMUM CONDUCTED OUTPUT POWER.....	161
8.3 MAXIMUM PEAK POWER DENSITY.....	227
8.4 UNDESIRABLE RADIATED SPURIOUS EMISSION.....	292
8.5 POWER LINE CONDUCTED EMISSIONS.....	329
8.6 ANTENNA APPLICATION.....	332

Modified Information

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2211290160W00202R	/	Original Report

1 TEST RESULT CERTIFICATION

Applicant : Ruijie Networks Co., Ltd.
Address : Building 19, Juyuanzhou Industrial Park, No.618 Jinshan Road, CangshanDistrict, Fuzhou, Fujian, China
Manufacturer : Ruijie Networks Co., Ltd.
Address : Building 19, Juyuanzhou Industrial Park, No.618 Jinshan Road, CangshanDistrict, Fuzhou, Fujian, China
EUT : Wireless Access Point
Model Name : RG-RAP6202(G)
Trademark :  ,  ,  |  ,  ,  | 

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	PASS

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : December 08, 2022 to December 30, 2022

Prepared by : 
Una Yu/Editor

Reviewer : 
Joe Xia/Supervisor

Approved & Authorized Signer : 
Lisa Wang/Manager

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product	Wireless Access Point
Model Number	RG-RAP6202(G)
Wifi Type	☒ UNII-1: 5150MHz-5250MHz Band ☒ UNII-2A: with 5250MHz-5350MHz Band ☒ UNII-2C: with 5470MHz-5725MHz Band ☒ UNII-3 with 5725MHz-5850MHz Band
WLAN Supported	☒ 802.11a ☒ 802.11n(20MHz channel bandwidth) ☒ 802.11n(40MHz channel bandwidth) ☒ 802.11ac(20MHz channel bandwidth) ☒ 802.11ac(40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)
Data Rate	802.11a:54/48/36/24/18/12/9/6Mbps 802.11n:up to 600 Mbps 802.11ac:up to 1.733Gbps
Modulation	☒ OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n ☒ OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac
Frequency Range	☒ UNII-1: 5150MHz-5250MHz Band ☒ 5180-5240MHz for 802.11a ☒ 5180-5240MHz for 802.11n(HT20) ☒ 5180-5240MHz for 802.11ac(HT20) ☒ 5190-5230MHz for 802.11n(HT40) ☒ 5190-5230MHz for 802.11ac(HT40) ☒ 5210MHz for 802.11ac(HT80) ☒ UNII-2A: with 5250MHz-5350MHz Band ☒ 5260-5320MHz for 802.11a ☒ 5260-5320MHz for 802.11n(HT20) ☒ 5260-5320MHz for 802.11ac(HT20) ☒ 5270-5310MHz for 802.11n(HT40) ☒ 5270-5310MHz for 802.11ac(HT40) ☒ 5290MHz for 802.11ac(HT80) ☒ UNII-2C: with 5470MHz-5725MHz Band ☒ 5500-5700MHz for 802.11a ☒ 5500-5700MHz for 802.11n(HT20) ☒ 5500-5700MHz for 802.11ac(HT20) ☒ 5510-5670MHz for 802.11n(HT40) ☒ 5510-5670MHz for 802.11ac(HT40) ☒ 5530-5610MHz for 802.11ac(HT80) ☒ UNII-3 with 5725MHz-5850MHz Band ☒ 5745-5825MHz for 802.11a ☒ 5745-5825MHz for 802.11n(HT20) ☒ 5745-5825MHz for 802.11ac(HT20) ☒ 5755-5795MHz for 802.11n(HT40)

	☒ 5755-5795MHz for 802.11ac(HT40) ☒ 5775MHz for 802.11ac(HT80)	
TPC Function	☒ Applicable	☐ Not Applicable
Antenna Type	Internal Antenna	
Antenna Gain	5150-5250MHz: Ant 1: 5.9dBi, Ant 2: 5.5dBi 5250-5350MHz: Ant 1: 5.9dBi, Ant 2: 5.5dBi 5470-5725MHz: Ant 1: 5.9dBi, Ant 2: 5.5dBi 5725-5850MHz: Ant 1: 5.9dBi, Ant 2: 5.5dBi	
Power Supply	DC 48V by POE adapter DC 12V by Power adapter	
Temperature Range	-30°C ~65°C	

Note: for more details, please refer to the user's manual of the EUT.



3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 15.407 (e)	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (a)	Peak Power Spectral Density	PASS	
15.407 (b)	Radiated Spurious Emission	PASS	
15.407 (b)(6) 15.207	Power Line Conducted Emission	PASS	
15.407(a) 15.203	Antenna Application	PASS	
NOTE1: N/A (Not Applicable). NOTE2: According to FCC OET KDB 789033 D2 General UNII Test Procedures New Rules v02r01, In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AX5J-RAP6202G filing to comply with Section 15.247 of the FCC Part 15, Subpart E Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:
 FCC 47 CFR Part 2, Subpart J
 FCC 47 CFR Part 15, Subpart E
 FCC KDB 789033 D2 General UNII Test Procedures New Rules v02r01

4.2 MEASUREMENT EQUIPMENT USED

For Conducted Emission Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101384	2022/5/14	1Year
AMN	Rohde & Schwarz	ENV216	101161	2022/5/14	1Year

For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	2022/5/14	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2022/5/14	1Year
Pre-Amplifier	Lunar EM	LNA30M3G-25	J10100000070	2022/5/14	1Year
Pre-Amplifier	HP	8447F	2944A07999	2022/5/14	1Year
Pre-Amplifier	SKET	LNPA_0118G-45	SK2019051801	2022/5/14	1Year
Pre-Amplifier	Lunar EM	LNA1G18-48	J1011131010001	2022/5/14	1Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2021/6/12	2 Year
Bilog Antenna	Schwarzbeck	VULB9163	659	2021/8/22	2 Year
Bilog Antenna	Schwarzbeck	VULB9163	712	2021/7/5	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	2021/6/12	2 Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2021/6/12	2 Year
Wideband Radio Communication Tester	R&S	CMW500	140822	2022/5/15	1Year
Thermometer	Hegao	HTC-1	\	2022/5/17	1Year

For Other Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Signal Analyzer	Agilent	N9010A	MY53470879	2022/5/14	1Year
Vector Signal Generator	Agilent	N5182B	MY53050878	2022/5/14	1Year
Analog Signal Generator	Agilent	N5171B	MY53050553	2022/5/14	1Year
Power Meter	Agilent	PS-X10-100	\	2022/5/15	1Year
Blocking Box	THEDA	AD211	TW5451140	2022/5/14	1Year
Switchgroup	THEDA	ETF-025(VASC6)	TW5451008	N/A	N/A
MIMO Matrix Switch	THEDA	4P5TM18	TW5451009	N/A	N/A
Thermometer	Hegao	HTC-1	\	2022/5/17	1Year

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

☒ Wifi 5G with U-NII - 1

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190				
46	5230				

Frequency and Channel list for 802.11ac (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	48	5240

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

Test Frequency and channel for 802.11ac (HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

☒ **Wifi 5G with U-NII -2C**

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	116	5580	132	5660
104	5520	120	5600	136	5680
108	5540	124	5620	140	5700
112	5560	128	5640		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510	118	5590	134	5670
110	5550	126	5630		

Frequency and Channel list for 802.11ac (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
106	5530	122	5610		

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	116	5580	140	5700

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510			134	5670

Test Frequency and channel for 802.11ac (HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
106	5530				

☒ **Wifi 5G with U-NII -2A**

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
---------	-----------------	---------	-----------------	---------	-----------------

52	5260	60	5300		
56	5280	64	5320		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270				
62	5310				

Frequency and Channel list for 802.11ac (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	56	5280	64	5320

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270	N/A	N/A	62	5310

Test Frequency and channel for 802.11ac (HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290				

☒ Wifi 5G with U-NII -3

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825
153	5765	161	5805		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755				
159	5795				

Frequency and Channel list for 802.11ac (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755			159	5795

Test Frequency and channel for 802.11ac (HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

Multi-antenna correlation:

☒	Transmit Signals are Correlated
	Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
☐	All Transmit Signals are Completely Uncorrelated
	Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi

5150-5250MHz: Ant 1: 5.9dBi, Ant 2: 5.5dBi

5250-5350MHz: Ant 1: 5.9dBi, Ant 2: 5.5dBi

5470-5725MHz: Ant 1: 5.9dBi, Ant 2: 5.5dBi

5725-5850MHz: Ant 1: 5.9dBi, Ant 2: 5.5dBi

ANT1+ANT2: Directional gain = $10 \log [(10^{5.9/20} + 10^{5.5/20})^2 / 2]$ dBi=8.71dBi



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L2291

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA

The Certificate Number is 4321.01

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location

: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%.

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

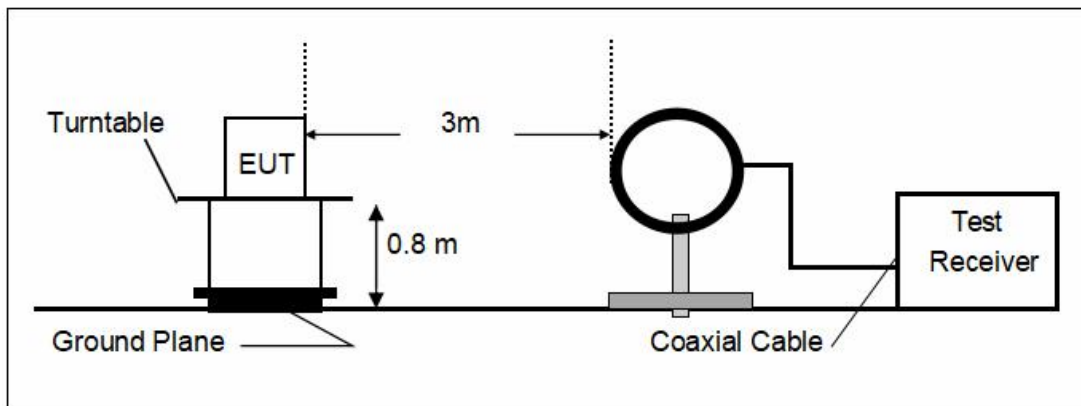

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

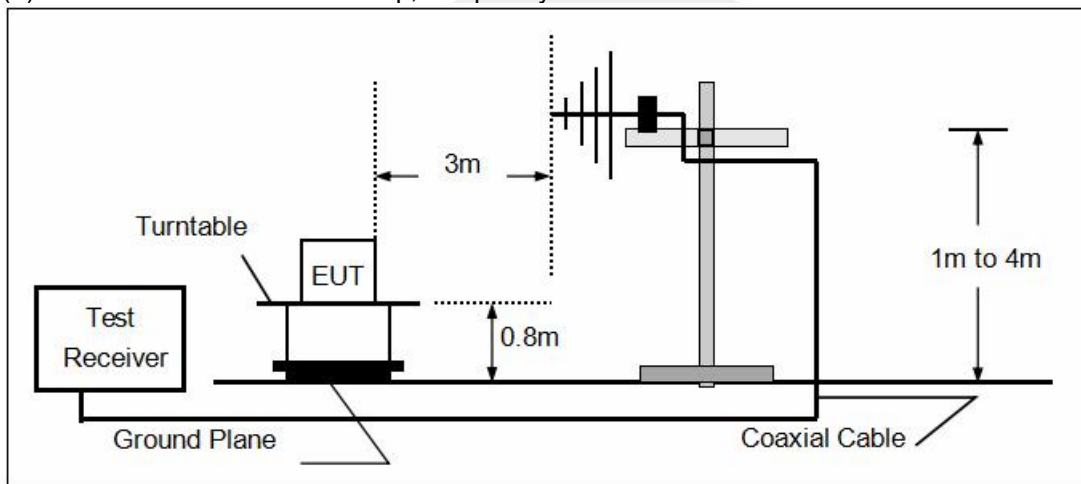

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

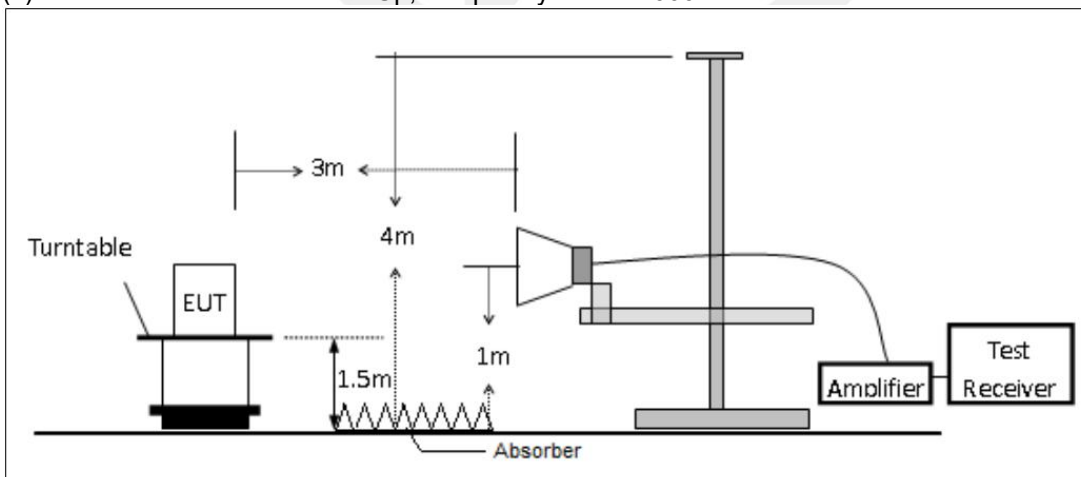


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

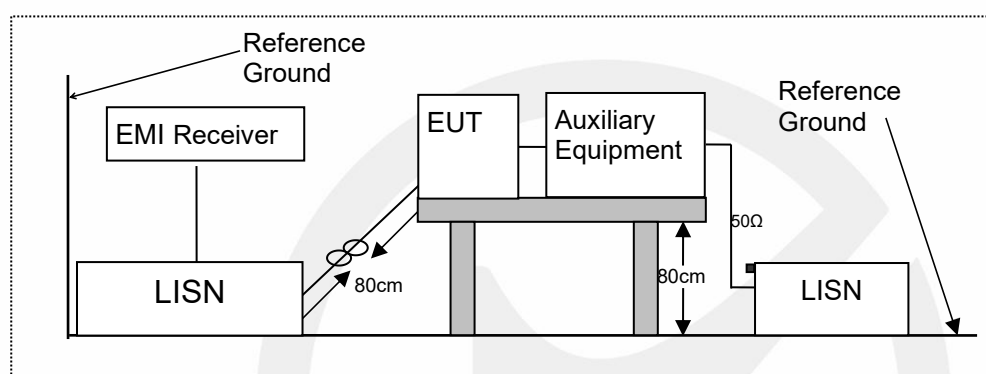

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

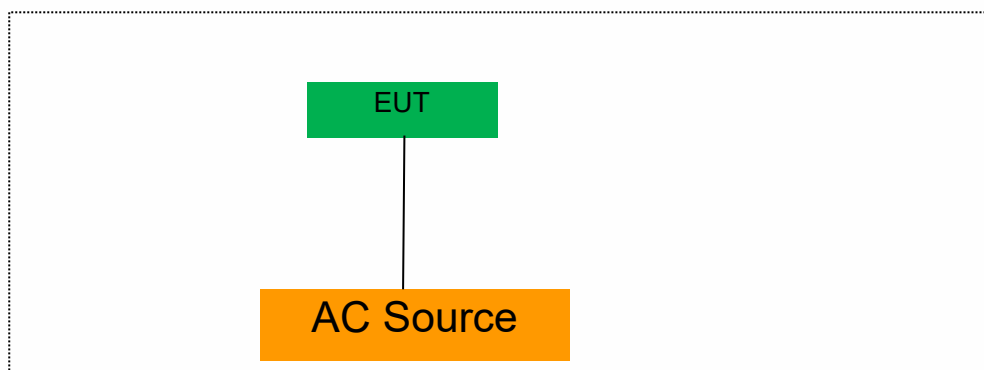

7.5 SUPPORT EQUIPMENT

POE Adapter	: Model: PSA16U-480(POE) Input: 100-240V~0.4A, 50-60Hz Output: 48V, 0.32A CE, FCC
Power Adapter	: Model: RD1201500-C55-198GB Input: 100-240V~50/60Hz, 0.6A Output: 12V, 1.5A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 BANDWIDTH MEASUREMENT

8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to FCC Part 15.407(e) for UNII Band III
According to 789033 D02 Section II(C)
According to 789033 D02 Section II(D)

8.1.2 Conformance Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup.

8.1.4 Test Procedure

According to 789033 D02 v02r01 section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.

Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v01r02 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW.
4. Set VBW $\geq 3 \times \text{RBW}$.
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

8.1.5 Test Results

Emission Bandwidth (26dB)

TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.760	5170.040	5189.800	---	---
	Ant2	5180	19.320	5170.320	5189.640	---	---
	Ant1	5200	19.880	5190.000	5209.880	---	---
	Ant2	5200	19.640	5190.080	5209.720	---	---
	Ant1	5240	19.440	5230.280	5249.720	---	---
	Ant2	5240	19.560	5230.160	5249.720	---	---
	Ant1	5260	19.840	5250.120	5269.960	---	---
	Ant2	5260	19.480	5250.240	5269.720	---	---
	Ant1	5280	19.760	5270.040	5289.800	---	---
	Ant2	5280	19.480	5270.320	5289.800	---	---
	Ant1	5320	19.640	5310.160	5329.800	---	---
	Ant2	5320	19.760	5310.120	5329.880	---	---
	Ant1	5500	19.760	5490.200	5509.960	---	---
	Ant2	5500	19.480	5490.160	5509.640	---	---
	Ant1	5580	19.680	5570.120	5589.800	---	---
	Ant2	5580	19.280	5570.320	5589.600	---	---
	Ant1	5700	19.600	5690.240	5709.840	---	---
	Ant2	5700	19.480	5690.240	5709.720	---	---
	Ant1	5745	19.800	5735.040	5754.840	---	---
	Ant2	5745	19.640	5735.280	5754.920	---	---
	Ant1	5785	19.720	5775.240	5794.960	---	---
	Ant2	5785	19.480	5775.160	5794.640	---	---
	Ant1	5825	19.840	5815.000	5834.840	---	---
	Ant2	5825	19.520	5815.160	5834.680	---	---
11N20MIMO	Ant1	5180	20.320	5169.760	5190.080	---	---
	Ant2	5180	20.080	5169.880	5189.960	---	---
	Ant1	5200	20.280	5189.840	5210.120	---	---
	Ant2	5200	20.000	5190.080	5210.080	---	---
	Ant1	5240	20.080	5229.880	5249.960	---	---
	Ant2	5240	20.000	5230.000	5250.000	---	---
	Ant1	5260	20.120	5250.000	5270.120	---	---
	Ant2	5260	19.880	5250.000	5269.880	---	---
	Ant1	5280	20.240	5269.920	5290.160	---	---
	Ant2	5280	19.880	5270.080	5289.960	---	---
	Ant1	5320	20.200	5309.920	5330.120	---	---
	Ant2	5320	19.680	5310.120	5329.800	---	---
	Ant1	5500	20.240	5489.880	5510.120	---	---
	Ant2	5500	19.880	5490.000	5509.880	---	---
	Ant1	5580	20.320	5569.800	5590.120	---	---
	Ant2	5580	19.920	5570.040	5589.960	---	---
	Ant1	5700	20.240	5689.840	5710.080	---	---
	Ant2	5700	20.000	5690.000	5710.000	---	---
	Ant1	5745	20.000	5734.880	5754.880	---	---
	Ant2	5745	19.840	5735.000	5754.840	---	---
	Ant1	5785	20.200	5774.920	5795.120	---	---
	Ant2	5785	20.160	5774.840	5795.000	---	---
	Ant1	5825	20.080	5815.000	5835.080	---	---
	Ant2	5825	20.000	5814.960	5834.960	---	---

11N40MIMO	Ant1	5190	40.640	5169.920	5210.560	---	---
	Ant2	5190	39.600	5170.080	5209.680	---	---
	Ant1	5230	40.400	5210.000	5250.400	---	---
	Ant2	5230	39.840	5210.160	5250.000	---	---
	Ant1	5270	40.240	5249.840	5290.080	---	---
	Ant2	5270	39.440	5250.320	5289.760	---	---
	Ant1	5310	40.240	5289.840	5330.080	---	---
	Ant2	5310	39.760	5290.160	5329.920	---	---
	Ant1	5510	39.920	5490.000	5529.920	---	---
	Ant2	5510	39.520	5489.920	5529.440	---	---
	Ant1	5550	40.320	5529.600	5569.920	---	---
	Ant2	5550	39.520	5530.160	5569.680	---	---
	Ant1	5670	40.400	5649.920	5690.320	---	---
	Ant2	5670	39.520	5650.240	5689.760	---	---
	Ant1	5755	39.840	5734.920	5774.760	---	---
	Ant2	5755	39.680	5735.000	5774.680	---	---
	Ant1	5795	40.080	5775.000	5815.080	---	---
	Ant2	5795	39.360	5775.320	5814.680	---	---
11AC20MIMO	Ant1	5180	20.280	5169.840	5190.120	---	---
	Ant2	5180	19.880	5170.040	5189.920	---	---
	Ant1	5200	20.200	5189.800	5210.000	---	---
	Ant2	5200	19.720	5190.120	5209.840	---	---
	Ant1	5240	20.400	5229.800	5250.200	---	---
	Ant2	5240	20.040	5229.960	5250.000	---	---
	Ant1	5260	20.040	5249.960	5270.000	---	---
	Ant2	5260	19.920	5250.040	5269.960	---	---
	Ant1	5280	20.360	5269.840	5290.200	---	---
	Ant2	5280	19.800	5270.120	5289.920	---	---
	Ant1	5320	19.840	5310.040	5329.880	---	---
	Ant2	5320	20.240	5309.800	5330.040	---	---
	Ant1	5500	19.720	5490.040	5509.760	---	---
	Ant2	5500	20.320	5489.840	5510.160	---	---
	Ant1	5580	19.960	5570.000	5589.960	---	---
	Ant2	5580	20.240	5569.840	5590.080	---	---
	Ant1	5700	19.840	5690.120	5709.960	---	---
	Ant2	5700	20.400	5689.760	5710.160	---	---
	Ant1	5745	19.880	5735.120	5755.000	---	---
	Ant2	5745	20.200	5734.920	5755.120	---	---
	Ant1	5785	20.000	5774.960	5794.960	---	---
	Ant2	5785	20.120	5774.880	5795.000	---	---
	Ant1	5825	19.960	5815.000	5834.960	---	---
	Ant2	5825	20.400	5814.800	5835.200	---	---
11AC40MIMO	Ant1	5190	39.520	5170.160	5209.680	---	---
	Ant2	5190	40.240	5169.760	5210.000	---	---
	Ant1	5230	38.960	5210.560	5249.520	---	---
	Ant2	5230	40.400	5209.760	5250.160	---	---
	Ant1	5270	39.360	5250.320	5289.680	---	---
	Ant2	5270	40.400	5249.680	5290.080	---	---
	Ant1	5310	39.440	5290.080	5329.520	---	---
	Ant2	5310	40.000	5290.000	5330.000	---	---
	Ant1	5510	39.600	5490.160	5529.760	---	---
	Ant2	5510	40.640	5489.600	5530.240	---	---
	Ant1	5550	39.600	5530.160	5569.760	---	---
	Ant2	5550	40.400	5529.760	5570.160	---	---
	Ant1	5670	39.360	5650.400	5689.760	---	---

	Ant2	5670	40.080	5650.000	5690.080	---	---
	Ant1	5755	39.200	5735.400	5774.600	---	---
	Ant2	5755	40.080	5735.000	5775.080	---	---
	Ant1	5795	39.520	5775.080	5814.600	---	---
	Ant2	5795	40.080	5774.920	5815.000	---	---
11AC80MIMO	Ant1	5210	79.200	5170.480	5249.680	---	---
	Ant2	5210	80.800	5169.520	5250.320	---	---
	Ant1	5290	79.360	5250.320	5329.680	---	---
	Ant2	5290	80.960	5249.360	5330.320	---	---
	Ant1	5530	79.200	5490.320	5569.520	---	---
	Ant2	5530	80.960	5489.360	5570.320	---	---
	Ant1	5610	79.040	5570.480	5649.520	---	---
	Ant2	5610	81.120	5569.840	5650.960	---	---
	Ant1	5775	79.040	5735.320	5814.360	---	---
	Ant2	5775	80.640	5734.520	5815.160	---	---



11A Ant1 5180



11A Ant2 5180



11A Ant1 5200





















