

# Testing Report

LTE/SRD Antenna(698~960/1710~2690MHz)

Customer Name: AJAX SYSTEMS

Product Name: LTE Antenna

Sample Model: JCG157L

Issue Date: 18.08.2026

|                                                                                                                |                  |
|----------------------------------------------------------------------------------------------------------------|------------------|
| <br>Engineer: B.Hermaniuk   | Date: 18.08.2026 |
| <br>Approver: O. Tymoshenko | Date: 18.08.2026 |

# Contents

|        |                                                   |   |
|--------|---------------------------------------------------|---|
| 1.     | General Information .....                         | 3 |
| 1.1.   | General information of testing institutions ..... | 3 |
| 1.2.   | Testing principle .....                           | 3 |
| 1.3.   | Test equipment .....                              | 4 |
| 1.4.   | Test environment .....                            | 4 |
| 1.5.   | Statement .....                                   | 4 |
| 2.     | Sample Information .....                          | 5 |
| 2.1.   | Client .....                                      | 5 |
| 2.2.   | Description of EUT .....                          | 5 |
| 2.3.   | EUT appearance .....                              | 6 |
| 3.     | Test Result .....                                 | 7 |
| 3.1.   | Test standard .....                               | 7 |
| 3.2.   | Test uncertainty .....                            | 7 |
| 3.3.   | Test data .....                                   | 8 |
| 3.3.1. | VSWR parameters .....                             | 8 |
| 3.3.2. | VSWR data .....                                   | 8 |
| 3.3.3. | Typical max gain .....                            | 8 |
| 3.3.4. | Typical free space radiation pattern .....        | 9 |

# 1. General Information

## 1.1. General information of testing institutions

|             |                                                                    |
|-------------|--------------------------------------------------------------------|
| Name        | «AJAX SYSTEMS MANUFACTURING» LLC                                   |
| Address     | 5 Sklyarenka Str., Kyiv, 04073, Ukraine                            |
| Web-address | <a href="https://ajax.systems/">https://ajax.systems/</a>          |
| E-mail      | <a href="mailto:kuraksa.s@ajax.systems">kuraksa.s@ajax.systems</a> |


## 1.2. Testing principle

The MegiQ Radiation Measurement System (RMS) is a compact test system that performs 3-axis radiation pattern measurement in non-anechoic spaces.



**RMS0440 – RMS0460**  
**RMS0640 – RMS0660**

### Measurement System

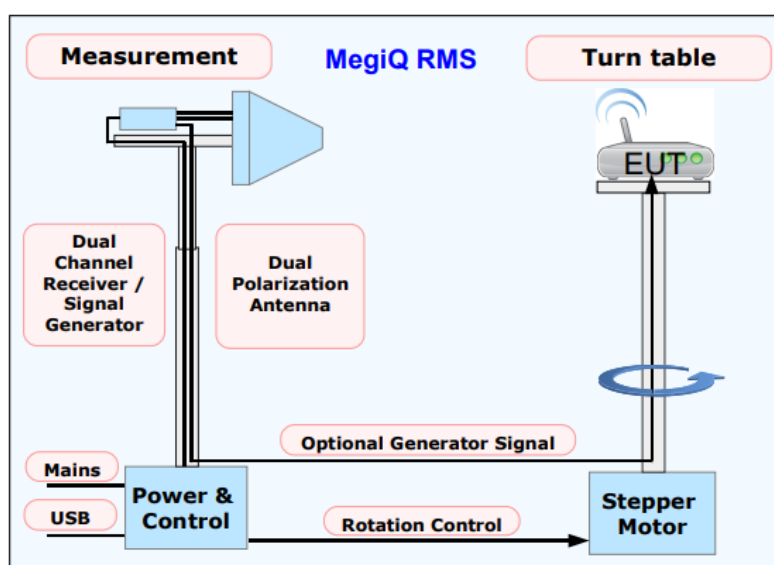

### 1.3. Test equipment

| Equipment               | Manufacturer                | Model                    | Identifier<br>(serial number) | Calibration<br>date |
|-------------------------|-----------------------------|--------------------------|-------------------------------|---------------------|
| Vector network analyzer | MegiQ                       | RMS0460                  | 00003028                      | 10/2024 – 10/2025   |
| Antenna                 | Narda Safety Test Solutions | LP-02                    | 001ZX10321                    | 8/2024 – 8/2025     |
| Shielded room           |                             | —                        | —                             | —                   |
| Power&Control unit      | MegiQ                       | ---                      | —                             | —                   |
| Turn table              | MegiQ                       | ---                      | —                             | —                   |
| Personal computer       | ASUS                        | Vivobook S M5606UA-MX026 | 380000281174                  | —                   |

### 1.4. Test environment

|             |           |
|-------------|-----------|
| Temperature | 22.5°C    |
| Humidity    | 58%RH     |
| Pressure    | 100.20kPa |

### 1.5. Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only «AJAX SYSTEMS MANUFACTURING» LLC have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the approver

## 2. Sample Information


### 2.1. Client

|              |                                         |
|--------------|-----------------------------------------|
| Name         | «AJAX SYSTEMS MANUFACTURING» LLC        |
| Address      | 5 Sklyarenka Str., Kyiv, 04073, Ukraine |
| Manufacturer | «AJAX SYSTEMS MANUFACTURING» LLC        |

### 2.2. Description of EUT

|                 |                         |
|-----------------|-------------------------|
| Product Name    | LTE Antenna JCG157L     |
| Antenna Size    | 104.6 mm *15 mm *1mm    |
| Serial No.      | -                       |
| Antenna Type    | External antenna        |
| Test Item       | VSWR; Radiation pattern |
| Frequency Range | 698~960/1710~2690MHz    |

### 2.3. EUT appearance

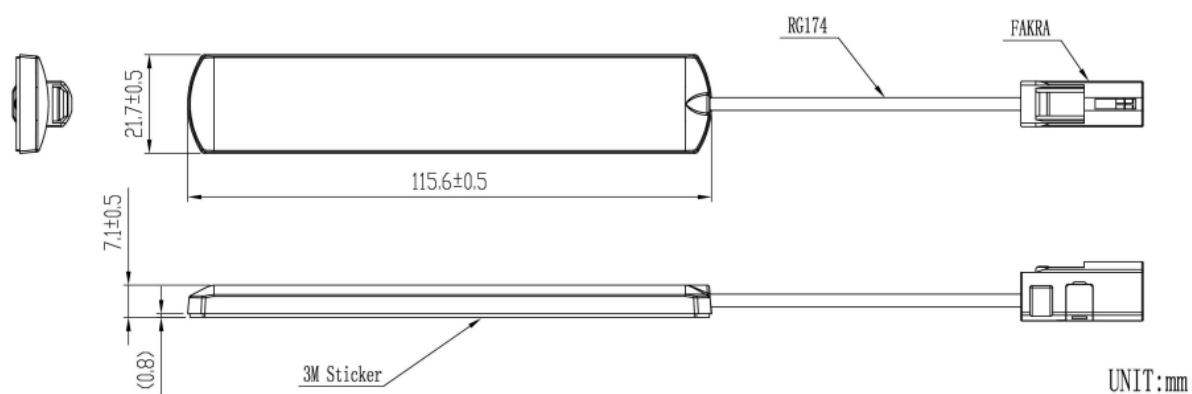

### 3. Test Result

#### 3.1. Test standard

| Name                         | Parameter            | Method                                                               | Standard no.           |
|------------------------------|----------------------|----------------------------------------------------------------------|------------------------|
| Mobile communication antenna | Antenna gain         | Generic specification for antennas used in the mobile communications | GB/T 9410-2008         |
|                              | Radiation pattern    |                                                                      |                        |
|                              | VSWR                 |                                                                      |                        |
| Antenna                      |                      | IEEE Standard Test Procedures for Antennas                           | ANSI/IEEE Std 149-1979 |
|                              | Gain and directivity |                                                                      |                        |


#### 3.2. Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of K=2 and the 95% confidence level to express the extended uncertainty.

| Item                 | Uncertainty |
|----------------------|-------------|
| VSWR                 | $\pm 0.2$   |
| Antenna gain         | $\pm 0.6$   |
| Radiation efficiency | $\pm 0.6$   |

### 3.3. Test data

#### 3.3.1. VSWR parameters

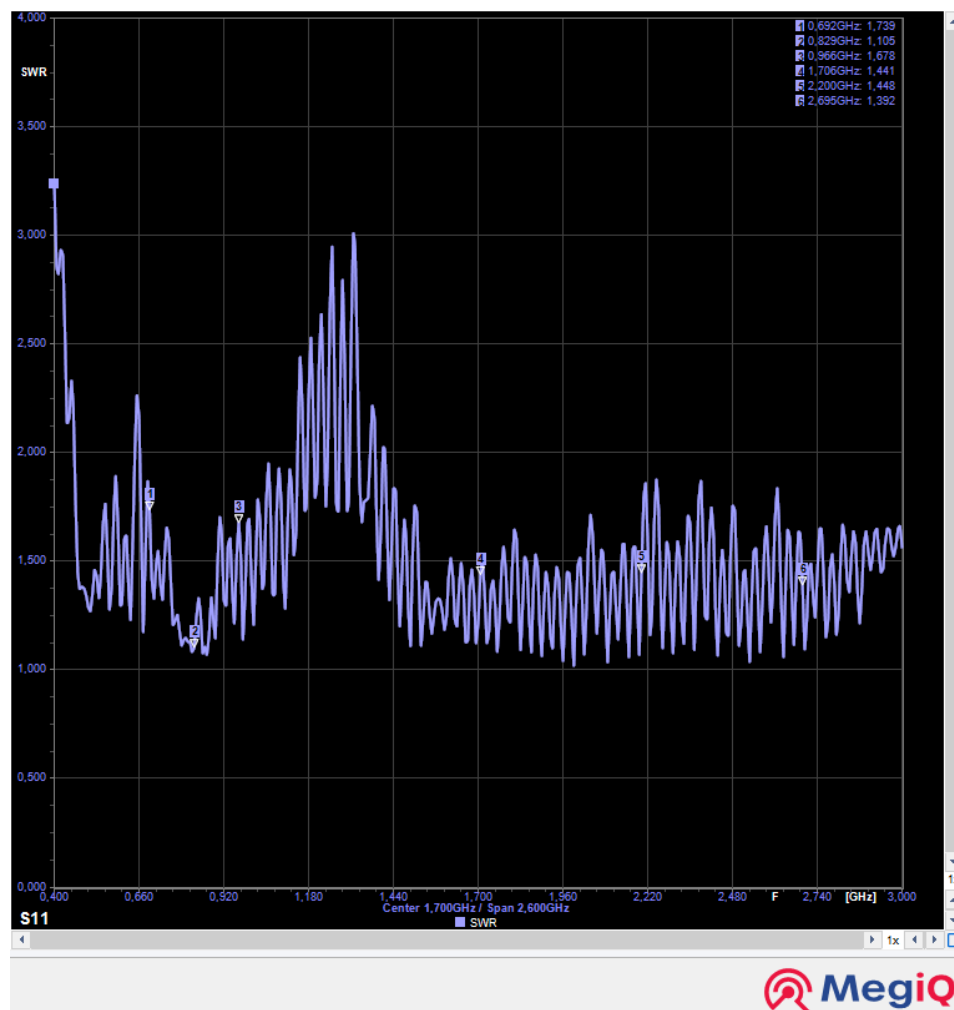

#### 3.3.2. VSWR data

|               |      |      |      |     |
|---------------|------|------|------|-----|
| Frequency/MHz | 692  | 829  | 915  | 966 |
| VSWR          | 1.8  | 1.2  | 1.5  | 1.7 |
| Frequency/MHz | 1706 | 2200 | 2695 |     |
| VSWR          | 1.5  | 1.45 | 1.4  |     |

#### 3.3.3. Typical max gain

| Antenna type | Connector | Antenna gain (dBi) |     |      |      |      |      |
|--------------|-----------|--------------------|-----|------|------|------|------|
|              |           | Frequency (MHz)    |     |      |      |      |      |
|              |           | 905-926<br>.5      | 700 | 1710 | 1990 | 2170 | 2650 |
| External     | SMA PLUG  | -2                 | -3  | -0   | -0.5 | -1   | -0   |

### 3.3.4. Typical free space radiation pattern

