

RADIO TEST REPORT

FCC ID: 2AX5VLFQLTNA1

Product: Air quality monitor
Trade Mark: AJAX
Model No.: LQ.L.J-000-NA
Family Model: N/A
Report No.: N26052806304E
Issue Date: Jul. 09, 2026

Prepared for

AJAX SYSTEMS CYPRUS HOLDINGS LTD
Ifigeneias, 17, Strovolos, 2007, Nicosia, Cyprus

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street,
Baoan District, Shenzhen, Guangdong, People's Republic of China
Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	8
6	SETUP OF EQUIPMENT UNDER TEST	10
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	10
6.2	SUPPORT EQUIPMENT.....	11
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	12
7	TEST REQUIREMENTS.....	14
7.1	CONDUCTED EMISSIONS TEST	14
7.2	RADIATED SPURIOUS EMISSION	16
7.3	NUMBER OF HOPPING CHANNEL	35
7.4	HOPPING CHANNEL SEPARATION MEASUREMENT	38
7.5	AVERAGE TIME OF OCCUPANCY (DWELL TIME)	43
7.6	20DB BANDWIDTH TEST	46
7.7	PEAK OUTPUT POWER.....	50
7.8	CONDUCTED BAND EDGE MEASUREMENT.....	53
7.9	SPURIOUS RF CONDUCTED EMISSION.....	56
7.10	ANTENNA APPLICATION	63

1 TEST RESULT CERTIFICATION

Applicant's Name	AJAX SYSTEMS CYPRUS HOLDINGS LTD
Address	Ifigeneias, 17, Strovolos, 2007, Nicosia, Cyprus
Manufacturer's Name	"AJAX SYSTEMS MANUFACTURING" LIMITED LIABILITY COMPANY
Address	Sklyarenka, 5, Kyiv, 04073, Ukraine
Factory(1)	"AJAX SYSTEMS MANUFACTURING" LIMITED LIABILITY COMPANY
Address	Sklyarenka, 5, Kyiv, 04073, Ukraine
Factory (2)	"AJAX TURKEY ELEKTRONİK TİCARET" ANONİM ŞİRKETİ
Address	Aydınlı Sb Mah. 4.Sk. Desbaş 6 Blok No: 4 İc Kapi No: Z01 Tuzla / Istanbul
Product description	
Product name	Air quality monitor
Model and/or type reference	LQ.L.J-000-NA
Family Model	N/A
Test Sample Number	S2605290238-1#
Date of Test	May. 29, 2026 ~ Jul. 09, 2026

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10-2020+Cor.1-2023	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Prepared By : Abel Chen
Abel Chen
(Project Engineer)

Reviewed By : Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By : Alex Li
Alex Li
(Manager)

2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C			
Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.209 (a) 15.205 (a)	Radiated Spurious Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(2)	Peak Output Power	PASS	
15.247(a)(i)	Number of Hopping Frequency	PASS	
15.247(a)(i)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.247 (d)	Band Edge Emission	PASS	
15.247 (d)	Spurious RF Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Air quality monitor
Trade Mark	
FCC ID	2AX5VLFQLTNA1
Model No.	LQ.L.J-000-NA
Family Model	N/A
Model Difference	N/A
Operating Frequency	JWL: 905 MHz~926.5MHz WNG: 905 MHz~926.5MHz
Modulation	GFSK
Number of Channels	103 Channels
Antenna Type	PCB antenna
Antenna Gain	-5dBi
Battery	DC 3V each
Power supply	2 pcs CR123A DC 3 V from battery
HW Version	LQC.001.MBR.001v10 LQC.001.LED.001v4
FW Version	NA
SW Version	x.xx

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

[illegible]

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	905	36	912.65	71	919.65
2	905.85	37	912.85	72	919.85
3	906.05	38	913.05	73	920.05
4	906.25	39	913.25	74	920.25
5	906.45	40	913.45	75	920.45
6	906.65	41	913.65	76	920.65
7	906.85	42	913.85	77	920.85
8	907.05	43	914.05	78	921.05
9	907.25	44	914.25	79	921.25
10	907.45	45	914.45	80	921.45
11	907.65	46	914.65	81	921.65
12	907.85	47	914.85	82	921.85
13	908.05	48	915.05	83	922.05
14	908.25	49	915.25	84	922.25
15	908.45	50	915.45	85	922.45
16	908.65	51	915.65	86	922.65
17	908.85	52	915.85	87	922.85
18	909.05	53	916.05	88	923.05
19	909.25	54	916.25	89	923.25
20	909.45	55	916.45	90	923.45
21	909.65	56	916.65	91	923.65
22	909.85	57	916.85	92	923.85
23	910.05	58	917.05	93	924.05
24	910.25	59	917.25	94	924.25
25	910.45	60	917.45	95	924.45
26	910.65	61	917.65	96	924.65
27	910.85	62	917.85	97	924.85
28	911.05	63	918.05	98	925.05
29	911.25	64	918.25	99	925.25
30	911.45	65	918.45	100	925.45
31	911.65	66	918.65	101	925.65
32	911.85	67	918.85	102	925.85
33	912.05	68	919.05	103	926.50
34	912.25	69	919.25		
35	912.45	70	919.45		

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Pretest Mode	Description
Mode 1	normal link mode
Mode 2	CH01(905MHz) JWL/WNG
Mode 3	CH52(915.85MHz) JWL/WNG
Mode 4	CH103(926.50MHz) JWL/WNG

For Radiated Test Cases	
Final Test Mode	Description
Mode 1	normal link mode
Mode 2	CH01(905MHz) JWL/WNG
Mode 3	CH52(915.85MHz) JWL/WNG
Mode 4	CH103(926.50MHz) JWL/WNG

For RF Conducted Test Cases	
Final Test Mode	Description
Mode 2	CH01(905MHz) JWL/WNG
Mode 3	CH52(915.85MHz) JWL/WNG
Mode 4	CH103(926.50MHz) JWL/WNG
Mode 5	Hopping mode JWL/WNG


Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

For Radiated Test Cases

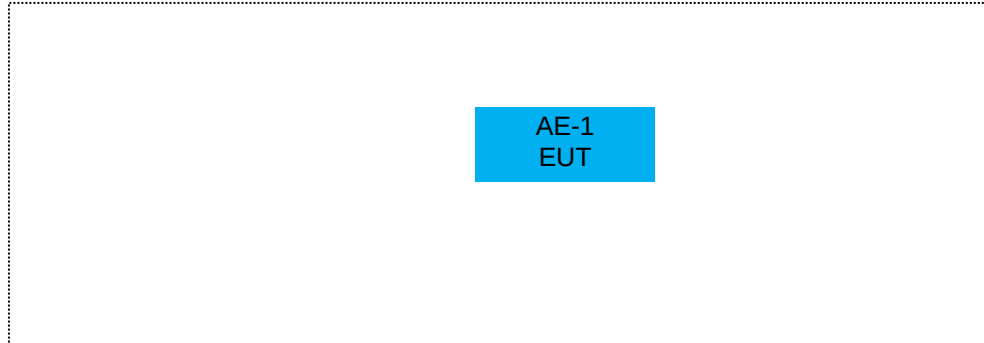

For RF Conducted Test Cases

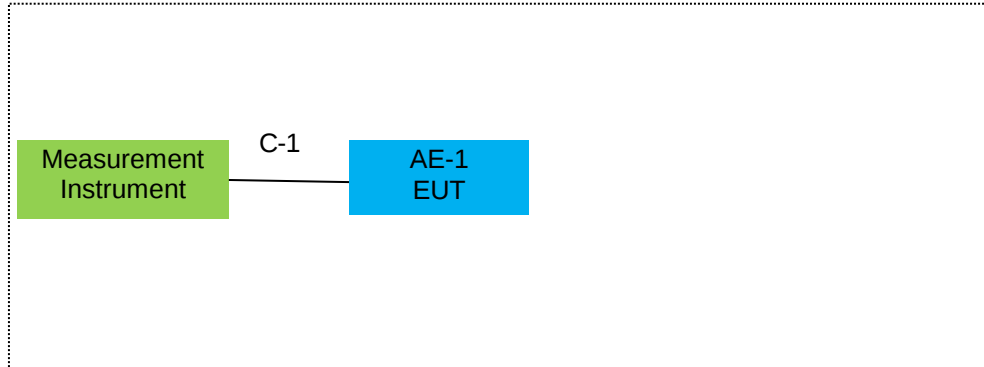

Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Air quality monitor	LQ.L.J-000-NA	N/A	EUT

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	RF Cable	YES	NO	10

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2026.04.15	2027.04.14	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2026.04.08	2027.04.07	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2026.04.08	2027.04.07	1 year
4	Test Receiver	R&S	ESPI7	101318	2026.04.08	2027.04.07	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	N/A	N/A	N/A
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2024.05.12	2027.05.11	3 year
9	Amplifier	EMC	EMC051835SE	980246	2026.04.08	2027.04.07	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2024.05.17	2027.05.16	3 year
11	Power Meter	DARE	RPR3006W	15I00041SN084	2026.04.08	2027.04.07	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2024.05.06	2027.05.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2024.05.06	2027.05.05	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2024.05.06	2027.05.05	3 year
15	Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2026.04.08	2027.04.07	1 year
2	LISN	R&S	ENV216	101313	2026.04.08	2027.04.07	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2026.04.08	2027.04.07	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2024.04.25	2027.04.24	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2024.04.25	2027.04.24	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2024.04.25	2027.04.24	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFTtest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	raditeq	RadiMation	2023.1.3	RadiatedTest
4	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a)

7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

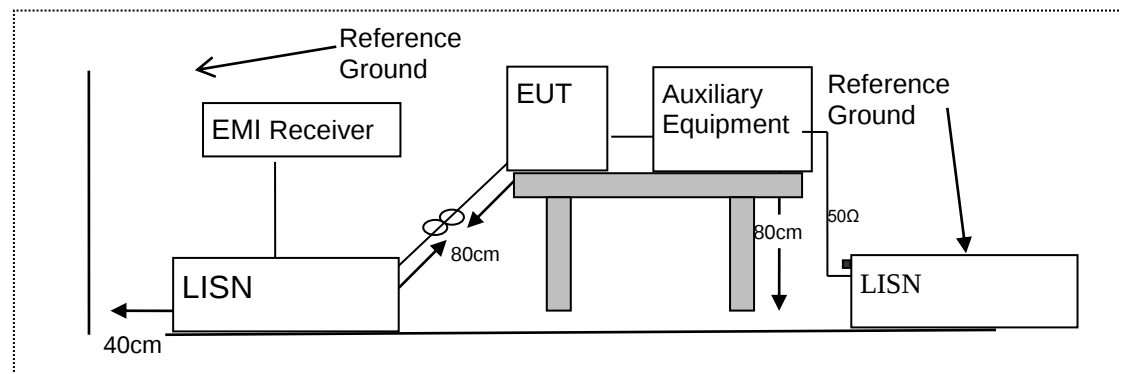

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2020+Cor.1-2023 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.1.6 Test Results

EUT:	Air quality monitor	Model Name :	LQ.L.J-000-NA
Temperature:	23.5℃	Relative Humidity:	60%
Pressure:	1010hPa	Phase :	/
Test Voltage :	N/A	Test Mode:	N/A

Note: Not Applicable, Power by battery.

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2020+Cor.1-2023

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


Remark :1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. For Frequency 9kHz~30MHz:
 Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.
 For Frequency above 30MHz:
 Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

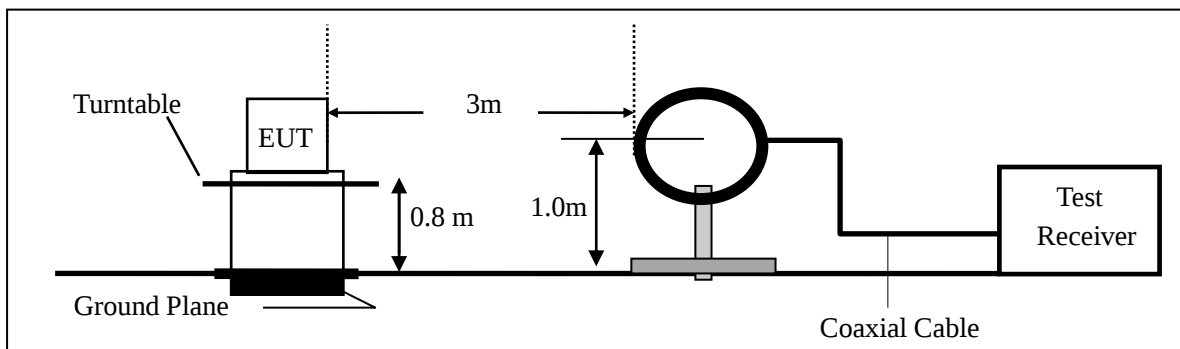

(b) For radiated emissions from 30MHz to 1000MHz

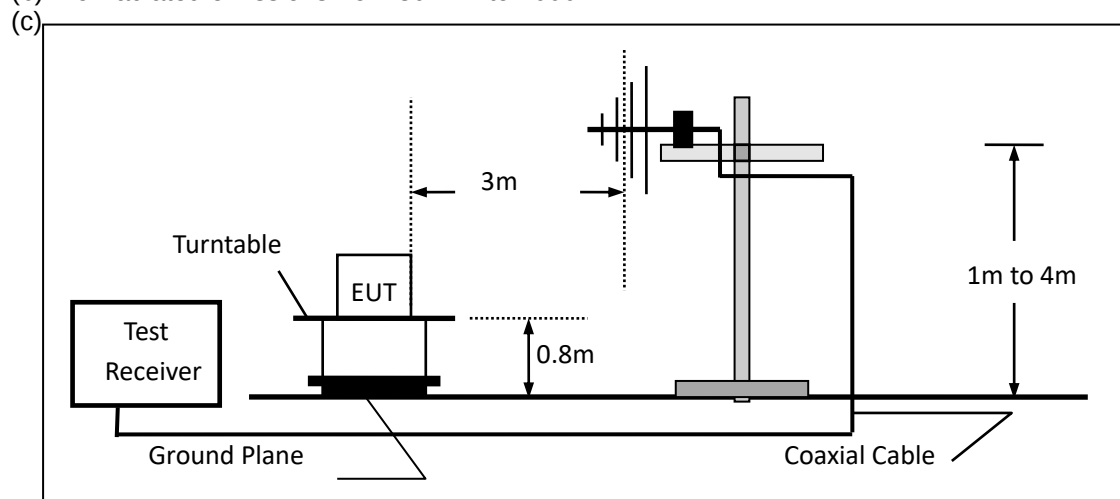

(c) For radiated emissions above 1000MHz

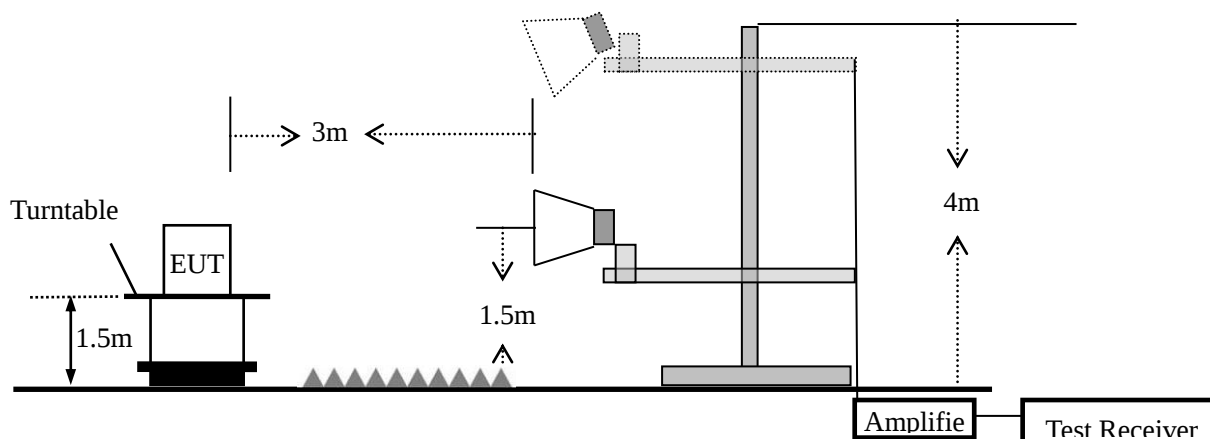

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2020+Cor.1-2023. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2020+Cor.1-2023 and CAN/CSA-CEI/IEC CISPR 22. This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	23.5°C	Relative Humidity:	60%
Test Mode:	Mode1/Mode2/Mode3/Mode4	Test By:	Abel Chen

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


■ Spurious Emission below 1GHz (30MHz to 1GHz)

EUT:	Air quality monitor	Model Name :	LQ.L-J-000-NA
Temperature:	20.4℃	Relative Humidity:	53.8%
Pressure:	1010hPa	Test Mode:	Mode1
Test Voltage :	DC 3V		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	44.4307	0.07	19.45	19.52	40.00	-20.48	QP
H	50.9420	-0.78	19.87	19.09	40.00	-20.91	QP
H	104.5360	-0.34	18.32	17.98	43.50	-25.52	QP
H	346.8091	-0.13	21.15	21.02	46.00	-24.98	QP
H	487.3150	1.25	24.23	25.48	46.00	-20.52	QP
H	948.7610	4.06	30.21	34.27	46.00	-11.73	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

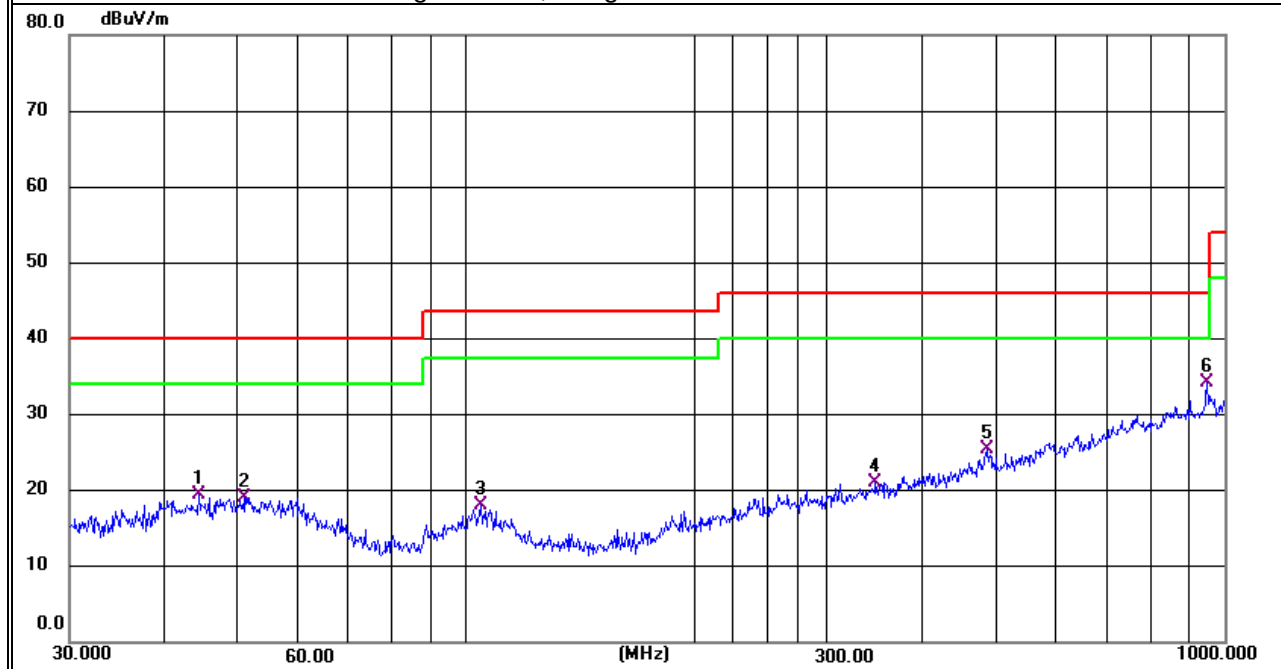

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	43.6584	-0.09	19.29	19.20	40.00	-20.80	QP
V	61.1315	1.17	18.87	20.04	40.00	-19.96	QP
V	104.1701	-0.90	18.34	17.44	43.50	-26.06	QP
V	268.4852	0.52	19.57	20.09	46.00	-25.91	QP
V	647.3854	3.54	26.30	29.84	46.00	-16.16	QP
V	948.7610	3.35	30.21	33.56	46.00	-12.44	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

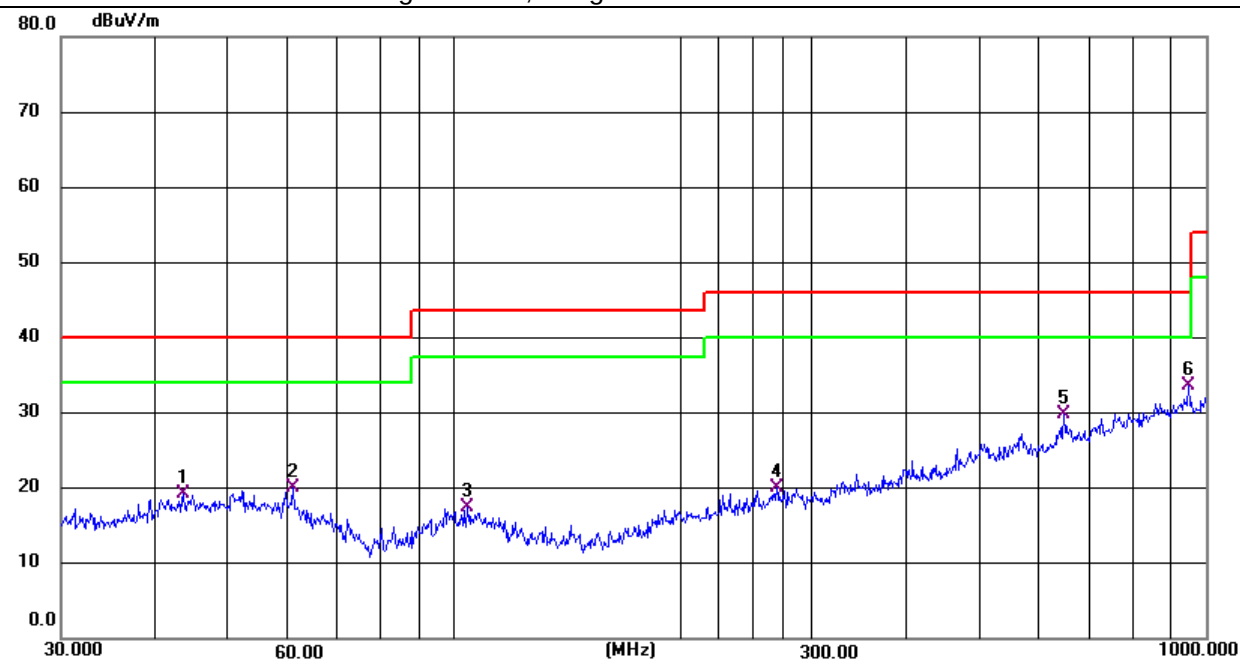

Note: All the modulation modes have been tested, and the worst result was report(JWL).


■ Spurious Emission Above 1GHz (1GHz to 10GHz)

EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	JWL-905	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1119.700	53.02	-18.33	34.69	54.00	-19.31	AVG
H	1137.700	61.57	-18.69	42.88	74.00	-31.12	peak
H	1810.450	66.50	-16.13	50.37	74.00	-23.63	peak
H	1810.450	65.22	-16.13	49.09	54.00	-4.91	AVG
H	2715.175	56.68	-11.11	45.57	74.00	-28.43	peak
H	2715.175	53.80	-11.11	42.69	54.00	-11.31	AVG
H	4525.300	54.53	-7.69	46.84	74.00	-27.16	peak
H	4525.300	51.29	-7.69	43.60	54.00	-10.40	AVG
H	6302.800	49.32	-4.20	45.12	74.00	-28.88	peak
H	6334.750	41.55	-4.06	37.49	54.00	-16.51	AVG
H	8145.100	49.02	-1.41	47.61	74.00	-26.39	peak
H	8145.100	44.20	-1.41	42.79	54.00	-11.21	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

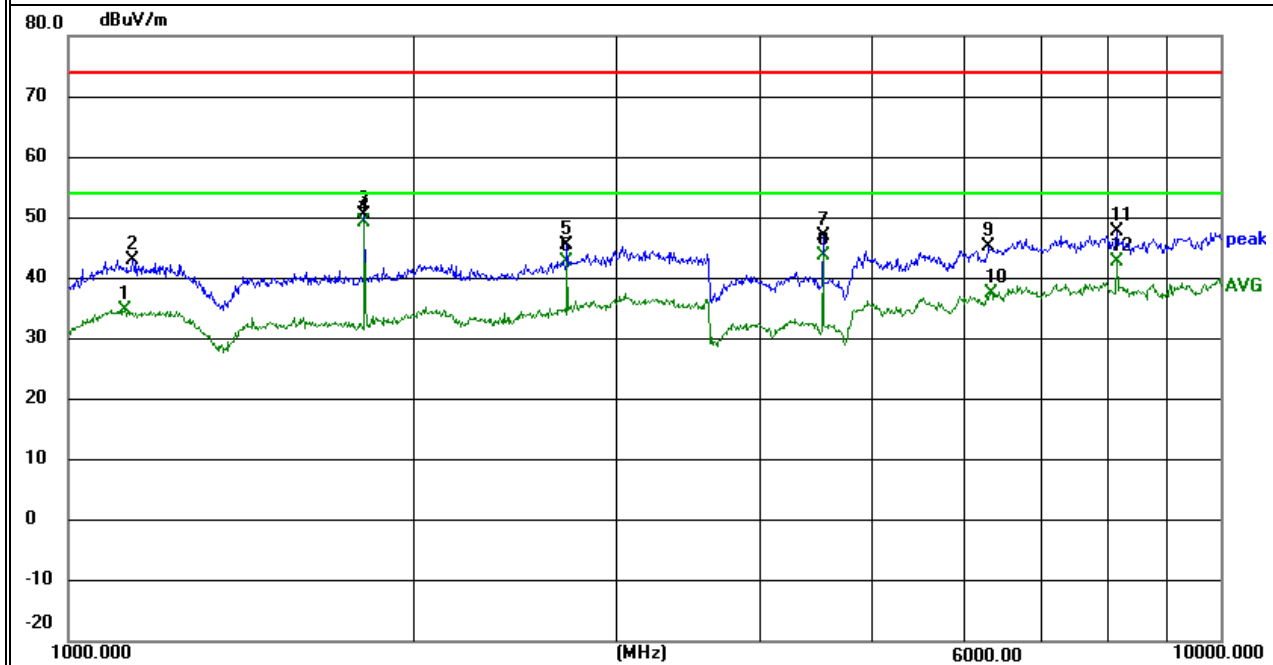


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	JWL-905	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1101.025	53.02	-17.97	35.05	54.00	-18.95	AVG
V	1127.800	61.43	-18.49	42.94	74.00	-31.06	peak
V	1810.225	65.17	-16.13	49.04	74.00	-24.96	peak
V	1810.225	63.83	-16.13	47.70	54.00	-6.30	AVG
V	2715.175	54.13	-11.11	43.02	74.00	-30.98	peak
V	2715.175	50.56	-11.11	39.45	54.00	-14.55	AVG
V	4525.300	55.05	-7.69	47.36	74.00	-26.64	peak
V	4525.300	53.81	-7.69	46.12	54.00	-7.88	AVG
V	6379.975	49.19	-4.00	45.19	74.00	-28.81	peak
V	6537.025	41.21	-3.54	37.67	54.00	-16.33	AVG
V	8145.550	49.33	-1.40	47.93	74.00	-26.07	peak
V	8145.550	45.72	-1.40	44.32	54.00	-9.68	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

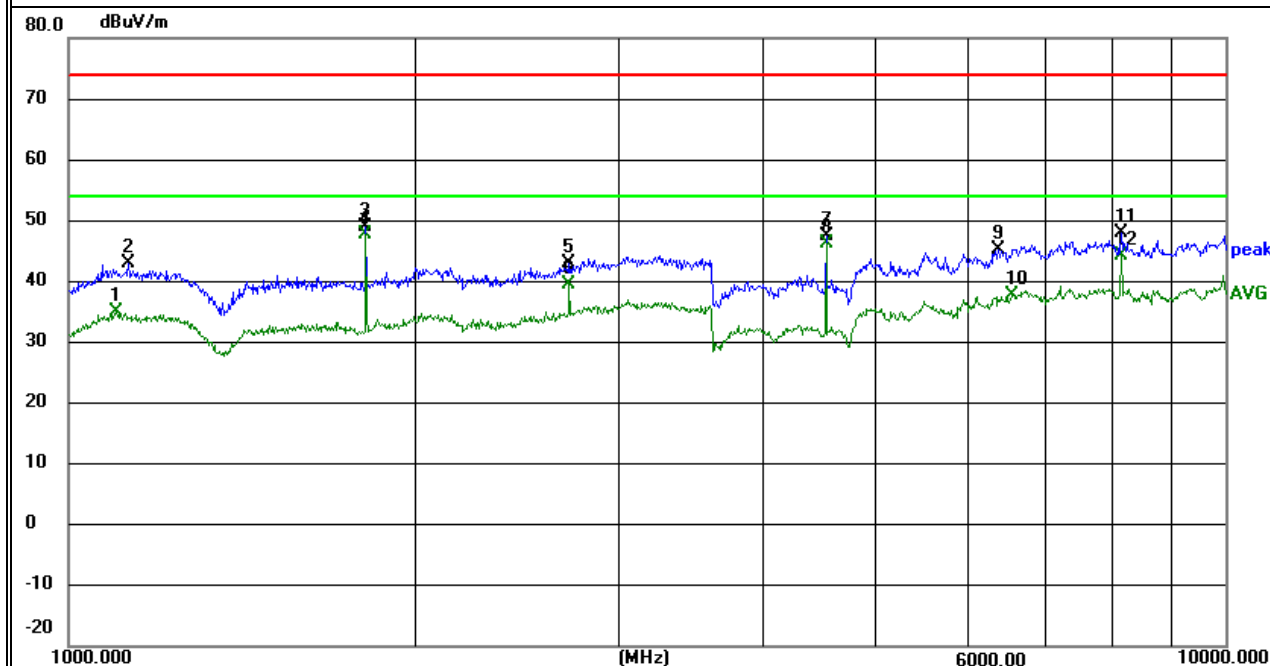


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	JWL-915.85	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1220.050	60.84	-18.19	42.65	74.00	-31.35	peak
H	1229.725	52.68	-18.09	34.59	54.00	-19.41	AVG
H	1831.825	65.80	-15.56	50.24	74.00	-23.76	peak
H	1831.825	64.50	-15.56	48.94	54.00	-5.06	AVG
H	2747.575	56.76	-10.84	45.92	74.00	-28.08	peak
H	2747.575	53.52	-10.84	42.68	54.00	-11.32	AVG
H	4579.300	55.81	-7.89	47.92	74.00	-26.08	peak
H	4579.300	54.83	-7.89	46.94	54.00	-7.06	AVG
H	6590.350	49.64	-3.27	46.37	74.00	-27.63	peak
H	6710.275	41.26	-3.01	38.25	54.00	-15.75	AVG
H	8242.525	48.45	-1.11	47.34	74.00	-26.66	peak
H	8242.525	45.33	-1.11	44.22	54.00	-9.78	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

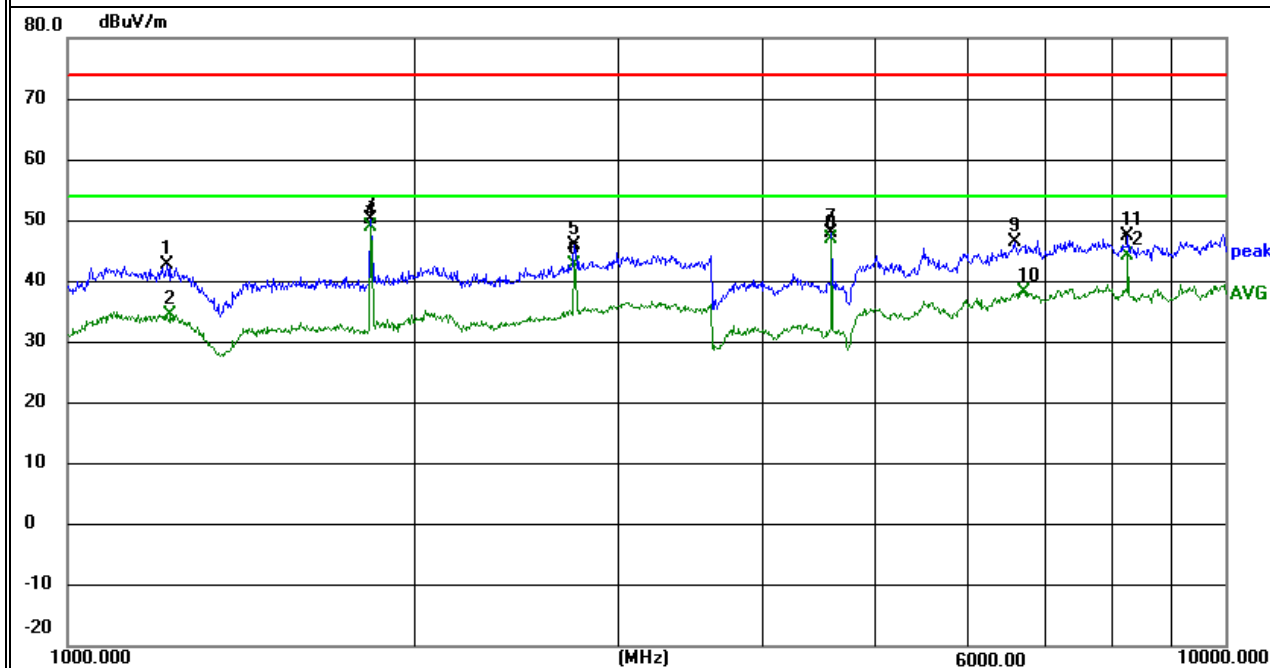


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	JWL-915.85	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1157.050	61.42	-18.85	42.57	74.00	-31.43	peak
V	1208.575	52.70	-18.31	34.39	54.00	-19.61	AVG
V	1831.825	66.46	-15.56	50.90	74.00	-23.10	peak
V	1831.825	65.13	-15.56	49.57	54.00	-4.43	AVG
V	2747.575	55.46	-10.84	44.62	74.00	-29.38	peak
V	2747.575	51.27	-10.84	40.43	54.00	-13.57	AVG
V	4579.750	57.07	-7.90	49.17	74.00	-24.83	peak
V	4579.750	55.85	-7.90	47.95	54.00	-6.05	AVG
V	6589.000	49.37	-3.27	46.10	74.00	-27.90	peak
V	6702.400	41.35	-2.87	38.48	54.00	-15.52	AVG
V	8242.750	50.63	-1.11	49.52	74.00	-24.48	peak
V	8242.750	47.14	-1.11	46.03	54.00	-7.97	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

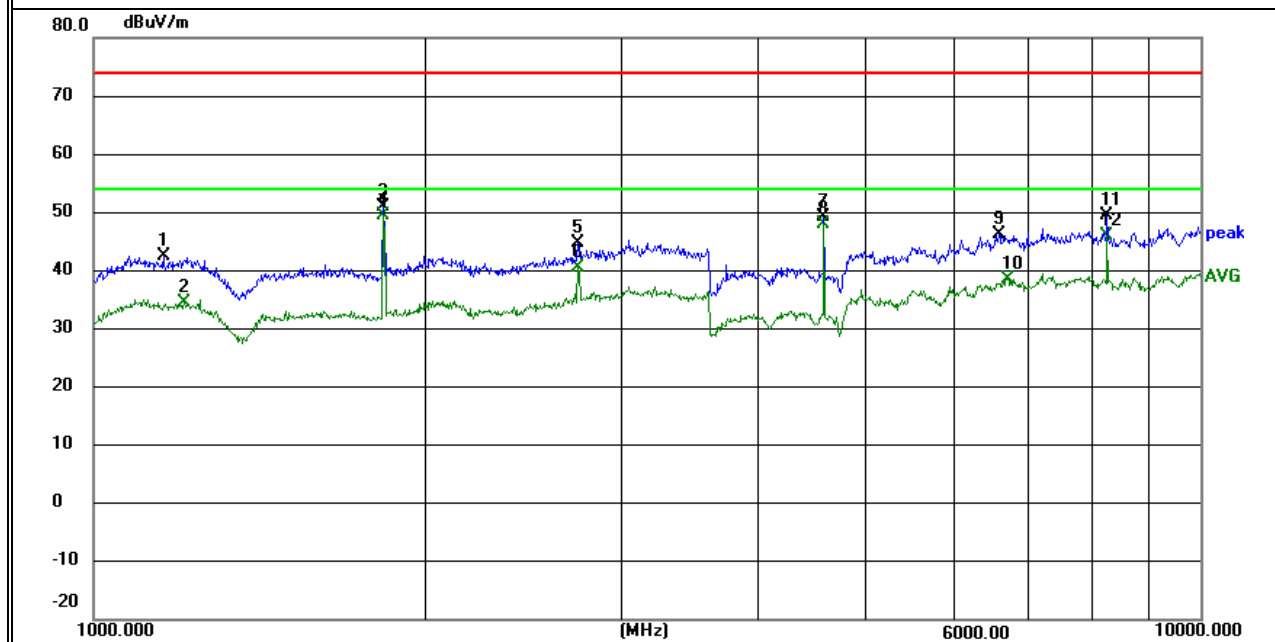


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3°C	Relative Humidity:	50.4%
Test Mode:	JWL-926.5	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1191.475	61.03	-18.49	42.54	74.00	-31.46	peak
H	1201.375	53.17	-18.39	34.78	54.00	-19.22	AVG
H	1853.200	65.39	-15.06	50.33	74.00	-23.67	peak
H	1853.200	64.13	-15.06	49.07	54.00	-4.93	AVG
H	2779.525	57.06	-10.59	46.47	74.00	-27.53	peak
H	2779.525	52.70	-10.59	42.11	54.00	-11.89	AVG
H	4632.850	56.20	-7.82	48.38	74.00	-25.62	peak
H	4632.850	55.32	-7.82	47.50	54.00	-6.50	AVG
H	6425.425	49.55	-4.03	45.52	74.00	-28.48	peak
H	6540.850	41.87	-3.49	38.38	54.00	-15.62	AVG
H	8339.050	51.33	-1.67	49.66	74.00	-24.34	peak
H	8339.050	47.36	-1.67	45.69	54.00	-8.31	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

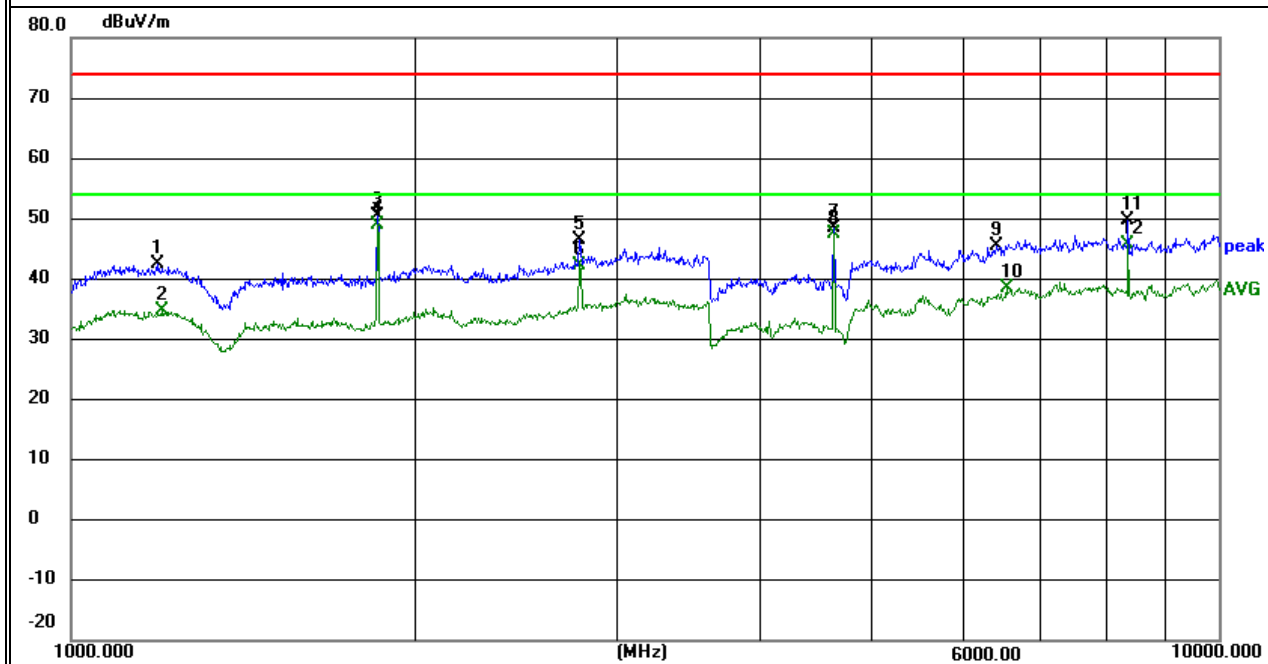


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	JWL-926.5	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1170.550	61.27	-18.71	42.56	74.00	-31.44	peak
V	1189.225	52.84	-18.51	34.33	54.00	-19.67	AVG
V	1853.200	68.15	-15.06	53.09	74.00	-20.91	peak
V	1853.200	67.10	-15.06	52.04	54.00	-1.96	AVG
V	2779.525	51.46	-10.59	40.87	54.00	-13.13	AVG
V	2779.750	55.72	-10.58	45.14	74.00	-28.86	peak
V	4632.850	58.24	-7.82	50.42	74.00	-23.58	peak
V	4632.850	57.17	-7.82	49.35	54.00	-4.65	AVG
V	6675.850	49.37	-3.23	46.14	74.00	-27.86	peak
V	6781.825	41.72	-3.40	38.32	54.00	-15.68	AVG
V	8338.600	52.04	-1.67	50.37	74.00	-23.63	peak
V	8338.600	49.82	-1.67	48.15	54.00	-5.85	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

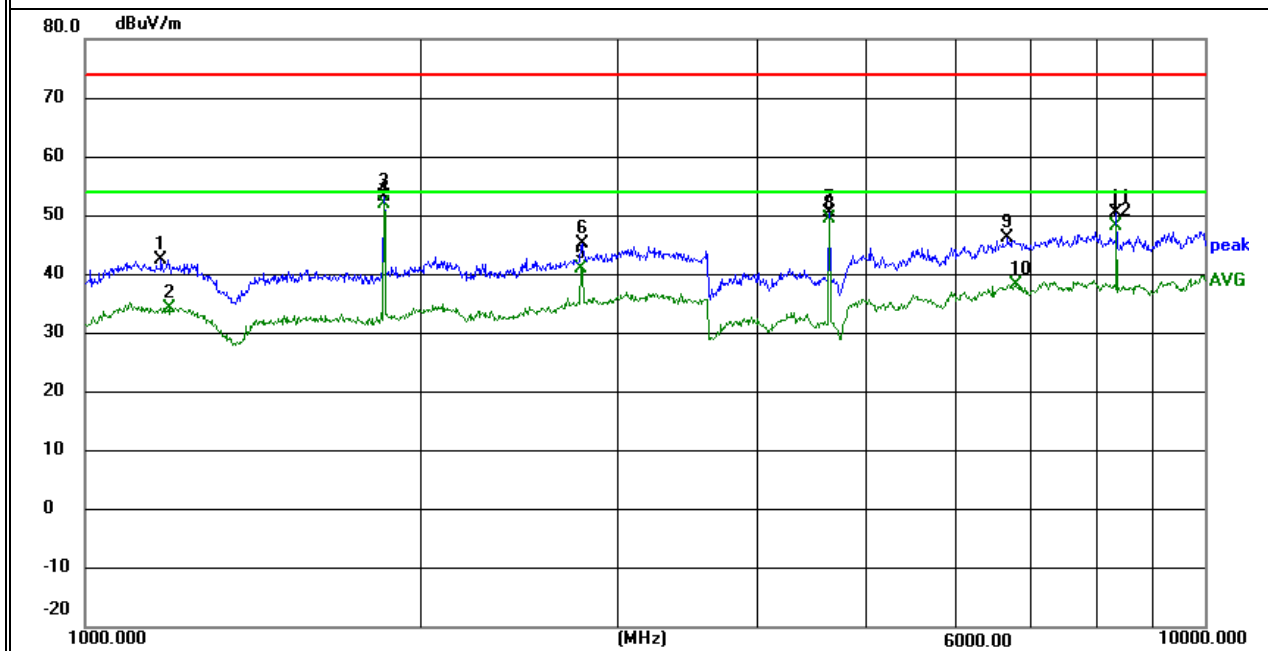


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	WNG-905	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1091.350	61.87	-18.04	43.83	74.00	-30.17	peak
H	1114.975	53.56	-18.24	35.32	54.00	-18.68	AVG
H	1810.225	66.02	-16.13	49.89	74.00	-24.11	peak
H	1810.225	65.10	-16.13	48.97	54.00	-5.03	AVG
H	2715.400	56.46	-11.11	45.35	74.00	-28.65	peak
H	2715.400	53.71	-11.11	42.60	54.00	-11.40	AVG
H	4525.300	53.40	-7.69	45.71	74.00	-28.29	peak
H	4525.300	51.36	-7.69	43.67	54.00	-10.33	AVG
H	6358.375	41.70	-4.00	37.70	54.00	-16.30	AVG
H	6421.150	49.15	-4.02	45.13	74.00	-28.87	peak
H	8145.100	43.24	-1.41	41.83	54.00	-12.17	AVG
H	8273.125	48.36	-1.27	47.09	74.00	-26.91	peak

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

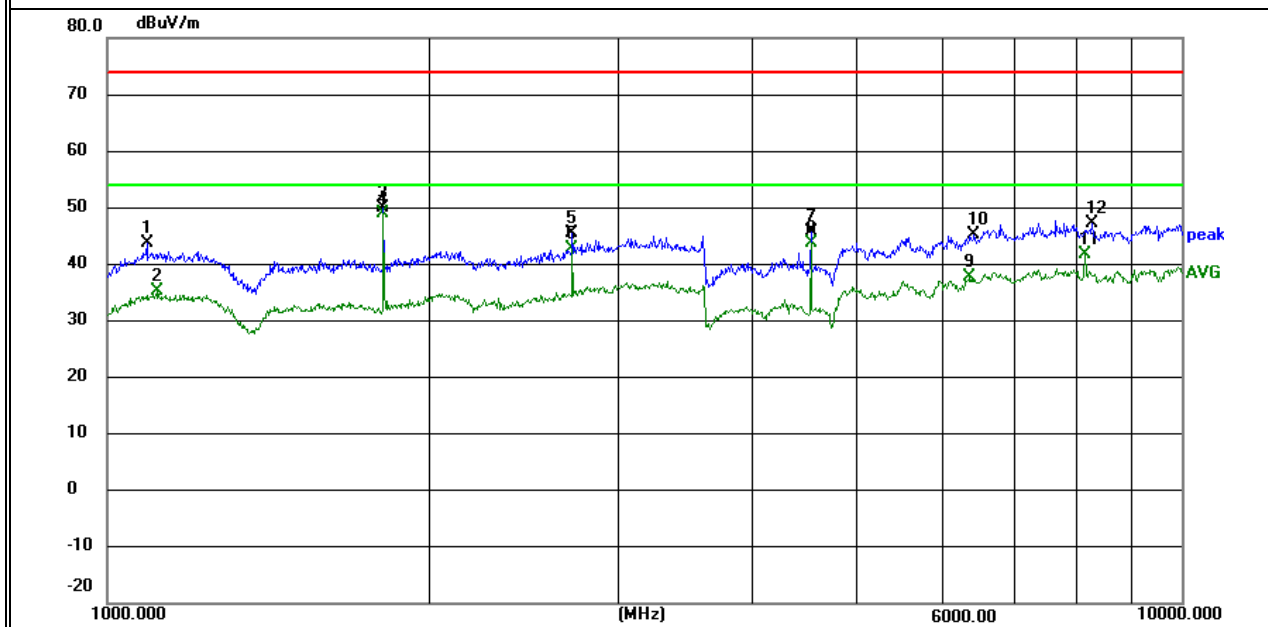


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	WNG-905	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1209.700	52.61	-18.30	34.31	54.00	-19.69	AVG
V	1236.475	61.51	-18.02	43.49	74.00	-30.51	peak
V	1810.225	65.29	-16.13	49.16	74.00	-24.84	peak
V	1810.225	64.11	-16.13	47.98	54.00	-6.02	AVG
V	2715.175	50.50	-11.11	39.39	54.00	-14.61	AVG
V	2786.725	54.61	-10.53	44.08	74.00	-29.92	peak
V	4525.300	55.14	-7.69	47.45	74.00	-26.55	peak
V	4525.300	53.70	-7.69	46.01	54.00	-7.99	AVG
V	5955.400	49.33	-4.49	44.84	74.00	-29.16	peak
V	5955.400	41.50	-4.49	37.01	54.00	-16.99	AVG
V	8145.325	49.28	-1.41	47.87	74.00	-26.13	peak
V	8145.325	45.81	-1.41	44.40	54.00	-9.60	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

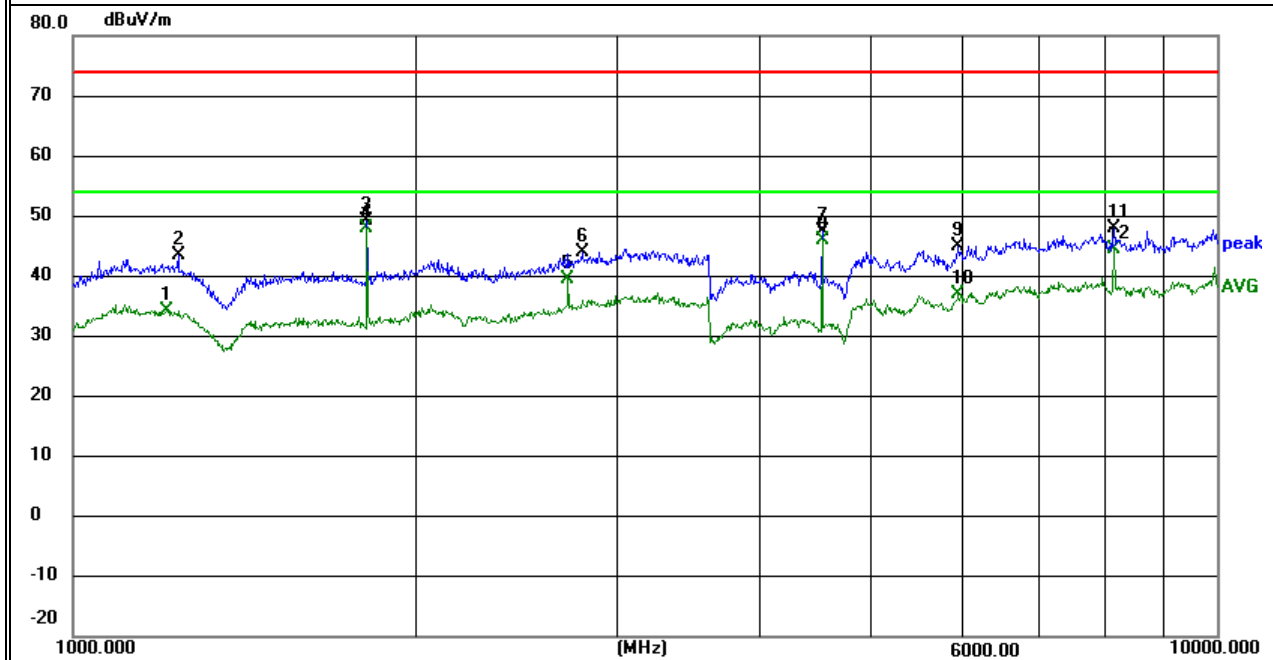


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	WNG-915.85	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1089.100	53.01	-18.06	34.95	54.00	-19.05	AVG
H	1105.075	60.17	-18.05	42.12	74.00	-31.88	peak
H	1831.825	65.72	-15.56	50.16	74.00	-23.84	peak
H	1831.825	64.55	-15.56	48.99	54.00	-5.01	AVG
H	2747.800	57.27	-10.84	46.43	74.00	-27.57	peak
H	2747.800	54.36	-10.84	43.52	54.00	-10.48	AVG
H	4579.525	56.54	-7.90	48.64	74.00	-25.36	peak
H	4579.525	54.99	-7.90	47.09	54.00	-6.91	AVG
H	6335.875	48.82	-4.06	44.76	74.00	-29.24	peak
H	6410.575	41.56	-4.01	37.55	54.00	-16.45	AVG
H	8242.750	48.01	-1.11	46.90	74.00	-27.10	peak
H	8242.750	44.68	-1.11	43.57	54.00	-10.43	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

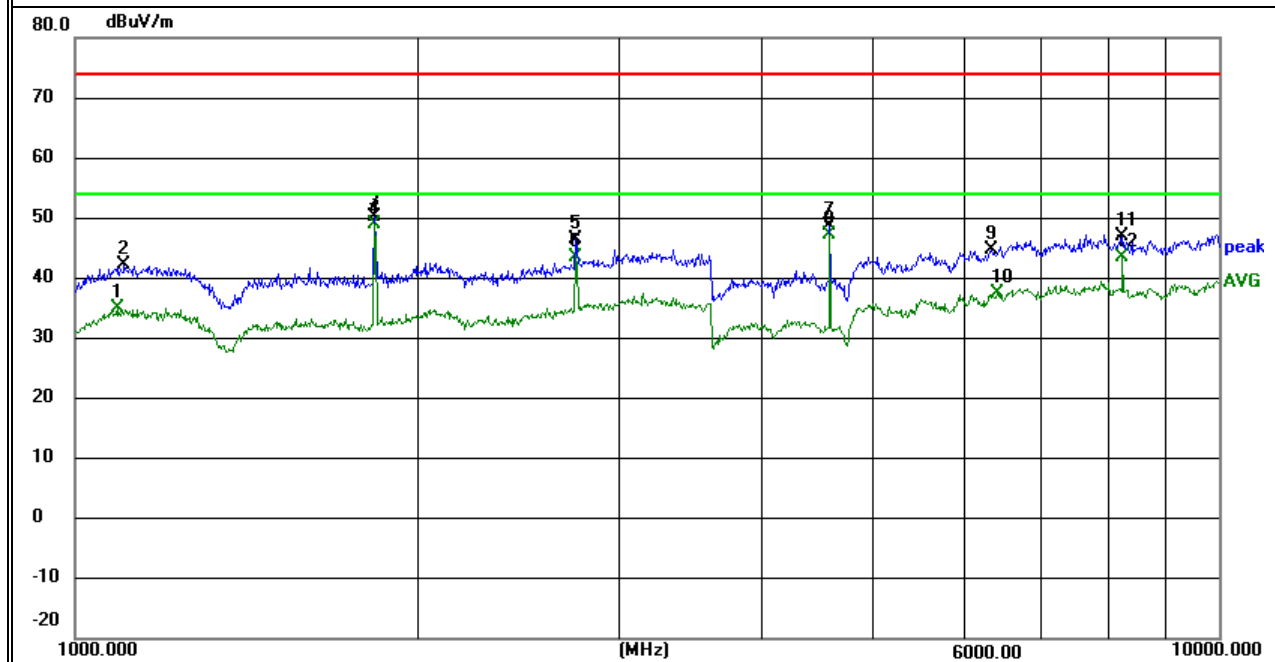


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	WNG-915.85	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1151.650	53.82	-18.91	34.91	54.00	-19.09	AVG
V	1162.000	62.49	-18.80	43.69	74.00	-30.31	peak
V	1831.825	66.64	-15.56	51.08	74.00	-22.92	peak
V	1831.825	65.75	-15.56	50.19	54.00	-3.81	AVG
V	2747.800	56.04	-10.84	45.20	74.00	-28.80	peak
V	2747.800	51.82	-10.84	40.98	54.00	-13.02	AVG
V	4579.300	57.42	-7.89	49.53	74.00	-24.47	peak
V	4579.300	56.17	-7.89	48.28	54.00	-5.72	AVG
V	6099.850	49.09	-4.55	44.54	74.00	-29.46	peak
V	6099.850	42.01	-4.55	37.46	54.00	-16.54	AVG
V	8242.750	50.73	-1.11	49.62	74.00	-24.38	peak
V	8242.750	47.38	-1.11	46.27	54.00	-7.73	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

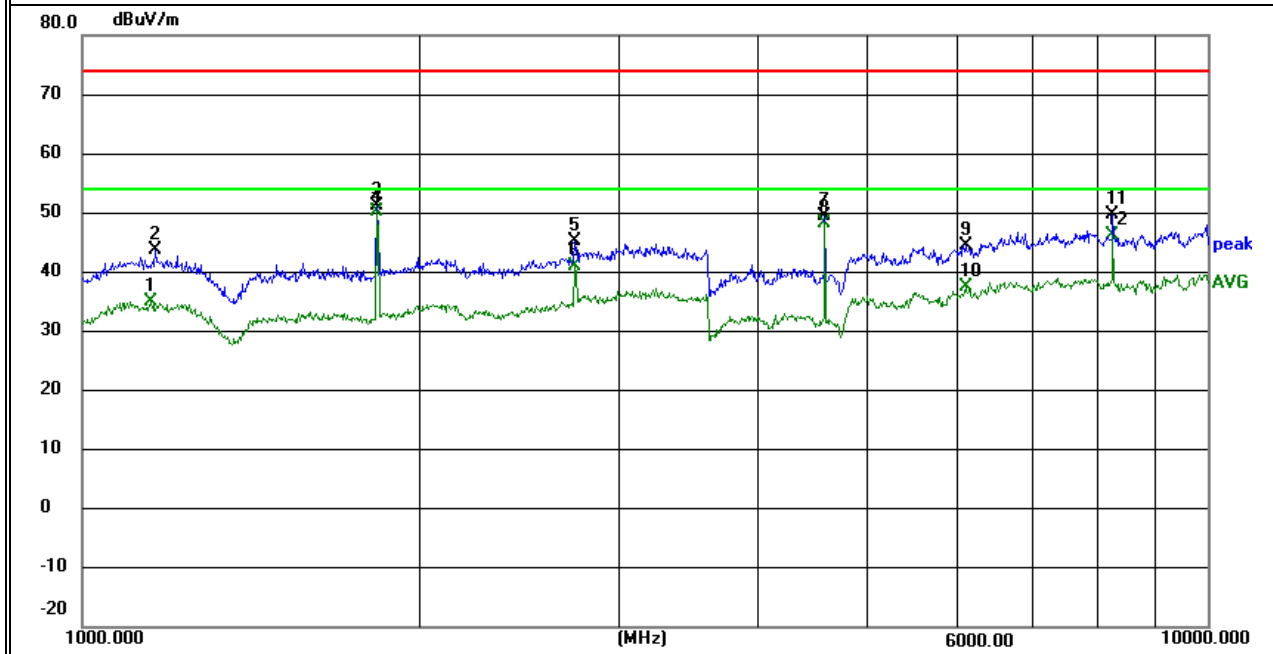


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	WNG-926.5	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1098.550	60.72	-17.96	42.76	74.00	-31.24	peak
H	1099.225	52.66	-17.96	34.70	54.00	-19.30	AVG
H	1853.200	66.02	-15.06	50.96	74.00	-23.04	peak
H	1853.200	64.95	-15.06	49.89	54.00	-4.11	AVG
H	2779.525	56.74	-10.59	46.15	74.00	-27.85	peak
H	2779.975	53.03	-10.58	42.45	54.00	-11.55	AVG
H	4632.625	56.99	-7.82	49.17	74.00	-24.83	peak
H	4632.625	55.56	-7.82	47.74	54.00	-6.26	AVG
H	6087.025	41.93	-4.84	37.09	54.00	-16.91	AVG
H	6115.375	49.30	-4.58	44.72	74.00	-29.28	peak
H	8338.600	49.75	-1.67	48.08	74.00	-25.92	peak
H	8338.600	47.25	-1.67	45.58	54.00	-8.42	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

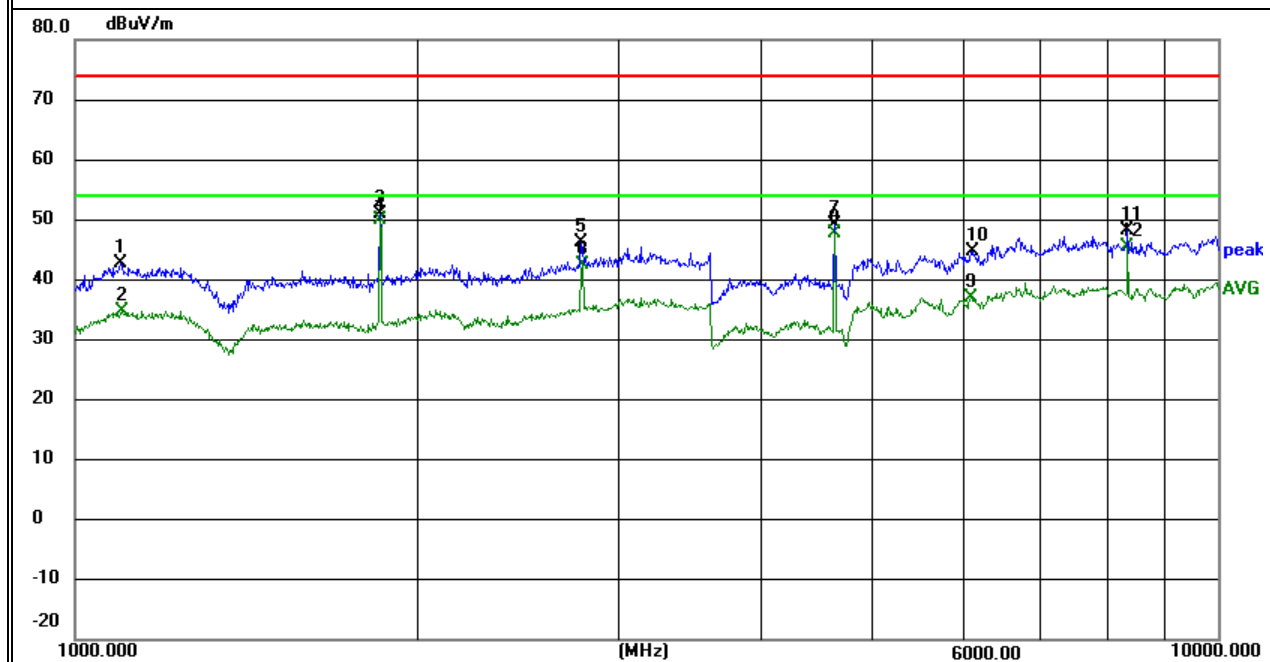


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	24.3℃	Relative Humidity:	50.4%
Test Mode:	WNG-926.5	Test By:	Abel Chen

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1101.025	53.03	-17.97	35.06	54.00	-18.94	AVG
V	1102.600	60.65	-18.00	42.65	74.00	-31.35	peak
V	1853.200	68.05	-15.06	52.99	74.00	-21.01	peak
V	1853.200	67.02	-15.06	51.96	54.00	-2.04	AVG
V	2779.300	55.37	-10.59	44.78	74.00	-29.22	peak
V	2779.300	51.13	-10.59	40.54	54.00	-13.46	AVG
V	4632.850	58.57	-7.82	50.75	74.00	-23.25	peak
V	4632.850	57.27	-7.82	49.45	54.00	-4.55	AVG
V	5954.050	41.33	-4.46	36.87	54.00	-17.13	AVG
V	6103.675	49.23	-4.56	44.67	74.00	-29.33	peak
V	8338.600	51.49	-1.67	49.82	74.00	-24.18	peak
V	8338.600	48.78	-1.67	47.11	54.00	-6.89	AVG

Remark:

1. Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

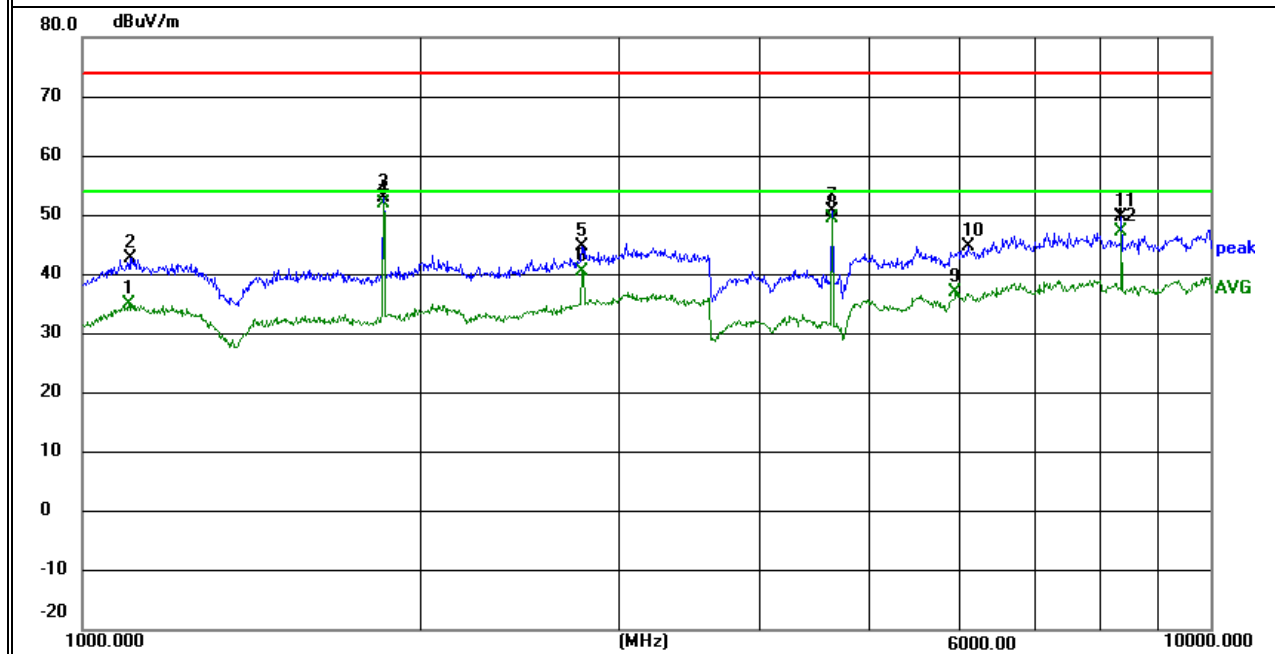

7.3 NUMBER OF HOPPING CHANNEL

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (i) and ANSI C63.10-2020+Cor.1-2023

7.3.2 Conformance Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows ANSI C63.10-2020+Cor.1-2023 clause 7.8.3

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW : To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold


7.3.6 Test Results

EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	20°C	Relative Humidity:	48%
Test Mode:	Mode 5	Test By:	Abel Chen

Mode	Number of Hopping (Channel)	Limit	Verdict
JWL	103	≥ 50	Pass
WNG	103	≥ 50	Pass

Number of Hopping Channel Plot-JWL

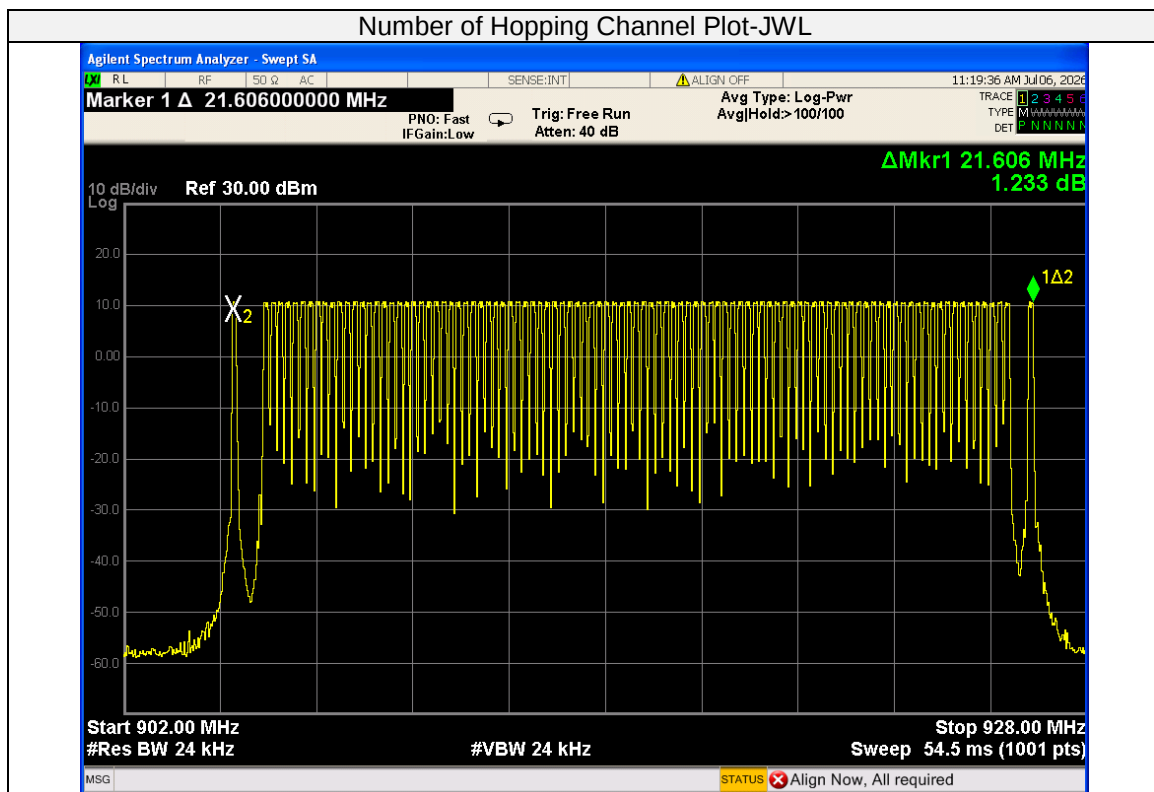

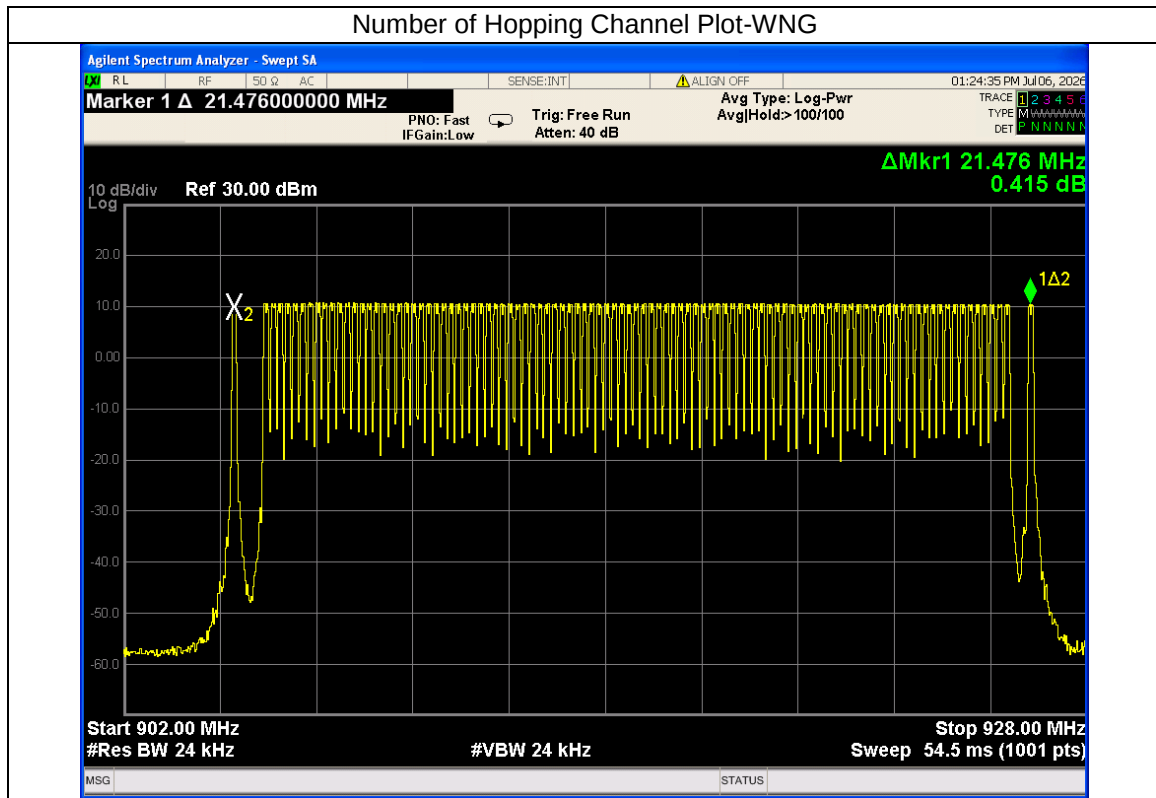

7.4 HOPPING CHANNEL SEPARATION MEASUREMENT

7.4.1 Applicable Standard

According to FCC Part 15.247(a) (1) and ANSI C63.10-2020+Cor.1-2023

7.4.2 Conformance Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The testing follows ANSI C63.10-2020+Cor.1-2023 clause 7.8.2

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Measurement Bandwidth or Channel Separation

RBW: Start with the RBW set to approximately 3% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


7.4.6 Test Results

EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	20°C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Abel Chen


Mode	Channel Number	Channel Frequency (MHz)	Measured Channel Separation (kHz)	Limit (kHz)		Verdict
jwl	01-02	905-905.85	781.5	88.48	20dB BW	PASS
	52-53	915.85-916.05	130.0	88.58	20dB BW	PASS
	102-103	925.85-926.5	582.0	81.33	20dB BW	PASS
WNG	01-02	905-905.85	777.0	110.2	20dB BW	PASS
	52-53	915.85-916.05	129.5	110.6	20dB BW	PASS
	102-103	925.85-926.5	577.5	110.2	20dB BW	PASS

Test Plot


Channel Separation plot on channel 01-02-jwl

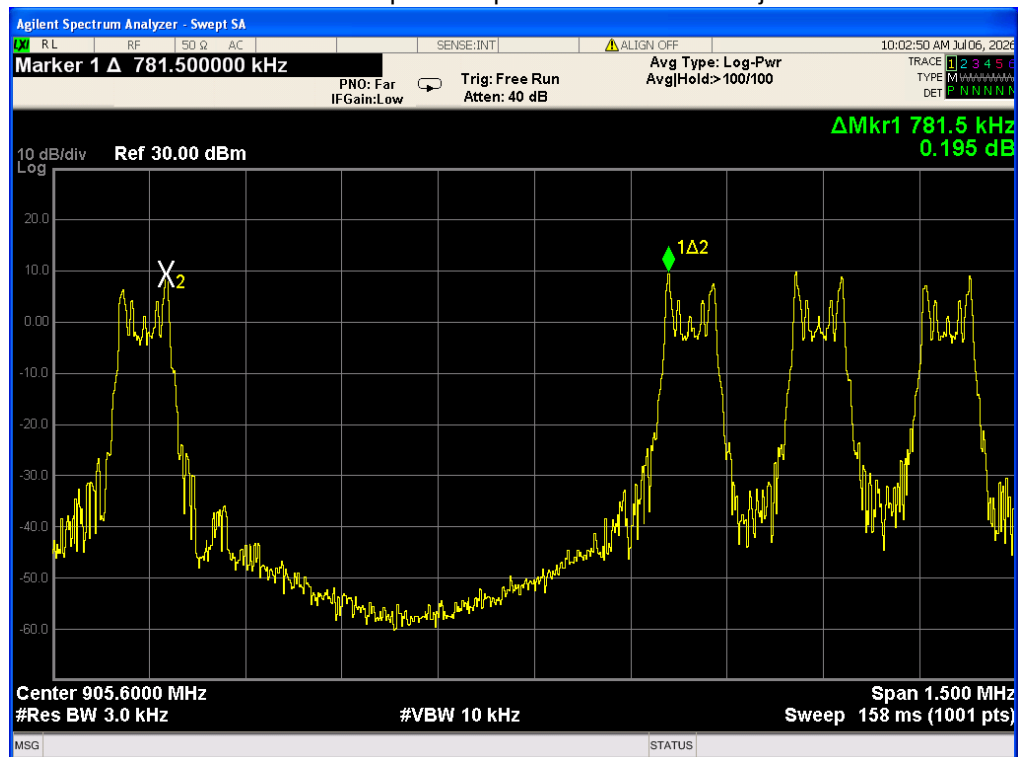


Channel Separation plot on channel 52-53-jwl

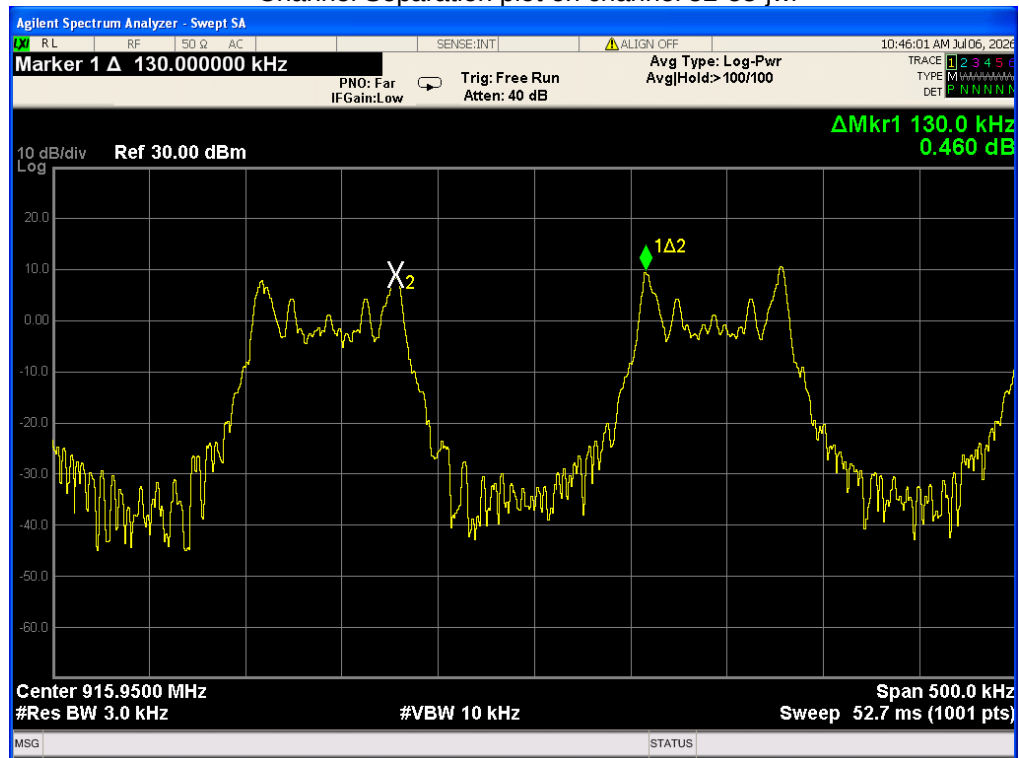


Channel Separation plot on channel 102-103-jwl

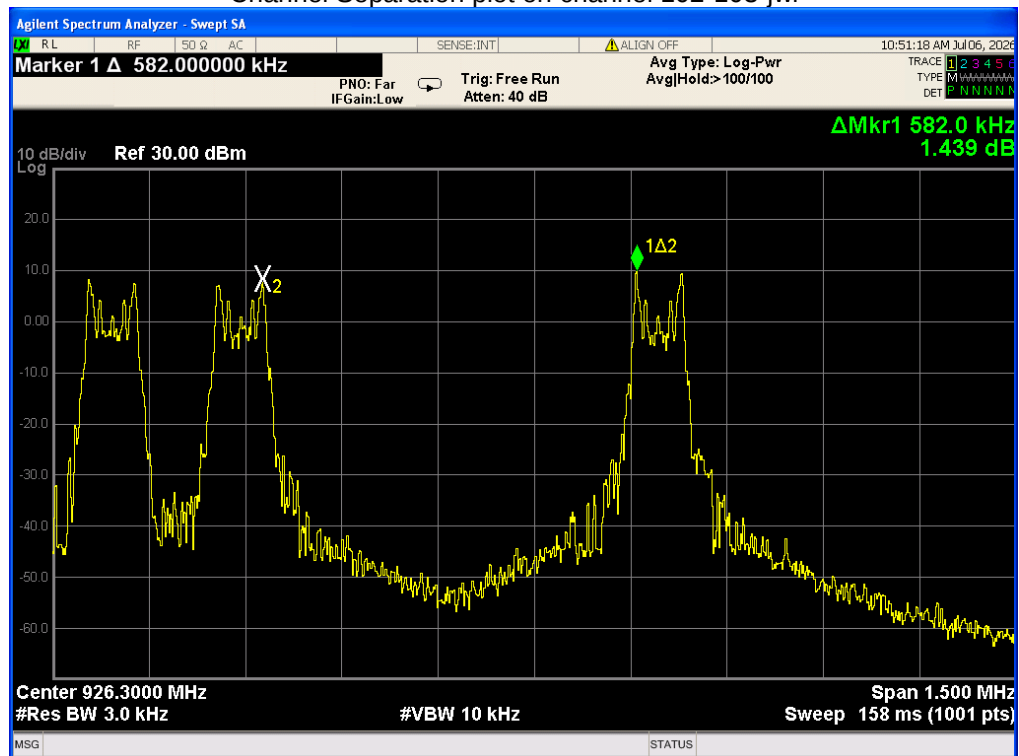


Channel Separation plot on channel 01-02-WNG

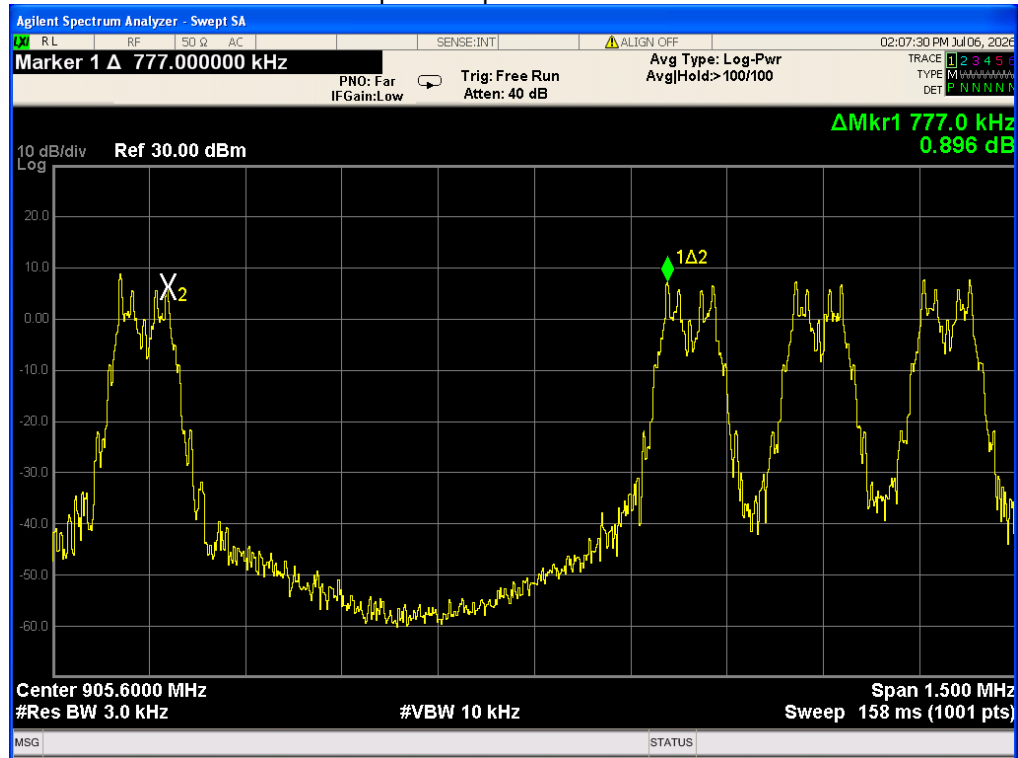

Channel Separation plot on channel 52-53-WNG

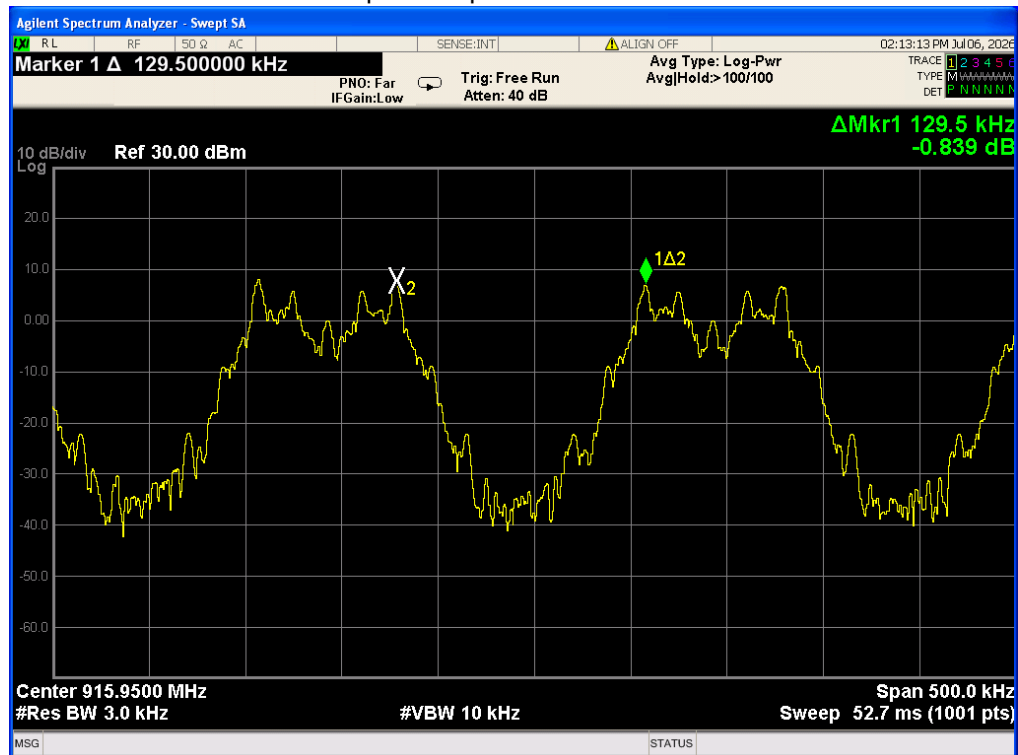

Channel Separation plot on channel 102-103-WNG

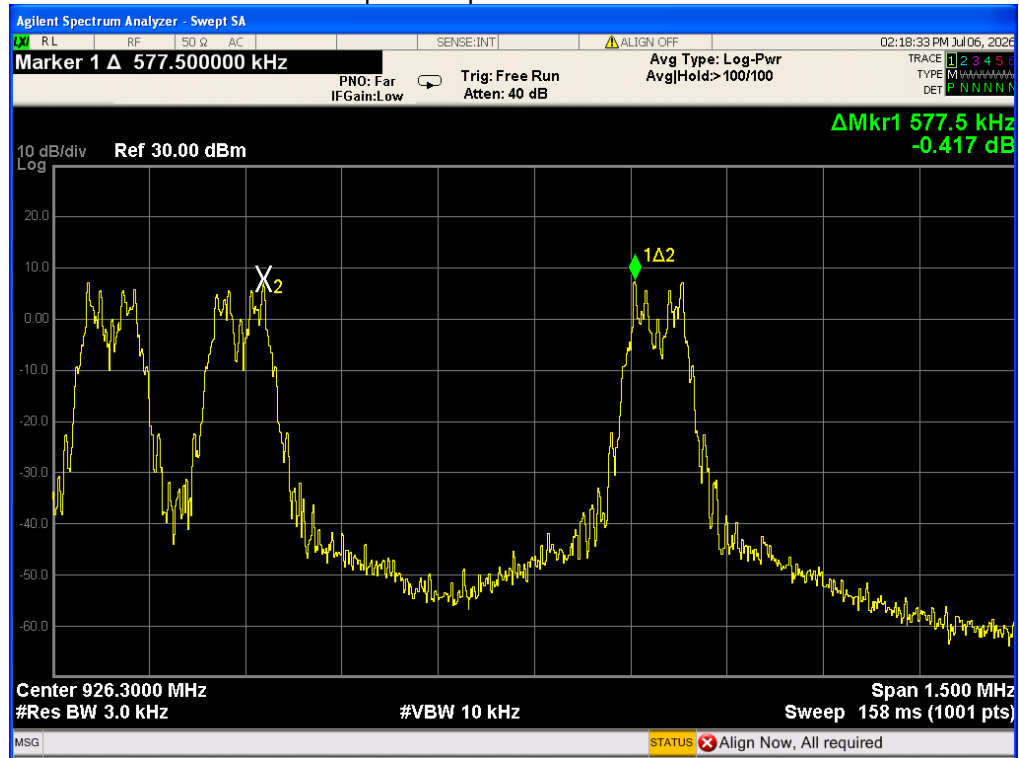

7.5 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

7.5.1 Applicable Standard

According to FCC Part 15.247(a)(1)(i) and ANSI C63.10-2020+Cor.1-2023

7.5.2 Conformance Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows ANSI C63.10-2020+Cor.1-2023 clause 7.8.4

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW < 200kHz

VBW ≥ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Measure the maximum time duration of one single pulse.

Set the EUT packet transmitting.

Measure the maximum time duration of one single pulse.

7.5.6 Test Results



EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	20°C	Relative Humidity:	48%
Test Mode:	Mode5	Test By:	Abel Chen

Mode	Center Frequency (MHz)	Transmit Time per Hop (ms)	The Number of Hop Within a limited time (N)	Dwell Time (s)	Limits (s)	Result
jwl	915.85	26.5	7	0.1855	0.4	Pass
WNG	915.85	26.5	7	0.1855	0.4	Pass



Note:

1. Sweep time=20s;
2. Dwell Time(s) = Transmit Time per Hop× N

jwl

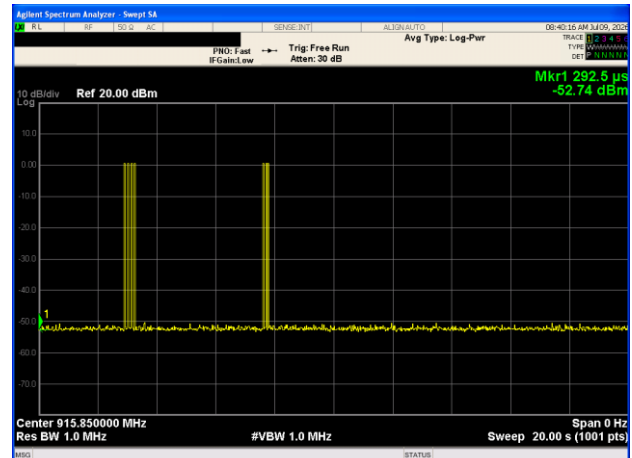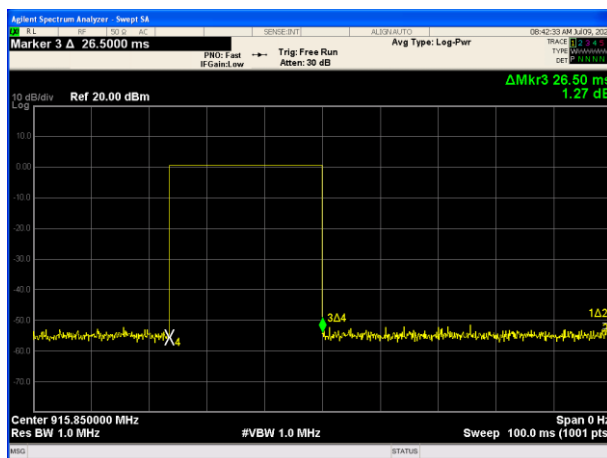

WNG

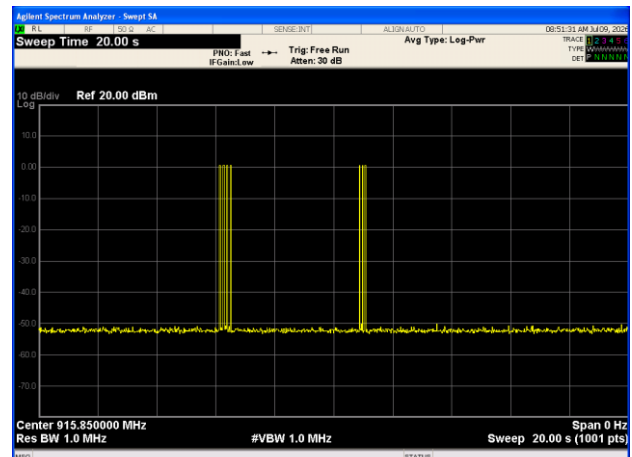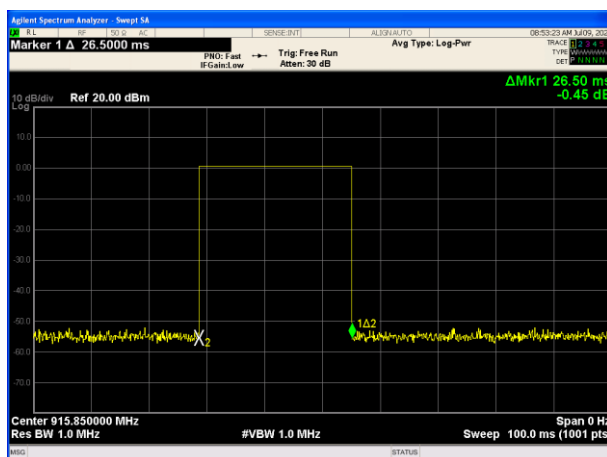

7.5.7 Pseudorandom Frequency Hopping Sequence

Each frequency used equally on the average by each transmitter.
The channel order is determined by the Channel mapping Table, system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals

Pseudo-random sequence Table

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	905	36	912.65	71	919.65
55	916.45	37	912.85	81	921.65
56	916.65	38	913.05	77	920.85
46	914.65	2	905.85	74	920.25
47	914.85	51	915.65	26	910.65
24	910.25	9	907.25	27	910.85
25	910.45	10	907.45	72	919.85
75	920.45	54	916.25	73	920.05
76	920.65	22	909.85	78	921.05
28	911.05	23	910.05	82	921.85
29	911.25	7	906.85	79	921.25
52	915.85	8	907.05	84	922.25
53	916.05	48	915.05	83	922.05
57	916.85	49	915.25	80	921.45
58	917.05	50	915.45	85	922.45
59	917.25	18	909.05	3	906.05
60	917.45	19	909.25	4	906.25
61	917.65	20	909.45	5	906.45
62	917.85	21	909.65	11	907.65
63	918.05	31	911.65	12	907.85
64	918.25	32	911.85	13	908.05
65	918.45	33	912.05	6	906.65
69	919.25	66	918.65	39	913.25
70	919.45	67	918.85	40	913.45
30	911.45	68	919.05	41	913.65
34	912.25	90	923.45	97	924.85
35	912.45	91	923.65	98	925.05
86	922.65	92	923.85	15	908.45
87	922.85	100	925.45	42	913.85
88	923.05	95	924.45	14	908.25
89	923.25	102	925.85	99	925.25
16	908.65	43	914.05	94	924.25
17	908.85	44	914.25	96	924.65
93	924.05	45	914.45		
101	925.65	103	926.5		

7.6 20DB BANDWIDTH TEST

7.6.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2020+Cor.1-2023

7.6.2 Conformance Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows ANSI C63.10-2020+Cor.1-2023 clause 6.9.2

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


7.6.6 Test Results

EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	20°C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Abel Chen


Mode	Test Channel	Frequency	Measured Bandwidth (KHz)	Limit	Verdict
		(MHz)		(kHz)	
jwl	1	905.00	88.48	250	PASS
	52	915.85	88.58	250	PASS
	103	926.50	81.33	250	PASS
WNG	1	905.00	110.2	250	PASS
	52	915.85	110.6	250	PASS
	103	926.50	110.2	250	PASS

Test Plot-jwl


20dB Bandwidth plot on channel 01

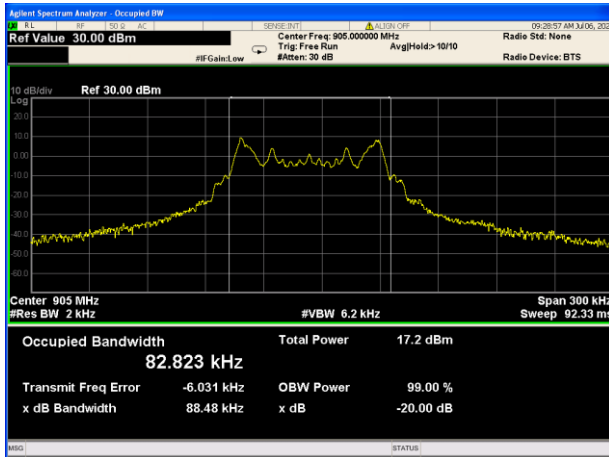

20dB Bandwidth plot on channel 52

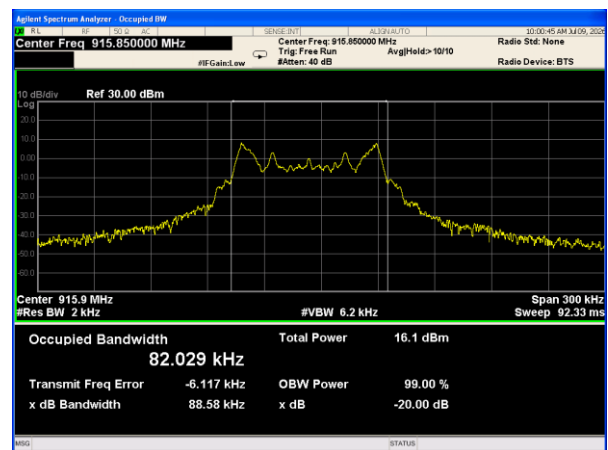


20dB Bandwidth plot on channel 103

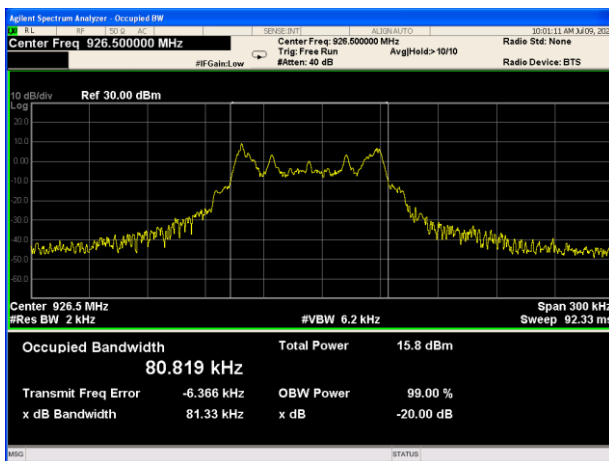


Test Plot-WNG


20dB Bandwidth plot on channel 01

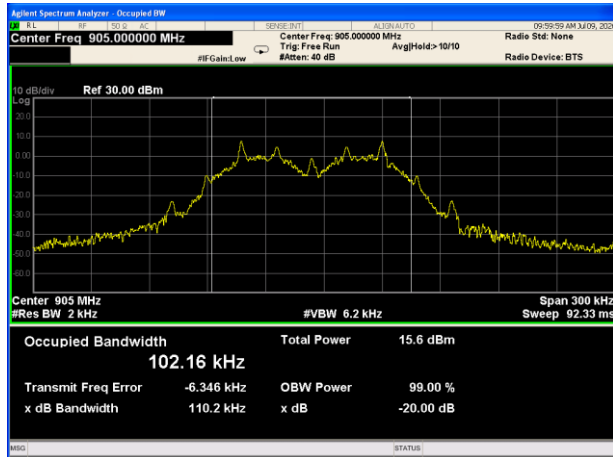

20dB Bandwidth plot on channel 52

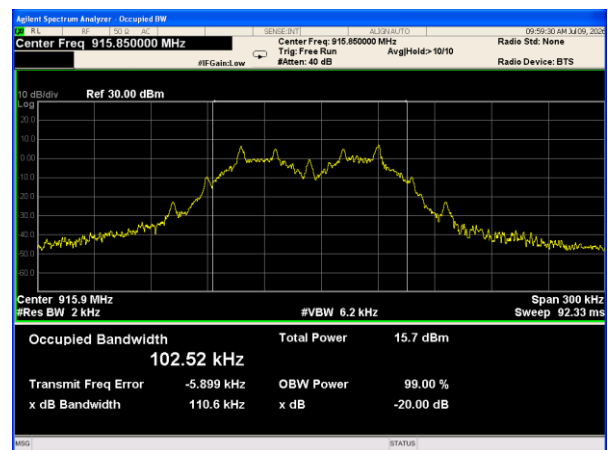

20dB Bandwidth plot on channel 103

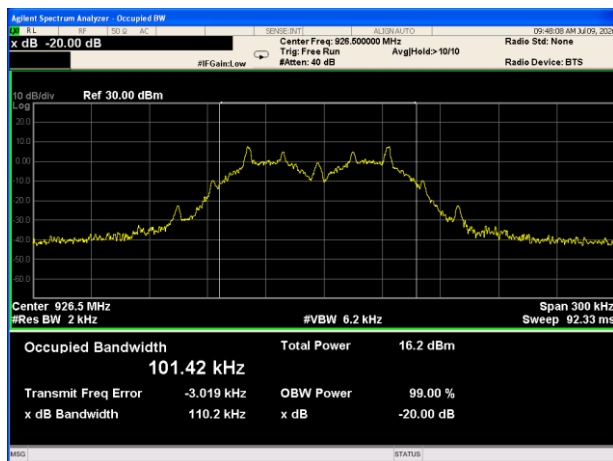

7.7 PEAK OUTPUT POWER

7.7.1 Applicable Standard

According to FCC Part 15.247(b)(1) and ANSI C63.10-2020+Cor.1-2023

7.7.2 Conformance Limit

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows ANSI C63.10-2020+Cor.1-2023 clause 7.8.5.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


7.7.6 Test Results

EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	20°C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Abel Chen


Mode	Test Channel	Frequency	Power Setting	Peak Output Power	LIMIT	Verdict
		(MHz)		(dBm)	(dBm)	
jwl	1	905.00	Default	10.591	30	PASS
	52	915.85	Default	10.585	30	PASS
	103	926.50	Default	10.516	30	PASS
WNG	1	905.00	Default	10.363	30	PASS
	52	915.85	Default	10.161	30	PASS
	103	926.50	Default	10.880	30	PASS

Test Plot-jwl


Peak output Power plot on channel 01

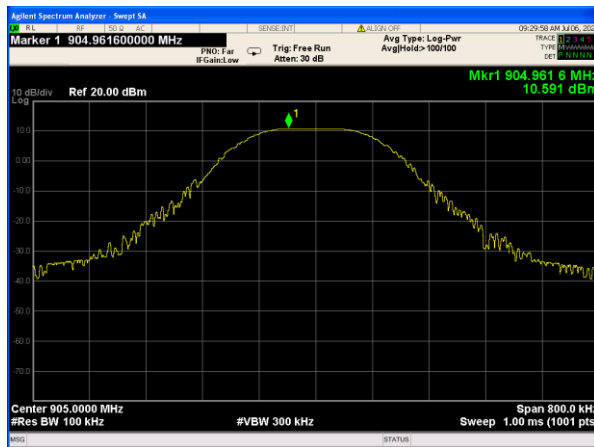

Peak output Power plot on channel 52

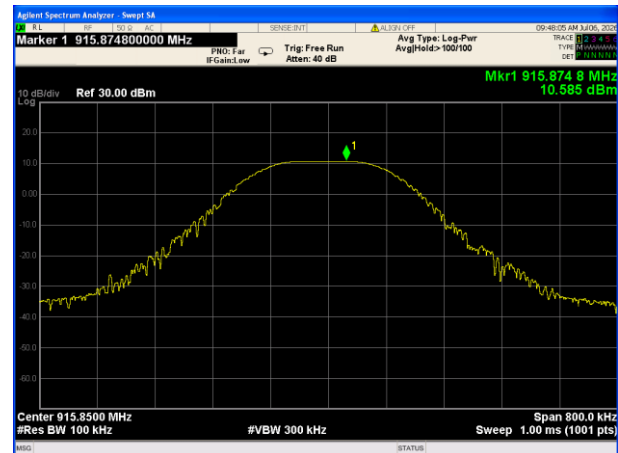


Peak output Power plot on channel 103

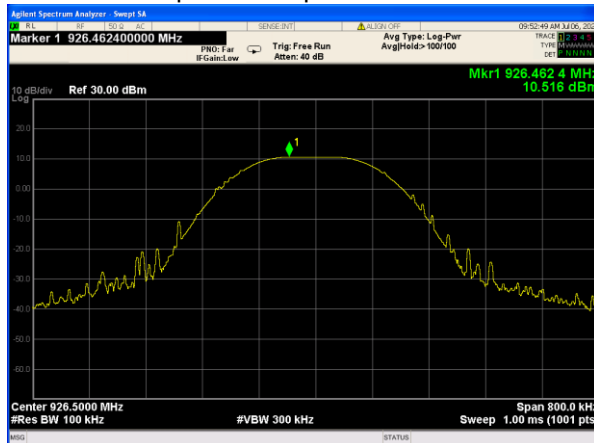


Test Plot-WNG


Peak output Power plot on channel 01

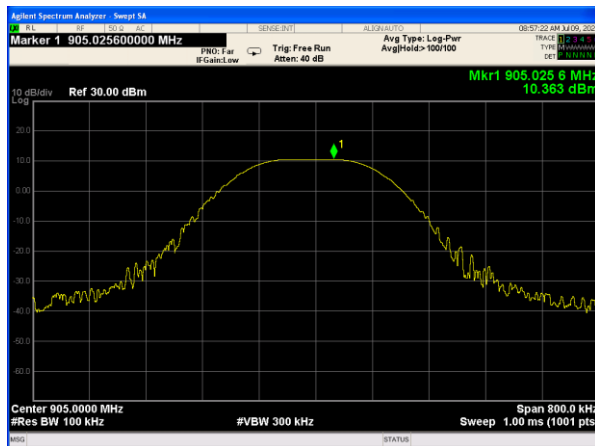

Peak output Power plot on channel 52

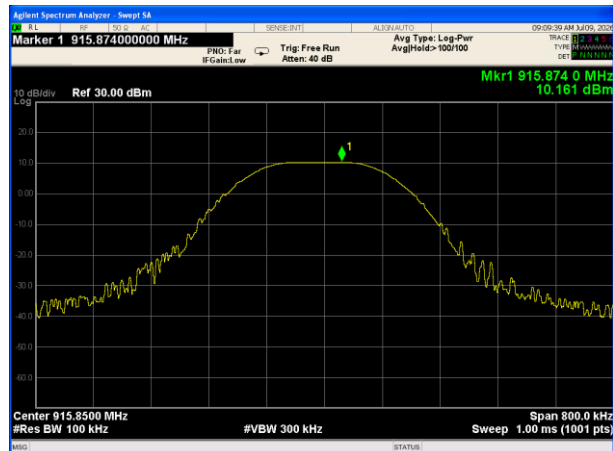

Peak output Power plot on channel 103

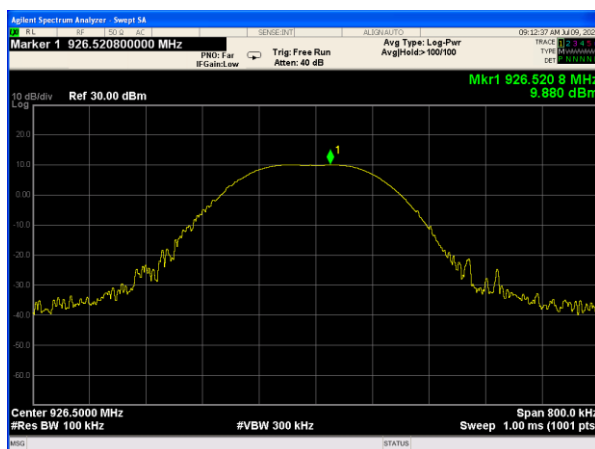

7.8 CONDUCTED BAND EDGE MEASUREMENT

7.8.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2020+Cor.1-2023

7.8.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows ANSI C63.10-2020+Cor.1-2023 clause 7.8.6.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = 100KHz

VBW = 300KHz

Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.


Repeat above procedures until all measured frequencies were complete.

7.8.6 Test Results


EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	20°C	Relative Humidity:	48%
Test Mode:	Mode2 /Mode4/ Mode5	Test By:	Abel Chen

Test Plot-JWL


GFSK: Band Edge-Low Channel

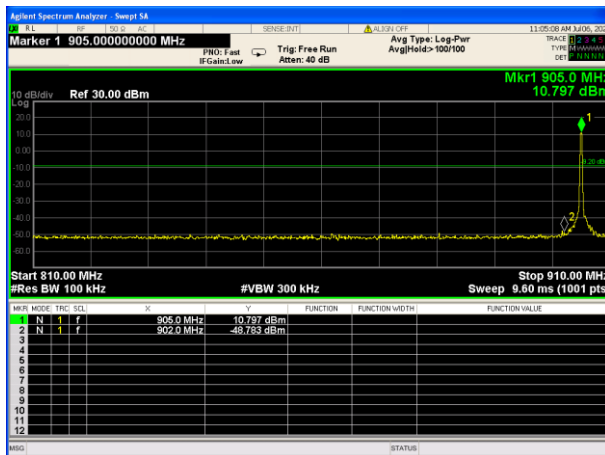


GFSK: Band Edge-High Channel

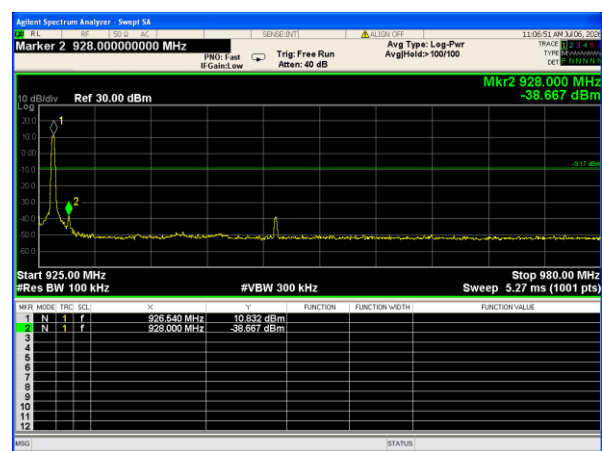

GFSK: Band Edge-Low Channel (Hopping Mode)

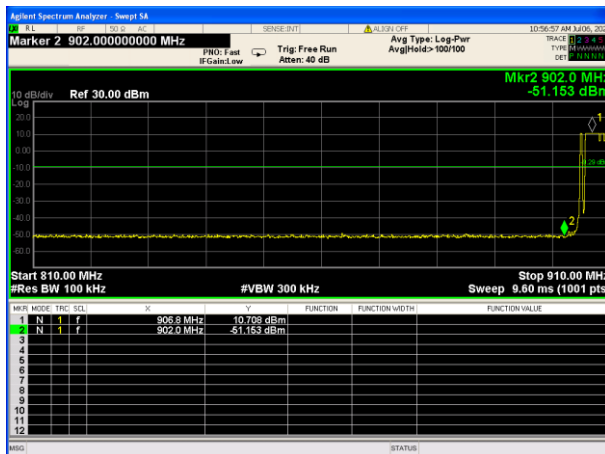


GFSK: Band Edge-High Channel (Hopping Mode)

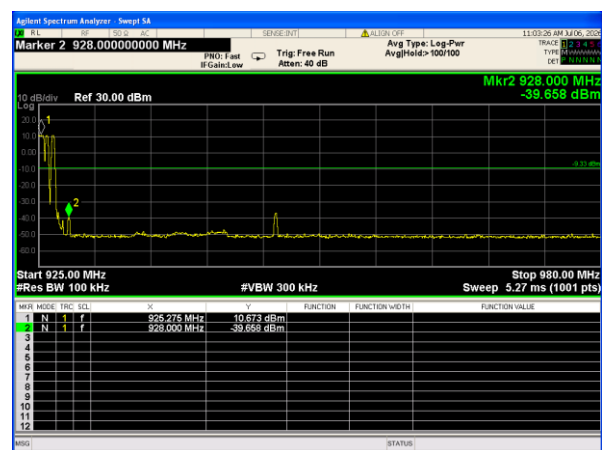


Test Plot-WNG


GFSK: Band Edge-Low Channel

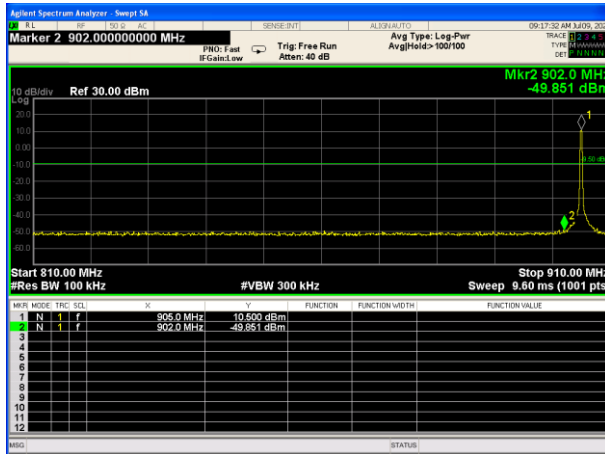


GFSK: Band Edge-High Channel

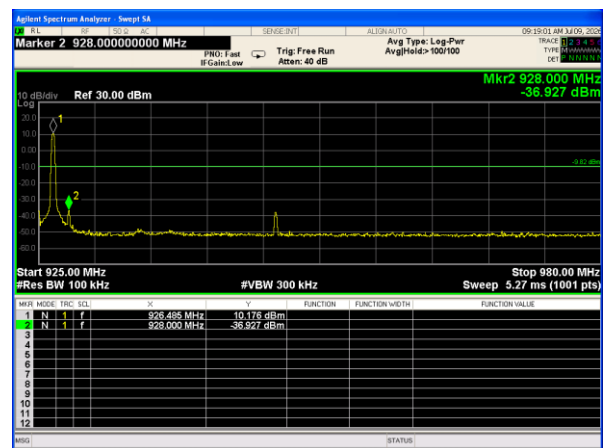

GFSK: Band Edge-Low Channel (Hopping Mode)

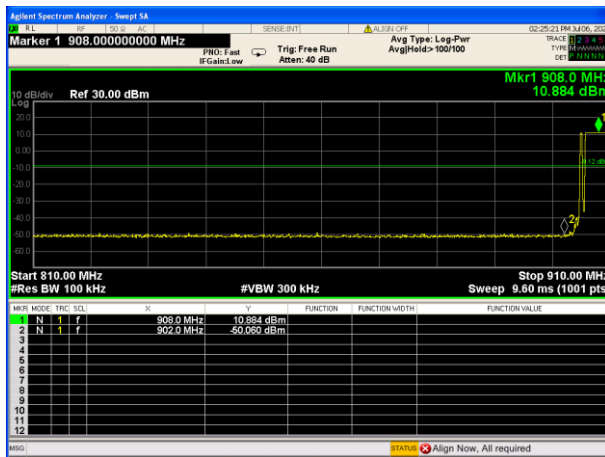

GFSK: Band Edge-High Channel (Hopping Mode)

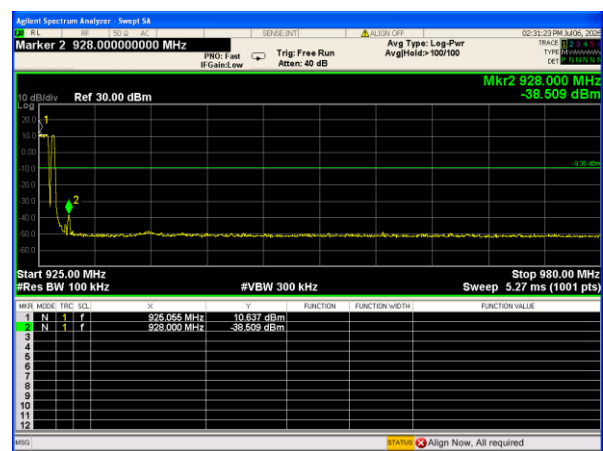

7.9 SPURIOUS RF CONDUCTED EMISSION

7.9.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2020+Cor.1-2023.

7.9.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.9.4 Test Setup

Please refer to Section 6.1 of this test report.

7.9.5 Test Procedure

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Then the limit shall be attenuated by at least 20 dB relative to the maximum amplitude level in 100 kHz.

7.9.6 Test Results


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

EUT:	Air quality monitor	Model No.:	LQ.L.J-000-NA
Temperature:	20°C	Relative Humidity:	48%
Test Mode:	Mode2 /Mode3/ Mode4	Test By:	Abel Chen


JWL

Test Plot


GFSK on channel 01

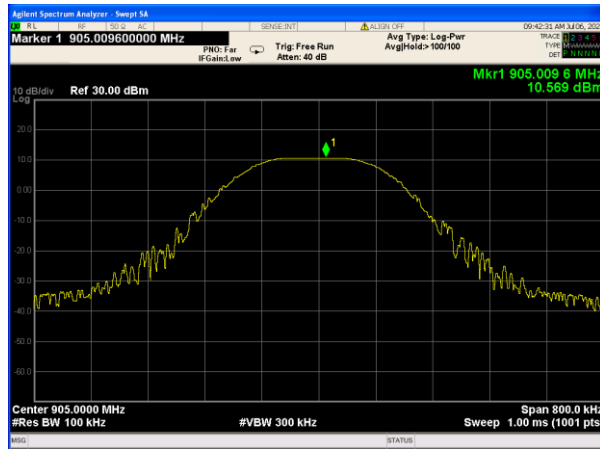

GFSK on channel 01

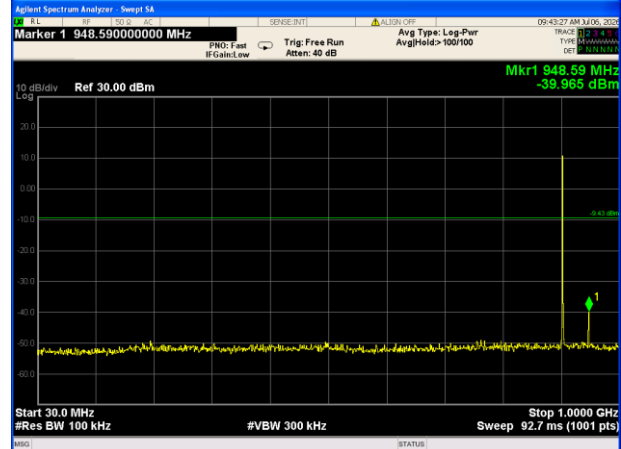


GFSK on channel 01

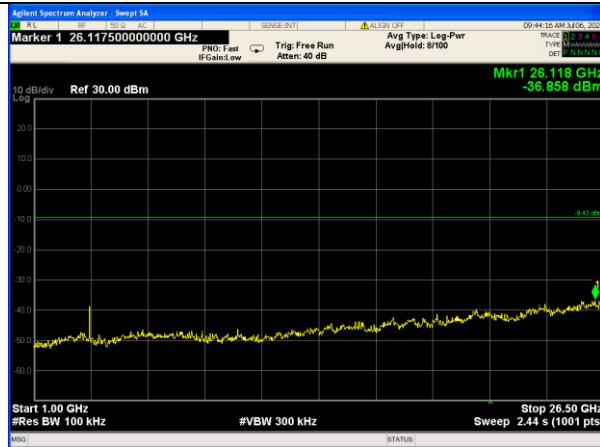


Test Plot


GFSK on channel 52

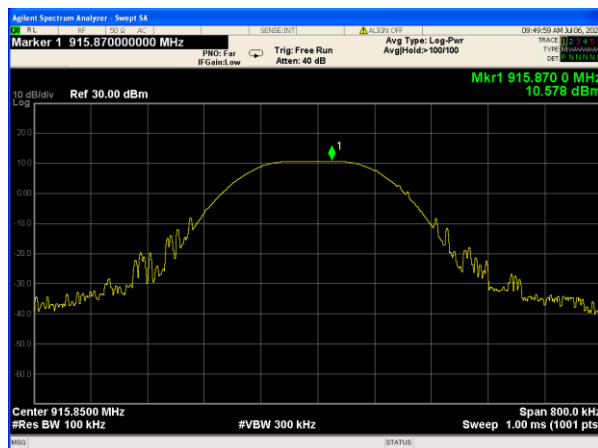

GFSK on channel 52

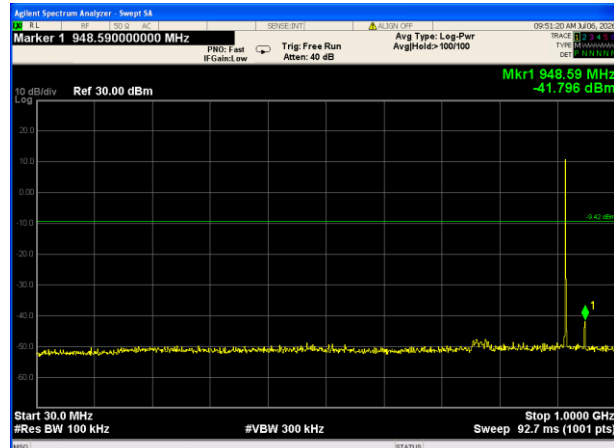


GFSK on channel 52

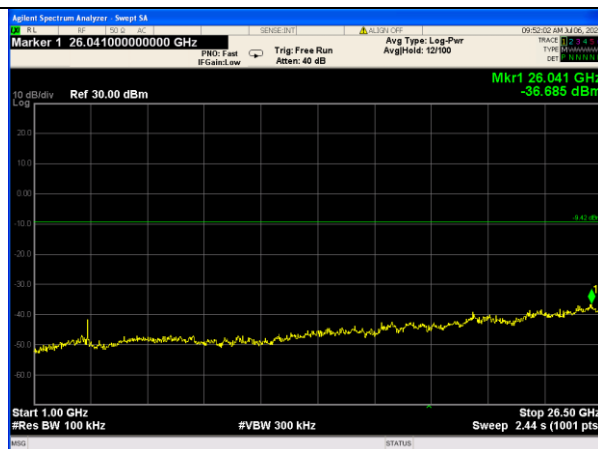


Test Plot


GFSK on channel 103

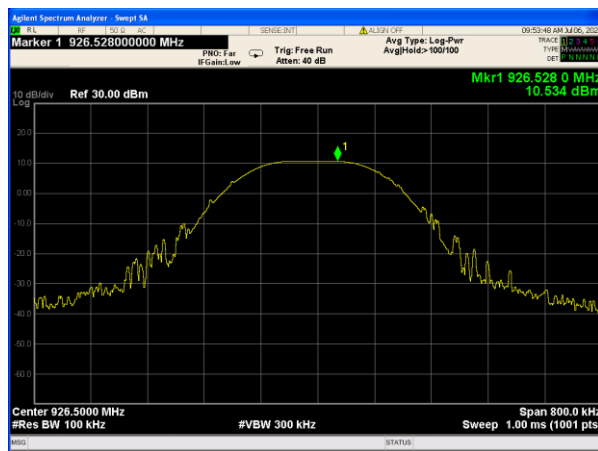

GFSK on channel 103

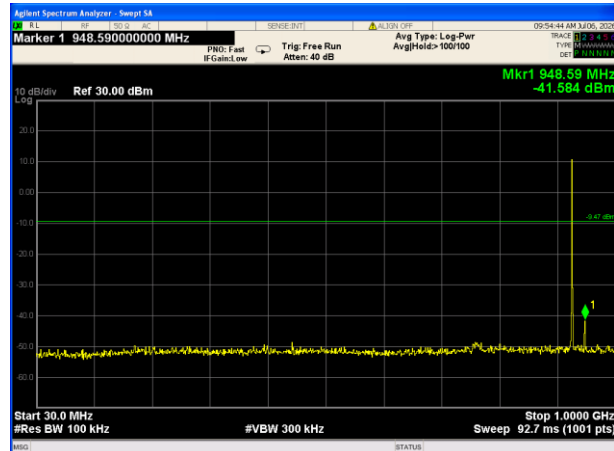


GFSK on channel 103

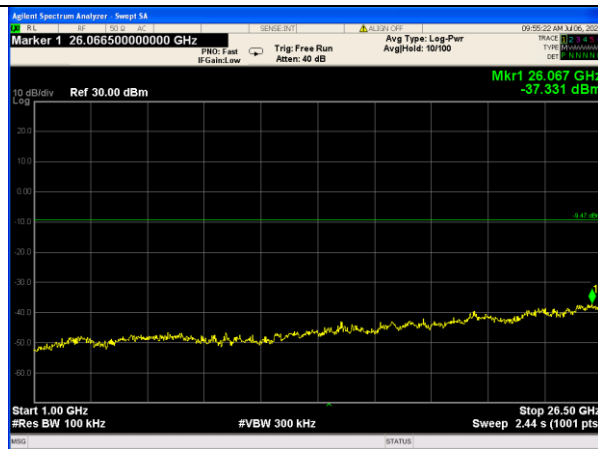


WNG

Test Plot


GFSK on channel 01

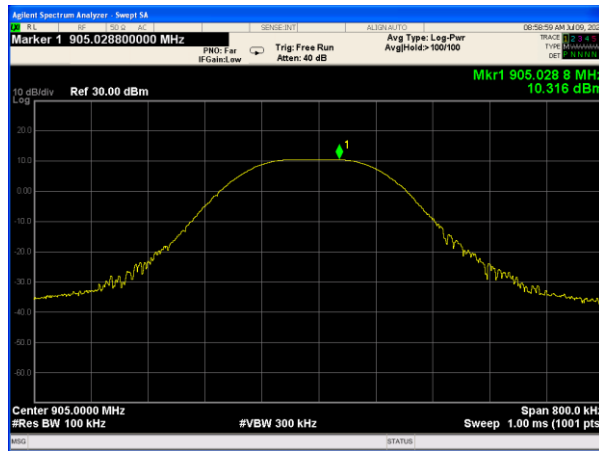

GFSK on channel 01

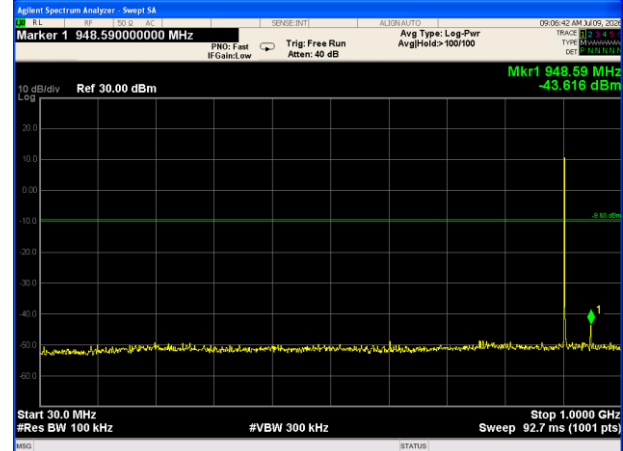


GFSK on channel 01

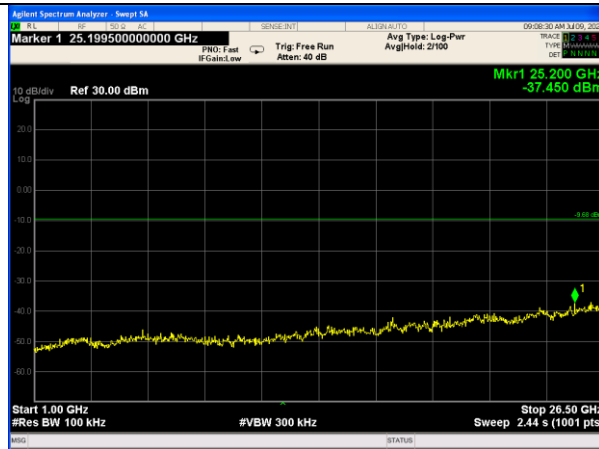


Test Plot


GFSK on channel 52

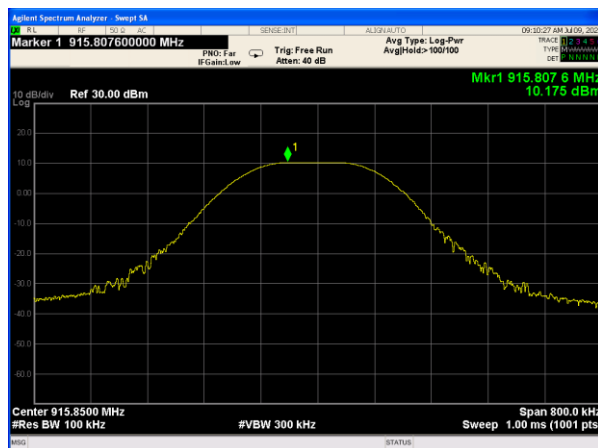

GFSK on channel 52

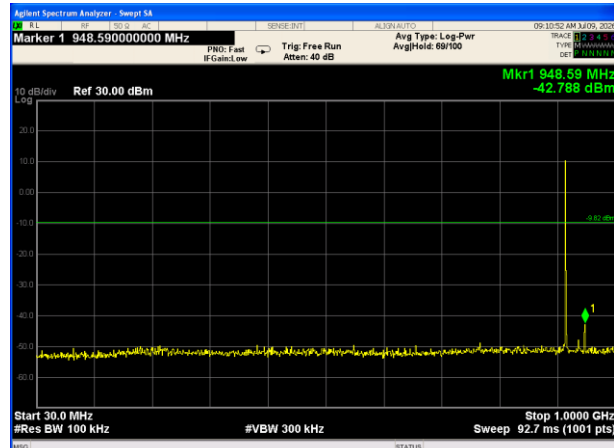


GFSK on channel 52

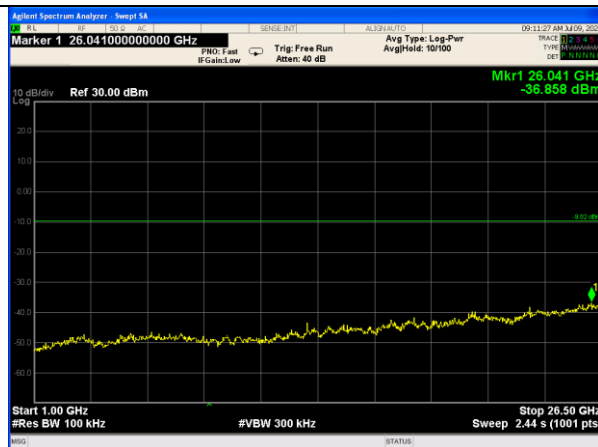


Test Plot


GFSK on channel 103

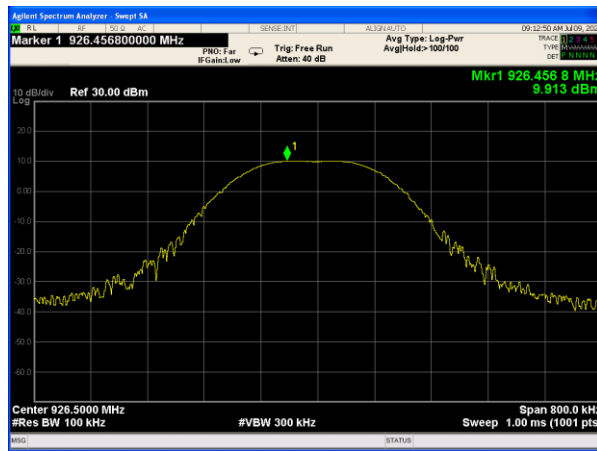

GFSK on channel 103

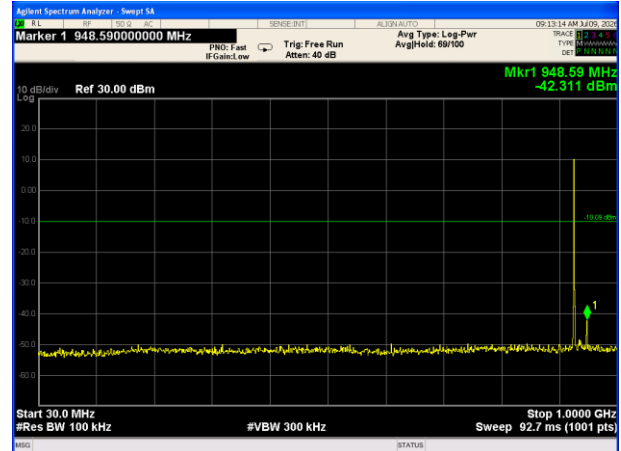

GFSK on channel 103

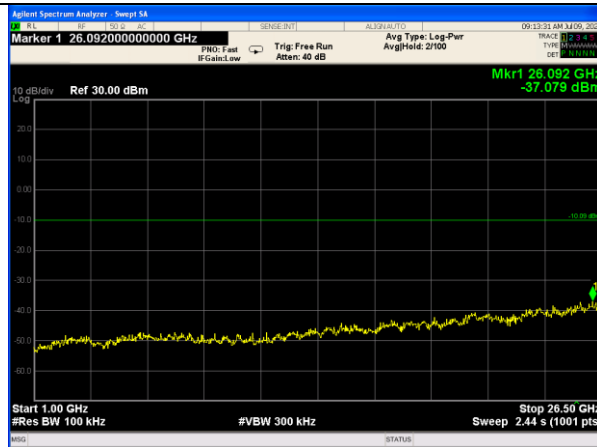

7.10 ANTENNA APPLICATION**7.10.1 Antenna Requirement**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.10.2 Result

The antenna is an integral antenna which cannot replace by end-user.
Antenna Type: PCB antenna. It comply with the standard of 15.203 requirement.

END OF REPORT