RF Test Data for Bluetooth LE (Conducted Measurements)

General Description of EUT	
Product Name:	Smart Bird Feeder Camera
Test Model:	FB-A01
Sample ID:	HC-C-202501-0012-01-01
Environmental Conditions	
Temperature:	25.6℃
Relative Humidity:	48.6%
Test Voltage:	DC 3.7V
Test Engineer:	ZKN Zhou
Note: For a more detailed features description, please refer to the report TBR-C-202501-0012-6 The report only show the worst case data.	

Contents

1. Duty Cycle 3
2. Maximum Conducted Output Power 6
3. -6dB Bandwidth 9
4. Occupied Channel Bandwidth 12
5. Maximum Power Spectral Density Level 15
6. Band Edge 18
7. Conducted RF Spurious Emission 21
8. Restrict Band 25

1. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	87.23	0.59	0.61
NVNT	BLE 1Mbps	2440	Ant1	87.7	0.57	0.61
NVNT	BLE 1Mbps	2480	Ant1	87.23	0.59	0.61

Test Graphs

Duty Cycle NVNT BLE 1Mbps 2402MHz Ant1

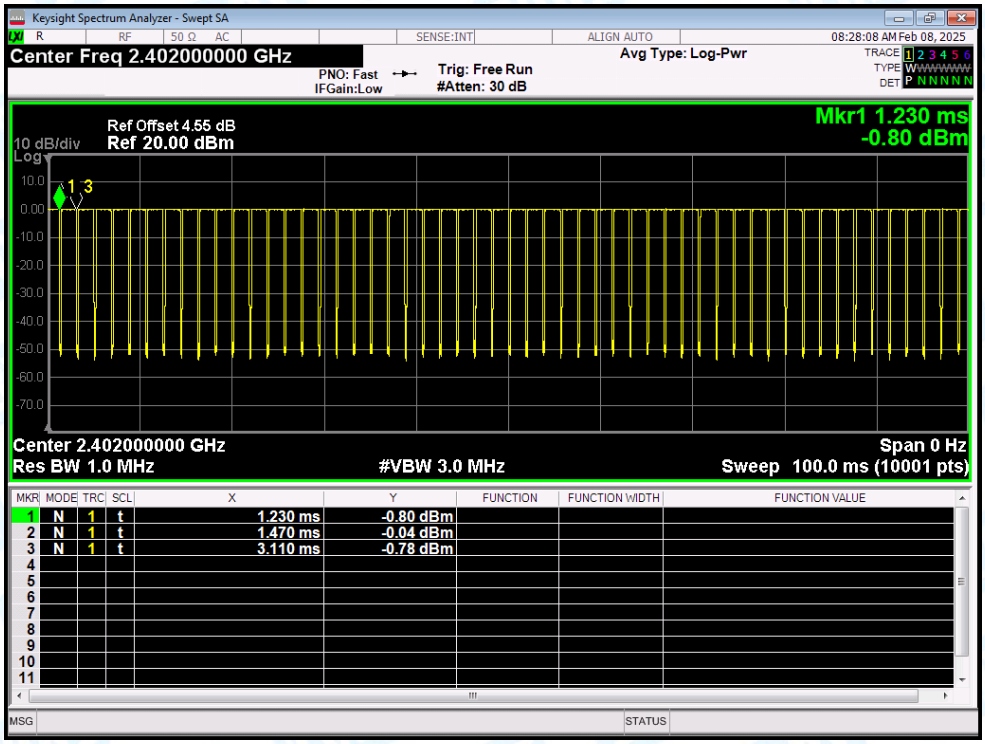

Duty Cycle NVNT BLE 1Mbps 2440MHz Ant1

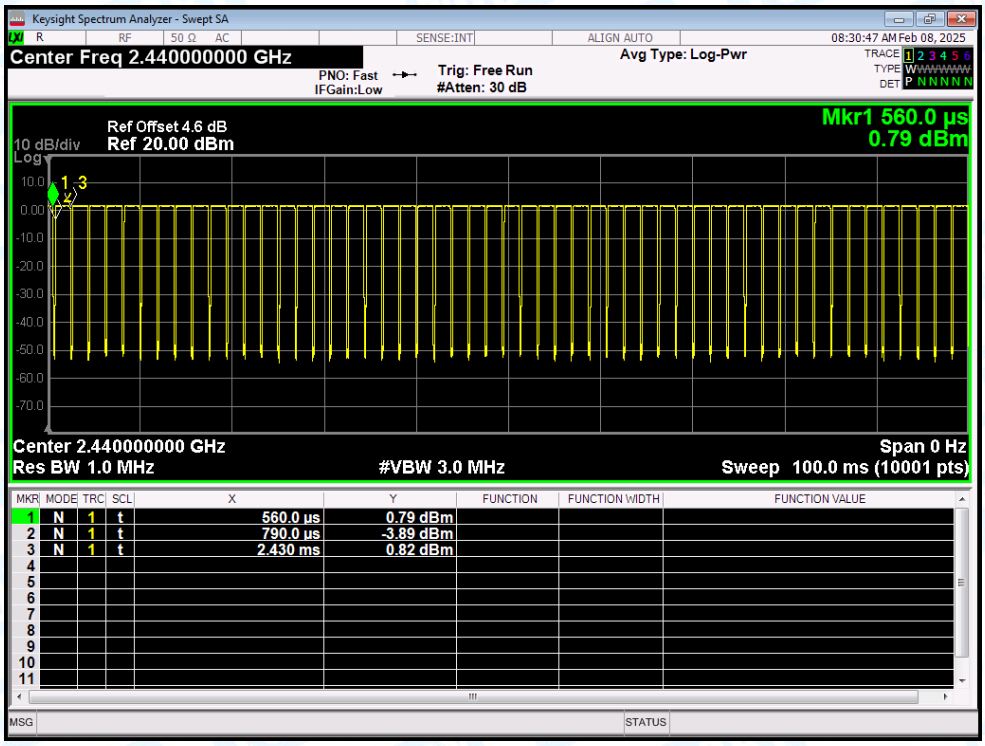

Duty Cycle NVNT BLE 1Mbps 2480MHz Ant1

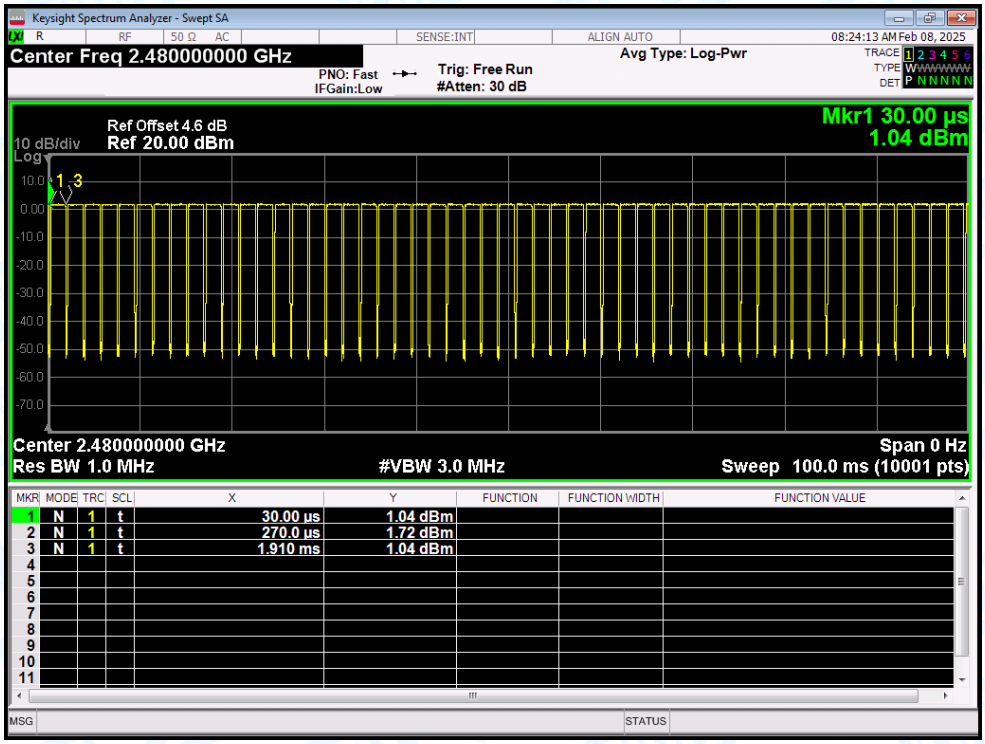

2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.411	30	Pass
NVNT	BLE 1Mbps	2440	Ant1	1.914	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	2.161	30	Pass

Test Graphs

Power NVNT BLE 1Mbps 2402MHz Ant1

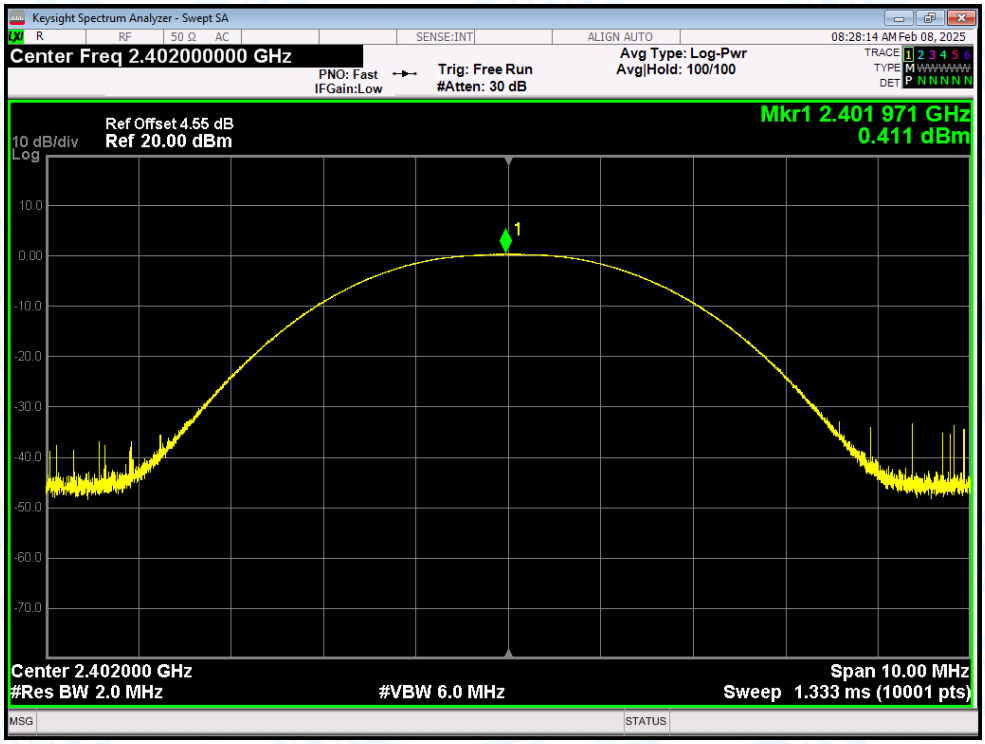

Power NVNT BLE 1Mbps 2440MHz Ant1

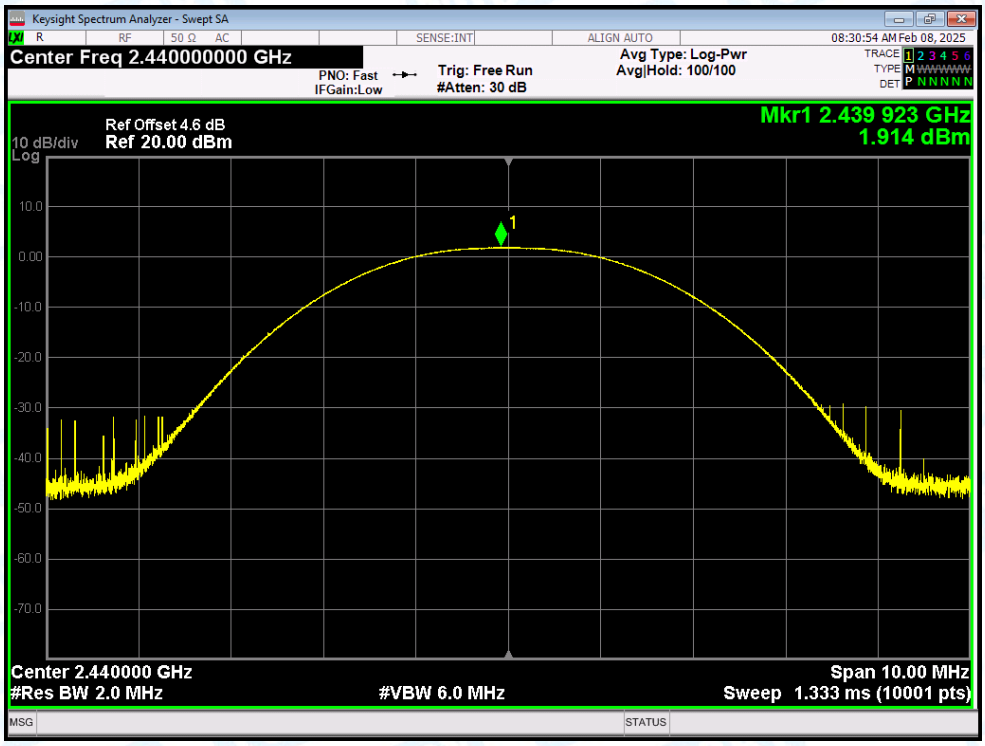

Power NVNT BLE 1Mbps 2480MHz Ant1

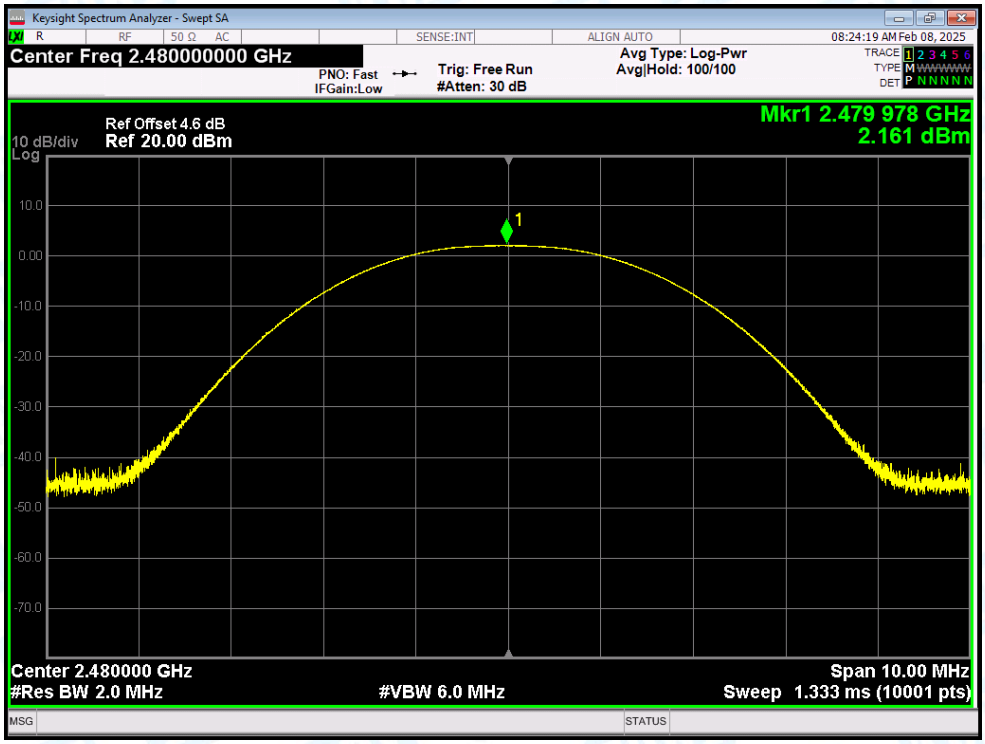

3. -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.66	0.5	Pass
NVNT	BLE 1Mbps	2440	Ant1	0.66	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.66	0.5	Pass

Test Graphs

-6dB Bandwidth NVNT BLE 1Mbps 2402MHz Ant1

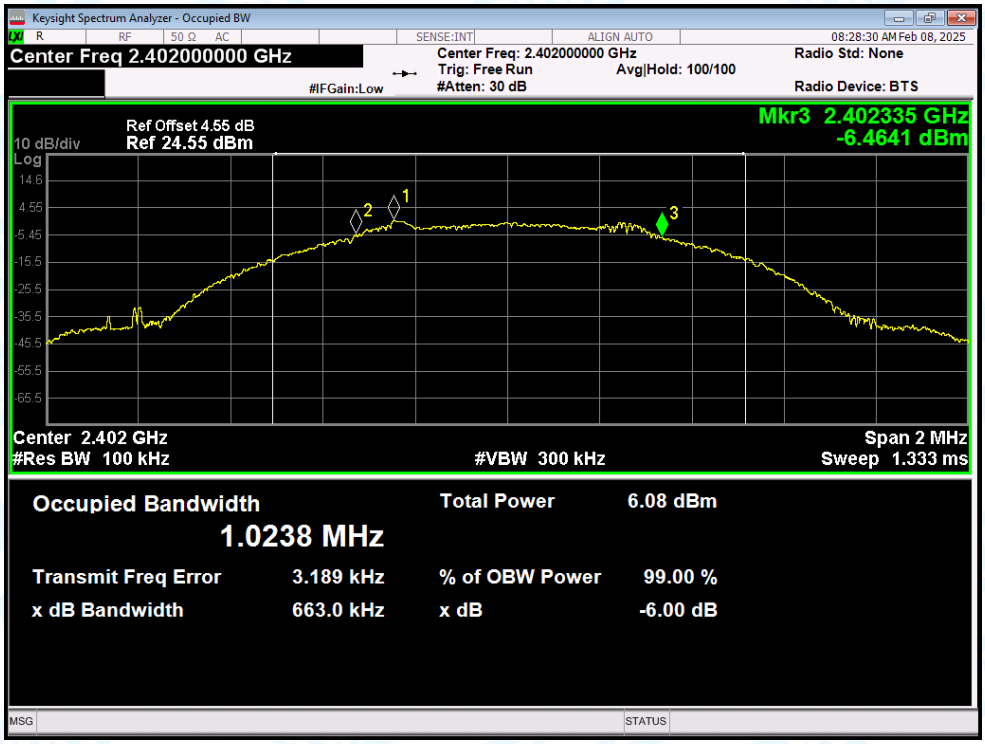

-6dB Bandwidth NVNT BLE 1Mbps 2440MHz Ant1

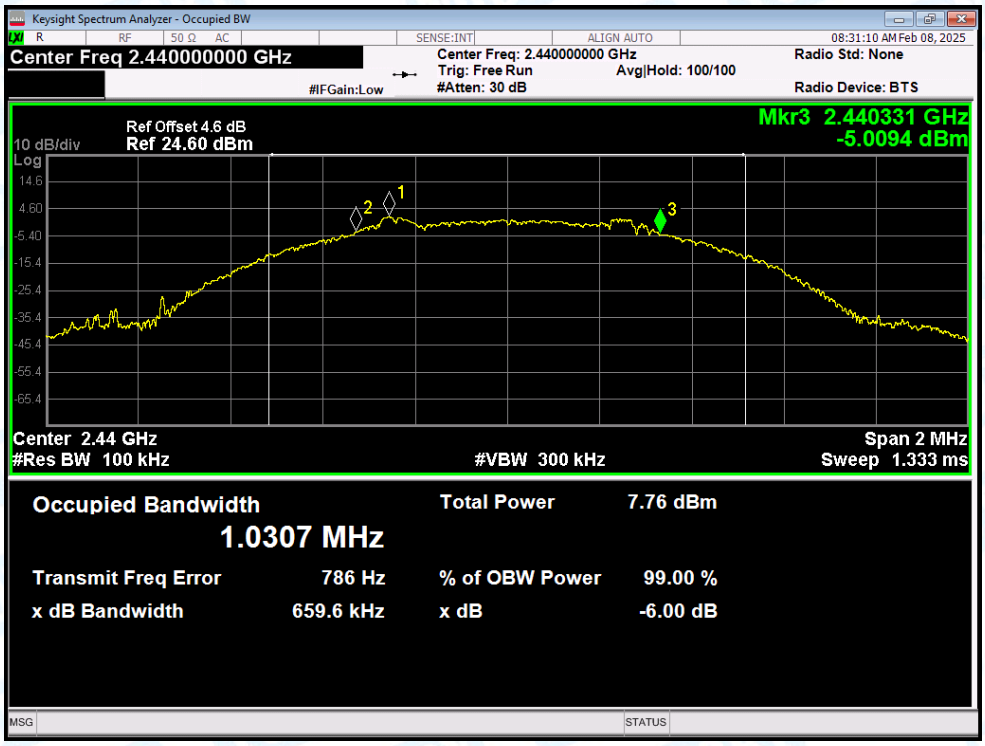

-6dB Bandwidth NVNT BLE 1Mbps 2480MHz Ant1

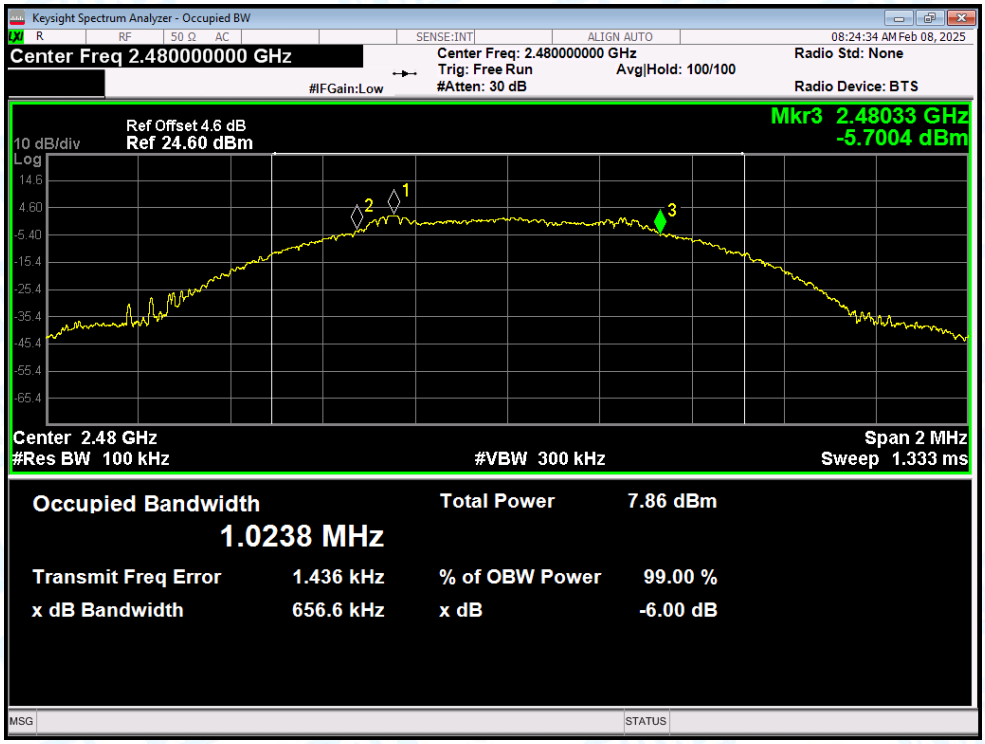

4. Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.02
NVNT	BLE 1Mbps	2440	Ant1	1.022
NVNT	BLE 1Mbps	2480	Ant1	1.018

Test Graphs

OBW NVNT BLE 1Mbps 2402MHz Ant1

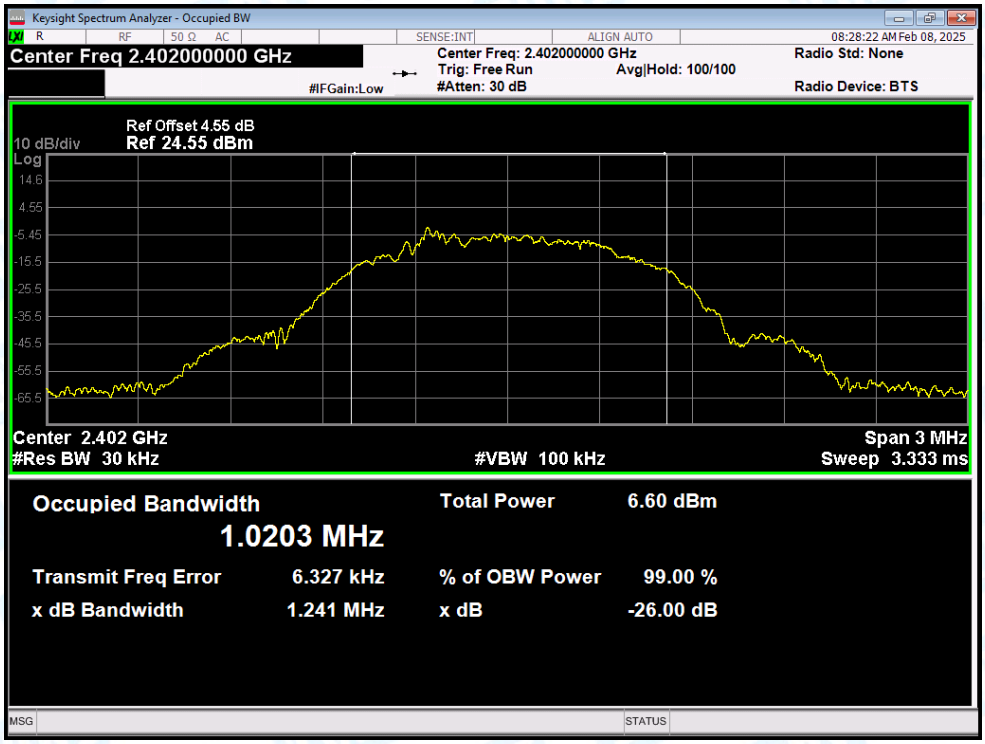

OBW NVNT BLE 1Mbps 2440MHz Ant1

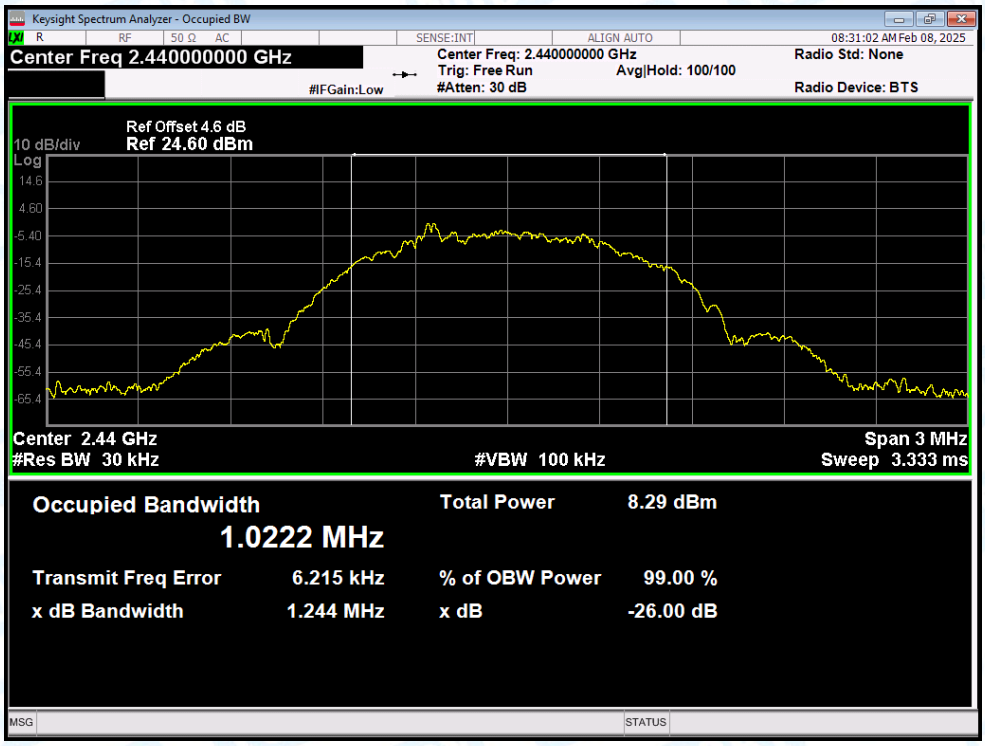

OBW NVNT BLE 1Mbps 2480MHz Ant1

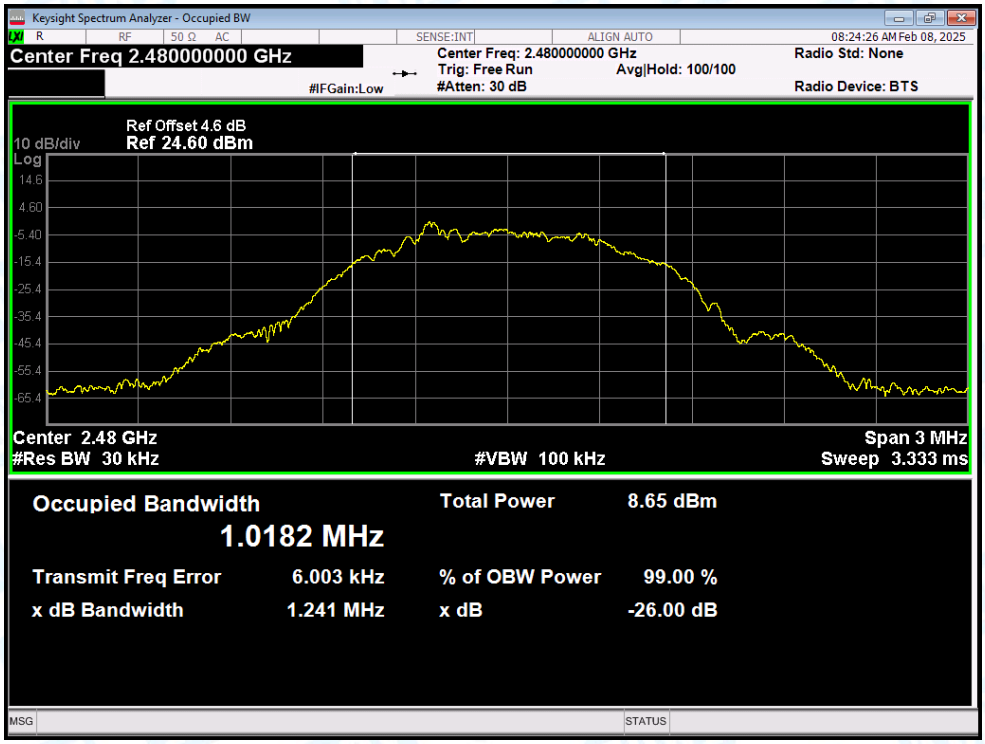

5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3MHz)	Limit (dBm/3MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-15.932	8	Pass
NVNT	BLE 1Mbps	2440	Ant1	-14.228	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-14.127	8	Pass

Test Graphs

PSD NVNT BLE 1Mbps 2402MHz Ant1

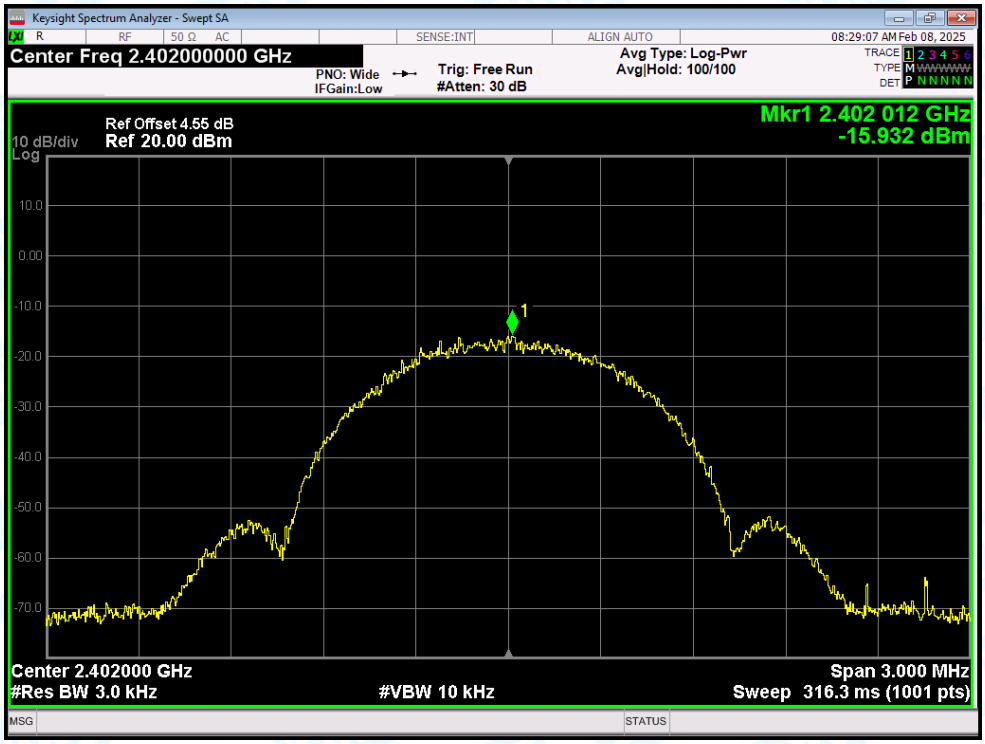

PSD NVNT BLE 1Mbps 2440MHz Ant1

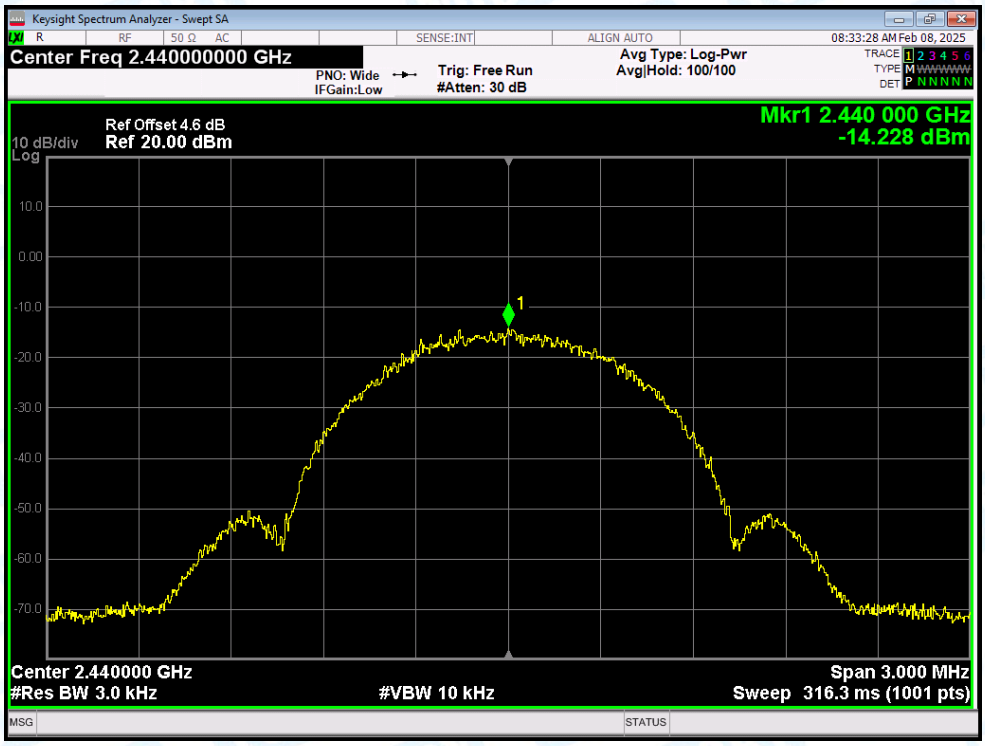

PSD NVNT BLE 1Mbps 2480MHz Ant1

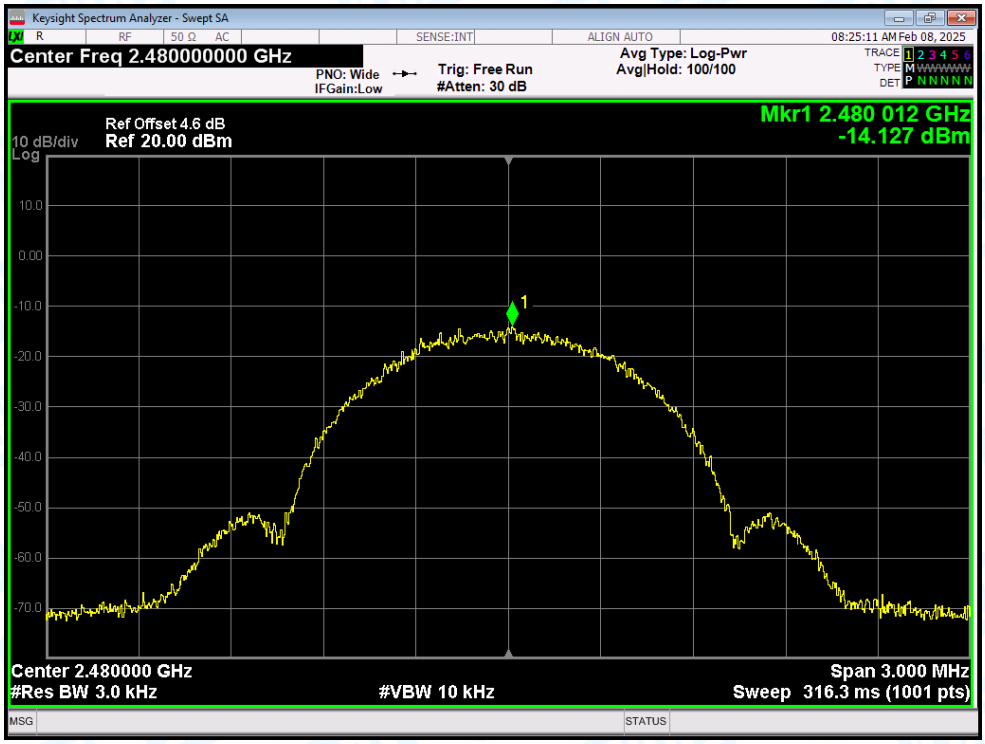

6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-54.63	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-56.18	-20	Pass

Test Graphs

Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Ref

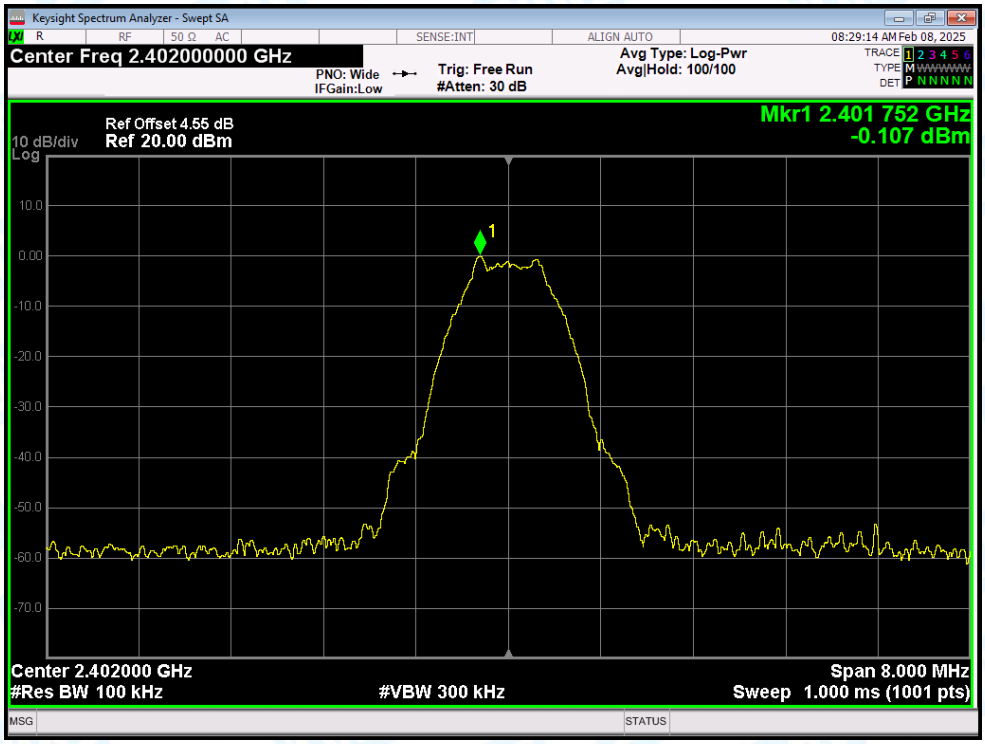

Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Emission

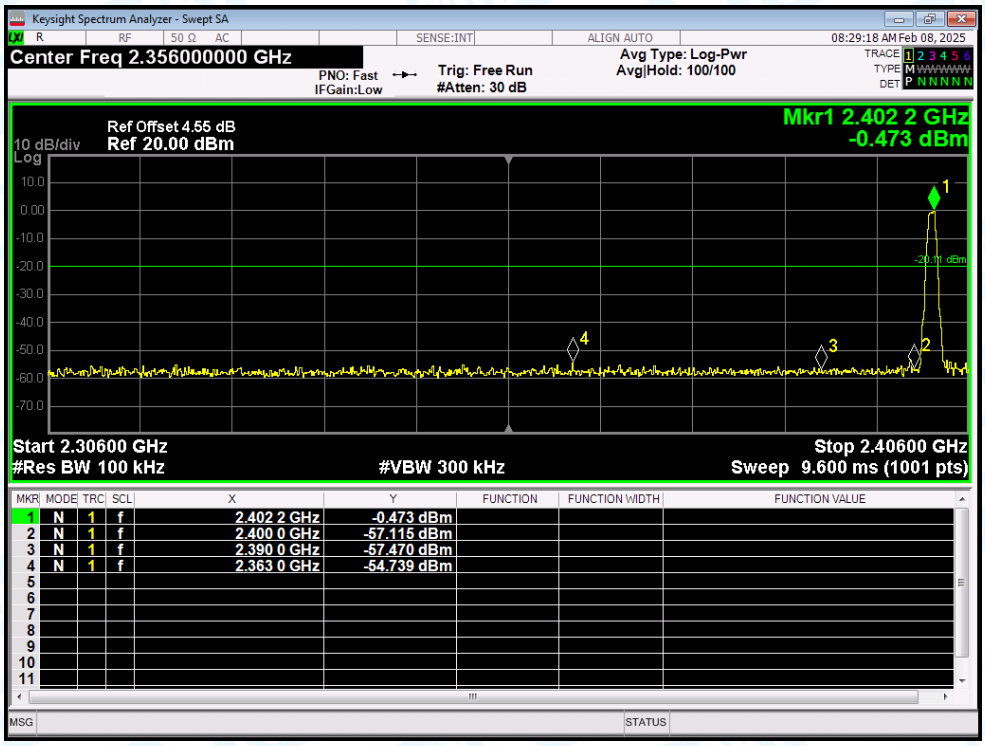

Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Ref

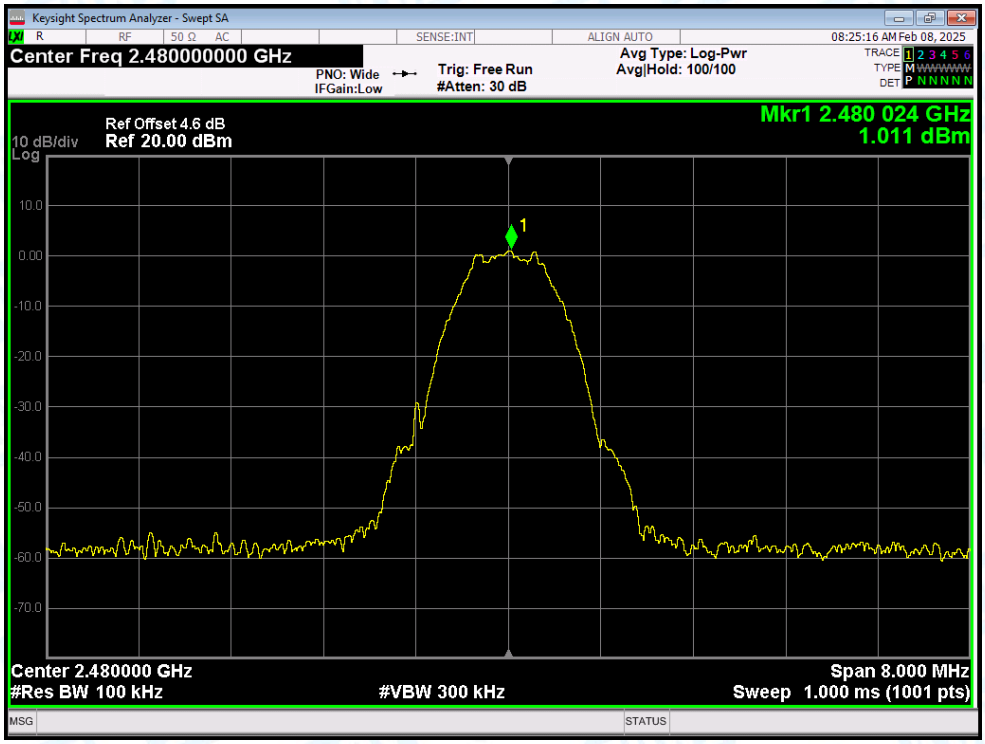

Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Emission

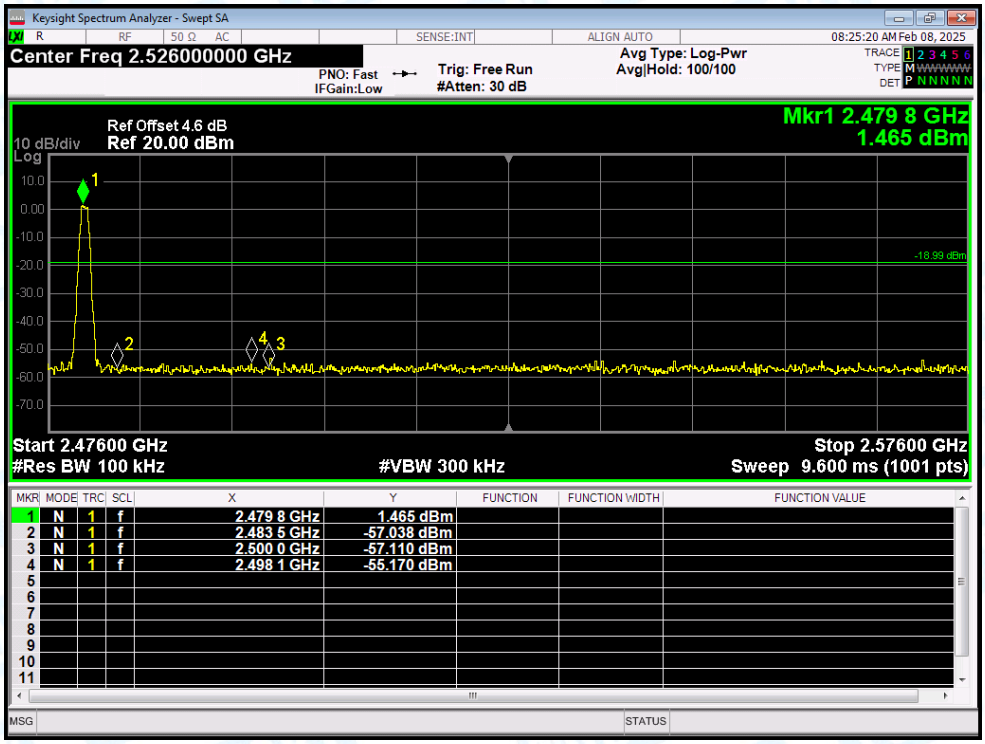

7. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-41.33	-20	Pass
NVNT	BLE 1Mbps	2440	Ant1	-42.85	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-43.67	-20	Pass

Test Graphs

Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Ref

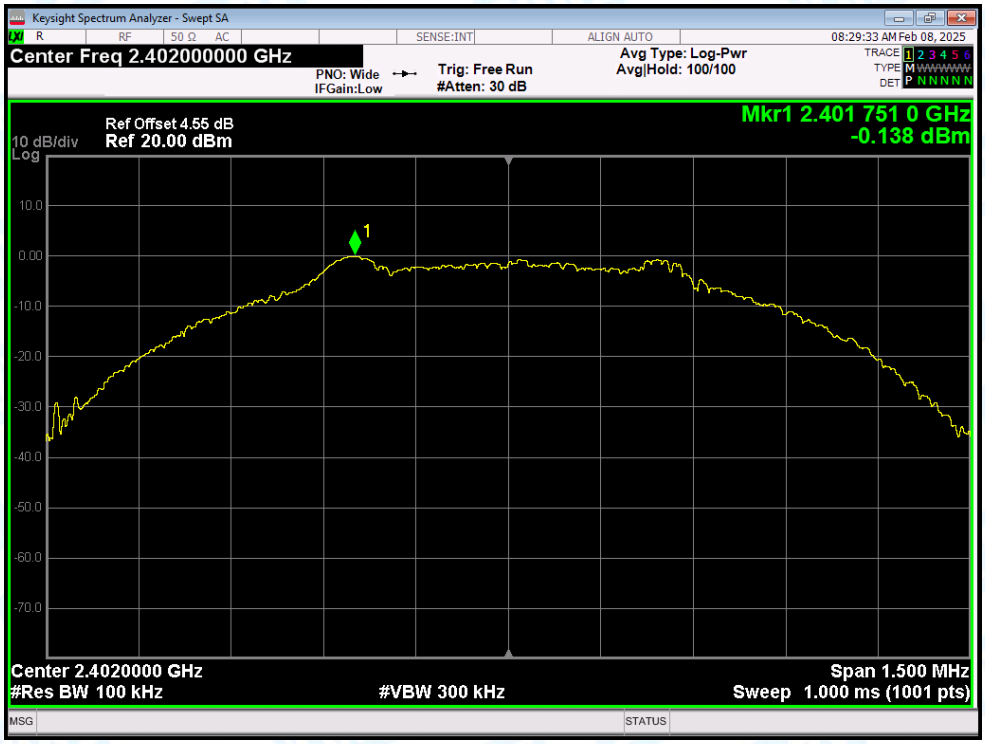

Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Emission

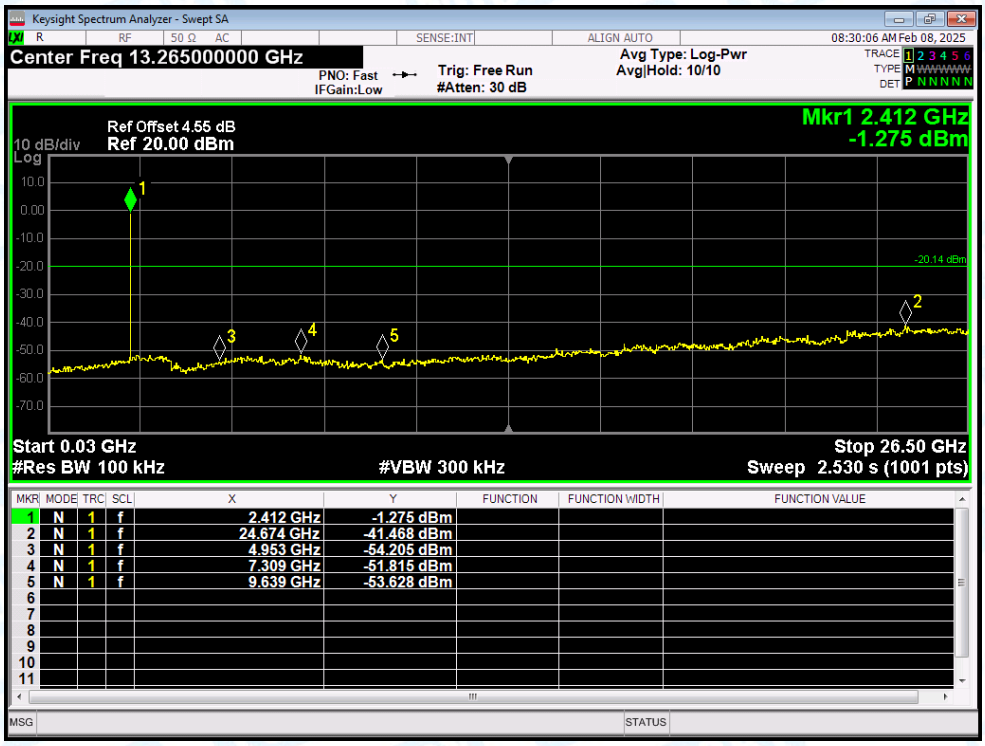

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.412 GHz	-1.275 dBm			
2	N	1	f	24.674 GHz	-41.468 dBm			
3	N	1	f	4.953 GHz	-54.205 dBm			
4	N	1	f	7.309 GHz	-51.815 dBm			
5	N	1	f	9.639 GHz	-53.628 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Ref

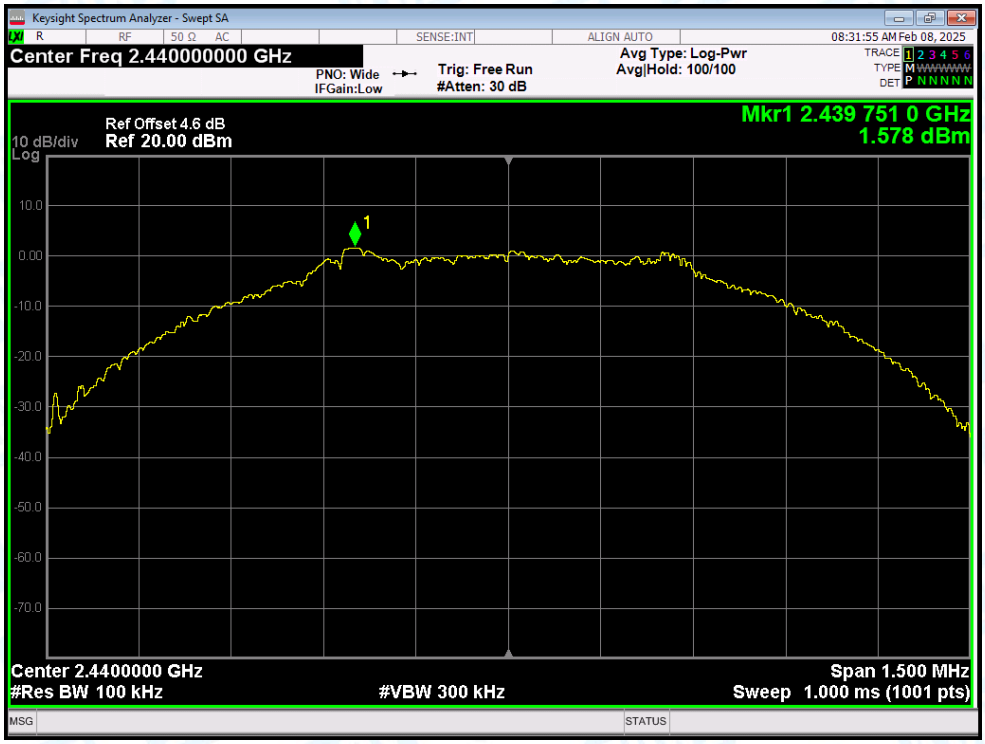

Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Emission

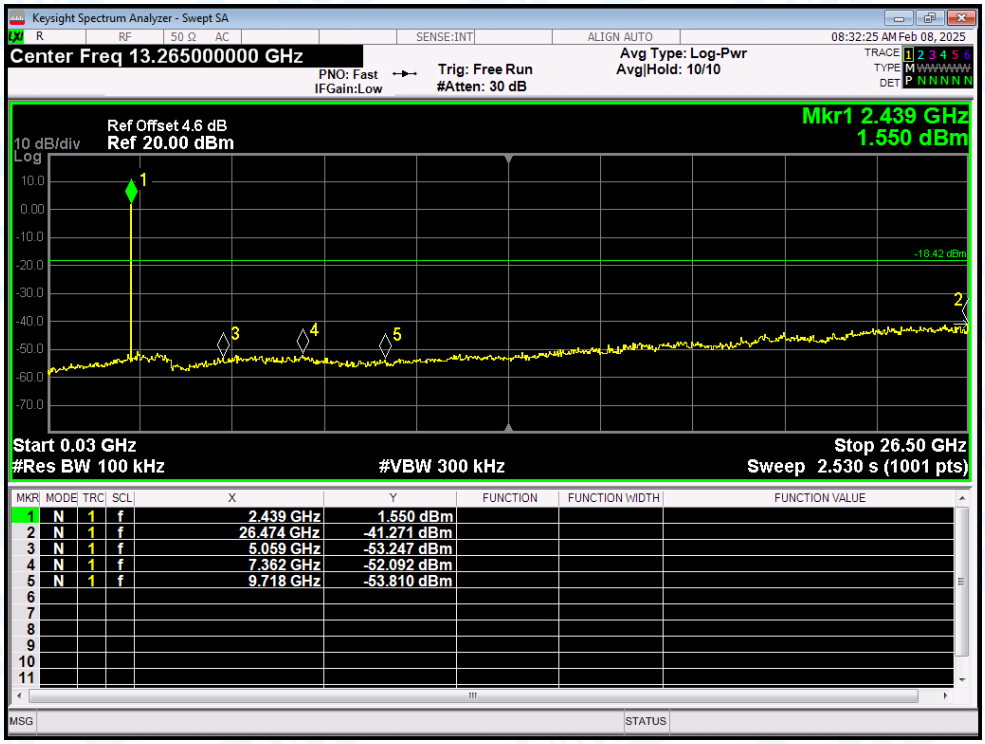

Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Ref

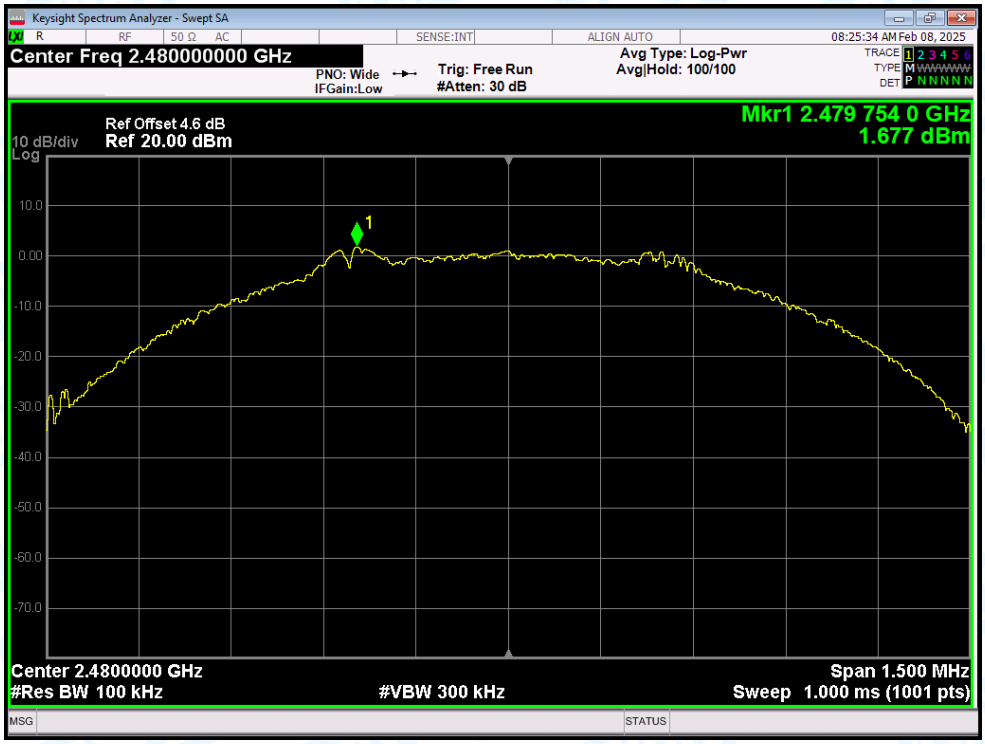

Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Emission

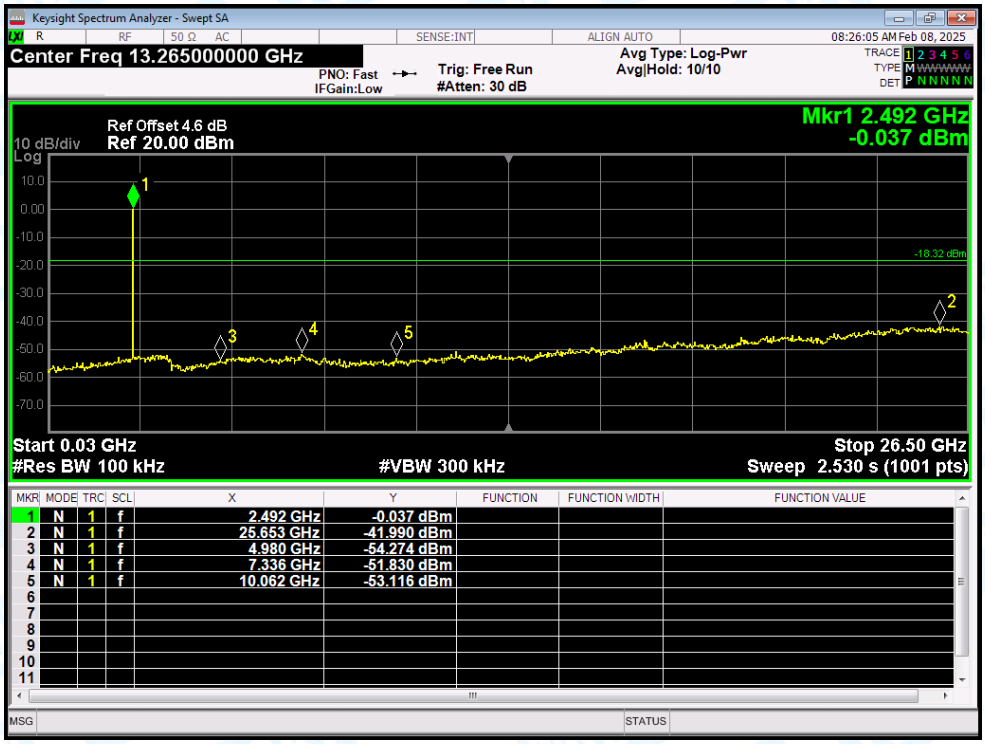

8. Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2310	-58.64	2	-	38.62	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2310	-66.66	2	0.59	31.19	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2373.072	-55.23	2	-	42.03	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2344.56	-65.52	2	0.59	32.33	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-58.24	2	-	39.02	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-66.55	2	0.59	31.3	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-53.02	2	-	44.24	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-63.59	2	0.59	34.26	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.512	-53.02	2	-	44.24	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.992	-63	2	0.59	34.85	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-57.86	2	-	39.4	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-65.54	2	0.59	32.31	Average	54	Pass

Test Graphs

Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Peak

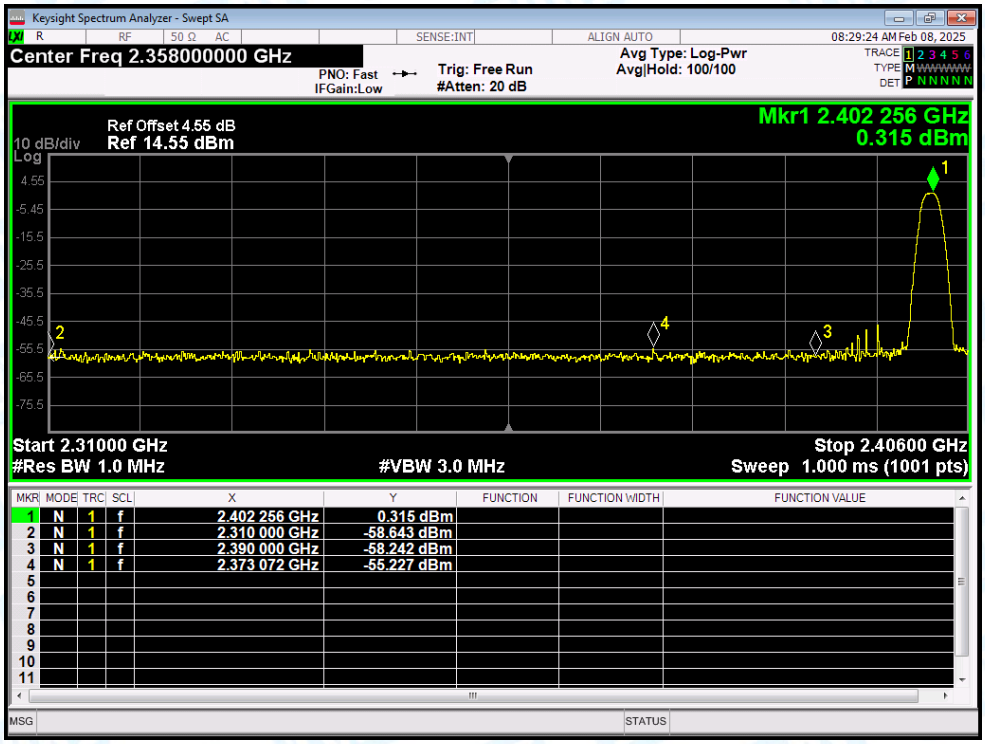

Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Average

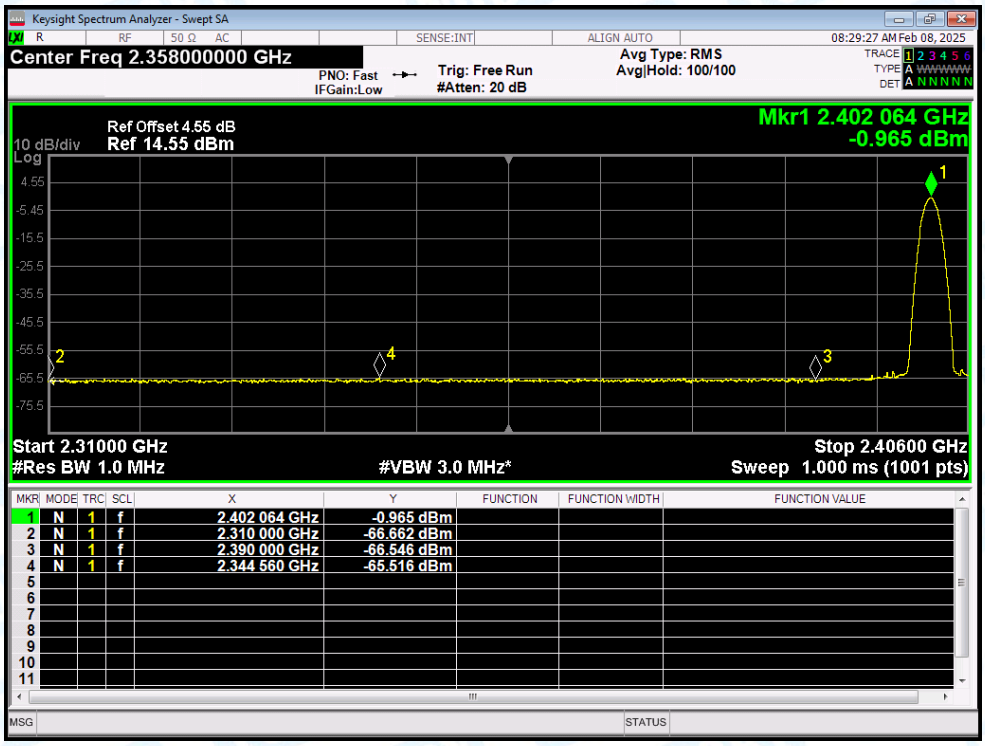

Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Peak

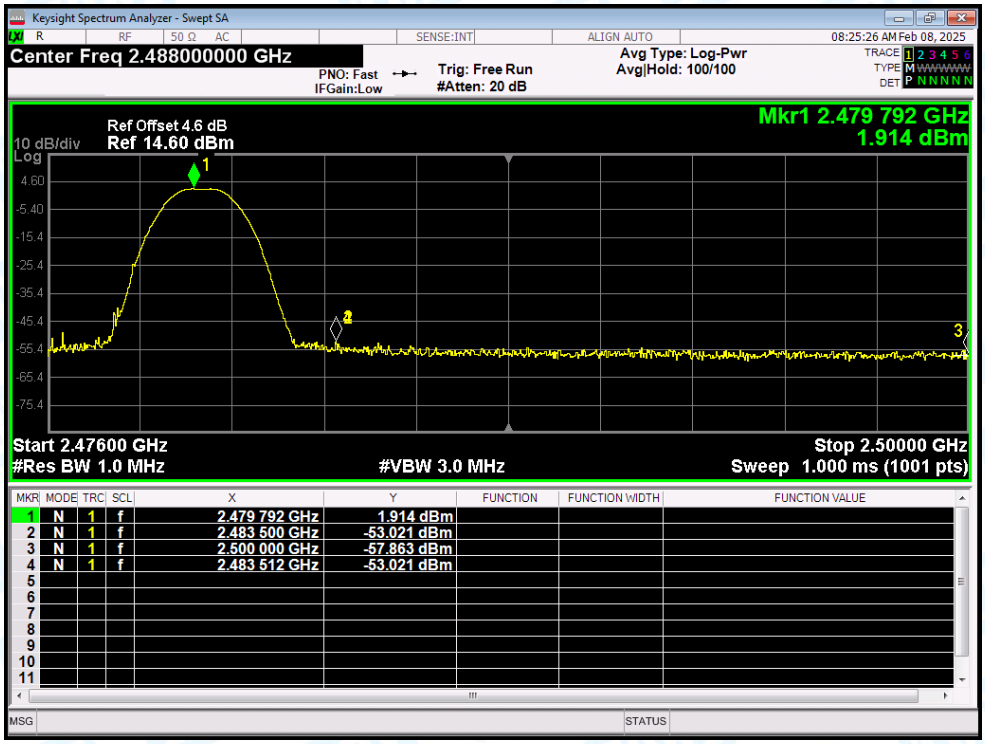

Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Average

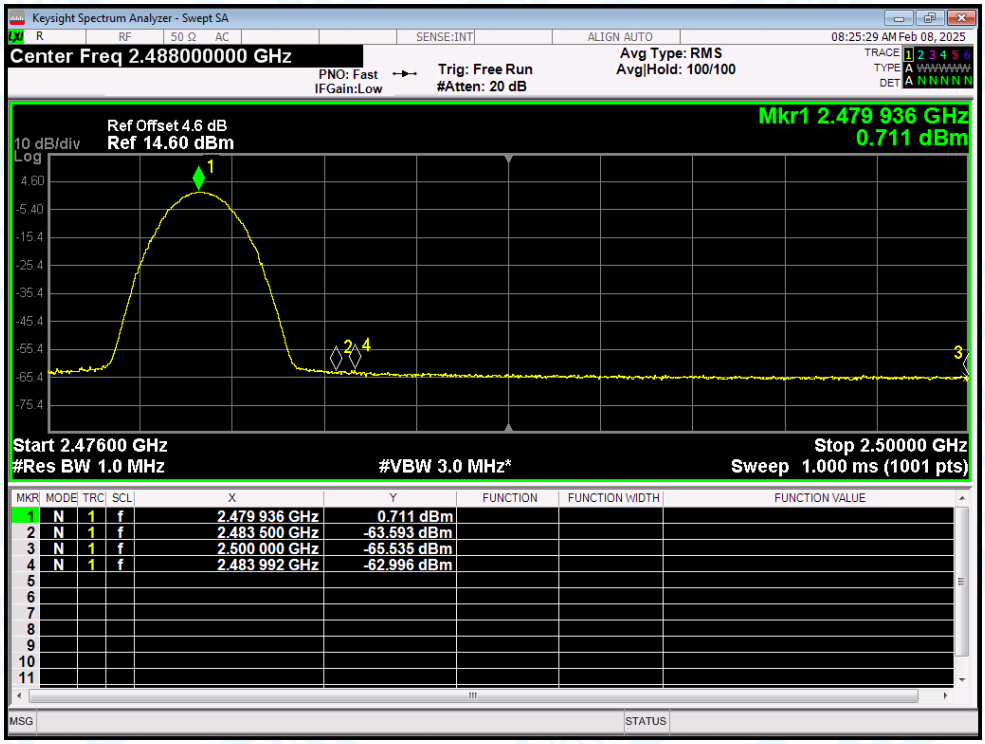

--- END OF REPORT ---