



# **FCC RADIO TEST REPORT**

## **FCC ID: 2AXDW-PNT**

**Product:** KettyBot

**Trade Mark:** PUDU

**Model No.:** PNT

**Family Model:** N/A

**Report No.:** S21060901210003

**Issue Date:** 08 Jul. 2021

### **Prepared for**

**SHENZHEN PUDU TECHNOLOGY CO., LTD.**

Room 501, Building A, Block 1, Phase 1, Shenzhen International  
Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China  
518057

### **Prepared by**

**Shenzhen NTEK Testing Technology Co., Ltd.**

1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China  
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090  
Website: <http://www.ntek.org.cn>

## TABLE OF CONTENTS

|          |                                                 |           |
|----------|-------------------------------------------------|-----------|
| <b>1</b> | <b>TEST RESULT CERTIFICATION .....</b>          | <b>4</b>  |
| <b>2</b> | <b>SUMMARY OF TEST RESULTS.....</b>             | <b>5</b>  |
| <b>3</b> | <b>FACILITIES AND ACCREDITATIONS .....</b>      | <b>6</b>  |
| 3.1      | FACILITIES.....                                 | 6         |
| 3.2      | LABORATORY ACCREDITATIONS AND LISTINGS .....    | 6         |
| 3.3      | MEASUREMENT UNCERTAINTY .....                   | 6         |
| <b>4</b> | <b>GENERAL DESCRIPTION OF EUT .....</b>         | <b>7</b>  |
| <b>5</b> | <b>DESCRIPTION OF TEST MODES .....</b>          | <b>10</b> |
| <b>6</b> | <b>SETUP OF EQUIPMENT UNDER TEST .....</b>      | <b>12</b> |
| 6.1      | BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM..... | 12        |
| 6.2      | SUPPORT EQUIPMENT.....                          | 13        |
| 6.3      | EQUIPMENTS LIST FOR ALL TEST ITEMS.....         | 14        |
| <b>7</b> | <b>TEST REQUIREMENTS.....</b>                   | <b>16</b> |
| 7.1      | CONDUCTED EMISSIONS TEST .....                  | 16        |
| 7.1.1    | Applicable Standard .....                       | 16        |
| 7.1.2    | Conformance Limit .....                         | 16        |
| 7.1.3    | Measuring Instruments.....                      | 16        |
| 7.1.4    | Test Configuration .....                        | 16        |
| 7.1.5    | Test Procedure .....                            | 16        |
| 7.1.6    | Test Results .....                              | 17        |
| 7.2      | RADIATED SPURIOUS EMISSION .....                | 21        |
| 7.2.1    | Applicable Standard .....                       | 21        |
| 7.2.2    | Conformance Limit .....                         | 21        |
| 7.2.3    | Measuring Instruments.....                      | 22        |
| 7.2.4    | Test Configuration .....                        | 22        |
| 7.2.5    | Test Procedure .....                            | 23        |
| 7.2.6    | Test Results .....                              | 24        |
| 7.3      | 6DB BANDWIDTH.....                              | 36        |
| 7.3.1    | Applicable Standard .....                       | 36        |
| 7.3.2    | Conformance Limit .....                         | 36        |
| 7.3.3    | Measuring Instruments.....                      | 36        |
| 7.3.4    | Test Setup .....                                | 36        |
| 7.3.5    | Test Procedure .....                            | 36        |
| 7.3.6    | Test Results .....                              | 37        |
| 7.4      | DUTY CYCLE.....                                 | 38        |
| 7.4.1    | Applicable Standard .....                       | 38        |
| 7.4.2    | Conformance Limit .....                         | 38        |
| 7.4.3    | Measuring Instruments.....                      | 38        |
| 7.4.4    | Test Setup .....                                | 38        |
| 7.4.5    | Test Procedure .....                            | 38        |
| 7.4.6    | Test Results .....                              | 39        |
| 7.5      | MAXIMUM OUTPUT POWER.....                       | 40        |
| 7.5.1    | Applicable Standard .....                       | 40        |
| 7.5.2    | Conformance Limit .....                         | 40        |
| 7.5.3    | Measuring Instruments.....                      | 40        |
| 7.5.4    | Test Setup .....                                | 40        |
| 7.5.5    | Test Procedure .....                            | 40        |
| 7.5.6    | EUT operation during Test.....                  | 40        |
| 7.5.7    | Test Results .....                              | 41        |
| 7.6      | POWER SPECTRAL DENSITY .....                    | 42        |

|                 |                                            |     |
|-----------------|--------------------------------------------|-----|
| 7.6.1           | Applicable Standard .....                  | 42  |
| 7.6.2           | Conformance Limit .....                    | 42  |
| 7.6.3           | Measuring Instruments .....                | 42  |
| 7.6.4           | Test Setup .....                           | 42  |
| 7.6.5           | Test Procedure .....                       | 42  |
| 7.6.6           | Test Results .....                         | 43  |
| 7.7             | CONDUCTED BAND EDGE MEASUREMENT.....       | 44  |
| 7.7.1           | Applicable Standard .....                  | 44  |
| 7.7.2           | Conformance Limit .....                    | 44  |
| 7.7.3           | Measuring Instruments .....                | 44  |
| 7.7.4           | Test Setup .....                           | 44  |
| 7.7.5           | Test Procedure .....                       | 44  |
| 7.7.6           | Test Results .....                         | 45  |
| 7.8             | SPURIOUS RF CONDUCTED EMISSIONS.....       | 46  |
| 7.8.1           | Conformance Limit .....                    | 46  |
| 7.8.2           | Measuring Instruments .....                | 46  |
| 7.8.3           | Test Setup .....                           | 46  |
| 7.8.4           | Test Procedure .....                       | 46  |
| 7.8.5           | Test Results .....                         | 46  |
| 7.9             | ANTENNA APPLICATION .....                  | 47  |
| 7.9.1           | Antenna Requirement .....                  | 47  |
| 7.9.2           | Result .....                               | 47  |
| 8               | TEST RESULTS .....                         | 48  |
| MODULE 1:       | .....                                      | 48  |
| 8.1.1           | DUTY CYCLE .....                           | 48  |
| 8.1.2           | MAXIMUM CONDUCTED OUTPUT POWER .....       | 55  |
| 8.1.3           | OCCUPIED CHANNEL BANDWIDTH .....           | 56  |
| 8.1.4           | MAXIMUM POWER SPECTRAL DENSITY LEVEL ..... | 69  |
| 8.1.5           | BAND EDGE .....                            | 76  |
| 8.1.6           | CONDUCTED RF SPURIOUS EMISSION .....       | 85  |
| MODULE 2:       | .....                                      | 98  |
| 2.4G:           | .....                                      | 98  |
| 8.1.7           | DUTY CYCLE .....                           | 98  |
| 8.1.8           | MAXIMUM CONDUCTED OUTPUT POWER .....       | 111 |
| 8.1.9           | OCCUPIED CHANNEL BANDWIDTH .....           | 112 |
| 8.1.10          | MAXIMUM POWER SPECTRAL DENSITY LEVEL ..... | 137 |
| 8.1.11          | BAND EDGE .....                            | 150 |
| 8.1.12          | CONDUCTED RF SPURIOUS EMISSION .....       | 167 |
| MIMO 2.4G WIFI: | .....                                      | 192 |
| 8.1.13          | MAXIMUM CONDUCTED OUTPUT POWER .....       | 192 |
| 8.1.14          | MAXIMUM POWER SPECTRAL DENSITY LEVEL ..... | 193 |
| 8.1.15          | BAND EDGE .....                            | 200 |
| 8.1.16          | CONDUCTED RF SPURIOUS EMISSION .....       | 209 |

**1 TEST RESULT CERTIFICATION**

|                                   |                                                                                                                                      |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Applicant's name .....            | SHENZHEN PUDU TECHNOLOGY CO., LTD.                                                                                                   |
| Address .....                     | Room 501, Building A, Block 1, Phase 1, Shenzhen International Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China 518057 |
| Manufacturer's Name .....         | SHENZHEN PUDU TECHNOLOGY CO., LTD.                                                                                                   |
| Address .....                     | Room 501, Building A, Block 1, Phase 1, Shenzhen International Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China 518057 |
| Product description               |                                                                                                                                      |
| Product name .....                | KettyBot                                                                                                                             |
| Model and/or type reference ..... | PNT                                                                                                                                  |
| Family Model .....                | N/A                                                                                                                                  |

Measurement Procedure Used:

| APPLICABLE STANDARDS                                                                                                                                                                         |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| APPLICABLE STANDARD/ TEST PROCEDURE                                                                                                                                                          | TEST RESULT |
| FCC 47 CFR Part 2, Subpart J<br>FCC 47 CFR Part 15, Subpart C<br>FCC KDB 662911 D01 Multiple Transmitter Output v02r01<br>ANSI C63.10-2013<br>FCC KDB 558074 D01 15.247 Meas Guidance v05r02 | Complied    |

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : 09 Jun. 2021 ~ 08 Jul. 2021

Testing Engineer :   
(Allen Liu)

Authorized Signatory :   
(Alex Li)

## 2 SUMMARY OF TEST RESULTS

### FCC Part15 (15.247), Subpart C

| Standard Section | Test Item                  | Verdict | Remark |
|------------------|----------------------------|---------|--------|
| 15.207           | Conducted Emission         | PASS    |        |
| 15.247 (a)(2)    | 6dB Bandwidth              | PASS    |        |
| 15.247 (b)       | Maximum Output Power       | PASS    |        |
| 15.247 (c)       | Radiated Spurious Emission | PASS    |        |
| 15.247 (e)       | Power Spectral Density     | PASS    |        |
| 15.205           | Band Edge Emission         | PASS    |        |
| 15.203           | Antenna Requirement        | PASS    |        |

**Remark:**

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

### 3 FACILITIES AND ACCREDITATIONS

#### 3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at  
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District  
Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

#### 3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012  
The Certificate Registration Number is 9270A-1.

Accredited by FCC, September 6, 2013  
The Certificate Registration Number is 238937.

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd

Site Location : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District  
Shenzhen, Guangdong, China

#### 3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                                | Uncertainty               |
|-----|-------------------------------------|---------------------------|
| 1   | Conducted Emission Test             | $\pm 2.80\text{dB}$       |
| 2   | RF power, conducted                 | $\pm 0.16\text{dB}$       |
| 3   | Spurious emissions, conducted       | $\pm 0.21\text{dB}$       |
| 4   | All emissions, radiated(30MHz~1GHz) | $\pm 2.64\text{dB}$       |
| 5   | All emissions, radiated(1GHz~6GHz)  | $\pm 2.40\text{dB}$       |
| 6   | All emissions, radiated(>6GHz)      | $\pm 2.52\text{dB}$       |
| 7   | Temperature                         | $\pm 0.5^{\circ}\text{C}$ |
| 8   | Humidity                            | $\pm 2\%$                 |

#### 4 GENERAL DESCRIPTION OF EUT

| Product Feature and Specification |                                                                                                                                             |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment                         | KettyBot                                                                                                                                    |
| Trade Mark                        | PUDU                                                                                                                                        |
| FCC ID                            | 2AXDW-PNT                                                                                                                                   |
| Model No.                         | PNT                                                                                                                                         |
| Family Model                      | N/A                                                                                                                                         |
| Model Difference                  | N/A                                                                                                                                         |
| Operating Frequency               | module 1:2412-2462MHz for 802.11b/g/11n(HT20/HT40);<br>module 2: 2412-2462MHz for 802.11b/g/11n(HT20/HT40);                                 |
| Modulation                        | DSSS with DBPSK/DQPSK/CCK for 802.11b;<br>OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;                                                    |
| Number of Channels                | 11 channels for 802.11b/g/11n(HT20);<br>9 channels for 802.11n(HT40);                                                                       |
| Antenna Type                      | Main Antenna 2: FPCB antenna<br>AUX Antenna 3: FPCB antenna<br>Antenna 1: FPCB antenna                                                      |
| Smart system                      | <input checked="" type="checkbox"/> SISO for 802.11b/g/n<br><input checked="" type="checkbox"/> MIMO for 802.11n20/n40                      |
| Antenna Gain                      | Antenna 1: 3.5dBi<br>Antenna 2: 3.5dBi<br>Antenna 3: 3.5dBi                                                                                 |
| Power supply                      | <input checked="" type="checkbox"/> DC supply:<br>Battery<br>Model:7S8P<br>DC 25.55V, 25600mAh                                              |
|                                   | <input checked="" type="checkbox"/> Adapter supply:<br>Model: FY29008000<br>Input: 100-240V~50/60Hz 3A 300VA<br>Output: 29.0V---8.0A 232.0W |
| Hardware Version                  | B00                                                                                                                                         |
| Software Version                  | 9.1.0.6                                                                                                                                     |

Note: 1.Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

2.

Table for Filed Antenna

| Antenna | Brand | Model Name | Antenna Type | Connector | Gain (dBi) | NOTE         |
|---------|-------|------------|--------------|-----------|------------|--------------|
| 1       | N/A   | N/A        | FPCB antenna | IPEX      | 3.5        | Wifi Antenna |
| 2       | N/A   | N/A        | FPCB antenna | IPEX      | 3.5        | Wifi Antenna |
| 3       | N/A   | N/A        | FPCB antenna | IPEX      | 3.5        | Wifi Antenna |

This EUT has three modules, module 2 supports Bluetooth, WIFI2.4G / 5G, module 2 has two antennas, Antenna 1 supports Bluetooth, WIFI2.4G / 5G, Antenna 2 supports WIFI2.4G / 5G. The module 1 only supports Bluetooth , WIFI 2.4G. The module 1 has only one antenna. module 3 only supports WCDMA/LTE. The module 3 has only one antenna. Antenna 4 supports WCDMA/LTE.

The module 2 for 2.4G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

| Mode                 | Tx/Rx             |
|----------------------|-------------------|
| 802.11b/g            | 1TX, 1RX          |
| 802.11n(20MHz,40MHz) | 1TX, 1RX/2TX, 2RX |

For 2.4GHz mode, Antenna 2,3 are transmitting, each with the same directional gain.

For power spectral density (PSD) measurements: Directional gain= $G_{ANT}$  + Array Gain=3.5dBi + 3.01 = 6.51dBi. For power measurements: Directional gain= $G_{ANT}$  + Array Gain=3.5dBi + 0 =3.5dBi.

Note:  $G_{ANT}$  means antenna gain for the same gain in dBi.

For power spectral density (PSD) measurements: Array Gain =  $10\log(N_{ANT}/N_{SS})$ dB.

*Array Gain* = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

*Array Gain* = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

*Array Gain* =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements:

$N_{ANT}$  = number of transmit antennas and

$N_{SS}$  = number of spatial streams. (Assume  $N_{SS} = 1$  unless you have specific information to the contrary.)

## Revision History

[illegible]

## 5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0); were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for 802.11b/g/n (HT20/HT40):

| Channel | Frequency(MHz) |
|---------|----------------|
| 1       | 2412           |
| 2       | 2417           |
| ...     | ...            |
| 5       | 2432           |
| 6       | 2437           |
| ...     | ...            |
| 10      | 2457           |
| 11      | 2462           |

Note:  $f_c = 2412\text{MHz} + (k-1) \times 5\text{MHz}$   $k=1$  to 11

AC power line Conducted Emission was tested under maximum output power.


Test Mode:

| Test Items                        | Mode        | Data Rate | Channel | Ant   |
|-----------------------------------|-------------|-----------|---------|-------|
| AC Power Line Conducted Emissions | Normal Link | -         | -       | -     |
| Maximum Conducted Output Power    | 11b/CCK     | 1 Mbps    | 1/6/11  | 1/2/3 |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11  | 1/2/3 |
|                                   | 11n HT20    | MCS0      | 1/6/11  | 1/2/3 |
|                                   | 11n HT40    | MCS7      | 3/6/9   | 1/2/3 |
| Power Spectral Density            | 11b/CCK     | 1 Mbps    | 1/6/11  | 1/2/3 |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11  | 1/2/3 |
|                                   | 11n HT20    | MCS0      | 1/6/11  | 1/2/3 |
|                                   | 11n HT40    | MCS7      | 3/6/9   | 1/2/3 |
| 6dB Spectrum Bandwidth            | 11b/CCK     | 1 Mbps    | 1/6/11  | 1/2/3 |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11  | 1/2/3 |
|                                   | 11n HT20    | MCS0      | 1/6/11  | 1/2/3 |
|                                   | 11n HT40    | MCS7      | 3/6/9   | 1/2/3 |
| Radiated Emissions Below 1GHz     | Normal Link | -         | -       | -     |
| Radiated Emissions Above 1GHz     | 11b/CCK     | 1 Mbps    | 1/6/11  | 1/2/3 |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11  | 1/2/3 |
|                                   | 11n HT20    | MCS0      | 1/6/11  | 1/2/3 |
|                                   | 11n HT40    | MCS7      | 3/6/9   | 1/2/3 |
| Band Edge Emissions               | 11b/CCK     | 1 Mbps    | 1/6/11  | 1/2/3 |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11  | 1/2/3 |
|                                   | 11n HT20    | MCS0      | 1/6/11  | 1/2/3 |
|                                   | 11n HT40    | MCS7      | 3/6/9   | 1/2/3 |


## 6 SETUP OF EQUIPMENT UNDER TEST

### 6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

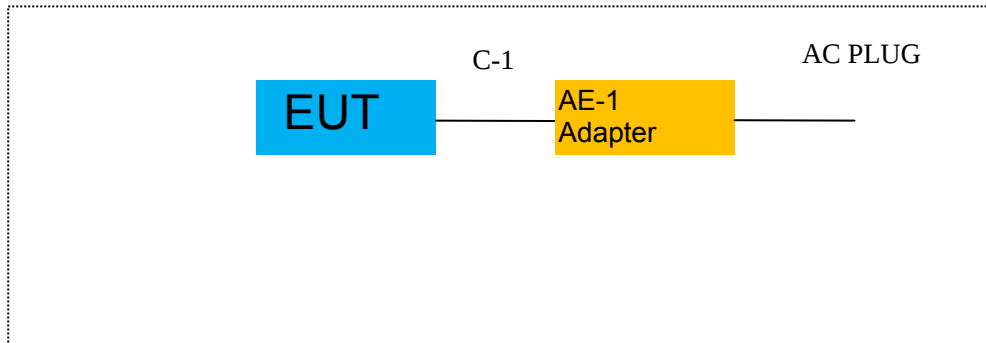

For Radiated Test Cases

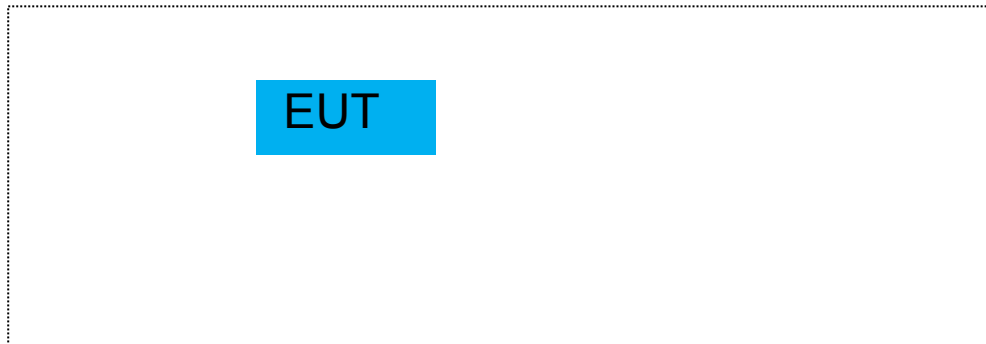

For Conducted Test Cases

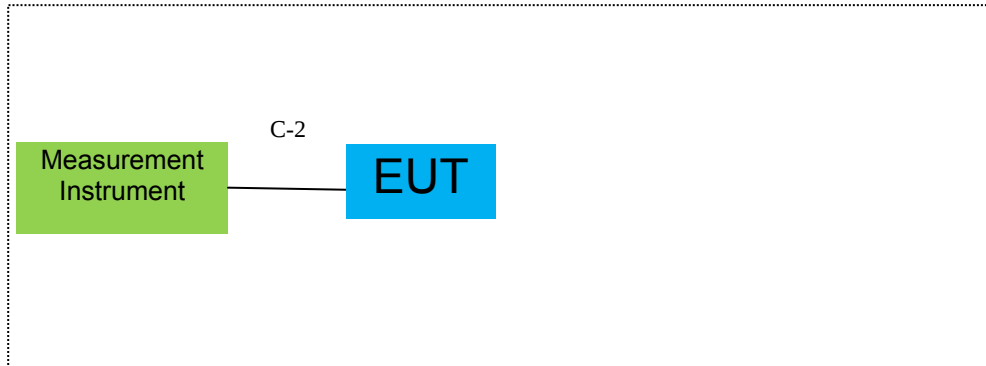

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note        |
|------|-----------|-----------|----------------|------------|-------------|
| AE-1 | Adapter   | N/A       | FY29008000     | N/A        | Peripherals |
|      |           |           |                |            |             |
|      |           |           |                |            |             |
|      |           |           |                |            |             |

| Item | Cable Type  | Shielded Type | Ferrite Core | Length |
|------|-------------|---------------|--------------|--------|
| C-1  | Power Cable | NO            | NO           | 1.2m   |
| C-2  | RF Cable    | YES           | NO           | 0.1m   |
|      |             |               |              |        |
|      |             |               |              |        |
|      |             |               |              |        |
|      |             |               |              |        |

### Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) During the battery power test, the battery is fully charged.

### 6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

#### Radiation Test equipment

| Item | Kind of Equipment                  | Manufacturer | Type No.    | Serial No.    | Last calibration | Calibrated until | Calibration period |
|------|------------------------------------|--------------|-------------|---------------|------------------|------------------|--------------------|
| 1    | Spectrum Analyzer                  | Agilent      | E4407B      | MY45108040    | 2021.04.27       | 2022.04.26       | 1 year             |
| 2    | Spectrum Analyzer                  | Agilent      | N9020A      | MY49100060    | 2020.07.13       | 2021.07.12       | 1 year             |
| 3    | Spectrum Analyzer                  | R&S          | FSV40       | 101417        | 2020.07.13       | 2021.07.12       | 1 year             |
| 4    | Test Receiver                      | R&S          | ESPI7       | 101318        | 2021.04.27       | 2022.04.26       | 1 year             |
| 5    | Bilog Antenna                      | TESEQ        | CBL6111D    | 31216         | 2021.03.29       | 2022.03.28       | 1 year             |
| 6    | 50Ω Coaxial Switch                 | Anritsu      | MP59B       | 6200983705    | 2020.05.11       | 2023.05.10       | 3 year             |
| 7    | Horn Antenna                       | EM           | EM-AH-10180 | 2011071402    | 2021.03.29       | 2022.03.28       | 1 year             |
| 8    | Broadband Horn Antenna             | SCHWARZBECK  | BBHA 9170   | 803           | 2020.11.19       | 2021.11.18       | 1 year             |
| 9    | Amplifier                          | EMC          | EMC051835SE | 980246        | 2020.07.13       | 2021.07.12       | 1 year             |
| 10   | Active Loop Antenna                | SCHWARZBECK  | FMZB 1519B  | 055           | 2020.11.19       | 2021.11.18       | 1 year             |
| 11   | Power Meter                        | DARE         | RPR3006W    | 15I00041SN084 | 2020.07.13       | 2021.07.12       | 1 year             |
| 12   | Test Cable (9KHz-30MHz)            | N/A          | R-01        | N/A           | 2019.08.06       | 2022.08.05       | 3 year             |
| 13   | Test Cable (30MHz-1GHz)            | N/A          | R-02        | N/A           | 2019.08.06       | 2022.08.05       | 3 year             |
| 14   | High Test Cable(1G-40G Hz)         | N/A          | R-03        | N/A           | 2019.06.28       | 2022.06.27       | 3 year             |
| 15   | High Test Cable(1G-40G Hz)         | N/A          | R-04        | N/A           | 2019.08.06       | 2022.08.05       | 3 year             |
| 16   | Filter                             | TRILTHIC     | 2400MHz     | 29            | 2020.07.13       | 2021.07.12       | 1 year             |
| 17   | temporary antenna connector (Note) | NTS          | R001        | N/A           | N/A              | N/A              | N/A                |

**Note:**

We will use the temporary antenna connector (soldered on the PCB board) When conducted test  
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

| Item | Kind of Equipment       | Manufacturer | Type No.  | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|-------------------------|--------------|-----------|------------|------------------|------------------|--------------------|
| 1    | Test Receiver           | R&S          | ESCI      | 101160     | 2021.04.27       | 2022.04.26       | 1 year             |
| 2    | LISN                    | R&S          | ENV216    | 101313     | 2021.04.27       | 2022.04.26       | 1 year             |
| 3    | LISN                    | SCHWARZBECK  | NNLK 8129 | 8129245    | 2021.04.27       | 2022.04.26       | 1 year             |
| 4    | 50Ω Coaxial Switch      | ANRITSU CORP | MP59B     | 6200983704 | 2020.05.11       | 2023.05.10       | 3 year             |
| 5    | Test Cable (9KHz-30MHz) | N/A          | C01       | N/A        | 2020.05.11       | 2023.05.10       | 3 year             |
| 6    | Test Cable (9KHz-30MHz) | N/A          | C02       | N/A        | 2020.05.11       | 2023.05.10       | 3 year             |
| 7    | Test Cable (9KHz-30MHz) | N/A          | C03       | N/A        | 2020.05.11       | 2023.05.10       | 3 year             |

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

## 7 TEST REQUIREMENTS

### 7.1 CONDUCTED EMISSIONS TEST

#### 7.1.1 Applicable Standard

According to FCC Part 15.207(a)

#### 7.1.2 Conformance Limit


| Frequency(MHz) | Conducted Emission Limit |         |
|----------------|--------------------------|---------|
|                | Quasi-peak               | Average |
| 0.15-0.5       | 66-56*                   | 56-46*  |
| 0.5-5.0        | 56                       | 46      |
| 5.0-30.0       | 60                       | 50      |

Note: 1. \*Decreases with the logarithm of the frequency  
 2. The lower limit shall apply at the transition frequencies  
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.1.4 Test Configuration

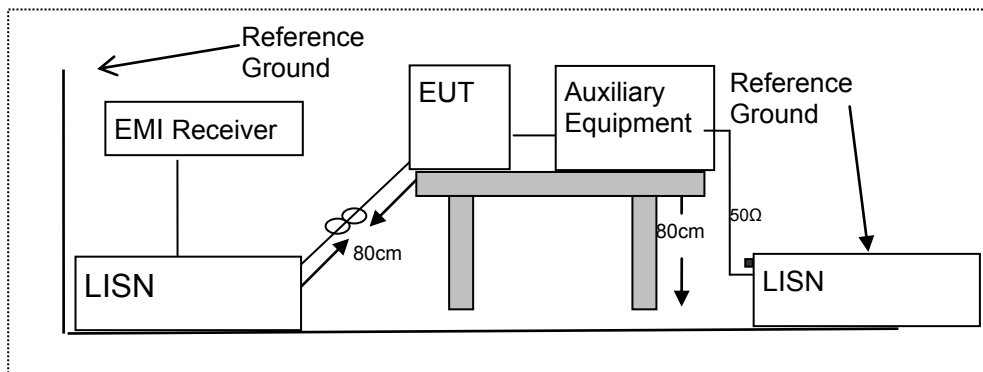

#### 7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


### 7.1.6 Test Results

|                |                                  |                    |                       |
|----------------|----------------------------------|--------------------|-----------------------|
| EUT:           | KettyBot                         | Model Name :       | PNT                   |
| Temperature:   | 25 °C                            | Relative Humidity: | 55%                   |
| Pressure:      | 1010hPa                          | Phase :            | L                     |
| Test Voltage : | DC 29V from Adapter AC 120V/60Hz | Test Mode:         | Normal Link(module 1) |

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.2938             | 39.64                   | 9.54                   | 49.18                  | 60.41            | -11.23         | QP     |
| 0.2938             | 29.79                   | 9.54                   | 39.33                  | 50.41            | -11.08         | AVG    |
| 0.5220             | 40.34                   | 9.55                   | 49.89                  | 56.00            | -6.11          | QP     |
| 0.5220             | 30.47                   | 9.55                   | 40.02                  | 46.00            | -5.98          | AVG    |
| 0.7137             | 37.31                   | 9.55                   | 46.86                  | 56.00            | -9.14          | QP     |
| 0.7137             | 28.70                   | 9.55                   | 38.25                  | 46.00            | -7.75          | AVG    |
| 0.9100             | 36.11                   | 9.56                   | 45.67                  | 56.00            | -10.33         | QP     |
| 0.9100             | 26.10                   | 9.56                   | 35.66                  | 46.00            | -10.34         | AVG    |
| 4.4698             | 38.96                   | 9.62                   | 48.58                  | 56.00            | -7.42          | QP     |
| 4.4698             | 29.83                   | 9.62                   | 39.45                  | 46.00            | -6.55          | AVG    |
| 5.6379             | 37.80                   | 9.63                   | 47.43                  | 60.00            | -12.57         | QP     |
| 5.6379             | 27.95                   | 9.63                   | 37.58                  | 50.00            | -12.42         | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

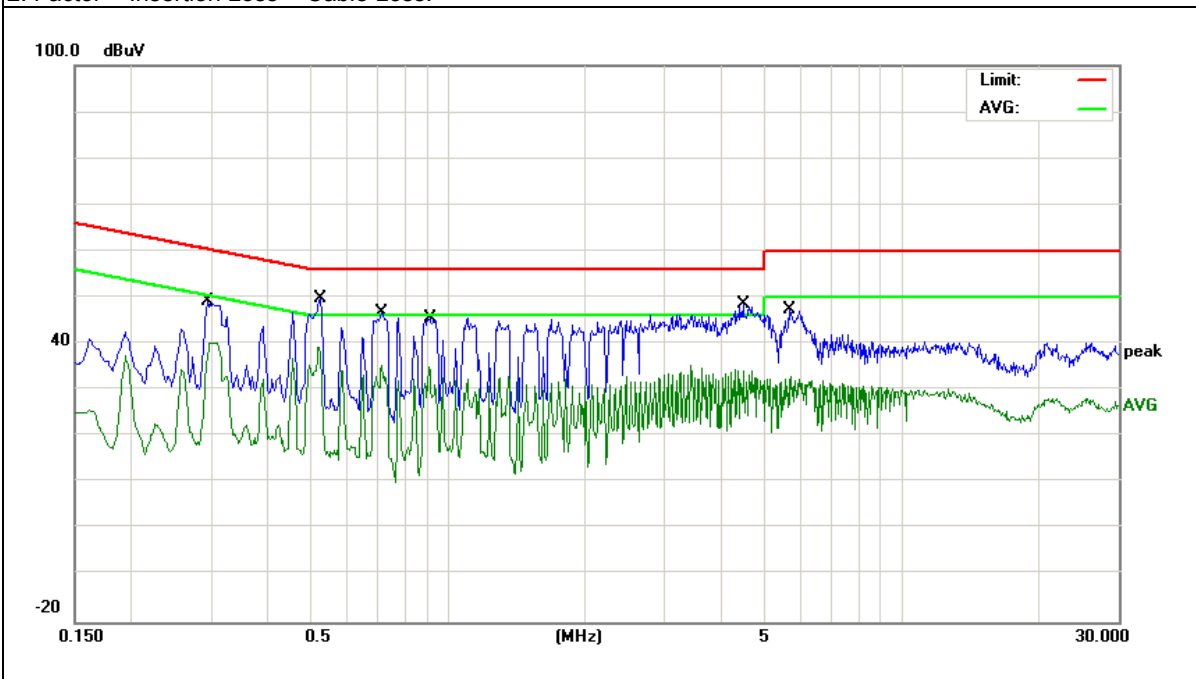


|                |                                  |                    |                       |
|----------------|----------------------------------|--------------------|-----------------------|
| EUT:           | KettyBot                         | Model Name :       | PNT                   |
| Temperature:   | 25 °C                            | Relative Humidity: | 55%                   |
| Pressure:      | 1010hPa                          | Phase :            | N                     |
| Test Voltage : | DC 29V from Adapter AC 120V/60Hz | Test Mode:         | Normal Link(module 1) |

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.3059             | 39.41                   | 9.53                   | 48.94                  | 60.08            | -11.14         | QP     |
| 0.3059             | 30.13                   | 9.53                   | 39.66                  | 50.08            | -10.42         | AVG    |
| 0.5180             | 39.81                   | 9.54                   | 49.35                  | 56.00            | -6.65          | QP     |
| 0.5180             | 30.04                   | 9.54                   | 39.58                  | 46.00            | -6.42          | AVG    |
| 0.7138             | 39.08                   | 9.54                   | 48.62                  | 56.00            | -7.38          | QP     |
| 0.7138             | 28.91                   | 9.54                   | 38.45                  | 46.00            | -7.55          | AVG    |
| 0.9140             | 36.94                   | 9.55                   | 46.49                  | 56.00            | -9.51          | QP     |
| 0.9140             | 27.14                   | 9.55                   | 36.69                  | 46.00            | -9.31          | AVG    |
| 1.2980             | 36.33                   | 9.55                   | 45.88                  | 56.00            | -10.12         | QP     |
| 1.2980             | 26.20                   | 9.55                   | 35.75                  | 46.00            | -10.25         | AVG    |
| 2.5939             | 37.77                   | 9.58                   | 47.35                  | 56.00            | -8.65          | QP     |
| 2.5939             | 27.78                   | 9.58                   | 37.36                  | 46.00            | -8.64          | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

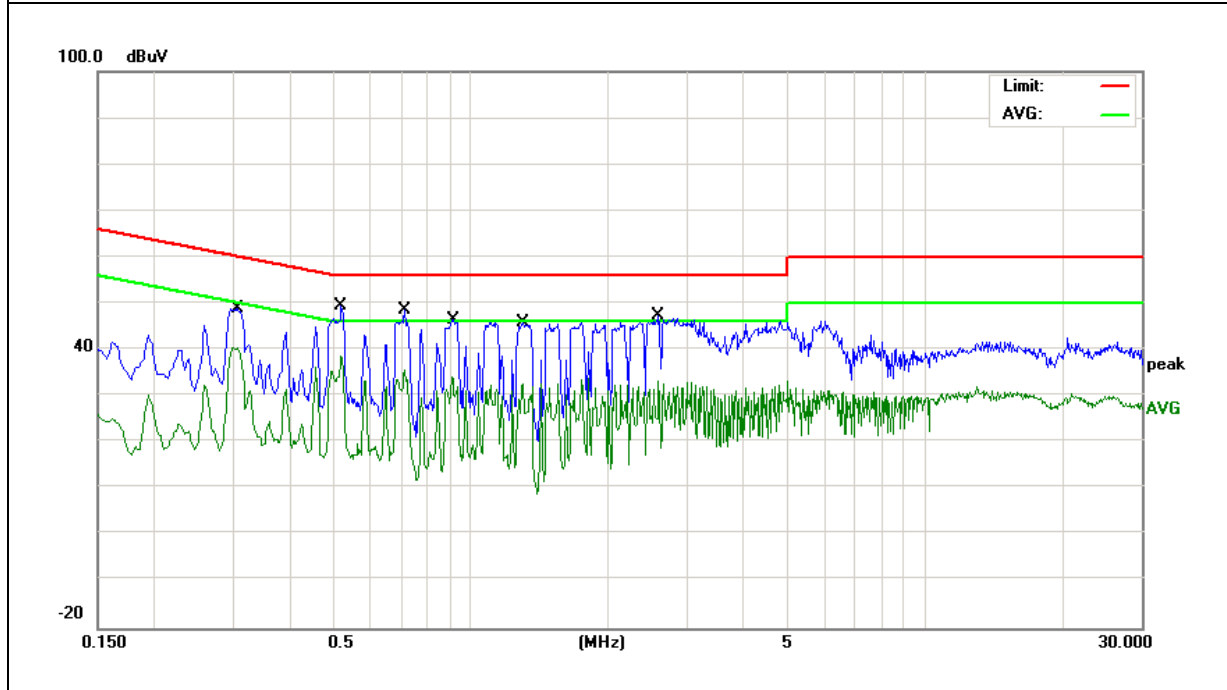


|                |                                  |                    |                       |
|----------------|----------------------------------|--------------------|-----------------------|
| EUT:           | KettyBot                         | Model Name :       | PNT                   |
| Temperature:   | 25 °C                            | Relative Humidity: | 55%                   |
| Pressure:      | 1010hPa                          | Phase :            | L                     |
| Test Voltage : | DC 29V from Adapter AC 120V/60Hz | Test Mode:         | Normal Link(module 2) |

| Frequency | Reading Level | Correct Factor | Measure-ment | Limits | Margin | Remark |
|-----------|---------------|----------------|--------------|--------|--------|--------|
| (MHz)     | (dBμV)        | (dB)           | (dBμV)       | (dBμV) | (dB)   |        |
| 0.3002    | 41.81         | 9.54           | 51.35        | 60.23  | -8.88  | QP     |
| 0.3002    | 32.79         | 9.54           | 42.33        | 50.23  | -7.90  | AVG    |
| 0.4899    | 37.38         | 9.55           | 46.93        | 56.17  | -9.24  | QP     |
| 0.4899    | 28.71         | 9.55           | 38.26        | 46.17  | -7.91  | AVG    |
| 0.7097    | 38.23         | 9.55           | 47.78        | 56.00  | -8.22  | QP     |
| 0.7097    | 29.04         | 9.55           | 38.59        | 46.00  | -7.41  | AVG    |
| 1.2980    | 38.55         | 9.56           | 48.11        | 56.00  | -7.89  | QP     |
| 1.2980    | 29.42         | 9.56           | 38.98        | 46.00  | -7.02  | AVG    |
| 2.1419    | 38.32         | 9.58           | 47.90        | 56.00  | -8.10  | QP     |
| 2.1419    | 27.89         | 9.58           | 37.47        | 46.00  | -8.53  | AVG    |
| 4.8658    | 36.58         | 9.62           | 46.20        | 56.00  | -9.80  | QP     |
| 4.8658    | 27.83         | 9.62           | 37.45        | 46.00  | -8.55  | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

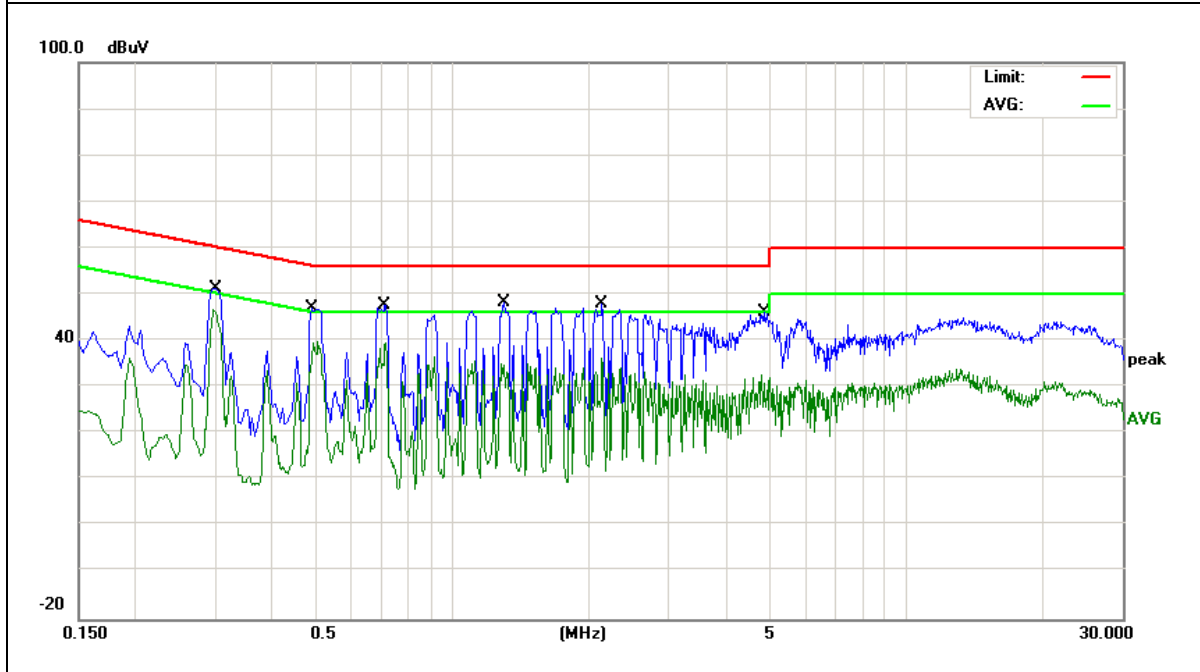


|                |                                  |                    |                       |
|----------------|----------------------------------|--------------------|-----------------------|
| EUT:           | KettyBot                         | Model Name :       | PNT                   |
| Temperature:   | 25 °C                            | Relative Humidity: | 55%                   |
| Pressure:      | 1010hPa                          | Phase :            | N                     |
| Test Voltage : | DC 29V from Adapter AC 120V/60Hz | Test Mode:         | Normal Link(module 2) |

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.3019             | 39.60                   | 9.53                   | 49.13                  | 60.19            | -11.06         | QP     |
| 0.3019             | 30.42                   | 9.53                   | 39.95                  | 50.19            | -10.24         | AVG    |
| 0.5140             | 36.69                   | 9.54                   | 46.23                  | 56.00            | -9.77          | QP     |
| 0.5140             | 28.04                   | 9.54                   | 37.58                  | 46.00            | -8.42          | AVG    |
| 0.7138             | 37.73                   | 9.54                   | 47.27                  | 56.00            | -8.73          | QP     |
| 0.7138             | 28.79                   | 9.54                   | 38.33                  | 46.00            | -7.67          | AVG    |
| 0.9180             | 36.81                   | 9.55                   | 46.36                  | 56.00            | -9.64          | QP     |
| 0.9180             | 27.70                   | 9.55                   | 37.25                  | 46.00            | -8.75          | AVG    |
| 2.3340             | 38.70                   | 9.57                   | 48.27                  | 56.00            | -7.73          | QP     |
| 2.3340             | 29.12                   | 9.57                   | 38.69                  | 46.00            | -7.31          | AVG    |
| 2.9219             | 38.53                   | 9.59                   | 48.12                  | 56.00            | -7.88          | QP     |
| 2.9219             | 29.89                   | 9.59                   | 39.48                  | 46.00            | -6.52          | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

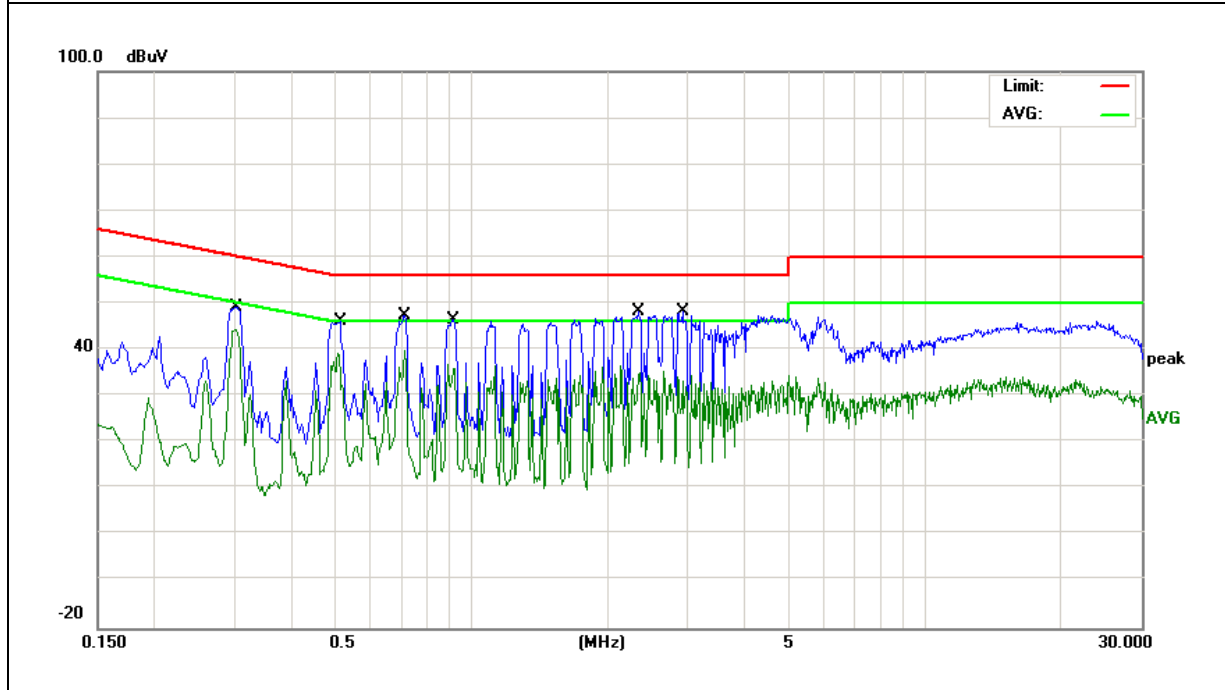

## 7.2 RADIATED SPURIOUS EMISSION

### 7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

### 7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part 15.205, Restricted bands

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Restricted Frequency(MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009~0.490               | 2400/F(KHz)           | 20 log (uV/m)           | 300                  |
| 0.490~1.705               | 24000/F(KHz)          | 20 log (uV/m)           | 30                   |
| 1.705~30.0                | 30                    | 29.5                    | 30                   |
| 30-88                     | 100                   | 40                      | 3                    |
| 88-216                    | 150                   | 43.5                    | 3                    |
| 216-960                   | 200                   | 46                      | 3                    |
| Above 960                 | 500                   | 54                      | 3                    |

#### Limits of Radiated Emission Measurement(Above 1000MHz)

| Frequency(MHz) | Class B (dBuV/m) (at 3M) |         |
|----------------|--------------------------|---------|
|                | PEAK                     | AVERAGE |
| Above 1000     | 74                       | 54      |


Remark : 1. Emission level in dBuV/m=20 log (uV/m)  
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.  
3. For Frequency 9kHz~30MHz:  
Distance extrapolation factor =40log(Specific distance/ test distance)(dB);  
Limit line=Specific limits(dBuV) + distance extrapolation factor.  
For Frequency above 30MHz:  
Distance extrapolation factor =20log(Specific distance/ test distance)(dB);  
Limit line=Specific limits(dBuV) + distance extrapolation factor.

### 7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

### 7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

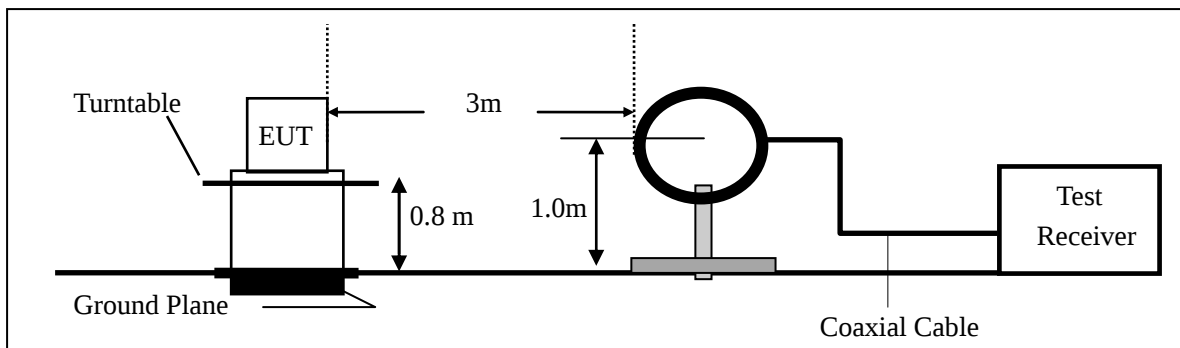

(b) For radiated emissions from 30MHz to 1000MHz

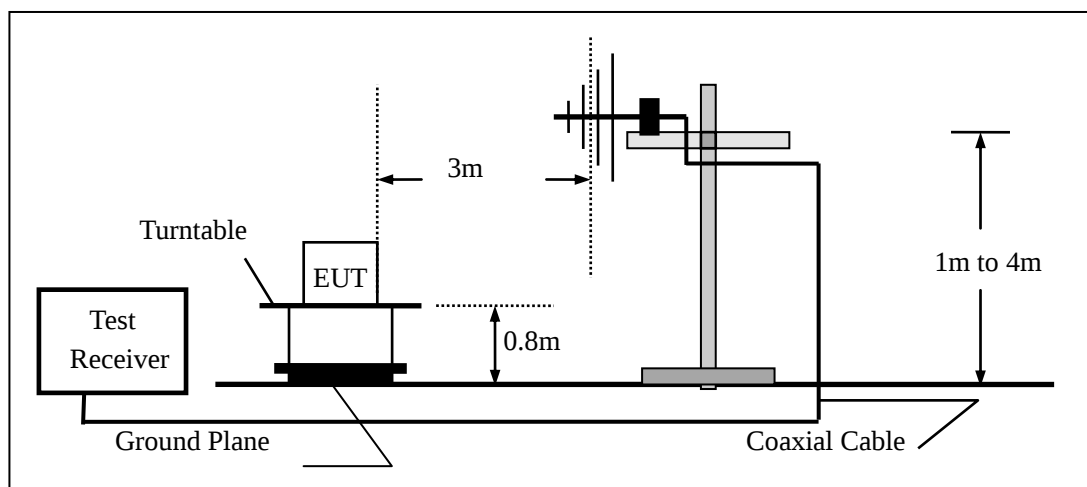

(c) For radiated emissions above 1000MHz

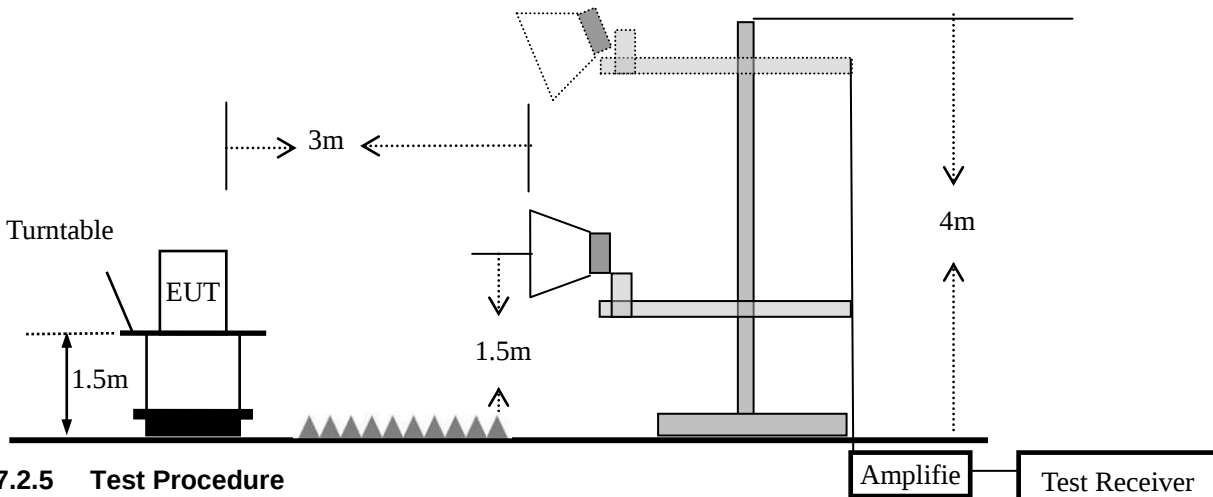

### 7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and frequencies above 1GHz,
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

For peak measurement:

Set RBW=100 kHz for  $f < 1$  GHz; VBW=120KHz; Sweep = auto; Detector function = peak; Trace = max hold; Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz

For average measurement:

VBW = 10 Hz, when duty cycle is no less than 98 percent.

VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW} [kHz])$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

## 7.2.6 Test Results

Spurious Emission below 30MHz (9KHz to 30MHz)

|              |                         |                    |           |
|--------------|-------------------------|--------------------|-----------|
| EUT:         | KettyBot                | Model Name :       | PNT       |
| Temperature: | 26 °C                   | Relative Humidity: | 54%       |
| Test Mode:   | Mode2/Mode3/Mode4/Mode5 | Test By:           | Allen Liu |

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission Level(dBuV/m) |    | Limit 3m(dBuV/m) |    | Over(dB) |    |
|----------------|-----------------|------------------------|----|------------------|----|----------|----|
|                |                 | PK                     | AV | PK               | AV | PK       | AV |
| --             | --              | --                     | -- | --               | -- | --       | -- |

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Spurious Emission below 1GHz (30MHz to 1GHz)


All the modulation modes have been tested, and the worst result was report as below:

|                |           |                    |                       |
|----------------|-----------|--------------------|-----------------------|
| EUT:           | KettyBot  | Model Name :       | PNT                   |
| Temperature:   | 26 °C     | Relative Humidity: | 54%                   |
| Pressure:      | 1010hPa   | Test Mode:         | Normal Link(module 1) |
| Test Voltage : | DC 25.55V |                    |                       |

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| V              | 59.8588   | 20.16            | 5.42   | 25.58             | 40.00    | -14.42 | QP     |
| V              | 107.1337  | 16.52            | 11.26  | 27.78             | 43.50    | -15.72 | QP     |
| V              | 150.0107  | 20.63            | 12.57  | 33.20             | 43.50    | -10.30 | QP     |
| V              | 199.2855  | 22.72            | 9.56   | 32.28             | 43.50    | -11.22 | QP     |
| V              | 308.9125  | 21.40            | 15.08  | 36.48             | 46.00    | -9.52  | QP     |
| V              | 827.4932  | 11.78            | 25.70  | 37.48             | 46.00    | -8.52  | QP     |

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

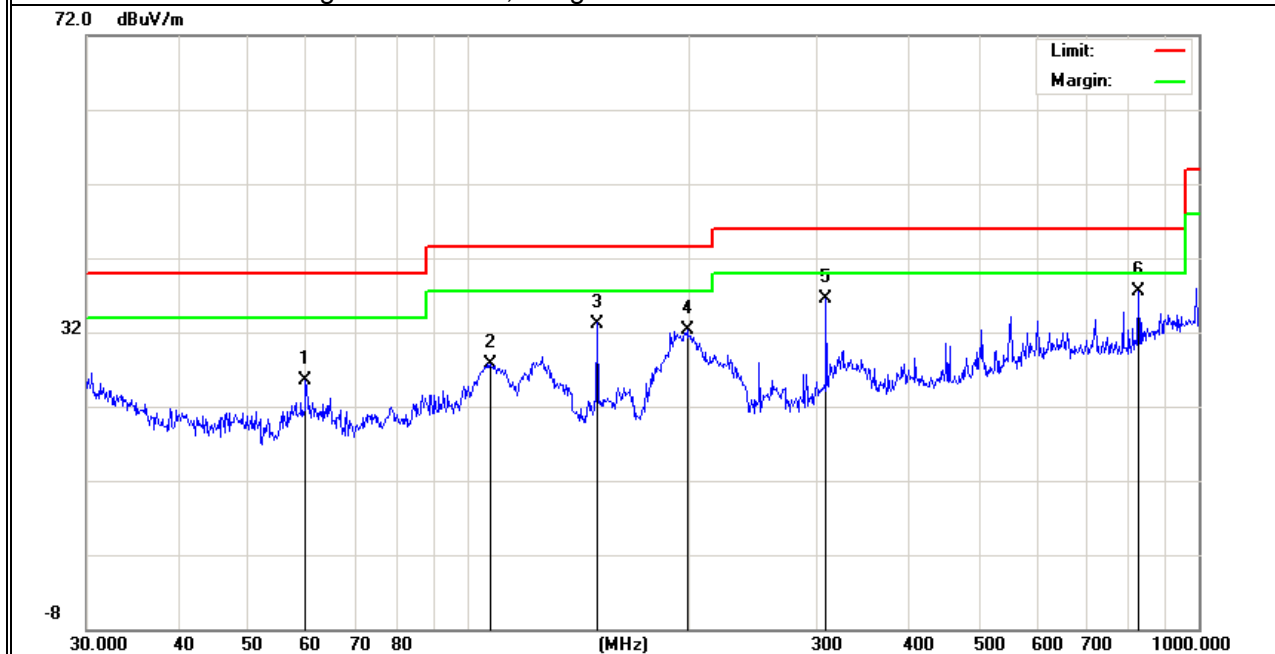

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| H              | 127.2176  | 16.52            | 12.15  | 28.67             | 43.50    | -14.83 | QP     |
| H              | 150.0107  | 17.02            | 12.57  | 29.59             | 43.50    | -13.91 | QP     |
| H              | 261.0581  | 16.00            | 15.20  | 31.20             | 46.00    | -14.80 | QP     |
| H              | 451.1349  | 16.16            | 19.42  | 35.58             | 46.00    | -10.42 | QP     |
| H              | 787.8513  | 13.34            | 24.97  | 38.31             | 46.00    | -7.69  | QP     |
| H              | 827.4932  | 14.00            | 25.70  | 39.70             | 46.00    | -6.30  | QP     |

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

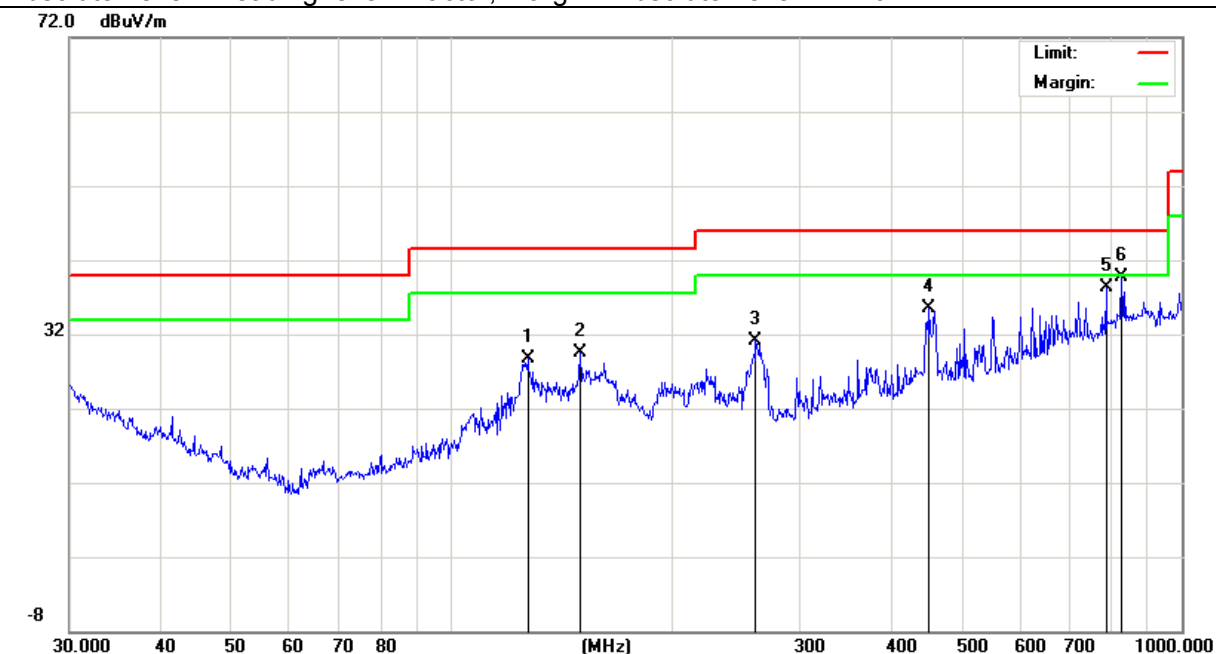


|                |           |                    |                       |
|----------------|-----------|--------------------|-----------------------|
| EUT:           | KettyBot  | Model Name :       | PNT                   |
| Temperature:   | 26 °C     | Relative Humidity: | 54%                   |
| Pressure:      | 1010hPa   | Test Mode:         | Normal Link(module 2) |
| Test Voltage : | DC 25.55V |                    |                       |

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| V              | 59.8588   | 22.16            | 5.42   | 27.58             | 40.00    | -12.42 | QP     |
| V              | 150.0107  | 21.13            | 12.57  | 33.70             | 43.50    | -9.80  | QP     |
| V              | 226.8934  | 19.28            | 11.70  | 30.98             | 46.00    | -15.02 | QP     |
| V              | 308.9125  | 19.40            | 15.08  | 34.48             | 46.00    | -11.52 | QP     |
| V              | 504.7062  | 12.15            | 20.74  | 32.89             | 46.00    | -13.11 | QP     |
| V              | 827.4932  | 10.78            | 25.70  | 36.48             | 46.00    | -9.52  | QP     |

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

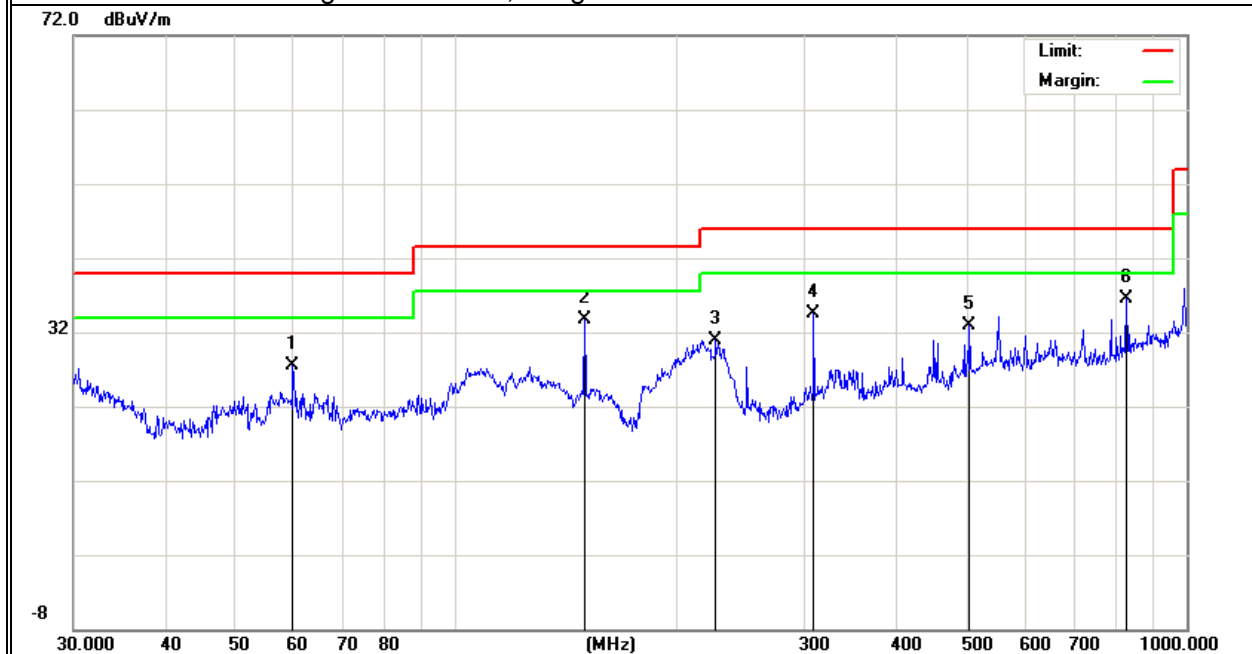

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| H              | 127.2176  | 17.02            | 12.15  | 29.17             | 43.50    | -14.33 | QP     |
| H              | 150.0107  | 17.02            | 12.57  | 29.59             | 43.50    | -13.91 | QP     |
| H              | 261.0581  | 18.50            | 15.20  | 33.70             | 46.00    | -12.30 | QP     |
| H              | 451.1349  | 17.66            | 19.42  | 37.08             | 46.00    | -8.92  | QP     |
| H              | 625.0778  | 13.10            | 22.85  | 35.95             | 46.00    | -10.05 | QP     |
| H              | 787.8513  | 14.34            | 24.97  | 39.31             | 46.00    | -6.69  | QP     |

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

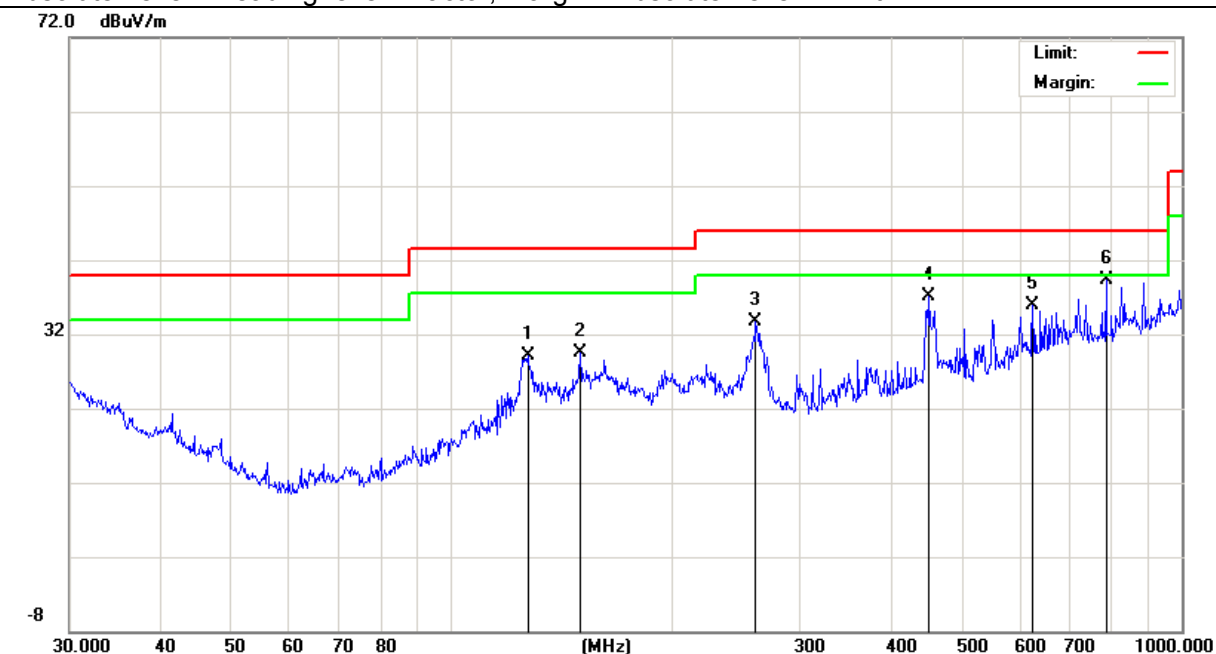

### Spurious Emission Above 1GHz (1GHz to 25GHz)

|              |                             |                    |           |
|--------------|-----------------------------|--------------------|-----------|
| EUT:         | KettyBot                    | Model Name :       | PNT       |
| Temperature: | 26 °C                       | Relative Humidity: | 54%       |
| Test Mode:   | 802.11b/g/n20/n40(module 1) | Test By:           | Allen Liu |

All the modulation modes have been tested, only shown the worst data as below:

| Frequency                                    | Read Level | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits   | Margin | Remark | Comment    |
|----------------------------------------------|------------|------------|----------------|---------------------|----------------|----------|--------|--------|------------|
| (MHz)                                        | (dBμV)     | (dB)       | dB/m           | (dB)                | (dBμV/m)       | (dBμV/m) | (dB)   |        |            |
| Low Channel (2412 MHz)(802.11b)--Above 1G    |            |            |                |                     |                |          |        |        |            |
| 4824.265                                     | 62.86      | 5.21       | 35.59          | 44.30               | 59.36          | 74.00    | -14.64 | Pk     | Vertical   |
| 4824.265                                     | 40.86      | 5.21       | 35.59          | 44.30               | 37.36          | 54.00    | -16.64 | AV     | Vertical   |
| 7236.296                                     | 60.35      | 6.48       | 36.27          | 44.60               | 58.50          | 74.00    | -15.50 | Pk     | Vertical   |
| 7236.296                                     | 44.10      | 6.48       | 36.27          | 44.60               | 42.25          | 54.00    | -11.75 | AV     | Vertical   |
| 4824.414                                     | 61.05      | 5.21       | 35.55          | 44.30               | 57.51          | 74.00    | -16.49 | Pk     | Horizontal |
| 4824.414                                     | 43.31      | 5.21       | 35.55          | 44.30               | 39.77          | 54.00    | -14.23 | AV     | Horizontal |
| 7236.428                                     | 63.15      | 6.48       | 36.27          | 44.52               | 61.38          | 74.00    | -12.62 | Pk     | Horizontal |
| 7236.428                                     | 46.44      | 6.48       | 36.27          | 44.52               | 44.67          | 54.00    | -9.33  | AV     | Horizontal |
| Middle Channel (2437 MHz)(802.11b)--Above 1G |            |            |                |                     |                |          |        |        |            |
| 4874.312                                     | 62.45      | 5.21       | 35.66          | 44.20               | 59.12          | 74.00    | -14.88 | Pk     | Vertical   |
| 4874.312                                     | 43.18      | 5.21       | 35.66          | 44.20               | 39.85          | 54.00    | -14.15 | AV     | Vertical   |
| 7311.227                                     | 59.77      | 7.10       | 36.50          | 44.43               | 58.94          | 74.00    | -15.06 | Pk     | Vertical   |
| 7311.227                                     | 46.96      | 7.10       | 36.50          | 44.43               | 46.13          | 54.00    | -7.87  | AV     | Vertical   |
| 4874.529                                     | 60.70      | 5.21       | 35.66          | 44.20               | 57.37          | 74.00    | -16.63 | Pk     | Horizontal |
| 4874.529                                     | 48.49      | 5.21       | 35.66          | 44.20               | 45.16          | 54.00    | -8.84  | AV     | Horizontal |
| 7311.313                                     | 59.40      | 7.10       | 36.50          | 44.43               | 58.57          | 74.00    | -15.43 | Pk     | Horizontal |
| 7311.313                                     | 42.09      | 7.10       | 36.50          | 44.43               | 41.26          | 54.00    | -12.74 | AV     | Horizontal |
| High Channel (2462 MHz)(802.11b)--Above 1G   |            |            |                |                     |                |          |        |        |            |
| 4924.102                                     | 65.93      | 5.21       | 35.52          | 44.21               | 62.45          | 74.00    | -11.55 | Pk     | Vertical   |
| 4924.102                                     | 42.98      | 5.21       | 35.52          | 44.21               | 39.50          | 54.00    | -14.50 | AV     | Vertical   |
| 7386.425                                     | 61.22      | 7.10       | 36.53          | 44.60               | 60.25          | 74.00    | -13.75 | Pk     | Vertical   |
| 7386.425                                     | 45.07      | 7.10       | 36.53          | 44.60               | 44.10          | 54.00    | -9.90  | AV     | Vertical   |
| 4924.066                                     | 66.49      | 5.21       | 35.52          | 44.21               | 63.01          | 74.00    | -10.99 | Pk     | Horizontal |
| 4924.066                                     | 46.99      | 5.21       | 35.52          | 44.21               | 43.51          | 54.00    | -10.49 | AV     | Horizontal |
| 7386.198                                     | 61.10      | 7.10       | 36.53          | 44.60               | 60.13          | 74.00    | -13.87 | Pk     | Horizontal |
| 7386.198                                     | 44.74      | 7.10       | 36.53          | 44.60               | 43.77          | 54.00    | -10.23 | AV     | Horizontal |

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamplifier Factor

(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(3) "module 1 802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

|              |                             |                    |           |
|--------------|-----------------------------|--------------------|-----------|
| EUT:         | KettyBot                    | Model Name :       | PNT       |
| Temperature: | 26 °C                       | Relative Humidity: | 54%       |
| Test Mode:   | 802.11b/g/n20/n40(module 2) | Test By:           | Allen Liu |

| Frequency                                       | Read Level | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Remark | Comment    |
|-------------------------------------------------|------------|------------|----------------|---------------|----------------|----------|--------|--------|------------|
| (MHz)                                           | (dBμV)     | (dB)       | dB/m           | (dB)          | (dBμV/m)       | (dBμV/m) | (dB)   |        |            |
| Low Channel (2412 MHz)(802.11n20)--Above 1G     |            |            |                |               |                |          |        |        |            |
| 4824.265                                        | 62.95      | 5.21       | 35.59          | 44.30         | 59.45          | 74.00    | -14.55 | Pk     | Vertical   |
| 4824.265                                        | 40.18      | 5.21       | 35.59          | 44.30         | 36.68          | 54.00    | -17.32 | AV     | Vertical   |
| 7236.296                                        | 59.73      | 6.48       | 36.27          | 44.60         | 57.88          | 74.00    | -16.12 | Pk     | Vertical   |
| 7236.296                                        | 43.64      | 6.48       | 36.27          | 44.60         | 41.79          | 54.00    | -12.21 | AV     | Vertical   |
| 4824.414                                        | 61.46      | 5.21       | 35.55          | 44.30         | 57.92          | 74.00    | -16.08 | Pk     | Horizontal |
| 4824.414                                        | 43.09      | 5.21       | 35.55          | 44.30         | 39.55          | 54.00    | -14.45 | AV     | Horizontal |
| 7236.428                                        | 63.15      | 6.48       | 36.27          | 44.52         | 61.38          | 74.00    | -12.62 | Pk     | Horizontal |
| 7236.428                                        | 46.92      | 6.48       | 36.27          | 44.52         | 45.15          | 54.00    | -8.85  | AV     | Horizontal |
| Middle Channel (2437 MHz)( 802.11n20)--Above 1G |            |            |                |               |                |          |        |        |            |
| 4874.312                                        | 62.42      | 5.21       | 35.66          | 44.20         | 59.09          | 74.00    | -14.91 | Pk     | Vertical   |
| 4874.312                                        | 42.40      | 5.21       | 35.66          | 44.20         | 39.07          | 54.00    | -14.93 | AV     | Vertical   |
| 7311.227                                        | 59.94      | 7.10       | 36.50          | 44.43         | 59.11          | 74.00    | -14.89 | Pk     | Vertical   |
| 7311.227                                        | 47.27      | 7.10       | 36.50          | 44.43         | 46.44          | 54.00    | -7.56  | AV     | Vertical   |
| 4874.529                                        | 61.15      | 5.21       | 35.66          | 44.20         | 57.82          | 74.00    | -16.18 | Pk     | Horizontal |
| 4874.529                                        | 48.30      | 5.21       | 35.66          | 44.20         | 44.97          | 54.00    | -9.03  | AV     | Horizontal |
| 7311.313                                        | 60.15      | 7.10       | 36.50          | 44.43         | 59.32          | 74.00    | -14.68 | Pk     | Horizontal |
| 7311.313                                        | 41.45      | 7.10       | 36.50          | 44.43         | 40.62          | 54.00    | -13.38 | AV     | Horizontal |
| High Channel (2462 MHz)( 802.11n20)--Above 1G   |            |            |                |               |                |          |        |        |            |
| 4924.102                                        | 66.18      | 5.21       | 35.52          | 44.21         | 62.70          | 74.00    | -11.30 | Pk     | Vertical   |
| 4924.102                                        | 42.95      | 5.21       | 35.52          | 44.21         | 39.47          | 54.00    | -14.53 | AV     | Vertical   |
| 7386.425                                        | 61.05      | 7.10       | 36.53          | 44.60         | 60.08          | 74.00    | -13.92 | Pk     | Vertical   |
| 7386.425                                        | 44.38      | 7.10       | 36.53          | 44.60         | 43.41          | 54.00    | -10.59 | AV     | Vertical   |
| 4924.066                                        | 67.22      | 5.21       | 35.52          | 44.21         | 63.74          | 74.00    | -10.26 | Pk     | Horizontal |
| 4924.066                                        | 47.01      | 5.21       | 35.52          | 44.21         | 43.53          | 54.00    | -10.47 | AV     | Horizontal |
| 7386.198                                        | 61.27      | 7.10       | 36.53          | 44.60         | 60.30          | 74.00    | -13.70 | Pk     | Horizontal |
| 7386.198                                        | 45.22      | 7.10       | 36.53          | 44.60         | 44.25          | 54.00    | -9.75  | AV     | Horizontal |

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(3) "module 2 802.11n20" MIMO mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

Spurious Emission in Restricted Band 2310MHz -18000MHz  
module 1:

| Frequency | Meter Reading | Cable Loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector | Comment    |
|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|----------|------------|
| (MHz)     | (dBμV)        | (dB)       | dB/m           | (dB)          | (dBμV/m)       | (dBμV/m) | (dB)   | Type     |            |
| 802.11b   |               |            |                |               |                |          |        |          |            |
| 2310.00   | 57.97         | 2.97       | 27.80          | 43.80         | 44.94          | 74       | -29.06 | Pk       | Horizontal |
| 2310.00   | 43.78         | 2.97       | 27.80          | 43.80         | 30.75          | 54       | -23.25 | AV       | Horizontal |
| 2310.00   | 58.91         | 2.97       | 27.80          | 43.80         | 45.88          | 74       | -28.12 | Pk       | Vertical   |
| 2310.00   | 42.11         | 2.97       | 27.80          | 43.80         | 29.08          | 54       | -24.92 | AV       | Vertical   |
| 2390.00   | 58.07         | 3.14       | 27.21          | 43.80         | 44.62          | 74       | -29.38 | Pk       | Vertical   |
| 2390.00   | 42.06         | 3.14       | 27.21          | 43.80         | 28.61          | 54       | -25.39 | AV       | Vertical   |
| 2390.00   | 56.86         | 3.14       | 27.21          | 43.80         | 43.41          | 74       | -30.59 | Pk       | Horizontal |
| 2390.00   | 41.63         | 3.14       | 27.21          | 43.80         | 28.18          | 54       | -25.82 | AV       | Horizontal |
| 2483.50   | 57.52         | 3.58       | 27.70          | 44.00         | 44.80          | 74       | -29.20 | Pk       | Vertical   |
| 2483.50   | 42.71         | 3.58       | 27.70          | 44.00         | 29.99          | 54       | -24.01 | AV       | Vertical   |
| 2483.50   | 58.62         | 3.58       | 27.70          | 44.00         | 45.90          | 74       | -28.10 | Pk       | Horizontal |
| 2483.50   | 41.83         | 3.58       | 27.70          | 44.00         | 29.11          | 54       | -24.89 | AV       | Horizontal |
| 802.11g   |               |            |                |               |                |          |        |          |            |
| 2310.00   | 58.67         | 2.97       | 27.80          | 43.80         | 45.64          | 74       | -28.36 | Pk       | Horizontal |
| 2310.00   | 44.28         | 2.97       | 27.80          | 43.80         | 31.25          | 54       | -22.75 | AV       | Horizontal |
| 2310.00   | 57.23         | 2.97       | 27.80          | 43.80         | 44.20          | 74       | -29.80 | Pk       | Vertical   |
| 2310.00   | 42.93         | 2.97       | 27.80          | 43.80         | 29.90          | 54       | -24.10 | AV       | Vertical   |
| 2390.00   | 57.89         | 3.14       | 27.21          | 43.80         | 44.44          | 74       | -29.56 | Pk       | Vertical   |
| 2390.00   | 42.01         | 3.14       | 27.21          | 43.80         | 28.56          | 54       | -25.44 | AV       | Vertical   |
| 2390.00   | 58.07         | 3.14       | 27.21          | 43.80         | 44.62          | 74       | -29.38 | Pk       | Horizontal |
| 2390.00   | 44.12         | 3.14       | 27.21          | 43.80         | 30.67          | 54       | -23.33 | AV       | Horizontal |
| 2483.50   | 58.28         | 3.58       | 27.70          | 44.00         | 45.56          | 74       | -28.44 | Pk       | Vertical   |
| 2483.50   | 44.14         | 3.58       | 27.70          | 44.00         | 31.42          | 54       | -22.58 | AV       | Vertical   |
| 2483.50   | 59.32         | 3.58       | 27.70          | 44.00         | 46.60          | 74       | -27.40 | Pk       | Horizontal |
| 2483.50   | 42.53         | 3.58       | 27.70          | 44.00         | 29.81          | 54       | -24.19 | AV       | Horizontal |
| 802.11n20 |               |            |                |               |                |          |        |          |            |
| 2310.00   | 58.02         | 2.97       | 27.80          | 43.80         | 44.99          | 74       | -29.01 | Pk       | Horizontal |
| 2310.00   | 43.98         | 2.97       | 27.80          | 43.80         | 30.95          | 54       | -23.05 | AV       | Horizontal |
| 2310.00   | 59.18         | 2.97       | 27.80          | 43.80         | 46.15          | 74       | -27.85 | Pk       | Vertical   |
| 2310.00   | 42.25         | 2.97       | 27.80          | 43.80         | 29.22          | 54       | -24.78 | AV       | Vertical   |
| 2390.00   | 58.06         | 3.14       | 27.21          | 43.80         | 44.61          | 74       | -29.39 | Pk       | Vertical   |
| 2390.00   | 41.72         | 3.14       | 27.21          | 43.80         | 28.27          | 54       | -25.73 | AV       | Vertical   |
| 2390.00   | 56.81         | 3.14       | 27.21          | 43.80         | 43.36          | 74       | -30.64 | Pk       | Horizontal |
| 2390.00   | 42.27         | 3.14       | 27.21          | 43.80         | 28.82          | 54       | -25.18 | AV       | Horizontal |
| 2483.50   | 57.78         | 3.58       | 27.70          | 44.00         | 45.06          | 74       | -28.94 | Pk       | Vertical   |
| 2483.50   | 42.67         | 3.58       | 27.70          | 44.00         | 29.95          | 54       | -24.05 | AV       | Vertical   |
| 2483.50   | 58.94         | 3.58       | 27.70          | 44.00         | 46.22          | 74       | -27.78 | Pk       | Horizontal |
| 2483.50   | 42.45         | 3.58       | 27.70          | 44.00         | 29.73          | 54       | -24.27 | AV       | Horizontal |

| 802.11n40 |       |      |       |       |       |    |        |    |            |
|-----------|-------|------|-------|-------|-------|----|--------|----|------------|
| 2310.00   | 58.69 | 2.97 | 27.80 | 43.80 | 45.66 | 74 | -28.34 | Pk | Horizontal |
| 2310.00   | 44.17 | 2.97 | 27.80 | 43.80 | 31.14 | 54 | -22.86 | AV | Horizontal |
| 2310.00   | 56.73 | 2.97 | 27.80 | 43.80 | 43.70 | 74 | -30.30 | Pk | Vertical   |
| 2310.00   | 43.17 | 2.97 | 27.80 | 43.80 | 30.14 | 54 | -23.86 | AV | Vertical   |
| 2390.00   | 58.46 | 3.14 | 27.21 | 43.80 | 45.01 | 74 | -28.99 | Pk | Vertical   |
| 2390.00   | 41.76 | 3.14 | 27.21 | 43.80 | 28.31 | 54 | -25.69 | AV | Vertical   |
| 2390.00   | 58.52 | 3.14 | 27.21 | 43.80 | 45.07 | 74 | -28.93 | Pk | Horizontal |
| 2390.00   | 43.28 | 3.14 | 27.21 | 43.80 | 29.83 | 54 | -24.17 | AV | Horizontal |
| 2483.50   | 58.88 | 3.58 | 27.70 | 44.00 | 46.16 | 74 | -27.84 | Pk | Vertical   |
| 2483.50   | 43.70 | 3.58 | 27.70 | 44.00 | 30.98 | 54 | -23.02 | AV | Vertical   |
| 2483.50   | 58.49 | 3.58 | 27.70 | 44.00 | 45.77 | 74 | -28.23 | Pk | Horizontal |
| 2483.50   | 42.44 | 3.58 | 27.70 | 44.00 | 29.72 | 54 | -24.28 | AV | Horizontal |

All the modulation modes have been tested, only shown the worst data as below:

Note: module 1 the worst antenna1 for SISO mode.

module 2:

| Frequency | Meter Reading | Cable Loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits   | Margin | Detector | Comment    |
|-----------|---------------|------------|----------------|---------------------|----------------|----------|--------|----------|------------|
| (MHz)     | (dBμV)        | (dB)       | (dB/m)         | (dB)                | (dBμV/m)       | (dBμV/m) | (dB)   | Type     |            |
| 802.11b   |               |            |                |                     |                |          |        |          |            |
| 2310.00   | 58.17         | 2.97       | 27.80          | 43.80               | 45.14          | 74       | -28.86 | Pk       | Horizontal |
| 2310.00   | 43.67         | 2.97       | 27.80          | 43.80               | 30.64          | 54       | -23.36 | AV       | Horizontal |
| 2310.00   | 58.61         | 2.97       | 27.80          | 43.80               | 45.58          | 74       | -28.42 | Pk       | Vertical   |
| 2310.00   | 42.40         | 2.97       | 27.80          | 43.80               | 29.37          | 54       | -24.63 | AV       | Vertical   |
| 2390.00   | 57.92         | 3.14       | 27.21          | 43.80               | 44.47          | 74       | -29.53 | Pk       | Vertical   |
| 2390.00   | 42.10         | 3.14       | 27.21          | 43.80               | 28.65          | 54       | -25.35 | AV       | Vertical   |
| 2390.00   | 56.44         | 3.14       | 27.21          | 43.80               | 42.99          | 74       | -31.01 | Pk       | Horizontal |
| 2390.00   | 41.19         | 3.14       | 27.21          | 43.80               | 27.74          | 54       | -26.26 | AV       | Horizontal |
| 2483.50   | 57.64         | 3.58       | 27.70          | 44.00               | 44.92          | 74       | -29.08 | Pk       | Vertical   |
| 2483.50   | 42.94         | 3.58       | 27.70          | 44.00               | 30.22          | 54       | -23.78 | AV       | Vertical   |
| 2483.50   | 58.42         | 3.58       | 27.70          | 44.00               | 45.70          | 74       | -28.30 | Pk       | Horizontal |
| 2483.50   | 41.76         | 3.58       | 27.70          | 44.00               | 29.04          | 54       | -24.96 | AV       | Horizontal |
| 802.11g   |               |            |                |                     |                |          |        |          |            |
| 2310.00   | 59.02         | 2.97       | 27.80          | 43.80               | 45.99          | 74       | -28.01 | Pk       | Horizontal |
| 2310.00   | 43.79         | 2.97       | 27.80          | 43.80               | 30.76          | 54       | -23.24 | AV       | Horizontal |
| 2310.00   | 57.16         | 2.97       | 27.80          | 43.80               | 44.13          | 74       | -29.87 | Pk       | Vertical   |
| 2310.00   | 42.84         | 2.97       | 27.80          | 43.80               | 29.81          | 54       | -24.19 | AV       | Vertical   |
| 2390.00   | 57.32         | 3.14       | 27.21          | 43.80               | 43.87          | 74       | -30.13 | Pk       | Vertical   |
| 2390.00   | 42.17         | 3.14       | 27.21          | 43.80               | 28.72          | 54       | -25.28 | AV       | Vertical   |
| 2390.00   | 58.33         | 3.14       | 27.21          | 43.80               | 44.88          | 74       | -29.12 | Pk       | Horizontal |
| 2390.00   | 44.13         | 3.14       | 27.21          | 43.80               | 30.68          | 54       | -23.32 | AV       | Horizontal |
| 2483.50   | 58.84         | 3.58       | 27.70          | 44.00               | 46.12          | 74       | -27.88 | Pk       | Vertical   |
| 2483.50   | 43.72         | 3.58       | 27.70          | 44.00               | 31.00          | 54       | -23.00 | AV       | Vertical   |
| 2483.50   | 58.42         | 3.58       | 27.70          | 44.00               | 45.70          | 74       | -28.30 | Pk       | Horizontal |
| 2483.50   | 41.63         | 3.58       | 27.70          | 44.00               | 28.91          | 54       | -25.09 | AV       | Horizontal |
| 802.11n20 |               |            |                |                     |                |          |        |          |            |
| 2310.00   | 58.16         | 2.97       | 27.80          | 43.80               | 45.13          | 74       | -28.87 | Pk       | Horizontal |
| 2310.00   | 43.91         | 2.97       | 27.80          | 43.80               | 30.88          | 54       | -23.12 | AV       | Horizontal |
| 2310.00   | 59.06         | 2.97       | 27.80          | 43.80               | 46.03          | 74       | -27.97 | Pk       | Vertical   |
| 2310.00   | 42.65         | 2.97       | 27.80          | 43.80               | 29.62          | 54       | -24.38 | AV       | Vertical   |
| 2390.00   | 57.92         | 3.14       | 27.21          | 43.80               | 44.47          | 74       | -29.53 | Pk       | Vertical   |
| 2390.00   | 42.45         | 3.14       | 27.21          | 43.80               | 29.00          | 54       | -25.00 | AV       | Vertical   |
| 2390.00   | 56.89         | 3.14       | 27.21          | 43.80               | 43.44          | 74       | -30.56 | Pk       | Horizontal |
| 2390.00   | 41.85         | 3.14       | 27.21          | 43.80               | 28.40          | 54       | -25.60 | AV       | Horizontal |
| 2483.50   | 57.56         | 3.58       | 27.70          | 44.00               | 44.84          | 74       | -29.16 | Pk       | Vertical   |
| 2483.50   | 42.67         | 3.58       | 27.70          | 44.00               | 29.95          | 54       | -24.05 | AV       | Vertical   |
| 2483.50   | 58.86         | 3.58       | 27.70          | 44.00               | 46.14          | 74       | -27.86 | Pk       | Horizontal |
| 2483.50   | 42.48         | 3.58       | 27.70          | 44.00               | 29.76          | 54       | -24.24 | AV       | Horizontal |

| 802.11n40 |       |      |       |       |       |    |        |    |            |
|-----------|-------|------|-------|-------|-------|----|--------|----|------------|
| 2310.00   | 58.85 | 2.97 | 27.80 | 43.80 | 45.82 | 74 | -28.18 | Pk | Horizontal |
| 2310.00   | 43.96 | 2.97 | 27.80 | 43.80 | 30.93 | 54 | -23.07 | AV | Horizontal |
| 2310.00   | 56.56 | 2.97 | 27.80 | 43.80 | 43.53 | 74 | -30.47 | Pk | Vertical   |
| 2310.00   | 43.32 | 2.97 | 27.80 | 43.80 | 30.29 | 54 | -23.71 | AV | Vertical   |
| 2390.00   | 58.03 | 3.14 | 27.21 | 43.80 | 44.58 | 74 | -29.42 | Pk | Vertical   |
| 2390.00   | 42.40 | 3.14 | 27.21 | 43.80 | 28.95 | 54 | -25.05 | AV | Vertical   |
| 2390.00   | 58.40 | 3.14 | 27.21 | 43.80 | 44.95 | 74 | -29.05 | Pk | Horizontal |
| 2390.00   | 43.71 | 3.14 | 27.21 | 43.80 | 30.26 | 54 | -23.74 | AV | Horizontal |
| 2483.50   | 58.50 | 3.58 | 27.70 | 44.00 | 45.78 | 74 | -28.22 | Pk | Vertical   |
| 2483.50   | 43.89 | 3.58 | 27.70 | 44.00 | 31.17 | 54 | -22.83 | AV | Vertical   |
| 2483.50   | 58.56 | 3.58 | 27.70 | 44.00 | 45.84 | 74 | -28.16 | Pk | Horizontal |
| 2483.50   | 42.58 | 3.58 | 27.70 | 44.00 | 29.86 | 54 | -24.14 | AV | Horizontal |

Note: module 2 the worst antenna for SISO mode, antenna1 is the worst case for SISO mode.

### Spurious Emission in Restricted Bands 3260MHz- 18000MHz

All the modulation modes have been tested, only shown the worst data as below:

module 1:

| Frequency | Reading Level | Cable Loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits   | Margin | Detector | Comment    |
|-----------|---------------|------------|----------------|---------------------|----------------|----------|--------|----------|------------|
| (MHz)     | (dBμV)        | (dB)       | dB/m           | (dB)                | (dBμV/m)       | (dBμV/m) | (dB)   | Type     |            |
| 3260      | 60.03         | 4.04       | 29.57          | 44.70               | 48.94          | 74       | -25.06 | Pk       | Vertical   |
| 3260      | 55.67         | 4.04       | 29.57          | 44.70               | 44.58          | 54       | -9.42  | AV       | Vertical   |
| 3260      | 61.45         | 4.04       | 29.57          | 44.70               | 50.36          | 74       | -23.64 | Pk       | Horizontal |
| 3260      | 56.69         | 4.04       | 29.57          | 44.70               | 45.60          | 54       | -8.40  | AV       | Horizontal |
| 3332      | 64.23         | 4.26       | 29.87          | 44.40               | 53.96          | 74       | -20.04 | Pk       | Vertical   |
| 3332      | 53.82         | 4.26       | 29.87          | 44.40               | 43.55          | 54       | -10.45 | AV       | Vertical   |
| 3332      | 62.48         | 4.26       | 29.87          | 44.40               | 52.21          | 74       | -21.79 | Pk       | Horizontal |
| 3332      | 52.52         | 4.26       | 29.87          | 44.40               | 42.25          | 54       | -11.75 | AV       | Horizontal |
| 17797     | 43.48         | 10.99      | 43.95          | 43.50               | 54.92          | 74       | -19.08 | Pk       | Vertical   |
| 17797     | 32.63         | 10.99      | 43.95          | 43.50               | 44.07          | 54       | -9.93  | AV       | Vertical   |
| 17788     | 43.80         | 11.81      | 43.69          | 44.60               | 54.70          | 74       | -19.30 | Pk       | Horizontal |
| 17788     | 32.47         | 11.81      | 43.69          | 44.60               | 43.37          | 54       | -10.63 | AV       | Horizontal |

module 2:

| Frequency | Reading Level | Cable Loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits   | Margin | Detector | Comment    |
|-----------|---------------|------------|----------------|---------------------|----------------|----------|--------|----------|------------|
| (MHz)     | (dBμV)        | (dB)       | dB/m           | (dB)                | (dBμV/m)       | (dBμV/m) | (dB)   | Type     |            |
| 3260      | 60.79         | 4.04       | 29.57          | 44.70               | 49.70          | 74       | -24.30 | Pk       | Vertical   |
| 3260      | 55.85         | 4.04       | 29.57          | 44.70               | 44.76          | 54       | -9.24  | AV       | Vertical   |
| 3260      | 61.82         | 4.04       | 29.57          | 44.70               | 50.73          | 74       | -23.27 | Pk       | Horizontal |
| 3260      | 56.86         | 4.04       | 29.57          | 44.70               | 45.77          | 54       | -8.23  | AV       | Horizontal |
| 3332      | 65.09         | 4.26       | 29.87          | 44.40               | 54.82          | 74       | -19.18 | Pk       | Vertical   |
| 3332      | 53.34         | 4.26       | 29.87          | 44.40               | 43.07          | 54       | -10.93 | AV       | Vertical   |
| 3332      | 62.76         | 4.26       | 29.87          | 44.40               | 52.49          | 74       | -21.51 | Pk       | Horizontal |
| 3332      | 53.11         | 4.26       | 29.87          | 44.40               | 42.84          | 54       | -11.16 | AV       | Horizontal |
| 17797     | 42.81         | 10.99      | 43.95          | 43.50               | 54.25          | 74       | -19.75 | Pk       | Vertical   |
| 17797     | 32.61         | 10.99      | 43.95          | 43.50               | 44.05          | 54       | -9.95  | AV       | Vertical   |
| 17788     | 44.17         | 11.81      | 43.69          | 44.60               | 55.07          | 74       | -18.93 | Pk       | Horizontal |
| 17788     | 31.58         | 11.81      | 43.69          | 44.60               | 42.48          | 54       | -11.52 | AV       | Horizontal |

“module 1 802.11 b” mode is the worst mode, module 2 802.11n40 MIMO” mode is the worst mode  
When PK value is lower than the Average value  
limit, average don't record.

### **7.3 6DB BANDWIDTH**

#### **7.3.1 Applicable Standard**

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.2.

#### **7.3.2 Conformance Limit**

The minimum permissible 6dB bandwidth is 500 kHz.

#### **7.3.3 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

#### **7.3.4 Test Setup**

Please refer to Section 6.1 of this test report.

#### **7.3.5 Test Procedure**

The testing follows Subclause 11.8 of ANSI C63.10.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW  $\geq$  3\*RBW

Sweep = auto

Detector function = peak

Trace = max hold

**7.3.6 Test Results**

|              |                   |                    |           |
|--------------|-------------------|--------------------|-----------|
| EUT:         | KettyBot          | Model Name :       | PNT       |
| Temperature: | 26 °C             | Relative Humidity: | 54%       |
| Test Mode:   | 802.11b/g/n20/n40 | Test By:           | Allen Liu |

Test data reference attachment.

## 7.4 DUTY CYCLE

### 7.4.1 Applicable Standard

According to KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 6.

### 7.4.2 Conformance Limit

No limit requirement.

### 7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.4.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 10MHz(the largest available value)

VBW = 10MHz ( $\geq$  RBW)

Number of points in Sweep  $> 100$

Detector function = peak

Trace = Clear write

Measure  $T_{total}$  and  $T_{on}$

Calculate Duty Cycle =  $T_{on} / T_{total}$

**7.4.6 Test Results**

|              |                   |                    |           |
|--------------|-------------------|--------------------|-----------|
| EUT:         | KettyBot          | Model Name :       | PNT       |
| Temperature: | 26 °C             | Relative Humidity: | 54%       |
| Test Mode:   | 802.11b/g/n20/n40 | Test By:           | Allen Liu |

Test data reference attachment.

## 7.5 MAXIMUM OUTPUT POWER

### 7.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.3.2.3.

### 7.5.2 Conformance Limit


The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 7.5.3 Measuring Instruments

The following table is the setting of the power meter.

| Power meter parameter | Setting |
|-----------------------|---------|
| Detector              | Peak    |

### 7.5.4 Test Setup

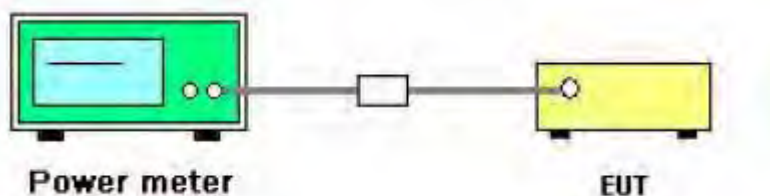

### 7.5.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.9.1.3 of ANSI C63.10

### 7.5.6 EUT operation during Test

The EUT was programmed to be in continuously transmitting mode.

**7.5.7 Test Results**

|              |                   |                    |           |
|--------------|-------------------|--------------------|-----------|
| EUT:         | KettyBot          | Model Name :       | PNT       |
| Temperature: | 26 °C             | Relative Humidity: | 54%       |
| Test Mode:   | 802.11b/g/n20/n40 | Test By:           | Allen Liu |

Refer to section 4 of this report:

For 2.4G band. Directional gain=3.5dBi; 3.5dBi<6dBi, so conducted power limit= 30.00dBm.

Test data reference attachment.

## 7.6 POWER SPECTRAL DENSITY

### 7.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.4.

### 7.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.6.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.2 of ANSI C63.10

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 * \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### 7.6.6 Test Results

|              |                   |                    |           |
|--------------|-------------------|--------------------|-----------|
| EUT:         | KettyBot          | Model Name :       | PNT       |
| Temperature: | 26 °C             | Relative Humidity: | 54%       |
| Test Mode:   | 802.11b/g/n20/n40 | Test By:           | Allen Liu |

Refer to section 4 of this report:  
Test data reference attachment.

## **7.7 CONDUCTED BAND EDGE MEASUREMENT**

### **7.7.1 Applicable Standard**

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.7.

### **7.7.2 Conformance Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### **7.7.3 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

### **7.7.4 Test Setup**

Please refer to Section 6.1 of this test report.

### **7.7.5 Test Procedure**

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.7.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

### 7.7.6 Test Results

|              |                   |                    |           |
|--------------|-------------------|--------------------|-----------|
| EUT:         | KettyBot          | Model Name :       | PNT       |
| Temperature: | 26 °C             | Relative Humidity: | 54%       |
| Test Mode:   | 802.11b/g/n20/n40 | Test By:           | Allen Liu |

Test data reference attachment.

## **7.8 SPURIOUS RF CONDUCTED EMISSIONS**

### **7.8.1 Conformance Limit**

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### **7.8.2 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

### **7.8.3 Test Setup**

Please refer to Section 6.1 of this test report.

### **7.8.4 Test Procedure**

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.

### **7.8.5 Test Results**

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test data reference attachment.

## 7.9 ANTENNA APPLICATION

### 7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.9.2 Result

This EUT has three modules, module 2 supports Bluetooth, WIFI2.4G / 5G, module 2 has two antennas, Antenna 1 supports Bluetooth, WIFI2.4G / 5G, Antenna 2 supports WIFI2.4G / 5G. The module 1 only supports Bluetooth , WIFI 2.4G. The module 1 has only one antenna. module 3 only supports WCDMA/LTE. The module 3 has only one antenna. Antenna 4 supports WCDMA/LTE.

The module 2 for 2.4G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

| Mode                 | Tx/Rx             |
|----------------------|-------------------|
| 802.11b/g            | 1TX, 1RX          |
| 802.11n(20MHz,40MHz) | 1TX, 1RX/2TX, 2RX |

For 2.4GHz mode, Antenna 2,3 are transmitting, each with the same directional gain.  
 For power spectral density (PSD) measurements: Directional gain= $G_{ANT} + \text{Array Gain}=3.5\text{dBi} + 3.01 = 6.51\text{dBi}$ . For power measurements: Directional gain= $G_{ANT} + \text{Array Gain}=3.5\text{dBi} + 0 = 3.5\text{dBi}$ .

Note:  $G_{ANT}$  means antenna gain for the same gain in dBi.

For power spectral density (PSD) measurements:  $\text{Array Gain} = 10\log(N_{ANT}/N_{SS})\text{dB}$ .

*Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;*

*Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;*

*Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .*

For power measurements:

$N_{ANT}$  = number of transmit antennas and

$N_{SS}$  = number of spatial streams. (Assume  $N_{SS} = 1$  unless you have specific information to the contrary.)

The antenna is permanently fixed, It complies with the standard requirement.


## 8 TEST RESULTS

### MODULE 1:


#### 8.1.1 DUTY CYCLE

| Condition | Mode          | Frequency (MHz) | Duty Cycle (%) |
|-----------|---------------|-----------------|----------------|
| NVNT      | 802.11b       | 2412            | 100            |
| NVNT      | 802.11b       | 2437            | 100            |
| NVNT      | 802.11b       | 2462            | 100            |
| NVNT      | 802.11g       | 2412            | 100            |
| NVNT      | 802.11g       | 2437            | 100            |
| NVNT      | 802.11g       | 2462            | 100            |
| NVNT      | 802.11n(HT20) | 2412            | 100            |
| NVNT      | 802.11n(HT20) | 2437            | 100            |
| NVNT      | 802.11n(HT20) | 2462            | 100            |
| NVNT      | 802.11n(HT40) | 2422            | 100            |
| NVNT      | 802.11n(HT40) | 2437            | 100            |
| NVNT      | 802.11n(HT40) | 2452            | 100            |


Duty Cycle NVNT 802.11b 2412MHz

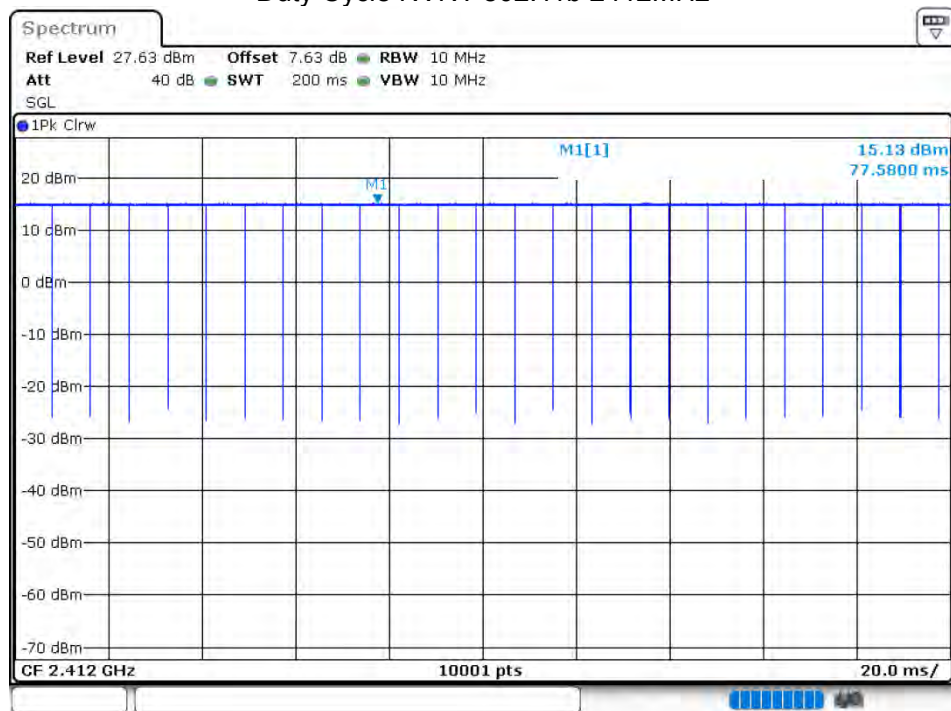


### Duty Cycle NVNT 802.11b 2437MHz

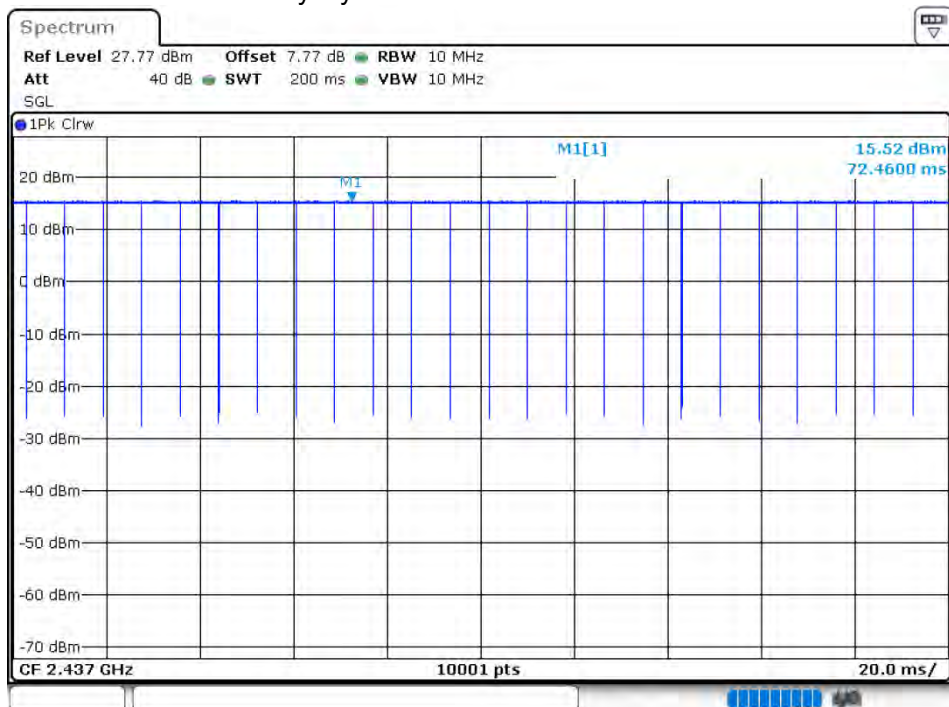


### Duty Cycle NVNT 802.11b 2462MHz

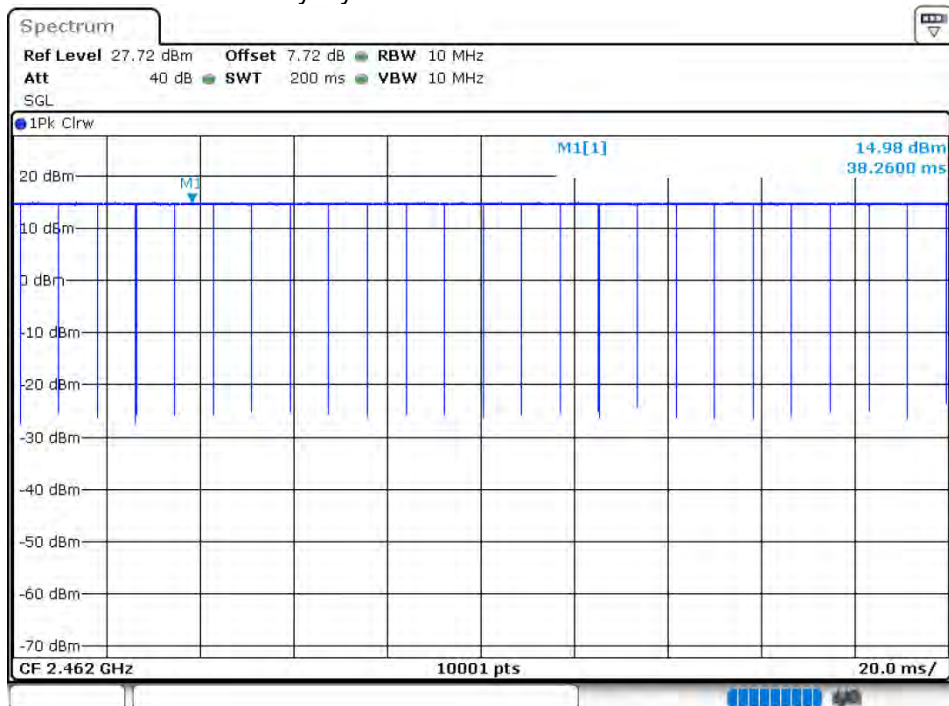


### Duty Cycle NVNT 802.11g 2412MHz

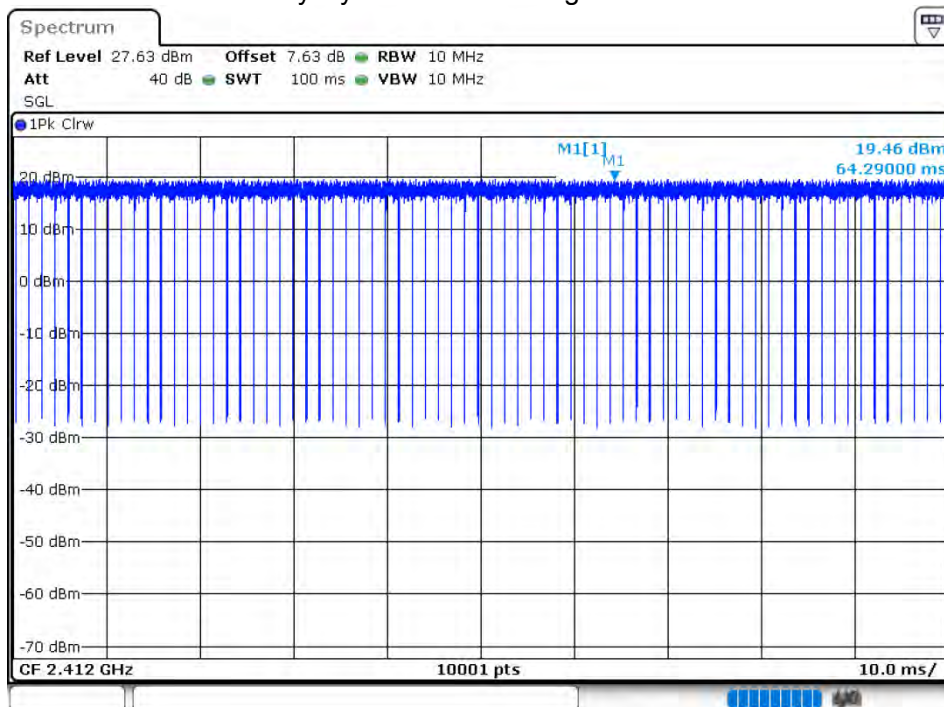


### Duty Cycle NVNT 802.11g 2437MHz

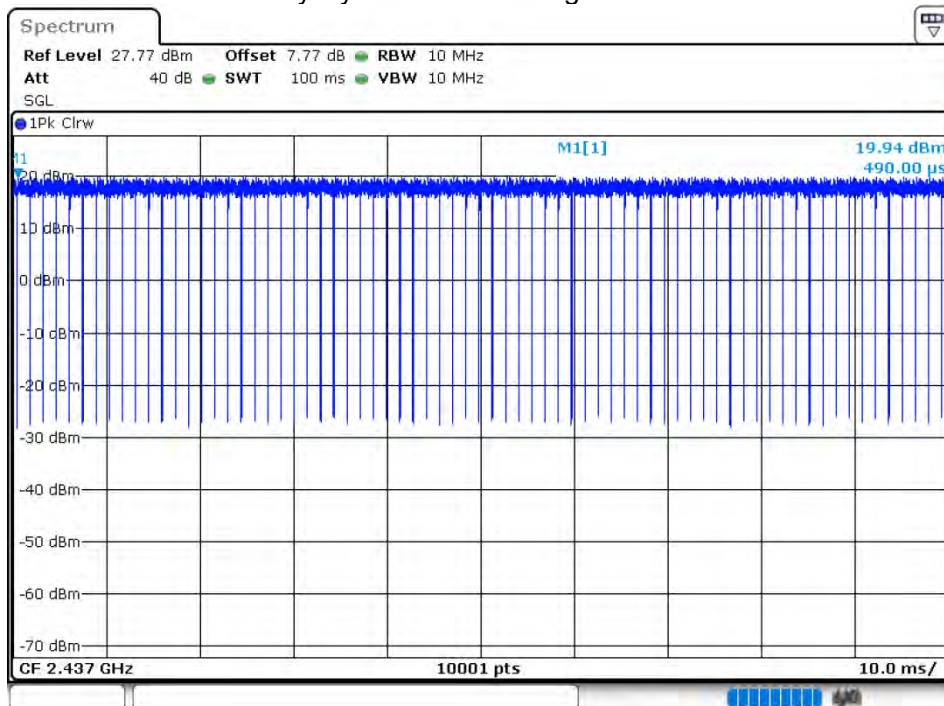


### Duty Cycle NVNT 802.11g 2462MHz

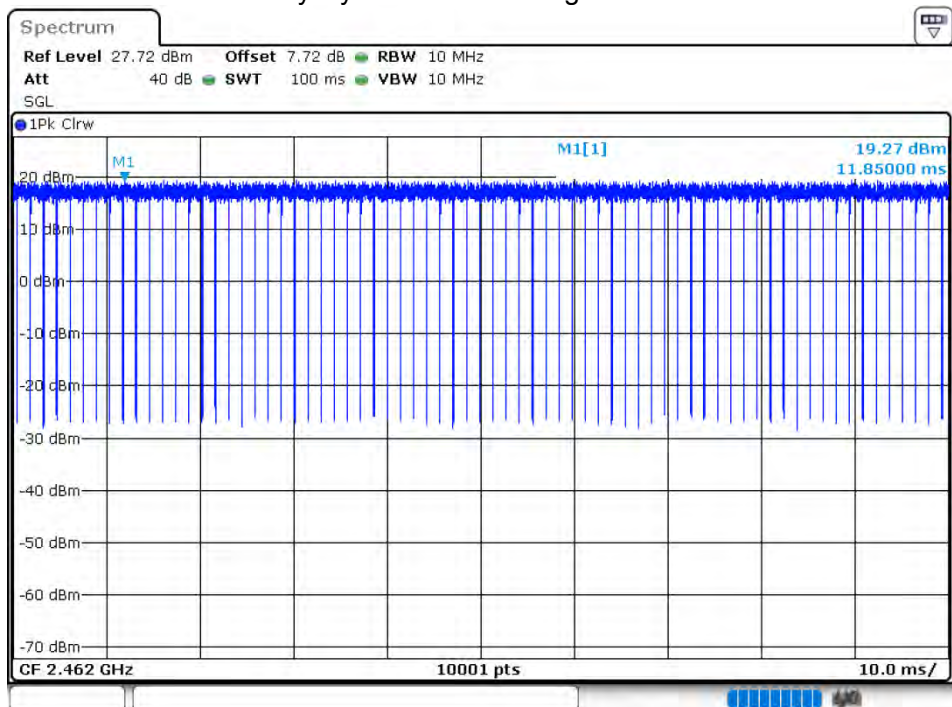


### Duty Cycle NVNT 802.11n(HT20) 2412MHz

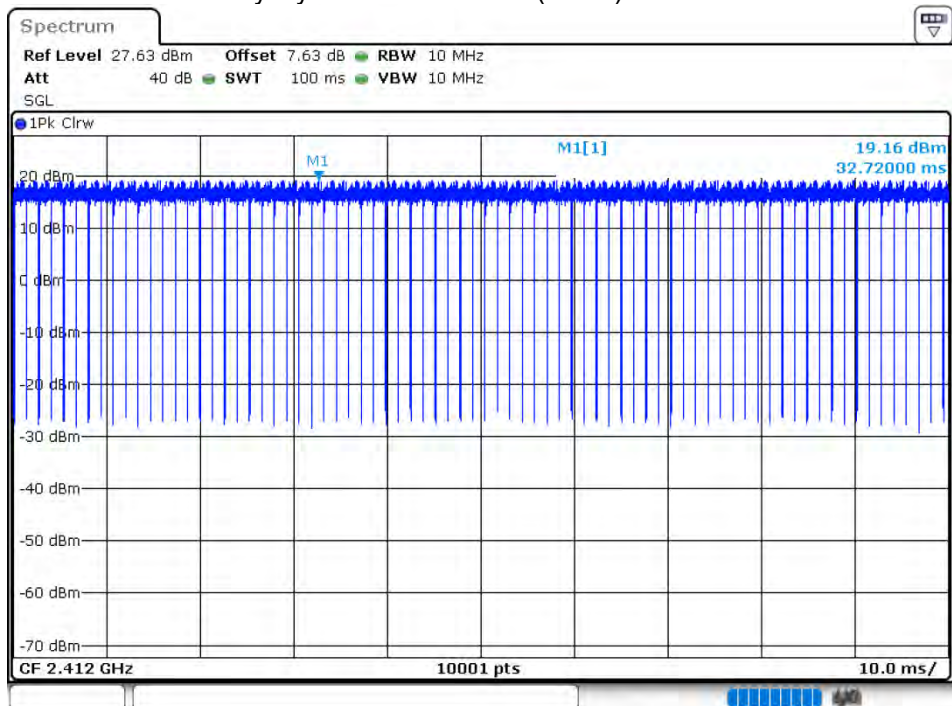


### Duty Cycle NVNT 802.11n(HT20) 2437MHz

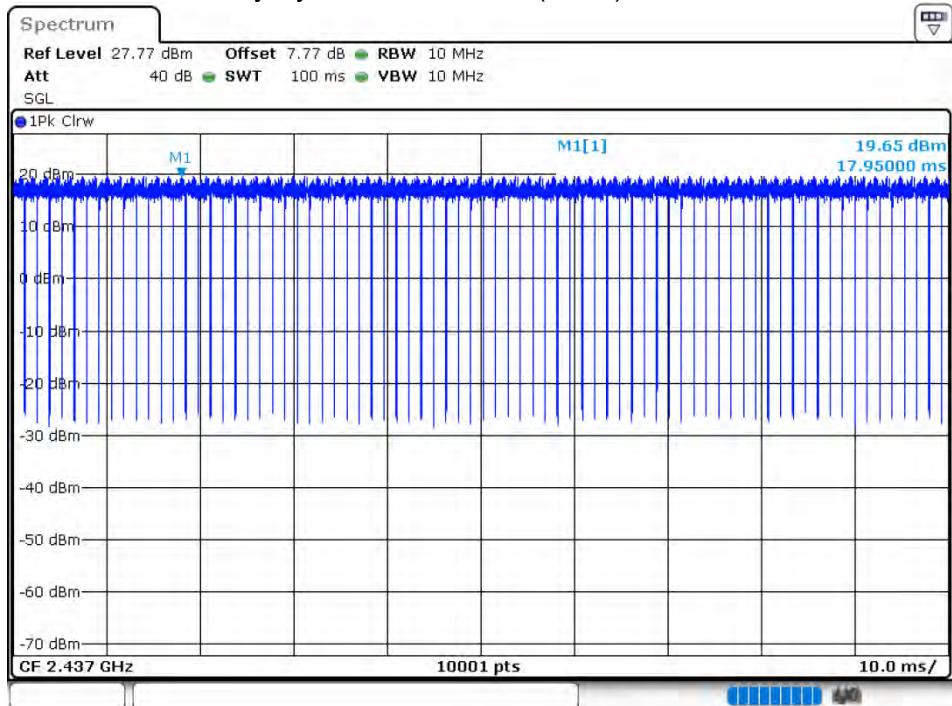


### Duty Cycle NVNT 802.11n(HT20) 2462MHz

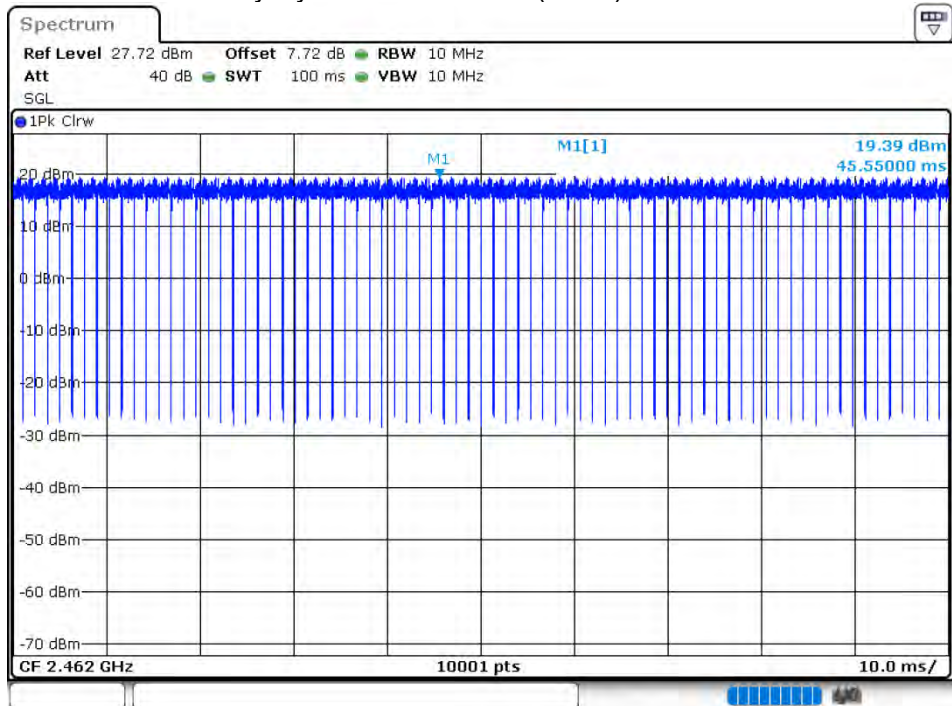


### Duty Cycle NVNT 802.11n(HT40) 2422MHz

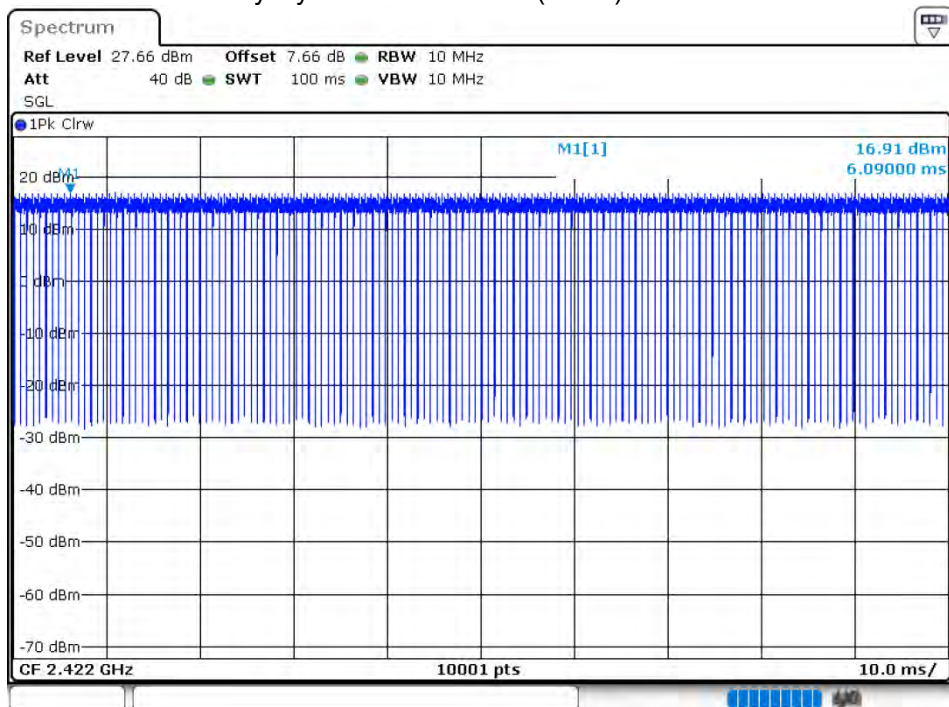

### Duty Cycle NVNT 802.11n(HT40) 2437MHz

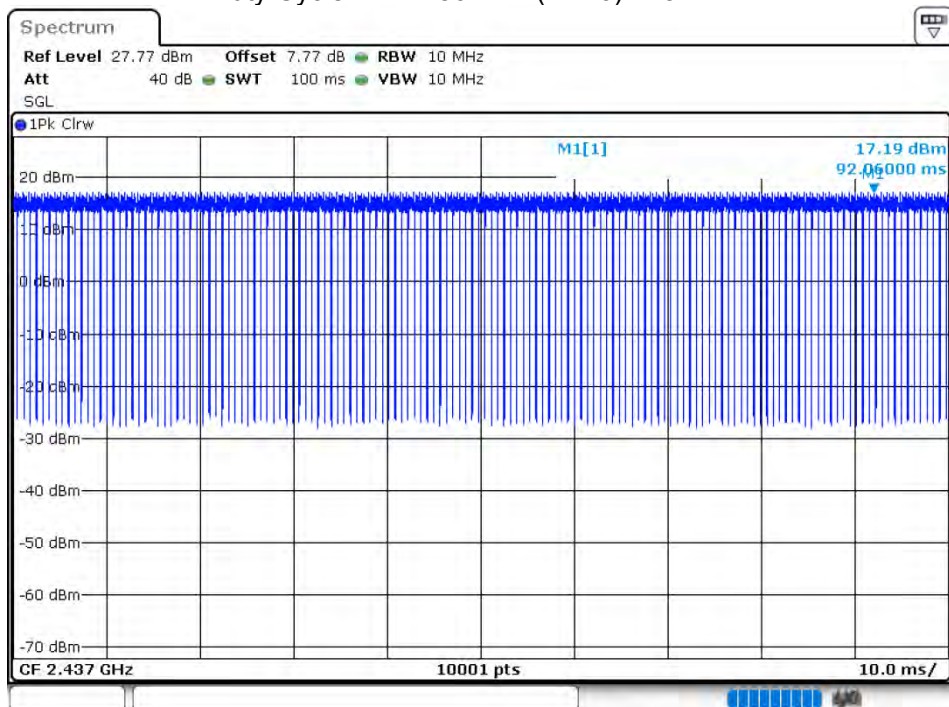

### Duty Cycle NVNT 802.11n(HT40) 2452MHz

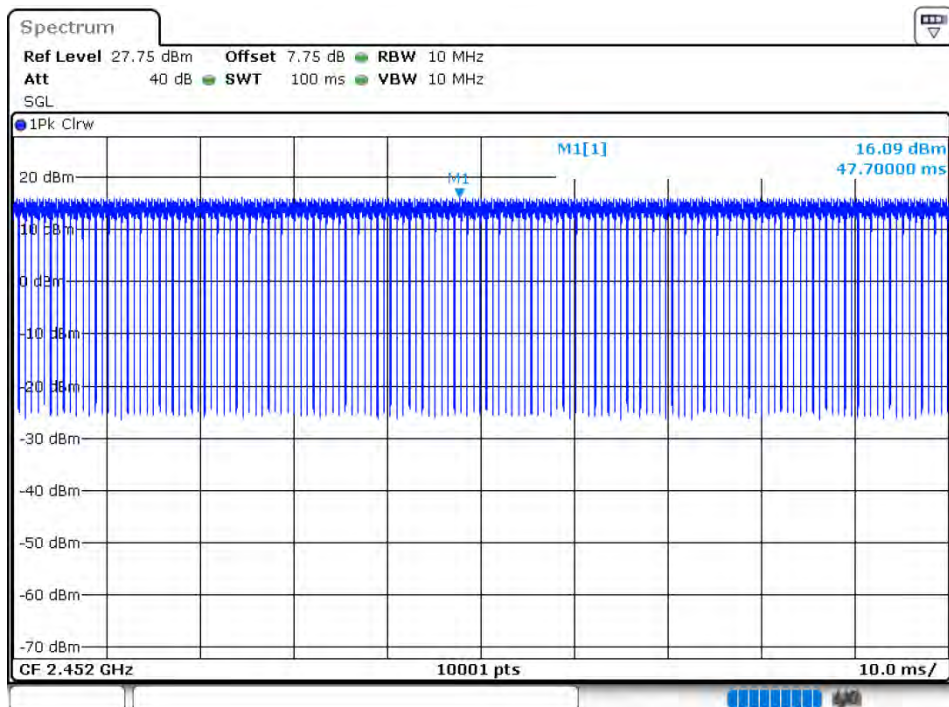


### 8.1.2 MAXIMUM CONDUCTED OUTPUT POWER

| Condition | Mode          | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|---------------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | 802.11b       | 2412            | Ant 1   | 14.41                 | 30          | Pass    |
| NVNT      | 802.11b       | 2437            | Ant 1   | 14.65                 | 30          | Pass    |
| NVNT      | 802.11b       | 2462            | Ant 1   | 14.51                 | 30          | Pass    |
| NVNT      | 802.11g       | 2412            | Ant 1   | 13.23                 | 30          | Pass    |
| NVNT      | 802.11g       | 2437            | Ant 1   | 13.19                 | 30          | Pass    |
| NVNT      | 802.11g       | 2456            | Ant 1   | 13.31                 | 30          | Pass    |
| NVNT      | 802.11n(HT20) | 2412            | Ant 1   | 13.21                 | 30          | Pass    |
| NVNT      | 802.11n(HT20) | 2437            | Ant 1   | 13.11                 | 30          | Pass    |
| NVNT      | 802.11n(HT20) | 2462            | Ant 1   | 13.29                 | 30          | Pass    |
| NVNT      | 802.11n(HT40) | 2422            | Ant 1   | 12.98                 | 30          | Pass    |
| NVNT      | 802.11n(HT40) | 2437            | Ant 1   | 12.56                 | 30          | Pass    |
| NVNT      | 802.11n(HT40) | 2452            | Ant 1   | 12.46                 | 30          | Pass    |


### 8.1.3 OCCUPIED CHANNEL BANDWIDTH

| Condition | Mode          | Frequency (MHz) | Antenna | 99% OBW (MHz) | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|---------------|-----------------|---------|---------------|-----------------------|-----------------------------|---------|
| NVNT      | 802.11b       | 2412            | Ant 1   | 13.1868       | 9.56                  | 0.5                         | Pass    |
| NVNT      | 802.11b       | 2437            | Ant 1   | 13.1469       | 10.04                 | 0.5                         | Pass    |
| NVNT      | 802.11b       | 2462            | Ant 1   | 13.1469       | 9.6                   | 0.5                         | Pass    |
| NVNT      | 802.11g       | 2412            | Ant 1   | 17.1029       | 15.72                 | 0.5                         | Pass    |
| NVNT      | 802.11g       | 2437            | Ant 1   | 17.0629       | 16.32                 | 0.5                         | Pass    |
| NVNT      | 802.11g       | 2462            | Ant 1   | 17.4226       | 16.36                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT20) | 2412            | Ant 1   | 18.0619       | 16.32                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT20) | 2437            | Ant 1   | 17.9021       | 16.08                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT20) | 2462            | Ant 1   | 18.022        | 16.36                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT40) | 2422            | Ant 1   | 36.6034       | 31.76                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT40) | 2437            | Ant 1   | 37.4026       | 35.36                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT40) | 2452            | Ant 1   | 37.0829       | 23.28                 | 0.5                         | Pass    |


OBW NVNT 802.11b 2412MHz Ant1

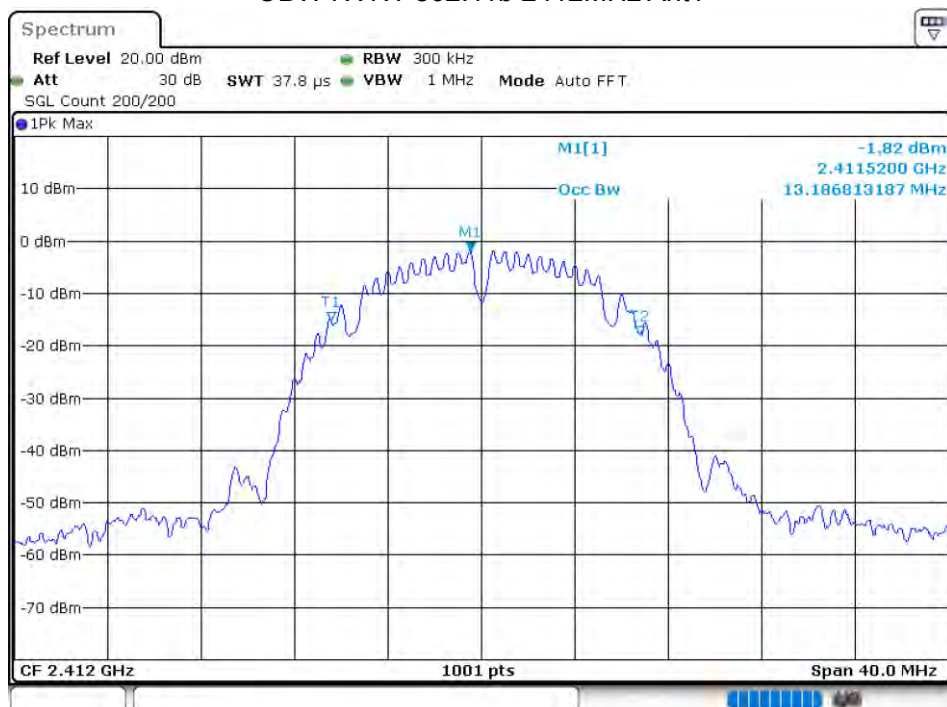


-6 dB BW NVNT 802.11b 2412MHz Ant1

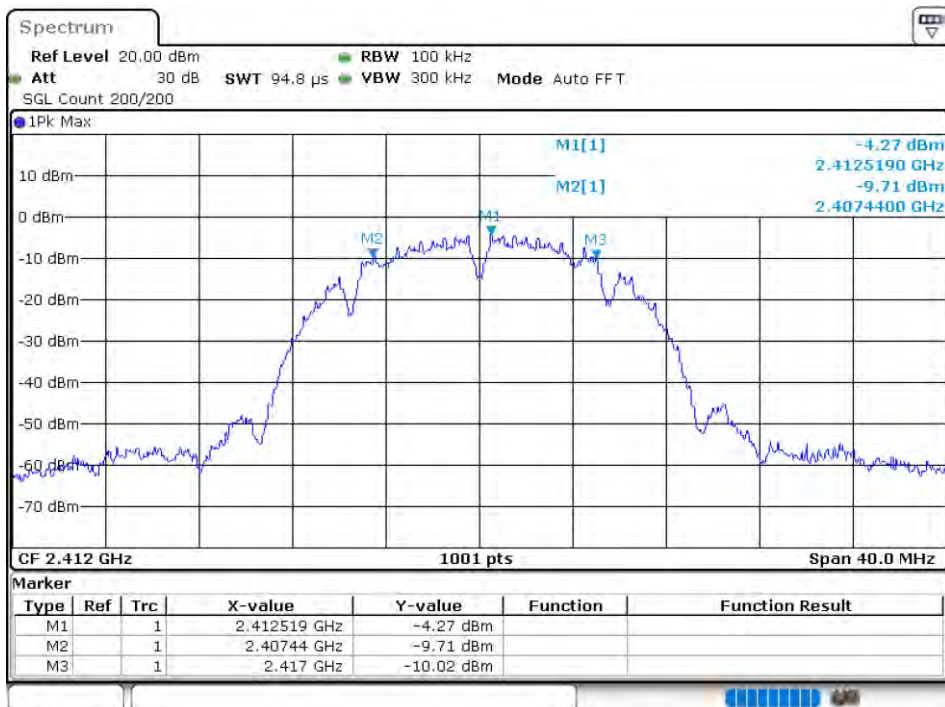


OBW NVNT 802.11b 2437MHz Ant1

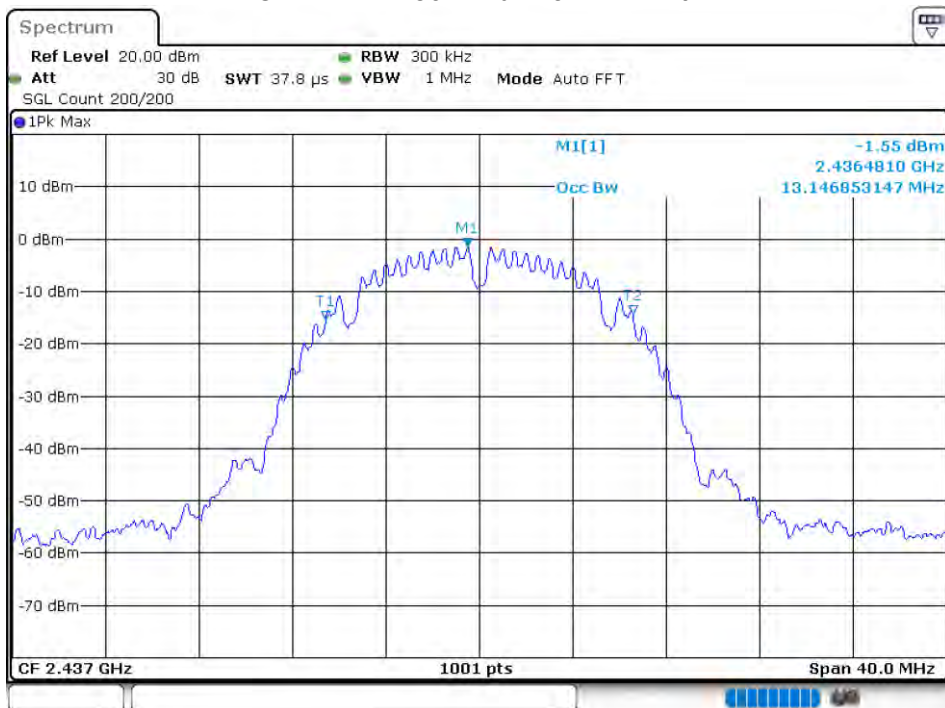


-6 dB BW NVNT 802.11b 2437MHz Ant1

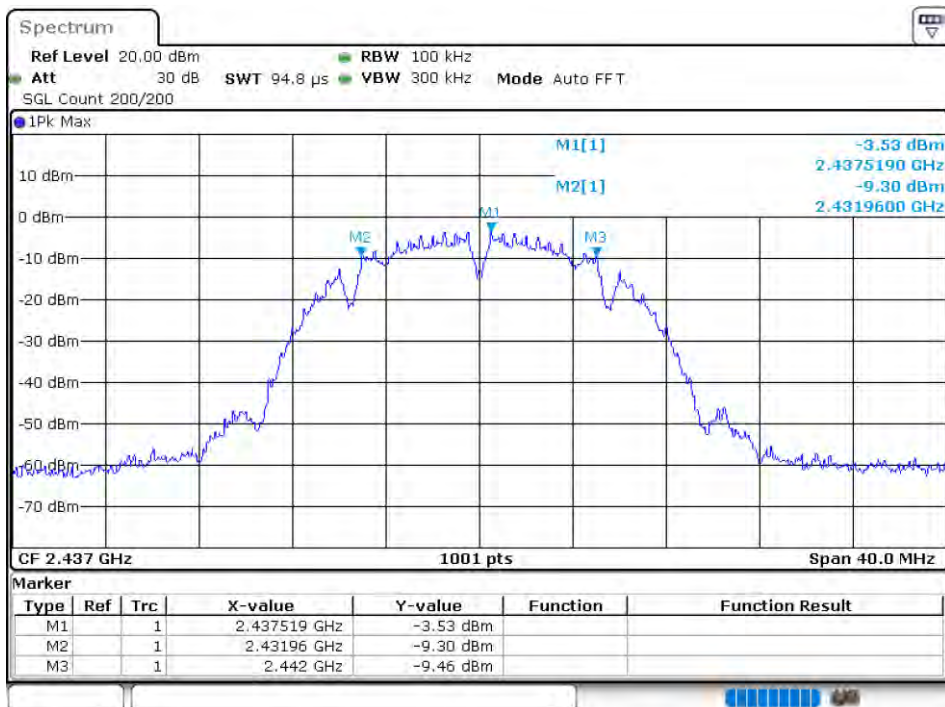

OBW NVNT 802.11b 2462MHz Ant1

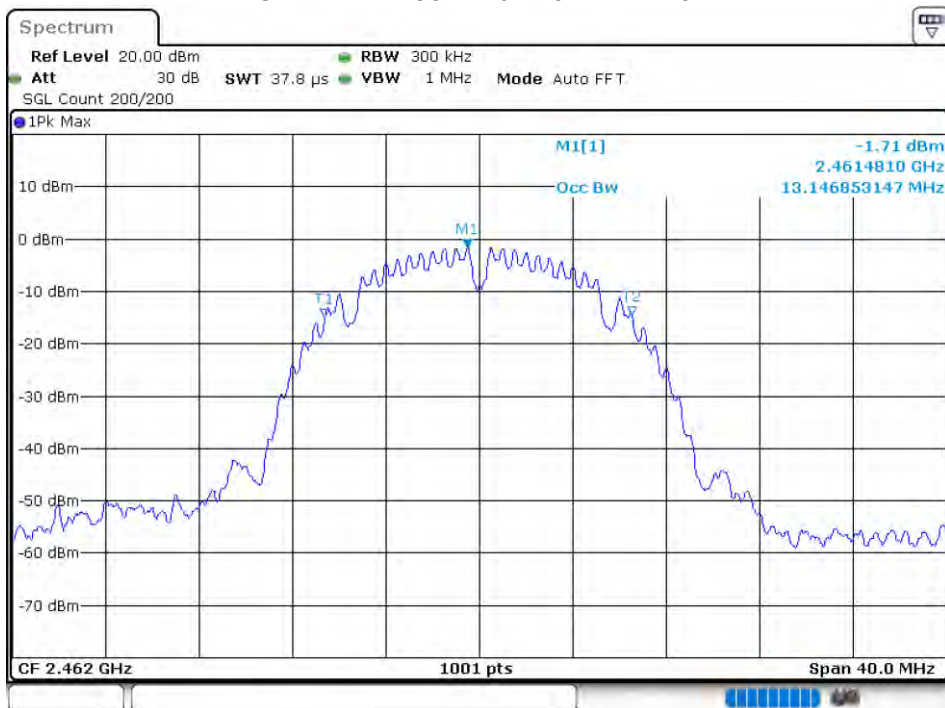


### -6 dB BW NVNT 802.11b 2462MHz Ant1

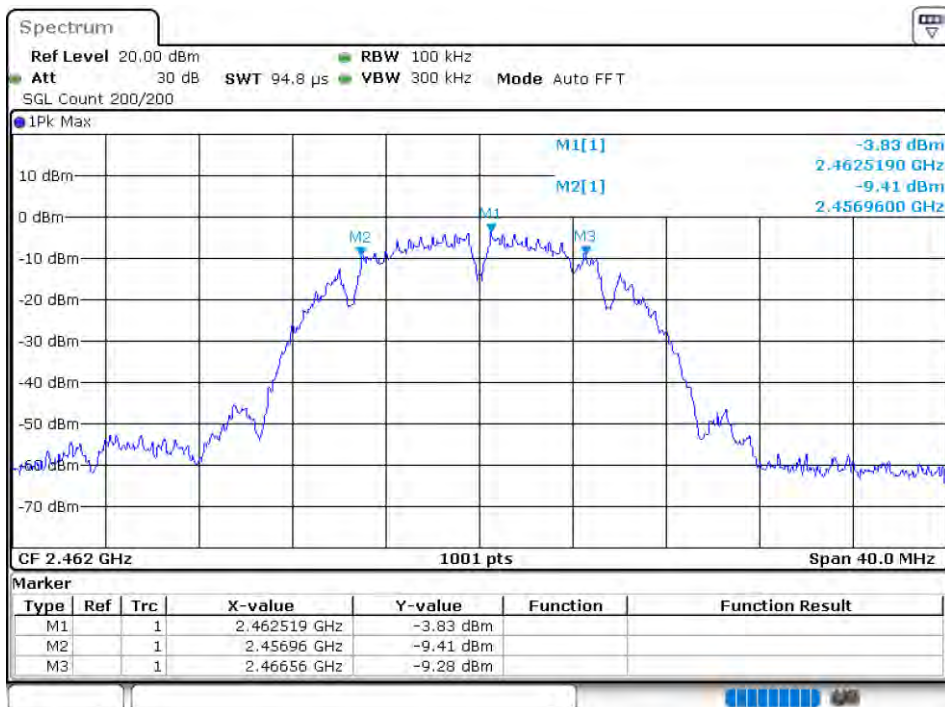


### OBW NVNT 802.11g 2412MHz Ant1




-6 dB BW NVNT 802.11g 2412MHz Ant1

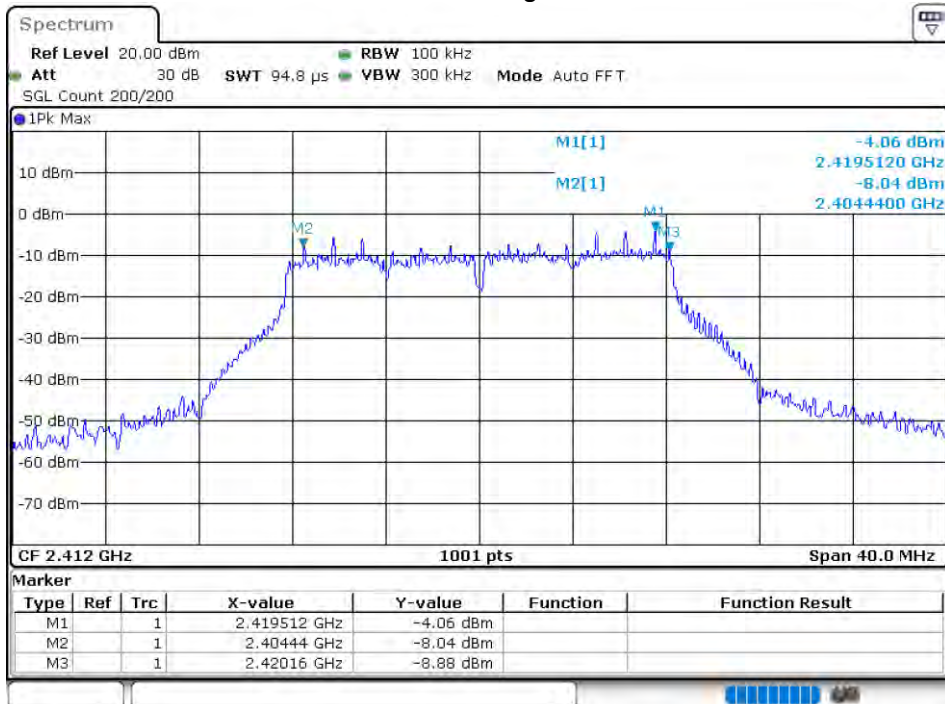

OBW NVNT 802.11g 2437MHz Ant1

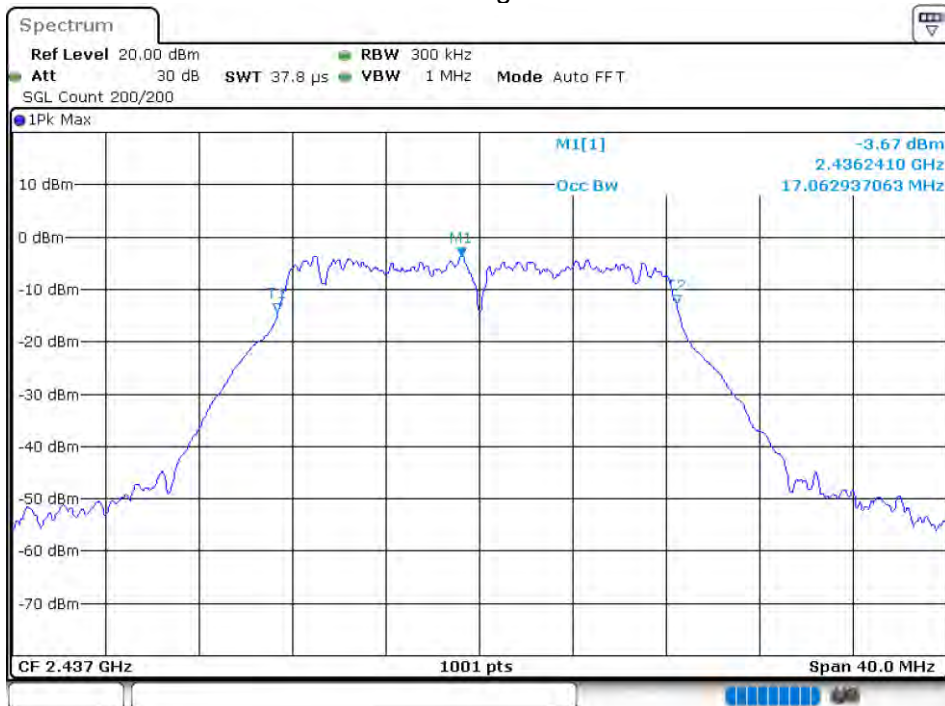


### -6 dB BW NVNT 802.11g 2437MHz Ant1

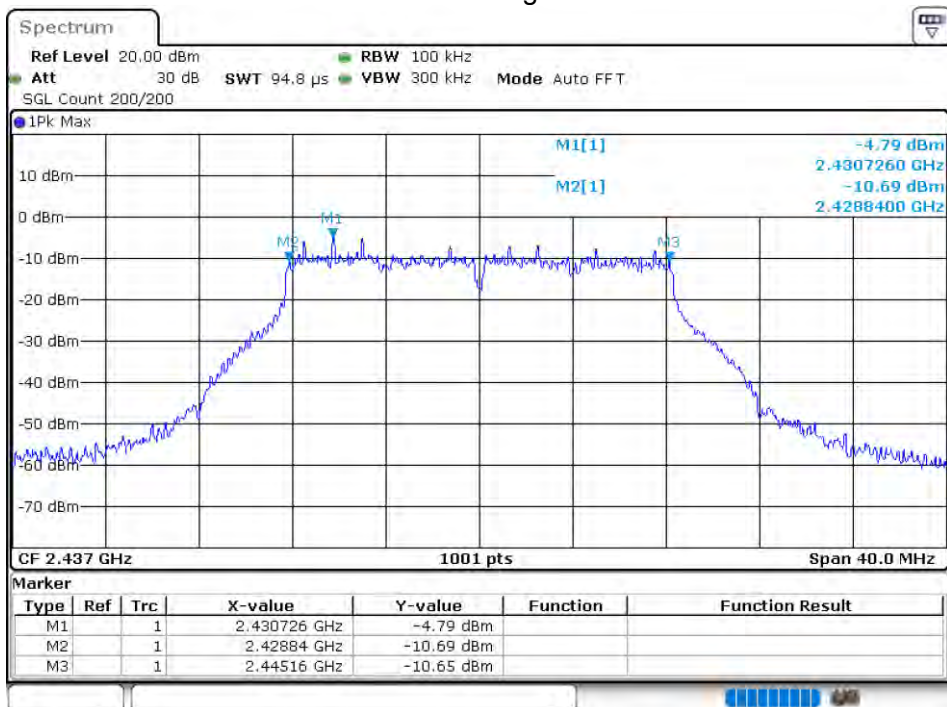

### OBW NVNT 802.11g 2462MHz Ant1




### -6 dB BW NVNT 802.11g 2462MHz Ant1

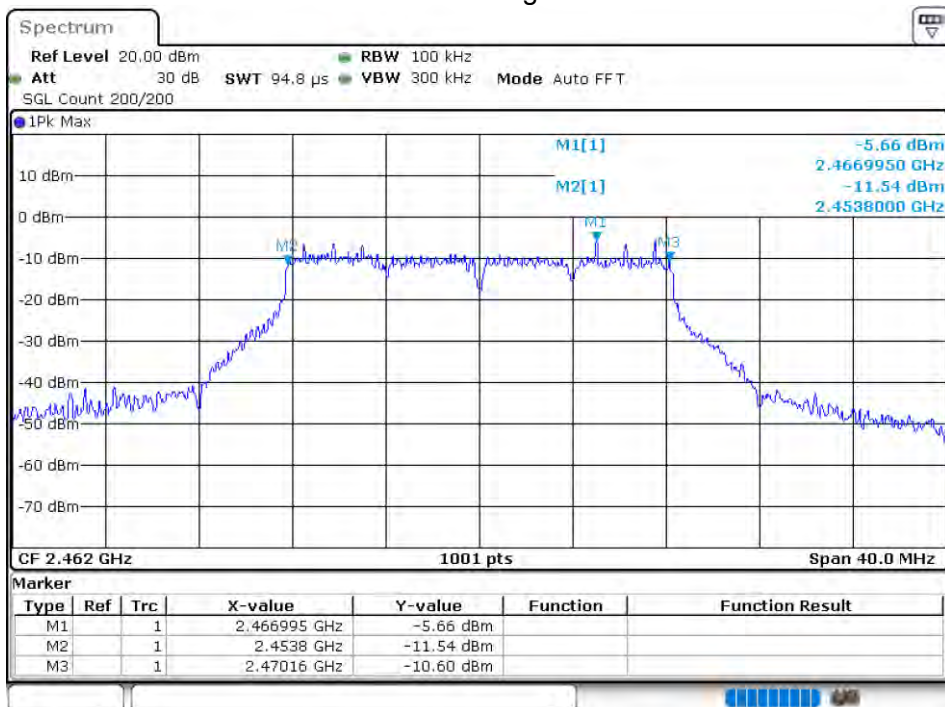


### OBW NVNT 802.11n(HT20) 2412MHz Ant1




-6 dB BW NVNT 802.11n(HT20) 2412MHz Ant1

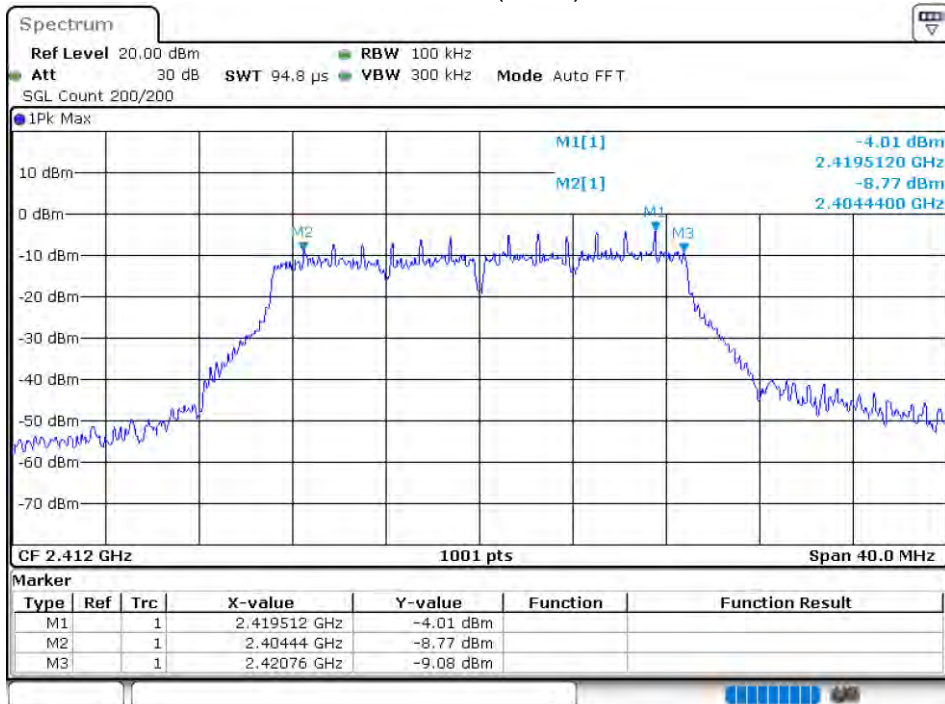

OBW NVNT 802.11n(HT20) 2437MHz Ant1

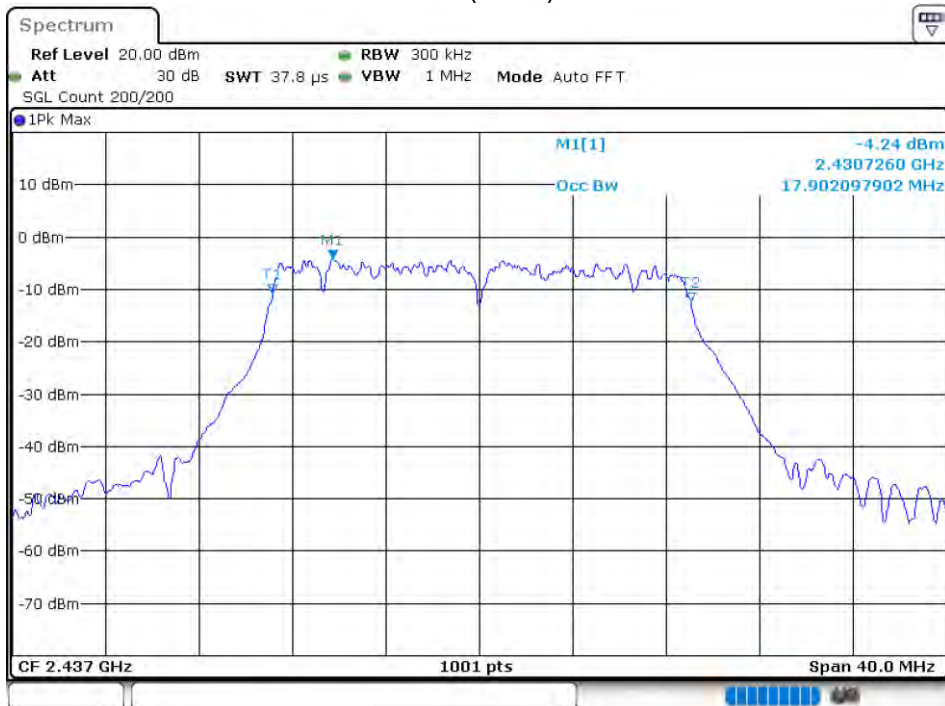


-6 dB BW NVNT 802.11n(HT20) 2437MHz Ant1

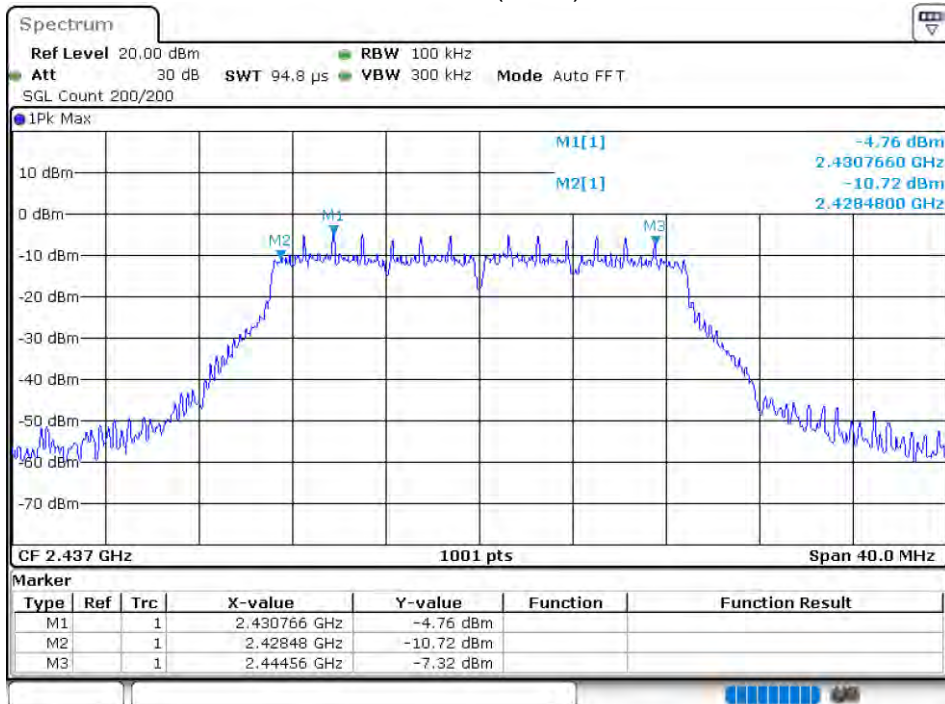


OBW NVNT 802.11n(HT20) 2462MHz Ant1




### -6 dB BW NVNT 802.11n(HT20) 2462MHz Ant1

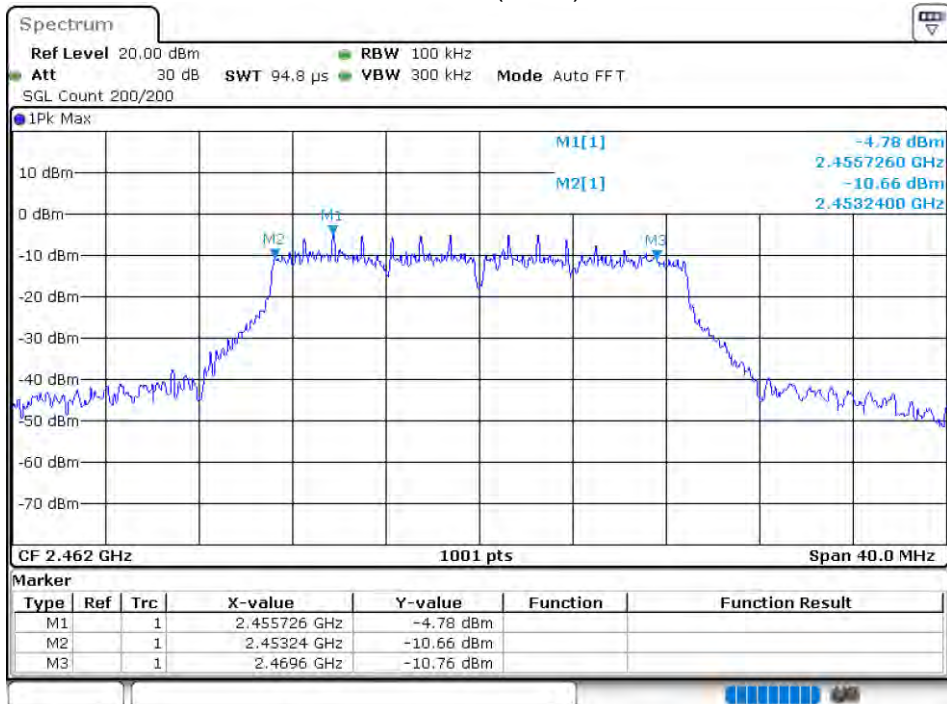


### OBW NVNT 802.11n(HT40) 2422MHz Ant1

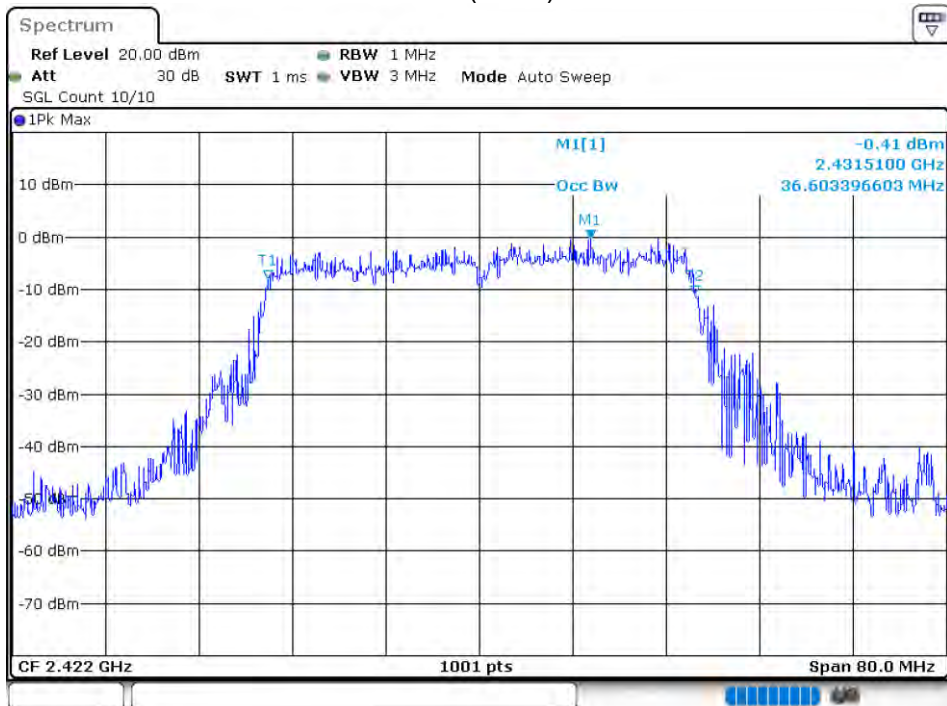


-6 dB BW NVNT 802.11n(HT40) 2422MHz Ant1

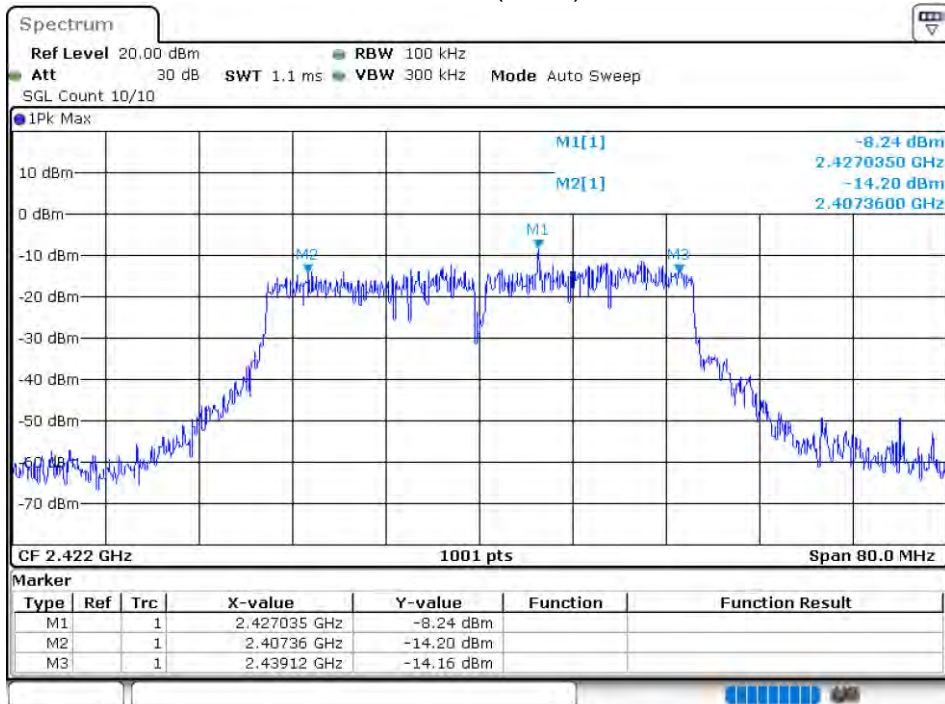


OBW NVNT 802.11n(HT40) 2437MHz Ant1

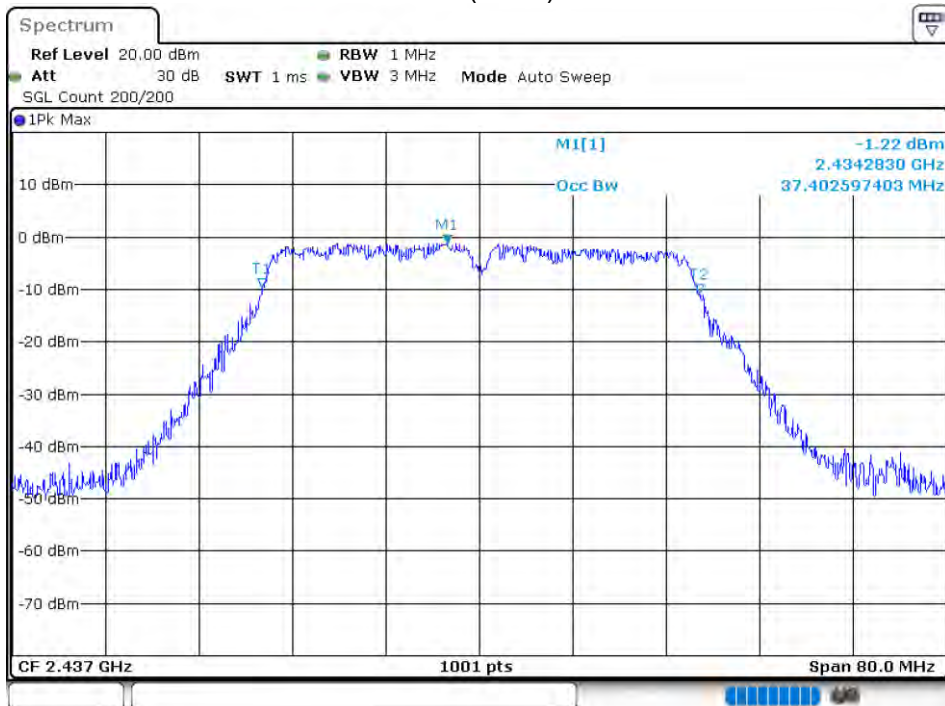


-6 dB BW NVNT 802.11n(HT40) 2437MHz Ant1

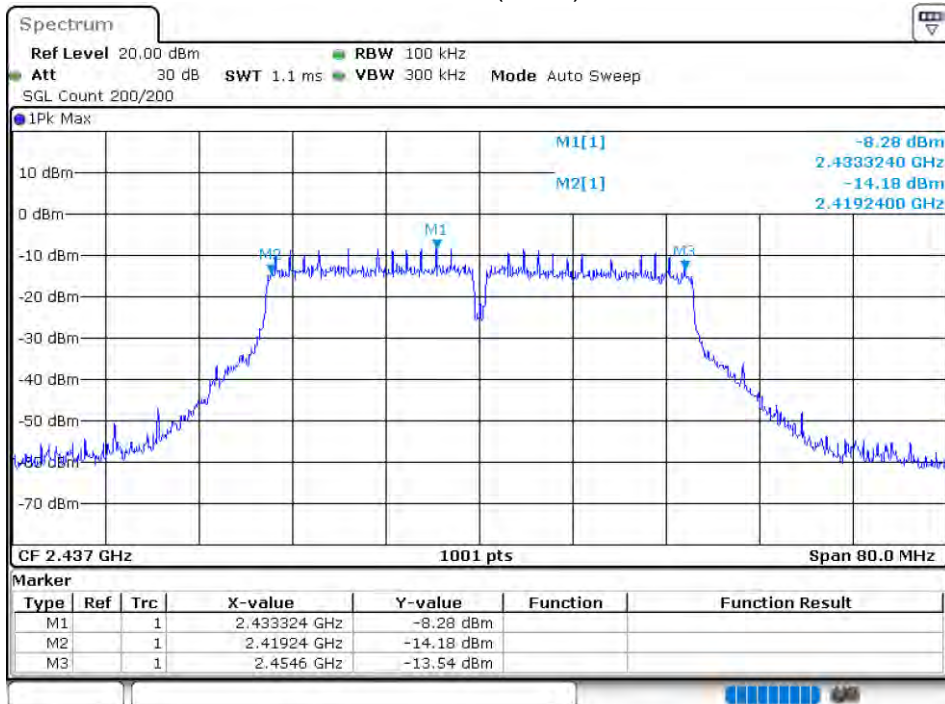

OBW NVNT 802.11n(HT40) 2452MHz Ant1

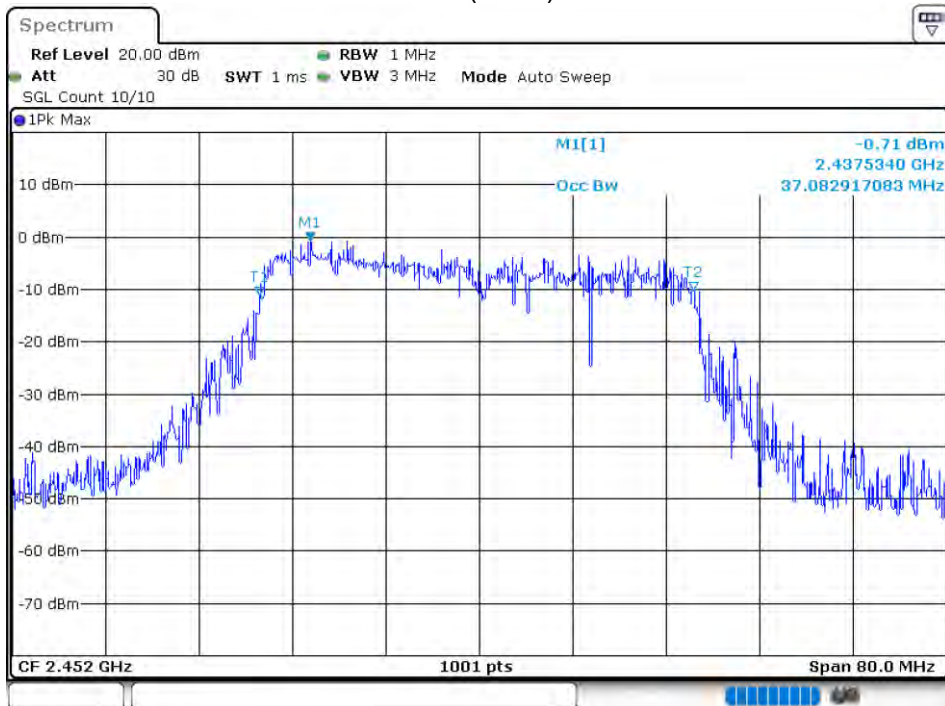


-6 dB BW NVNT 802.11n(HT40) 2452MHz Ant1

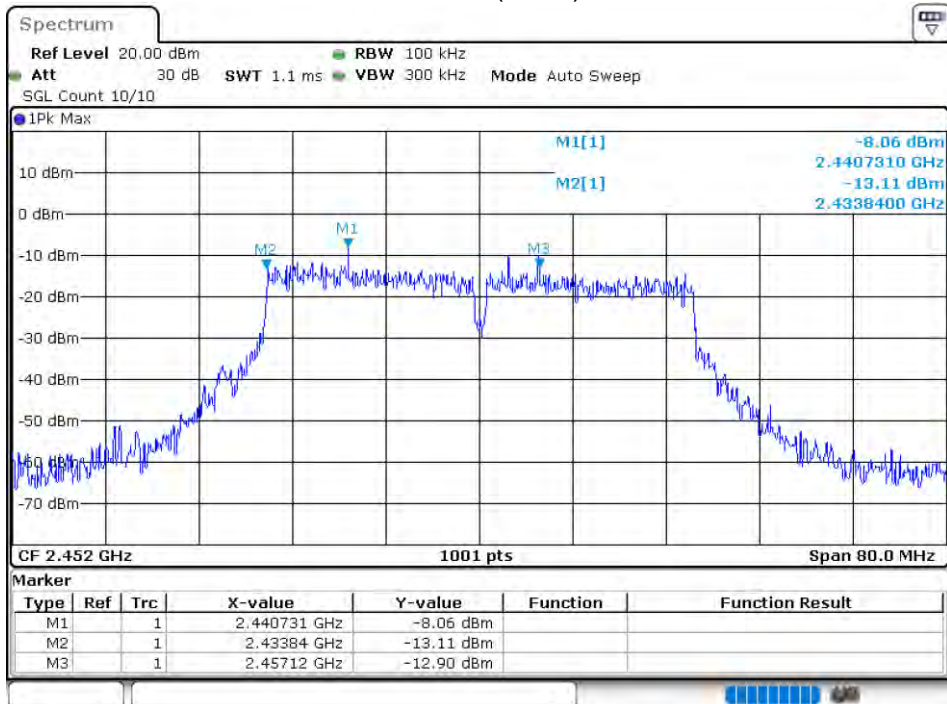


#### 8.1.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

| Condition | Mode          | Frequency (MHz) | Antenna | Max PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|---------------|-----------------|---------|--------------------|------------------|---------|
| NVNT      | 802.11b       | 2412            | Ant 1   | -8.225             | 8                | Pass    |
| NVNT      | 802.11b       | 2437            | Ant 1   | -7.83              | 8                | Pass    |
| NVNT      | 802.11b       | 2462            | Ant 1   | -8.126             | 8                | Pass    |
| NVNT      | 802.11g       | 2412            | Ant 1   | -11.603            | 8                | Pass    |
| NVNT      | 802.11g       | 2437            | Ant 1   | -12.361            | 8                | Pass    |
| NVNT      | 802.11g       | 2462            | Ant 1   | -11.986            | 8                | Pass    |
| NVNT      | 802.11n(HT20) | 2412            | Ant 1   | -11.96             | 8                | Pass    |
| NVNT      | 802.11n(HT20) | 2437            | Ant 1   | -12.833            | 8                | Pass    |
| NVNT      | 802.11n(HT20) | 2462            | Ant 1   | -12.84             | 8                | Pass    |
| NVNT      | 802.11n(HT40) | 2422            | Ant 1   | -14.607            | 8                | Pass    |
| NVNT      | 802.11n(HT40) | 2437            | Ant 1   | -15.124            | 8                | Pass    |
| NVNT      | 802.11n(HT40) | 2452            | Ant 1   | -14.86             | 8                | Pass    |


PSD NVNT 802.11b 2412MHz Ant1

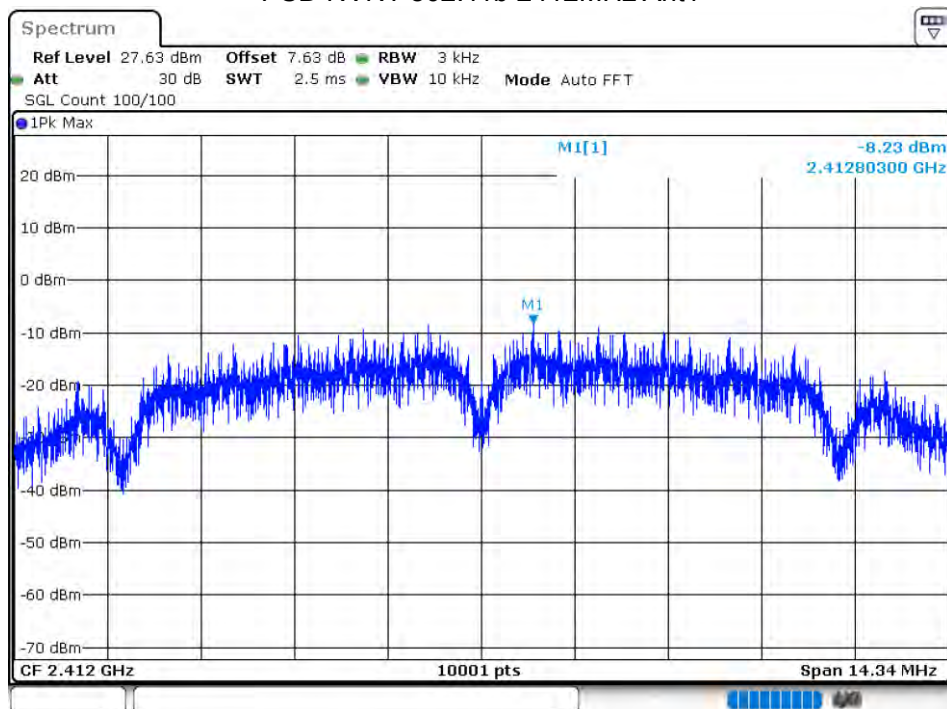


### PSD NVNT 802.11b 2437MHz Ant1

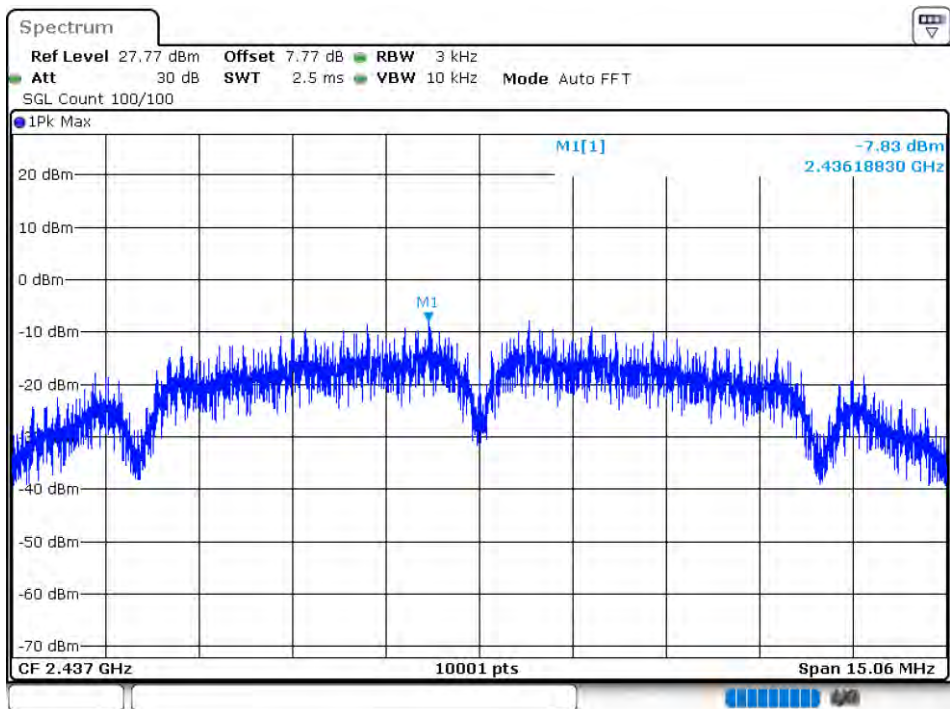


### PSD NVNT 802.11b 2462MHz Ant1

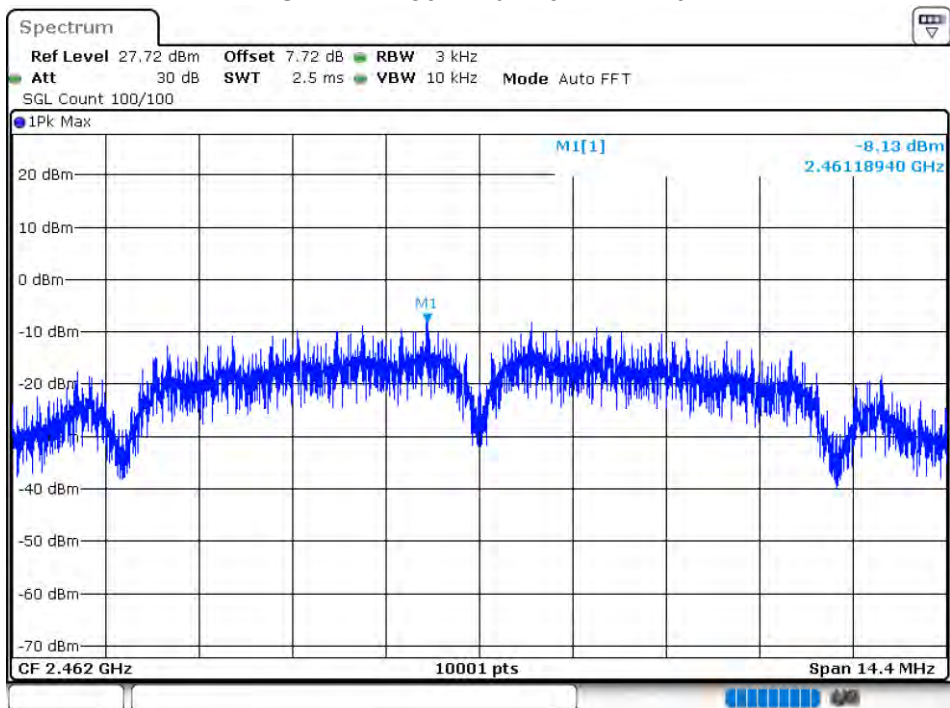


### PSD NVNT 802.11g 2412MHz Ant1

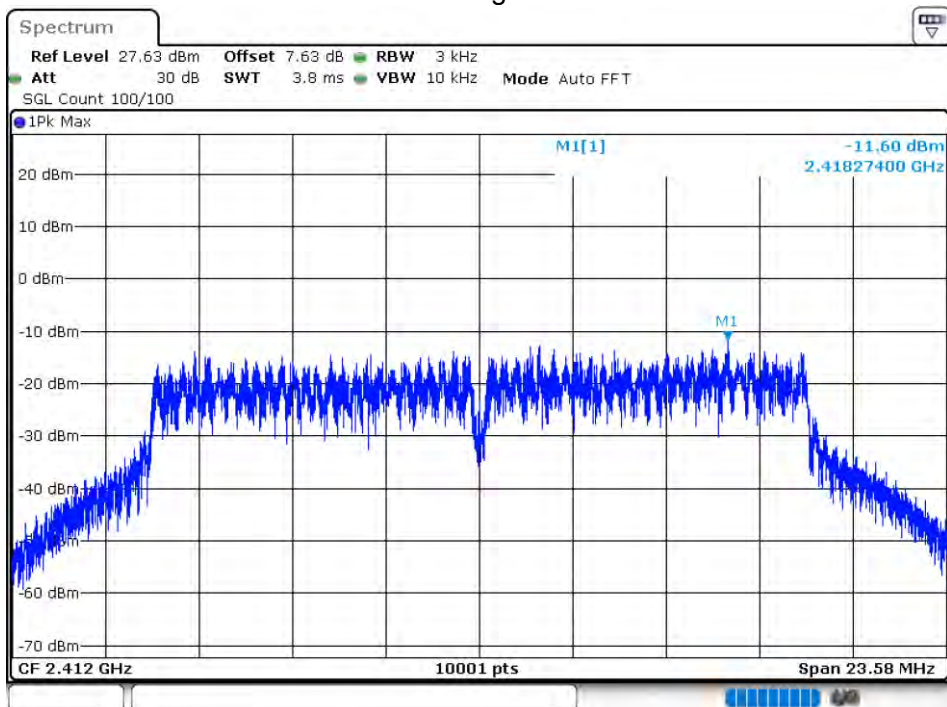


### PSD NVNT 802.11g 2437MHz Ant1

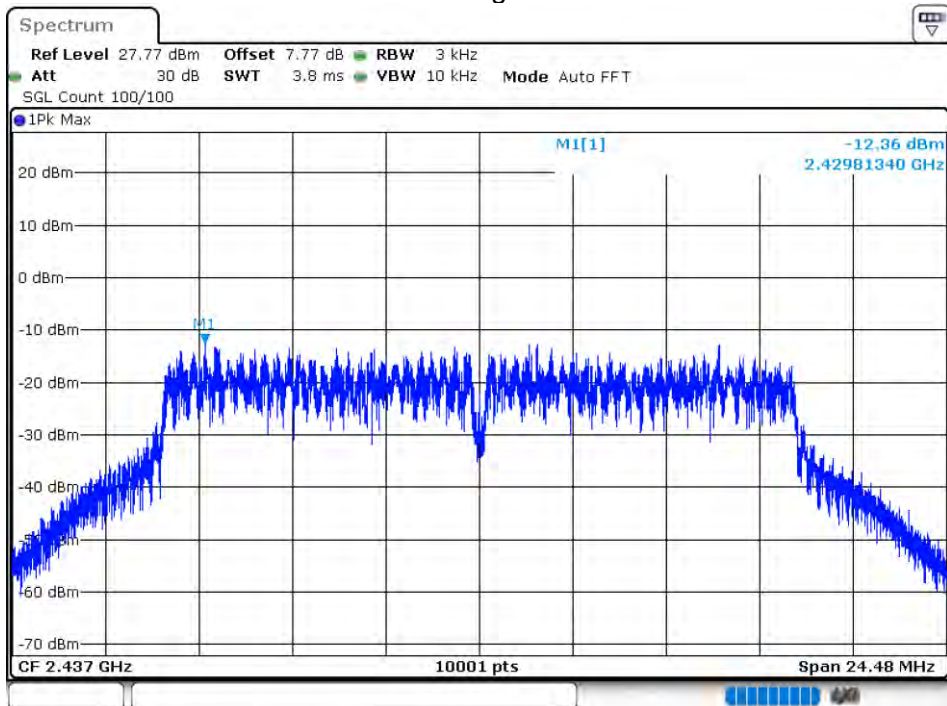


### PSD NVNT 802.11g 2462MHz Ant1

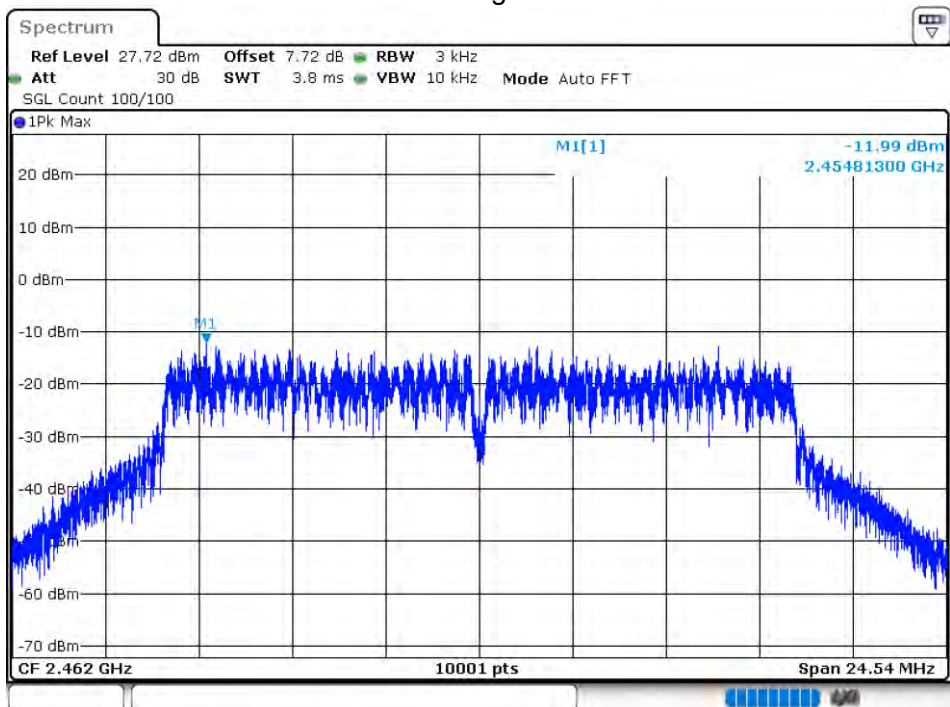


### PSD NVNT 802.11n(HT20) 2412MHz Ant1

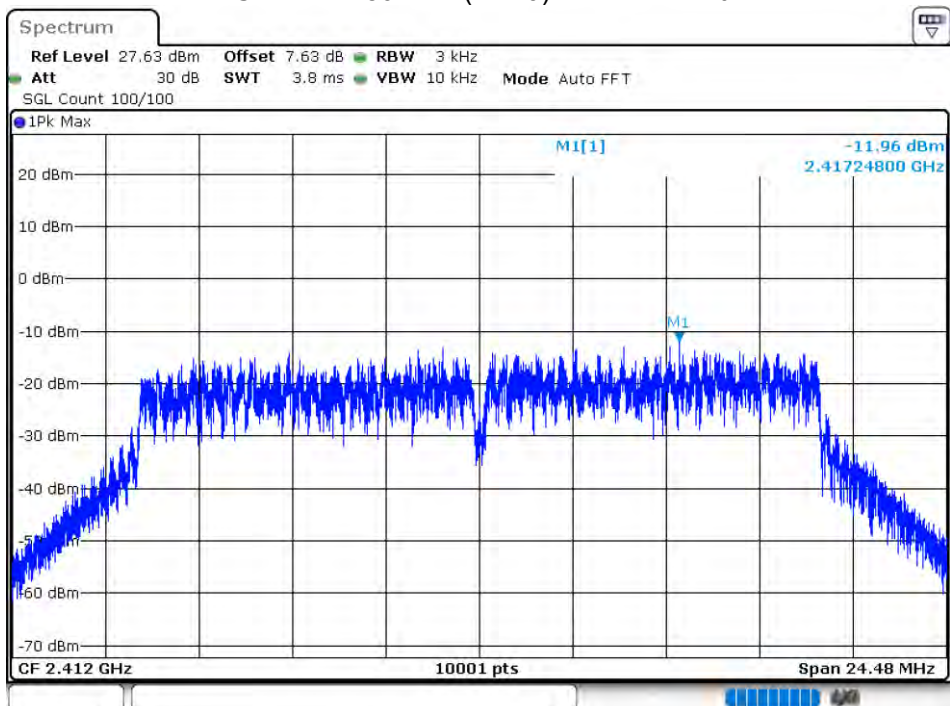


PSD NVNT 802.11n(HT20) 2437MHz Ant1

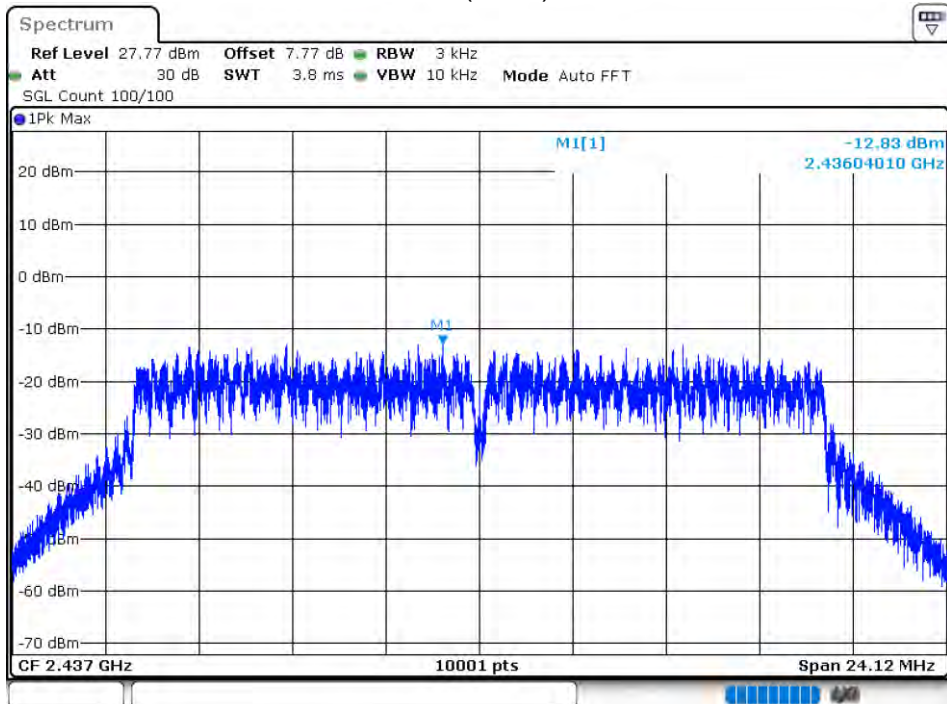


PSD NVNT 802.11n(HT20) 2462MHz Ant1

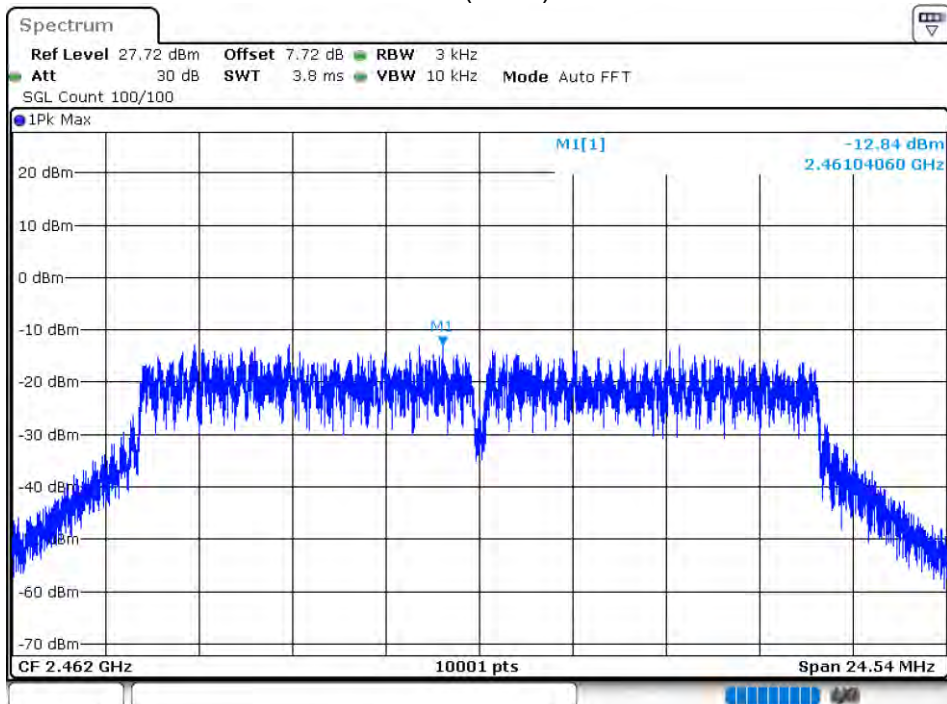


PSD NVNT 802.11n(HT40) 2422MHz Ant1

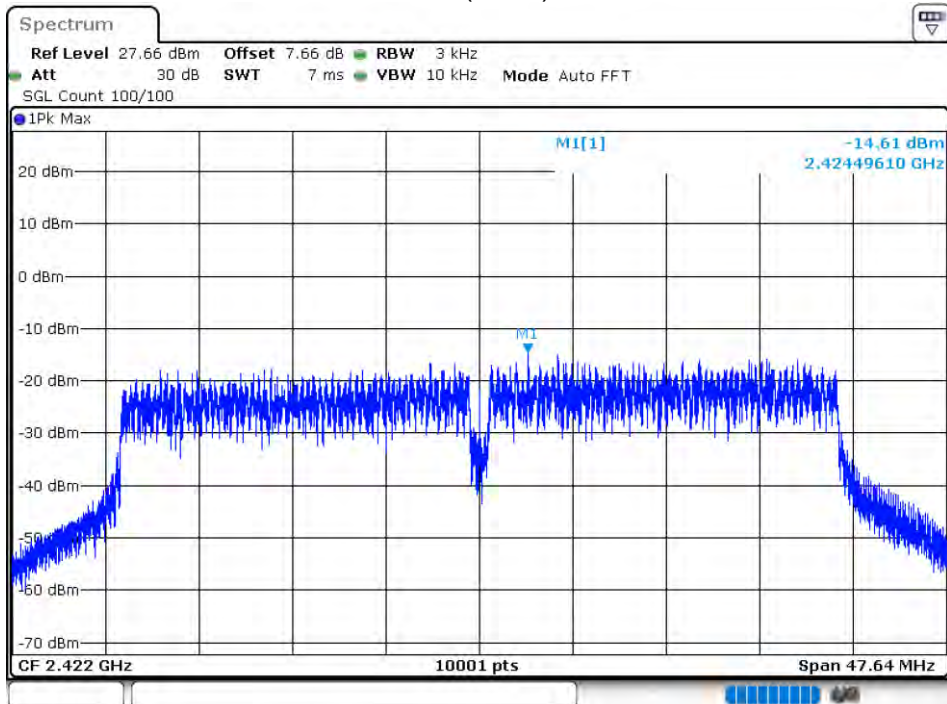

PSD NVNT 802.11n(HT40) 2437MHz Ant1

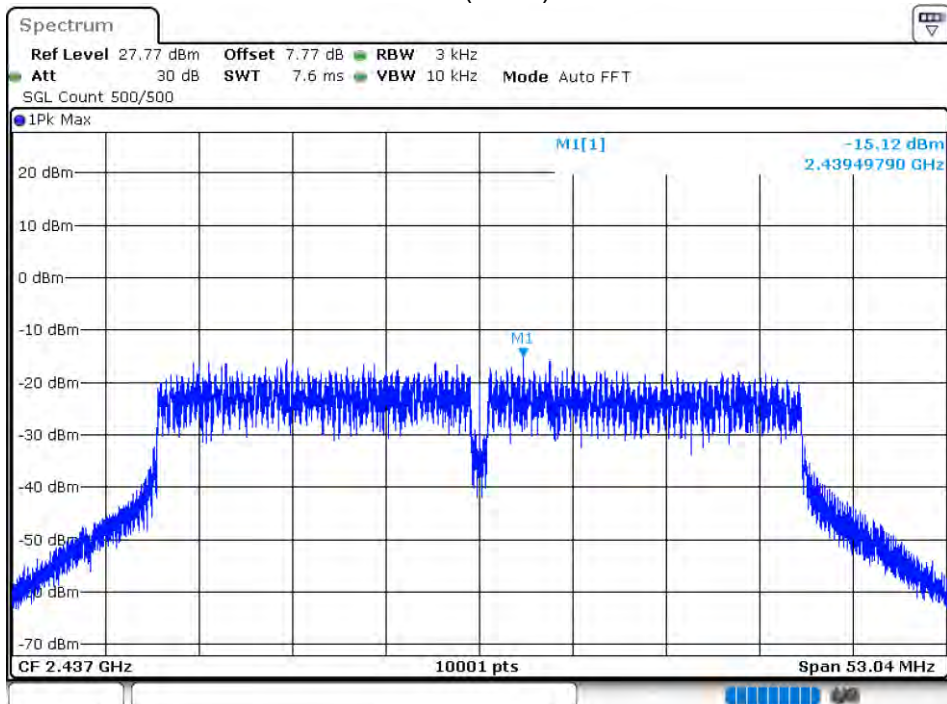

PSD NVNT 802.11n(HT40) 2452MHz Ant1

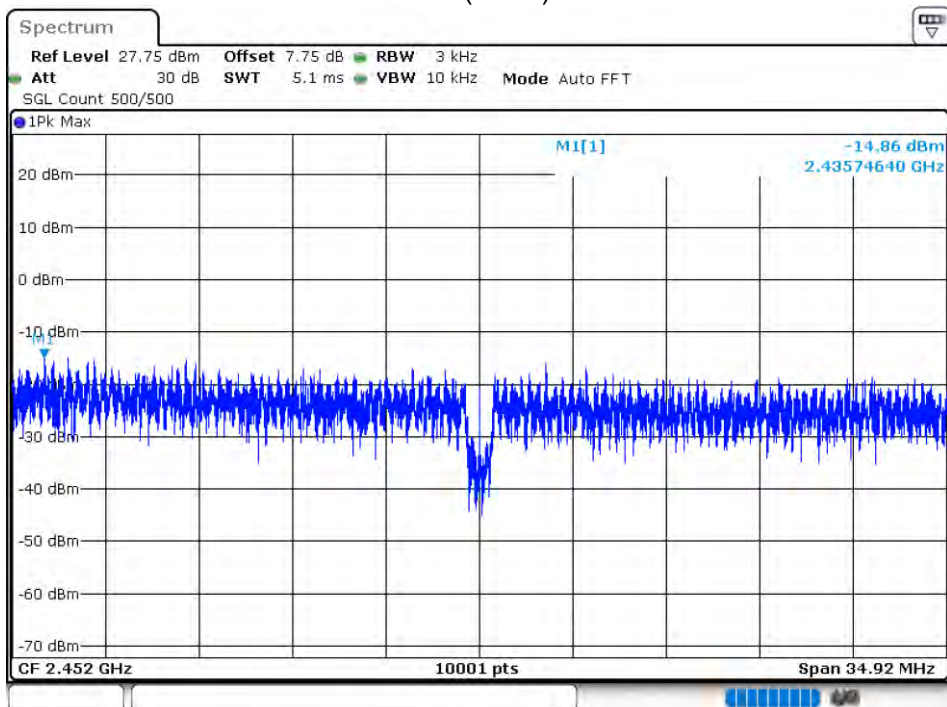


### 8.1.5 BAND EDGE

| Condition | Mode          | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|---------------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | 802.11b       | 2412            | Ant 1   | -54.48          | -20         | Pass    |
| NVNT      | 802.11b       | 2462            | Ant 1   | -56.08          | -20         | Pass    |
| NVNT      | 802.11g       | 2412            | Ant 1   | -49.36          | -20         | Pass    |
| NVNT      | 802.11g       | 2462            | Ant 1   | -44.28          | -20         | Pass    |
| NVNT      | 802.11n(HT20) | 2412            | Ant 1   | -47.33          | -20         | Pass    |
| NVNT      | 802.11n(HT20) | 2462            | Ant 1   | -43.73          | -20         | Pass    |
| NVNT      | 802.11n(HT40) | 2422            | Ant 1   | -45.4           | -20         | Pass    |
| NVNT      | 802.11n(HT40) | 2452            | Ant 1   | -48.53          | -20         | Pass    |

Band Edge NVNT 802.11b 2412MHz Ant1 Ref




### Band Edge NVNT 802.11b 2412MHz Ant1 Emission

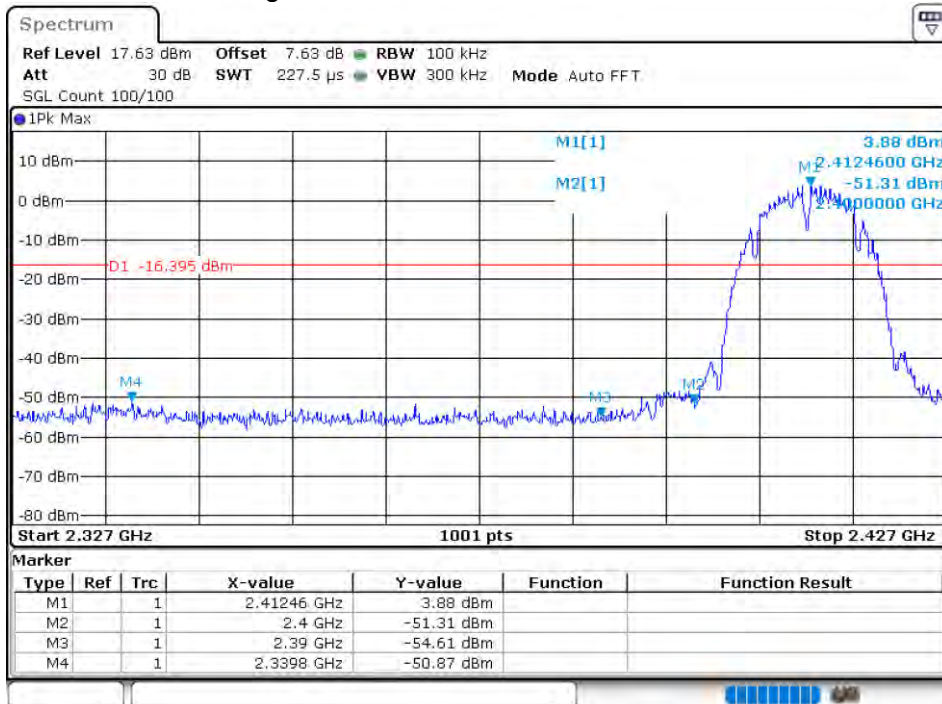


### Band Edge NVNT 802.11b 2462MHz Ant1 Ref




### Band Edge NVNT 802.11b 2462MHz Ant1 Emission

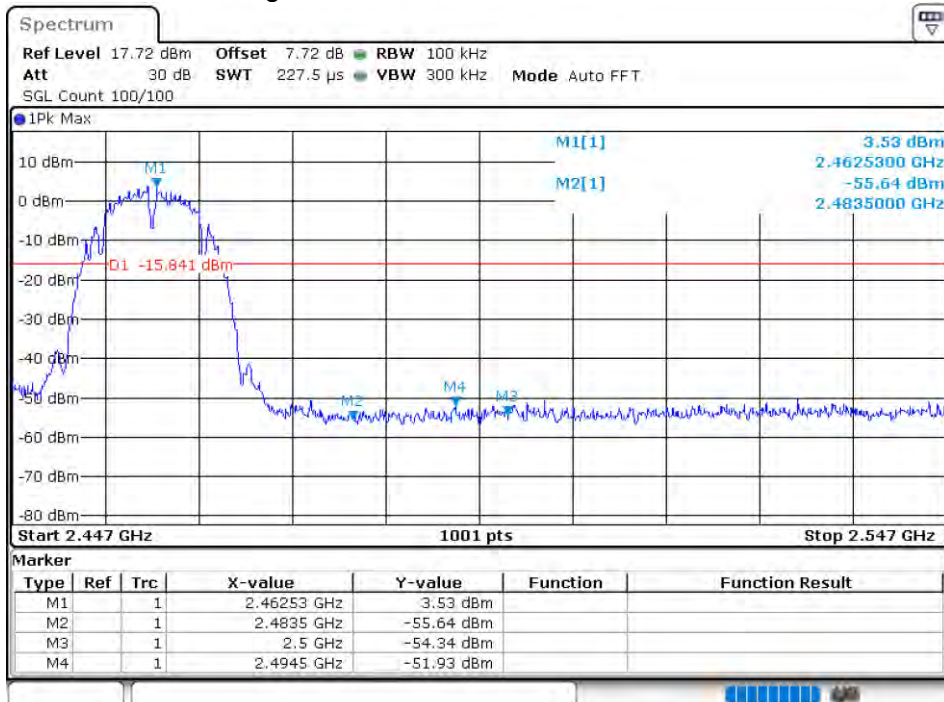


### Band Edge NVNT 802.11g 2412MHz Ant1 Ref

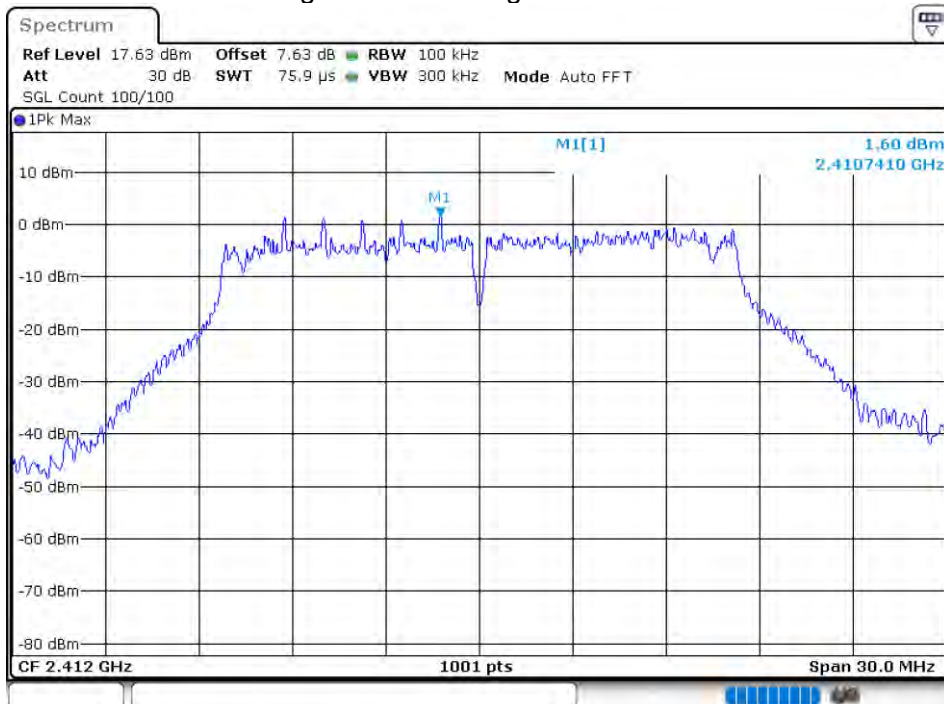


### Band Edge NVNT 802.11g 2412MHz Ant1 Emission

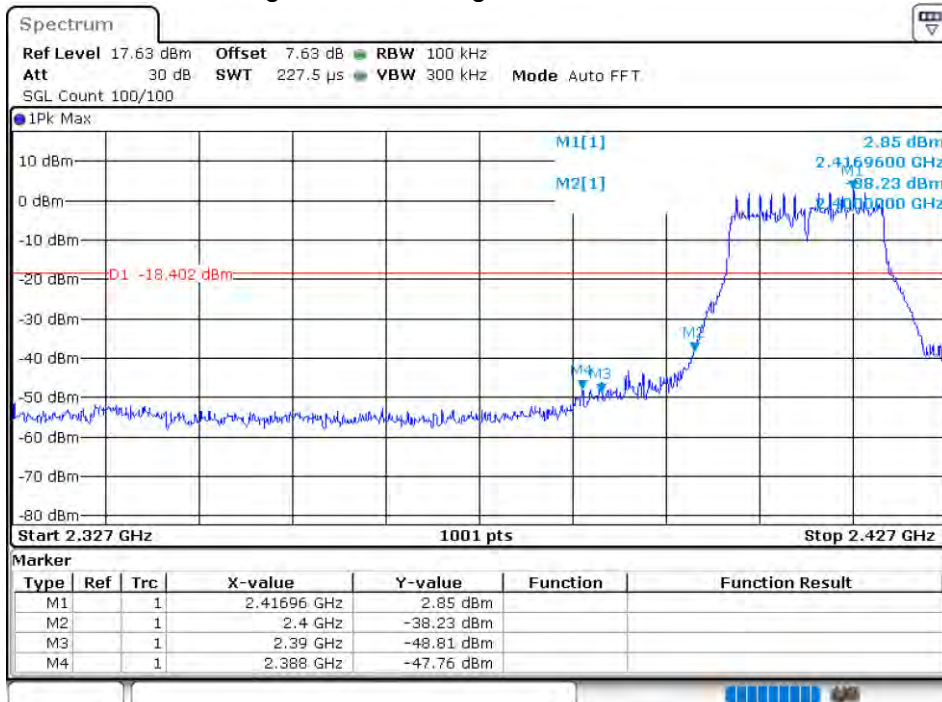


### Band Edge NVNT 802.11g 2462MHz Ant1 Ref

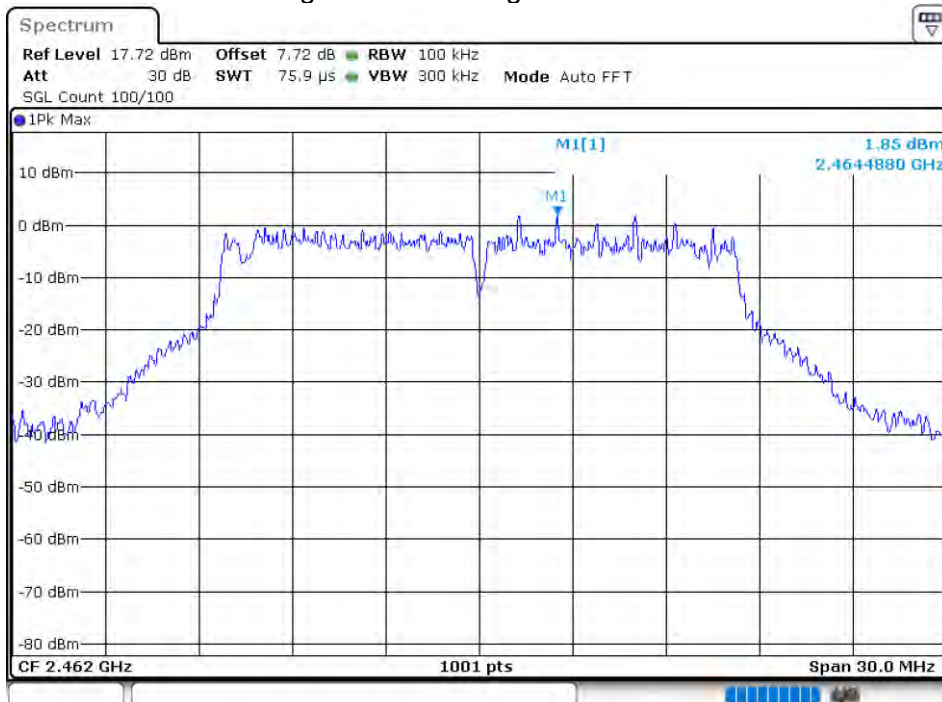


### Band Edge NVNT 802.11g 2462MHz Ant1 Emission

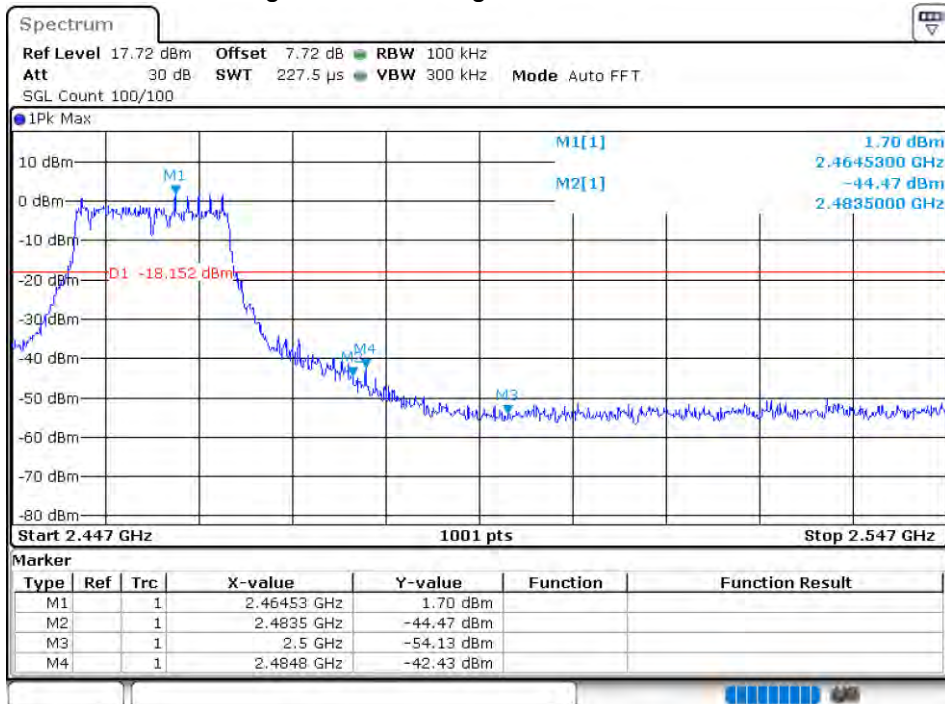


### Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Ref

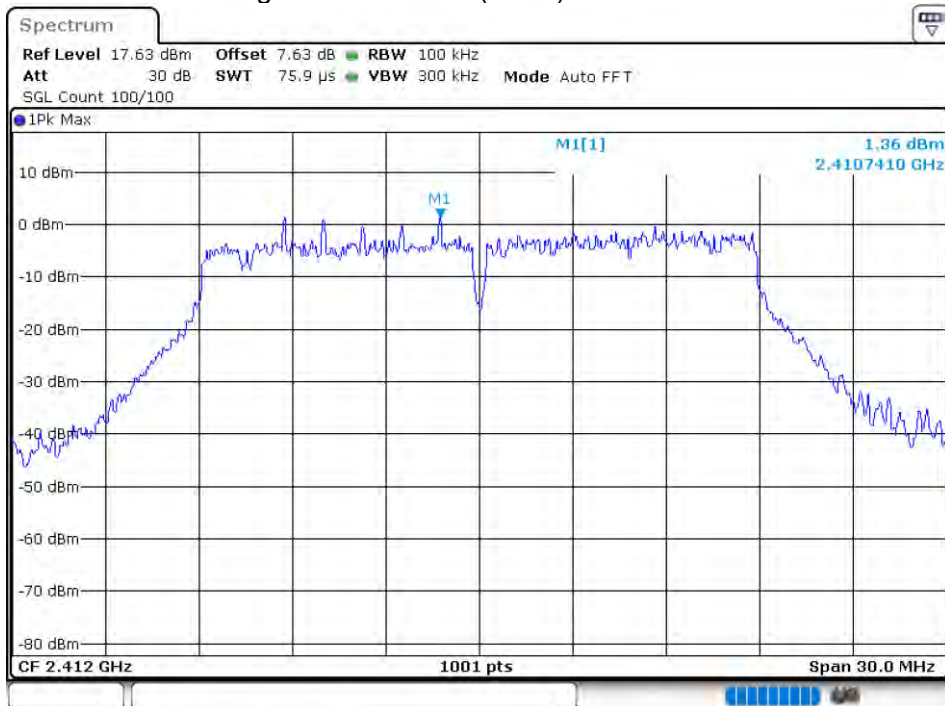


### Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Emission

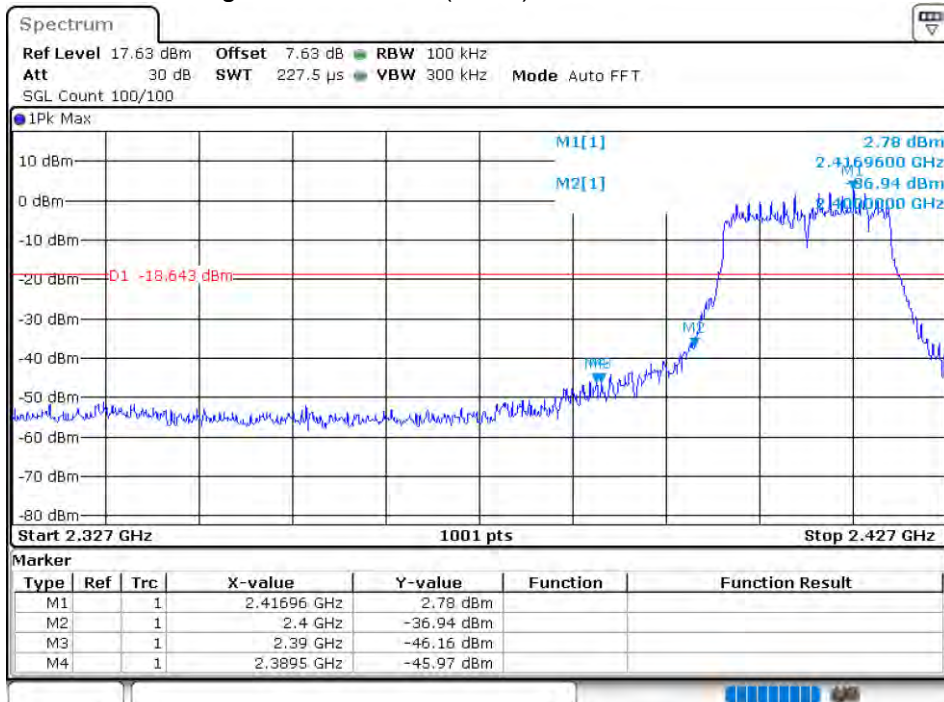


### Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Ref

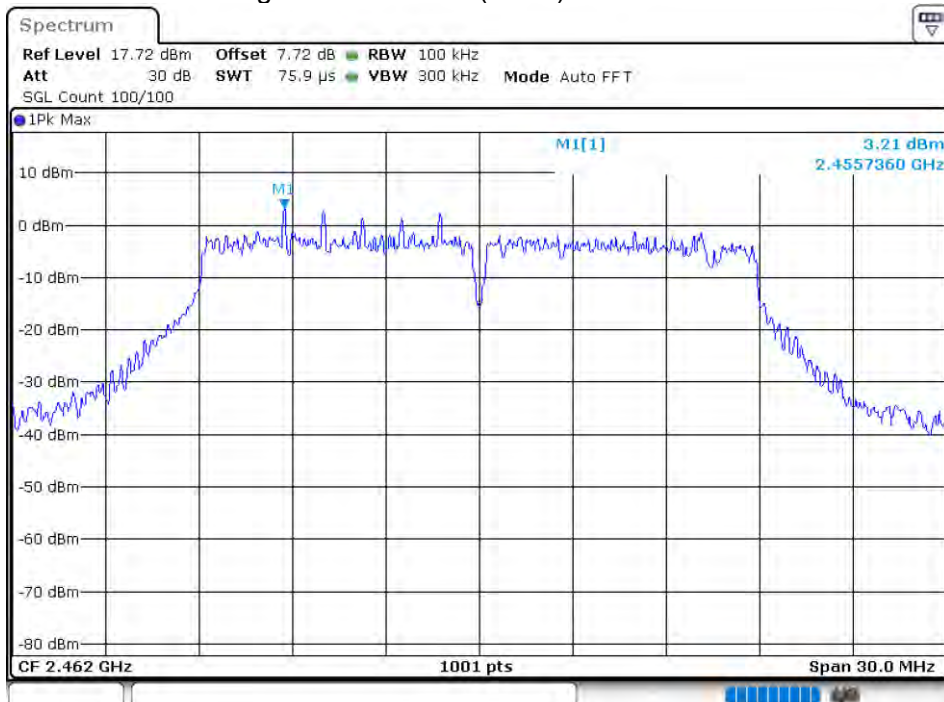


### Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Emission

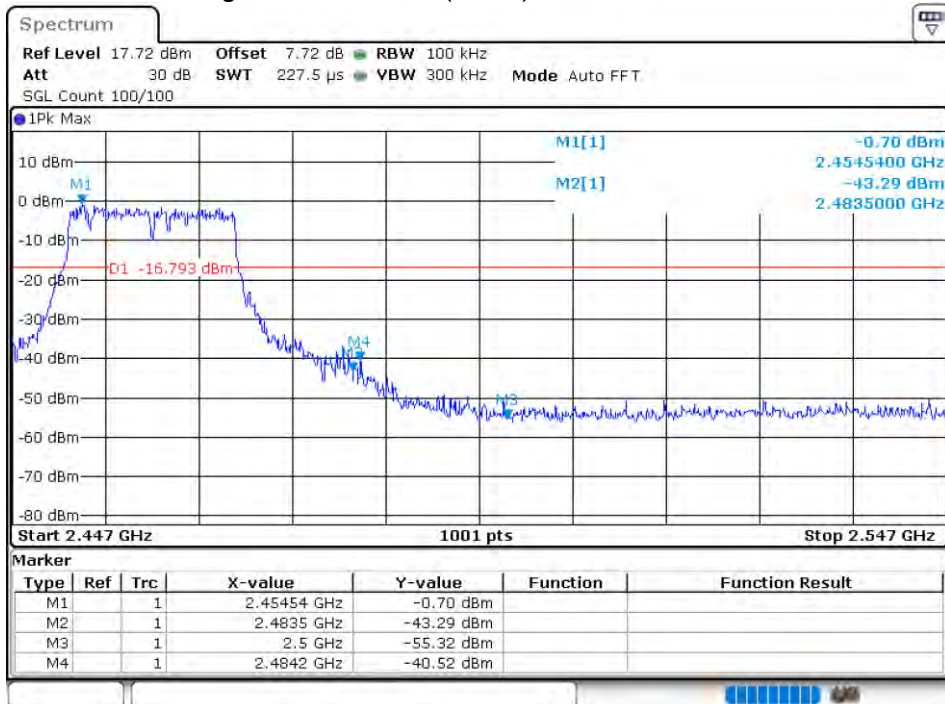


### Band Edge NVNT 802.11n(HT40) 2422MHz Ant1 Ref

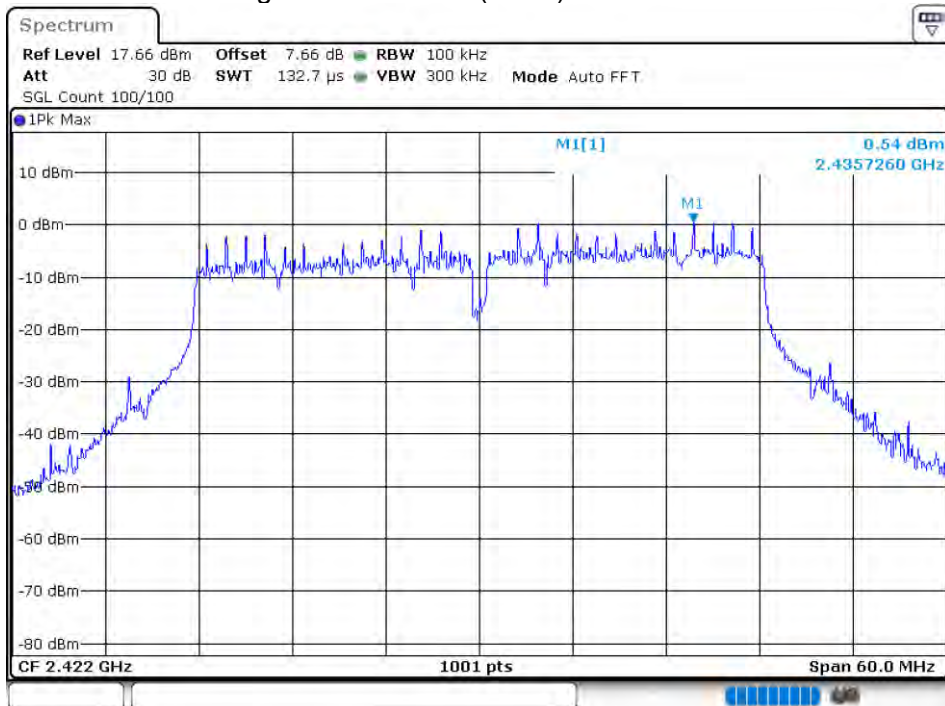


### Band Edge NVNT 802.11n(HT40) 2422MHz Ant1 Emission

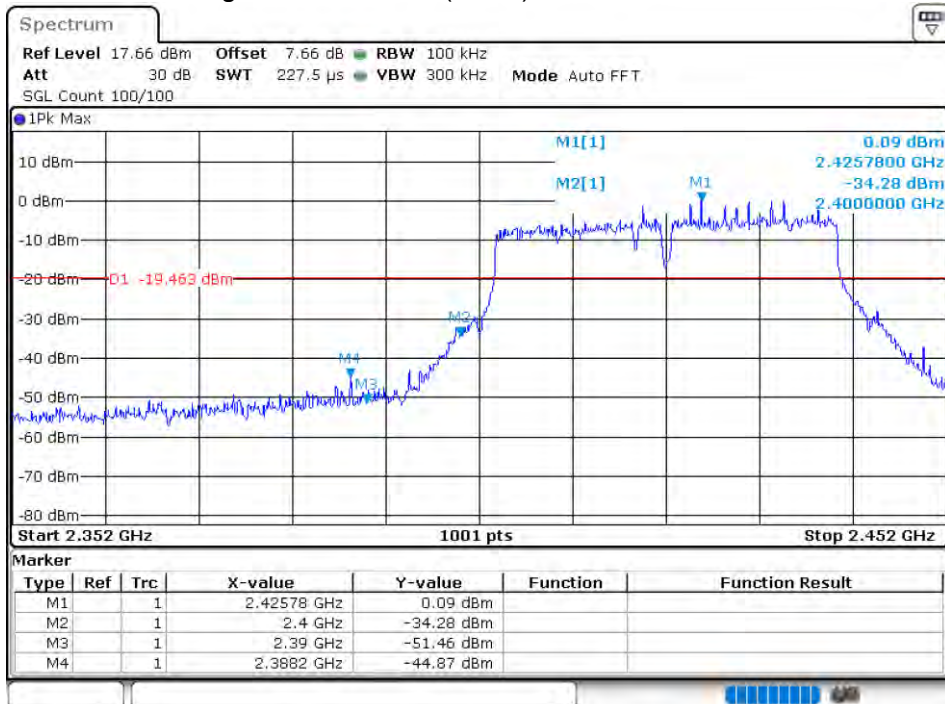

### Band Edge NVNT 802.11n(HT40) 2452MHz Ant1 Ref

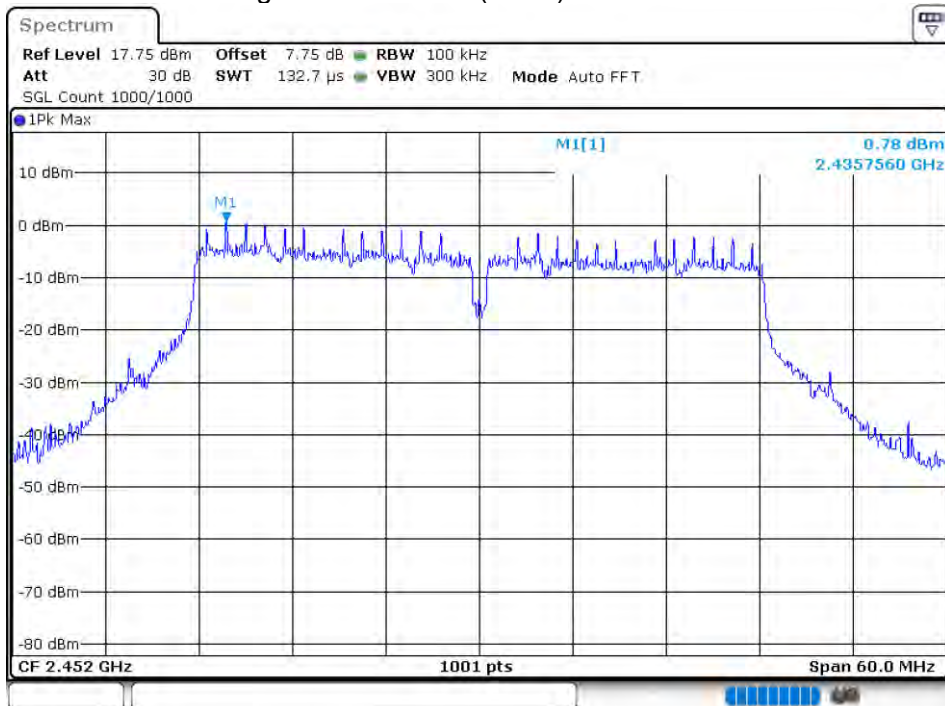

Band Edge NVNT 802.11n(HT40) 2452MHz Ant1 Emission

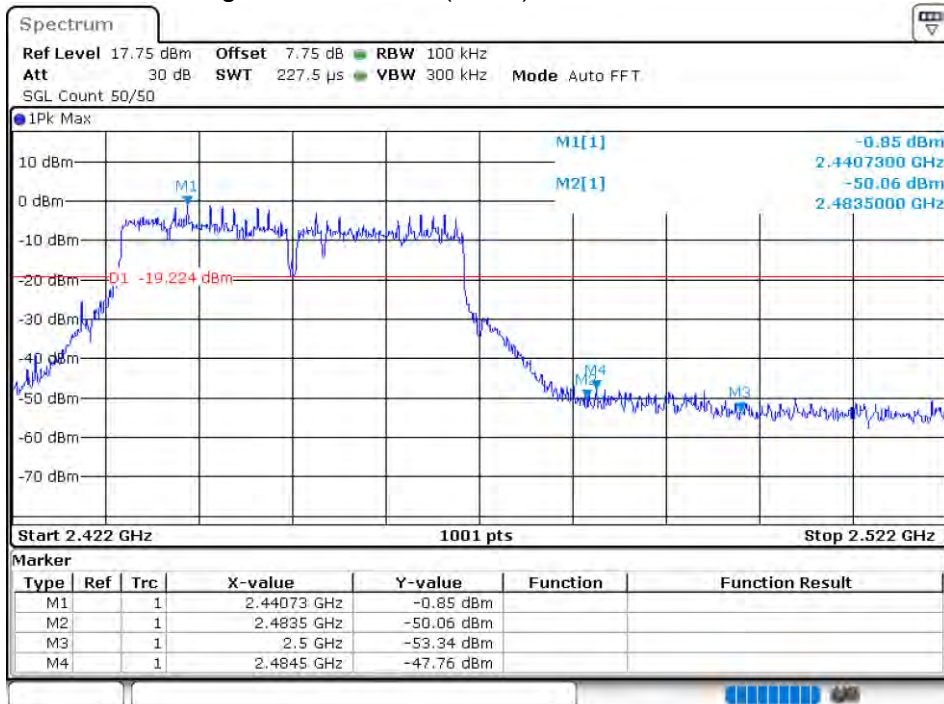


### 8.1.6 CONDUCTED RF SPURIOUS EMISSION

| Condition | Mode          | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|---------------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | 802.11b       | 2412            | Ant 1   | -45.38          | -20         | Pass    |
| NVNT      | 802.11b       | 2437            | Ant 1   | -44.22          | -20         | Pass    |
| NVNT      | 802.11b       | 2462            | Ant 1   | -49.11          | -20         | Pass    |
| NVNT      | 802.11g       | 2412            | Ant 1   | -43.68          | -20         | Pass    |
| NVNT      | 802.11g       | 2437            | Ant 1   | -43.18          | -20         | Pass    |
| NVNT      | 802.11g       | 2462            | Ant 1   | -44.37          | -20         | Pass    |
| NVNT      | 802.11n(HT20) | 2412            | Ant 1   | -40.79          | -20         | Pass    |
| NVNT      | 802.11n(HT20) | 2437            | Ant 1   | -40.44          | -20         | Pass    |
| NVNT      | 802.11n(HT20) | 2462            | Ant 1   | -48.38          | -20         | Pass    |
| NVNT      | 802.11n(HT40) | 2422            | Ant 1   | -40.05          | -20         | Pass    |
| NVNT      | 802.11n(HT40) | 2437            | Ant 1   | -40.65          | -20         | Pass    |
| NVNT      | 802.11n(HT40) | 2452            | Ant 1   | -44.47          | -20         | Pass    |

Tx. Spurious NVNT 802.11b 2412MHz Ant1 Ref




### Tx. Spurious NVNT 802.11b 2412MHz Ant1 Emission

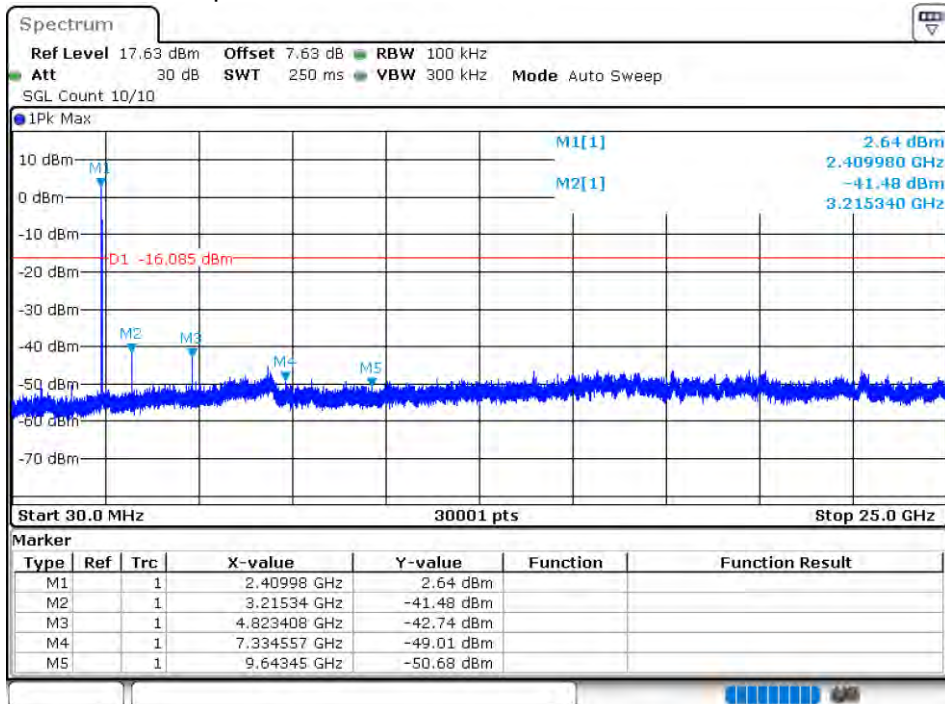


### Tx. Spurious NVNT 802.11b 2437MHz Ant1 Ref




### Tx. Spurious NVNT 802.11b 2437MHz Ant1 Emission

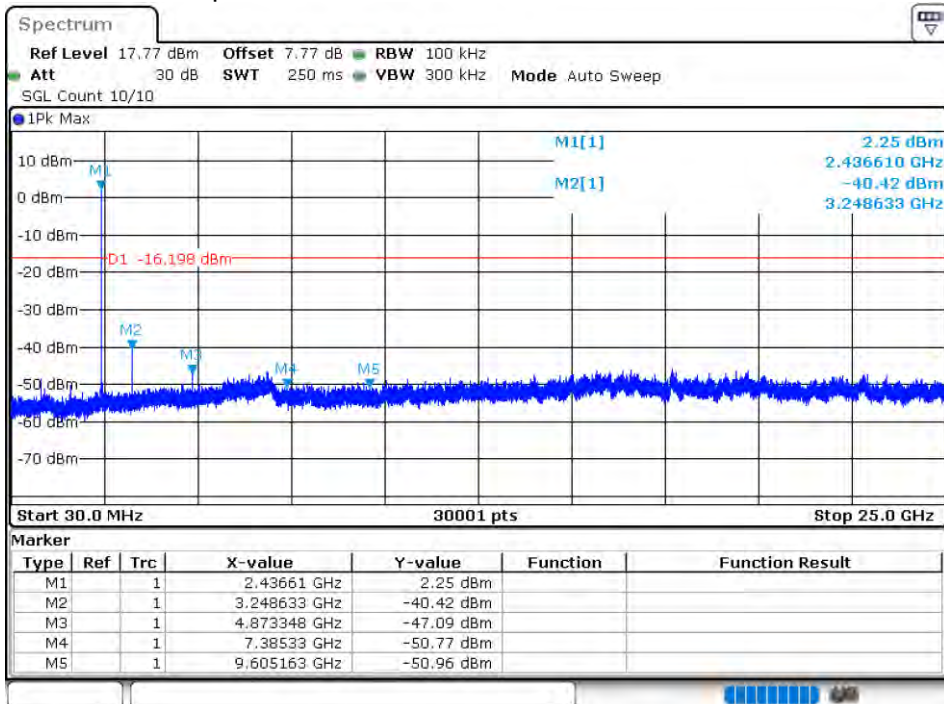


### Tx. Spurious NVNT 802.11b 2462MHz Ant1 Ref

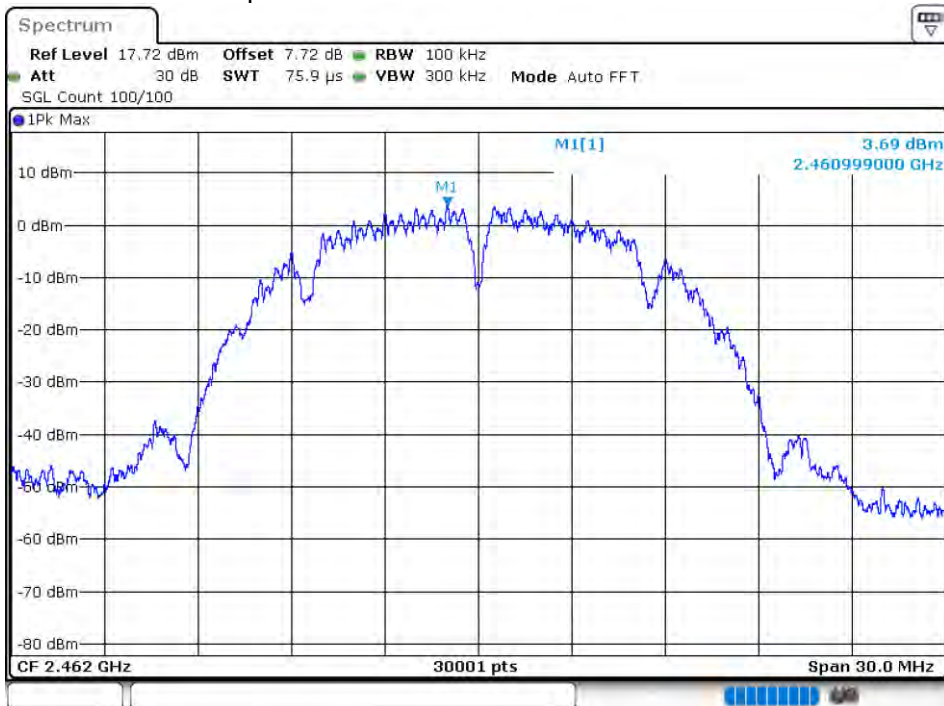


### Tx. Spurious NVNT 802.11b 2462MHz Ant1 Emission

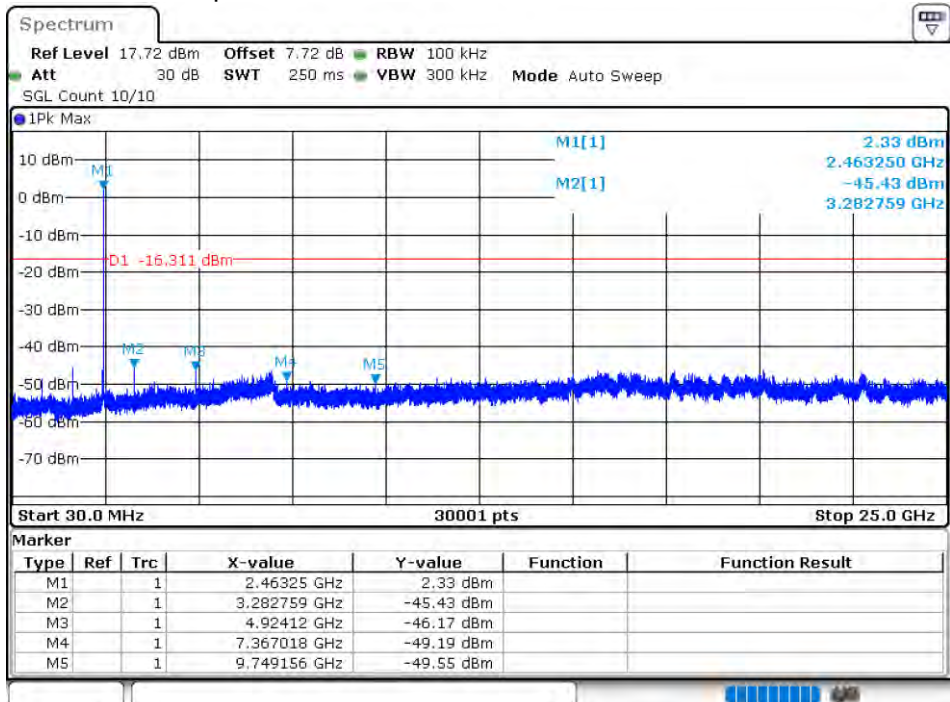


### Tx. Spurious NVNT 802.11g 2412MHz Ant1 Ref

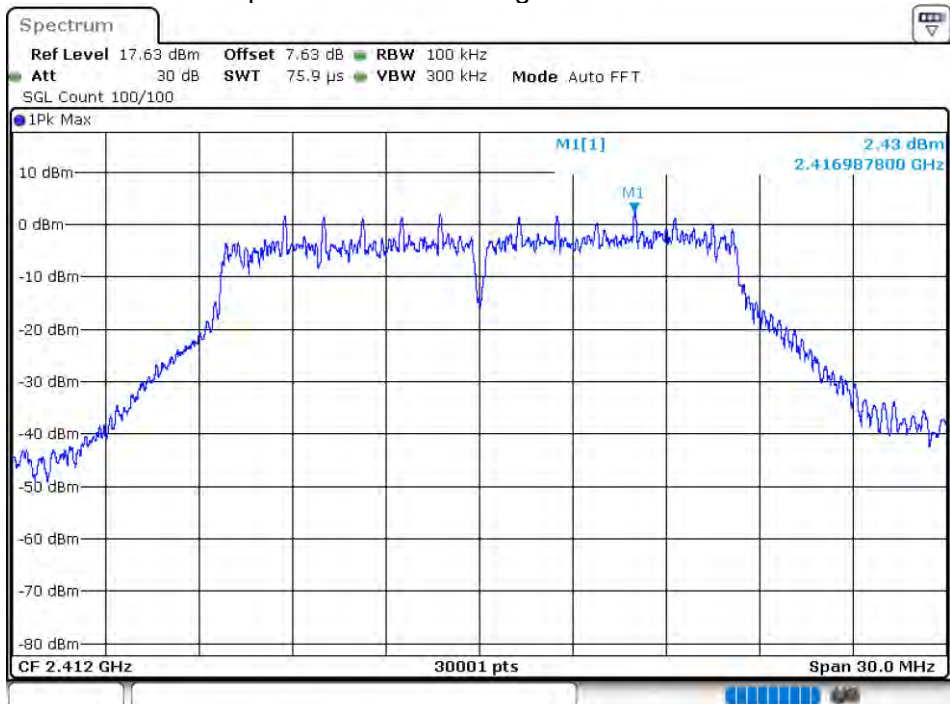


### Tx. Spurious NVNT 802.11g 2412MHz Ant1 Emission

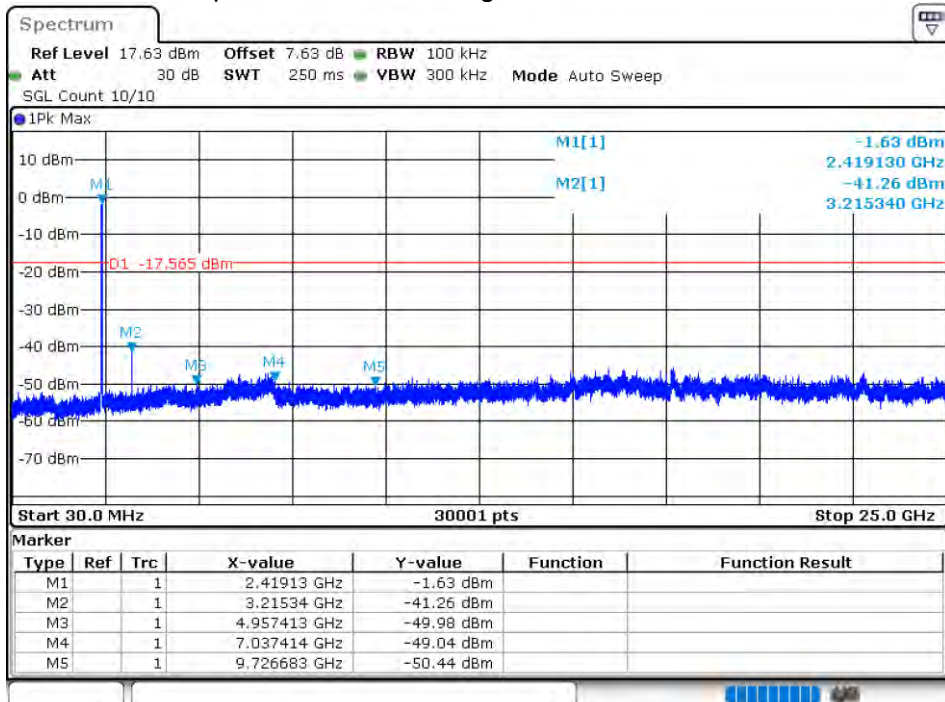


### Tx. Spurious NVNT 802.11g 2437MHz Ant1 Ref

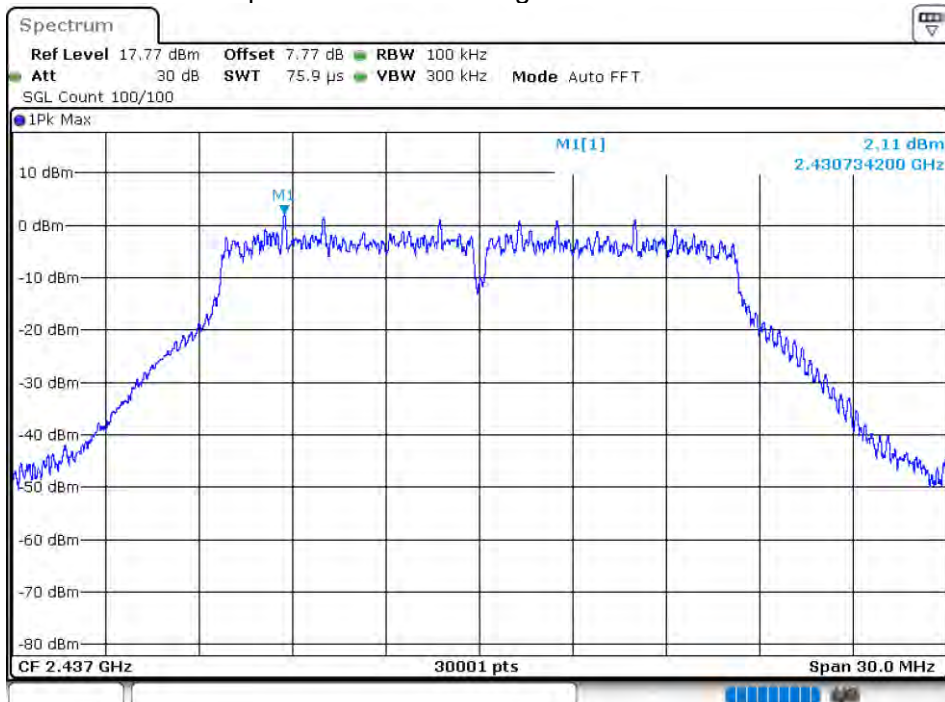


### Tx. Spurious NVNT 802.11g 2437MHz Ant1 Emission

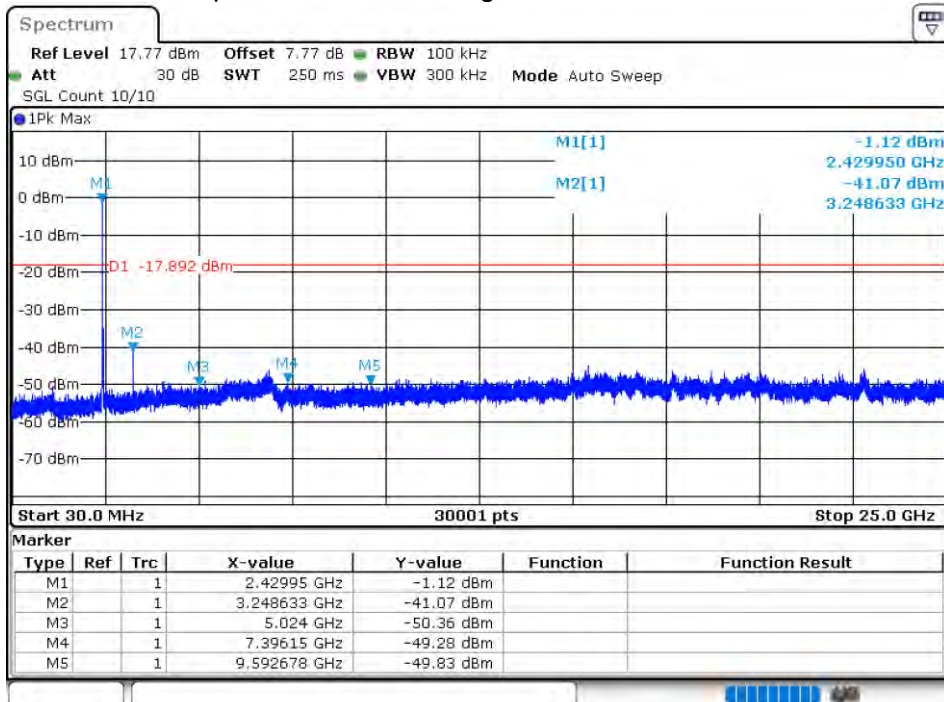


### Tx. Spurious NVNT 802.11g 2462MHz Ant1 Ref

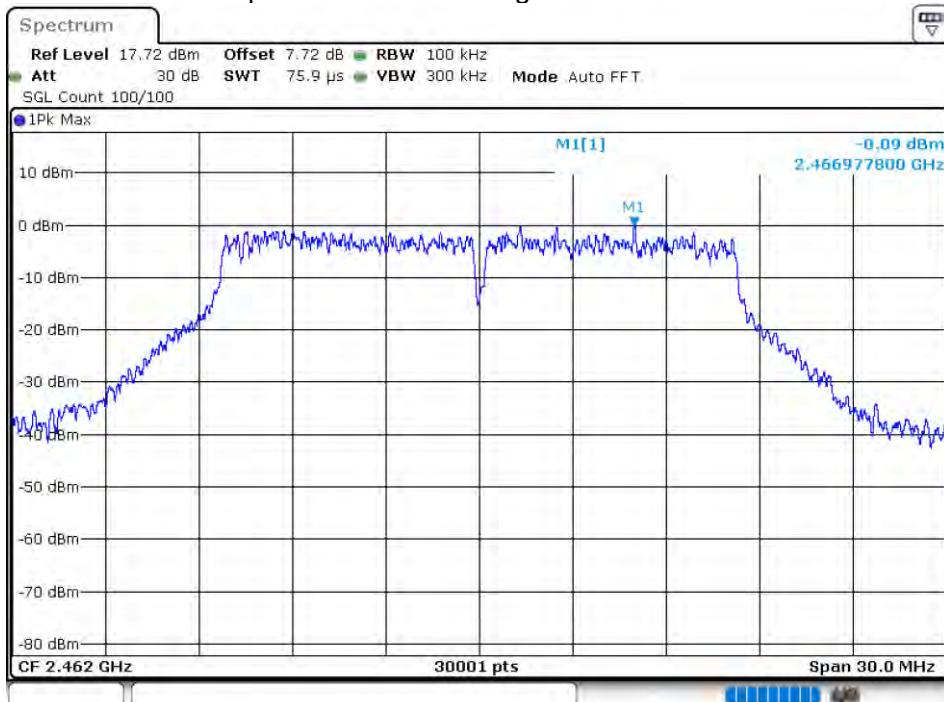


### Tx. Spurious NVNT 802.11g 2462MHz Ant1 Emission

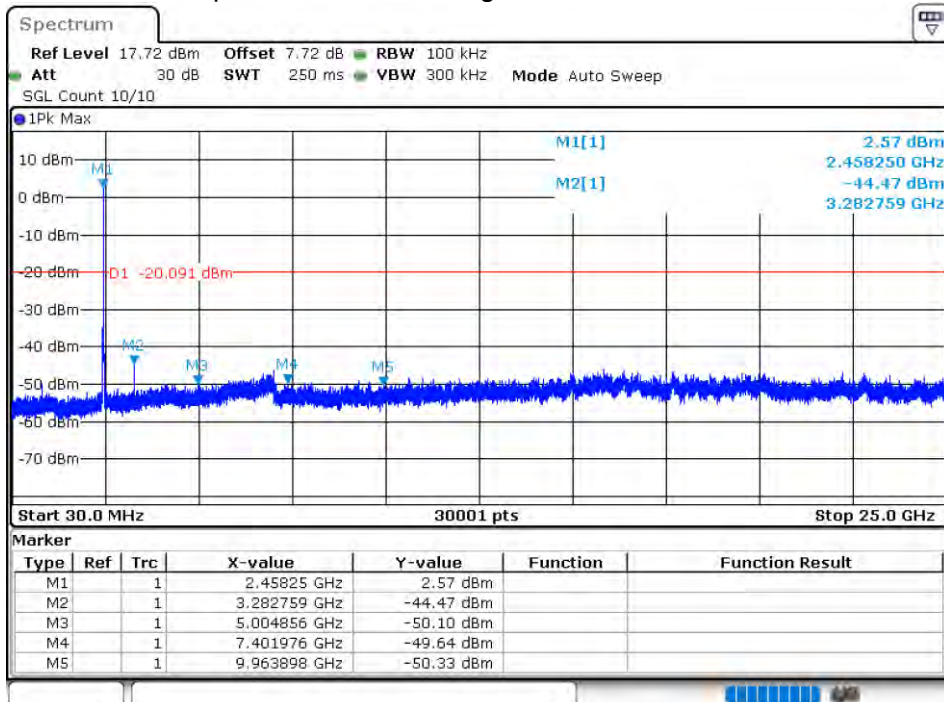


### Tx. Spurious NVNT 802.11n(HT20) 2412MHz Ant1 Ref

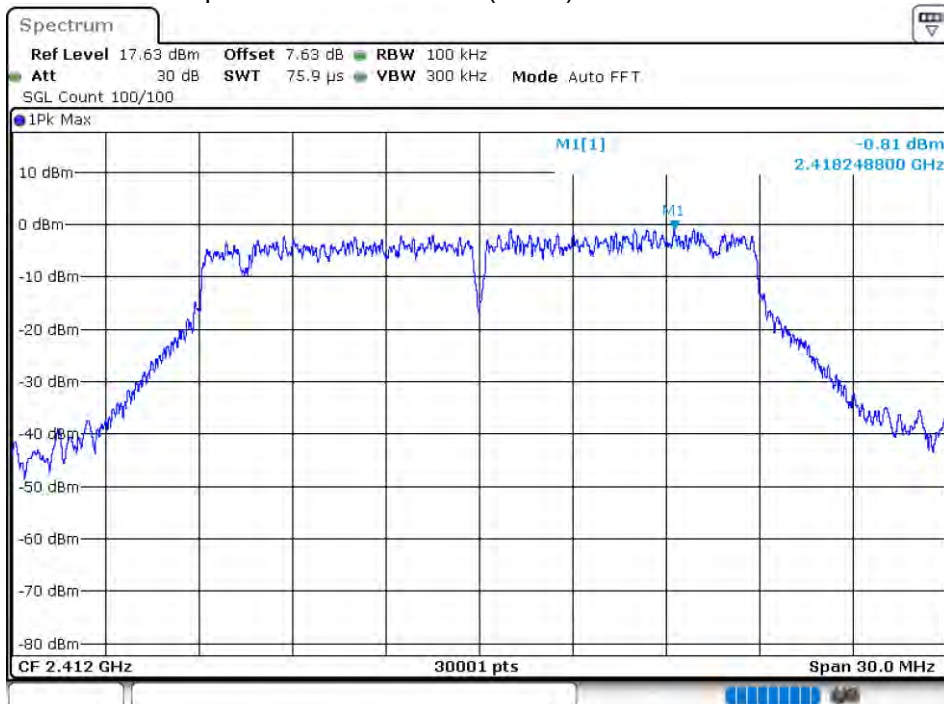


Tx. Spurious NVNT 802.11n(HT20) 2412MHz Ant1 Emission

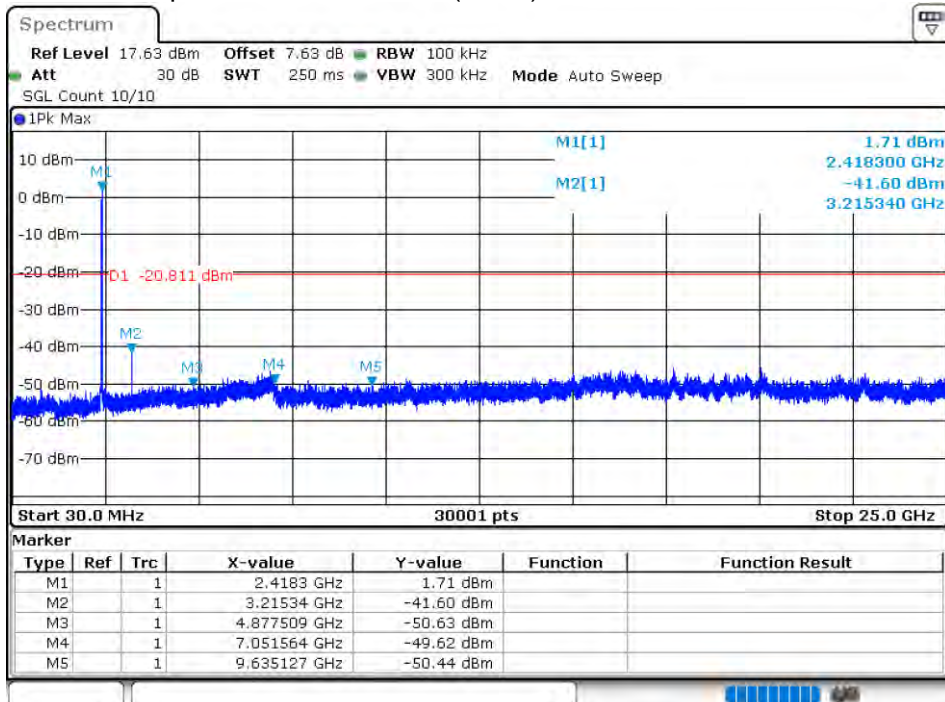


Tx. Spurious NVNT 802.11n(HT20) 2437MHz Ant1 Ref

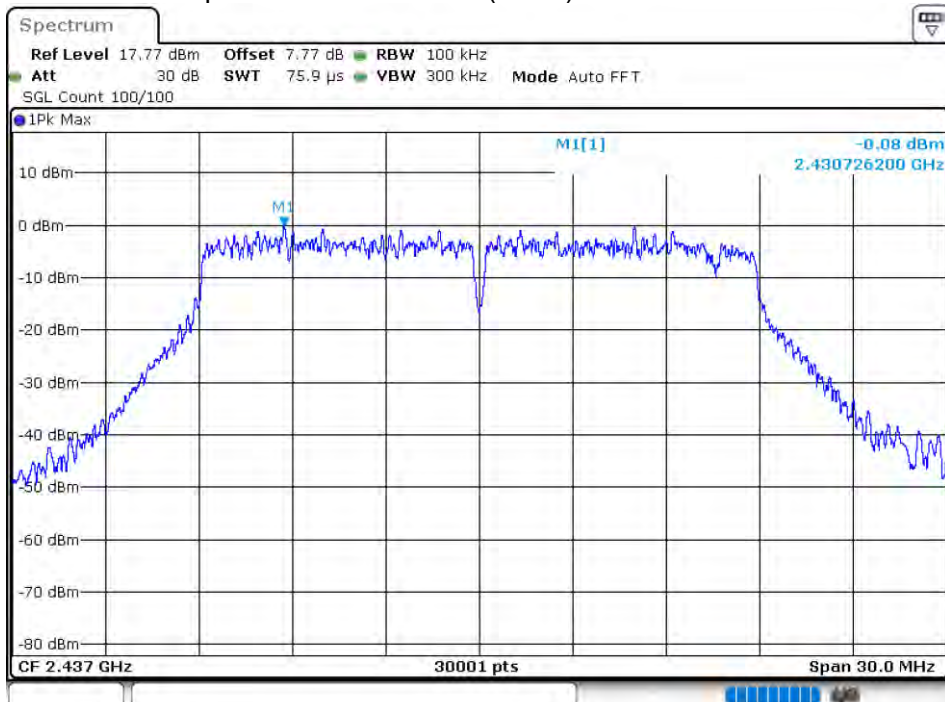


Tx. Spurious NVNT 802.11n(HT20) 2437MHz Ant1 Emission

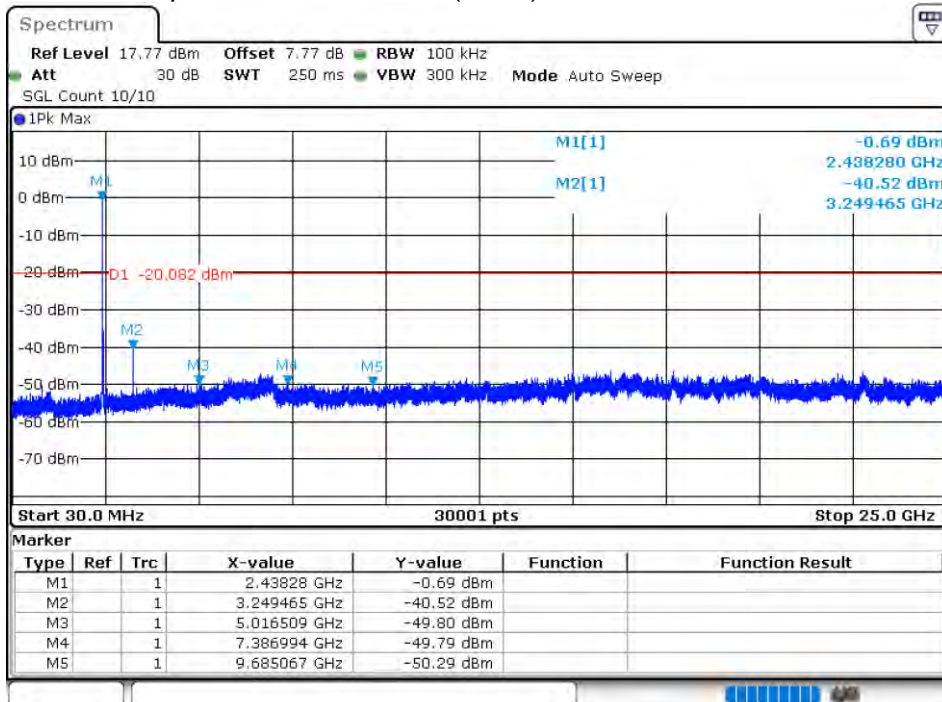


Tx. Spurious NVNT 802.11n(HT20) 2462MHz Ant1 Ref

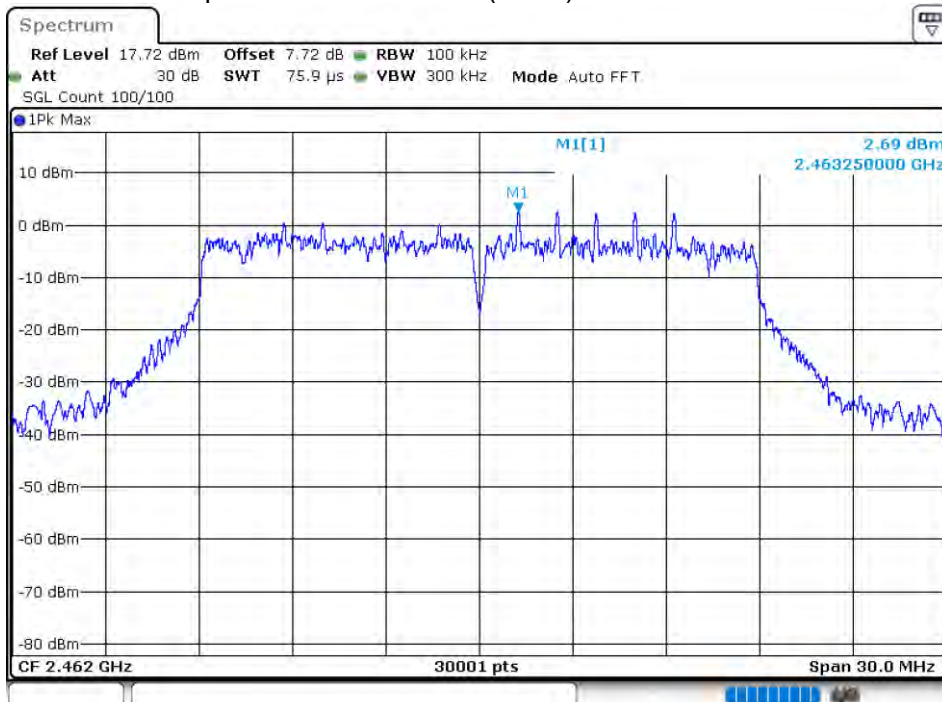


Tx. Spurious NVNT 802.11n(HT20) 2462MHz Ant1 Emission

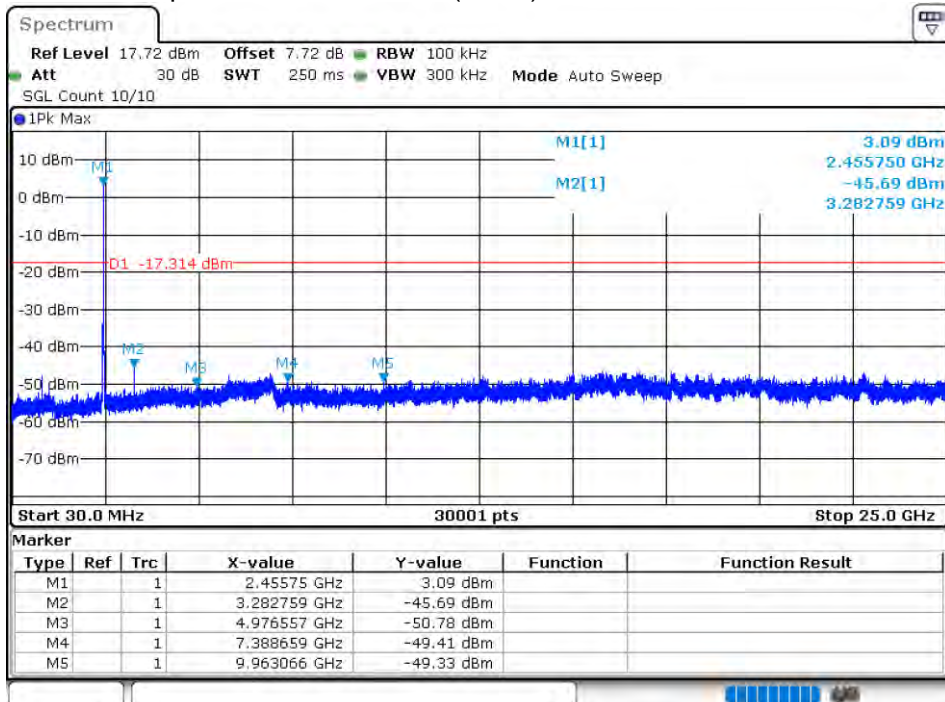


Tx. Spurious NVNT 802.11n(HT40) 2422MHz Ant1 Ref

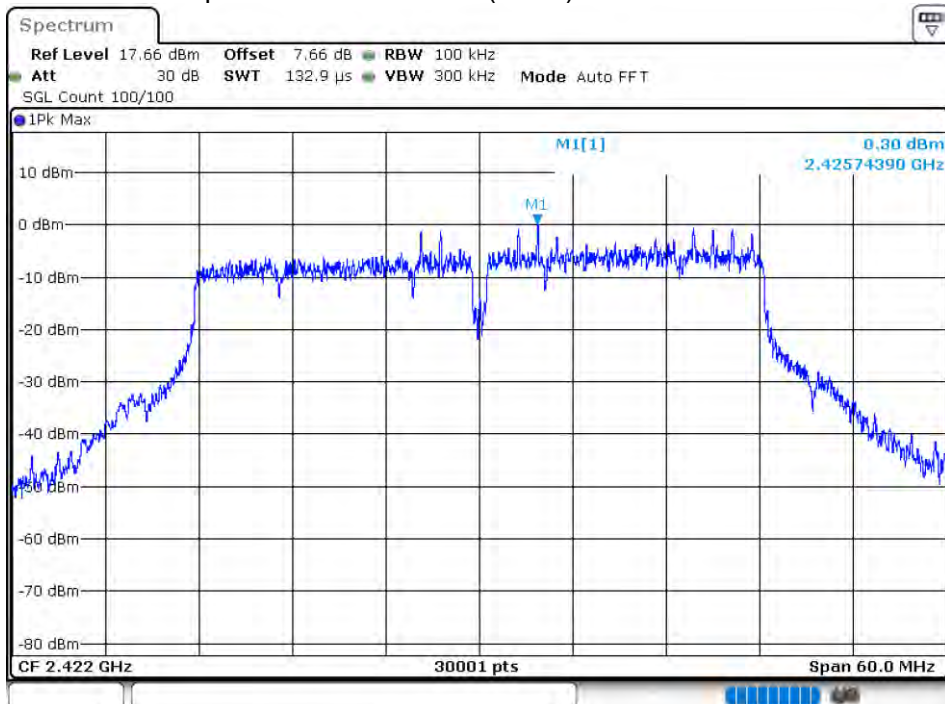


Tx. Spurious NVNT 802.11n(HT40) 2422MHz Ant1 Emission

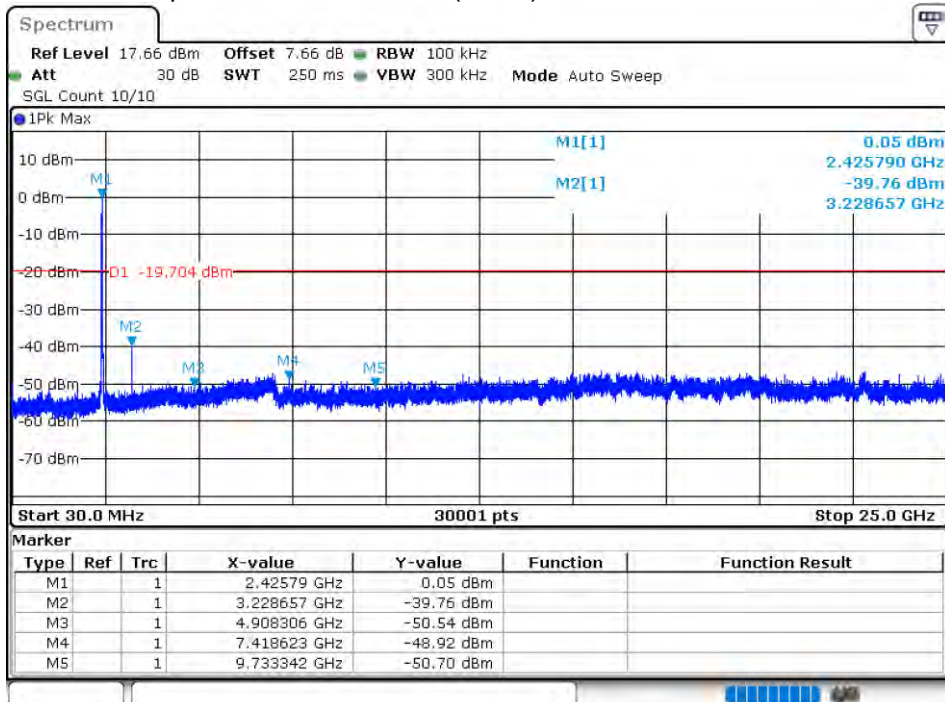


Tx. Spurious NVNT 802.11n(HT40) 2437MHz Ant1 Ref

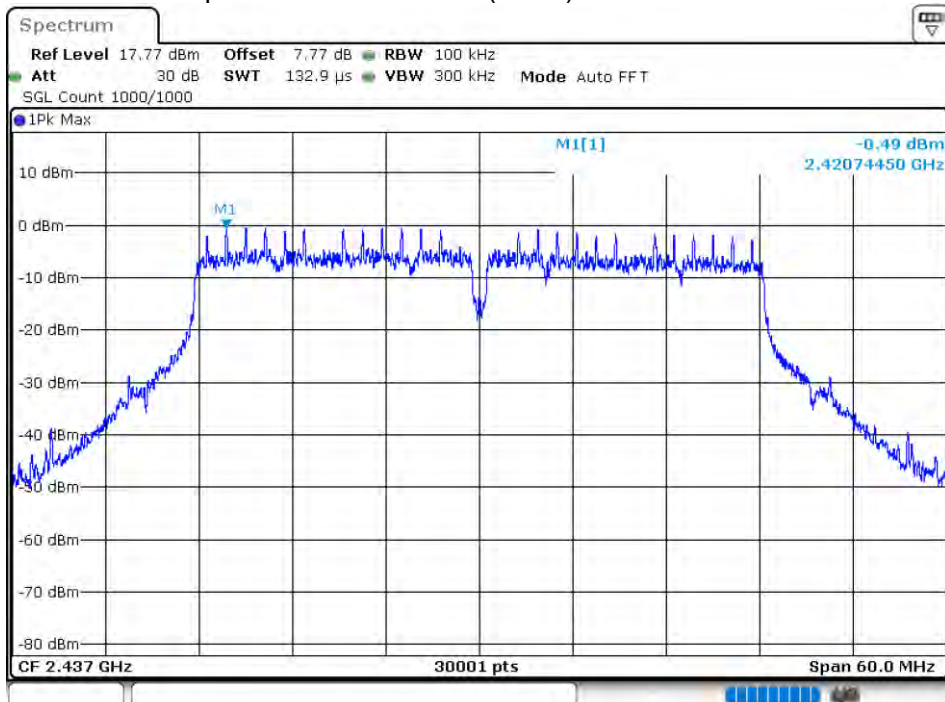


Tx. Spurious NVNT 802.11n(HT40) 2437MHz Ant1 Emission

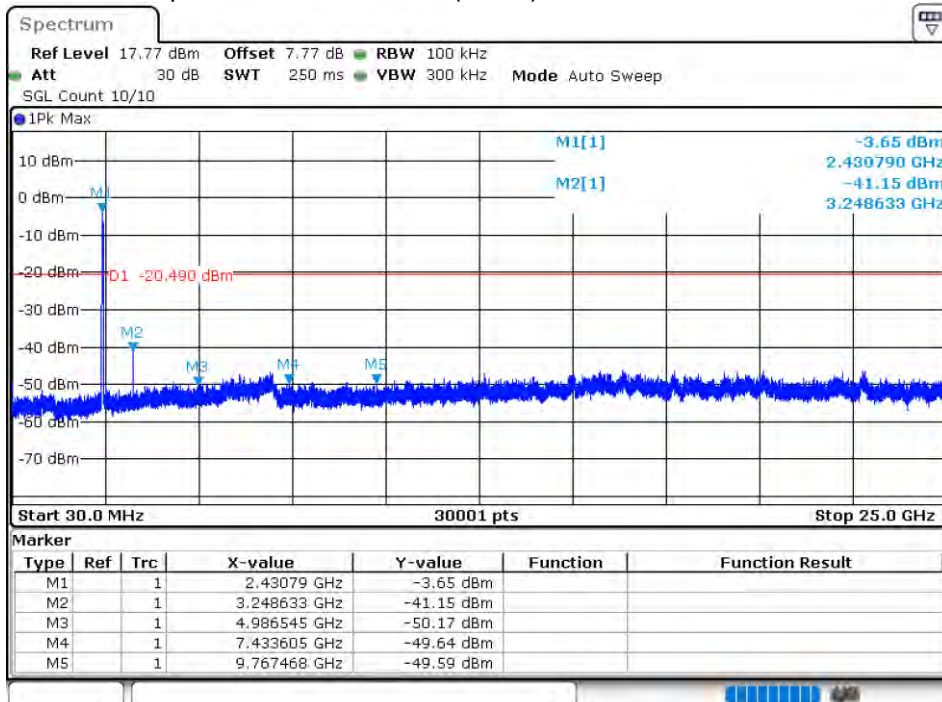

Tx. Spurious NVNT 802.11n(HT40) 2452MHz Ant1 Ref

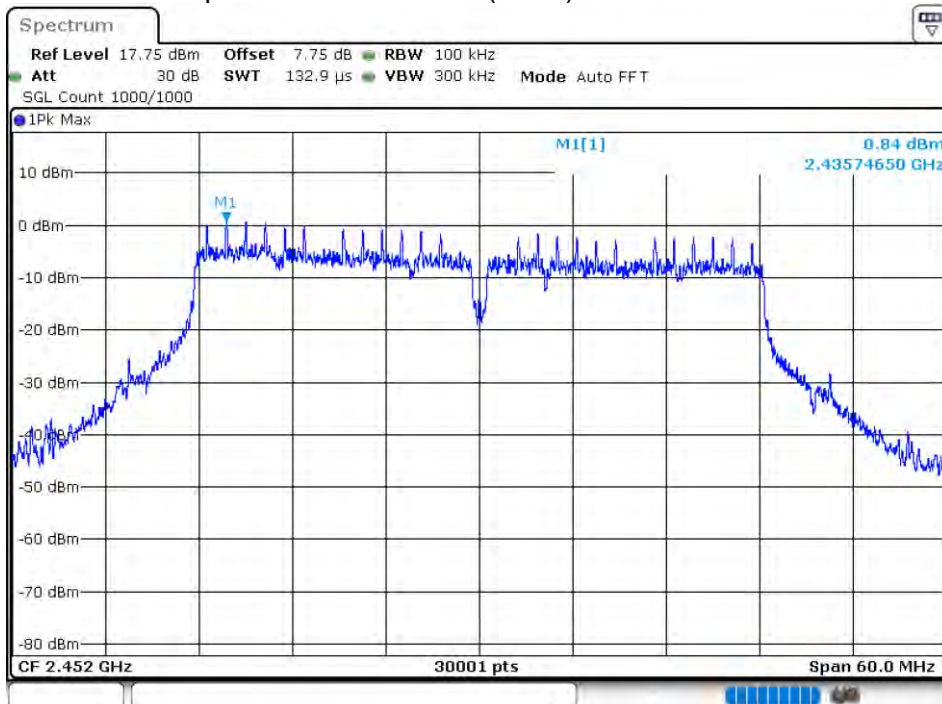

Tx. Spurious NVNT 802.11n(HT40) 2452MHz Ant1 Emission

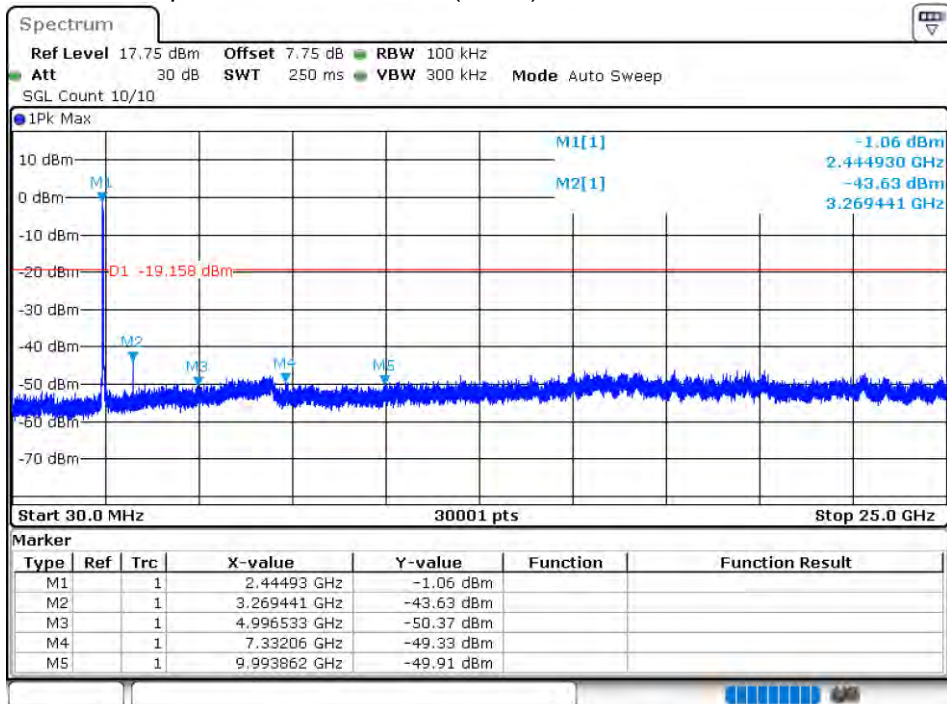


## MODULE 2:

2.4G:


### 8.1.7 DUTY CYCLE

| Antenna | Condition | Mode          | Frequency (MHz) | Duty Cycle (%) |
|---------|-----------|---------------|-----------------|----------------|
| Ant 1   | NVNT      | 802.11b       | 2412            | 100            |
| Ant 1   | NVNT      | 802.11b       | 2437            | 100            |
| Ant 1   | NVNT      | 802.11b       | 2462            | 100            |
| Ant 2   | NVNT      | 802.11b       | 2412            | 100            |
| Ant 2   | NVNT      | 802.11b       | 2437            | 100            |
| Ant 2   | NVNT      | 802.11b       | 2462            | 100            |
| Ant 1   | NVNT      | 802.11g       | 2412            | 100            |
| Ant 1   | NVNT      | 802.11g       | 2437            | 100            |
| Ant 1   | NVNT      | 802.11g       | 2462            | 100            |
| Ant 2   | NVNT      | 802.11g       | 2412            | 100            |
| Ant 2   | NVNT      | 802.11g       | 2437            | 100            |
| Ant 2   | NVNT      | 802.11g       | 2462            | 100            |
| Ant 1   | NVNT      | 802.11n(HT20) | 2412            | 100            |
| Ant 1   | NVNT      | 802.11n(HT20) | 2437            | 100            |
| Ant 1   | NVNT      | 802.11n(HT20) | 2462            | 100            |
| Ant 2   | NVNT      | 802.11n(HT20) | 2412            | 100            |
| Ant 2   | NVNT      | 802.11n(HT20) | 2437            | 100            |
| Ant 2   | NVNT      | 802.11n(HT20) | 2462            | 100            |
| Ant 1   | NVNT      | 802.11n(HT40) | 2422            | 100            |
| Ant 1   | NVNT      | 802.11n(HT40) | 2437            | 100            |
| Ant 1   | NVNT      | 802.11n(HT40) | 2452            | 100            |
| Ant 2   | NVNT      | 802.11n(HT40) | 2422            | 100            |
| Ant 2   | NVNT      | 802.11n(HT40) | 2437            | 100            |
| Ant 2   | NVNT      | 802.11n(HT40) | 2452            | 100            |


### Duty Cycle NVNT 802.11b 2412MHz Ant 1

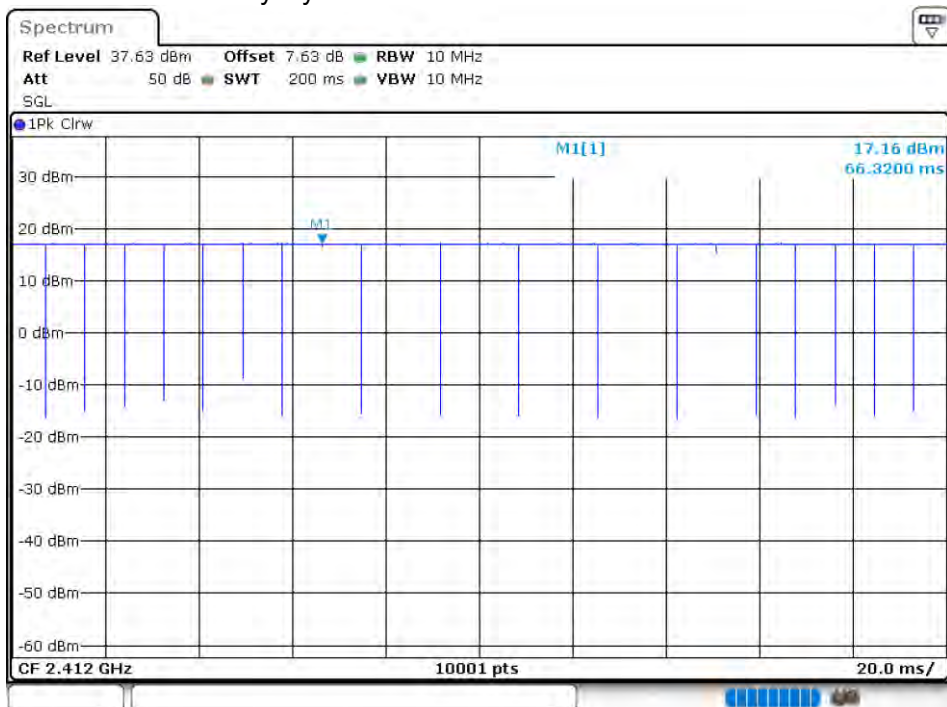


### Duty Cycle NVNT 802.11b 2437MHz Ant 1

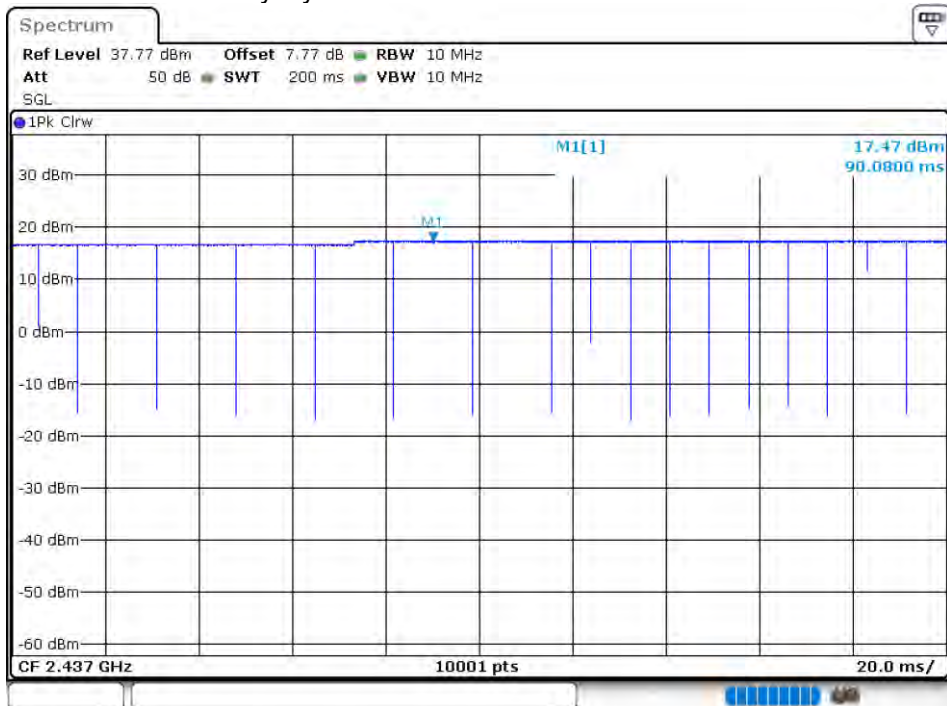


### Duty Cycle NVNT 802.11b 2462MHz Ant 1

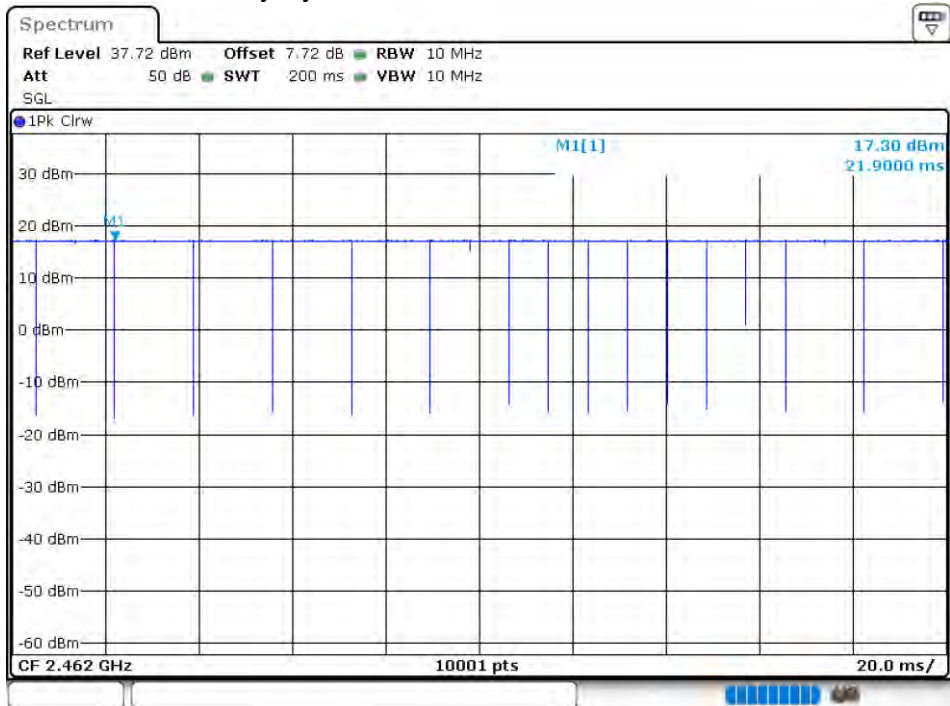


### Duty Cycle NVNT 802.11b 2412MHz Ant 2

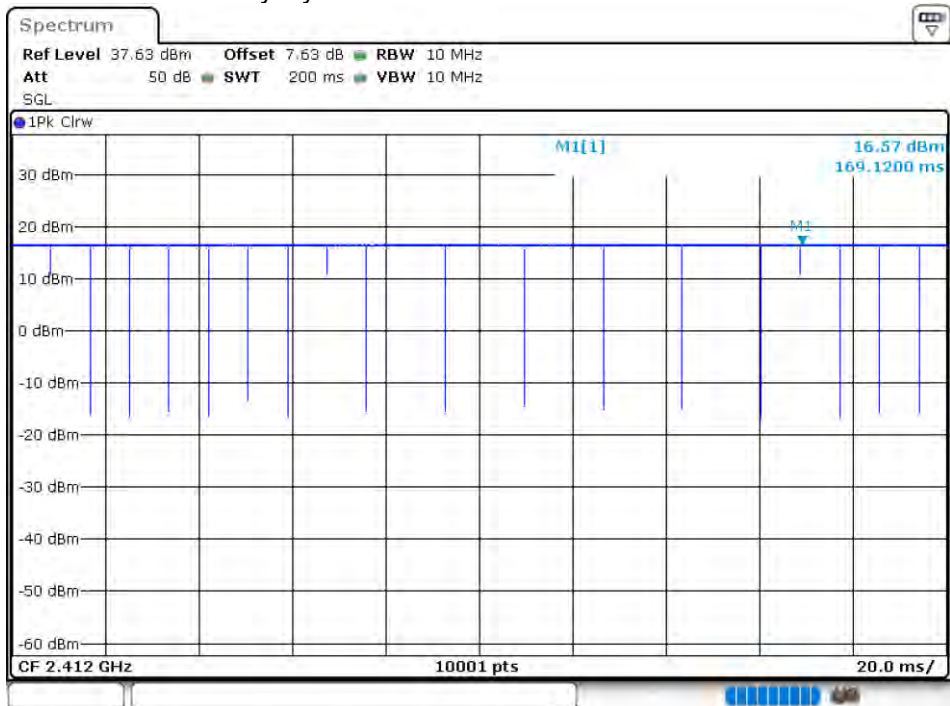


### Duty Cycle NVNT 802.11b 2437MHz Ant 2

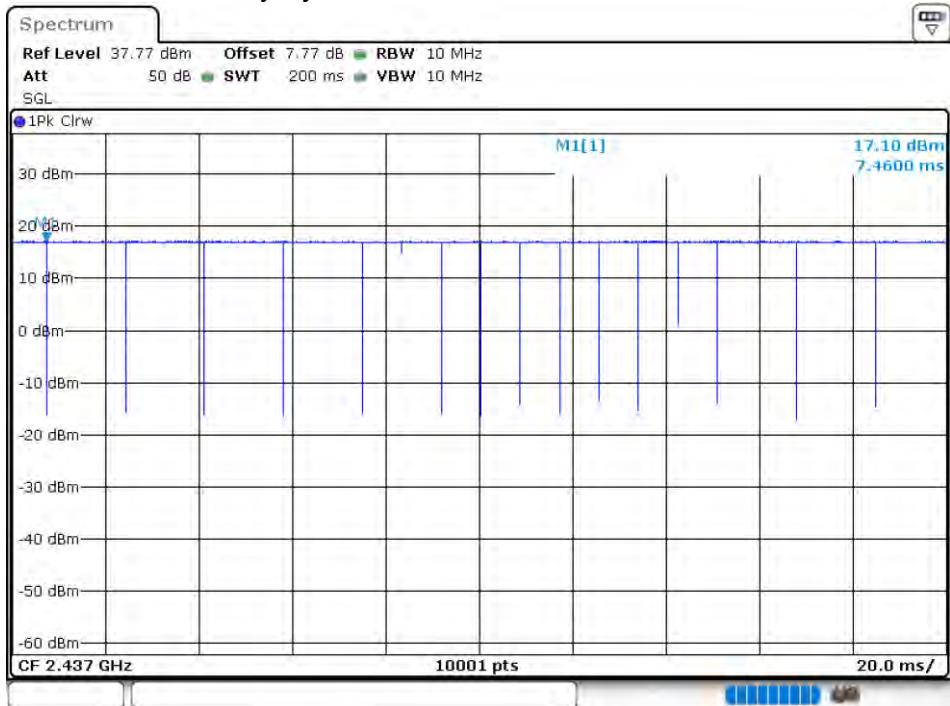


### Duty Cycle NVNT 802.11b 2462MHz Ant 2

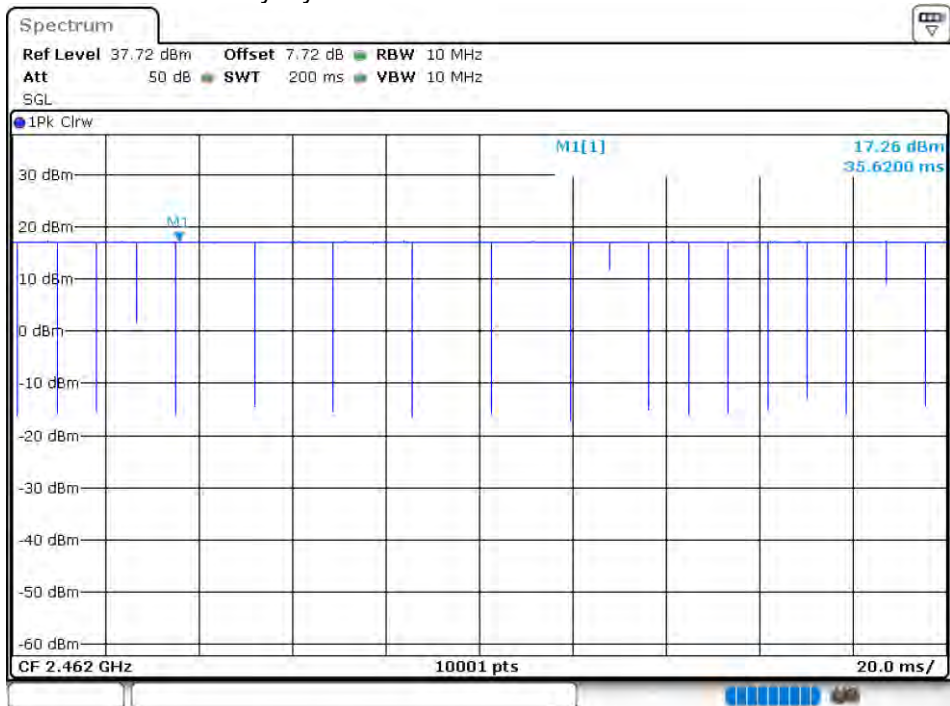


### Duty Cycle NVNT 802.11g 2412MHz Ant 1

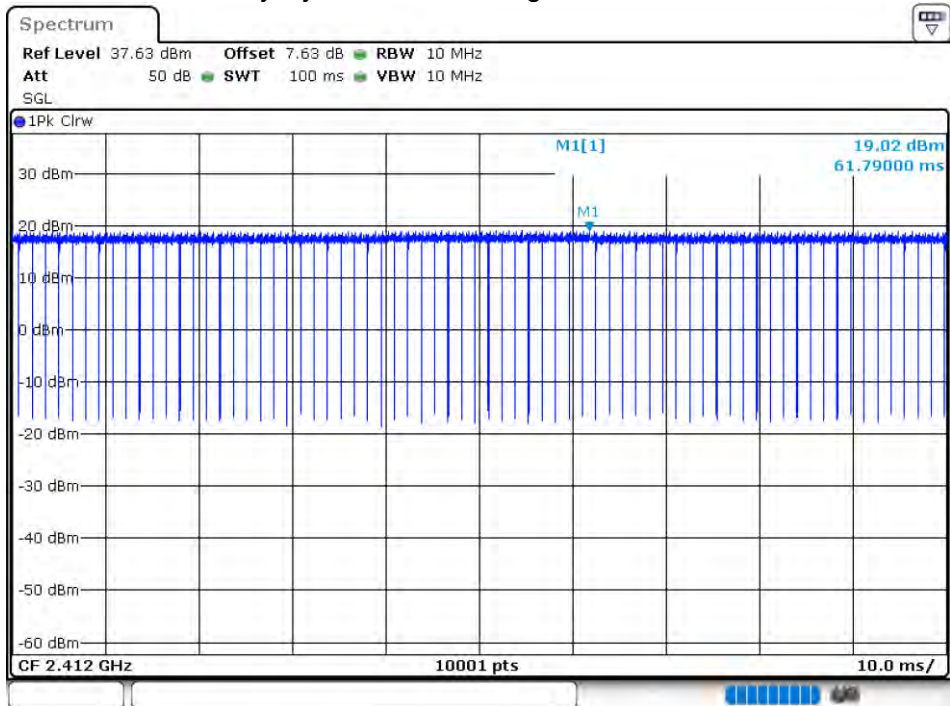


### Duty Cycle NVNT 802.11g 2437MHz Ant 1

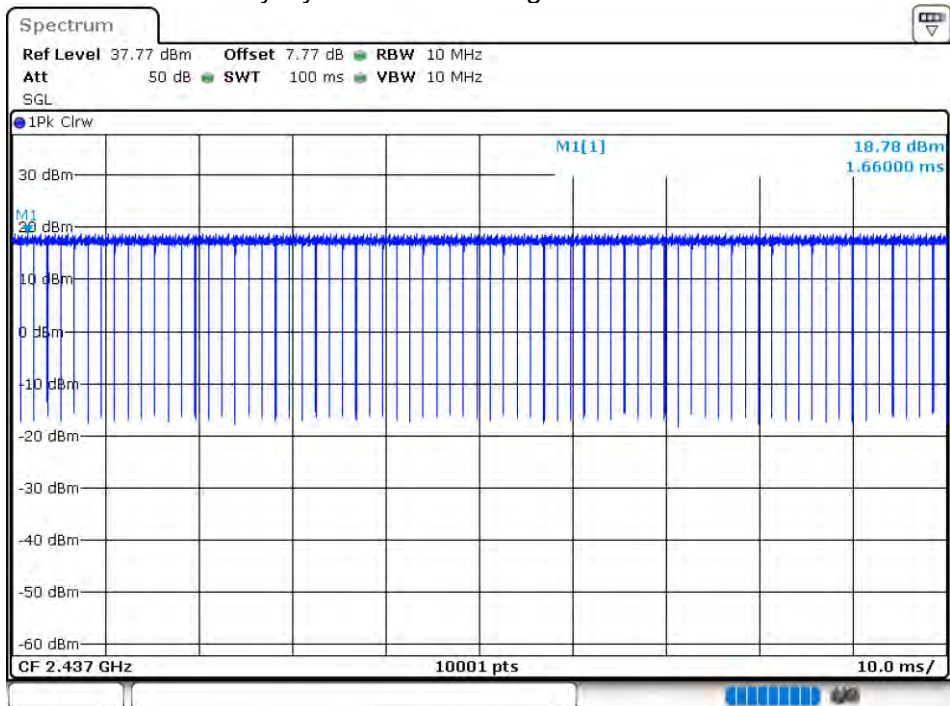


### Duty Cycle NVNT 802.11g 2462MHz Ant 1

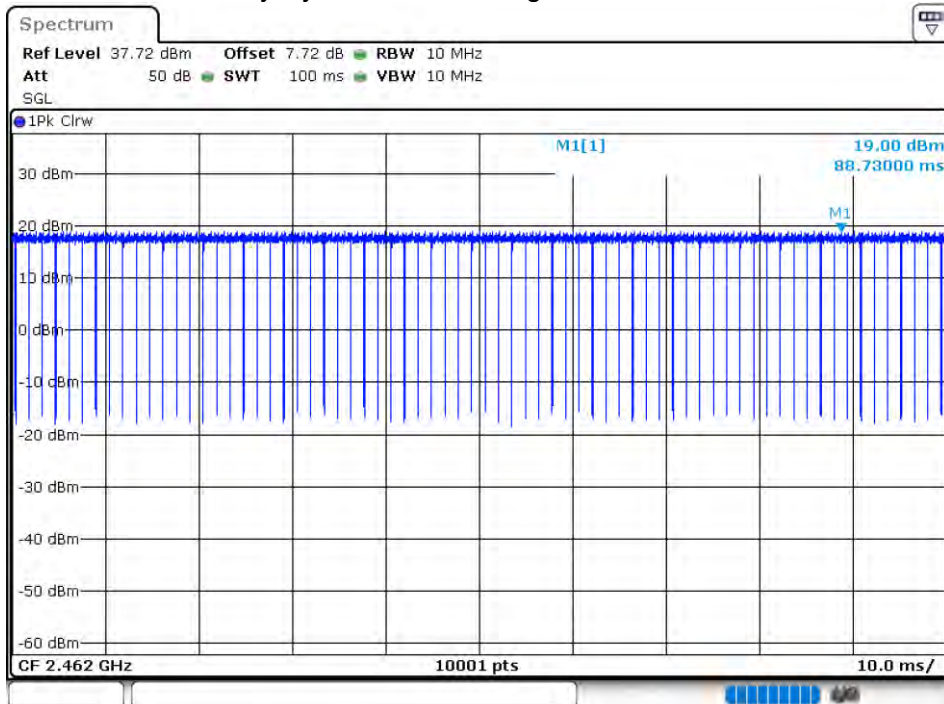


### Duty Cycle NVNT 802.11g 2412MHz Ant 2

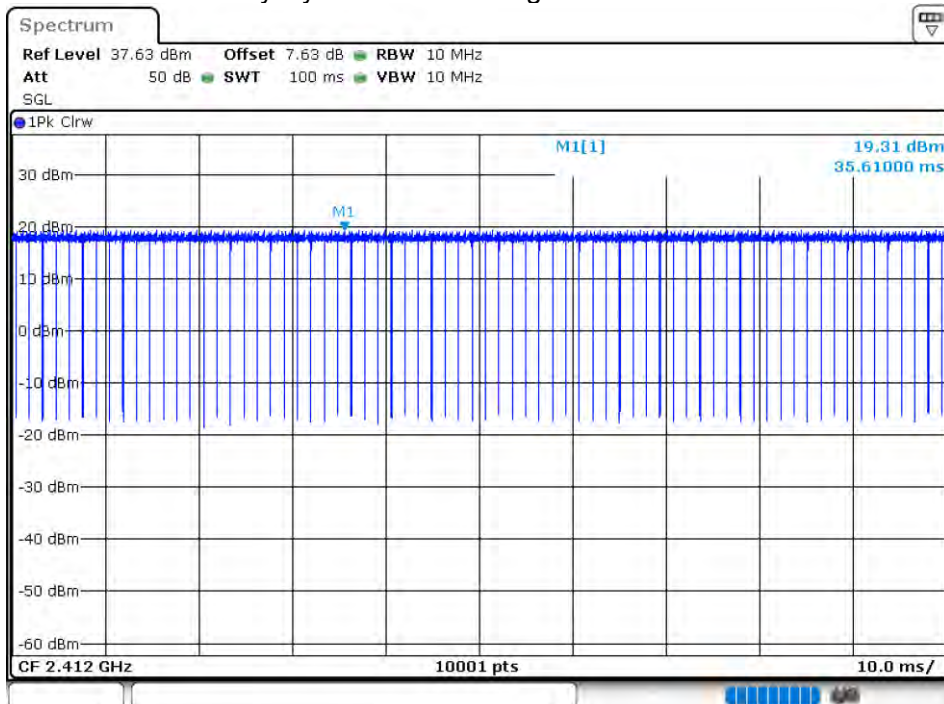


### Duty Cycle NVNT 802.11g 2437MHz Ant 2

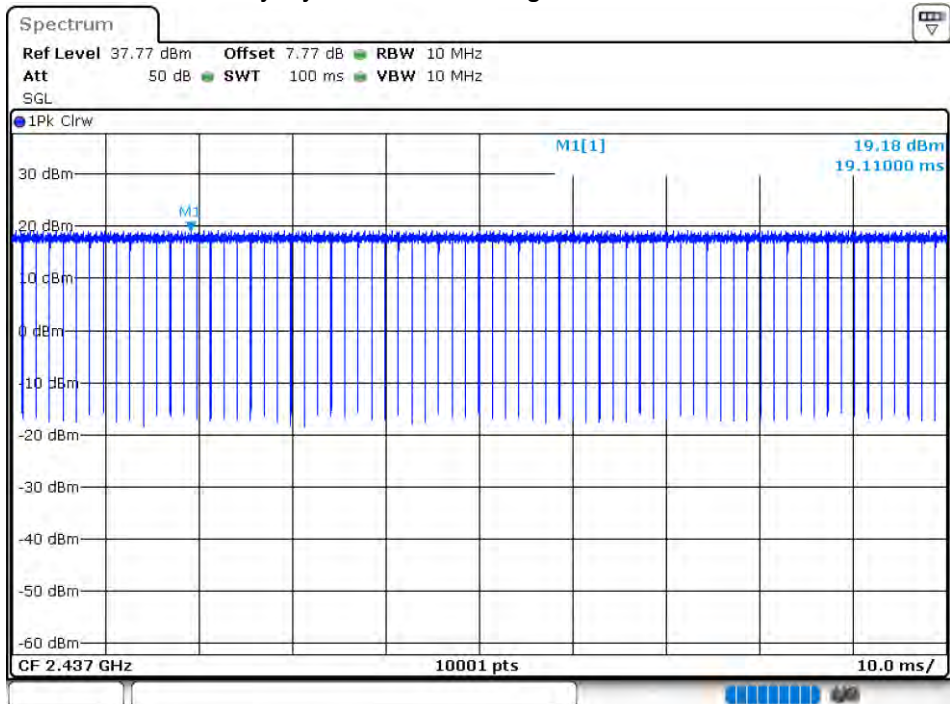


### Duty Cycle NVNT 802.11g 2462MHz Ant 2

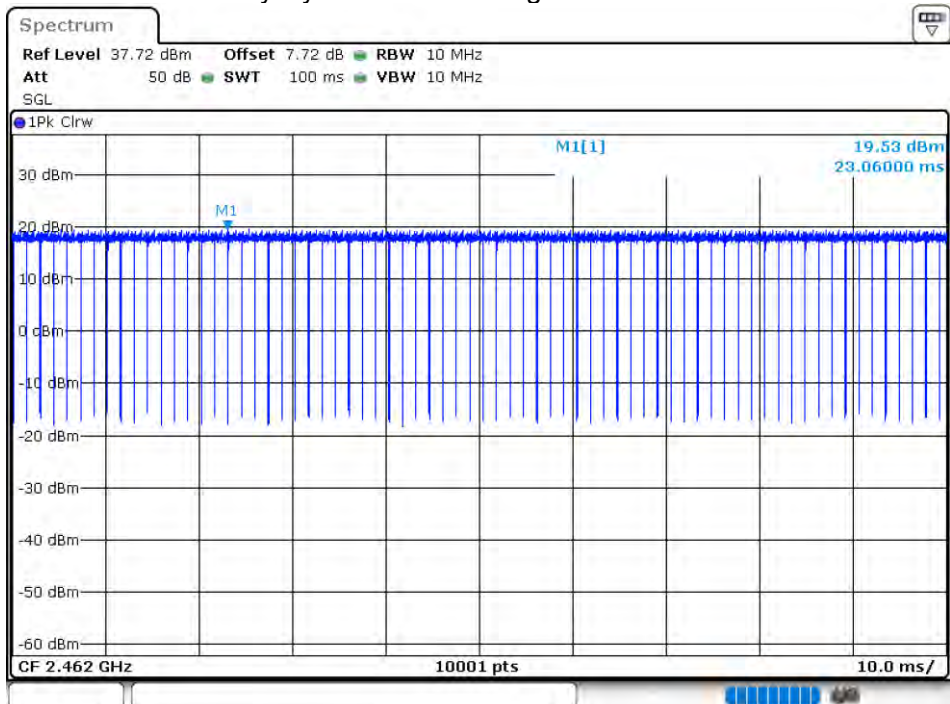


### Duty Cycle NVNT 802.11n(HT20) 2412MHz Ant 1

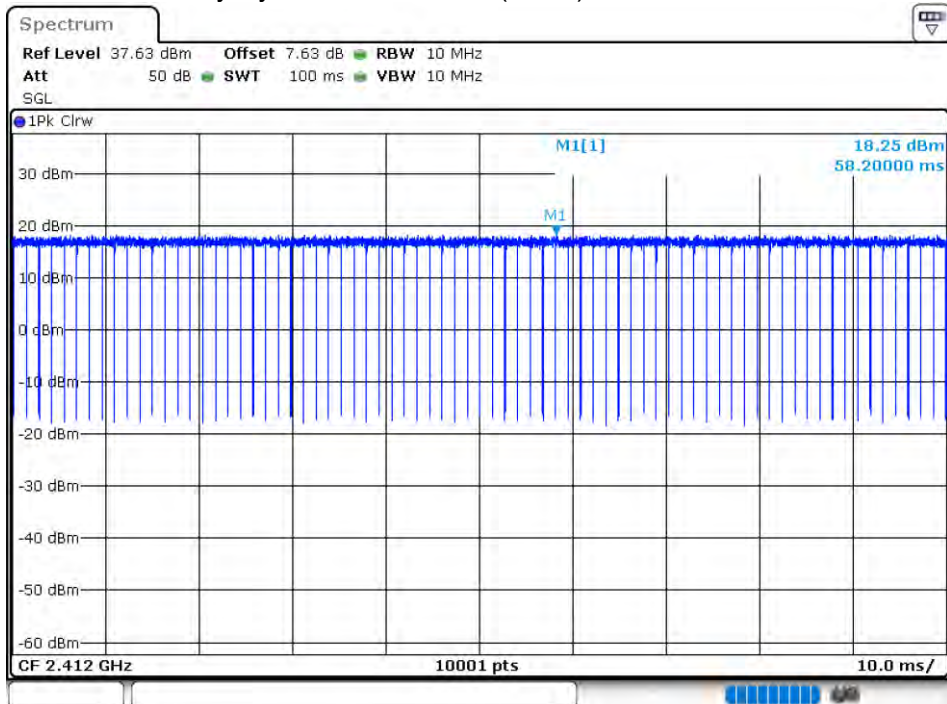


### Duty Cycle NVNT 802.11n(HT20) 2437MHz Ant 1

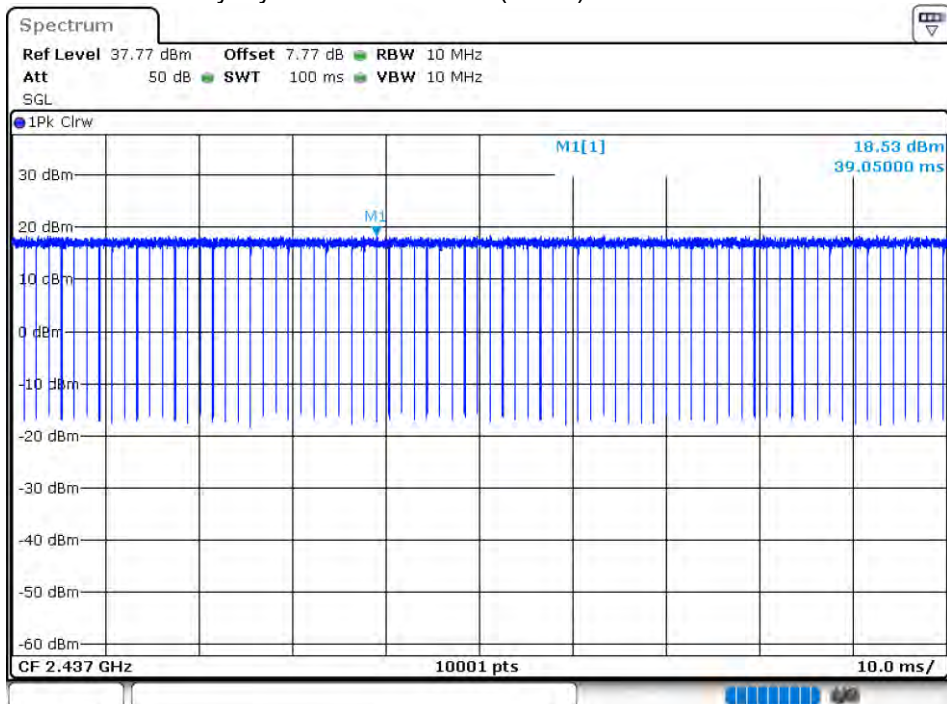


### Duty Cycle NVNT 802.11n(HT20) 2462MHz Ant 1

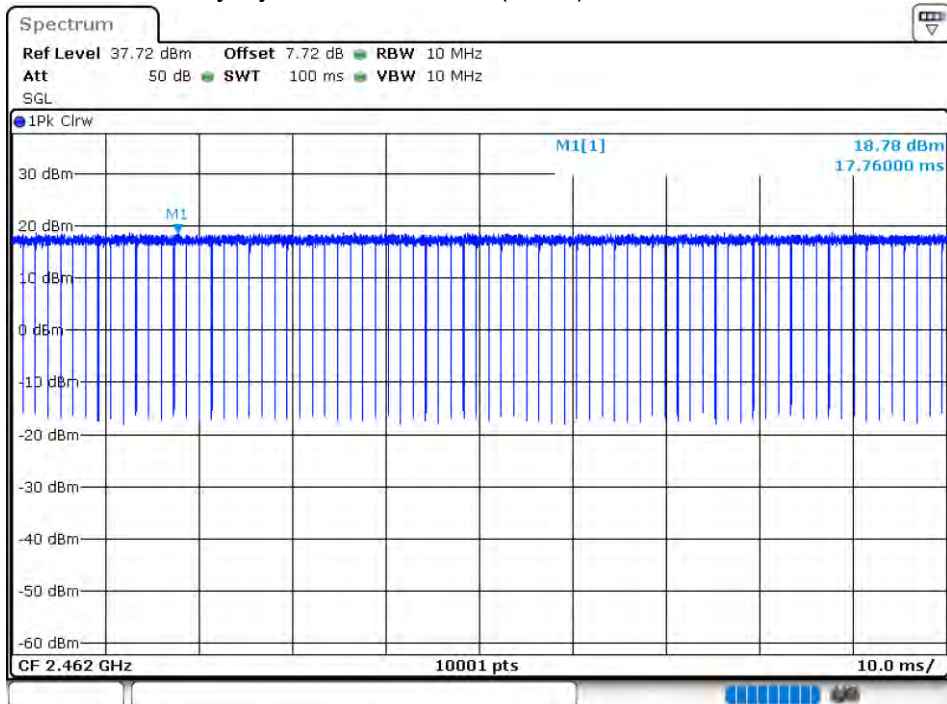


### Duty Cycle NVNT 802.11n(HT20) 2412MHz Ant 2

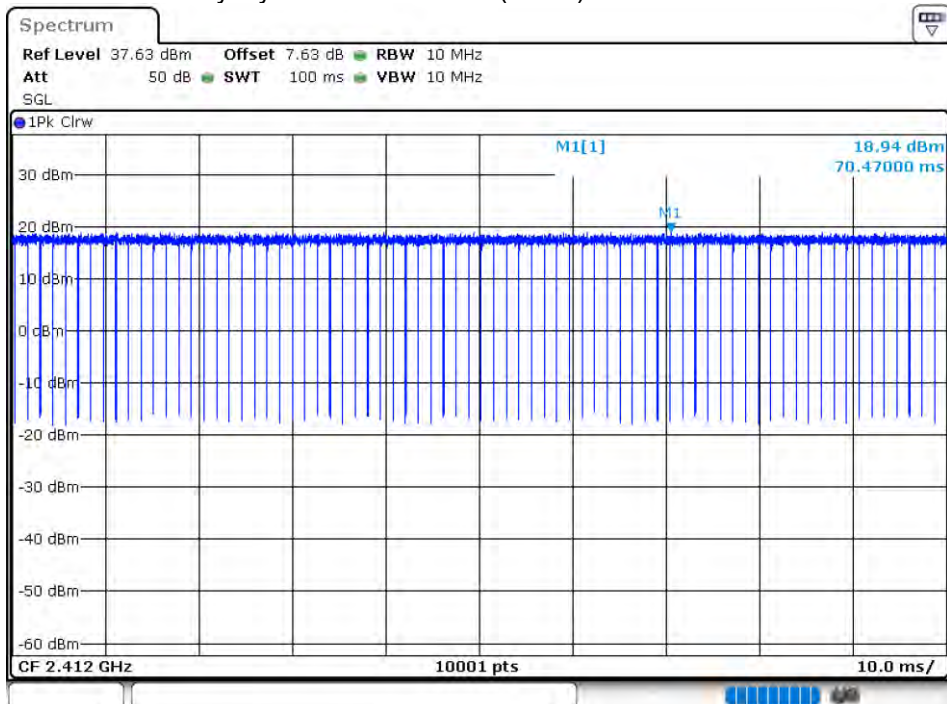


### Duty Cycle NVNT 802.11n(HT20) 2437MHz Ant 2

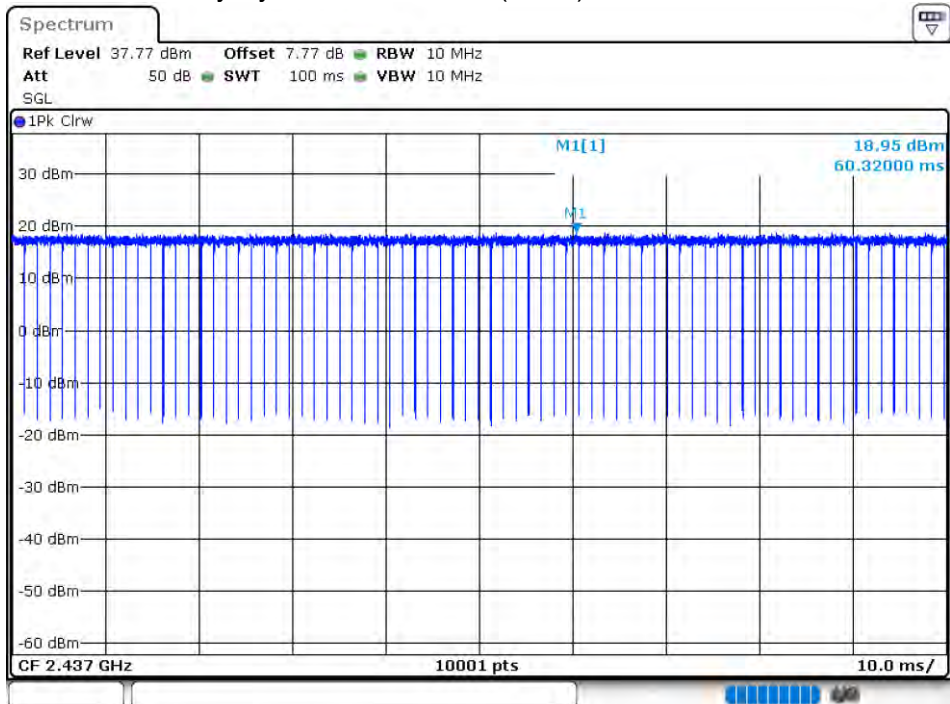


### Duty Cycle NVNT 802.11n(HT20) 2462MHz Ant 2

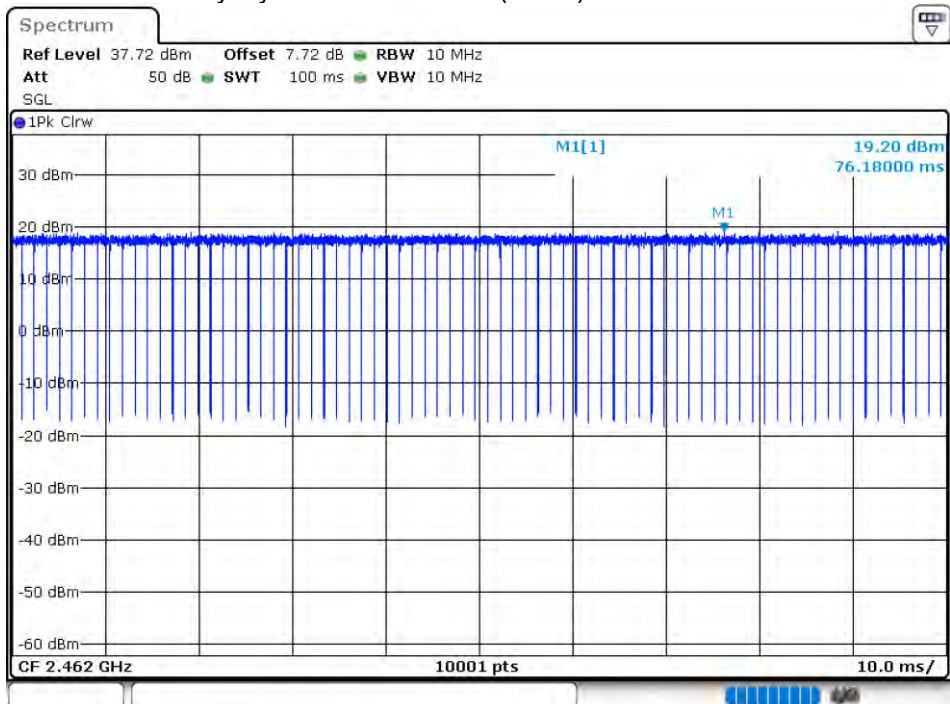


### Duty Cycle NVNT 802.11n(HT40) 2422MHz Ant 1

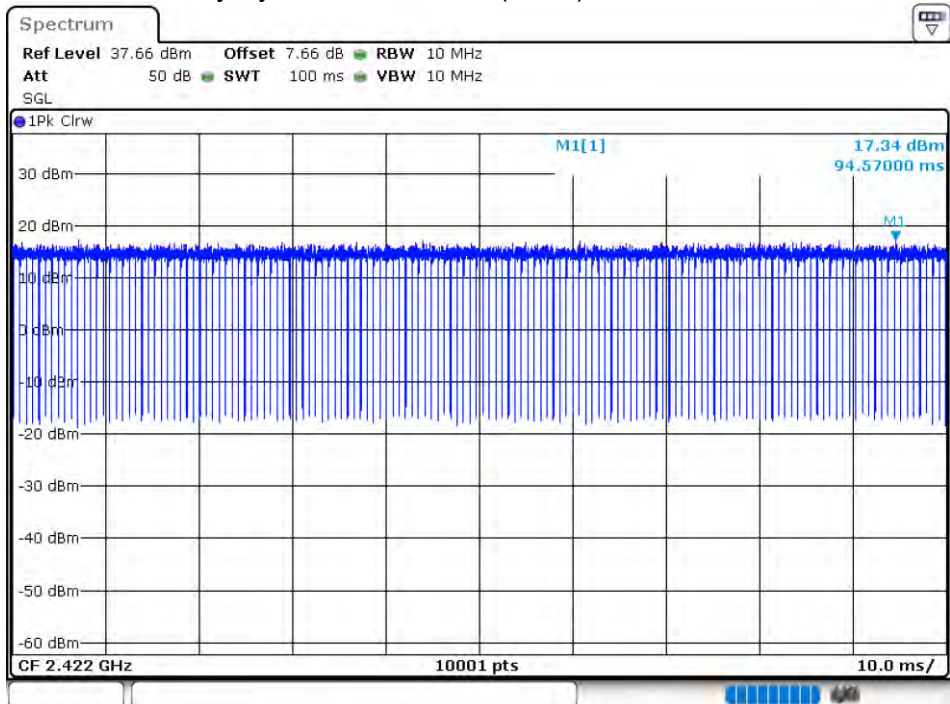


### Duty Cycle NVNT 802.11n(HT40) 2437MHz Ant 1

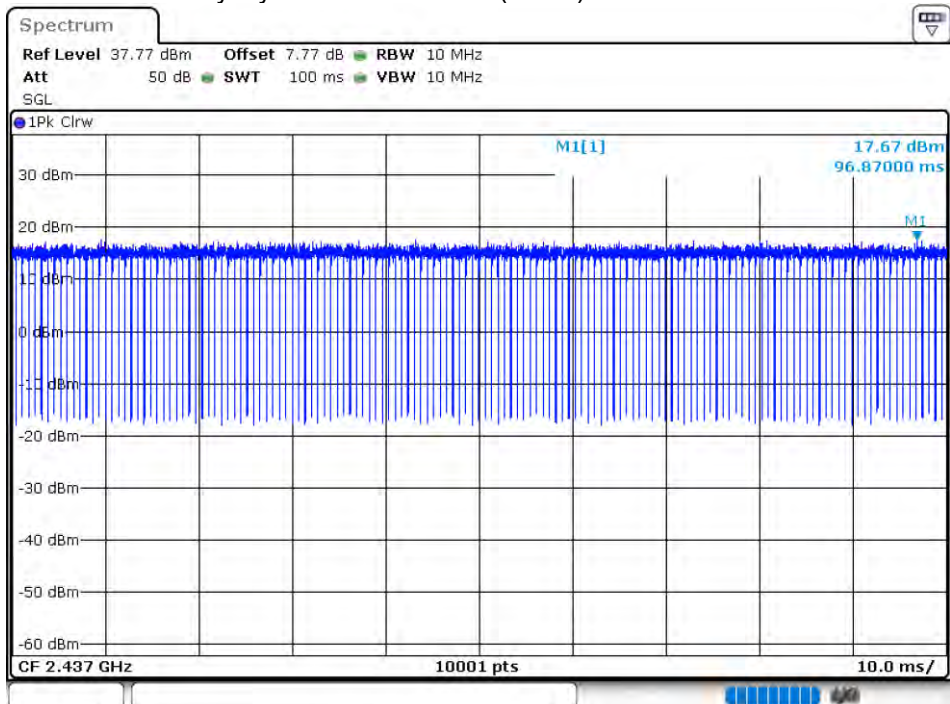


### Duty Cycle NVNT 802.11n(HT40) 2452MHz Ant 1

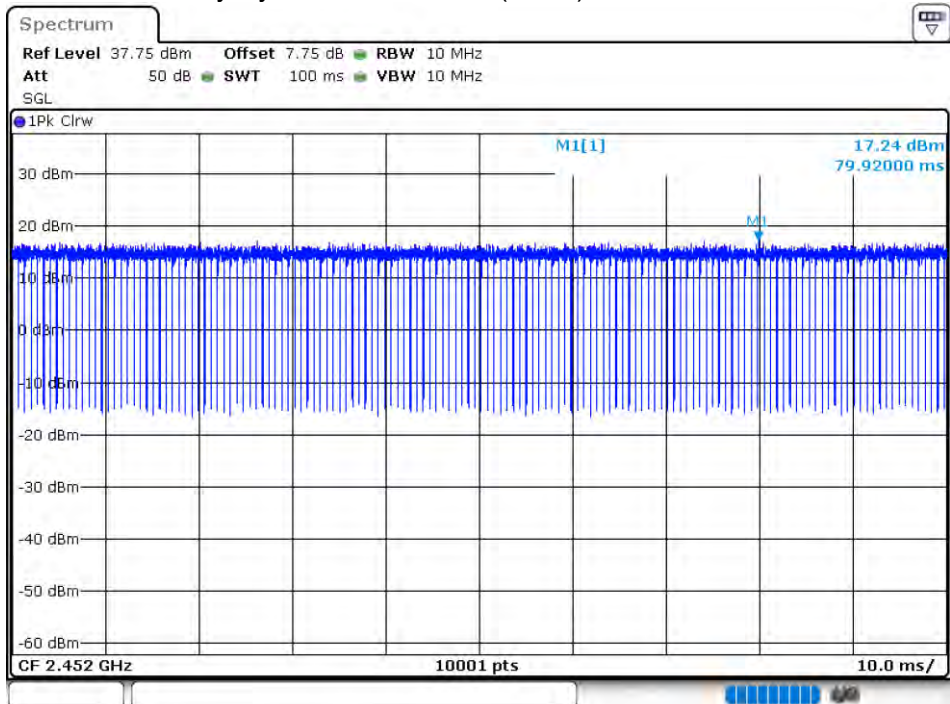


### Duty Cycle NVNT 802.11n(HT40) 2422MHz Ant 2

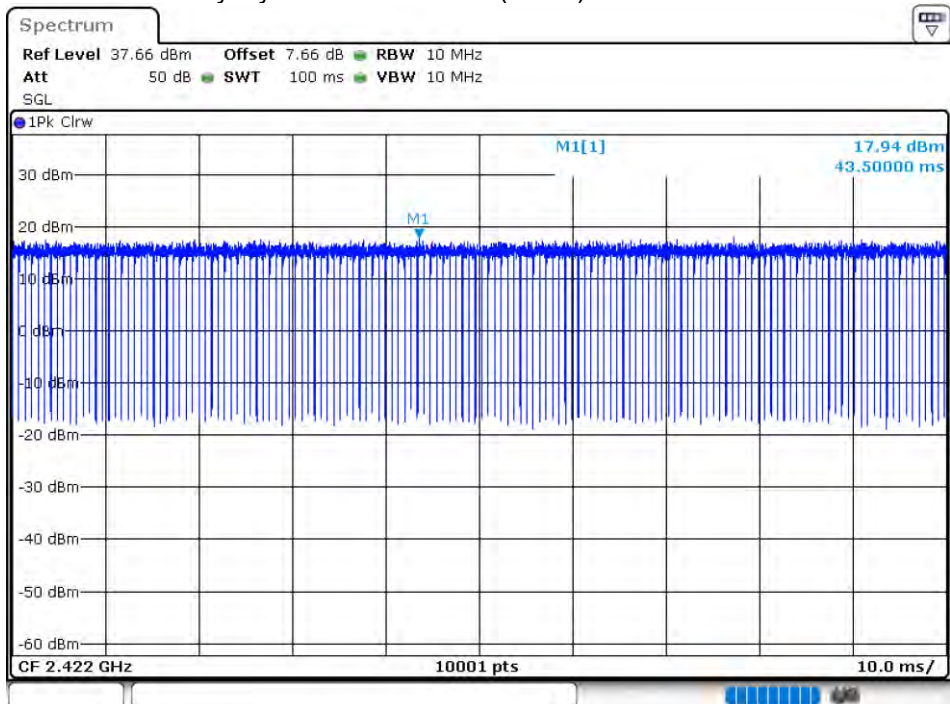

### Duty Cycle NVNT 802.11n(HT40) 2437MHz Ant 2

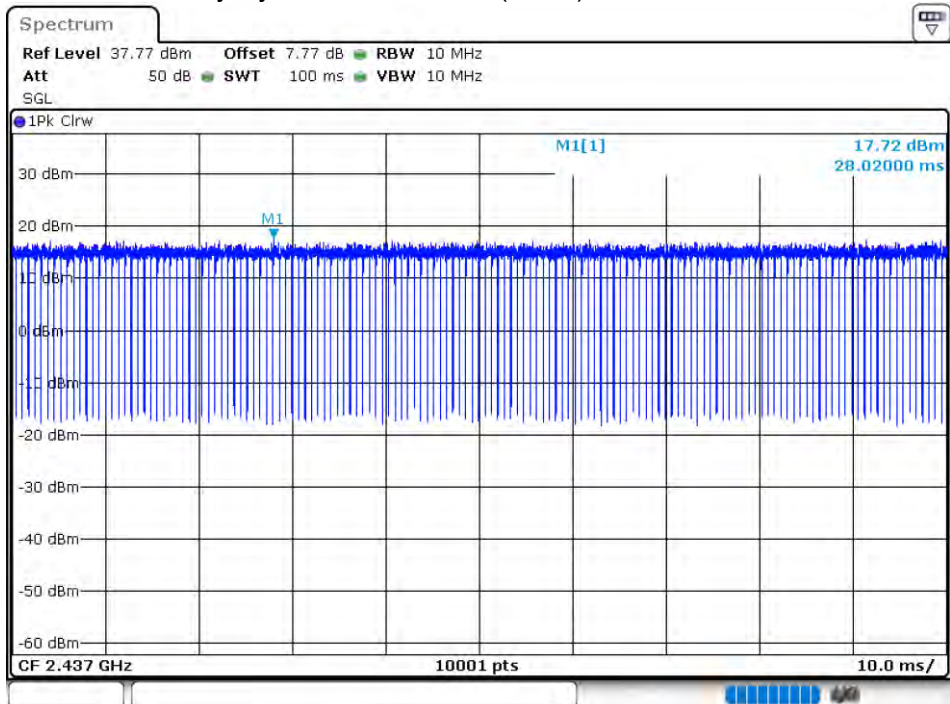

### Duty Cycle NVNT 802.11n(HT40) 2452MHz Ant 2

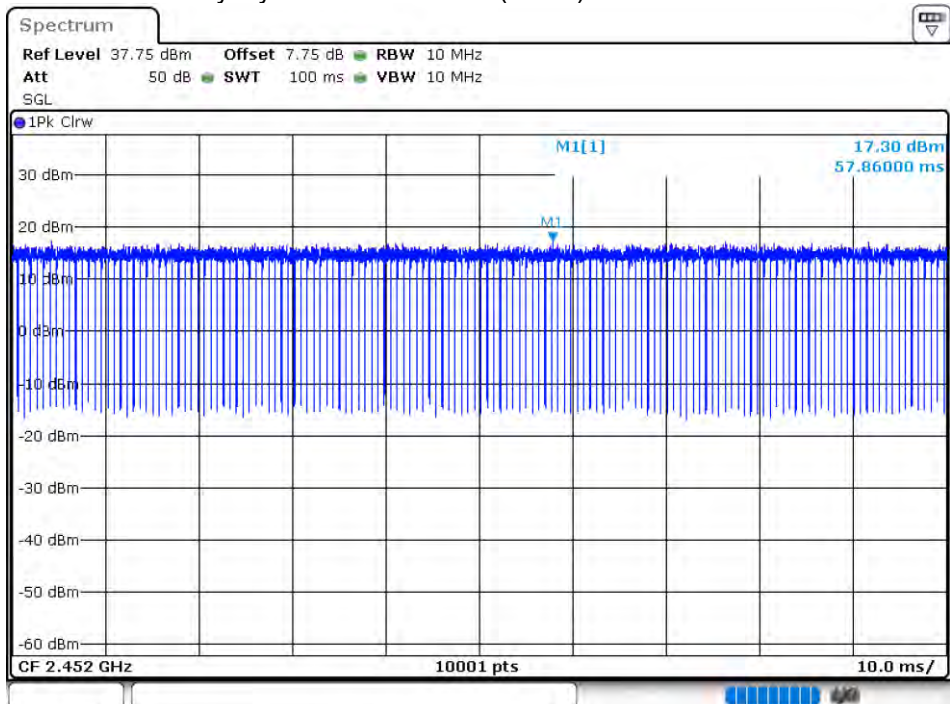

### 8.1.8 MAXIMUM CONDUCTED OUTPUT POWER

| Condition | Mode          | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|---------------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | 802.11b       | 2412            | Ant 1   | 14.56                 | 30          | Pass    |
| NVNT      | 802.11b       | 2437            | Ant 1   | 14.96                 | 30          | Pass    |
| NVNT      | 802.11b       | 2462            | Ant 1   | 14.61                 | 30          | Pass    |
| NVNT      | 802.11b       | 2412            | Ant 2   | 14.21                 | 30          | Pass    |
| NVNT      | 802.11b       | 2437            | Ant 2   | 14.29                 | 30          | Pass    |
| NVNT      | 802.11b       | 2462            | Ant 2   | 14.55                 | 30          | Pass    |
| NVNT      | 802.11g       | 2412            | Ant 1   | 13.77                 | 30          | Pass    |
| NVNT      | 802.11g       | 2437            | Ant 1   | 13.33                 | 30          | Pass    |
| NVNT      | 802.11g       | 2456            | Ant 1   | 13.65                 | 30          | Pass    |
| NVNT      | 802.11g       | 2412            | Ant 2   | 13.89                 | 30          | Pass    |
| NVNT      | 802.11g       | 2437            | Ant 2   | 13.52                 | 30          | Pass    |
| NVNT      | 802.11g       | 2456            | Ant 2   | 13.91                 | 30          | Pass    |
| NVNT      | 802.11n(HT20) | 2412            | Ant 1   | 13.2                  | 30          | Pass    |
| NVNT      | 802.11n(HT20) | 2437            | Ant 1   | 13.16                 | 30          | Pass    |
| NVNT      | 802.11n(HT20) | 2462            | Ant 1   | 13.58                 | 30          | Pass    |
| NVNT      | 802.11n(HT20) | 2412            | Ant 2   | 13.68                 | 30          | Pass    |
| NVNT      | 802.11n(HT20) | 2437            | Ant 2   | 13.29                 | 30          | Pass    |
| NVNT      | 802.11n(HT20) | 2462            | Ant 2   | 13.94                 | 30          | Pass    |
| NVNT      | 802.11n(HT40) | 2422            | Ant 1   | 13.45                 | 30          | Pass    |
| NVNT      | 802.11n(HT40) | 2437            | Ant 1   | 13.47                 | 30          | Pass    |
| NVNT      | 802.11n(HT40) | 2452            | Ant 1   | 13.33                 | 30          | Pass    |
| NVNT      | 802.11n(HT40) | 2422            | Ant 2   | 13.77                 | 30          | Pass    |
| NVNT      | 802.11n(HT40) | 2437            | Ant 2   | 13.63                 | 30          | Pass    |
| NVNT      | 802.11n(HT40) | 2452            | Ant 2   | 13.71                 | 30          | Pass    |


### 8.1.9 OCCUPIED CHANNEL BANDWIDTH

| Condition | Mode          | Frequency (MHz) | Antenna | 99% OBW (MHz) | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|---------------|-----------------|---------|---------------|-----------------------|-----------------------------|---------|
| NVNT      | 802.11b       | 2412            | Ant 1   | 11.4685       | 9.04                  | 0.5                         | Pass    |
| NVNT      | 802.11b       | 2437            | Ant 1   | 11.5085       | 8.12                  | 0.5                         | Pass    |
| NVNT      | 802.11b       | 2462            | Ant 1   | 11.4685       | 9.04                  | 0.5                         | Pass    |
| NVNT      | 802.11b       | 2412            | Ant 2   | 11.7483       | 9.56                  | 0.5                         | Pass    |
| NVNT      | 802.11b       | 2437            | Ant 2   | 11.7882       | 8.08                  | 0.5                         | Pass    |
| NVNT      | 802.11b       | 2462            | Ant 2   | 11.5085       | 8.6                   | 0.5                         | Pass    |
| NVNT      | 802.11g       | 2412            | Ant 1   | 16.9431       | 16.36                 | 0.5                         | Pass    |
| NVNT      | 802.11g       | 2437            | Ant 1   | 17.023        | 16.36                 | 0.5                         | Pass    |
| NVNT      | 802.11g       | 2462            | Ant 1   | 17.0629       | 16.32                 | 0.5                         | Pass    |
| NVNT      | 802.11g       | 2412            | Ant 2   | 17.0629       | 16.32                 | 0.5                         | Pass    |
| NVNT      | 802.11g       | 2437            | Ant 2   | 16.9431       | 16.32                 | 0.5                         | Pass    |
| NVNT      | 802.11g       | 2462            | Ant 2   | 16.9031       | 16.36                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT20) | 2412            | Ant 1   | 18.2617       | 16.96                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT20) | 2437            | Ant 1   | 17.9021       | 16.92                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT20) | 2462            | Ant 1   | 18.2218       | 17.6                  | 0.5                         | Pass    |
| NVNT      | 802.11n(HT20) | 2412            | Ant 2   | 17.982        | 17.6                  | 0.5                         | Pass    |
| NVNT      | 802.11n(HT20) | 2437            | Ant 2   | 18.1019       | 17.6                  | 0.5                         | Pass    |
| NVNT      | 802.11n(HT20) | 2462            | Ant 2   | 18.0619       | 17.56                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT40) | 2422            | Ant 1   | 36.6034       | 31.52                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT40) | 2437            | Ant 1   | 36.5235       | 35.68                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT40) | 2452            | Ant 1   | 36.4436       | 32.32                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT40) | 2422            | Ant 2   | 36.3636       | 35.68                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT40) | 2437            | Ant 2   | 36.7632       | 36.08                 | 0.5                         | Pass    |
| NVNT      | 802.11n(HT40) | 2452            | Ant 2   | 36.7632       | 36.32                 | 0.5                         | Pass    |

OBW NVNT 802.11b 2412MHz Ant 1




-6 dB BW NVNT 802.11b 2412MHz Ant 1

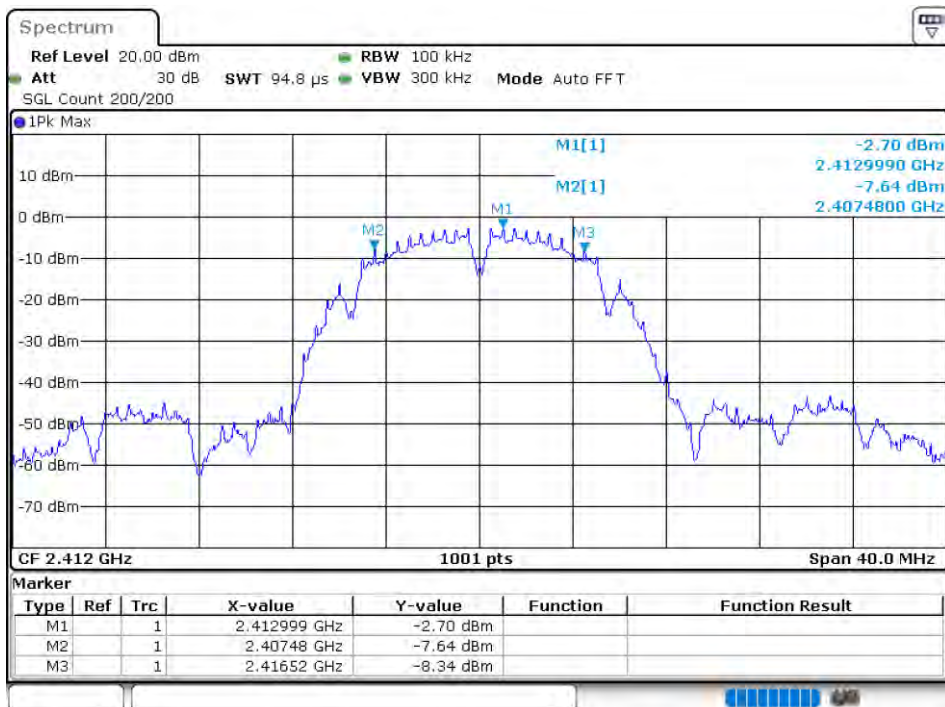

OBW NVNT 802.11b 2437MHz Ant 1



-6 dB BW NVNT 802.11b 2437MHz Ant 1

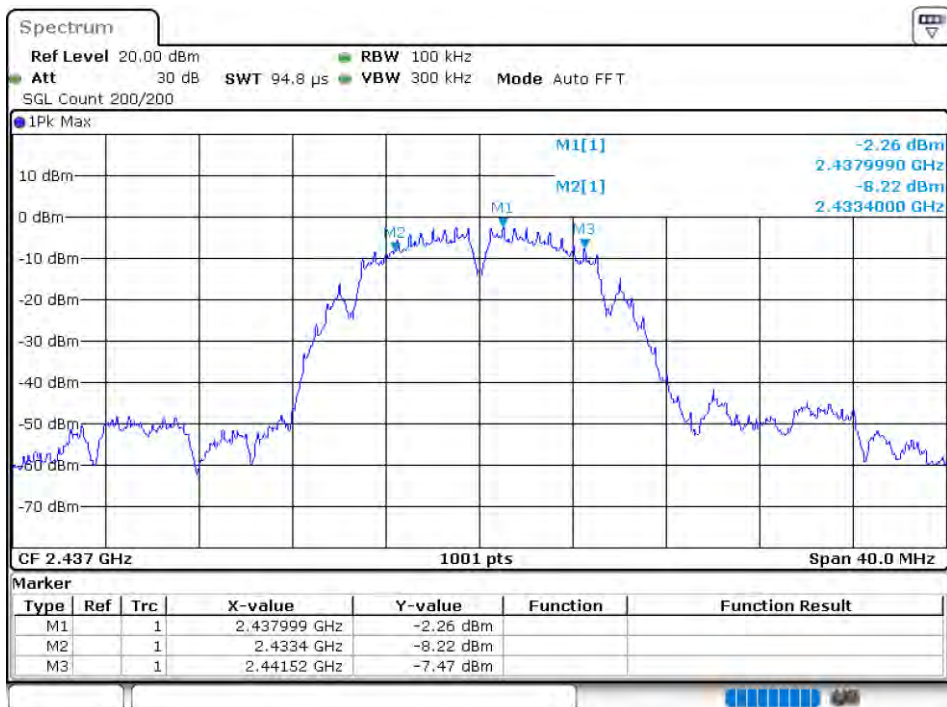

OBW NVNT 802.11b 2462MHz Ant 1




-6 dB BW NVNT 802.11b 2462MHz Ant 1



OBW NVNT 802.11b 2412MHz Ant 2




### -6 dB BW NVNT 802.11b 2412MHz Ant 2

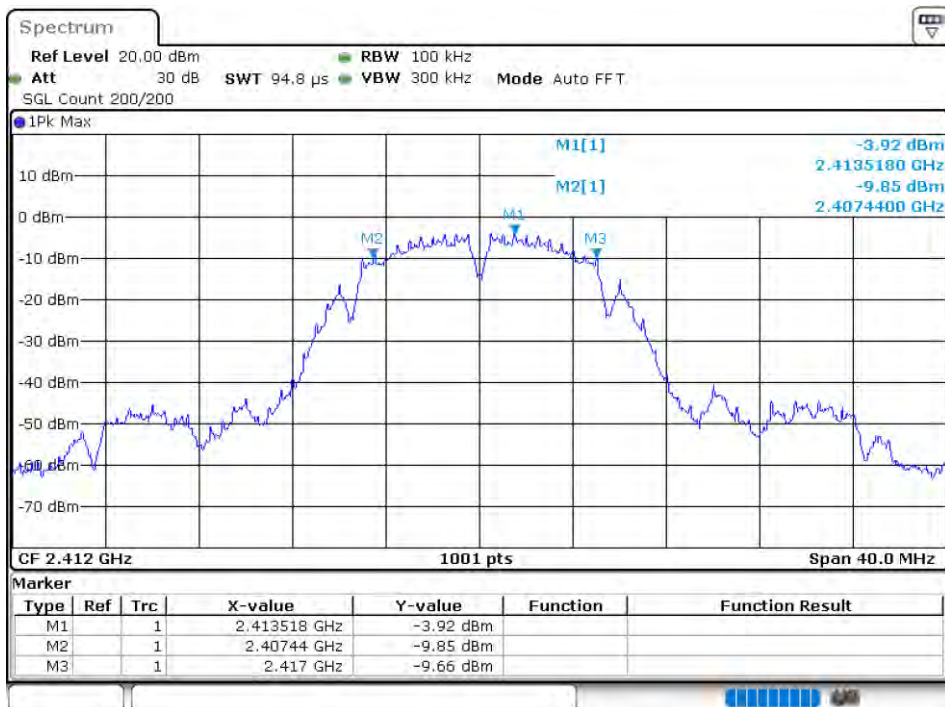

### OBW NVNT 802.11b 2437MHz Ant 2




### -6 dB BW NVNT 802.11b 2437MHz Ant 2

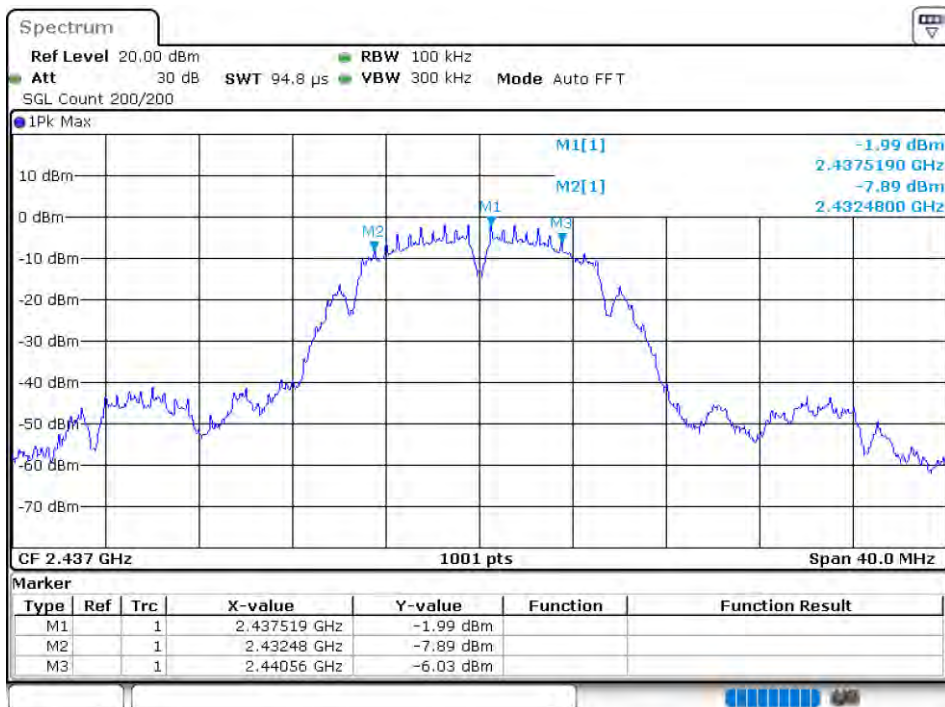

### OBW NVNT 802.11b 2462MHz Ant 2




-6 dB BW NVNT 802.11b 2462MHz Ant 2

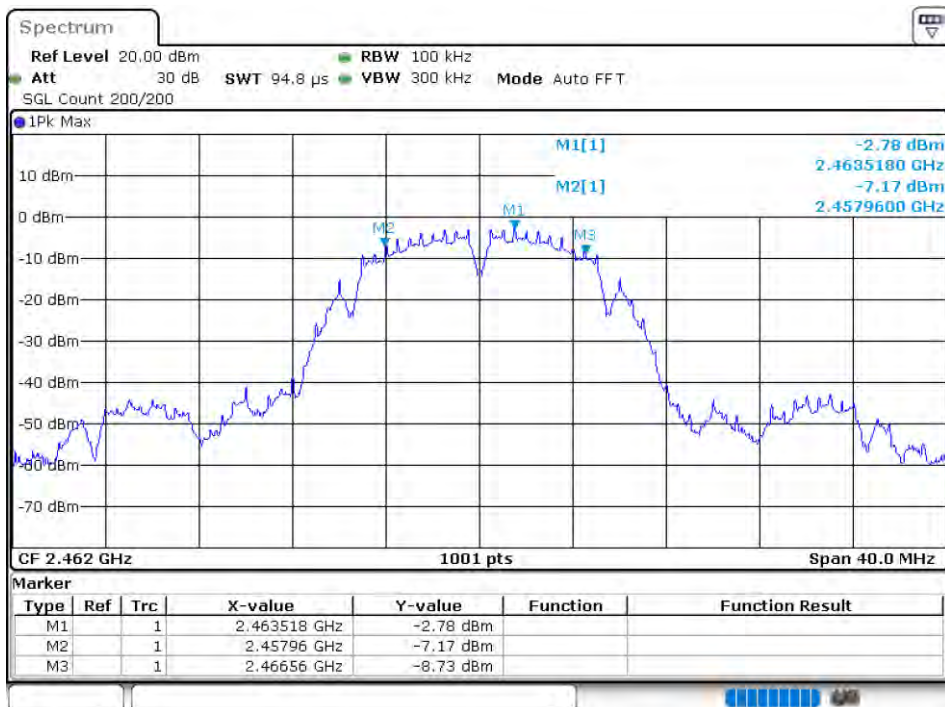

OBW NVNT 802.11g 2412MHz Ant 1




### -6 dB BW NVNT 802.11g 2412MHz Ant 1

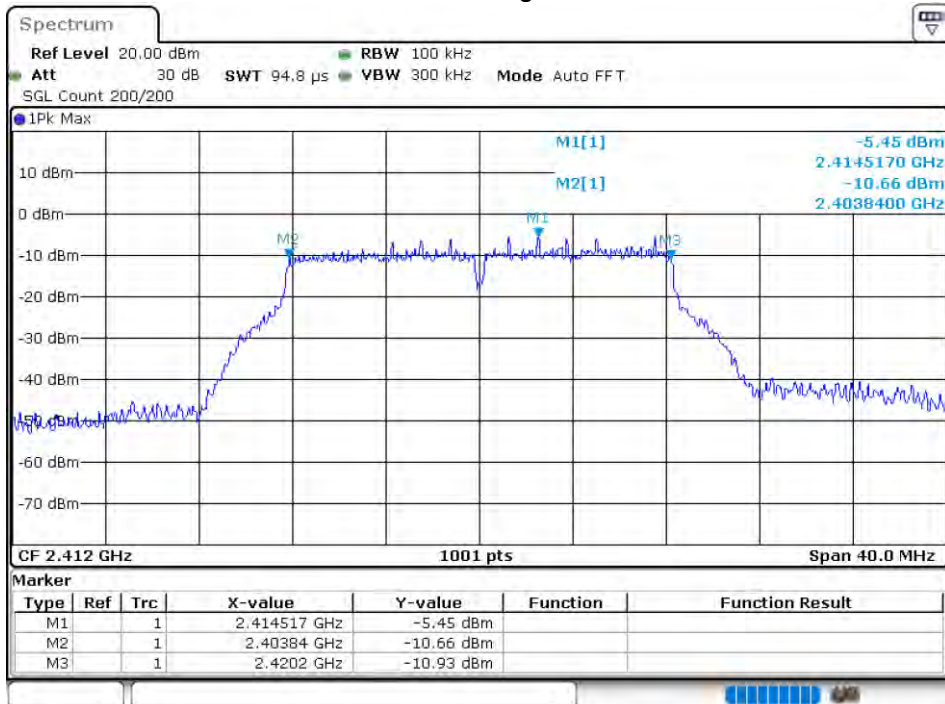

### OBW NVNT 802.11g 2437MHz Ant 1



### -6 dB BW NVNT 802.11g 2437MHz Ant 1

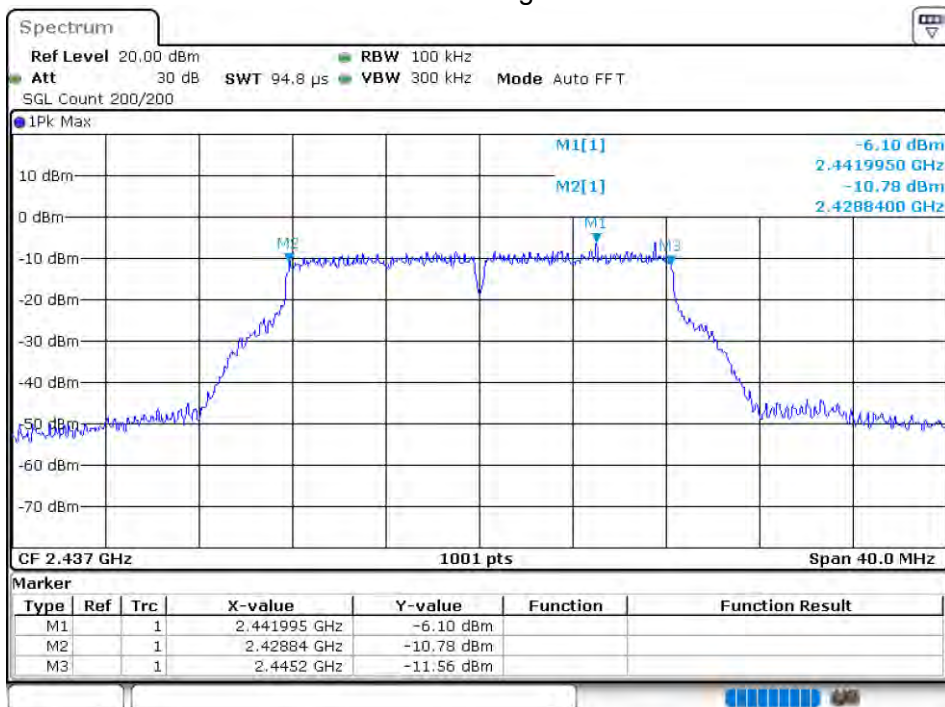

### OBW NVNT 802.11g 2462MHz Ant 1

