

FCC RADIO TEST REPORT

FCC ID: 2AXDW-PNTSV

Product: KettyBot

Trade Mark: PUDU

Model No.: PNT

Family Model: N/A

Report No.: S21082003008003

Issue Date: Oct 16, 2021

Prepared for

SHENZHEN PUDU TECHNOLOGY CO., LTD.

Room 501, Building A, Block 1, Phase 1, Shenzhen International
Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China
518057

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

FCC RADIO TEST REPORT	1
FCC ID: 2AXDW-PNTSV	1
PREPARED FOR	1
PREPARED BY	1
TABLE OF CONTENTS	2
1 TEST RESULT CERTIFICATION	5
NOTE: A PART OF TEST DATA OF THIS REPORT ARE BASED ON THE TEST REPORT	5
2 SUMMARY OF TEST RESULTS	6
3 FACILITIES AND ACCREDITATIONS	7
3.1 FACILITIES	7
1/F, BUILDING E, FENDA SCIENCE PARK SANWEI, XIXIANG, BAO'AN DISTRICT	7
3.2 LABORATORY ACCREDITATIONS AND LISTINGS	7
3.3 MEASUREMENT UNCERTAINTY	7
4 GENERAL DESCRIPTION OF EUT	8
REVISION HISTORY	11
5 DESCRIPTION OF TEST MODES	12
AC POWER LINE CONDUCTED EMISSION WAS TESTED UNDER MAXIMUM OUTPUT POWER	12
6 SETUP OF EQUIPMENT UNDER TEST	14
6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	14
FOR AC CONDUCTED EMISSION MODE	14
FOR RADIATED TEST CASES	14
FOR CONDUCTED TEST CASES	14
6.2 SUPPORT EQUIPMENT	15
6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS	16
RADIATION TEST EQUIPMENT	16
7 TEST REQUIREMENTS	18
7.1 CONDUCTED EMISSIONS TEST	18
7.1.1 Applicable Standard	18
7.1.2 Conformance Limit	18
7.1.3 Measuring Instruments	18
7.1.4 Test Configuration	18
7.1.5 Test Procedure	18
7.1.6 Test Results	19
7.2 RADIATED SPURIOUS EMISSION	23
7.2.1 Applicable Standard	23
7.2.2 Conformance Limit	23
7.2.3 Measuring Instruments	24
7.2.4 Test Configuration	24
7.2.5 Test Procedure	25
7.2.6 Test Results	26

NOTE: (1) EMISSION LEVEL= ANTENNA FACTOR + CABLE LOSS + READ LEVEL - PREAMP

FACTOR.....	31
NOTE: (1) EMISSION LEVEL= ANTENNA FACTOR + CABLE LOSS + READ LEVEL - PREAMP FACTOR.....	32
SPURIOUS EMISSION IN RESTRICTED BAND 2310MHZ -18000MHZ	33
NOTE:MODULE 1 THE WORST ANTENNA1 FOR SISO MODE.	34
NOTE:MODULE 4 THE WORST ANTENNA FOR SISO MODE,ANTENNA1 IS THE WORST CASE FOR SISO MODE.	36
SPURIOUS EMISSION IN RESTRICTED BANDS 3260MHZ- 18000MHZ	37
7.3 6DB BANDWIDTH.....	38
7.3.1 <i>Applicable Standard</i>	38
7.3.2 <i>Conformance Limit</i>	38
7.3.3 <i>Measuring Instruments</i>	38
7.3.4 <i>Test Setup</i>	38
7.3.5 <i>Test Procedure</i>	38
7.3.6 <i>Test Results</i>	39
TEST DATA REFERENCE ATTACHMENT.	39
7.4 DUTY CYCLE.....	40
7.4.1 <i>Applicable Standard</i>	40
7.4.2 <i>Conformance Limit</i>	40
7.4.3 <i>Measuring Instruments</i>	40
7.4.4 <i>Test Setup</i>	40
7.4.5 <i>Test Procedure</i>	40
7.4.6 <i>Test Results</i>	41
TEST DATA REFERENCE ATTACHMENT.	41
7.5 MAXIMUM OUTPUT POWER.....	42
7.5.1 <i>Applicable Standard</i>	42
7.5.2 <i>Conformance Limit</i>	42
7.5.3 <i>Measuring Instruments</i>	42
7.5.4 <i>Test Setup</i>	42
7.5.5 <i>Test Procedure</i>	42
7.5.6 <i>EUT operation during Test</i>	42
7.5.7 <i>Test Results</i>	43
TEST DATA REFERENCE ATTACHMENT.	43
7.6 POWER SPECTRAL DENSITY	44
7.6.1 <i>Applicable Standard</i>	44
7.6.2 <i>Conformance Limit</i>	44
7.6.3 <i>Measuring Instruments</i>	44
7.6.4 <i>Test Setup</i>	44
7.6.5 <i>Test Procedure</i>	44
7.6.6 <i>Test Results</i>	45
7.7 CONDUCTED BAND EDGE MEASUREMENT.....	46
7.7.1 <i>Applicable Standard</i>	46
7.7.2 <i>Conformance Limit</i>	46
7.7.3 <i>Measuring Instruments</i>	46
7.7.4 <i>Test Setup</i>	46
7.7.5 <i>Test Procedure</i>	46
7.7.6 <i>Test Results</i>	47
TEST DATA REFERENCE ATTACHMENT.	47
7.8 SPURIOUS RF CONDUCTED EMISSIONS.....	48
7.8.1 <i>Conformance Limit</i>	48
7.8.2 <i>Measuring Instruments</i>	48

7.8.3	Test Setup	48
7.8.4	Test Procedure	48
7.8.5	Test Results	48
TEST DATA REFERENCE ATTACHMENT.		48
7.9	ANTENNA APPLICATION	49
7.9.1	Antenna Requirement	49
7.9.2	Result	49
8	TEST RESULTS	50
MODULE 1:		50
8.1.1	DUTY CYCLE	50
8.1.2	MAXIMUM CONDUCTED OUTPUT POWER	57
8.1.3	OCCUPIED CHANNEL BANDWIDTH	58
8.1.4	MAXIMUM POWER SPECTRAL DENSITY LEVEL	71
8.1.5	BAND EDGE	78
8.1.6	CONDUCTED RF SPURIOUS EMISSION	87
MODULE 2:		100
8.1.7	DUTY CYCLE	100
8.1.8	MAXIMUM CONDUCTED OUTPUT POWER	110
8.1.9	OCCUPIED CHANNEL BANDWIDTH	111
8.1.10	MAXIMUM POWER SPECTRAL DENSITY LEVEL	130
8.1.11	BAND EDGE	140
8.1.12	CONDUCTED RF SPURIOUS EMISSION	153
MIMO 2.4G WIFI:		172
8.1.13	MAXIMUM POWER SPECTRAL DENSITY LEVEL	172
8.1.14	BAND EDGE	176
8.1.15	CONDUCTED RF SPURIOUS EMISSION	181
END OF REPORT		187

1 TEST RESULT CERTIFICATION

Applicant's name	SHENZHEN PUDU TECHNOLOGY CO., LTD.
Address	Room 501, Building A, Block 1, Phase 1, Shenzhen International Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China 518057
Manufacturer's Name	SHENZHEN PUDU TECHNOLOGY CO., LTD.
Address	Room 501, Building A, Block 1, Phase 1, Shenzhen International Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China 518057
Product description	
Product name	KettyBot
Model and/or type reference	PNT
Family Model	N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C FCC KDB 662911 D01 Multiple Transmitter Output v02r01 ANSI C63.10-2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

*Note: a part of test data of this report are based on the test report
S21060901210003, dated by 09 Jul. 2021*

Date of Test : 09 Jun. 2021 ~ 08 Jul. 2021
15 Sep. 2021 ~ 14 Oct. 2021

Testing Engineer : 
(Allen Liu)

Authorized Signatory : 
(Alex Li)

2 SUMMARY OF TEST RESULTS**FCC Part15 (15.247), Subpart C**

Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Maximum Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012
The Certificate Registration Number is 9270A-1.

Accredited by FCC, September 6, 2013
The Certificate Registration Number is 238937.

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd

Site Location : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(>6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	KettyBot
Trade Mark	PUDU
FCC ID	2AXDW-PNTSV
Model No.	PNT
Family Model	N/A
Model Difference	N/A
Operating Frequency	module 1:2412-2462MHz for 802.11b/g/11n(HT20/HT40); module 2: 2412-2462MHz for 802.11b/g/11n(HT20);
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Number of Channels	11 channels for 802.11b/g/11n(HT20); 9 channels for 802.11n(HT40);
Antenna Type	Module 2 Main Antenna 1: FPCB antenna AUX Antenna 2: FPCB antenna Module 1 Antenna 1: FPCB antenna
Smart system	(Module 1) ☒ SISO for 802.11b/g/n (Module 2) ☒ SISO for 802.11b/g/n ☒ MIMO for 802.11n20/n40
Antenna Gain	Module 2 Antenna 1: 3.5dBi Antenna 2: 3.5dBi Module 1 Antenna 1: 3.5dBi
Power supply	☒ DC supply: Battery Model:7S8P DC 25.55V, 25600mAh 1#battery: DC 25.6V, 20000mAh 2#battery: DC 25.9V, 24300mAh
	☒ Adapter supply: Model: FY29008000 Input: 100-240V~50/60Hz 3A 300VA Output: 29.0V $\overline{\text{---}}$ 8.0A 232.0W

Hardware Version	B00
Software Version	9.1.0.6

Note: 1. Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

2.

Table for Filed Antenna

Antenna	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	FPCB antenna	IPEX	3.5	Wifi Antenna
2	N/A	N/A	FPCB antenna	IPEX	3.5	Wifi Antenna
3	N/A	N/A	FPCB antenna	IPEX	3.5	Wifi Antenna

This EUT has three modules, module 2 supports Bluetooth, WIFI2.4G / 5G, module 2 has two antennas, Antenna 1 supports Bluetooth, WIFI2.4G / 5G, Antenna 2 supports WIFI2.4G / 5G. The module 1 only supports Bluetooth , WIFI 2.4G. The module 1 has only one antenna. module 3 only supports WCDMA/LTE. The module 3 has only one antenna. Antenna 4 supports WCDMA/LTE.

The module 2 for 2.4G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11b/g	1TX, 1RX
802.11n(20MHz,40MHz)	1TX, 1RX/2TX, 2RX

For 2.4GHz mode, Antenna 2,3 are transmitting, each with the same directional gain.

For power spectral density (PSD) measurements: Directional gain= G_{ANT} + Array Gain=3.5dBi + 3.01 = 6.51dBi. For power measurements: Directional gain= G_{ANT} + Array Gain=3.5dBi + 0 =3.5dBi.

Note: G_{ANT} means antenna gain for the same gain in dBi.

For power spectral density (PSD) measurements: Array Gain = $10\log(N_{ANT}/N_{SS})$ dB.

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements:

N_{ANT} = number of transmit antennas and

N_{SS} = number of spatial streams. (Assume $N_{SS} = 1$ unless you have specific information to the contrary.)

Revision History

[illegible]

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0); were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for 802.11b/g/n (HT20/HT40):

Channel	Frequency(MHz)
1	2412
2	2417
...	...
5	2432
6	2437
...	...
10	2457
11	2462

Note: $f_c = 2412\text{MHz} + (k-1) \times 5\text{MHz}$ $k=1$ to 11

AC power line Conducted Emission was tested under maximum output power.


Test Mode:

Test Items	Mode	Data Rate	Channel	Ant
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1/2/3
	11g/BPSK	6 Mbps	1/6/11	1/2/3
	11n HT20	MCS0	1/6/11	1/2/3
	11n HT40	MCS7	3/6/9	1/2/3
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1/2/3
	11g/BPSK	6 Mbps	1/6/11	1/2/3
	11n HT20	MCS0	1/6/11	1/2/3
	11n HT40	MCS7	3/6/9	1/2/3
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1/2/3
	11g/BPSK	6 Mbps	1/6/11	1/2/3
	11n HT20	MCS0	1/6/11	1/2/3
	11n HT40	MCS7	3/6/9	1/2/3
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	1/2/3
	11g/BPSK	6 Mbps	1/6/11	1/2/3
	11n HT20	MCS0	1/6/11	1/2/3
	11n HT40	MCS7	3/6/9	1/2/3
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1/2/3
	11g/BPSK	6 Mbps	1/6/11	1/2/3
	11n HT20	MCS0	1/6/11	1/2/3
	11n HT40	MCS7	3/6/9	1/2/3

6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

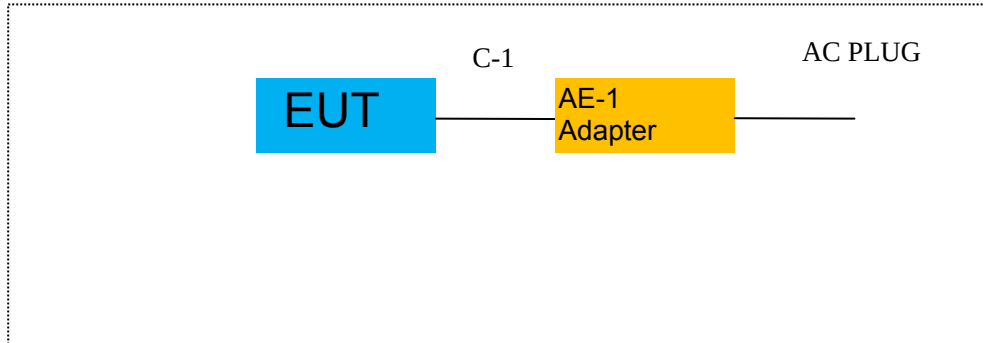

For Radiated Test Cases



For Conducted Test Cases

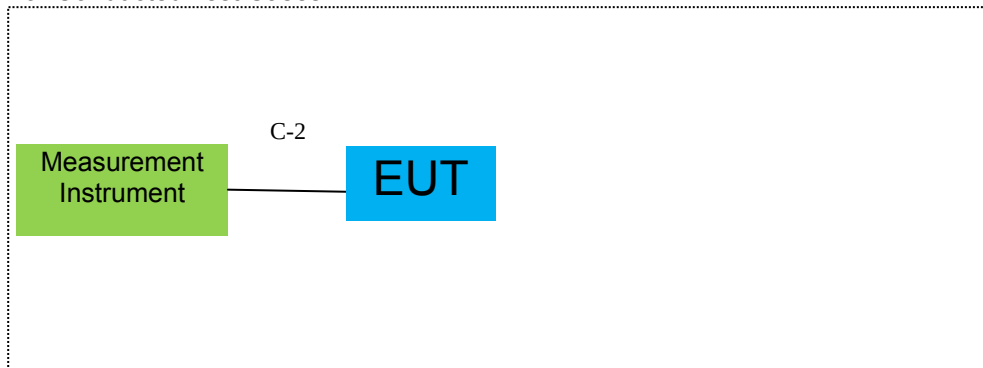

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	FY29008000	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	Power Cable	NO	NO	1.2m
C-2	RF Cable	YES	NO	0.1m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) During the battery power test, the battery is fully charged.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2021.04.27	2022.04.26	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
4	Test Receiver	R&S	ESPI7	101318	2021.04.27	2022.04.26	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.29	2022.03.28	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2021.03.29	2022.03.28	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2020.11.19	2021.11.18	1 year
9	Amplifier	EMC	EMC051835SE	980246	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2020.11.19	2021.11.18	1 year
11	Power Meter	DARE	RPR3006W	15I00041SN084	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2019.08.06	2022.08.05	3 year
16	Filter	TRILTHIC	2400MHz	29	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2021.04.27	2022.04.26	1 year
2	LISN	R&S	ENV216	101313	2021.04.27	2022.04.26	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2021.04.27	2022.04.26	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2023.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a)

7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

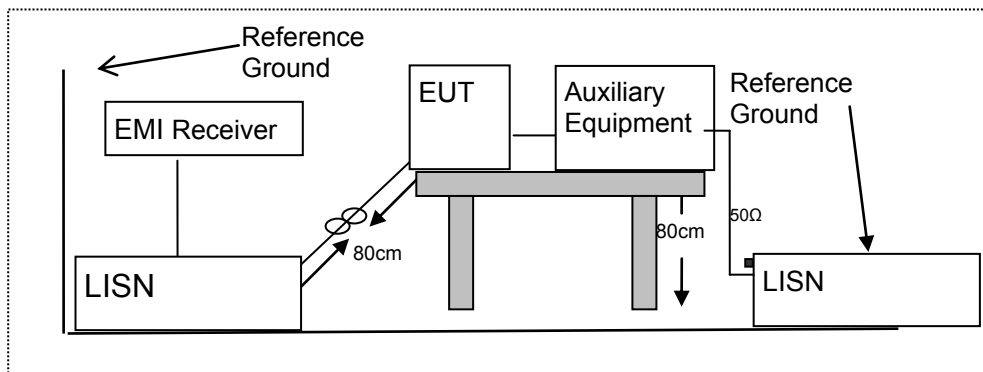

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


7.1.6 Test Results

EUT:	KettyBot	Model Name :	PNT
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode:	Normal Link(module 1)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2938	39.64	9.54	49.18	60.41	-11.23	QP
0.2938	29.79	9.54	39.33	50.41	-11.08	AVG
0.5220	40.34	9.55	49.89	56.00	-6.11	QP
0.5220	30.47	9.55	40.02	46.00	-5.98	AVG
0.7137	37.31	9.55	46.86	56.00	-9.14	QP
0.7137	28.70	9.55	38.25	46.00	-7.75	AVG
0.9100	36.11	9.56	45.67	56.00	-10.33	QP
0.9100	26.10	9.56	35.66	46.00	-10.34	AVG
4.4698	38.96	9.62	48.58	56.00	-7.42	QP
4.4698	29.83	9.62	39.45	46.00	-6.55	AVG
5.6379	37.80	9.63	47.43	60.00	-12.57	QP
5.6379	27.95	9.63	37.58	50.00	-12.42	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

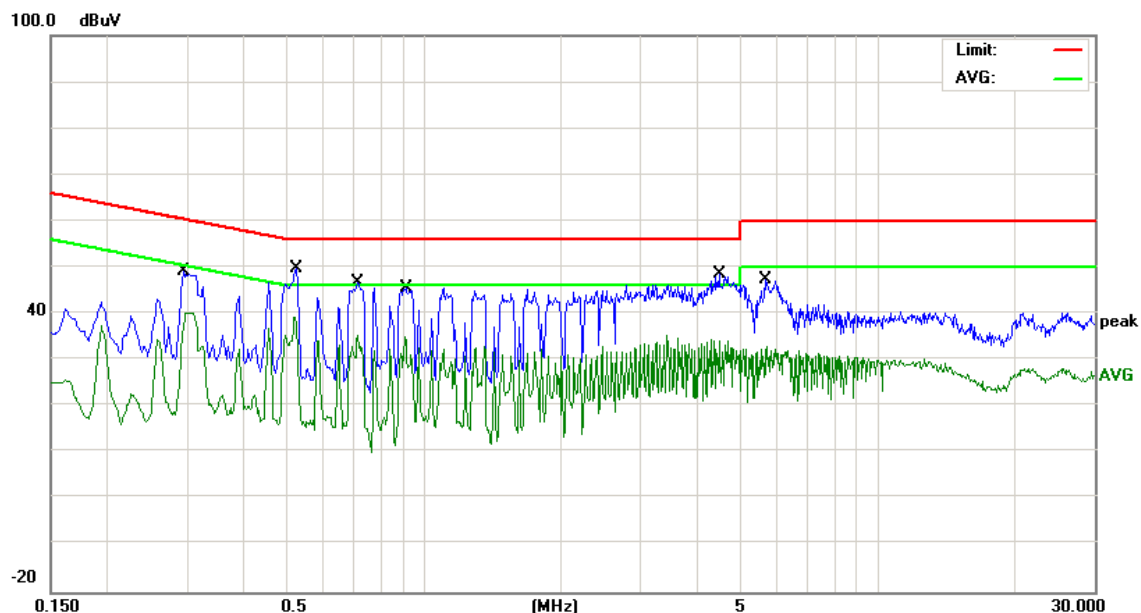


EUT:	KettyBot	Model Name :	PNT
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode:	Normal Link(module 1)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.3059	39.41	9.53	48.94	60.08	-11.14	QP
0.3059	30.13	9.53	39.66	50.08	-10.42	AVG
0.5180	39.81	9.54	49.35	56.00	-6.65	QP
0.5180	30.04	9.54	39.58	46.00	-6.42	AVG
0.7138	39.08	9.54	48.62	56.00	-7.38	QP
0.7138	28.91	9.54	38.45	46.00	-7.55	AVG
0.9140	36.94	9.55	46.49	56.00	-9.51	QP
0.9140	27.14	9.55	36.69	46.00	-9.31	AVG
1.2980	36.33	9.55	45.88	56.00	-10.12	QP
1.2980	26.20	9.55	35.75	46.00	-10.25	AVG
2.5939	37.77	9.58	47.35	56.00	-8.65	QP
2.5939	27.78	9.58	37.36	46.00	-8.64	AVG

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

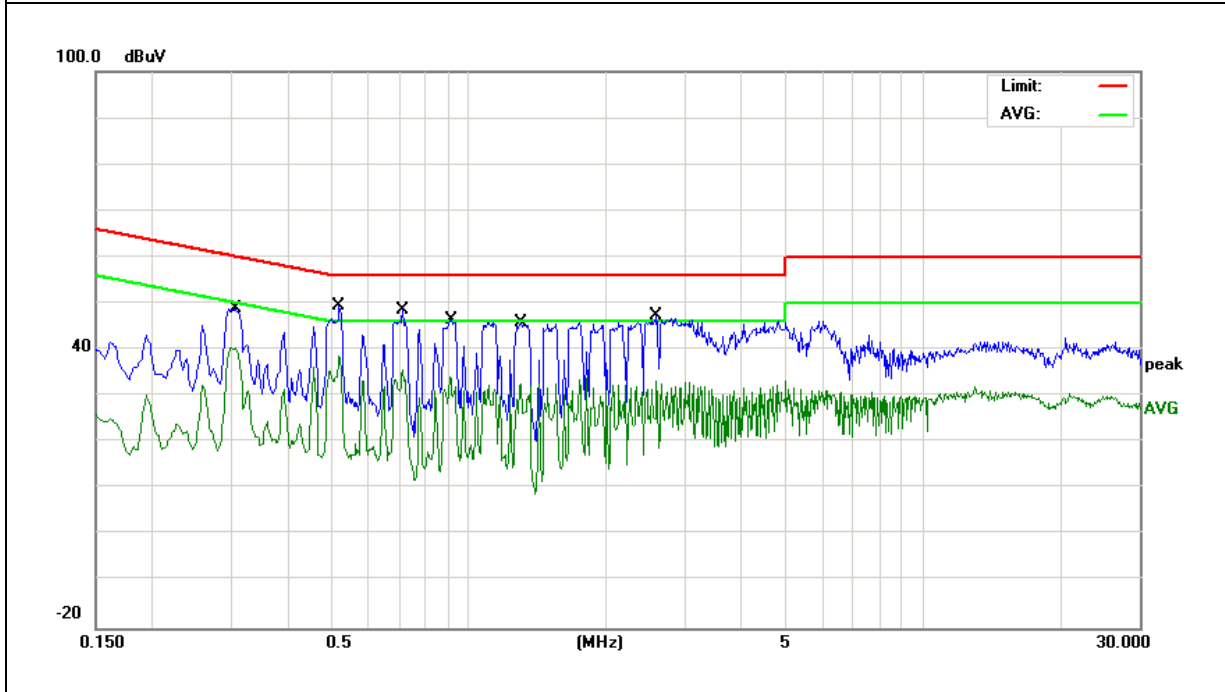


EUT:	KettyBot	Model Name :	PNT
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode:	Normal Link(module 2)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.2660	41.61	9.63	51.24	61.24	-10.00	QP
0.2660	32.69	9.63	42.32	51.24	-8.92	AVG
0.4420	38.21	9.64	47.85	57.02	-9.17	QP
0.4420	28.38	9.64	38.02	47.02	-9.00	AVG
0.5977	35.68	9.69	45.37	56.00	-10.63	QP
0.5977	27.00	9.69	36.69	46.00	-9.31	AVG
0.7900	35.46	9.74	45.20	56.00	-10.80	QP
0.7900	27.04	9.74	36.78	46.00	-9.22	AVG
0.9858	34.82	9.75	44.57	56.00	-11.43	QP
0.9858	26.40	9.75	36.15	46.00	-9.85	AVG
2.2418	34.34	9.75	44.09	56.00	-11.91	QP
2.2418	24.80	9.75	34.55	46.00	-11.45	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

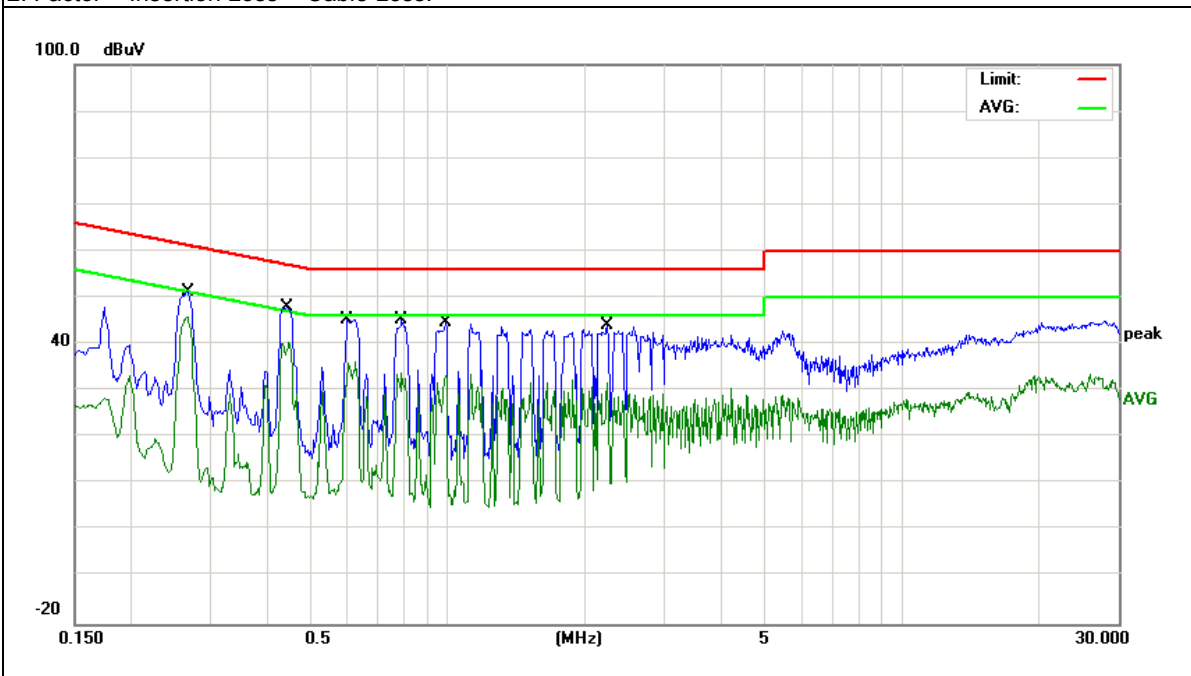


EUT:	KettyBot	Model Name :	PNT
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode:	Normal Link(module 2)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2620	40.75	9.65	50.40	61.36	-10.96	QP
0.2620	30.37	9.65	40.02	51.36	-11.34	AVG
0.4420	35.85	9.72	45.57	57.02	-11.45	QP
0.4420	26.64	9.72	36.36	47.02	-10.66	AVG
0.6179	34.52	9.68	44.20	56.00	-11.80	QP
0.6179	25.57	9.68	35.25	46.00	-10.75	AVG
1.1220	35.87	9.74	45.61	56.00	-10.39	QP
1.1220	26.41	9.74	36.15	46.00	-9.85	AVG
1.5140	35.52	9.71	45.23	56.00	-10.77	QP
1.5140	26.76	9.71	36.47	46.00	-9.53	AVG
2.9660	34.99	9.72	44.71	56.00	-11.29	QP
2.9660	25.42	9.72	35.14	46.00	-10.86	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

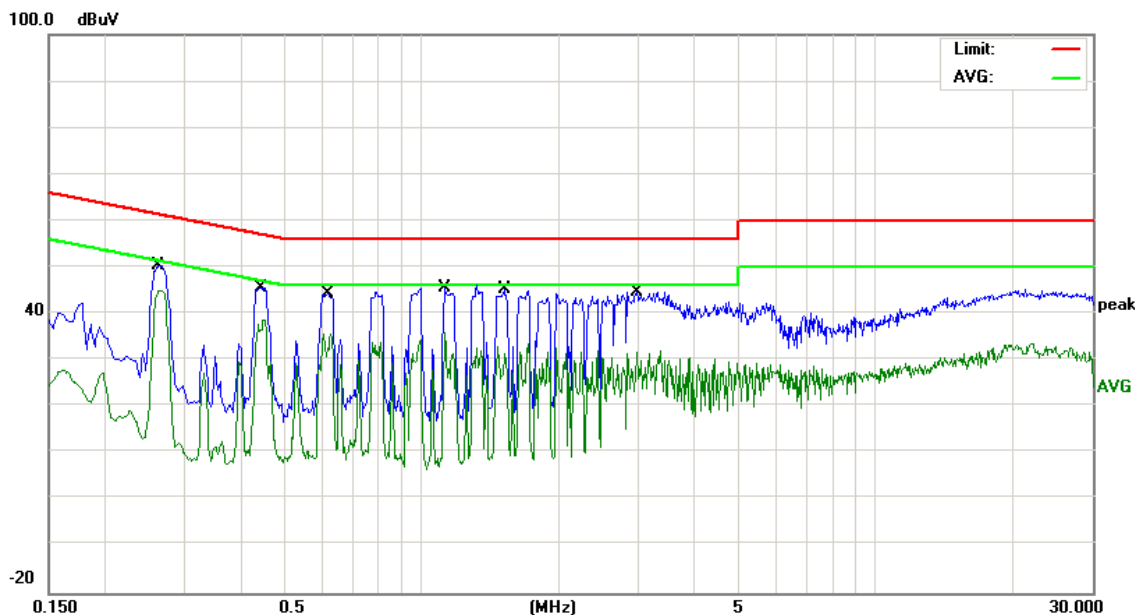

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


Remark : 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. For Frequency 9kHz~30MHz:
 Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.
 For Frequency above 30MHz:
 Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

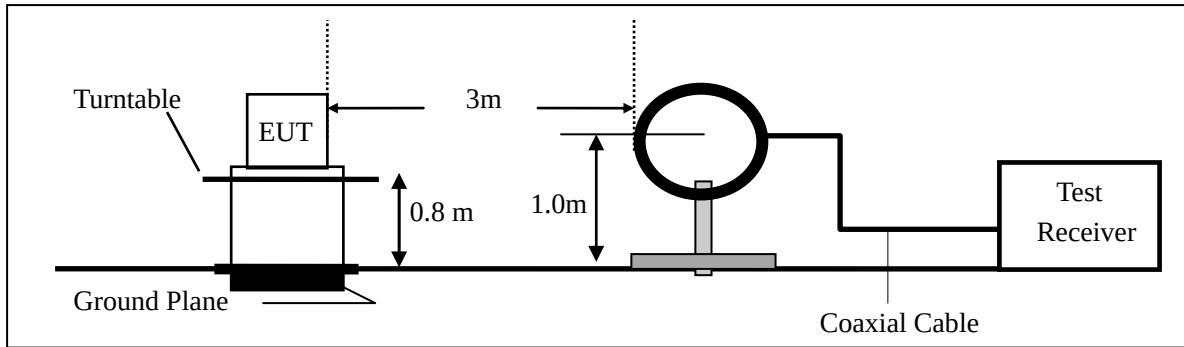

(b) For radiated emissions from 30MHz to 1000MHz

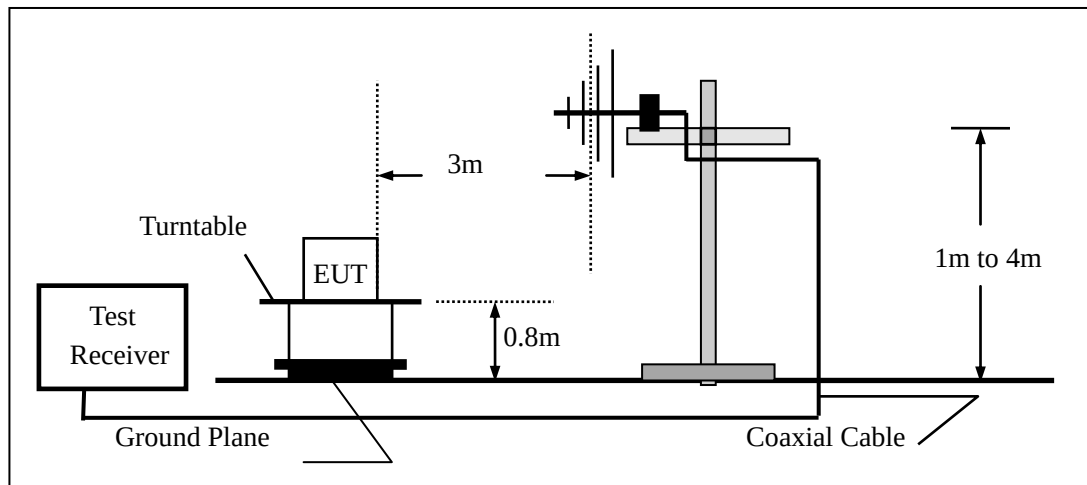

(c) For radiated emissions above 1000MHz

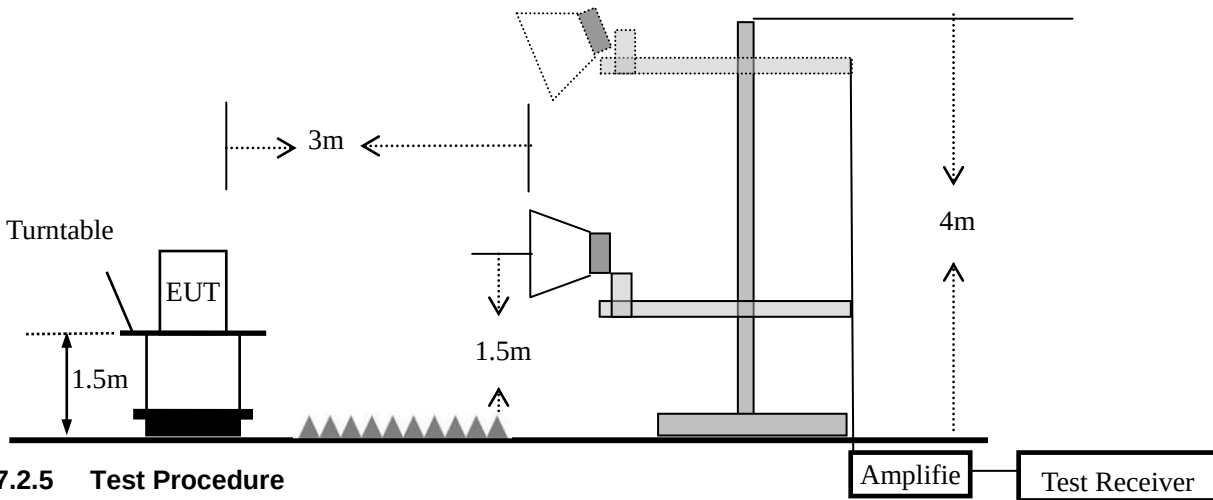

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and frequencies above 1GHz,
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

For peak measurement:

Set RBW=100 kHz for $f < 1$ GHz; VBW=120KHz; Sweep = auto; Detector function = peak; Trace = max hold;

Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz

For average measurement:

VBW = 10 Hz, when duty cycle is no less than 98 percent.

VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	KettyBot	Model Name :	PNT
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	Mode2/Mode3/Mode4/Mode5	Test By:	Allen Liu

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Spurious Emission below 1GHz (30MHz to 1GHz)


All the modulation modes have been tested, and the worst result was report as below:

EUT:	KettyBot	Model Name :	PNT
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Mode:	Normal Link(module 1)
Test Voltage :	DC 25.55V		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	59.8588	20.16	5.42	25.58	40.00	-14.42	QP
V	107.1337	16.52	11.26	27.78	43.50	-15.72	QP
V	150.0107	20.63	12.57	33.20	43.50	-10.30	QP
V	199.2855	22.72	9.56	32.28	43.50	-11.22	QP
V	308.9125	21.40	15.08	36.48	46.00	-9.52	QP
V	827.4932	11.78	25.70	37.48	46.00	-8.52	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

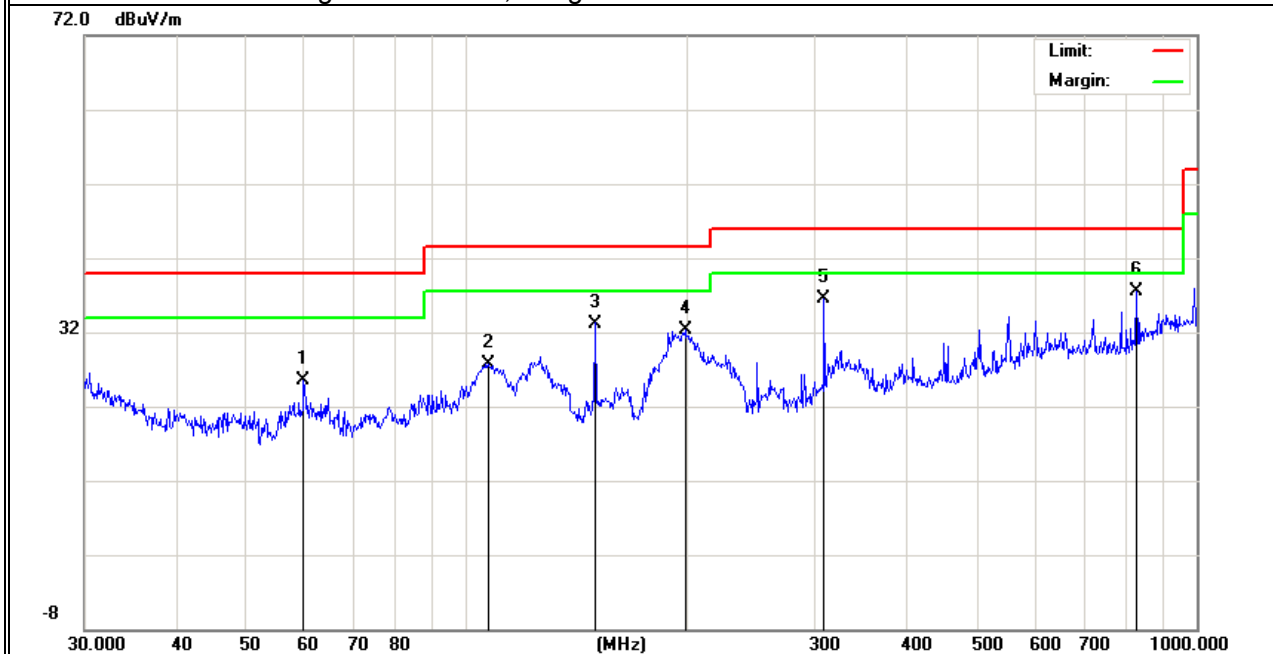

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	127.2176	16.52	12.15	28.67	43.50	-14.83	QP
H	150.0107	17.02	12.57	29.59	43.50	-13.91	QP
H	261.0581	16.00	15.20	31.20	46.00	-14.80	QP
H	451.1349	16.16	19.42	35.58	46.00	-10.42	QP
H	787.8513	13.34	24.97	38.31	46.00	-7.69	QP
H	827.4932	14.00	25.70	39.70	46.00	-6.30	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

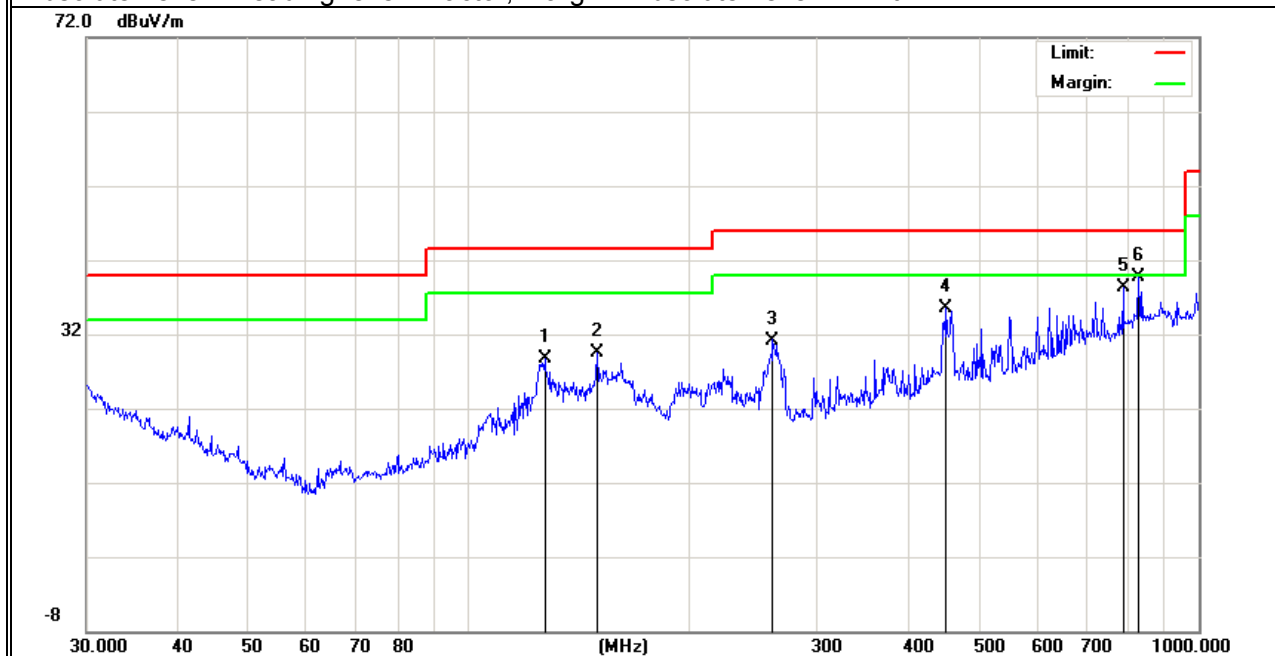


EUT:	KettyBot	Model Name :	PNT
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Mode:	Normal Link(module 2)
Test Voltage :	DC 25.55V		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	43.5056	14.74	17.09	31.83	40.00	-8.17	QP
V	53.6932	21.49	13.10	34.59	40.00	-5.41	QP
V	119.4361	15.54	18.16	33.70	43.50	-9.80	QP
V	191.0738	16.29	15.88	32.17	43.50	-11.33	QP
V	269.4284	15.20	21.22	36.42	46.00	-9.58	QP
V	366.8231	9.43	22.92	32.35	46.00	-13.65	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

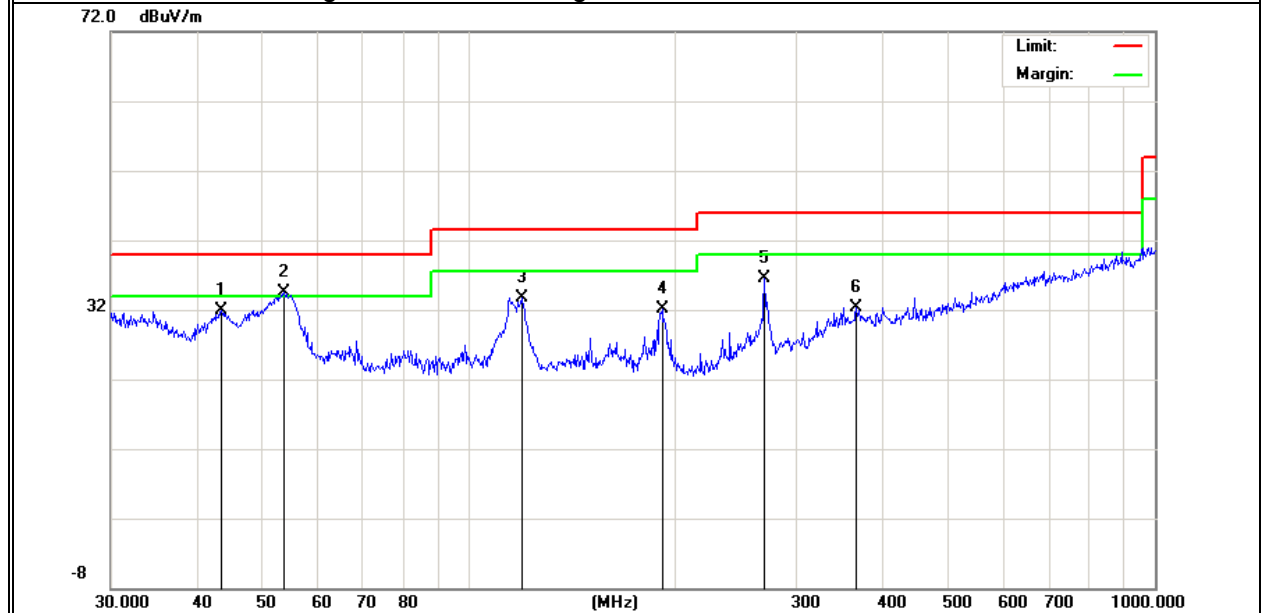

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	118.1862	11.79	18.06	29.85	43.50	-13.65	QP
H	189.7385	12.72	15.91	28.63	43.50	-14.87	QP
H	239.9874	14.99	18.52	33.51	46.00	-12.49	QP
H	272.2776	17.66	20.56	38.22	46.00	-7.78	QP
H	350.4768	13.93	22.92	36.85	46.00	-9.15	QP
H	372.0045	13.02	23.04	36.06	46.00	-9.94	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

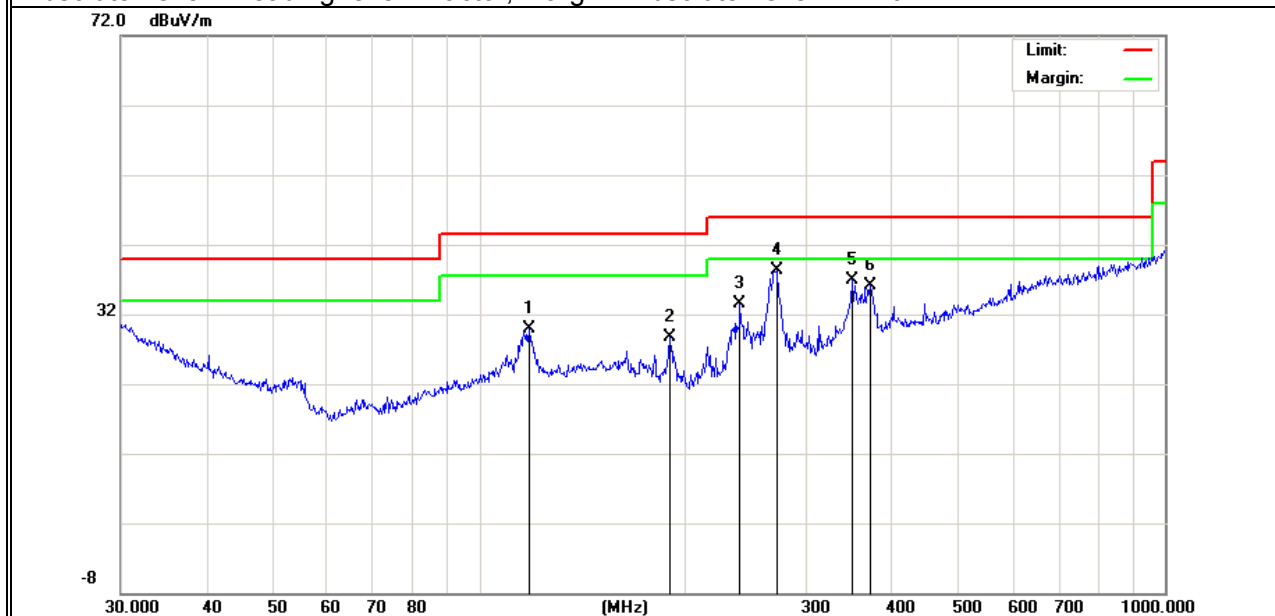

Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	KettyBot	Model Name :	PNT
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40(module 1)	Test By:	Allen Liu

All the modulation modes have been tested, only shown the worst data as below:

Frequency	Read Level	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2412 MHz)(802.11b)--Above 1G									
4824.265	62.86	5.21	35.59	44.30	59.36	74.00	-14.64	Pk	Vertical
4824.265	40.86	5.21	35.59	44.30	37.36	54.00	-16.64	AV	Vertical
7236.296	60.35	6.48	36.27	44.60	58.50	74.00	-15.50	Pk	Vertical
7236.296	44.10	6.48	36.27	44.60	42.25	54.00	-11.75	AV	Vertical
4824.414	61.05	5.21	35.55	44.30	57.51	74.00	-16.49	Pk	Horizontal
4824.414	43.31	5.21	35.55	44.30	39.77	54.00	-14.23	AV	Horizontal
7236.428	63.15	6.48	36.27	44.52	61.38	74.00	-12.62	Pk	Horizontal
7236.428	46.44	6.48	36.27	44.52	44.67	54.00	-9.33	AV	Horizontal
Middle Channel (2437 MHz)(802.11b)--Above 1G									
4874.312	62.45	5.21	35.66	44.20	59.12	74.00	-14.88	Pk	Vertical
4874.312	43.18	5.21	35.66	44.20	39.85	54.00	-14.15	AV	Vertical
7311.227	59.77	7.10	36.50	44.43	58.94	74.00	-15.06	Pk	Vertical
7311.227	46.96	7.10	36.50	44.43	46.13	54.00	-7.87	AV	Vertical
4874.529	60.70	5.21	35.66	44.20	57.37	74.00	-16.63	Pk	Horizontal
4874.529	48.49	5.21	35.66	44.20	45.16	54.00	-8.84	AV	Horizontal
7311.313	59.40	7.10	36.50	44.43	58.57	74.00	-15.43	Pk	Horizontal
7311.313	42.09	7.10	36.50	44.43	41.26	54.00	-12.74	AV	Horizontal
High Channel (2462 MHz)(802.11b)--Above 1G									
4924.102	65.93	5.21	35.52	44.21	62.45	74.00	-11.55	Pk	Vertical
4924.102	42.98	5.21	35.52	44.21	39.50	54.00	-14.50	AV	Vertical
7386.425	61.22	7.10	36.53	44.60	60.25	74.00	-13.75	Pk	Vertical
7386.425	45.07	7.10	36.53	44.60	44.10	54.00	-9.90	AV	Vertical
4924.066	66.49	5.21	35.52	44.21	63.01	74.00	-10.99	Pk	Horizontal
4924.066	46.99	5.21	35.52	44.21	43.51	54.00	-10.49	AV	Horizontal
7386.198	61.10	7.10	36.53	44.60	60.13	74.00	-13.87	Pk	Horizontal
7386.198	44.74	7.10	36.53	44.60	43.77	54.00	-10.23	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamplifier Factor

(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(3) "module 1 802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT:	KettyBot	Model Name :	PNT
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40(module 2)	Test By:	Allen Liu

All the modulation modes have been tested, only shown the worst data as below:

Frequency	Read Level	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2412 MHz)(802.11b)--Above 1G									
4824.265	62.79	5.21	35.59	44.30	59.29	74.00	-14.71	Pk	Vertical
4824.265	40.82	5.21	35.59	44.30	37.32	54.00	-16.68	AV	Vertical
7236.296	60.54	6.48	36.27	44.60	58.69	74.00	-15.31	Pk	Vertical
7236.296	43.87	6.48	36.27	44.60	42.02	54.00	-11.98	AV	Vertical
4824.414	61.31	5.21	35.55	44.30	57.77	74.00	-16.23	Pk	Horizontal
4824.414	43.30	5.21	35.55	44.30	39.76	54.00	-14.24	AV	Horizontal
7236.428	63.22	6.48	36.27	44.52	61.45	74.00	-12.55	Pk	Horizontal
7236.428	46.92	6.48	36.27	44.52	45.15	54.00	-8.85	AV	Horizontal
Mid Channel (2437 MHz)(802.11b)--Above 1G									
4874.312	63.02	5.21	35.66	44.20	59.69	74.00	-14.31	Pk	Vertical
4874.312	42.86	5.21	35.66	44.20	39.53	54.00	-14.47	AV	Vertical
7311.227	60.07	7.10	36.50	44.43	59.24	74.00	-14.76	Pk	Vertical
7311.227	46.91	7.10	36.50	44.43	46.08	54.00	-7.92	AV	Vertical
4874.529	60.65	5.21	35.66	44.20	57.32	74.00	-16.68	Pk	Horizontal
4874.529	48.71	5.21	35.66	44.20	45.38	54.00	-8.62	AV	Horizontal
7311.313	60.00	7.10	36.50	44.43	59.17	74.00	-14.83	Pk	Horizontal
7311.313	41.82	7.10	36.50	44.43	40.99	54.00	-13.01	AV	Horizontal
High Channel (2462 MHz)(802.11b)--Above 1G									
4924.102	66.15	5.21	35.52	44.21	62.67	74.00	-11.33	Pk	Vertical
4924.102	43.12	5.21	35.52	44.21	39.64	54.00	-14.36	AV	Vertical
7386.425	61.03	7.10	36.53	44.60	60.06	74.00	-13.94	Pk	Vertical
7386.425	45.08	7.10	36.53	44.60	44.11	54.00	-9.89	AV	Vertical
4924.066	66.92	5.21	35.52	44.21	63.44	74.00	-10.56	Pk	Horizontal
4924.066	47.37	5.21	35.52	44.21	43.89	54.00	-10.11	AV	Horizontal
7386.198	61.17	7.10	36.53	44.60	60.20	74.00	-13.80	Pk	Horizontal
7386.198	44.74	7.10	36.53	44.60	43.77	54.00	-10.23	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamplifier Factor

(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(3) "module 4 802.11n20" MIMO mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

Spurious Emission in Restricted Band 2310MHz -18000MHz
module 1:

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
802.11b									
2310.00	57.97	2.97	27.80	43.80	44.94	74	-29.06	Pk	Horizontal
2310.00	43.78	2.97	27.80	43.80	30.75	54	-23.25	AV	Horizontal
2310.00	58.91	2.97	27.80	43.80	45.88	74	-28.12	Pk	Vertical
2310.00	42.11	2.97	27.80	43.80	29.08	54	-24.92	AV	Vertical
2390.00	58.07	3.14	27.21	43.80	44.62	74	-29.38	Pk	Vertical
2390.00	42.06	3.14	27.21	43.80	28.61	54	-25.39	AV	Vertical
2390.00	56.86	3.14	27.21	43.80	43.41	74	-30.59	Pk	Horizontal
2390.00	41.63	3.14	27.21	43.80	28.18	54	-25.82	AV	Horizontal
2483.50	57.52	3.58	27.70	44.00	44.80	74	-29.20	Pk	Vertical
2483.50	42.71	3.58	27.70	44.00	29.99	54	-24.01	AV	Vertical
2483.50	58.62	3.58	27.70	44.00	45.90	74	-28.10	Pk	Horizontal
2483.50	41.83	3.58	27.70	44.00	29.11	54	-24.89	AV	Horizontal
802.11g									
2310.00	58.67	2.97	27.80	43.80	45.64	74	-28.36	Pk	Horizontal
2310.00	44.28	2.97	27.80	43.80	31.25	54	-22.75	AV	Horizontal
2310.00	57.23	2.97	27.80	43.80	44.20	74	-29.80	Pk	Vertical
2310.00	42.93	2.97	27.80	43.80	29.90	54	-24.10	AV	Vertical
2390.00	57.89	3.14	27.21	43.80	44.44	74	-29.56	Pk	Vertical
2390.00	42.01	3.14	27.21	43.80	28.56	54	-25.44	AV	Vertical
2390.00	58.07	3.14	27.21	43.80	44.62	74	-29.38	Pk	Horizontal
2390.00	44.12	3.14	27.21	43.80	30.67	54	-23.33	AV	Horizontal
2483.50	58.28	3.58	27.70	44.00	45.56	74	-28.44	Pk	Vertical
2483.50	44.14	3.58	27.70	44.00	31.42	54	-22.58	AV	Vertical
2483.50	59.32	3.58	27.70	44.00	46.60	74	-27.40	Pk	Horizontal
2483.50	42.53	3.58	27.70	44.00	29.81	54	-24.19	AV	Horizontal
802.11n20									
2310.00	58.02	2.97	27.80	43.80	44.99	74	-29.01	Pk	Horizontal
2310.00	43.98	2.97	27.80	43.80	30.95	54	-23.05	AV	Horizontal
2310.00	59.18	2.97	27.80	43.80	46.15	74	-27.85	Pk	Vertical
2310.00	42.25	2.97	27.80	43.80	29.22	54	-24.78	AV	Vertical
2390.00	58.06	3.14	27.21	43.80	44.61	74	-29.39	Pk	Vertical
2390.00	41.72	3.14	27.21	43.80	28.27	54	-25.73	AV	Vertical
2390.00	56.81	3.14	27.21	43.80	43.36	74	-30.64	Pk	Horizontal
2390.00	42.27	3.14	27.21	43.80	28.82	54	-25.18	AV	Horizontal
2483.50	57.78	3.58	27.70	44.00	45.06	74	-28.94	Pk	Vertical
2483.50	42.67	3.58	27.70	44.00	29.95	54	-24.05	AV	Vertical
2483.50	58.94	3.58	27.70	44.00	46.22	74	-27.78	Pk	Horizontal
2483.50	42.45	3.58	27.70	44.00	29.73	54	-24.27	AV	Horizontal

802.11n40									
2310.00	58.69	2.97	27.80	43.80	45.66	74	-28.34	Pk	Horizontal
2310.00	44.17	2.97	27.80	43.80	31.14	54	-22.86	AV	Horizontal
2310.00	56.73	2.97	27.80	43.80	43.70	74	-30.30	Pk	Vertical
2310.00	43.17	2.97	27.80	43.80	30.14	54	-23.86	AV	Vertical
2390.00	58.46	3.14	27.21	43.80	45.01	74	-28.99	Pk	Vertical
2390.00	41.76	3.14	27.21	43.80	28.31	54	-25.69	AV	Vertical
2390.00	58.52	3.14	27.21	43.80	45.07	74	-28.93	Pk	Horizontal
2390.00	43.28	3.14	27.21	43.80	29.83	54	-24.17	AV	Horizontal
2483.50	58.88	3.58	27.70	44.00	46.16	74	-27.84	Pk	Vertical
2483.50	43.70	3.58	27.70	44.00	30.98	54	-23.02	AV	Vertical
2483.50	58.49	3.58	27.70	44.00	45.77	74	-28.23	Pk	Horizontal
2483.50	42.44	3.58	27.70	44.00	29.72	54	-24.28	AV	Horizontal

All the modulation modes have been tested, only shown the worst data as below:

Note: module 1 the worst antenna1 for SISO mode.

module 2:

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
802.11b									
2310.00	58.26	2.97	27.80	43.80	45.23	74	-28.77	Pk	Horizontal
2310.00	43.33	2.97	27.80	43.80	30.30	54	-23.70	AV	Horizontal
2310.00	58.28	2.97	27.80	43.80	45.25	74	-28.75	Pk	Vertical
2310.00	42.42	2.97	27.80	43.80	29.39	54	-24.61	AV	Vertical
2390.00	57.45	3.14	27.21	43.80	44.00	74	-30.00	Pk	Vertical
2390.00	42.00	3.14	27.21	43.80	28.55	54	-25.45	AV	Vertical
2390.00	56.25	3.14	27.21	43.80	42.80	74	-31.20	Pk	Horizontal
2390.00	41.88	3.14	27.21	43.80	28.43	54	-25.57	AV	Horizontal
2483.50	58.12	3.58	27.70	44.00	45.40	74	-28.60	Pk	Vertical
2483.50	43.15	3.58	27.70	44.00	30.43	54	-23.57	AV	Vertical
2483.50	59.24	3.58	27.70	44.00	46.52	74	-27.48	Pk	Horizontal
2483.50	42.04	3.58	27.70	44.00	29.32	54	-24.68	AV	Horizontal
802.11g									
2310.00	58.98	2.97	27.80	43.80	45.95	74	-28.05	Pk	Horizontal
2310.00	43.90	2.97	27.80	43.80	30.87	54	-23.13	AV	Horizontal
2310.00	57.36	2.97	27.80	43.80	44.33	74	-29.67	Pk	Vertical
2310.00	43.17	2.97	27.80	43.80	30.14	54	-23.86	AV	Vertical
2390.00	57.92	3.14	27.21	43.80	44.47	74	-29.53	Pk	Vertical
2390.00	41.63	3.14	27.21	43.80	28.18	54	-25.82	AV	Vertical
2390.00	58.21	3.14	27.21	43.80	44.76	74	-29.24	Pk	Horizontal
2390.00	43.62	3.14	27.21	43.80	30.17	54	-23.83	AV	Horizontal
2483.50	58.99	3.58	27.70	44.00	46.27	74	-27.73	Pk	Vertical
2483.50	44.34	3.58	27.70	44.00	31.62	54	-22.38	AV	Vertical
2483.50	58.96	3.58	27.70	44.00	46.24	74	-27.76	Pk	Horizontal
2483.50	42.37	3.58	27.70	44.00	29.65	54	-24.35	AV	Horizontal
802.11n20									
2310.00	58.48	2.97	27.80	43.80	45.45	74	-28.55	Pk	Horizontal
2310.00	43.94	2.97	27.80	43.80	30.91	54	-23.09	AV	Horizontal
2310.00	58.93	2.97	27.80	43.80	45.90	74	-28.10	Pk	Vertical
2310.00	42.69	2.97	27.80	43.80	29.66	54	-24.34	AV	Vertical
2390.00	57.80	3.14	27.21	43.80	44.35	74	-29.65	Pk	Vertical
2390.00	42.38	3.14	27.21	43.80	28.93	54	-25.07	AV	Vertical
2390.00	56.56	3.14	27.21	43.80	43.11	74	-30.89	Pk	Horizontal
2390.00	41.98	3.14	27.21	43.80	28.53	54	-25.47	AV	Horizontal
2483.50	57.88	3.58	27.70	44.00	45.16	74	-28.84	Pk	Vertical
2483.50	42.51	3.58	27.70	44.00	29.79	54	-24.21	AV	Vertical
2483.50	58.85	3.58	27.70	44.00	46.13	74	-27.87	Pk	Horizontal
2483.50	41.85	3.58	27.70	44.00	29.13	54	-24.87	AV	Horizontal

802.11n40									
2310.00	58.66	2.97	27.80	43.80	45.63	74	-28.37	Pk	Horizontal
2310.00	44.52	2.97	27.80	43.80	31.49	54	-22.51	AV	Horizontal
2310.00	56.70	2.97	27.80	43.80	43.67	74	-30.33	Pk	Vertical
2310.00	42.99	2.97	27.80	43.80	29.96	54	-24.04	AV	Vertical
2390.00	58.29	3.14	27.21	43.80	44.84	74	-29.16	Pk	Vertical
2390.00	42.43	3.14	27.21	43.80	28.98	54	-25.02	AV	Vertical
2390.00	58.67	3.14	27.21	43.80	45.22	74	-28.78	Pk	Horizontal
2390.00	43.67	3.14	27.21	43.80	30.22	54	-23.78	AV	Horizontal
2483.50	58.83	3.58	27.70	44.00	46.11	74	-27.89	Pk	Vertical
2483.50	43.74	3.58	27.70	44.00	31.02	54	-22.98	AV	Vertical
2483.50	58.91	3.58	27.70	44.00	46.19	74	-27.81	Pk	Horizontal
2483.50	42.29	3.58	27.70	44.00	29.57	54	-24.43	AV	Horizontal

Note: module 4 the worst antenna for SISO mode, antenna1 is the worst case for SISO mode.

Spurious Emission in Restricted Bands 3260MHz- 18000MHz

All the modulation modes have been tested, only shown the worst data as below:

module 1:

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	60.03	4.04	29.57	44.70	48.94	74	-25.06	Pk	Vertical
3260	55.67	4.04	29.57	44.70	44.58	54	-9.42	AV	Vertical
3260	61.45	4.04	29.57	44.70	50.36	74	-23.64	Pk	Horizontal
3260	56.69	4.04	29.57	44.70	45.60	54	-8.40	AV	Horizontal
3332	64.23	4.26	29.87	44.40	53.96	74	-20.04	Pk	Vertical
3332	53.82	4.26	29.87	44.40	43.55	54	-10.45	AV	Vertical
3332	62.48	4.26	29.87	44.40	52.21	74	-21.79	Pk	Horizontal
3332	52.52	4.26	29.87	44.40	42.25	54	-11.75	AV	Horizontal
17797	43.48	10.99	43.95	43.50	54.92	74	-19.08	Pk	Vertical
17797	32.63	10.99	43.95	43.50	44.07	54	-9.93	AV	Vertical
17788	43.80	11.81	43.69	44.60	54.70	74	-19.30	Pk	Horizontal
17788	32.47	11.81	43.69	44.60	43.37	54	-10.63	AV	Horizontal

All the modulation modes have been tested, only shown the worst data as below:

module 2:

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	60.51	4.04	29.57	44.70	49.42	74	-24.58	Pk	Vertical
3260	55.84	4.04	29.57	44.70	44.75	54	-9.25	AV	Vertical
3260	61.80	4.04	29.57	44.70	50.71	74	-23.29	Pk	Horizontal
3260	56.33	4.04	29.57	44.70	45.24	54	-8.76	AV	Horizontal
3332	64.60	4.26	29.87	44.40	54.33	74	-19.67	Pk	Vertical
3332	53.94	4.26	29.87	44.40	43.67	54	-10.33	AV	Vertical
3332	63.12	4.26	29.87	44.40	52.85	74	-21.15	Pk	Horizontal
3332	53.16	4.26	29.87	44.40	42.89	54	-11.11	AV	Horizontal
17797	43.43	10.99	43.95	43.50	54.87	74	-19.13	Pk	Vertical
17797	32.78	10.99	43.95	43.50	44.22	54	-9.78	AV	Vertical
17788	43.66	11.81	43.69	44.60	54.56	74	-19.44	Pk	Horizontal
17788	31.88	11.81	43.69	44.60	42.78	54	-11.22	AV	Horizontal

“module 3 802.11n20 MIMO” mode is the worst mode

When PK value is lower than the Average value limit, average don't record.

7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.2.

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

7.3.6 Test Results

EUT:	KettyBot	Model Name :	PNT
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Test data reference attachment.

7.4 DUTY CYCLE

7.4.1 Applicable Standard

According to KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 6.

7.4.2 Conformance Limit

No limit requirement.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 10MHz(the largest available value)

VBW = 10MHz ($\geq$ RBW)

Number of points in Sweep > 100

Detector function = peak

Trace = Clear write

Measure T_{total} and T_{on}

Calculate Duty Cycle = T_{on} / T_{total}

7.4.6 Test Results

EUT:	KettyBot	Model Name :	PNT
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Test data reference attachment.

7.5 MAXIMUM OUTPUT POWER

7.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.3.2.3.

7.5.2 Conformance Limit


The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.5.3 Measuring Instruments

The following table is the setting of the power meter.

Power meter parameter	Setting
Detector	Peak

7.5.4 Test Setup

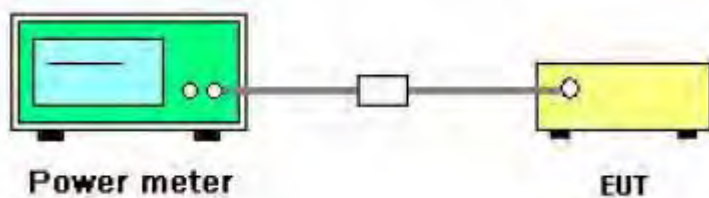

7.5.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.9.1.3 of ANSI C63.10

7.5.6 EUT operation during Test

The EUT was programmed to be in continuously transmitting mode.

7.5.7 Test Results

EUT:	KettyBot	Model Name :	PNT
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Refer to section 4 of this report:

For 2.4G band. Directional gain=3.5dBi; 3.5dBi<6dBi, so conducted power limit= 30.00dBm.

Test data reference attachment.

7.6 POWER SPECTRAL DENSITY

7.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.4.

7.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.2 of ANSI C63.10

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 * \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.6.6 Test Results

EUT:	KettyBot	Model Name :	PNT
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Refer to section 4 of this report:

802.11n 2.4GHz has MIMO mode. Directional gain=6.51dbi

$6.51\text{dbi} > 6.0\text{dbi}$ so power spectral density limit = $8 - (6.51 - 6) = 7.49\text{dBm}$

Test data reference attachment.

7.7 CONDUCTED BAND EDGE MEASUREMENT

7.7.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.7.

7.7.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.7.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

7.7.6 Test Results

EUT:	KettyBot	Model Name :	PNT
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Test data reference attachment.

7.8 SPURIOUS RF CONDUCTED EMISSIONS

7.8.1 Conformance Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.3 Test Setup

Please refer to Section 6.1 of this test report.

7.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.

7.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test data reference attachment.

7.9 ANTENNA APPLICATION

7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.9.2 Result

This EUT has three modules, module 2 supports Bluetooth, WIFI2.4G / 5G, module 2 has two antennas, Antenna 1 supports Bluetooth, WIFI2.4G / 5G, Antenna 2 supports WIFI2.4G / 5G. The module 1 only supports Bluetooth , WIFI 2.4G. The module 1 has only one antenna. module 3 only supports WCDMA/LTE. The module 3 has only one antenna. Antenna 4 supports WCDMA/LTE.

The module 2 for 2.4G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11b/g	1TX, 1RX
802.11n(20MHz,40MHz)	1TX, 1RX/2TX, 2RX

For 2.4GHz mode, Antenna 2,3 are transmitting, each with the same directional gain.

For power spectral density (PSD) measurements: Directional gain= G_{ANT} + Array Gain=3.5dBi + 3.01 = 6.51dBi. For power measurements: Directional gain= G_{ANT} + Array Gain=3.5dBi + 0 =3 5dBi.

Note: G_{ANT} means antenna gain for the same gain in dBi.

For power spectral density (PSD) measurements: Array Gain = $10\log(N_{ANT}/N_{SS})$ dB.

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements:

N_{ANT} = number of transmit antennas and

N_{SS} = number of spatial streams. (Assume $N_{SS} = 1$ unless you have specific information to the contrary.)

The antenna is permanently fixed, It complies with the standard requirement.


8 TEST RESULTS

MODULE 1:


8.1.1 DUTY CYCLE

Condition	Mode	Frequency (MHz)	Duty Cycle (%)
NVNT	802.11b	2412	98.32
NVNT	802.11b	2437	98.05
NVNT	802.11b	2462	98.56
NVNT	802.11g	2412	98.45
NVNT	802.11g	2437	98.29
NVNT	802.11g	2462	98.52
NVNT	802.11n(HT20)	2412	98.05
NVNT	802.11n(HT20)	2437	98.03
NVNT	802.11n(HT20)	2462	98.12
NVNT	802.11n(HT40)	2422	98.14
NVNT	802.11n(HT40)	2437	98.15
NVNT	802.11n(HT40)	2452	98.09


Duty Cycle NVNT 802.11b 2412MHz

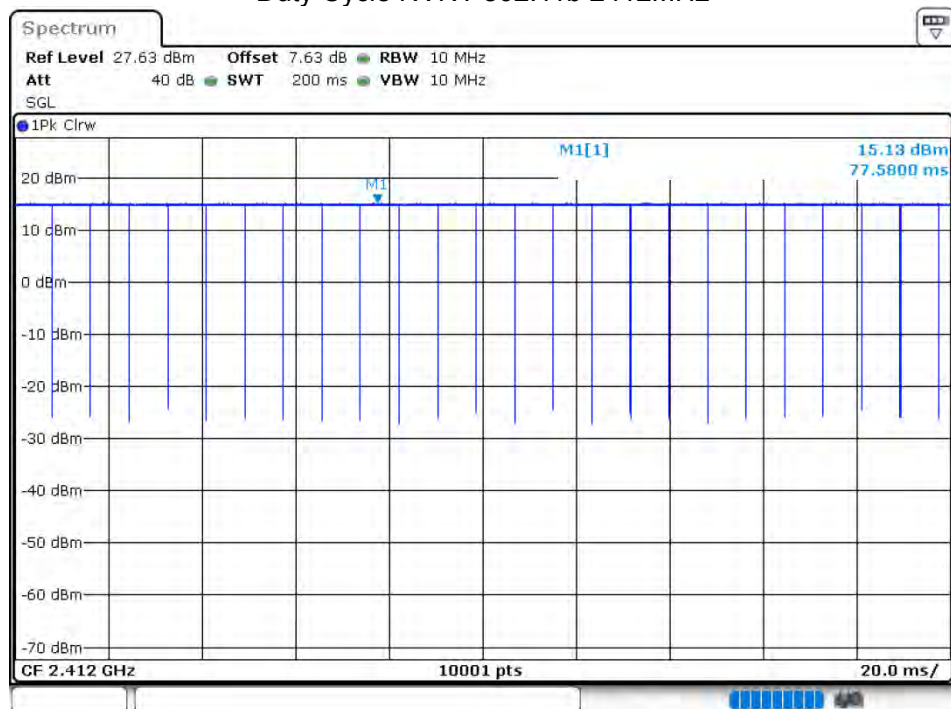


Duty Cycle NVNT 802.11b 2437MHz

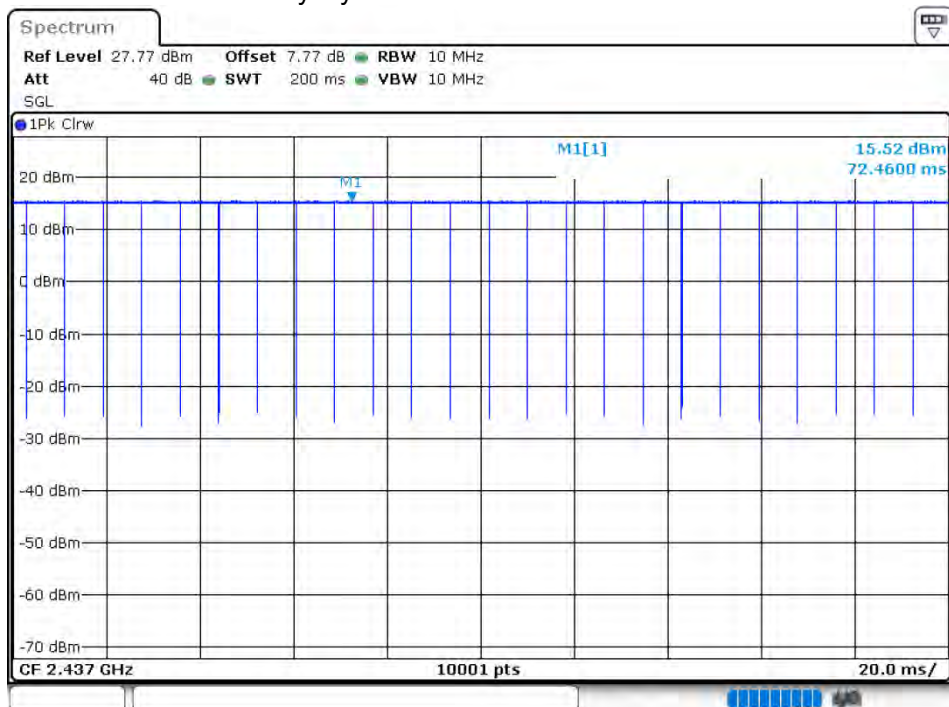


Duty Cycle NVNT 802.11b 2462MHz

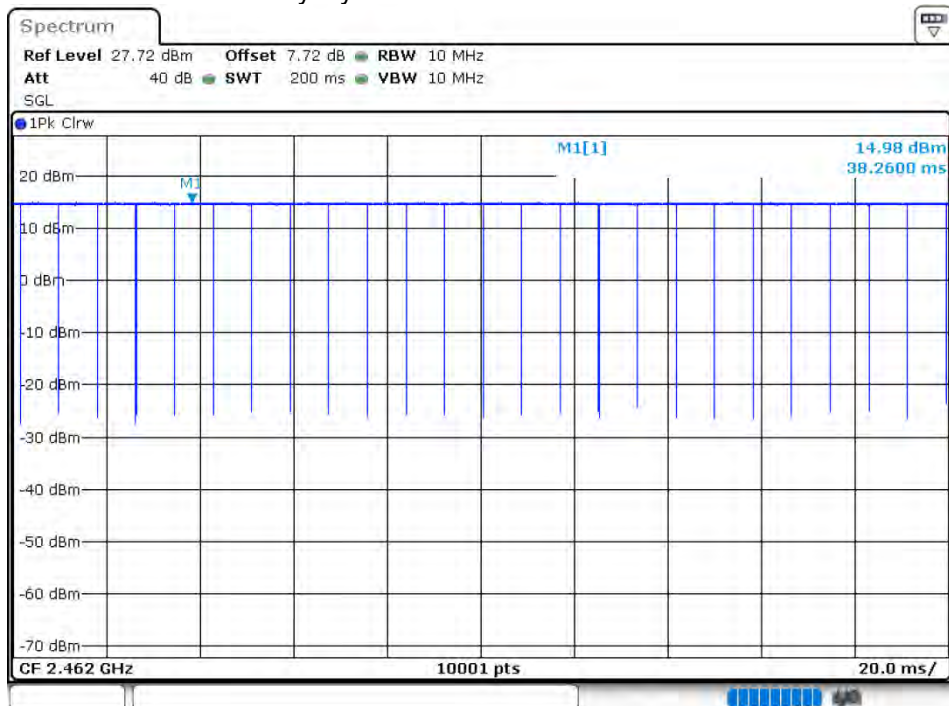


Duty Cycle NVNT 802.11g 2412MHz

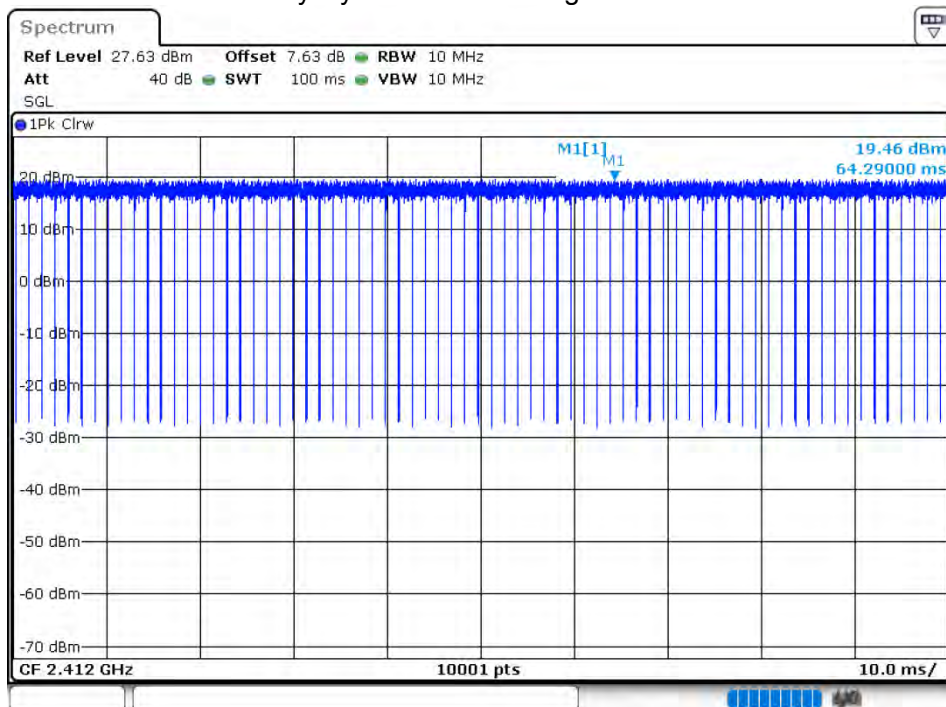


Duty Cycle NVNT 802.11g 2437MHz

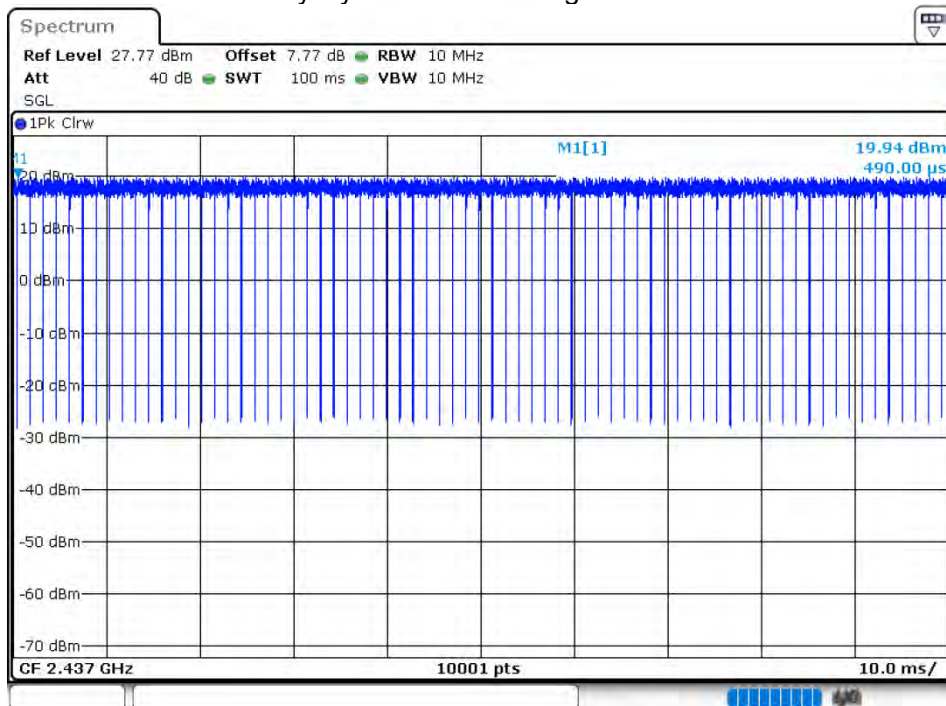


Duty Cycle NVNT 802.11g 2462MHz

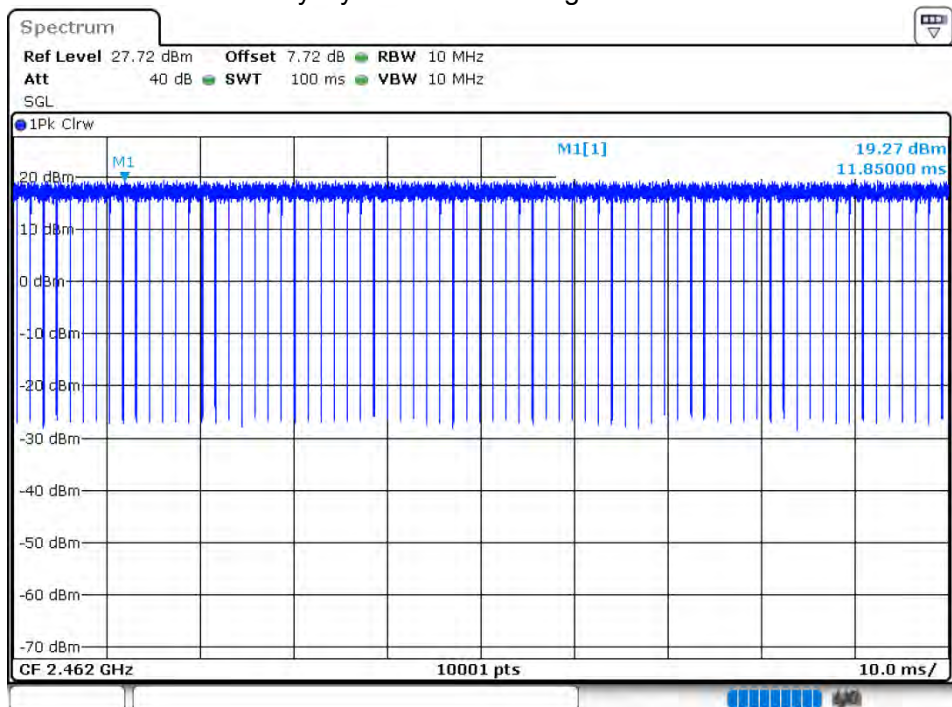


Duty Cycle NVNT 802.11n(HT20) 2412MHz

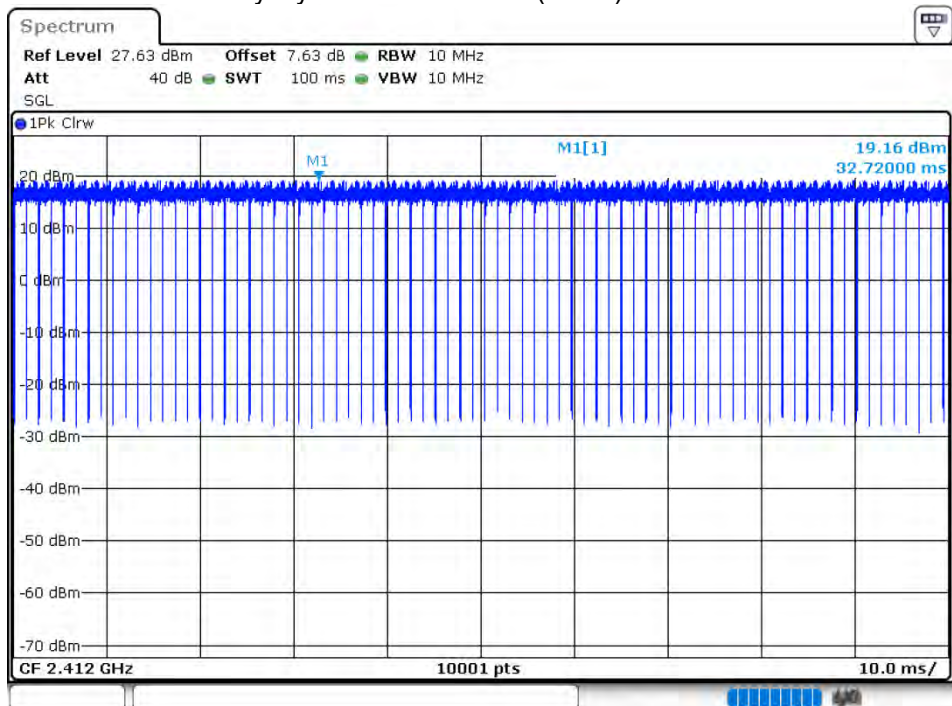


Duty Cycle NVNT 802.11n(HT20) 2437MHz

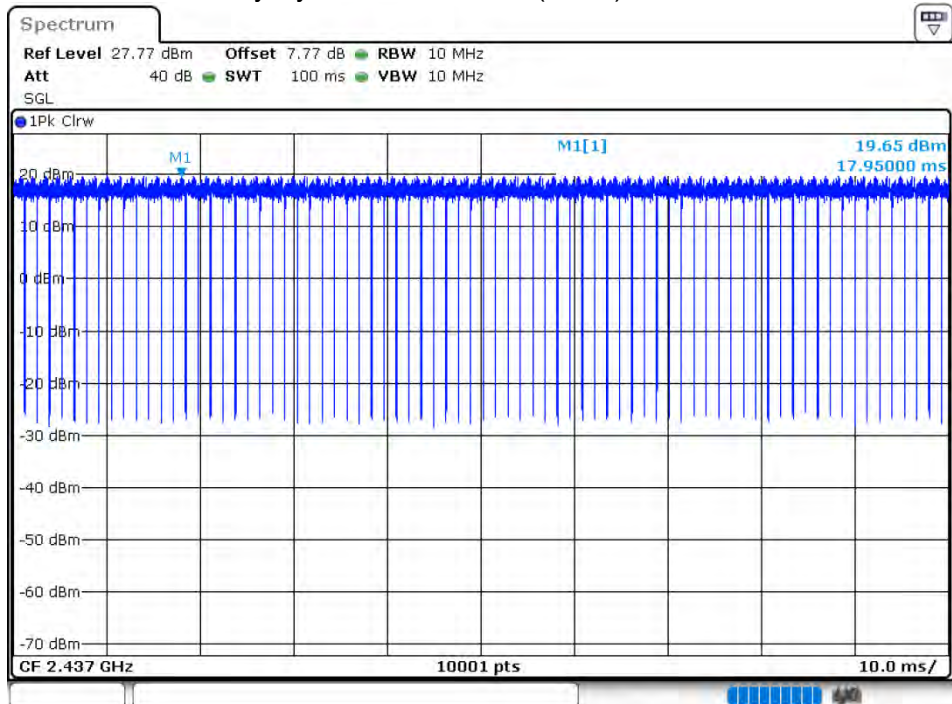


Duty Cycle NVNT 802.11n(HT20) 2462MHz

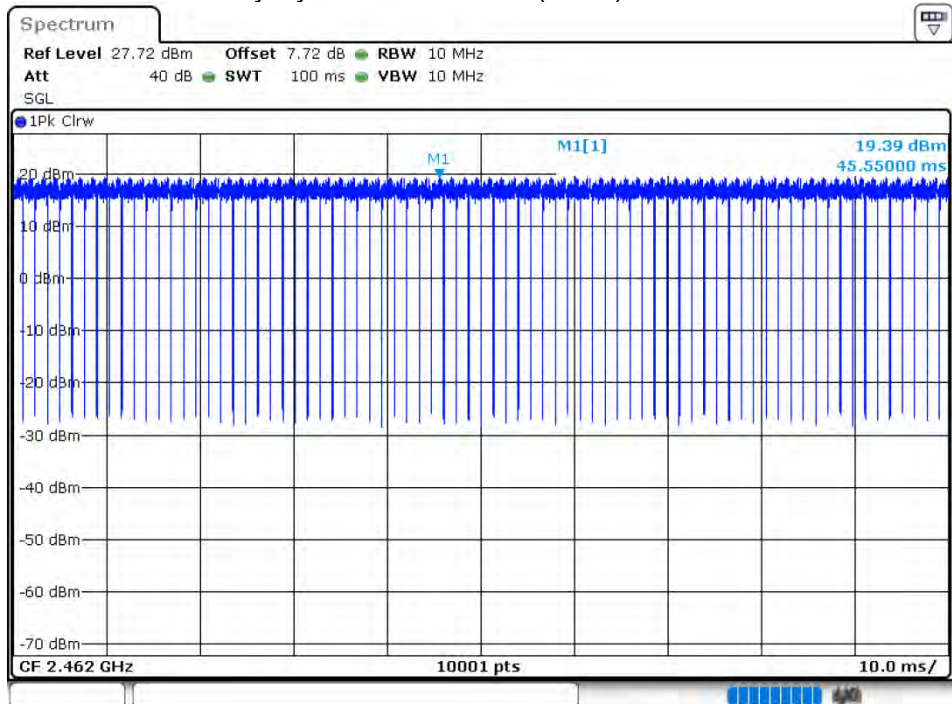


Duty Cycle NVNT 802.11n(HT40) 2422MHz

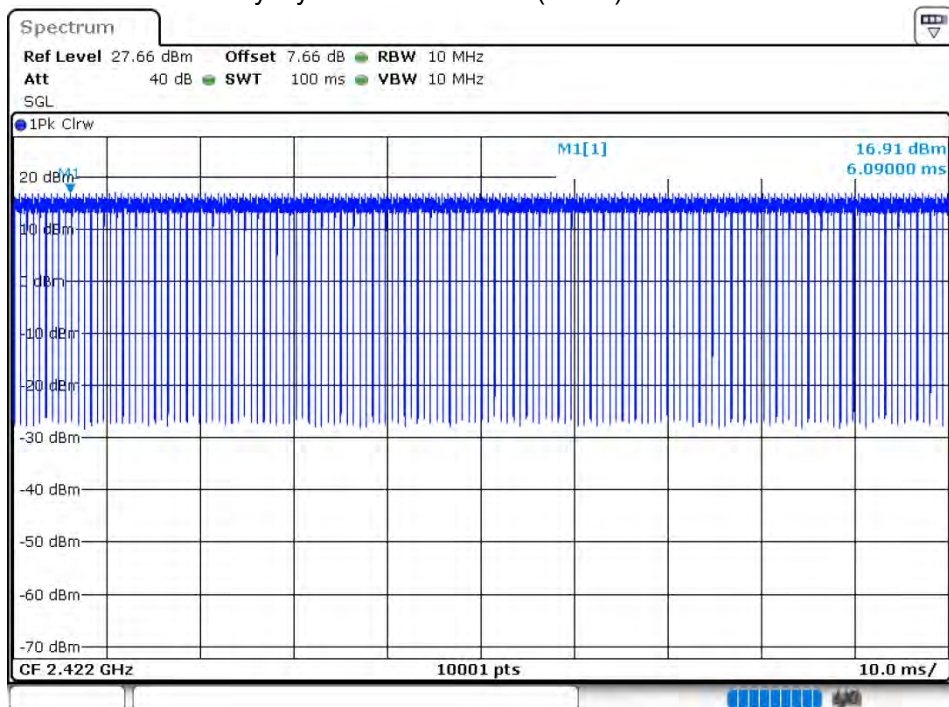

Duty Cycle NVNT 802.11n(HT40) 2437MHz

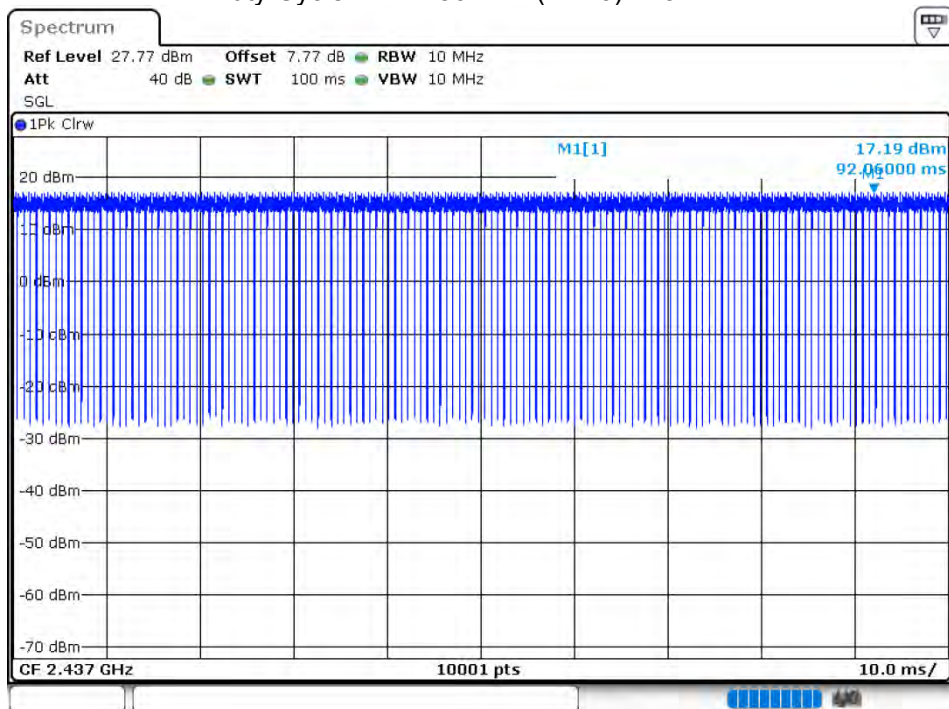

Duty Cycle NVNT 802.11n(HT40) 2452MHz

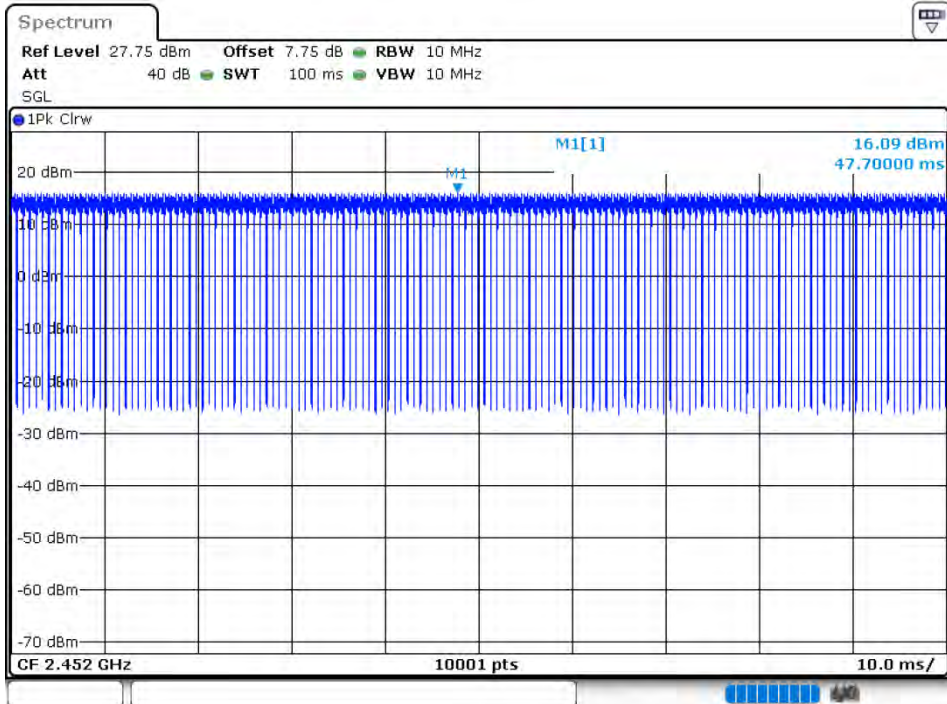


8.1.2 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11b	2412	Ant 1	14.41	30	Pass
NVNT	802.11b	2437	Ant 1	14.65	30	Pass
NVNT	802.11b	2462	Ant 1	14.51	30	Pass
NVNT	802.11g	2412	Ant 1	13.23	30	Pass
NVNT	802.11g	2437	Ant 1	13.19	30	Pass
NVNT	802.11g	2462	Ant 1	13.31	30	Pass
NVNT	802.11n(HT20)	2412	Ant 1	13.21	30	Pass
NVNT	802.11n(HT20)	2437	Ant 1	13.11	30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	13.29	30	Pass
NVNT	802.11n(HT40)	2422	Ant 1	12.98	30	Pass
NVNT	802.11n(HT40)	2437	Ant 1	12.56	30	Pass
NVNT	802.11n(HT40)	2452	Ant 1	12.46	30	Pass


8.1.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11b	2412	Ant 1	13.1868	9.56	0.5	Pass
NVNT	802.11b	2437	Ant 1	13.1469	10.04	0.5	Pass
NVNT	802.11b	2462	Ant 1	13.1469	9.6	0.5	Pass
NVNT	802.11g	2412	Ant 1	17.1029	15.72	0.5	Pass
NVNT	802.11g	2437	Ant 1	17.0629	16.32	0.5	Pass
NVNT	802.11g	2462	Ant 1	17.4226	16.36	0.5	Pass
NVNT	802.11n(HT20)	2412	Ant 1	18.0619	16.32	0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 1	17.9021	16.08	0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 1	18.022	16.36	0.5	Pass
NVNT	802.11n(HT40)	2422	Ant 1	36.6034	31.76	0.5	Pass
NVNT	802.11n(HT40)	2437	Ant 1	37.4026	35.36	0.5	Pass
NVNT	802.11n(HT40)	2452	Ant 1	37.0829	23.28	0.5	Pass


OBW NVNT 802.11b 2412MHz Ant1

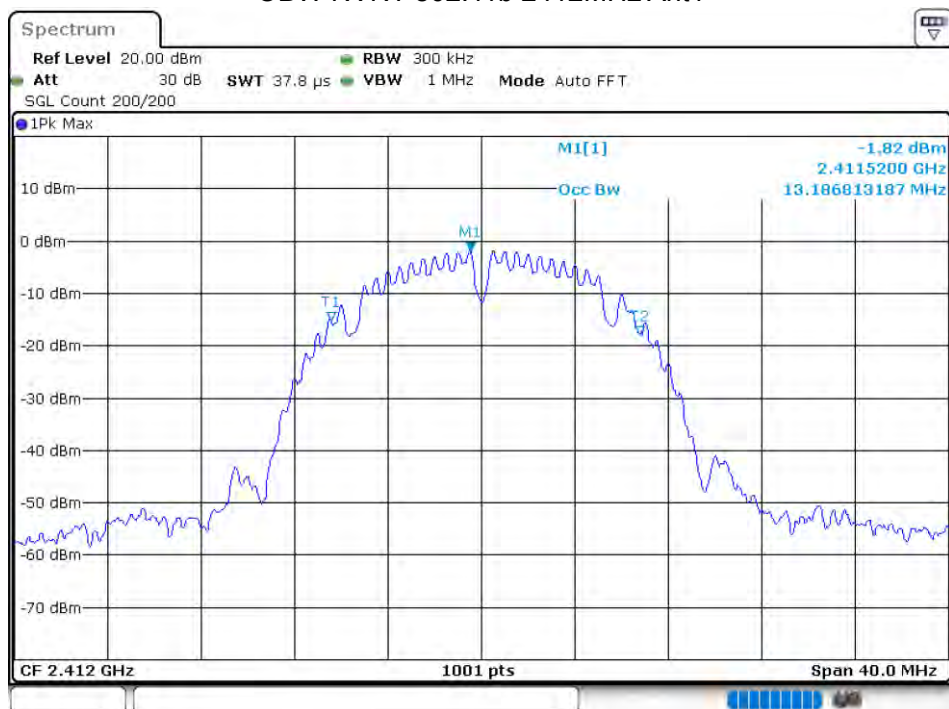


-6 dB BW NVNT 802.11b 2412MHz Ant1

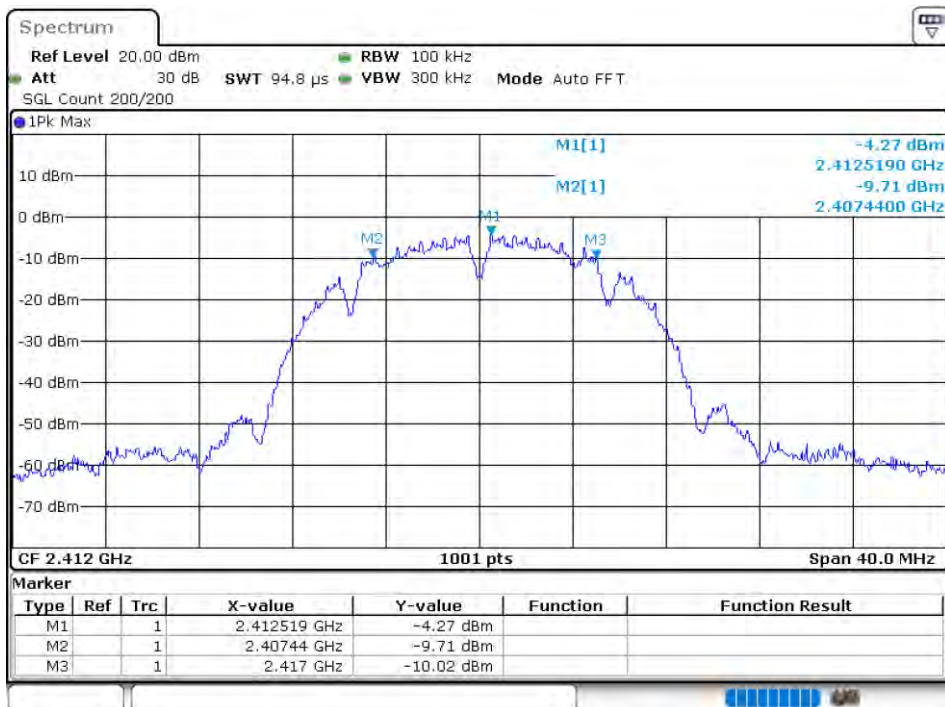


OBW NVNT 802.11b 2437MHz Ant1

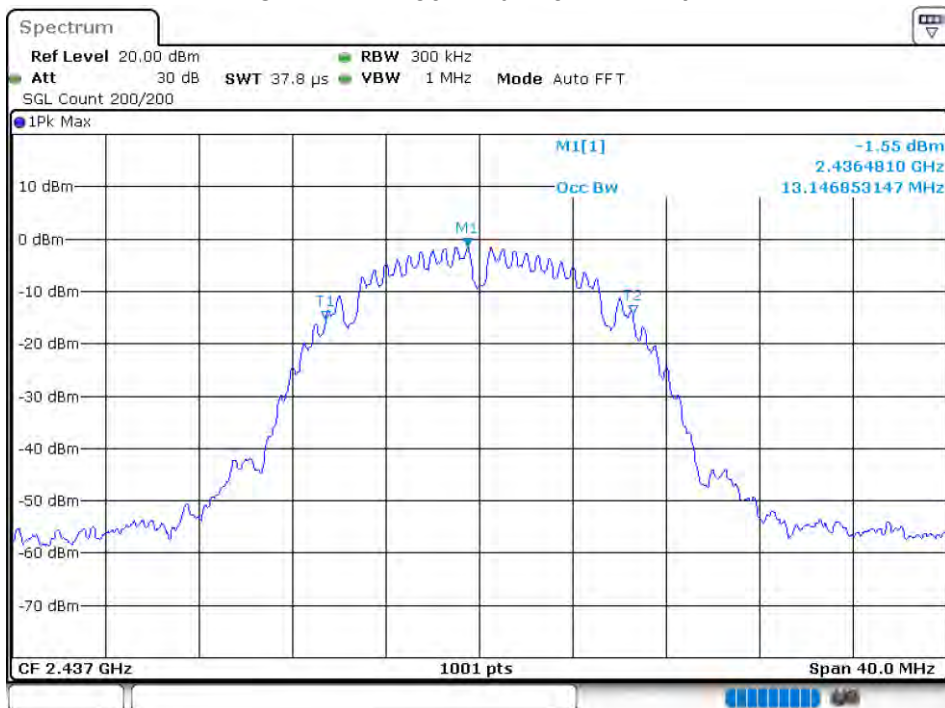


-6 dB BW NVNT 802.11b 2437MHz Ant1

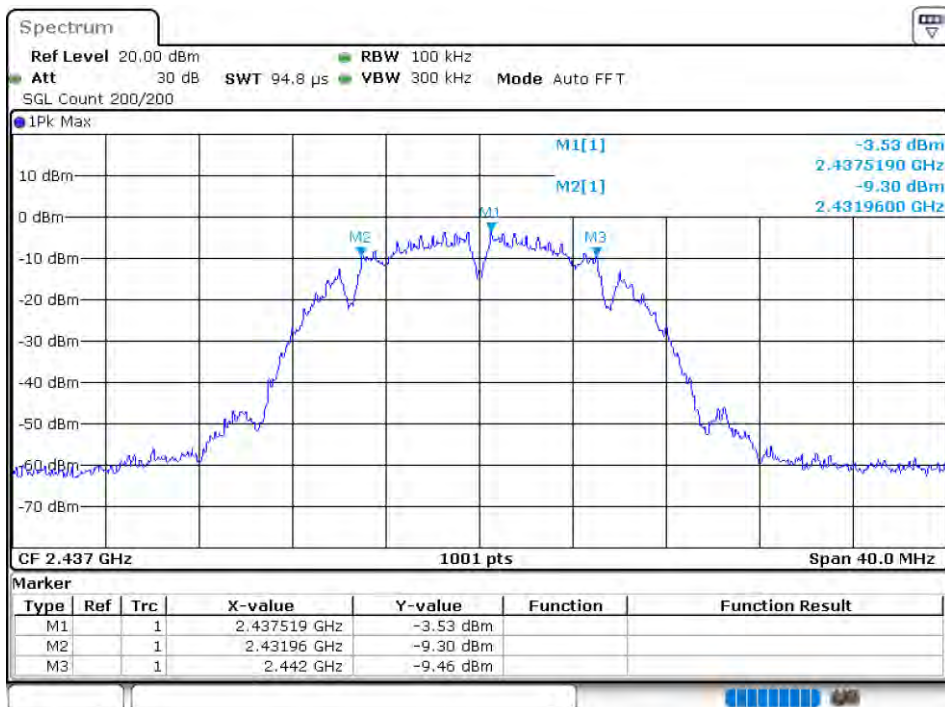

OBW NVNT 802.11b 2462MHz Ant1

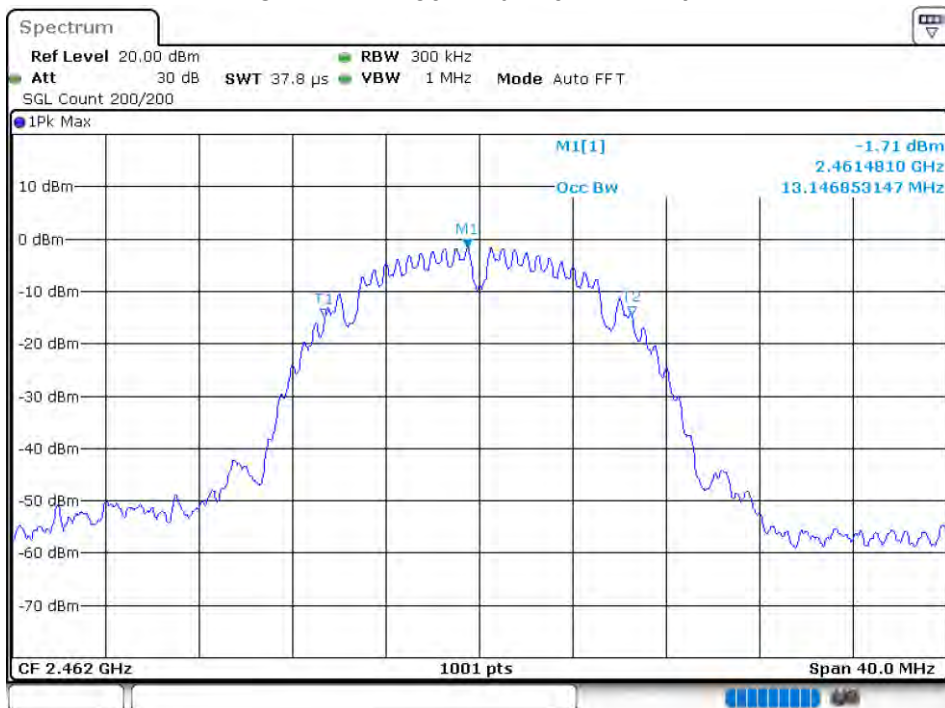


-6 dB BW NVNT 802.11b 2462MHz Ant1

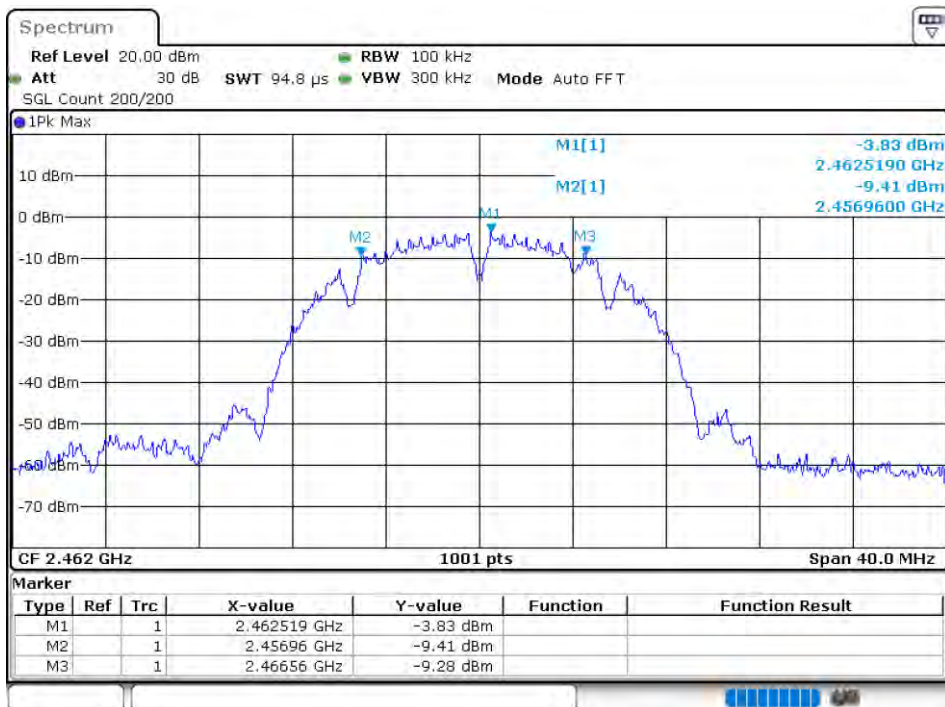


OBW NVNT 802.11g 2412MHz Ant1




-6 dB BW NVNT 802.11g 2412MHz Ant1

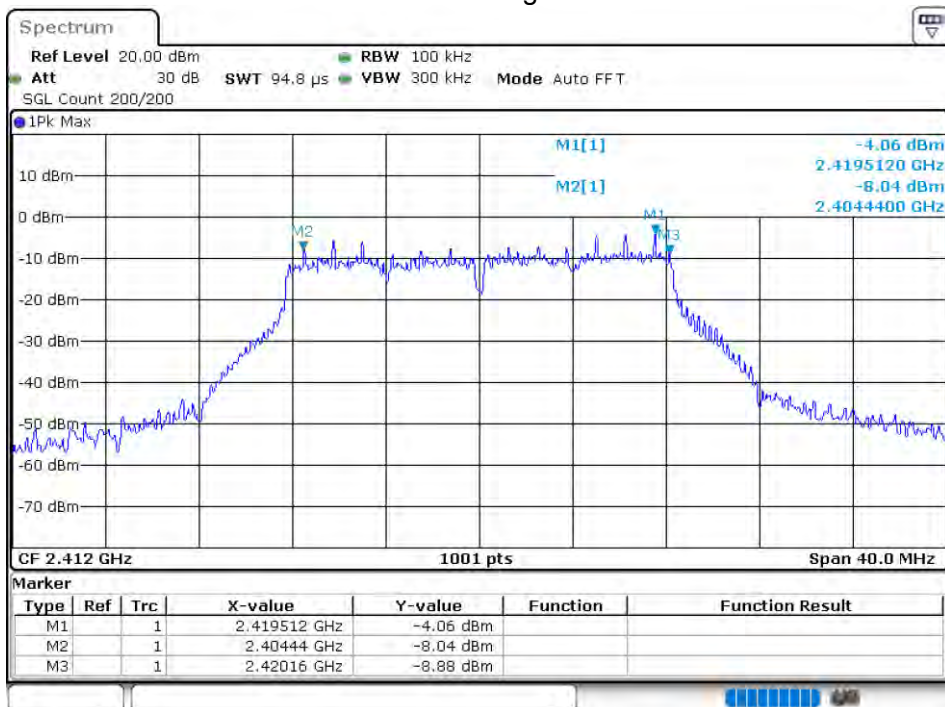

OBW NVNT 802.11g 2437MHz Ant1

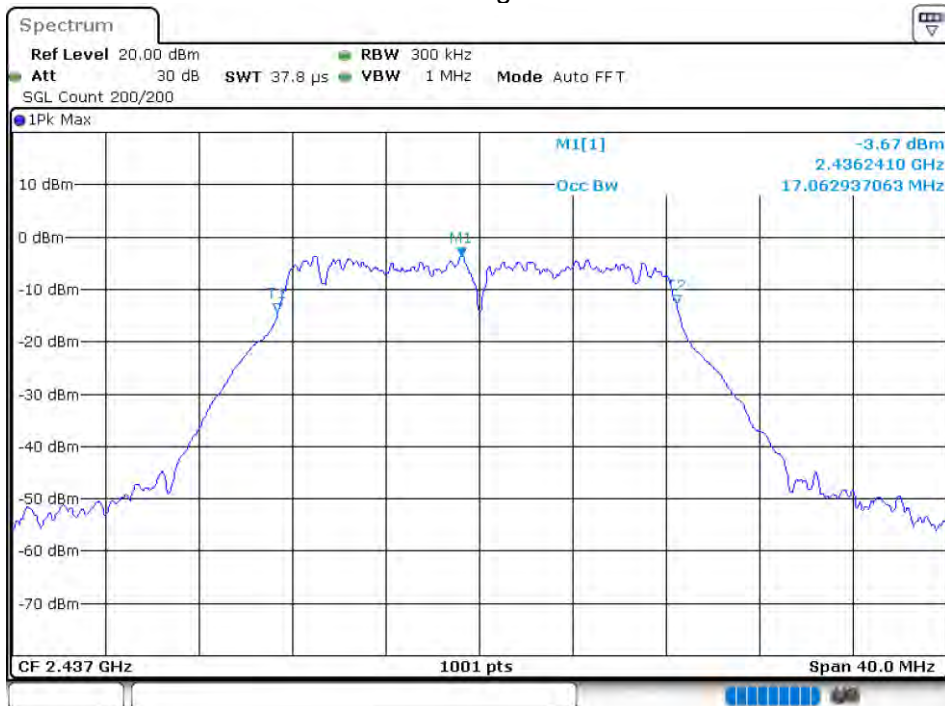


-6 dB BW NVNT 802.11g 2437MHz Ant1

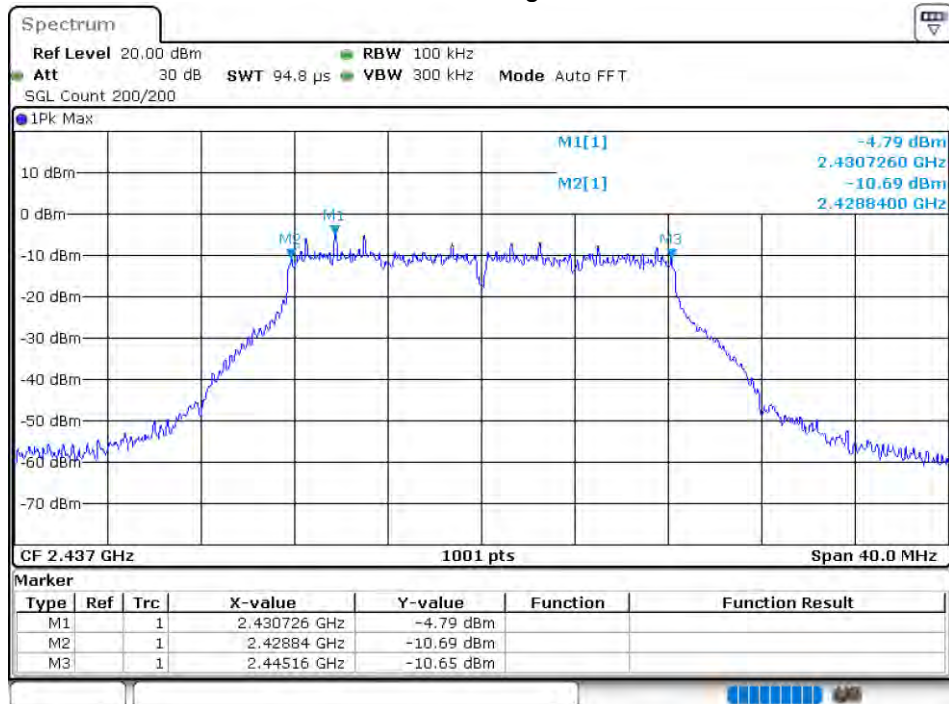


OBW NVNT 802.11g 2462MHz Ant1




-6 dB BW NVNT 802.11g 2462MHz Ant1

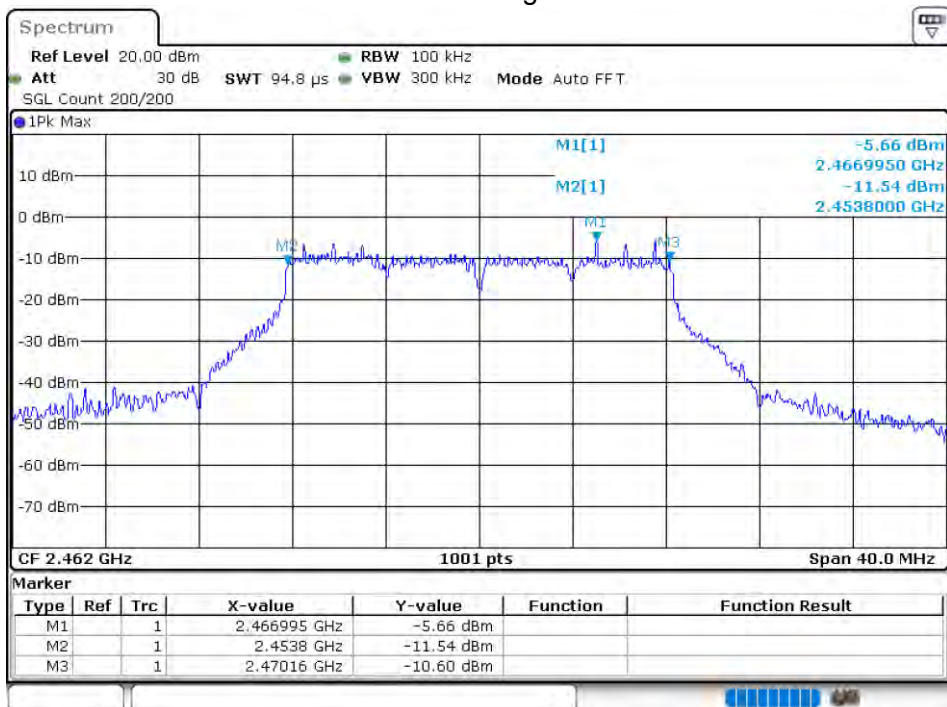


OBW NVNT 802.11n(HT20) 2412MHz Ant1

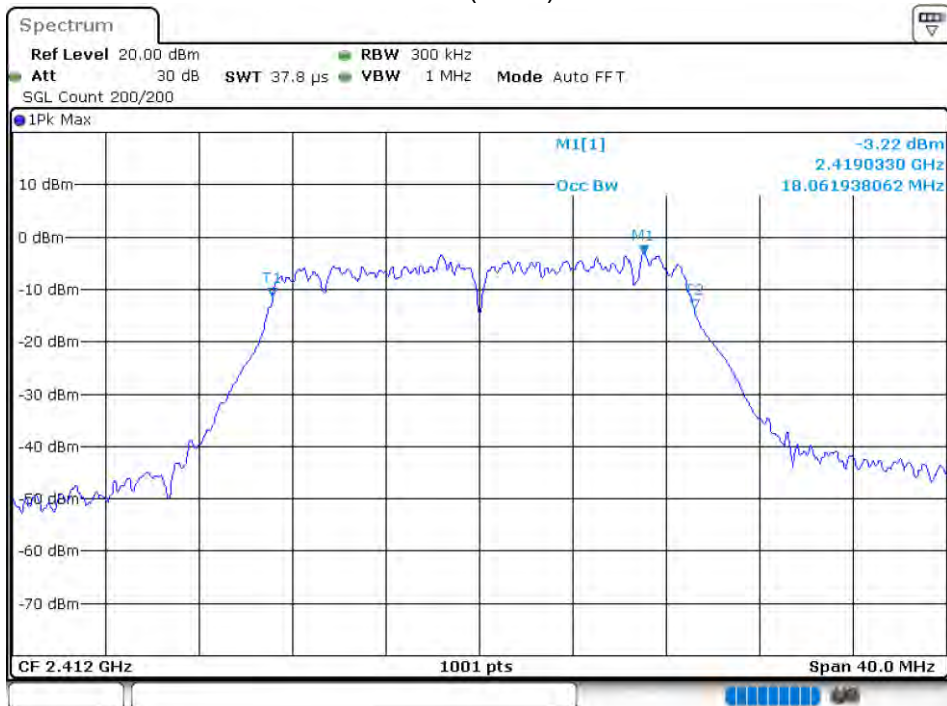


-6 dB BW NVNT 802.11n(HT20) 2412MHz Ant1

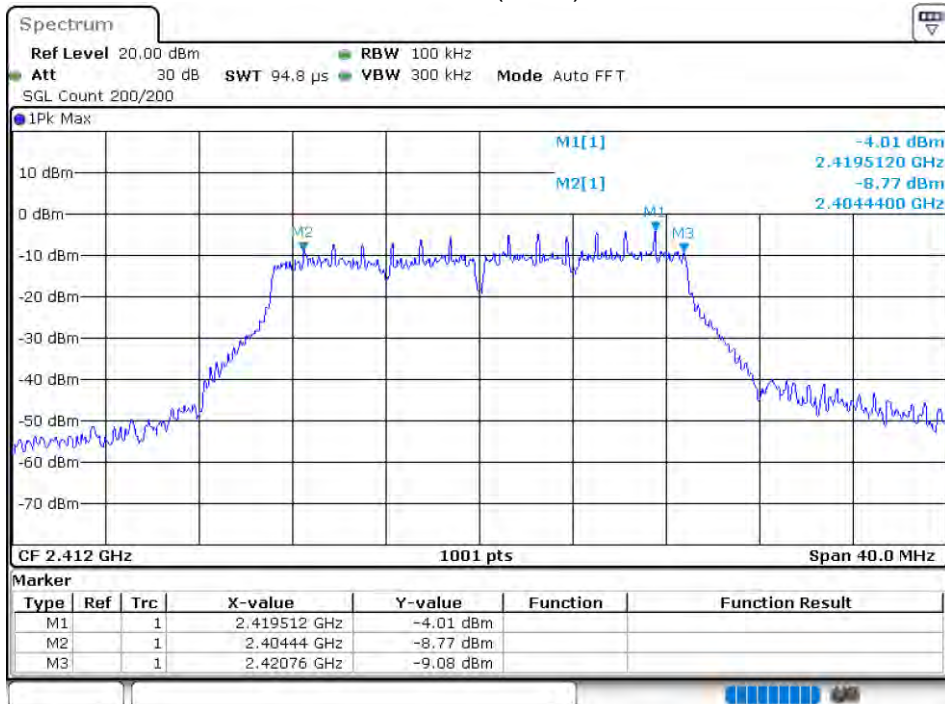

OBW NVNT 802.11n(HT20) 2437MHz Ant1

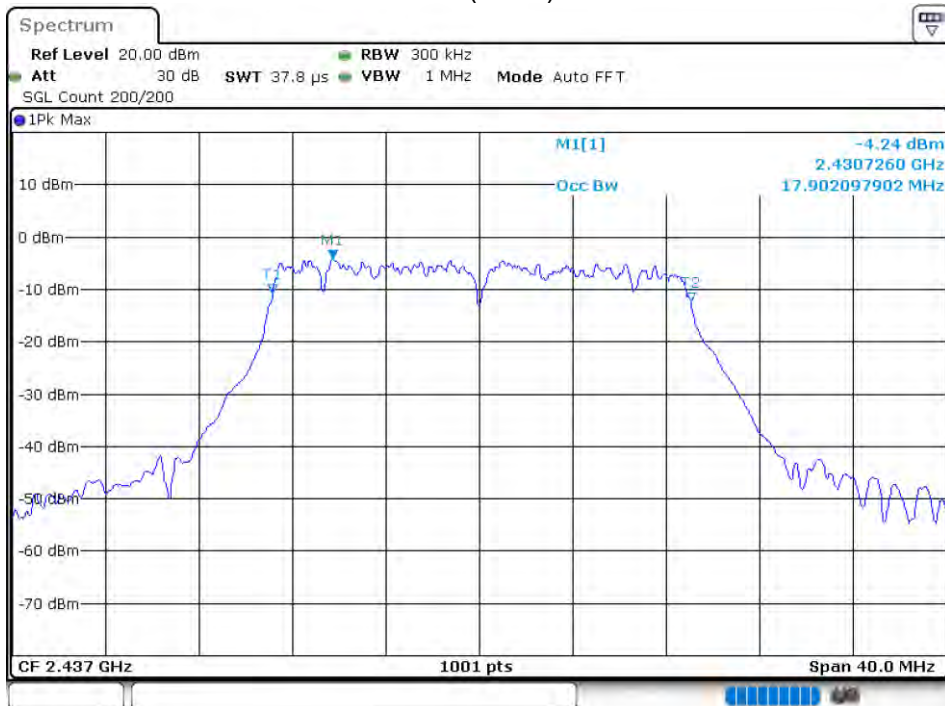


-6 dB BW NVNT 802.11n(HT20) 2437MHz Ant1

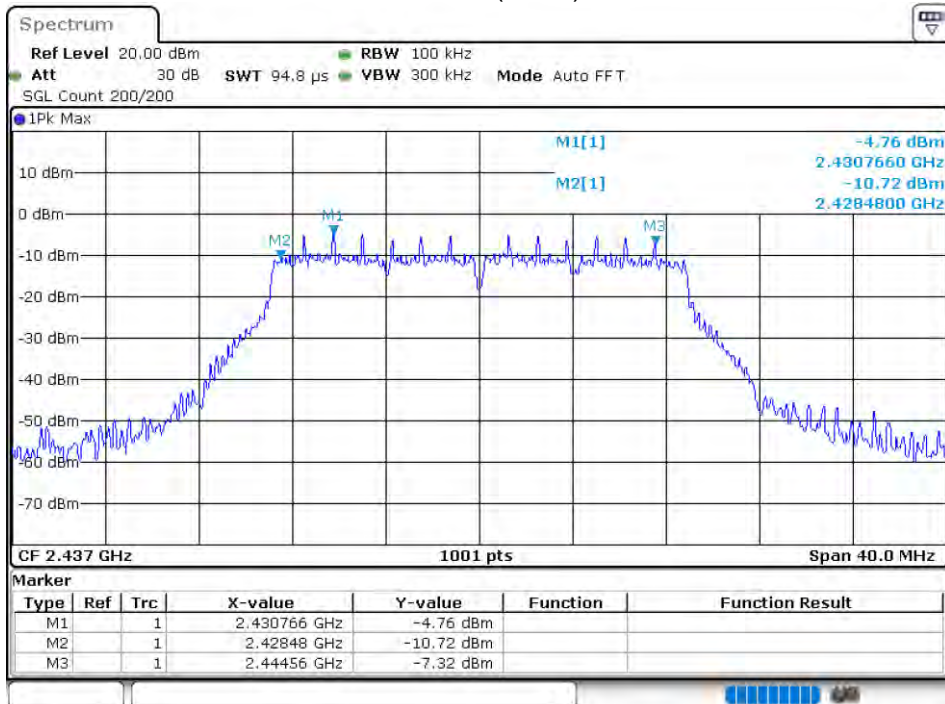


OBW NVNT 802.11n(HT20) 2462MHz Ant1




-6 dB BW NVNT 802.11n(HT20) 2462MHz Ant1

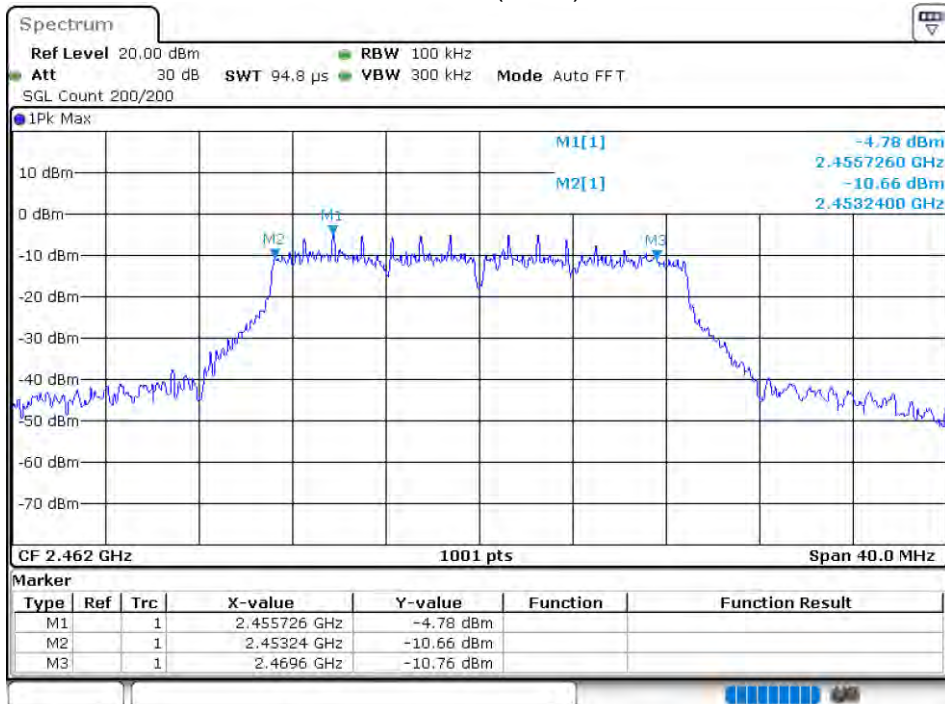


OBW NVNT 802.11n(HT40) 2422MHz Ant1

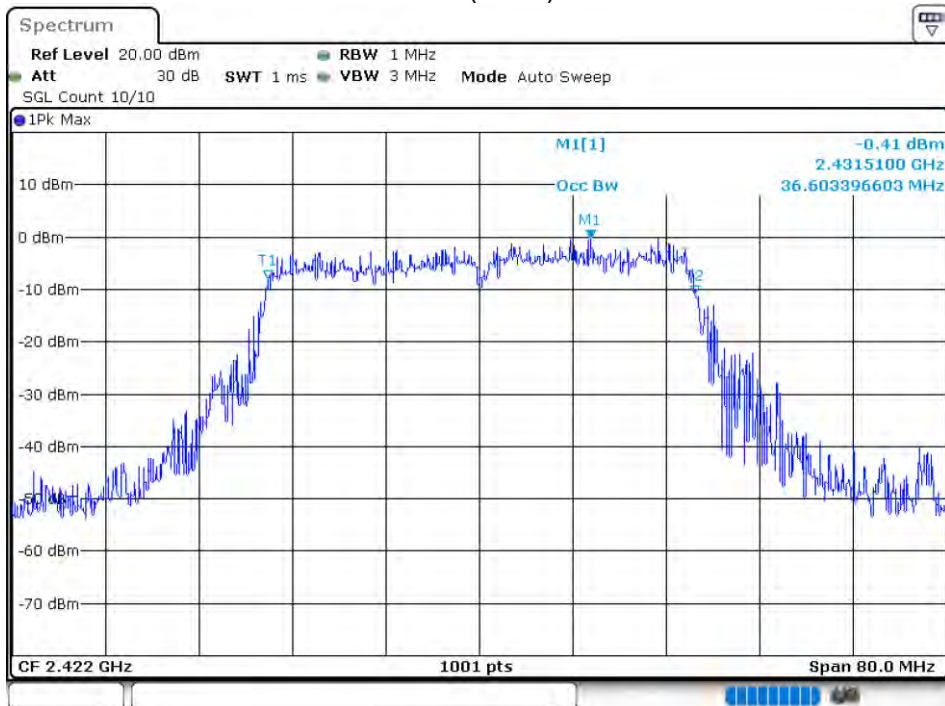


-6 dB BW NVNT 802.11n(HT40) 2422MHz Ant1

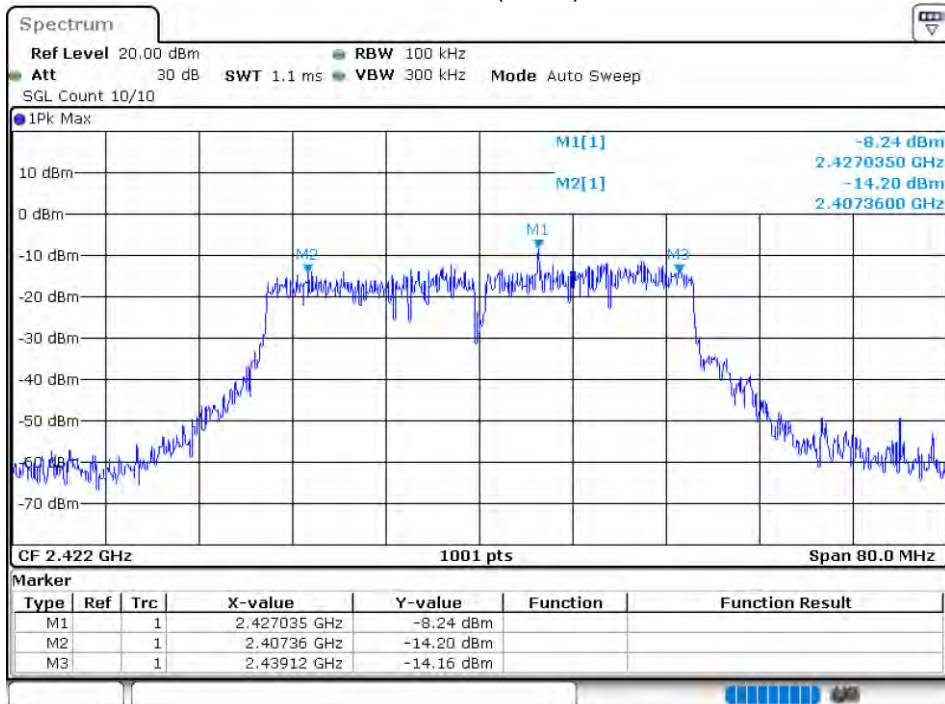


OBW NVNT 802.11n(HT40) 2437MHz Ant1

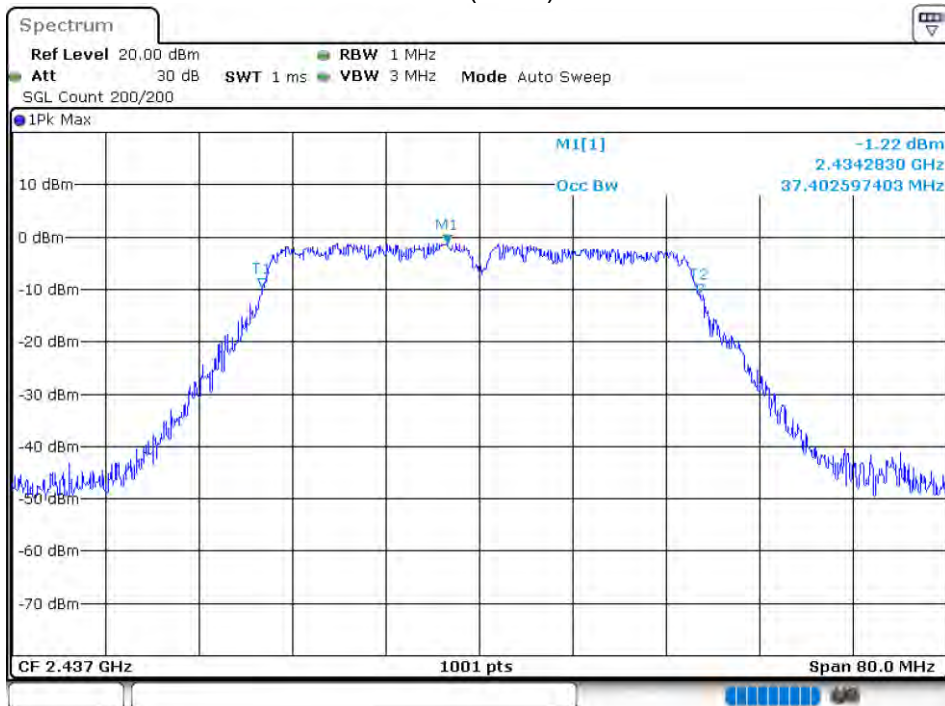


-6 dB BW NVNT 802.11n(HT40) 2437MHz Ant1

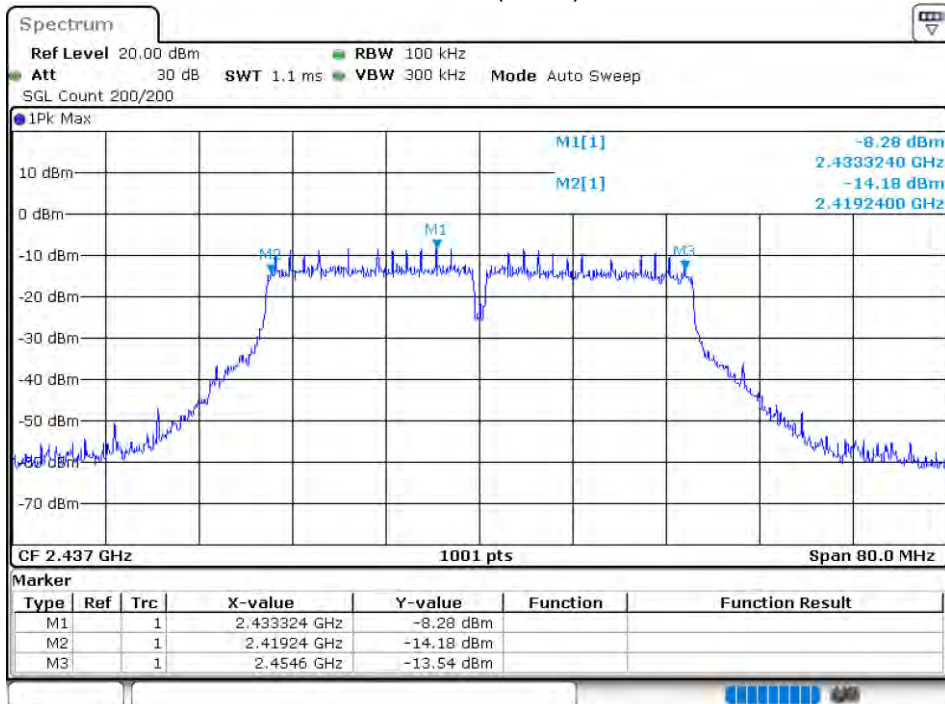

OBW NVNT 802.11n(HT40) 2452MHz Ant1

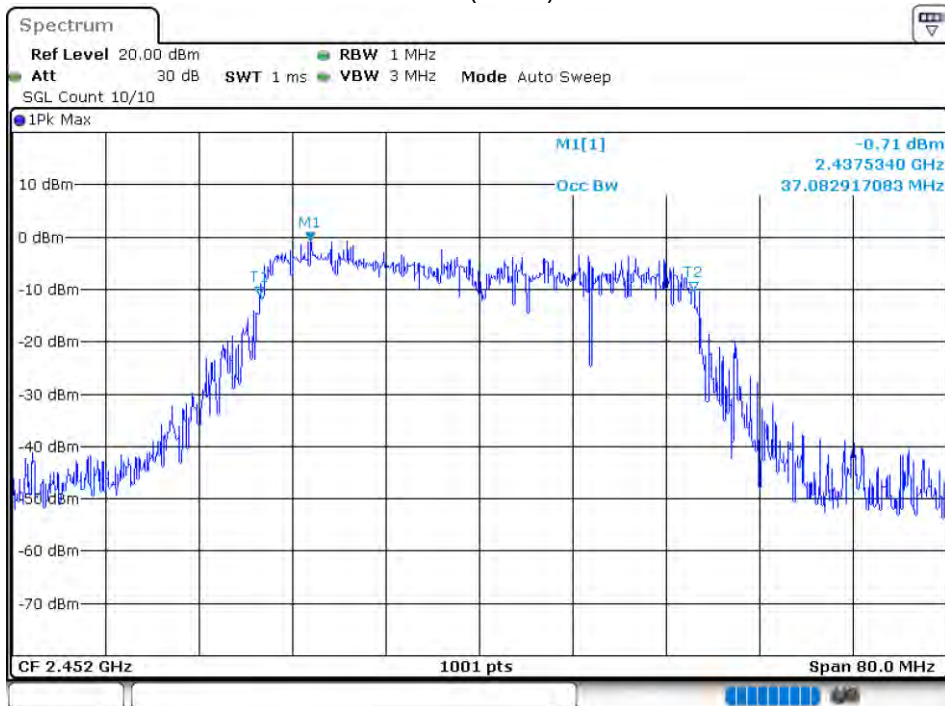


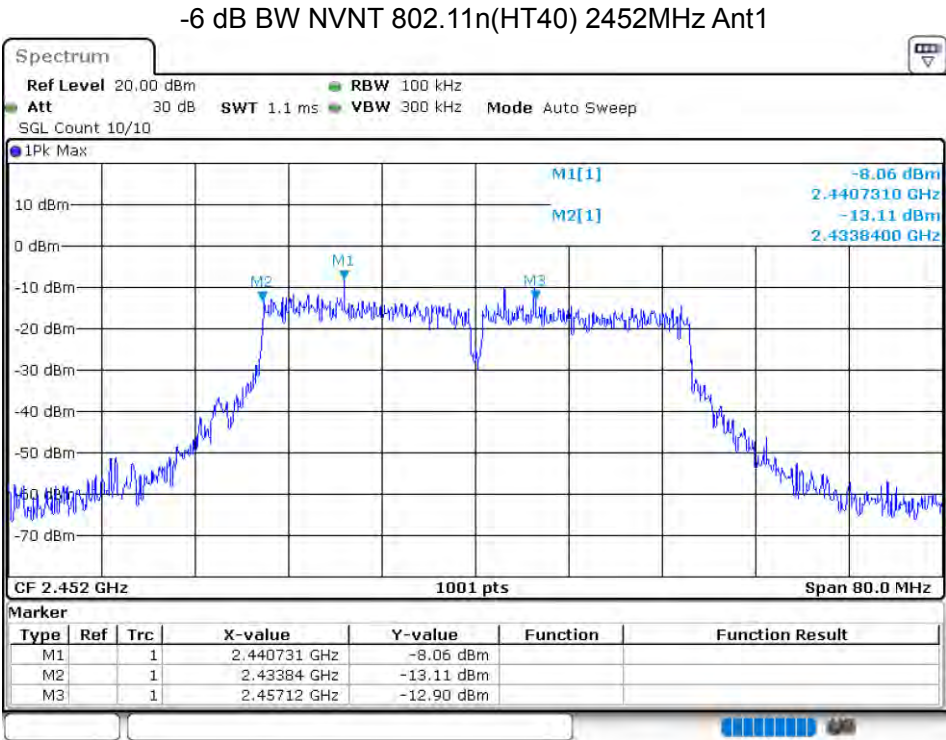


8.1.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	802.11b	2412	Ant 1	-8.225	8	Pass
NVNT	802.11b	2437	Ant 1	-7.83	8	Pass
NVNT	802.11b	2462	Ant 1	-8.126	8	Pass
NVNT	802.11g	2412	Ant 1	-11.603	8	Pass
NVNT	802.11g	2437	Ant 1	-12.361	8	Pass
NVNT	802.11g	2462	Ant 1	-11.986	8	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-11.96	8	Pass
NVNT	802.11n(HT20)	2437	Ant 1	-12.833	8	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-12.84	8	Pass
NVNT	802.11n(HT40)	2422	Ant 1	-14.607	8	Pass
NVNT	802.11n(HT40)	2437	Ant 1	-15.124	8	Pass
NVNT	802.11n(HT40)	2452	Ant 1	-14.86	8	Pass


PSD NVNT 802.11b 2412MHz Ant1

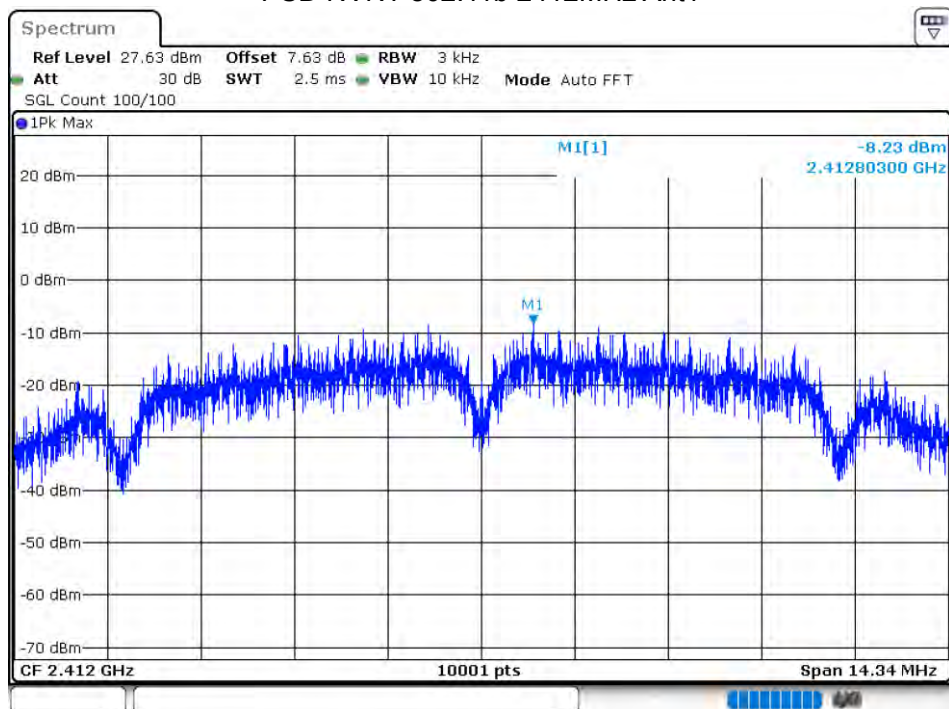


PSD NVNT 802.11b 2437MHz Ant1

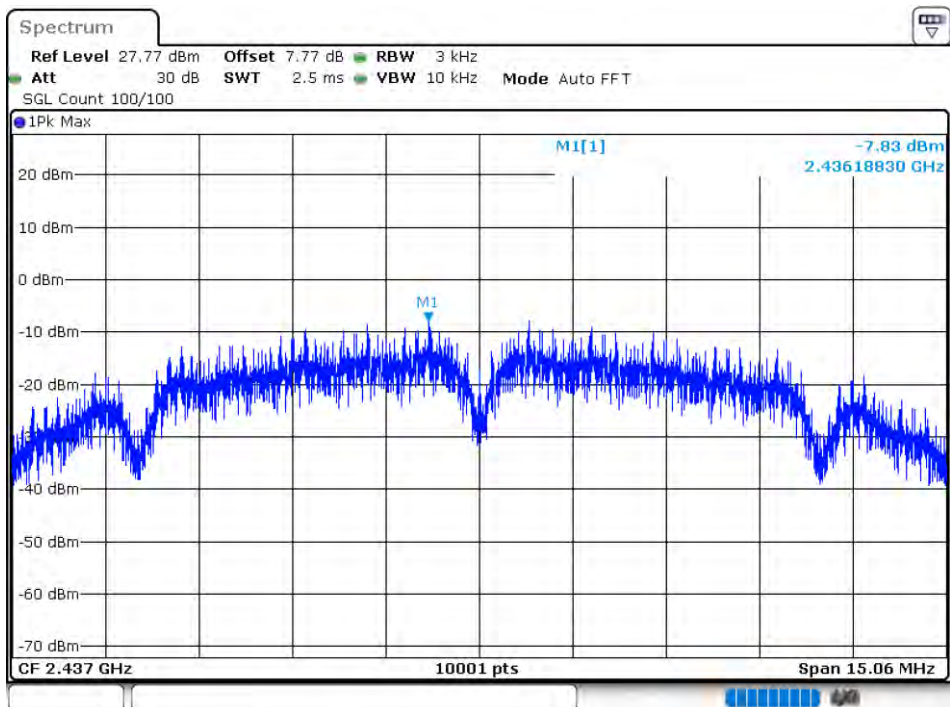


PSD NVNT 802.11b 2462MHz Ant1

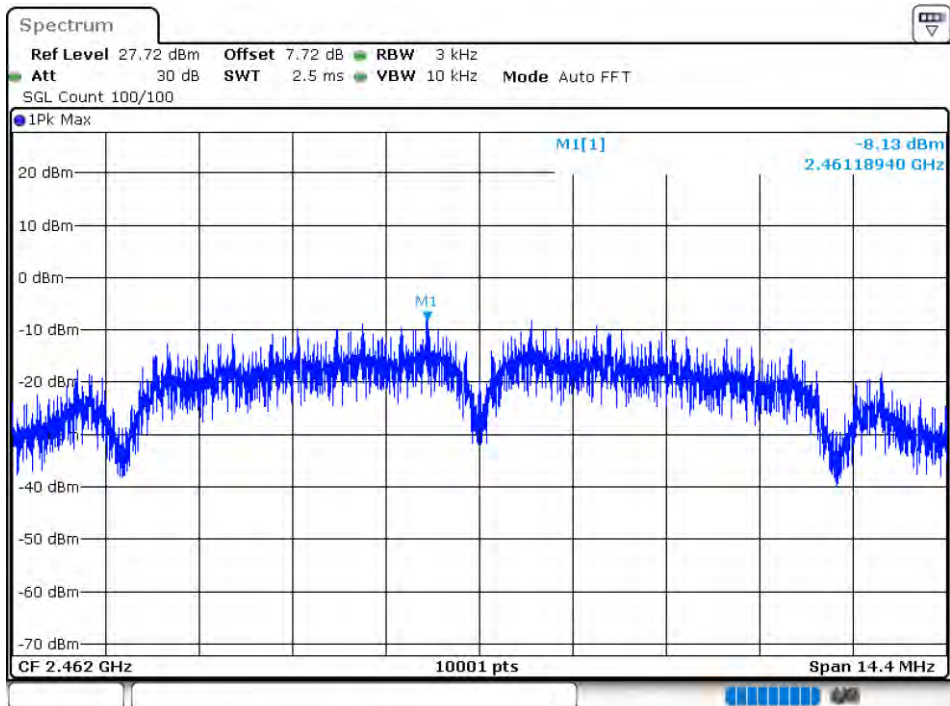


PSD NVNT 802.11g 2412MHz Ant1

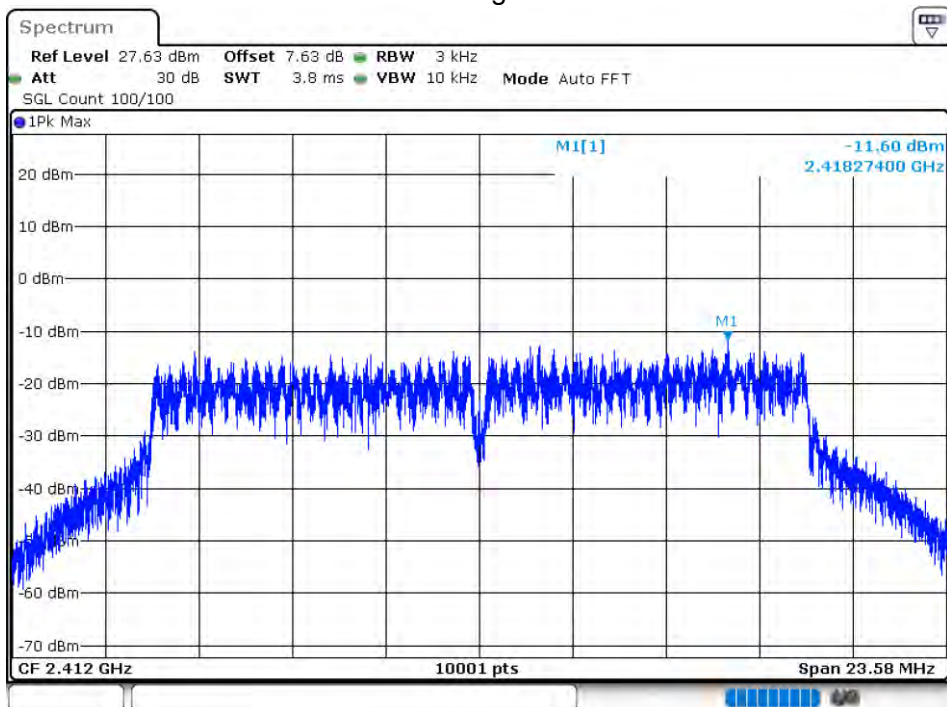


PSD NVNT 802.11g 2437MHz Ant1

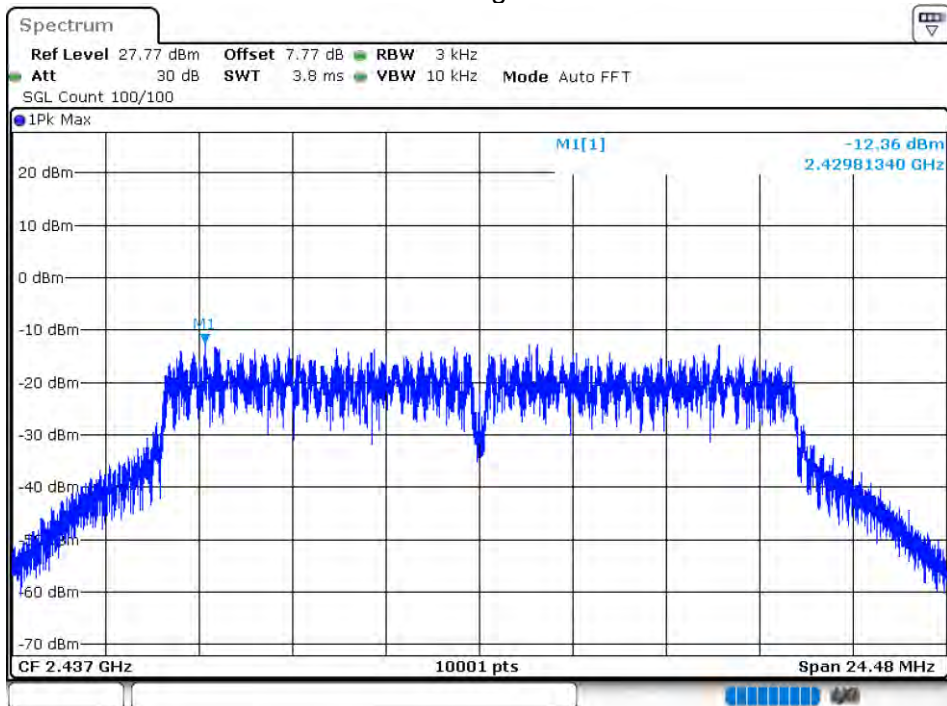


PSD NVNT 802.11g 2462MHz Ant1

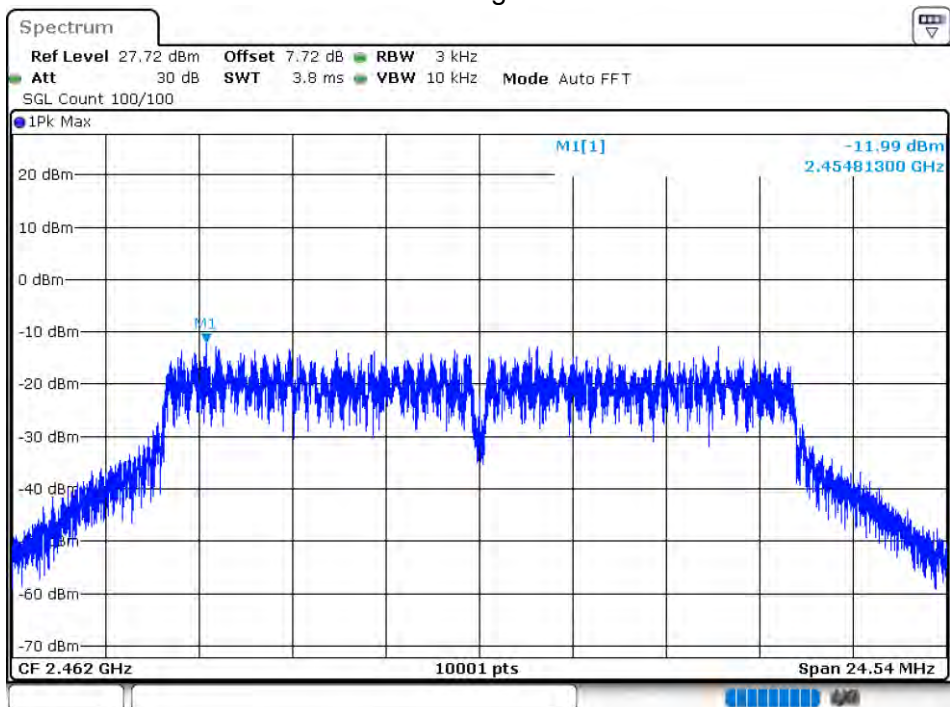


PSD NVNT 802.11n(HT20) 2412MHz Ant1

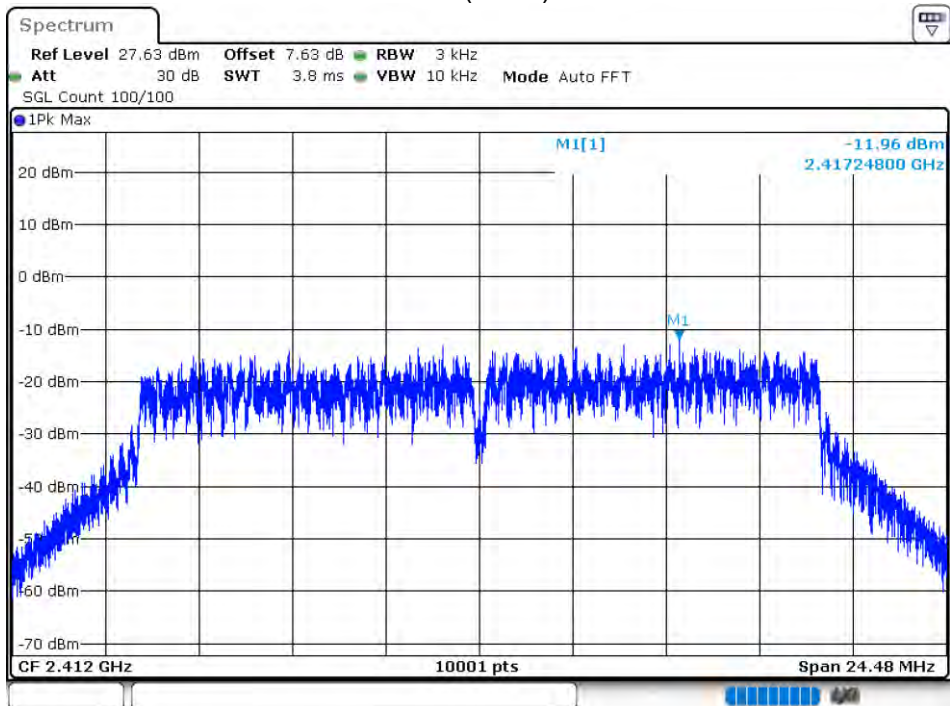


PSD NVNT 802.11n(HT20) 2437MHz Ant1

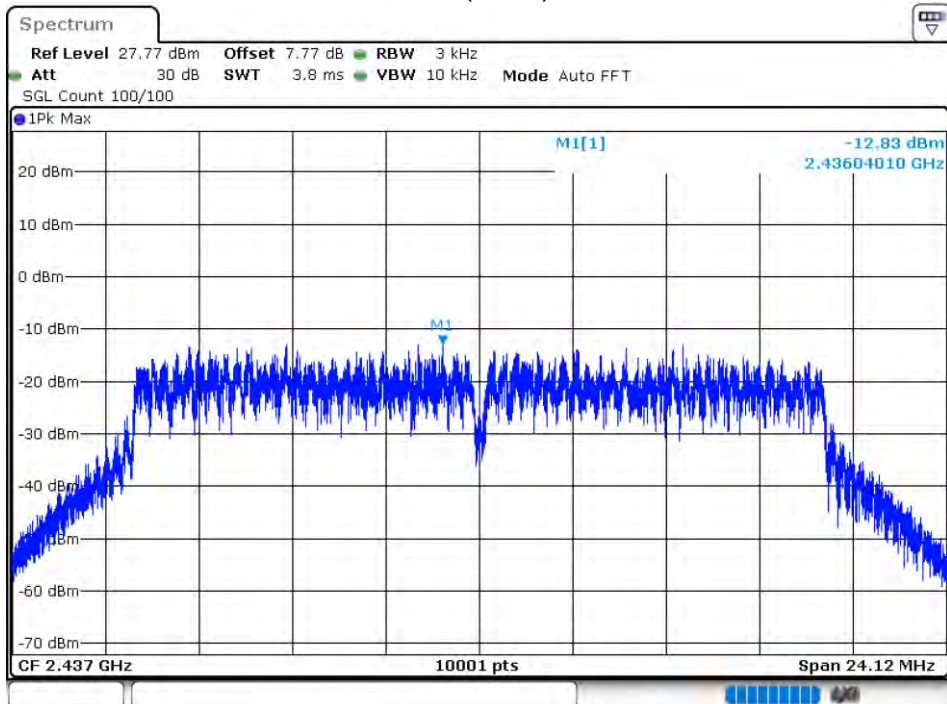


PSD NVNT 802.11n(HT20) 2462MHz Ant1

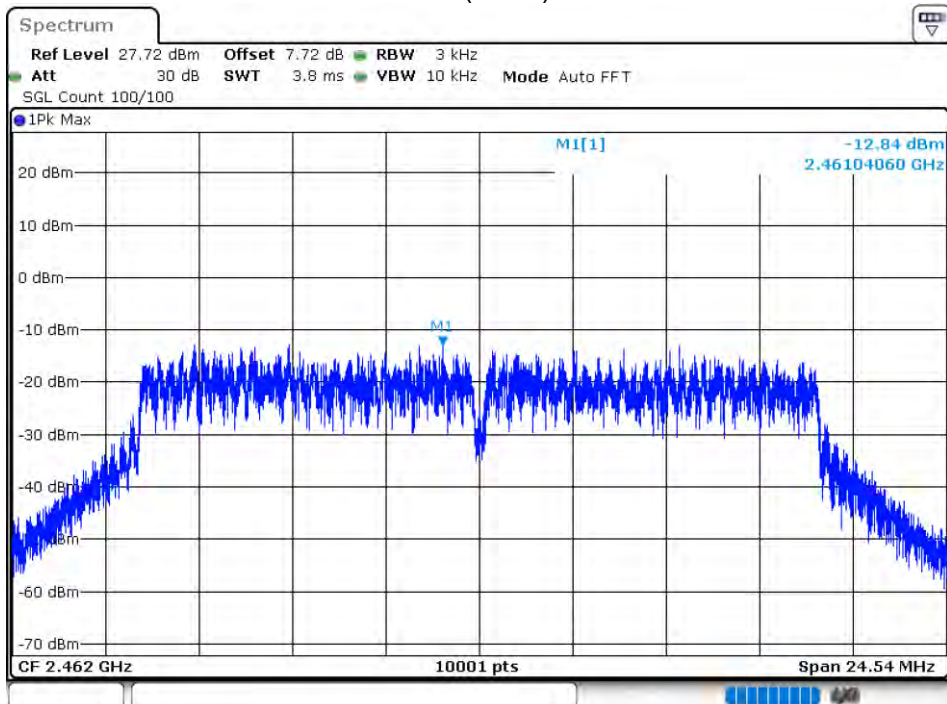


PSD NVNT 802.11n(HT40) 2422MHz Ant1

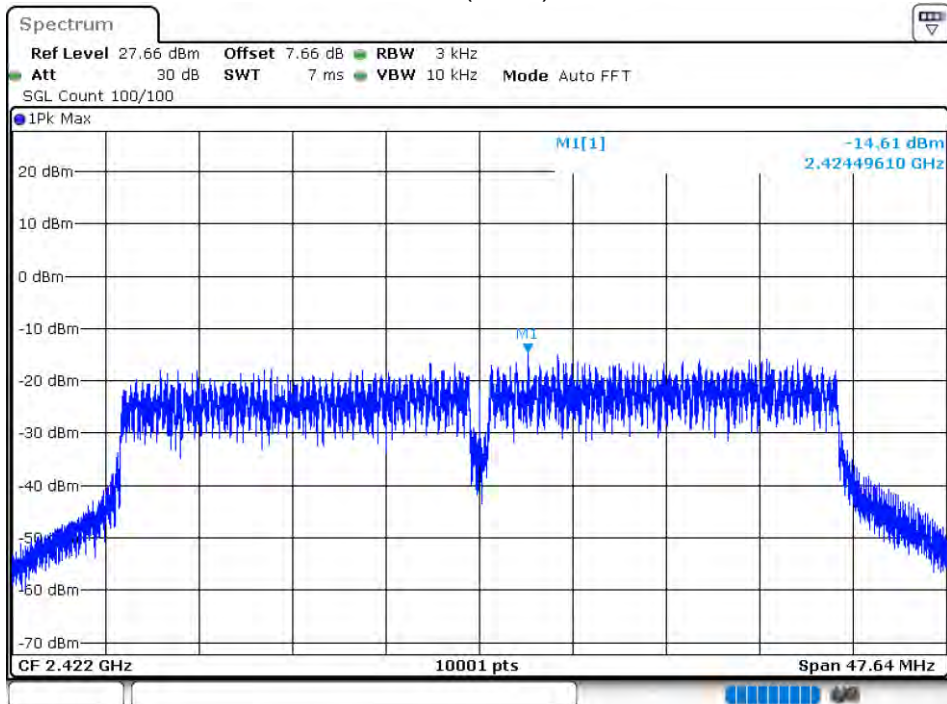

PSD NVNT 802.11n(HT40) 2437MHz Ant1

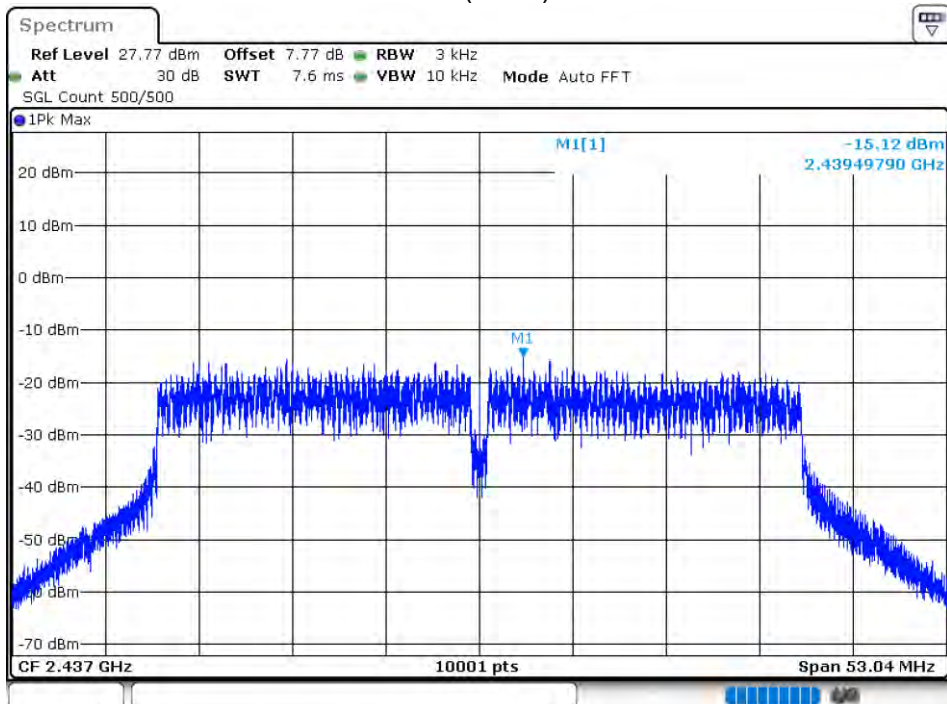

PSD NVNT 802.11n(HT40) 2452MHz Ant1

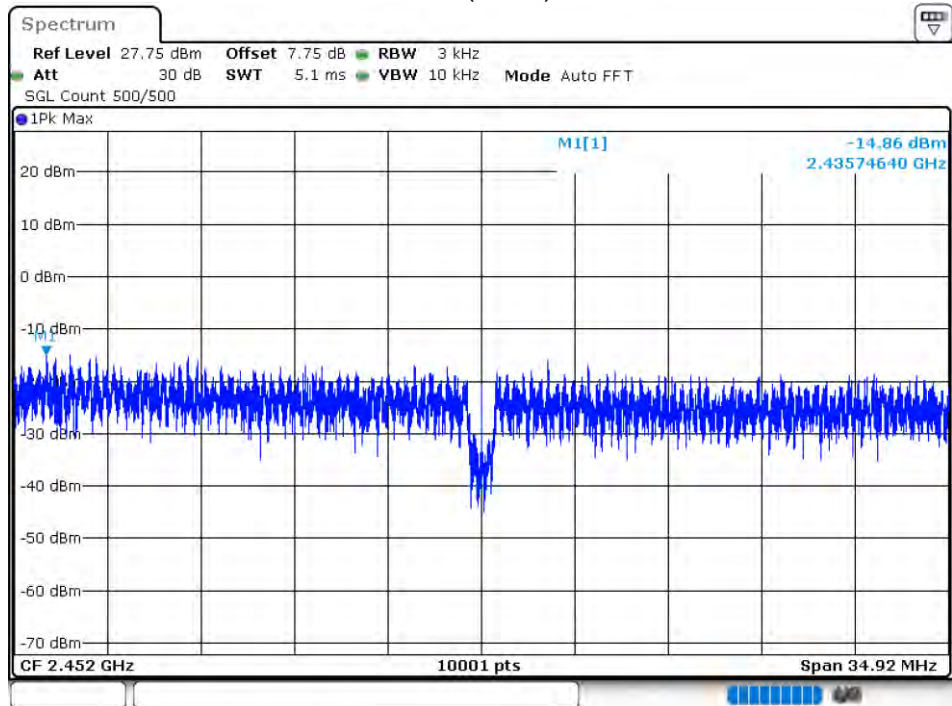


8.1.5 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b	2412	Ant 1	-54.48	-20	Pass
NVNT	802.11b	2462	Ant 1	-56.08	-20	Pass
NVNT	802.11g	2412	Ant 1	-49.36	-20	Pass
NVNT	802.11g	2462	Ant 1	-44.28	-20	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-47.33	-20	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-43.73	-20	Pass
NVNT	802.11n(HT40)	2422	Ant 1	-45.4	-20	Pass
NVNT	802.11n(HT40)	2452	Ant 1	-48.53	-20	Pass

Band Edge NVNT 802.11b 2412MHz Ant1 Ref




Band Edge NVNT 802.11b 2412MHz Ant1 Emission

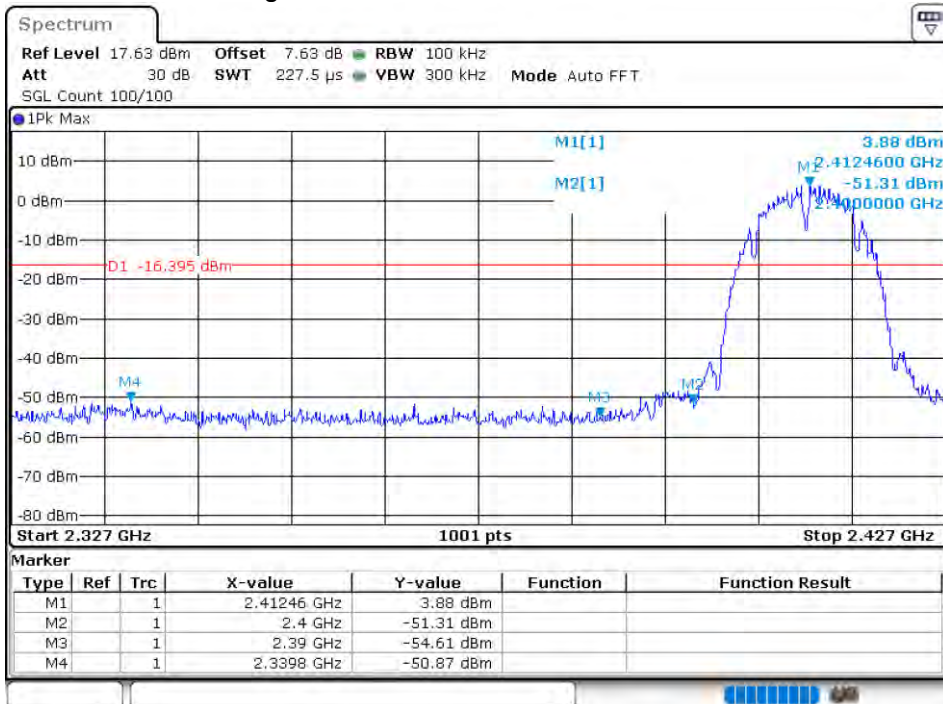


Band Edge NVNT 802.11b 2462MHz Ant1 Ref




Band Edge NVNT 802.11b 2462MHz Ant1 Emission

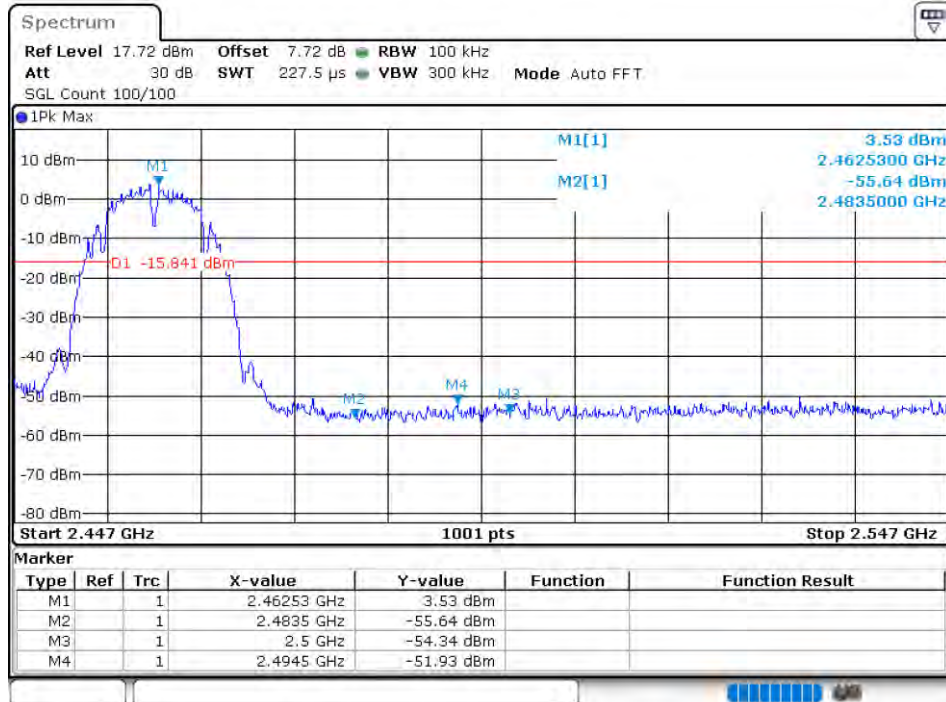


Band Edge NVNT 802.11g 2412MHz Ant1 Ref

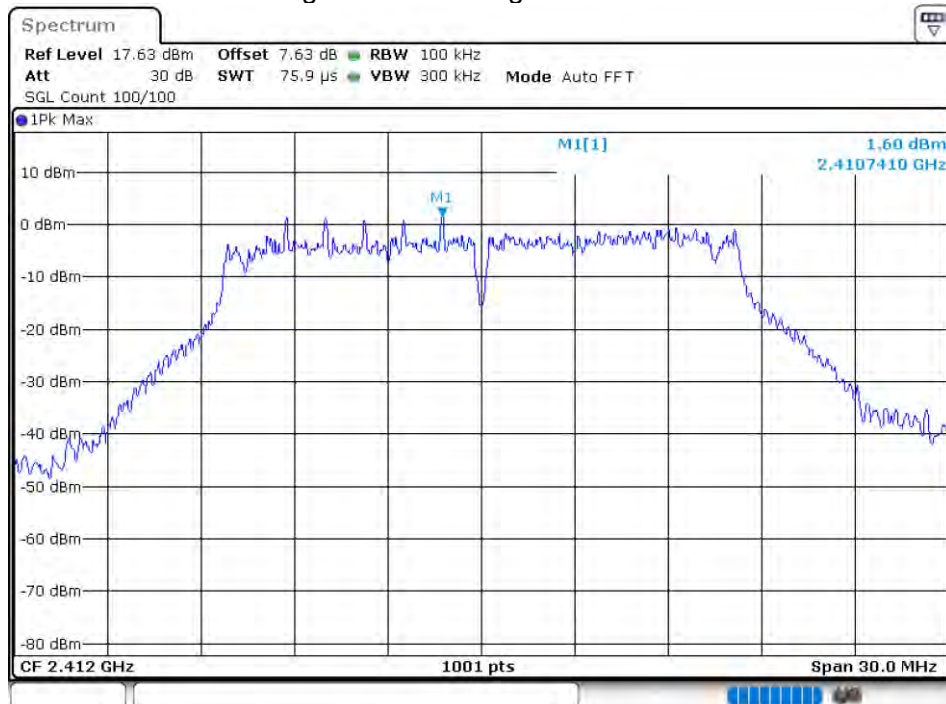


Band Edge NVNT 802.11g 2412MHz Ant1 Emission

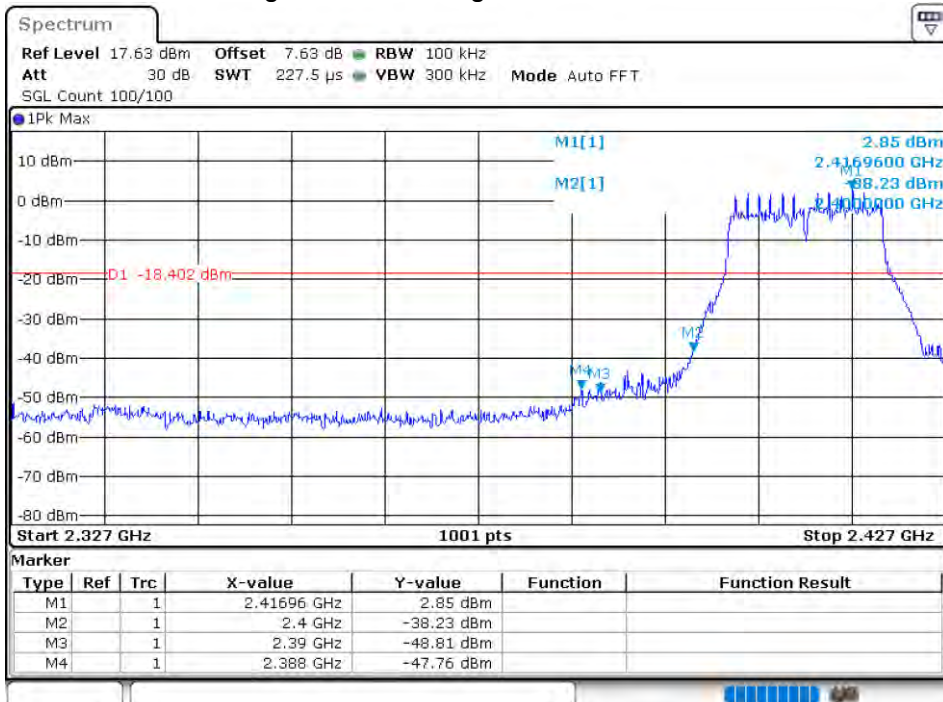


Band Edge NVNT 802.11g 2462MHz Ant1 Ref

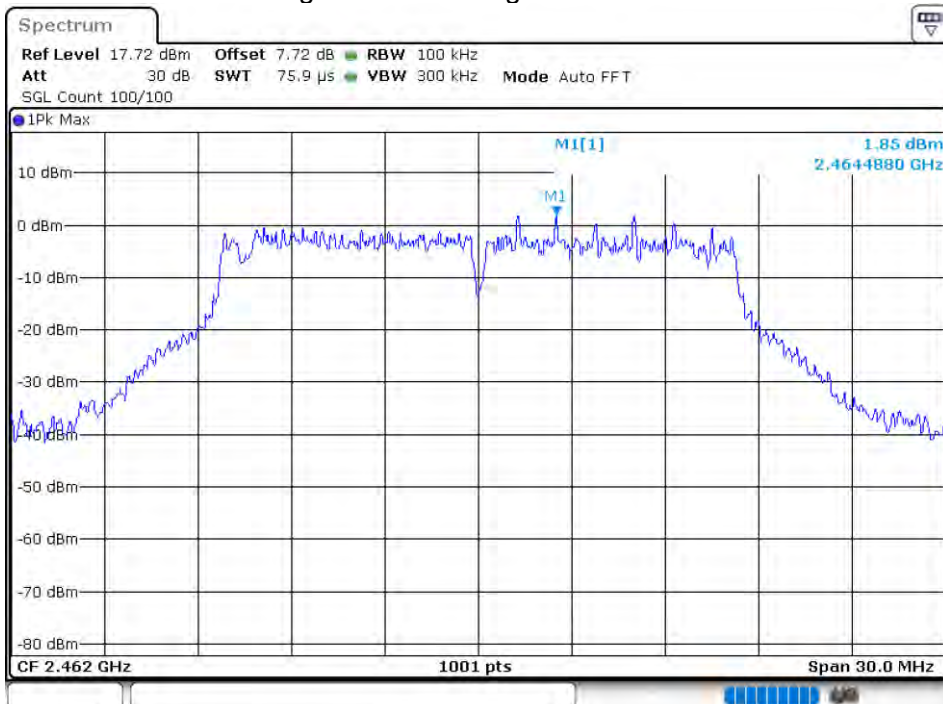


Band Edge NVNT 802.11g 2462MHz Ant1 Emission

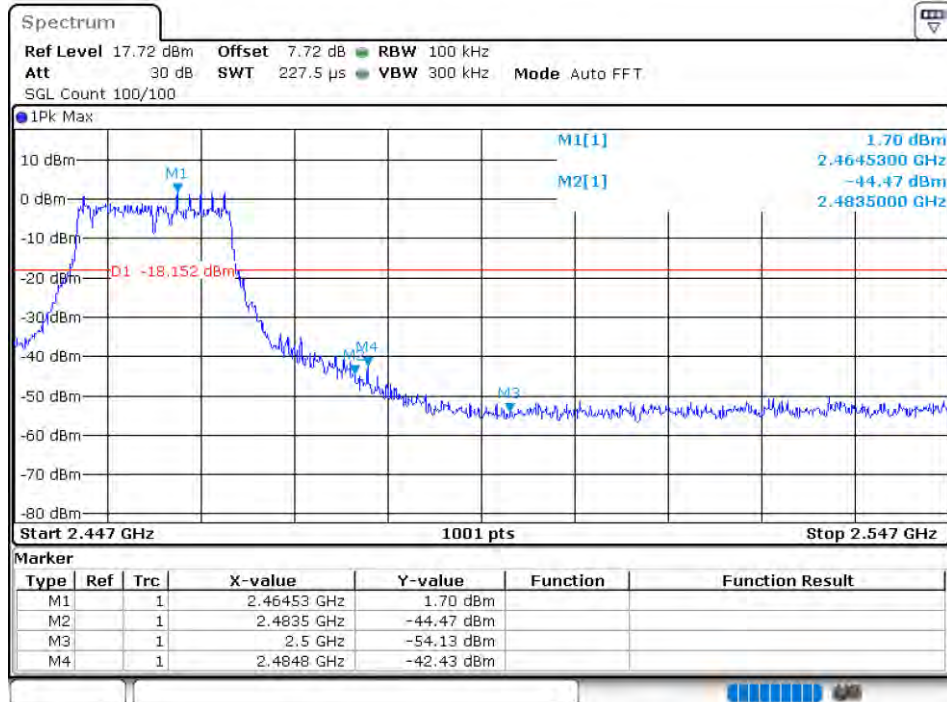


Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Ref

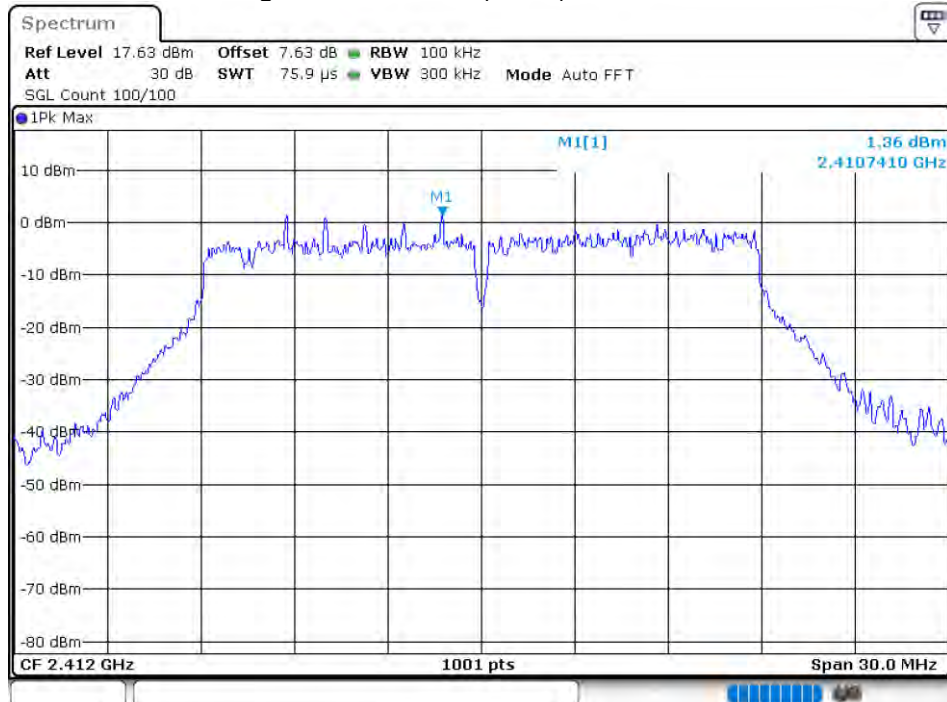


Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Emission

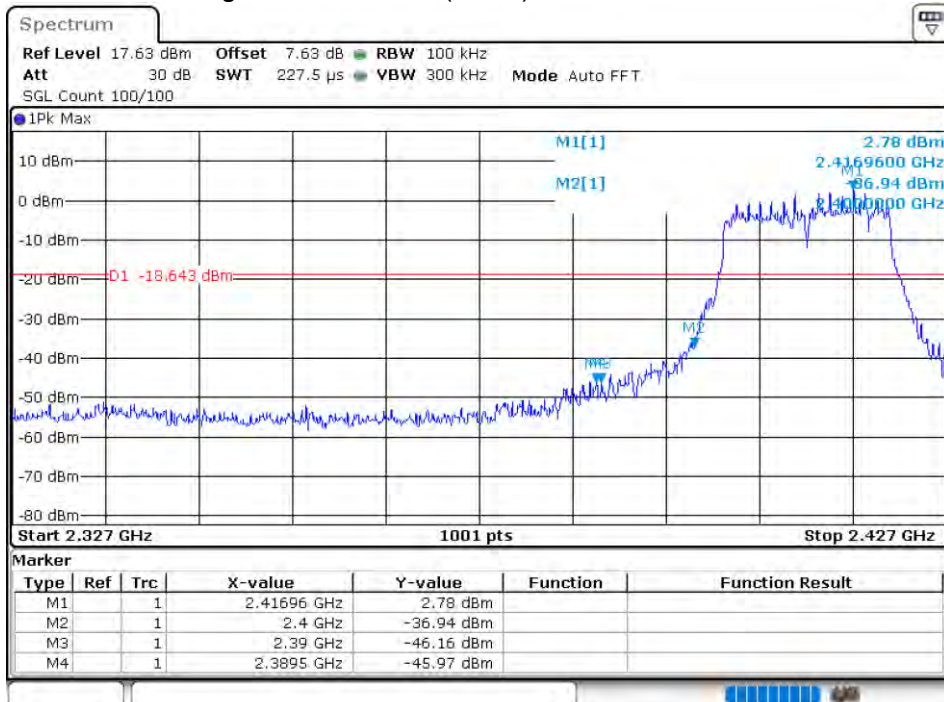


Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Ref

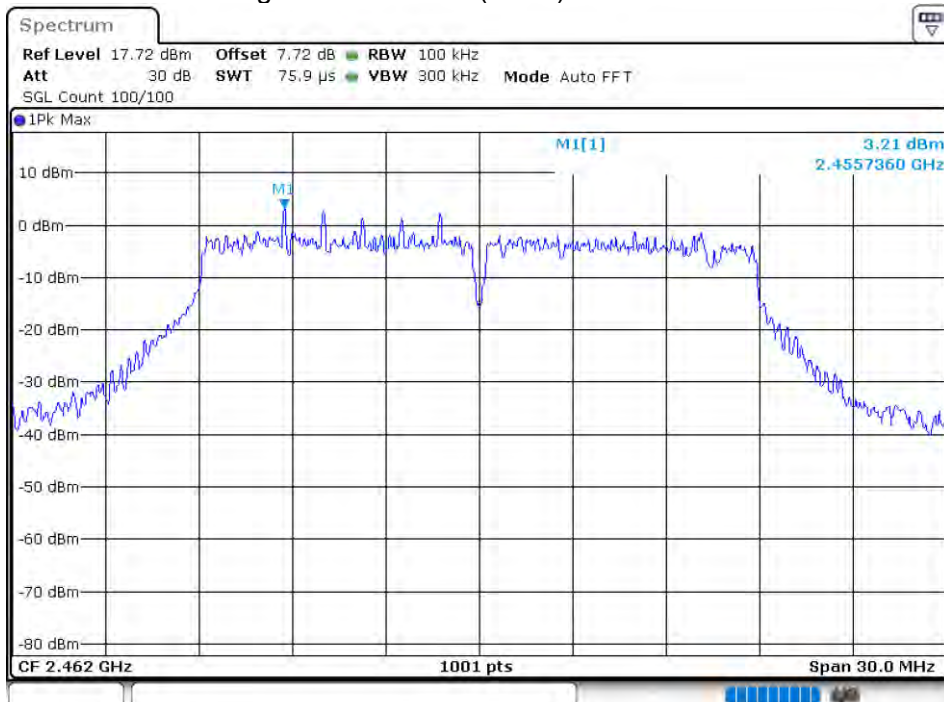


Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Emission

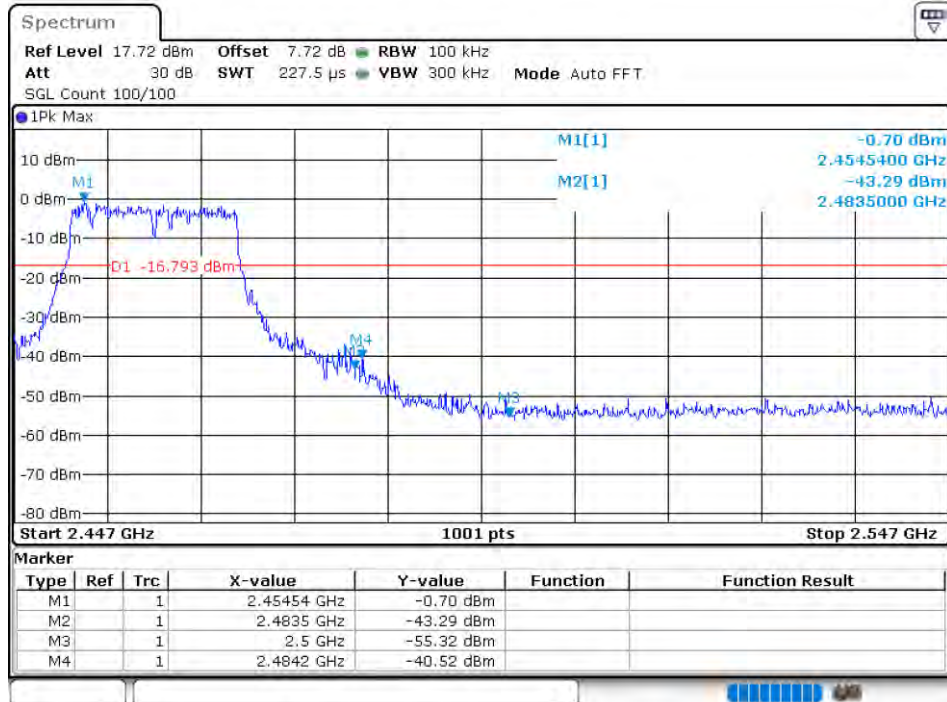

Band Edge NVNT 802.11n(HT40) 2422MHz Ant1 Ref

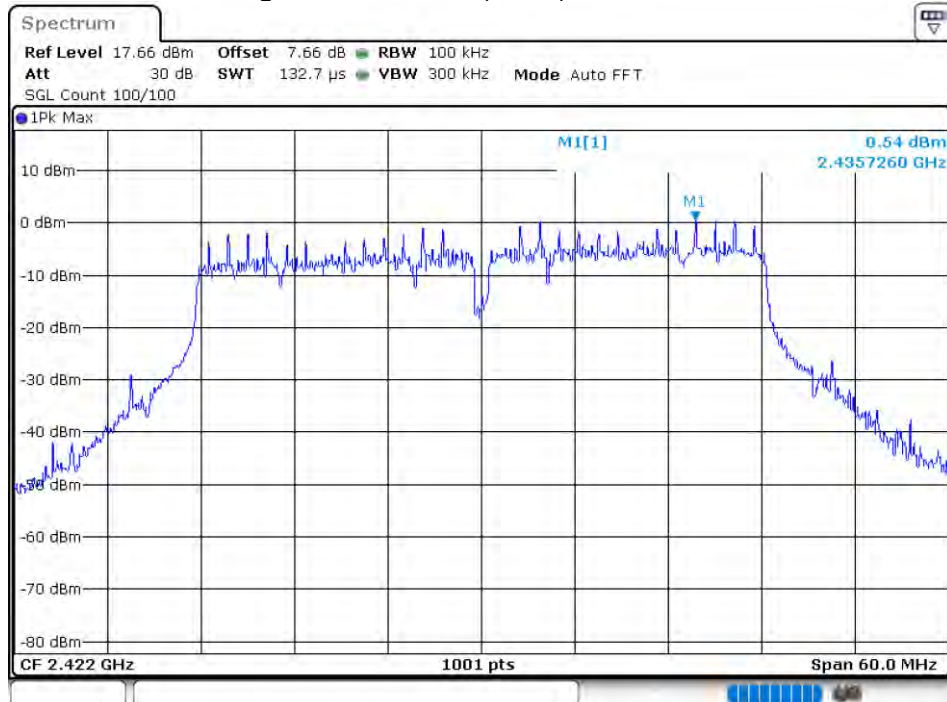


Band Edge NVNT 802.11n(HT40) 2422MHz Ant1 Emission

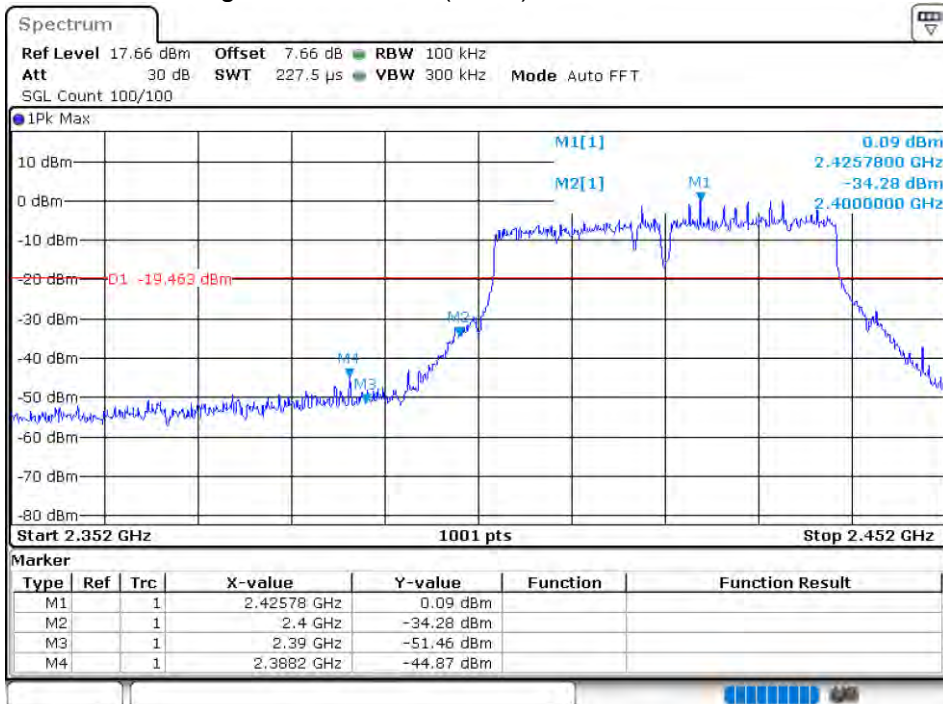

Band Edge NVNT 802.11n(HT40) 2452MHz Ant1 Ref



Band Edge NVNT 802.11n(HT40) 2452MHz Ant1 Emission

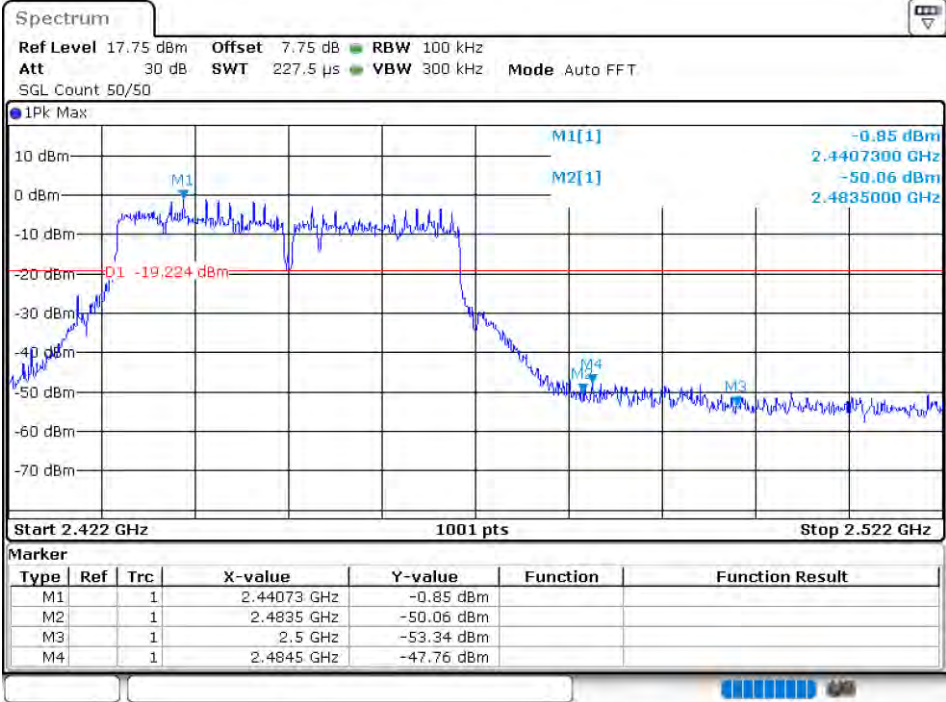


8.1.6 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b	2412	Ant 1	-45.38	-20	Pass
NVNT	802.11b	2437	Ant 1	-44.22	-20	Pass
NVNT	802.11b	2462	Ant 1	-49.11	-20	Pass
NVNT	802.11g	2412	Ant 1	-43.68	-20	Pass
NVNT	802.11g	2437	Ant 1	-43.18	-20	Pass
NVNT	802.11g	2462	Ant 1	-44.37	-20	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-40.79	-20	Pass
NVNT	802.11n(HT20)	2437	Ant 1	-40.44	-20	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-48.38	-20	Pass
NVNT	802.11n(HT40)	2422	Ant 1	-40.05	-20	Pass
NVNT	802.11n(HT40)	2437	Ant 1	-40.65	-20	Pass
NVNT	802.11n(HT40)	2452	Ant 1	-44.47	-20	Pass

Tx. Spurious NVNT 802.11b 2412MHz Ant1 Ref




Tx. Spurious NVNT 802.11b 2412MHz Ant1 Emission

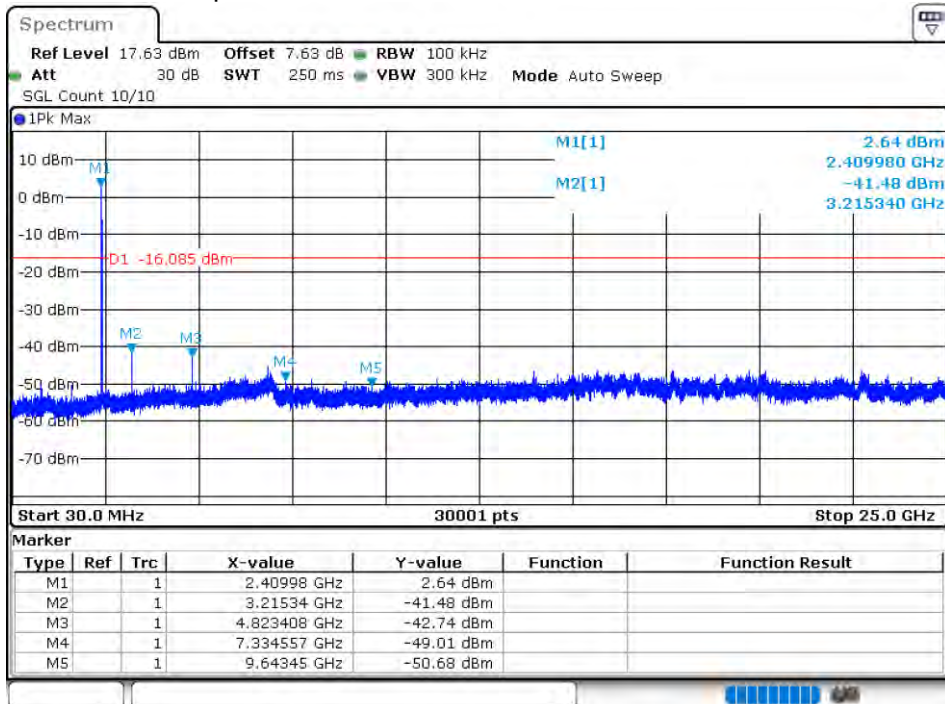


Tx. Spurious NVNT 802.11b 2437MHz Ant1 Ref




Tx. Spurious NVNT 802.11b 2437MHz Ant1 Emission

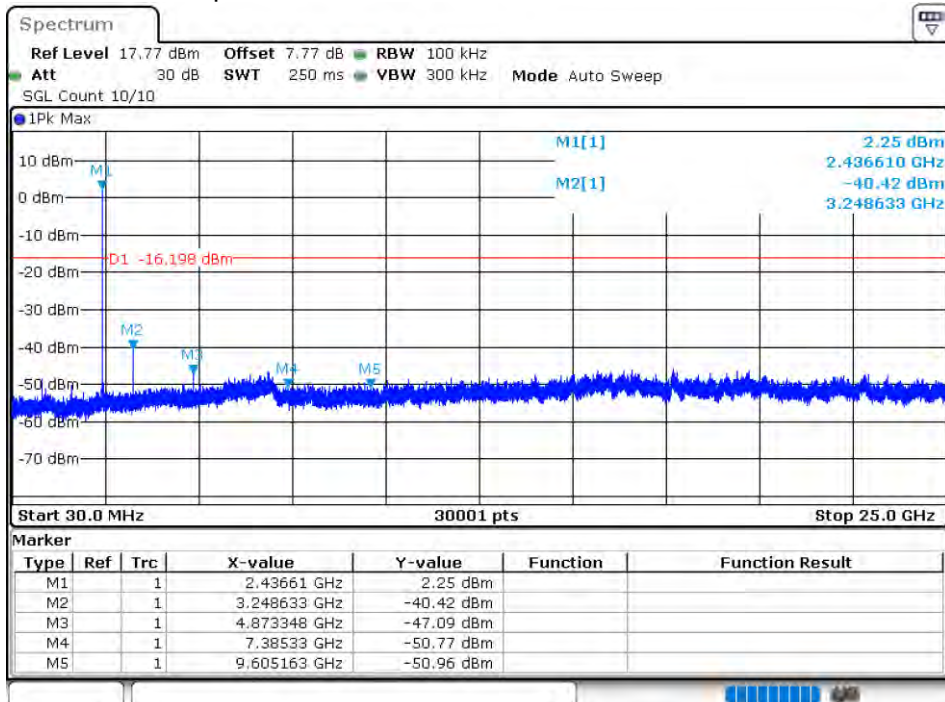


Tx. Spurious NVNT 802.11b 2462MHz Ant1 Ref

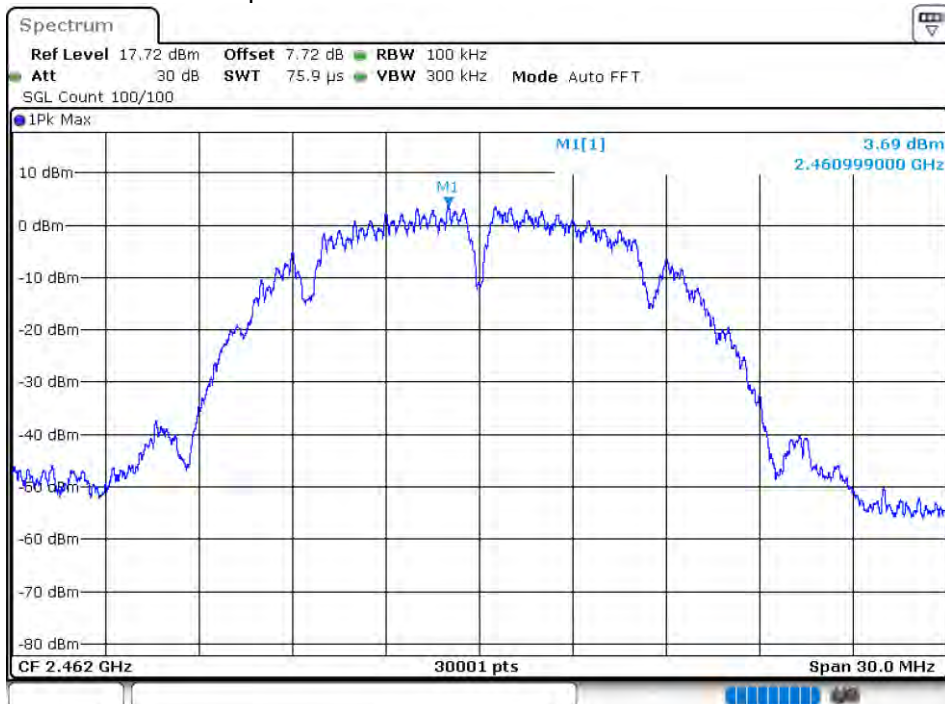


Tx. Spurious NVNT 802.11b 2462MHz Ant1 Emission

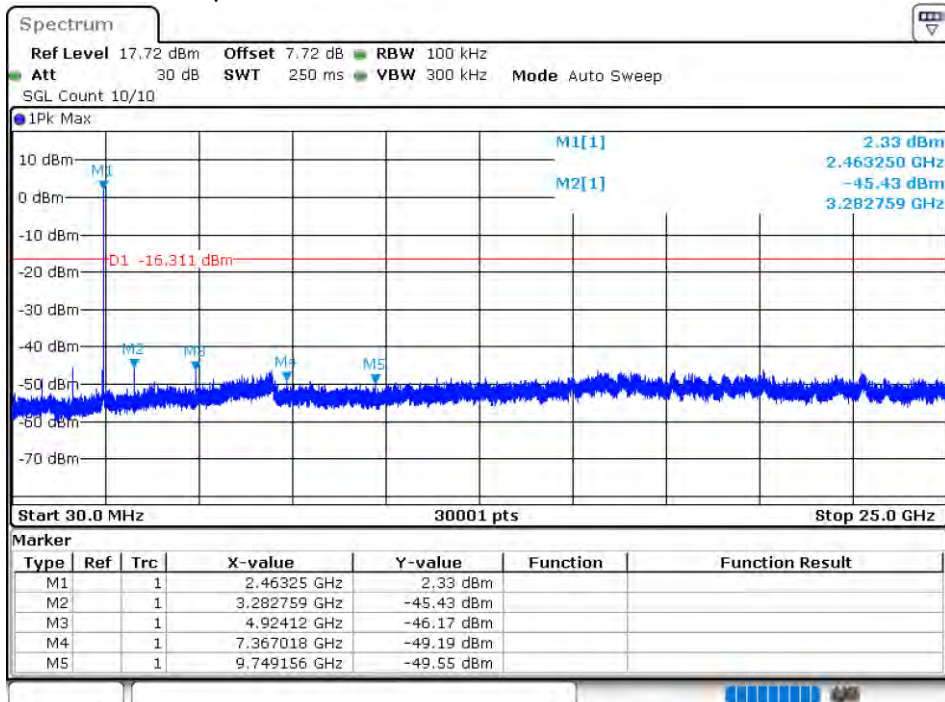


Tx. Spurious NVNT 802.11g 2412MHz Ant1 Ref

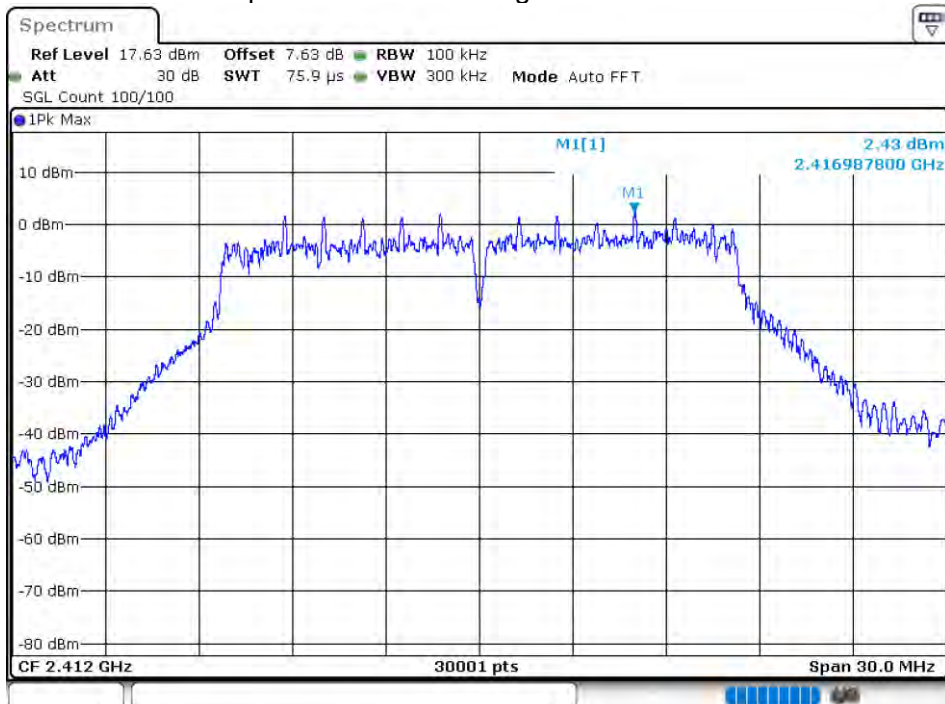


Tx. Spurious NVNT 802.11g 2412MHz Ant1 Emission

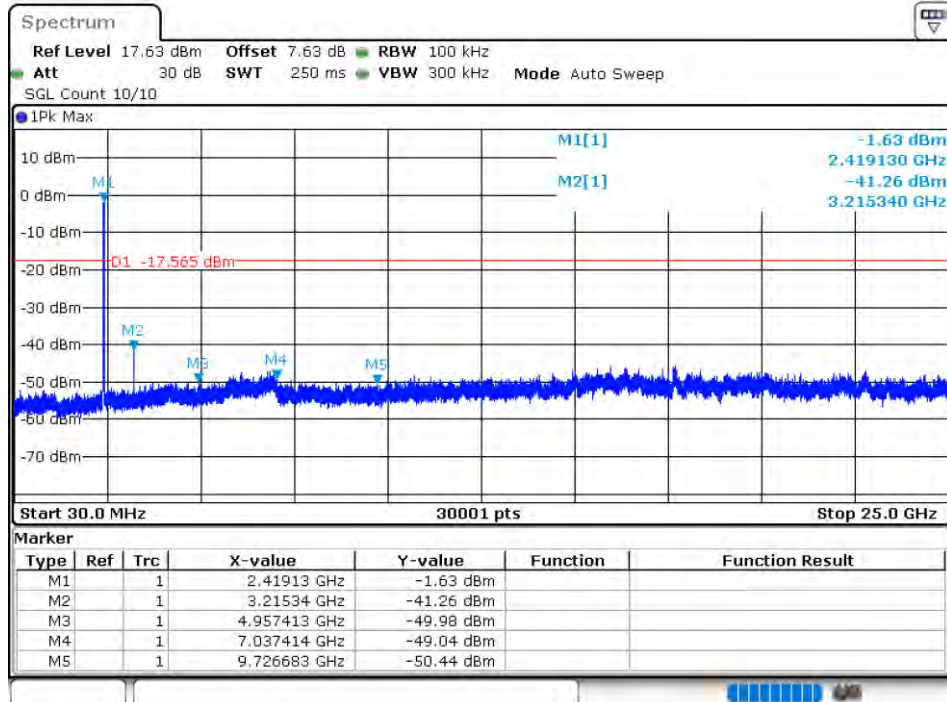


Tx. Spurious NVNT 802.11g 2437MHz Ant1 Ref

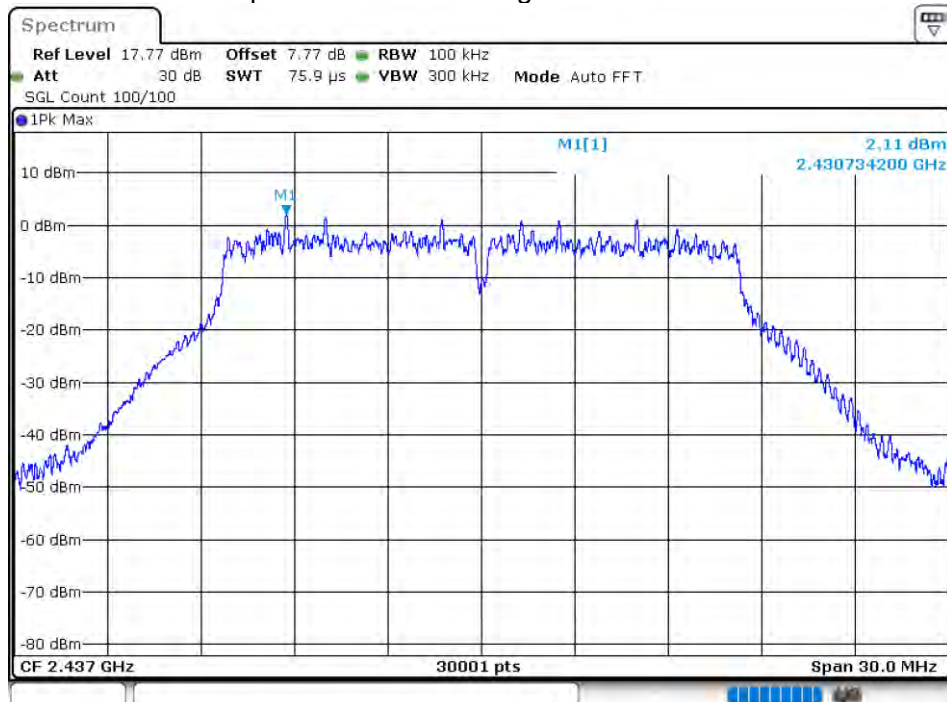


Tx. Spurious NVNT 802.11g 2437MHz Ant1 Emission

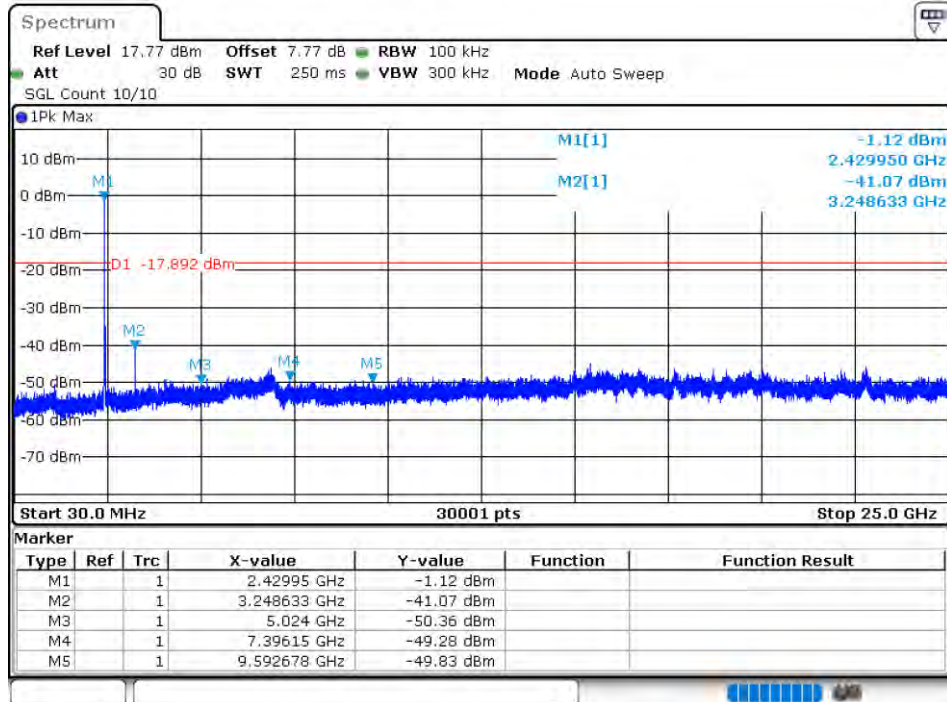


Tx. Spurious NVNT 802.11g 2462MHz Ant1 Ref

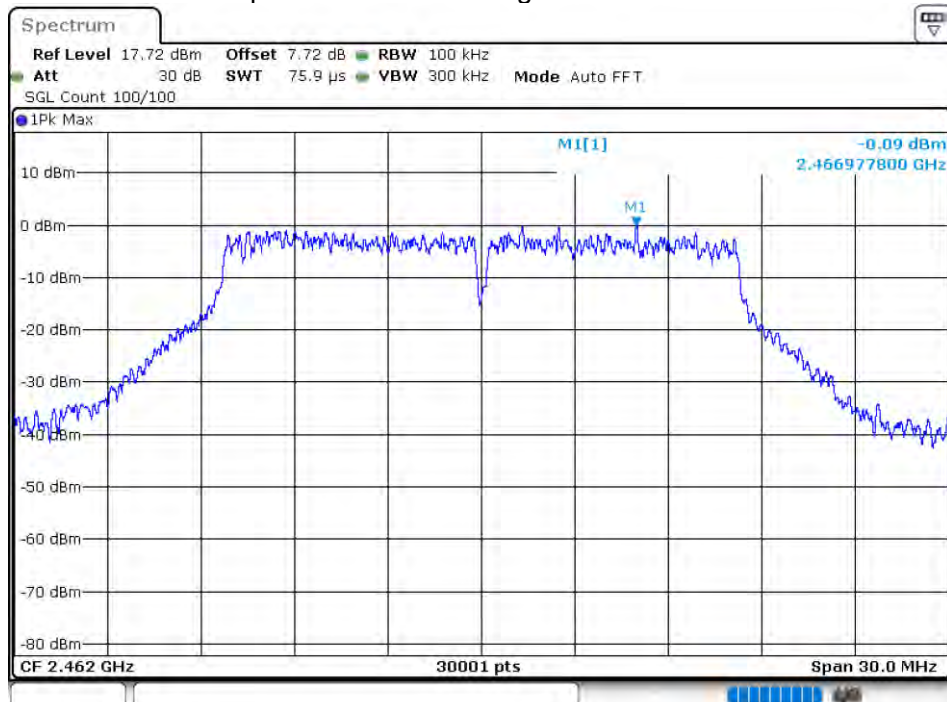


Tx. Spurious NVNT 802.11g 2462MHz Ant1 Emission

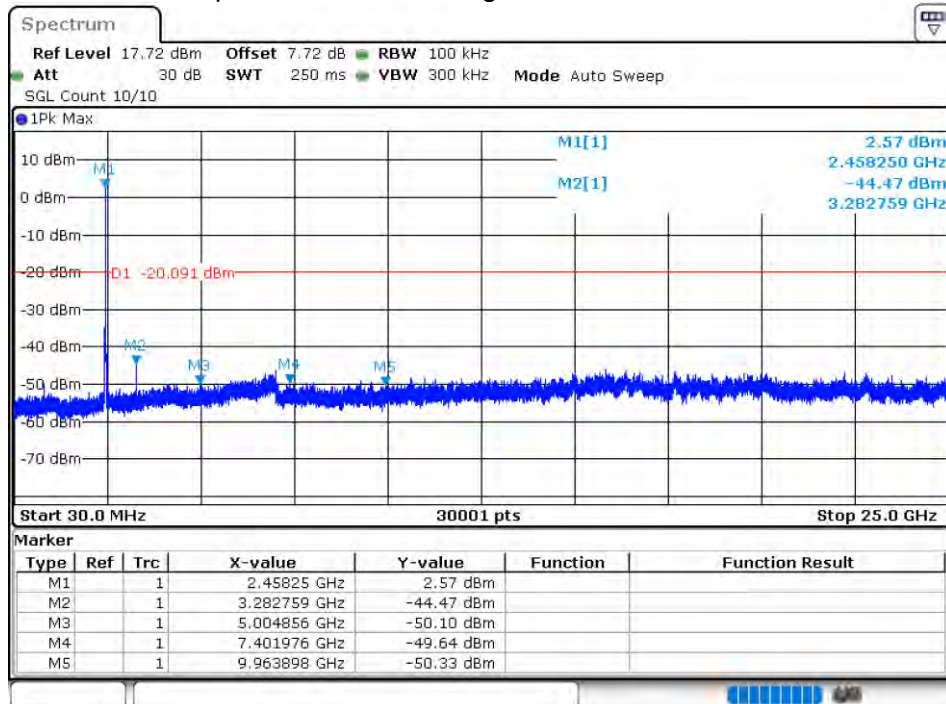


Tx. Spurious NVNT 802.11n(HT20) 2412MHz Ant1 Ref

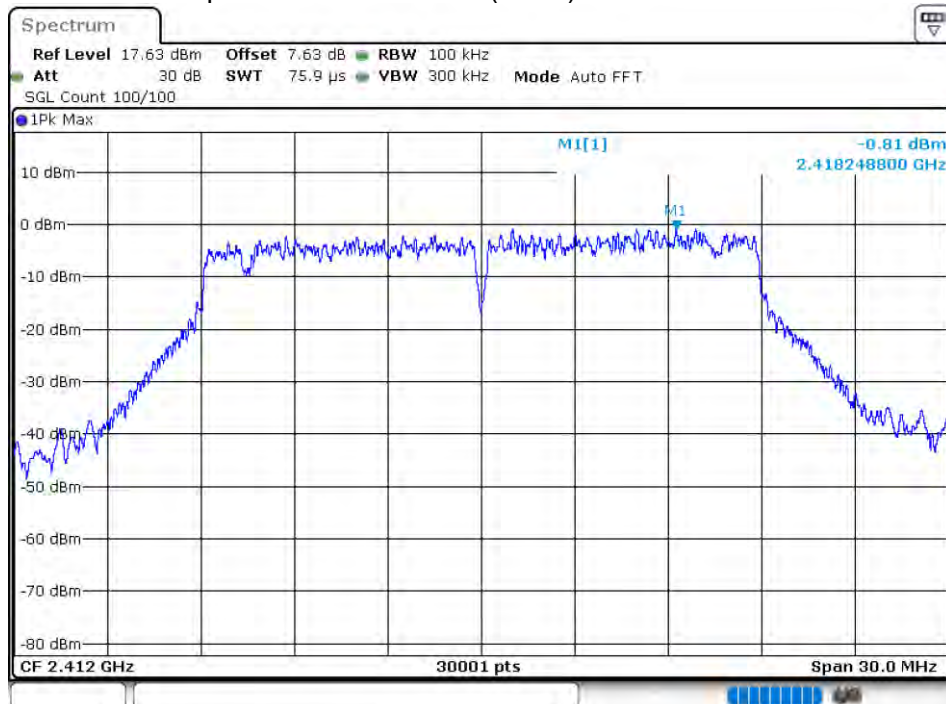


Tx. Spurious NVNT 802.11n(HT20) 2412MHz Ant1 Emission

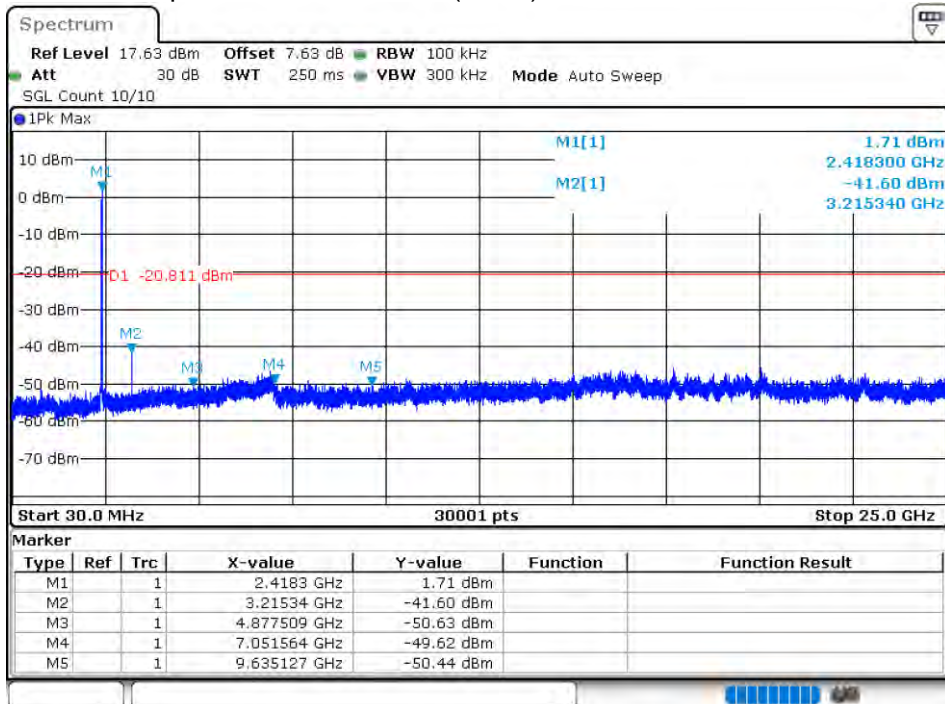


Tx. Spurious NVNT 802.11n(HT20) 2437MHz Ant1 Ref

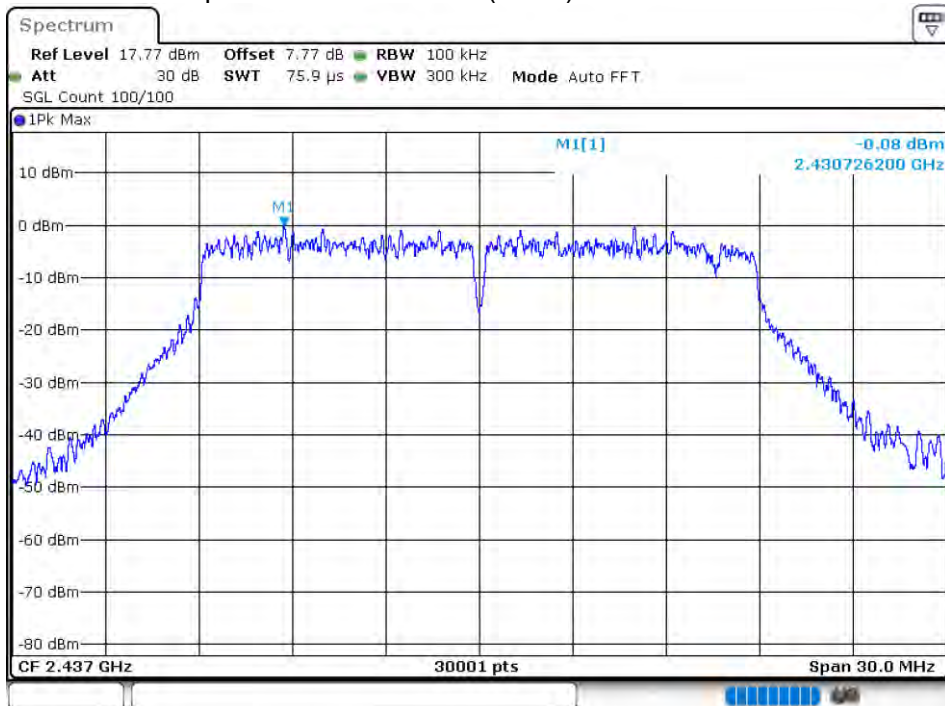


Tx. Spurious NVNT 802.11n(HT20) 2437MHz Ant1 Emission

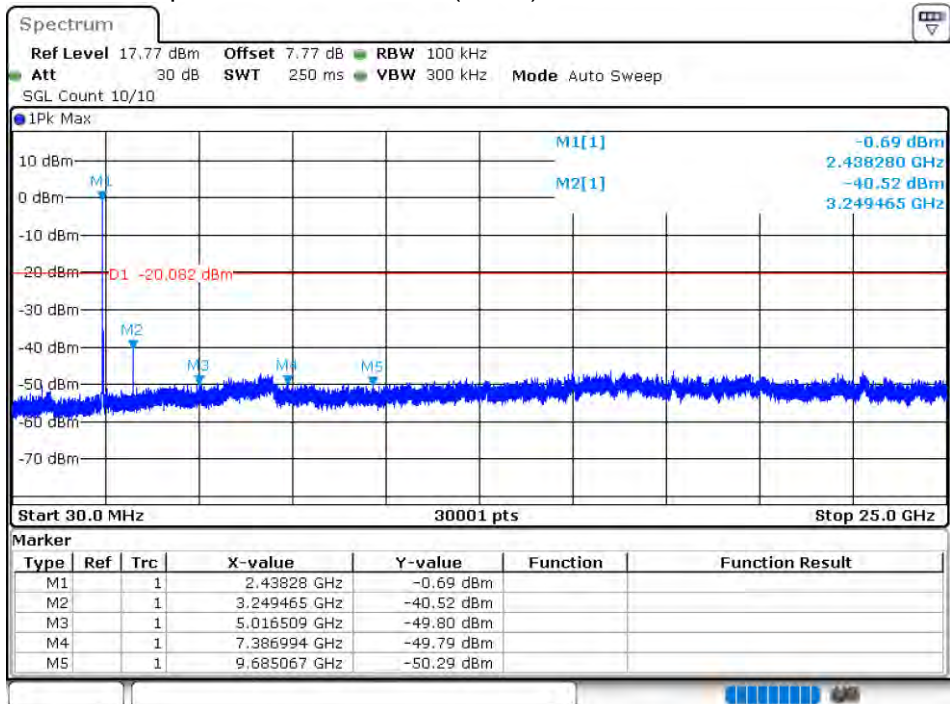


Tx. Spurious NVNT 802.11n(HT20) 2462MHz Ant1 Ref

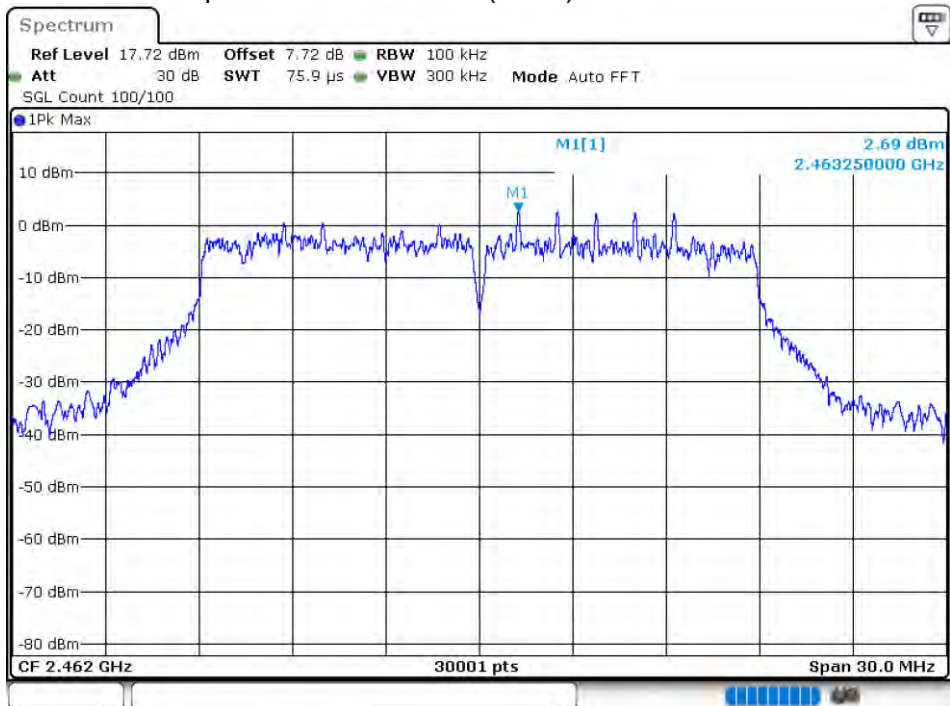


Tx. Spurious NVNT 802.11n(HT20) 2462MHz Ant1 Emission

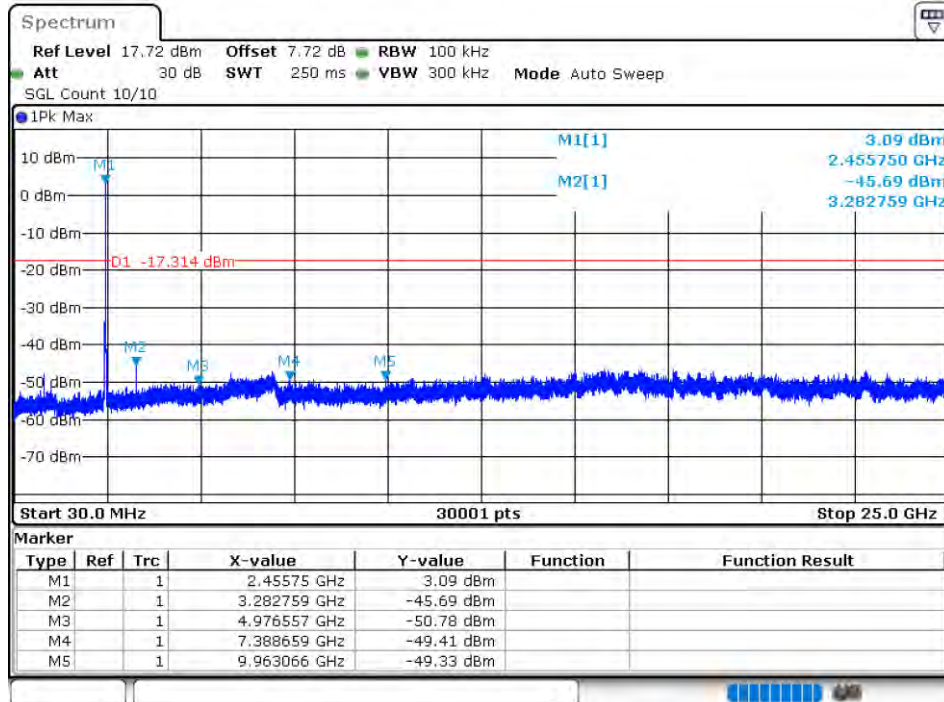


Tx. Spurious NVNT 802.11n(HT40) 2422MHz Ant1 Ref

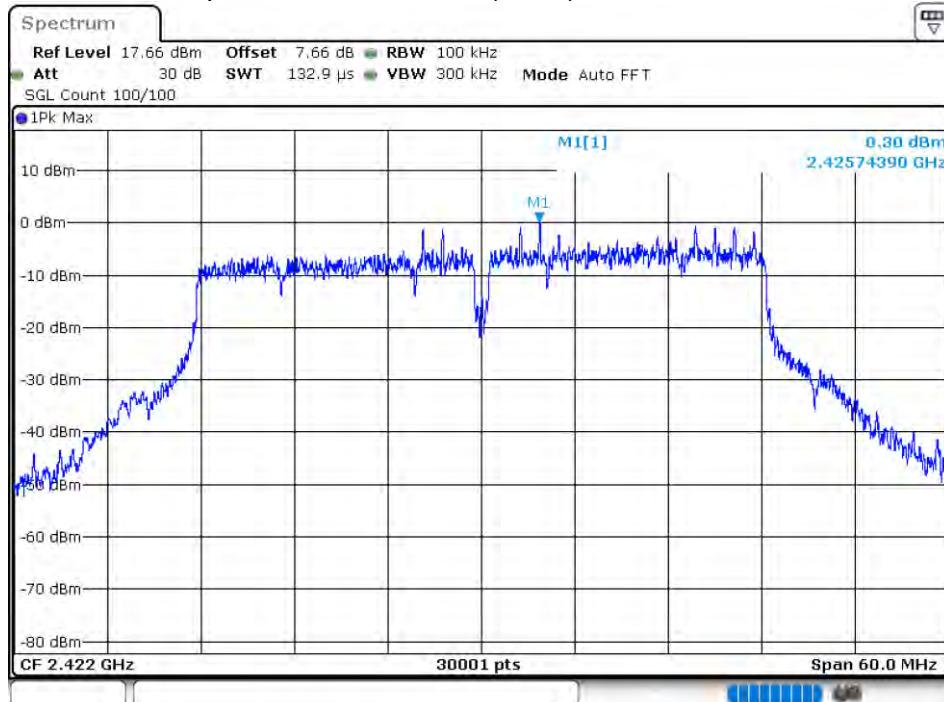


Tx. Spurious NVNT 802.11n(HT40) 2422MHz Ant1 Emission

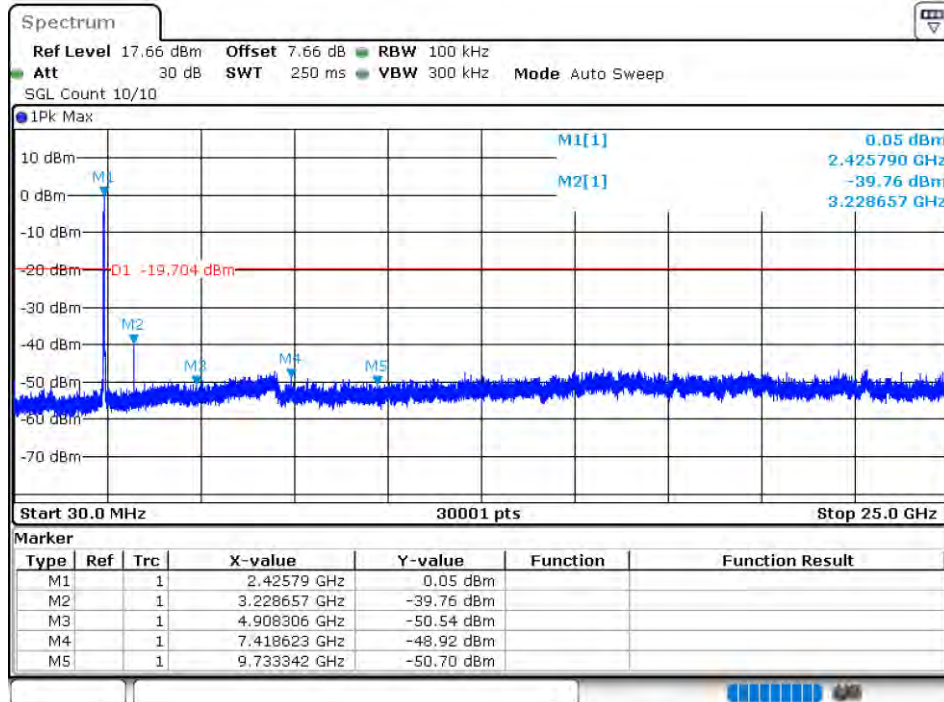


Tx. Spurious NVNT 802.11n(HT40) 2437MHz Ant1 Ref

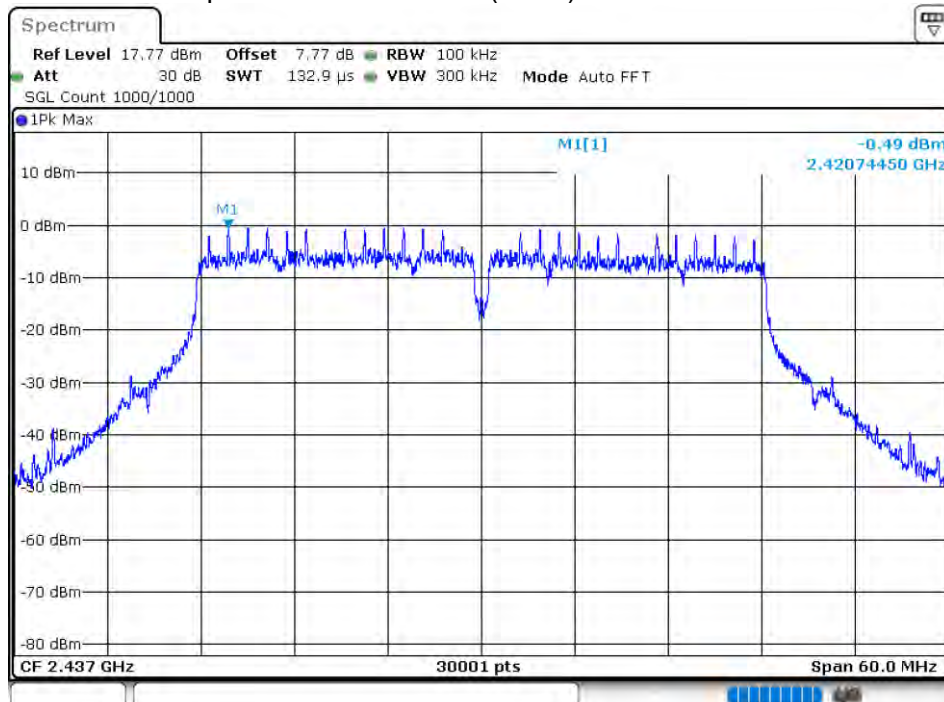


Tx. Spurious NVNT 802.11n(HT40) 2437MHz Ant1 Emission

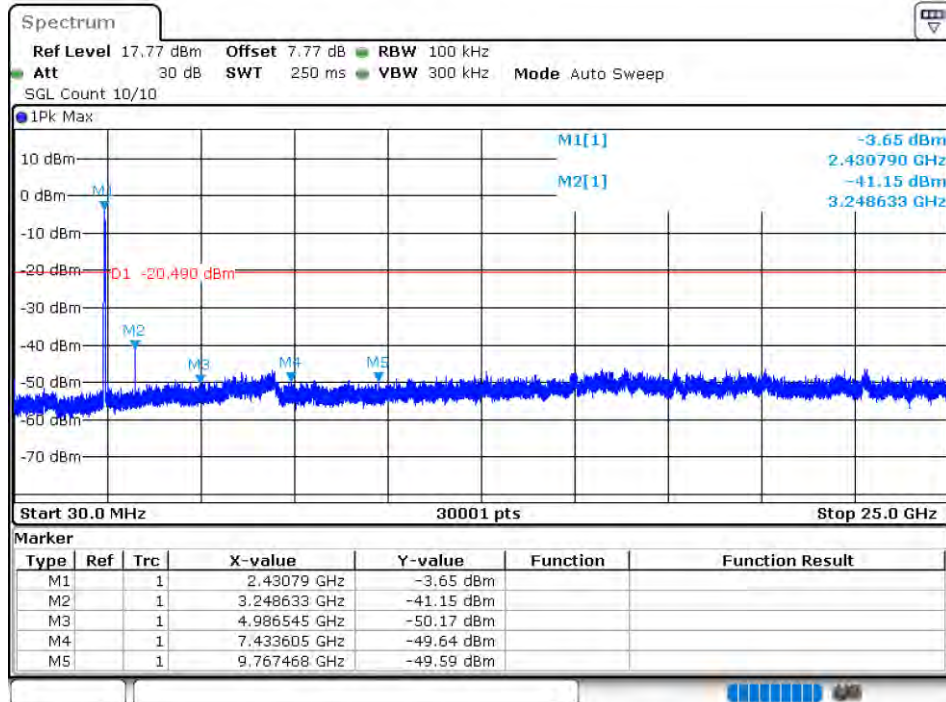

Tx. Spurious NVNT 802.11n(HT40) 2452MHz Ant1 Ref

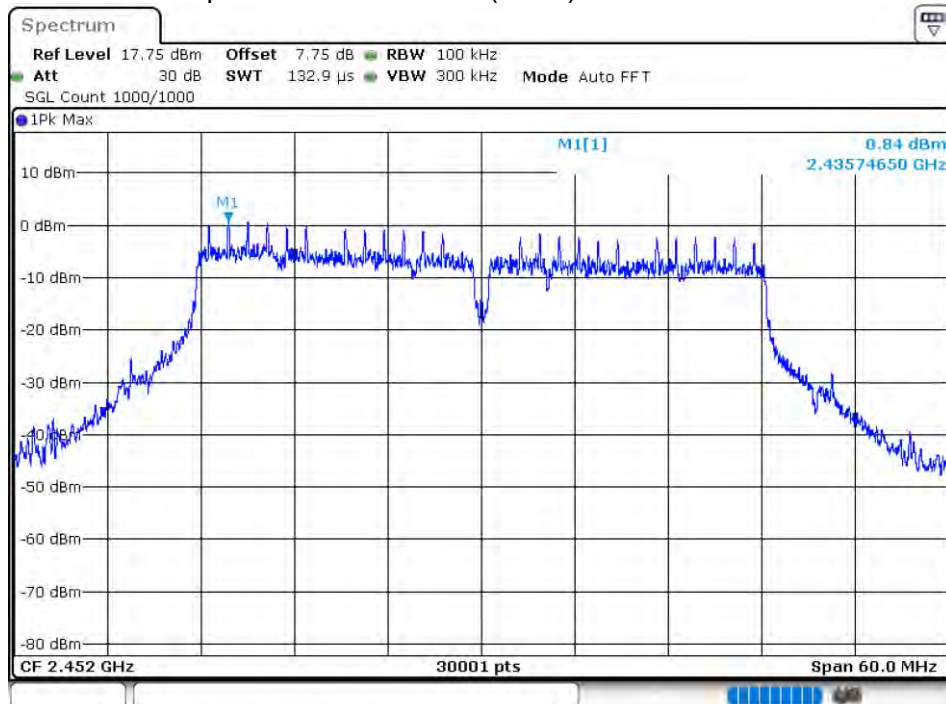

Tx. Spurious NVNT 802.11n(HT40) 2452MHz Ant1 Emission

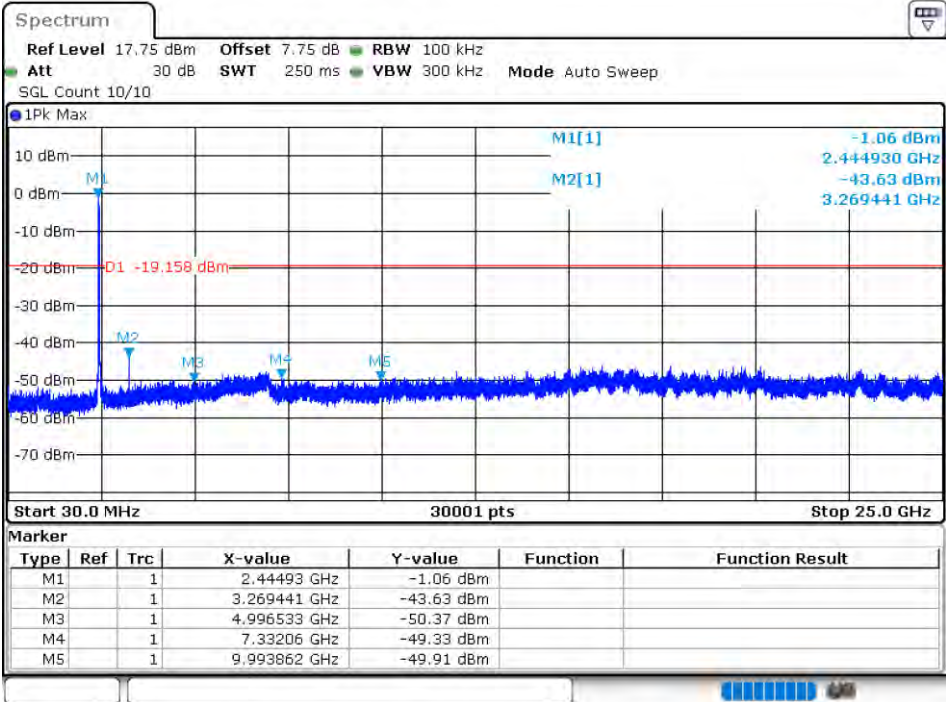


MODULE 2:


8.1.7 DUTY CYCLE

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)
Ant 1	NVNT	802.11b	2412	99.84
Ant 1	NVNT	802.11b	2437	99.84
Ant 1	NVNT	802.11b	2462	99.84
Ant 2	NVNT	802.11b	2412	99.82
Ant 2	NVNT	802.11b	2437	99.83
Ant 2	NVNT	802.11b	2462	99.83
Ant 1	NVNT	802.11g	2412	98.05
Ant 1	NVNT	802.11g	2437	98.01
Ant 1	NVNT	802.11g	2462	98.65
Ant 2	NVNT	802.11g	2412	98.91
Ant 2	NVNT	802.11g	2437	98.92
Ant 2	NVNT	802.11g	2462	98.97
Ant 1	NVNT	802.11n(HT20)	2412	98.79
Ant 1	NVNT	802.11n(HT20)	2437	98.78
Ant 1	NVNT	802.11n(HT20)	2462	98.76
Ant 2	NVNT	802.11n(HT20)	2412	98.79
Ant 2	NVNT	802.11n(HT20)	2437	98.79
Ant 2	NVNT	802.11n(HT20)	2462	98.8


Duty Cycle NVNT 802.11b 2412MHz Ant 1

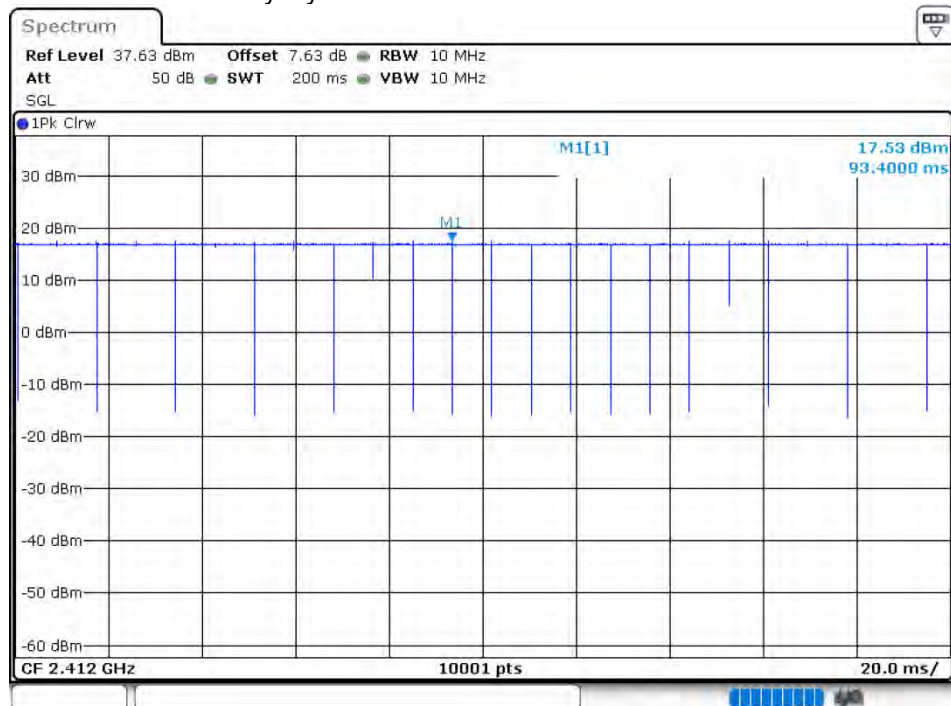


Duty Cycle NVNT 802.11b 2437MHz Ant 1

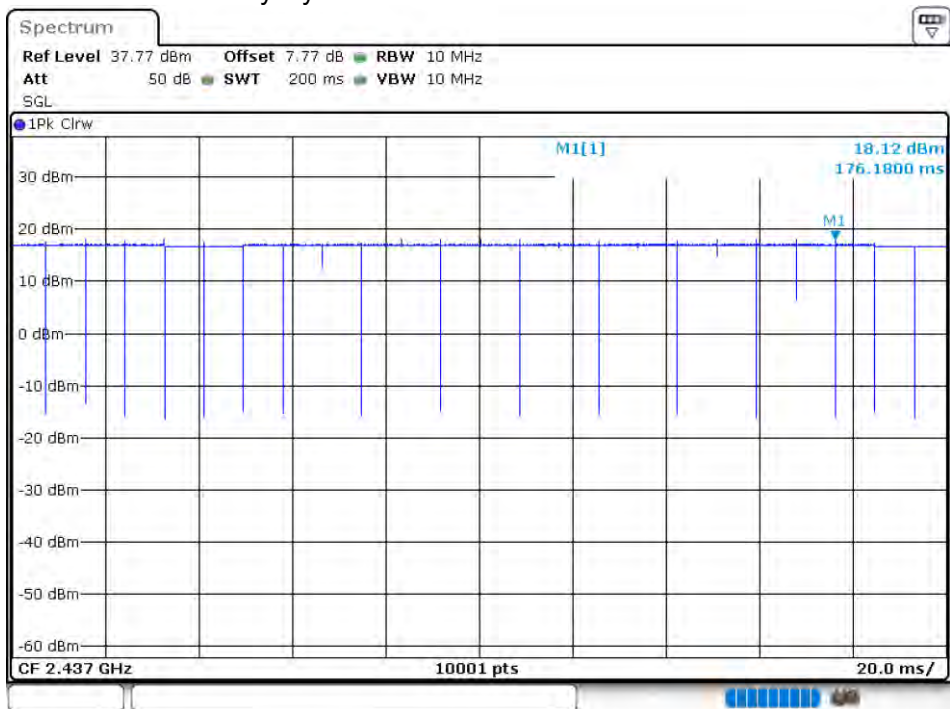


Duty Cycle NVNT 802.11b 2462MHz Ant 1

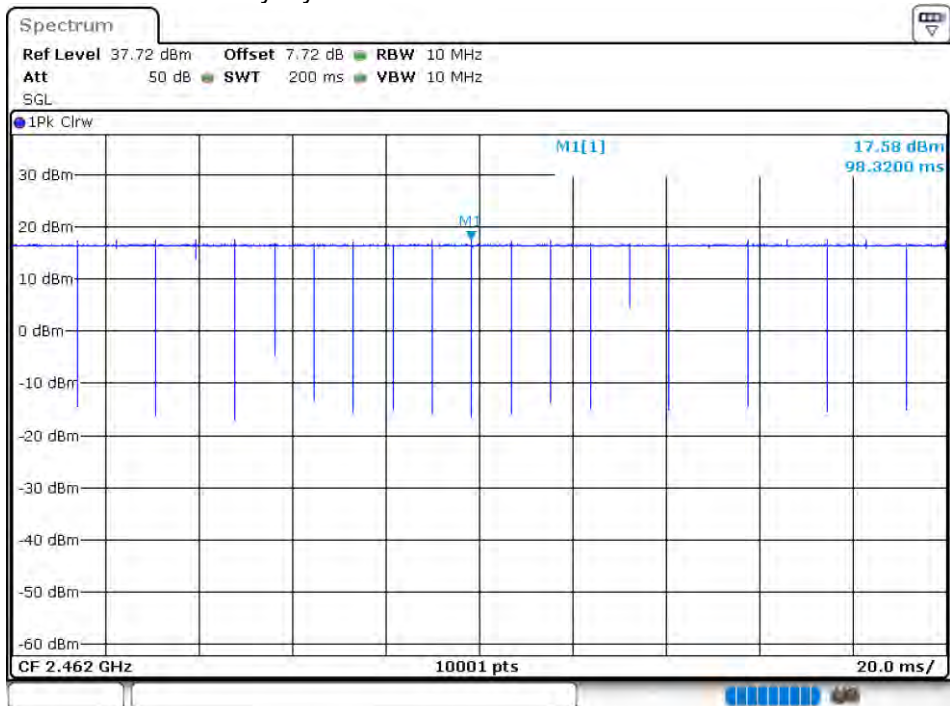


Duty Cycle NVNT 802.11b 2412MHz Ant 2

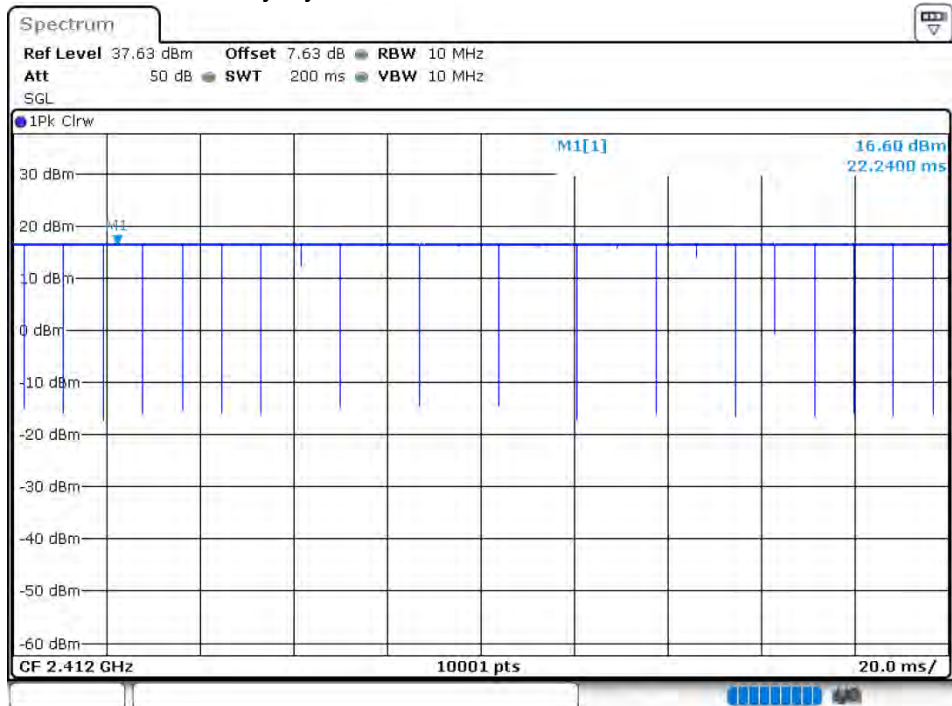


Duty Cycle NVNT 802.11b 2437MHz Ant 2

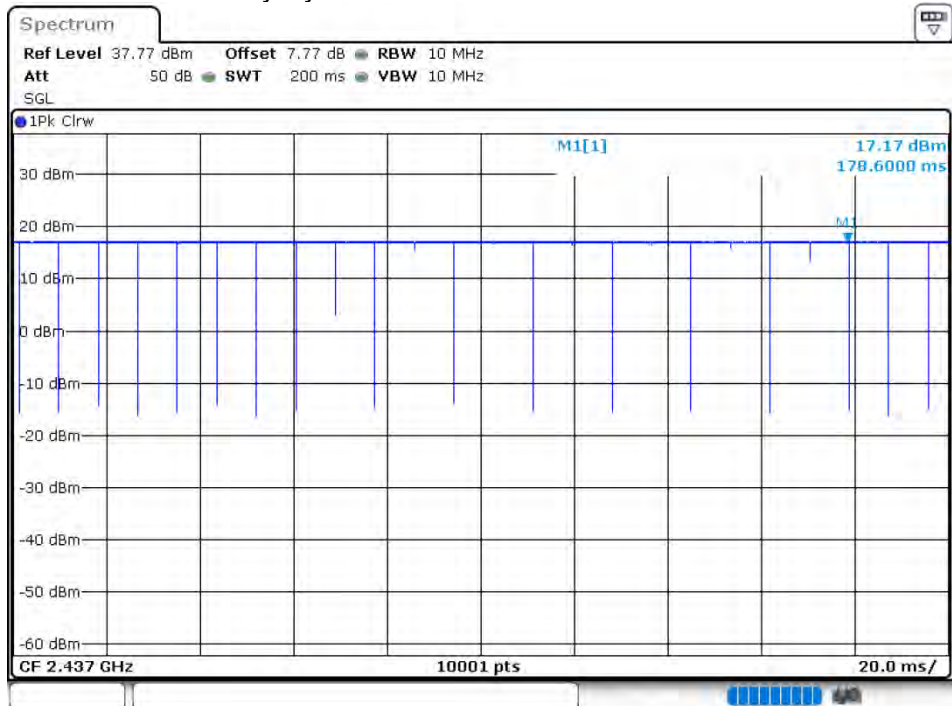


Duty Cycle NVNT 802.11b 2462MHz Ant 2

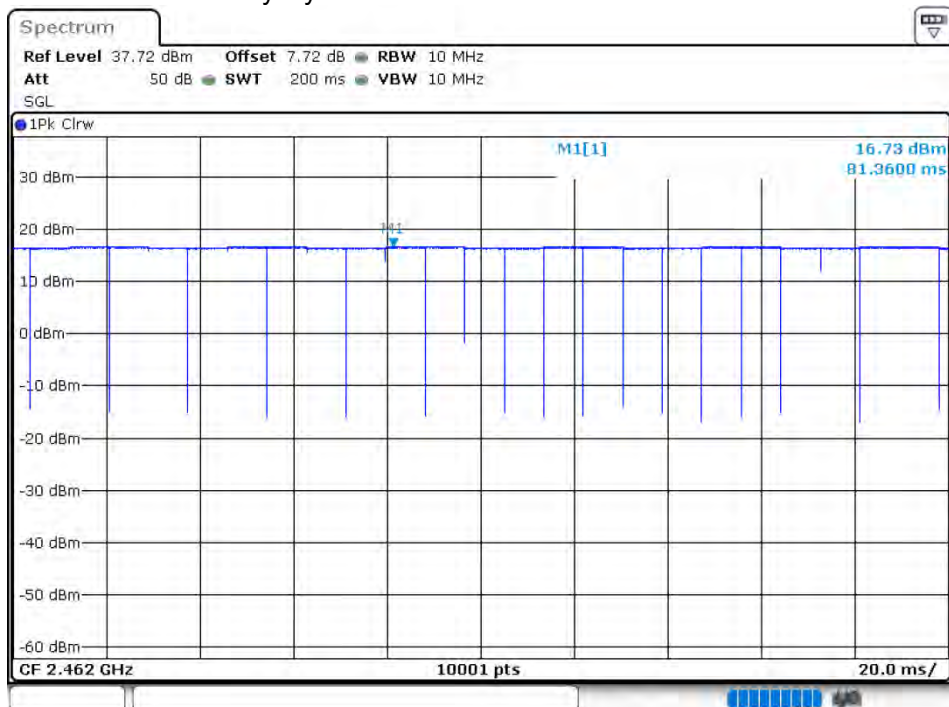


Duty Cycle NVNT 802.11g 2412MHz Ant 1

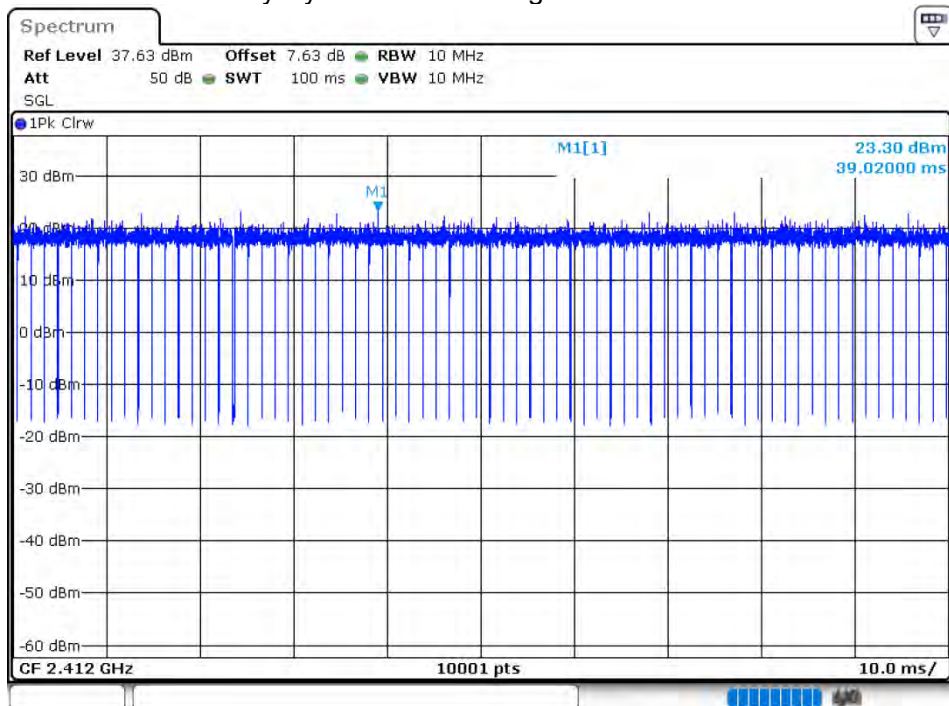


Duty Cycle NVNT 802.11g 2437MHz Ant 1

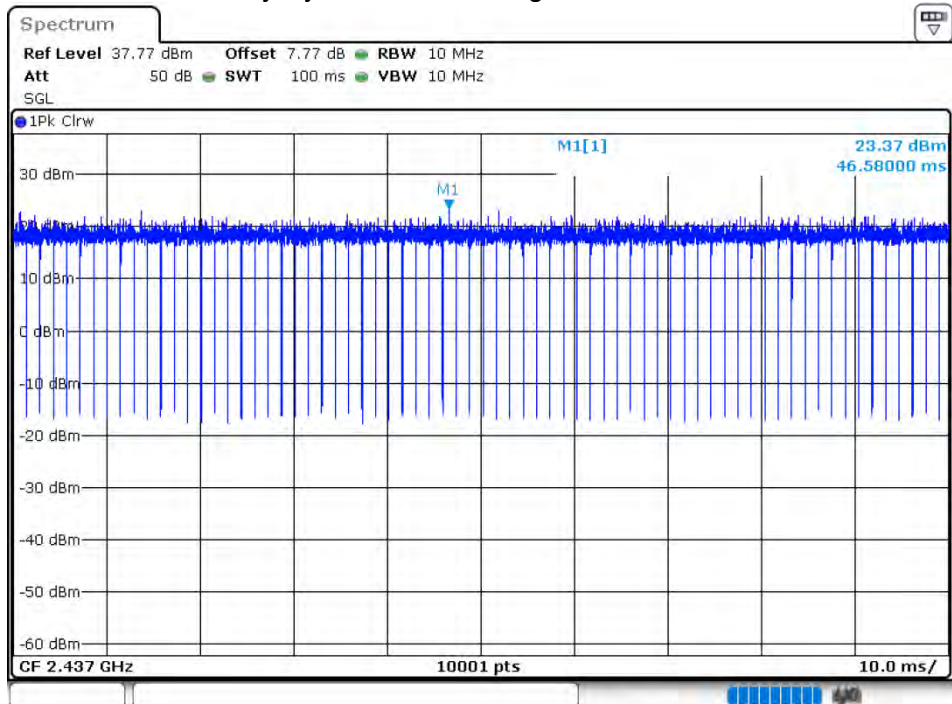


Duty Cycle NVNT 802.11g 2462MHz Ant 1

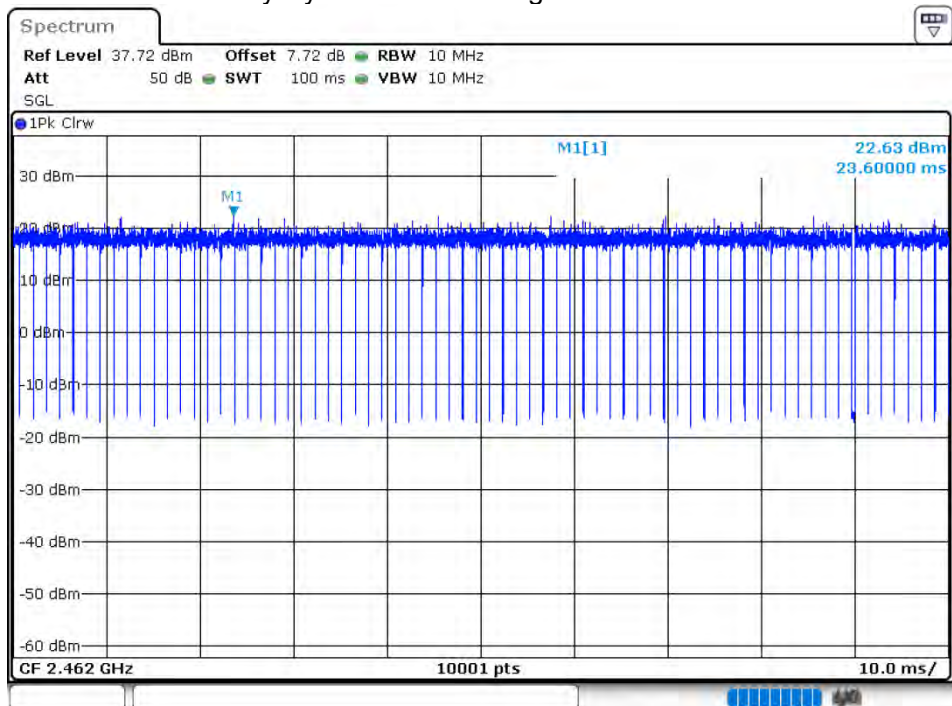


Duty Cycle NVNT 802.11g 2412MHz Ant 2

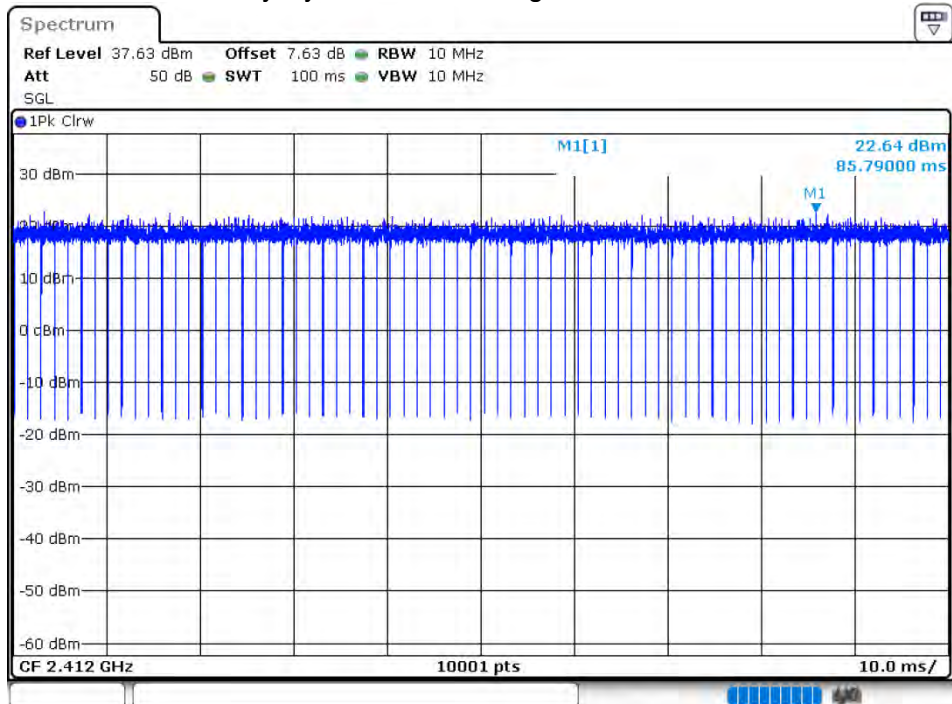


Duty Cycle NVNT 802.11g 2437MHz Ant 2

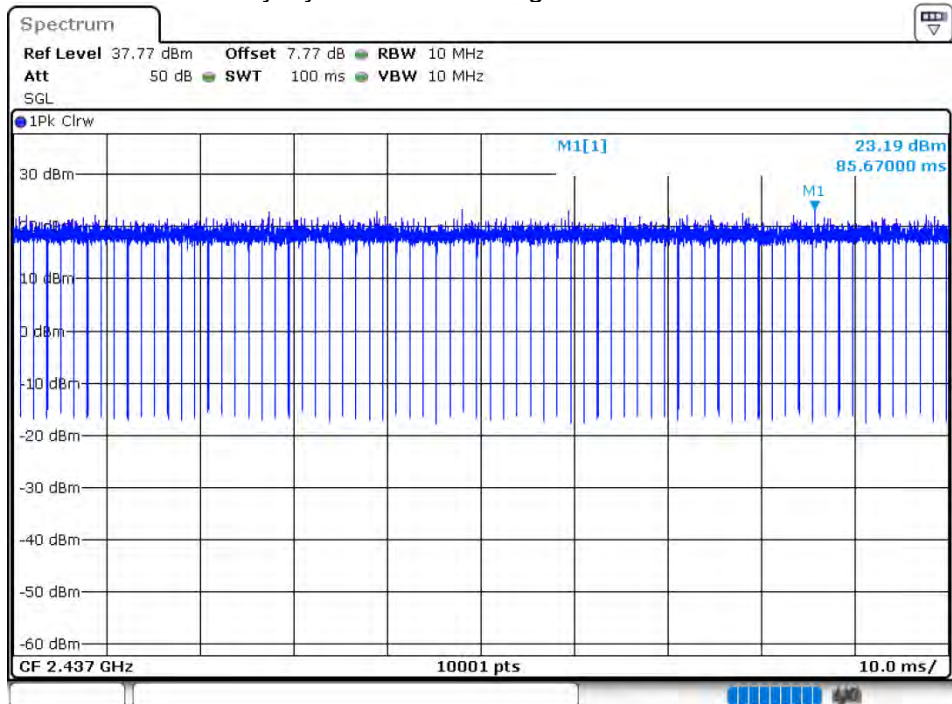


Duty Cycle NVNT 802.11g 2462MHz Ant 2

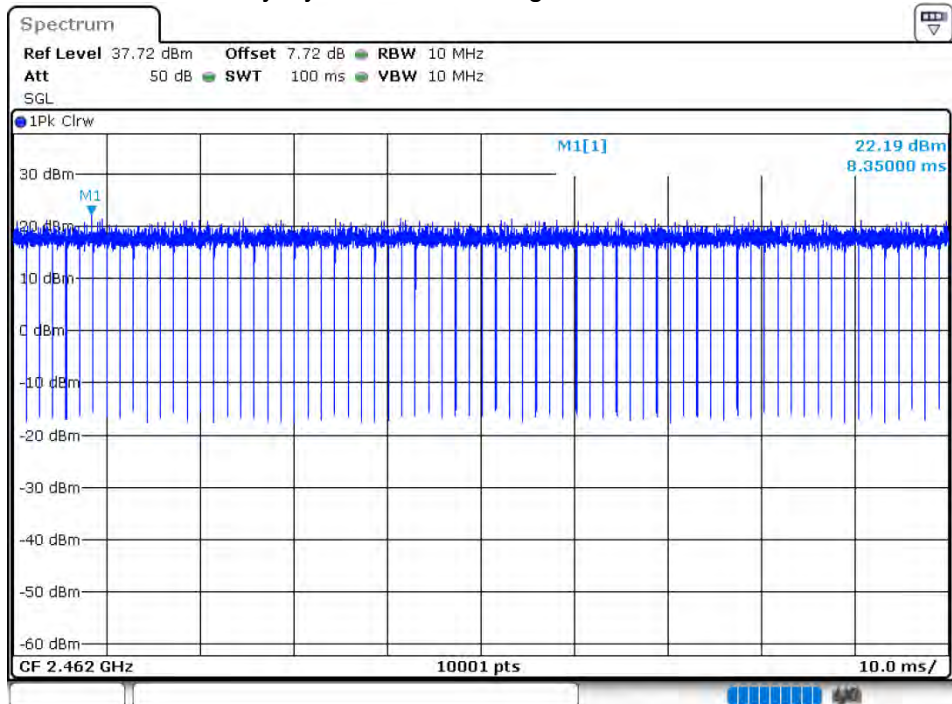


Duty Cycle NVNT 802.11n(HT20) 2412MHz Ant 1

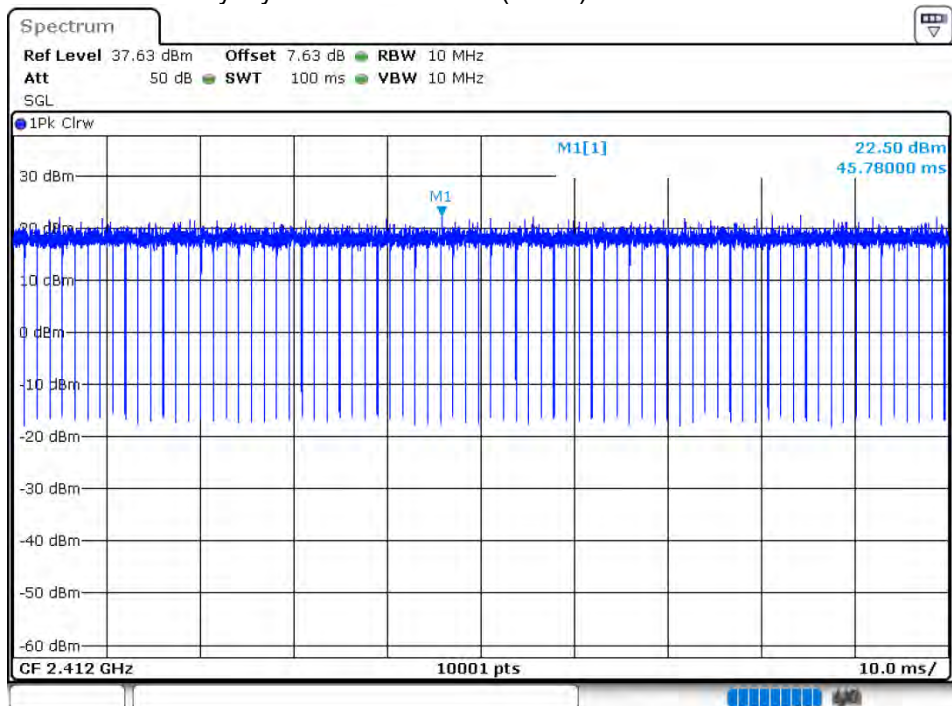


Duty Cycle NVNT 802.11n(HT20) 2437MHz Ant 1

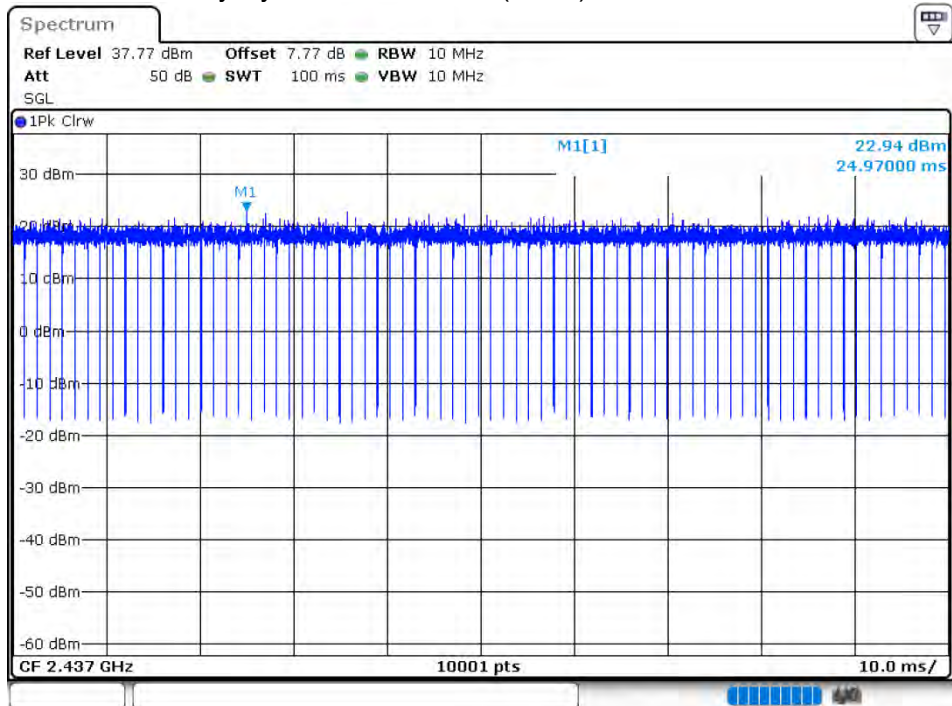


Duty Cycle NVNT 802.11n(HT20) 2462MHz Ant 1

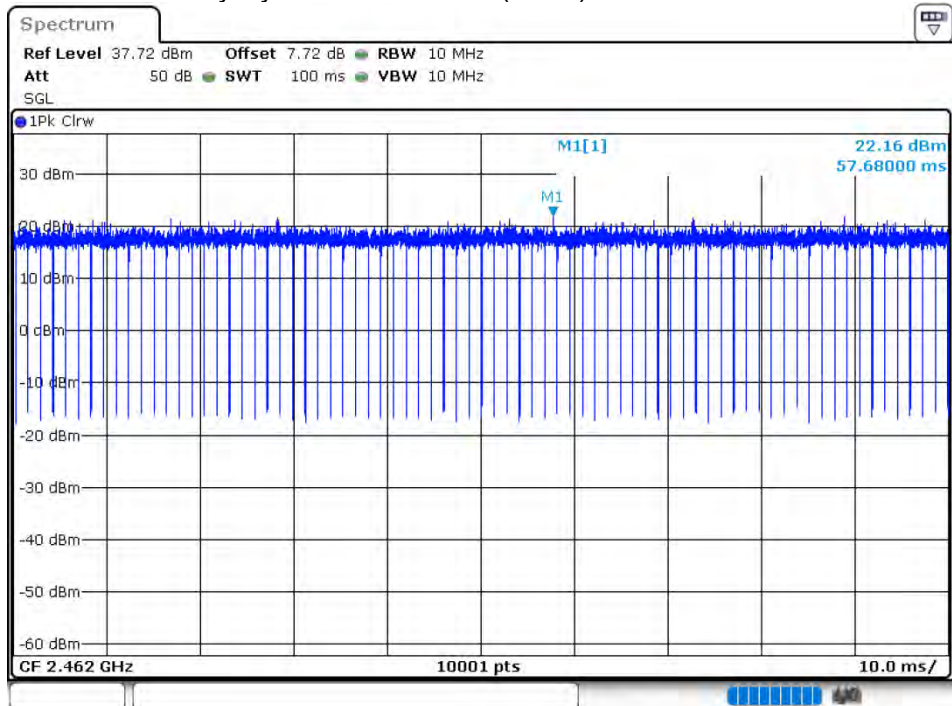


Duty Cycle NVNT 802.11n(HT20) 2412MHz Ant 2

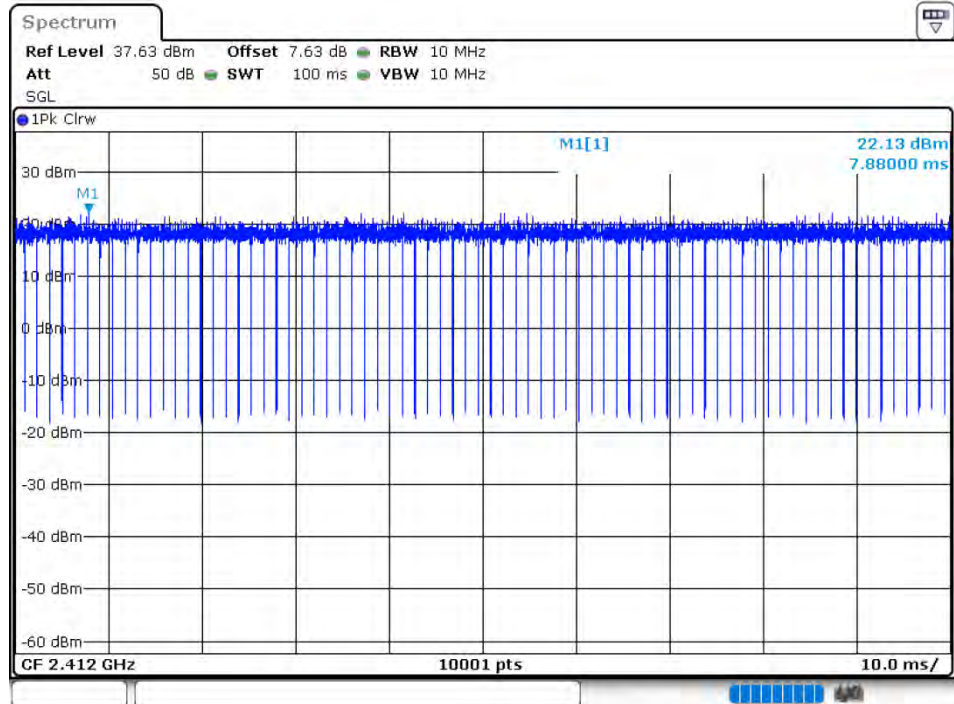

Duty Cycle NVNT 802.11n(HT20) 2437MHz Ant 2

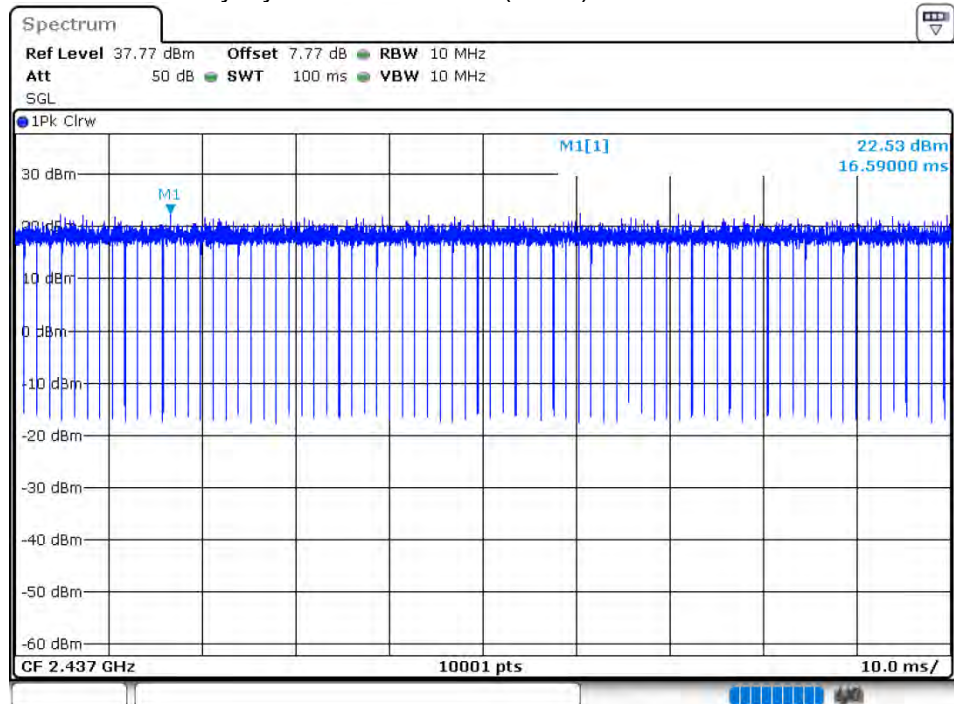

Duty Cycle NVNT 802.11n(HT20) 2462MHz Ant 2

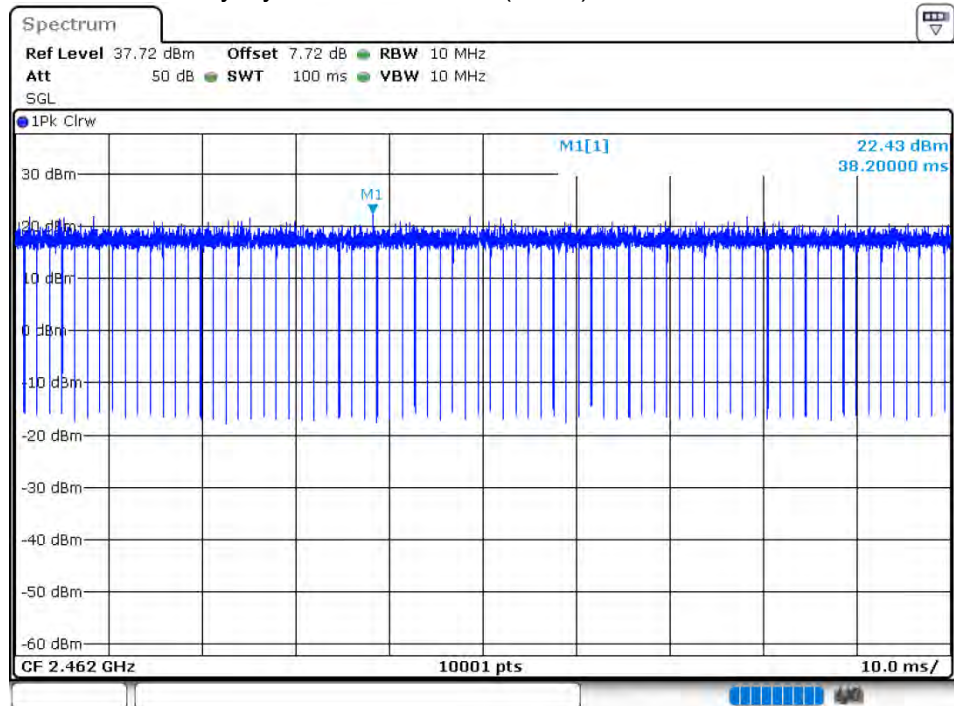


8.1.8 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11b	2412	Ant 1	13.96	-	30	Pass
NVNT	802.11b	2437	Ant 1	13.76	-	30	Pass
NVNT	802.11b	2462	Ant 1	13.59	-	30	Pass
NVNT	802.11b	2412	Ant 2	13.55	-	30	Pass
NVNT	802.11b	2437	Ant 2	13.91	-	30	Pass
NVNT	802.11b	2462	Ant 2	13.56	-	30	Pass
NVNT	802.11g	2412	Ant 1	12.66	-	30	Pass
NVNT	802.11g	2437	Ant 1	12.57	-	30	Pass
NVNT	802.11g	2462	Ant 1	12.13	-	30	Pass
NVNT	802.11g	2412	Ant 2	12.51	-	30	Pass
NVNT	802.11g	2437	Ant 2	12.41	-	30	Pass
NVNT	802.11g	2462	Ant 2	11.96	-	30	Pass
NVNT	802.11n(HT20)	2412	Ant 1	12.53	15.54	30	Pass
NVNT	802.11n(HT20)	2412	Ant 2	12.52		30	Pass
NVNT	802.11n(HT20)	2437	Ant 1	12.33	15.33	30	Pass
NVNT	802.11n(HT20)	2437	Ant 2	12.3		30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	12.15	14.96	30	Pass
NVNT	802.11n(HT20)	2462	Ant 2	11.73		30	Pass


8.1.9 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11b	2412	Ant 1	11.7882	7.08	0.5	Pass
NVNT	802.11b	2437	Ant 1	11.9481	7.08	0.5	Pass
NVNT	802.11b	2462	Ant 1	11.92	7.6152	0.5	Pass
NVNT	802.11b	2412	Ant 2	11.9081	6.56	0.5	Pass
NVNT	802.11b	2437	Ant 2	11.7083	7.08	0.5	Pass
NVNT	802.11b	2462	Ant 2	11.84	7.2946	0.5	Pass
NVNT	802.11g	2412	Ant 1	16.983	16.36	0.5	Pass
NVNT	802.11g	2437	Ant 1	16.7832	16.32	0.5	Pass
NVNT	802.11g	2462	Ant 1	16.8452	16.3478	0.5	Pass
NVNT	802.11g	2412	Ant 2	16.983	16.44	0.5	Pass
NVNT	802.11g	2437	Ant 2	16.8631	15.76	0.5	Pass
NVNT	802.11g	2462	Ant 2	16.7873	16.058	0.5	Pass
NVNT	802.11n(HT20)	2412	Ant 1	17.982	16.36	0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 1	18.022	17.6	0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 1	17.84	17.3146	0.5	Pass
NVNT	802.11n(HT20)	2412	Ant 2	18.022	17.72	0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 2	17.8621	16.36	0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 2	17.76	17.5551	0.5	Pass


OBW NVNT 802.11b 2412MHz Ant 1

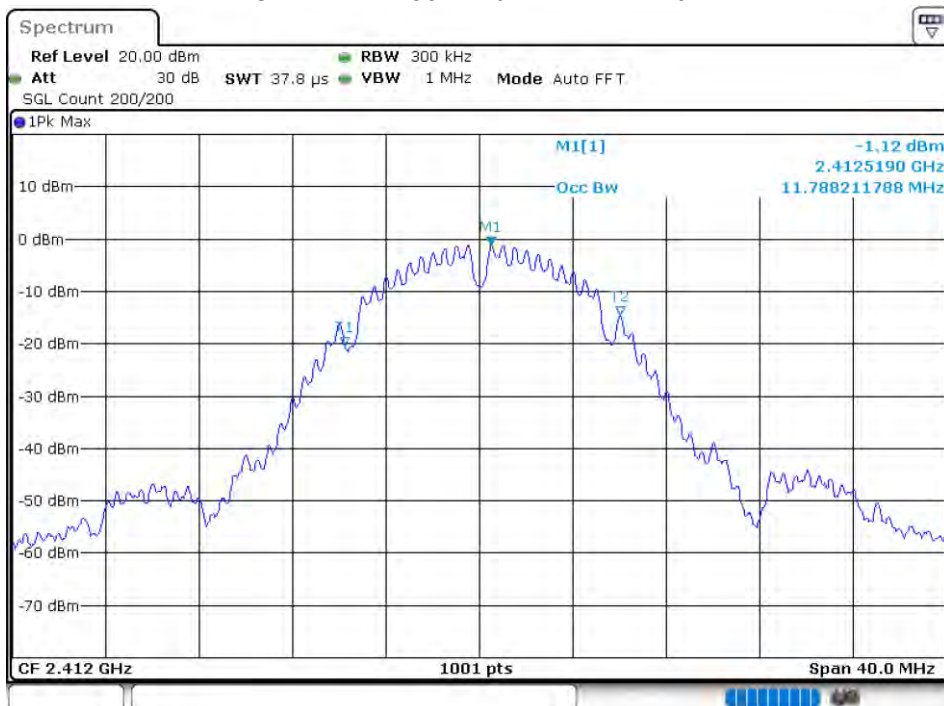


-6 dB BW NVNT 802.11b 2412MHz Ant 1

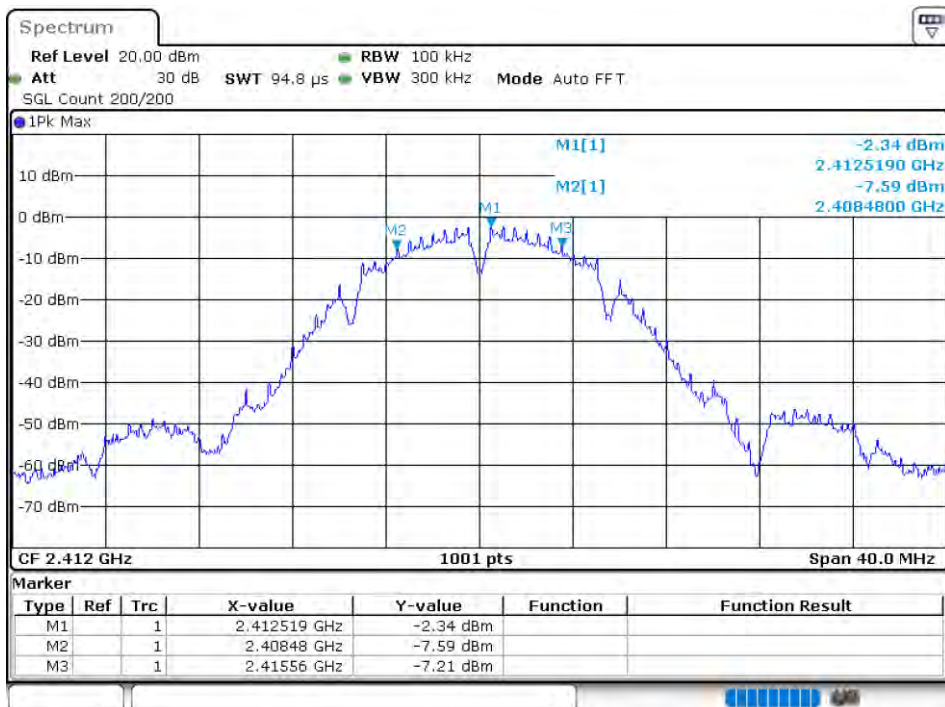


OBW NVNT 802.11b 2437MHz Ant 1

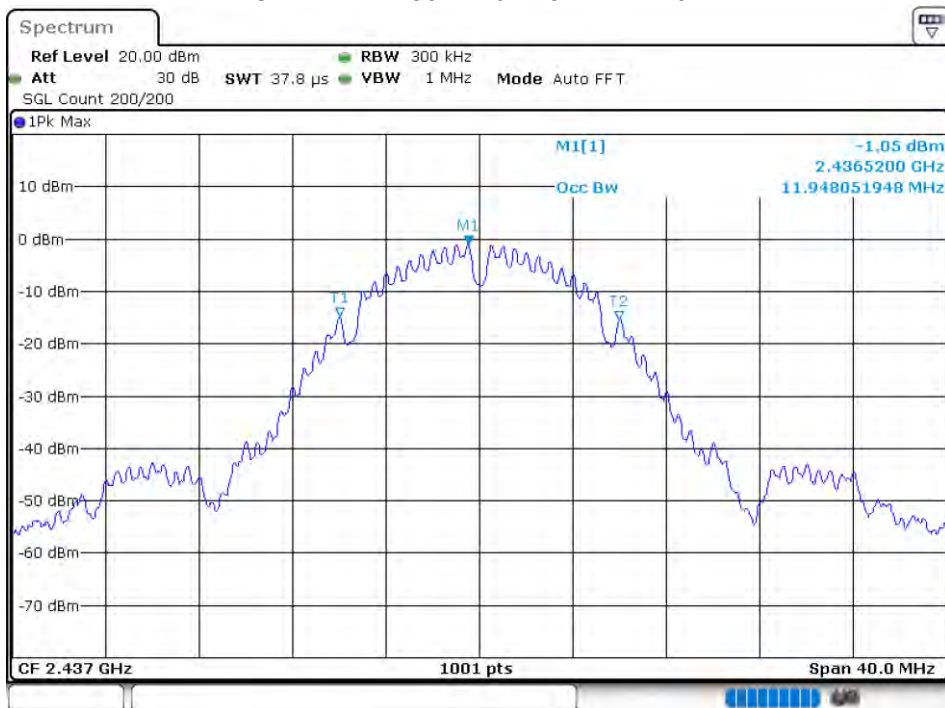


-6 dB BW NVNT 802.11b 2437MHz Ant 1

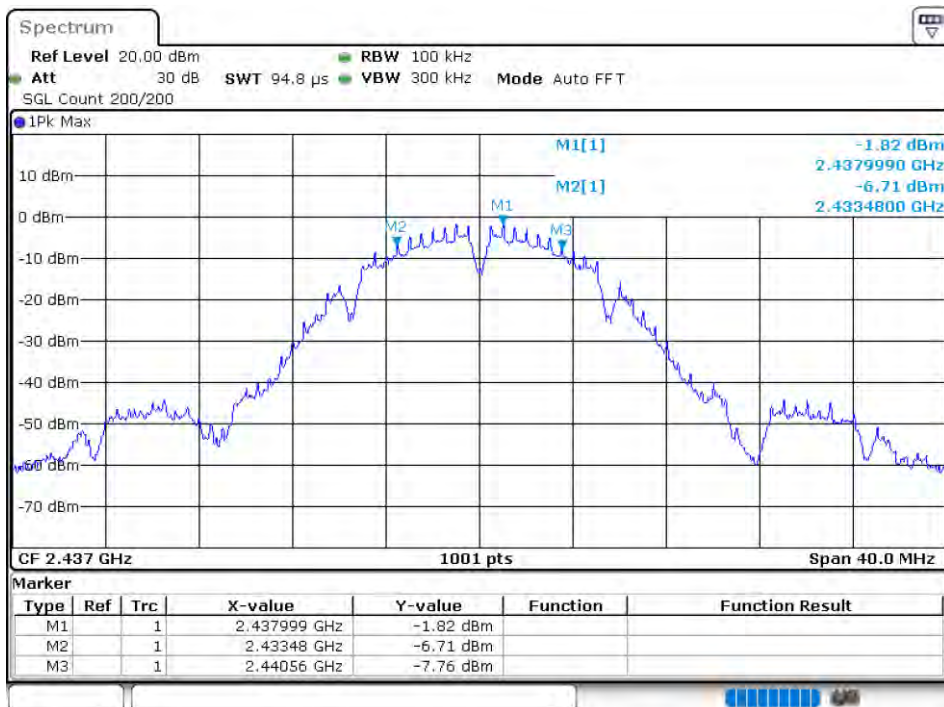


OBW NVNT 802.11b 2462MHz Ant 1

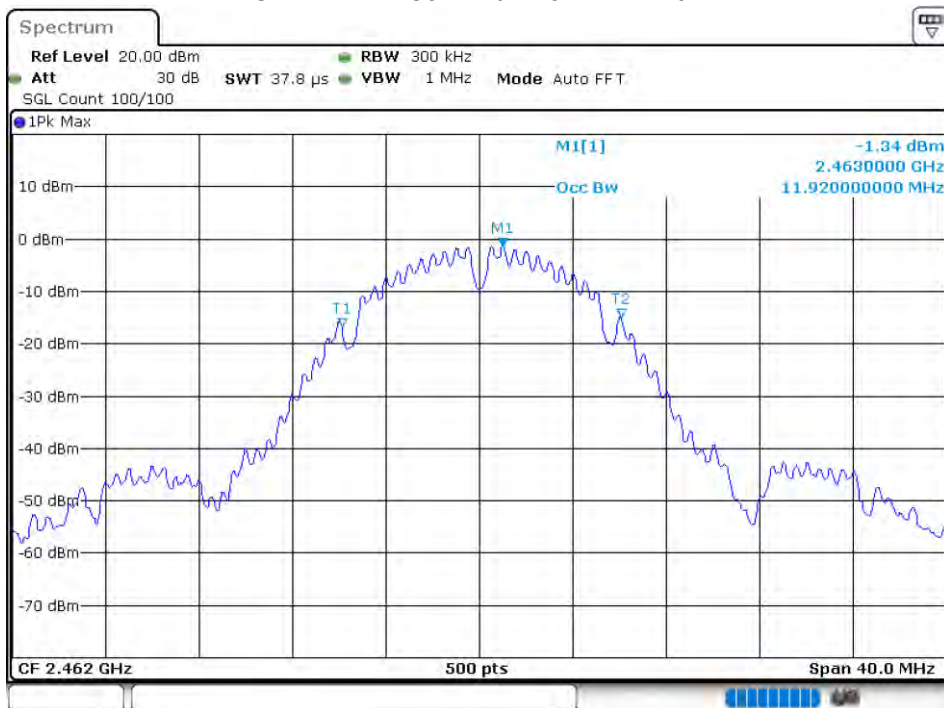


-6 dB BW NVNT 802.11b 2462MHz Ant 1

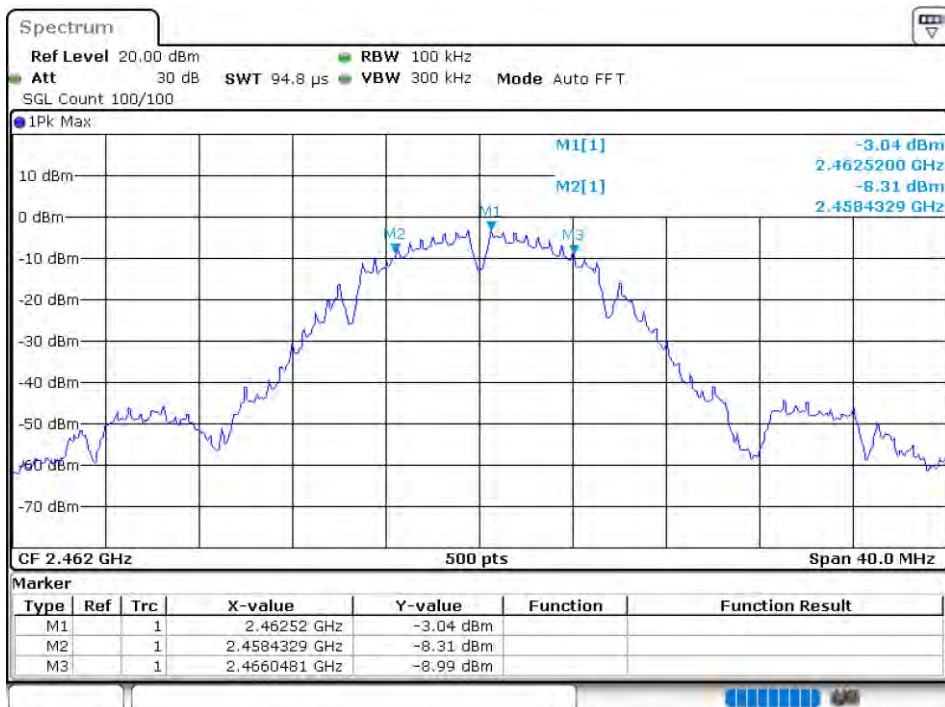


OBW NVNT 802.11b 2412MHz Ant 2

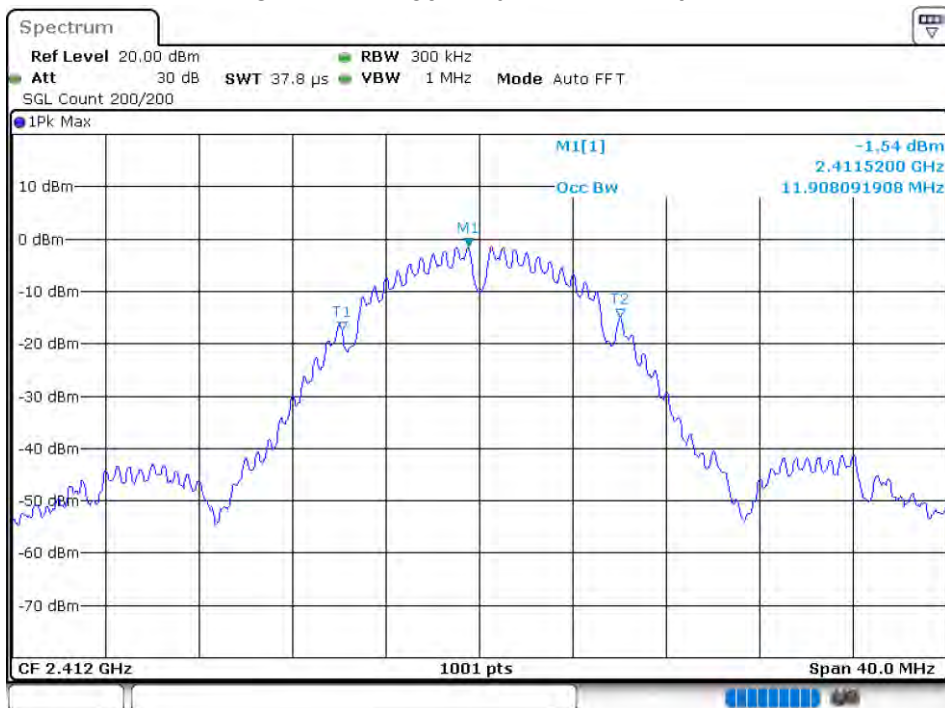


-6 dB BW NVNT 802.11b 2412MHz Ant 2

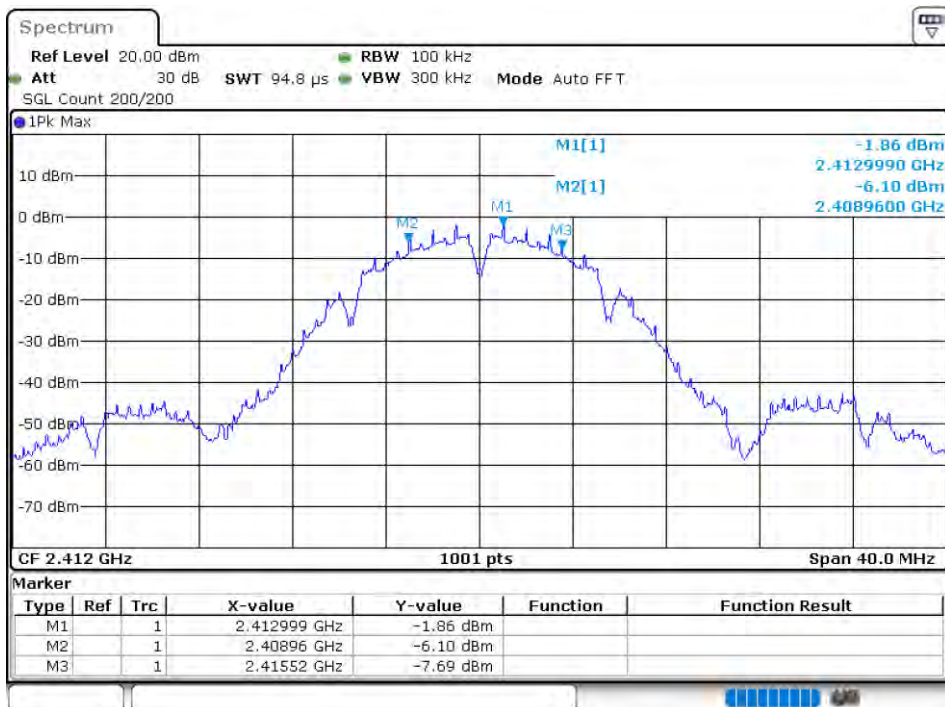


OBW NVNT 802.11b 2437MHz Ant 2

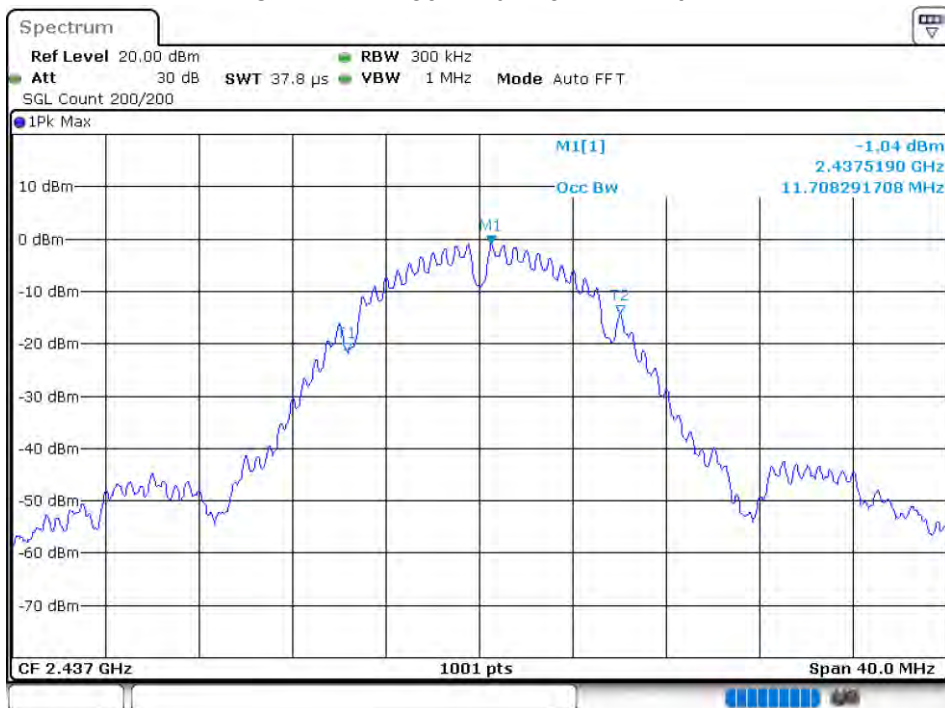


-6 dB BW NVNT 802.11b 2437MHz Ant 2

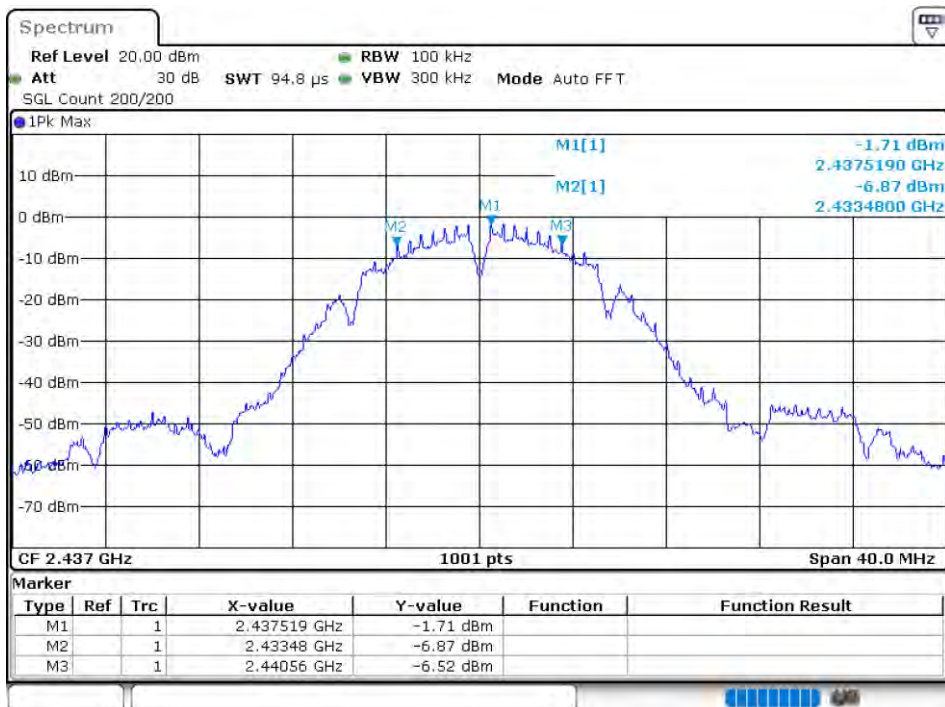

OBW NVNT 802.11b 2462MHz Ant 2

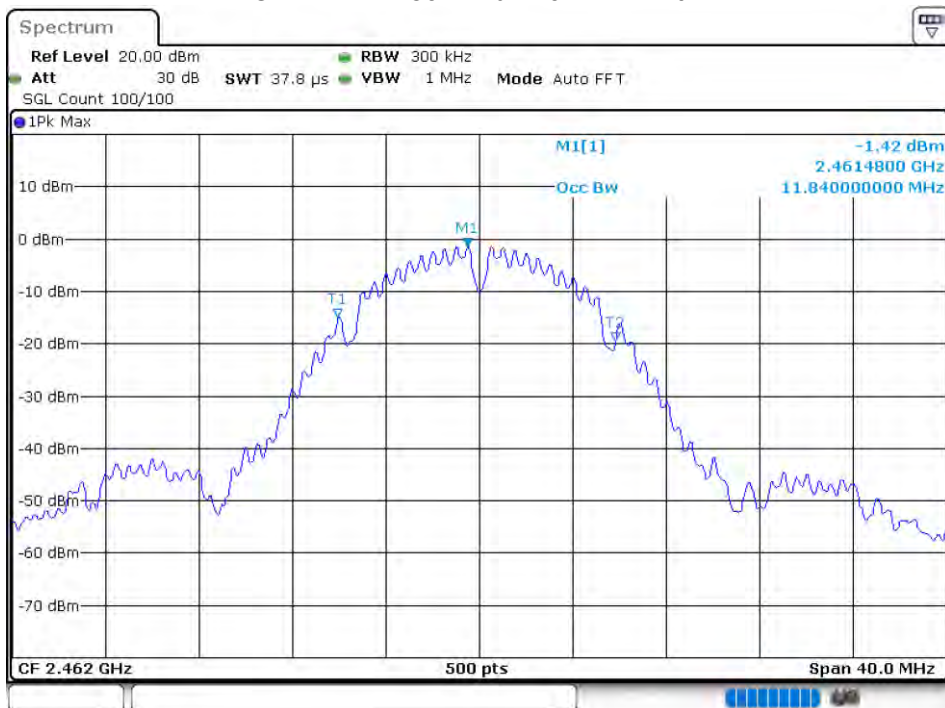


-6 dB BW NVNT 802.11b 2462MHz Ant 2

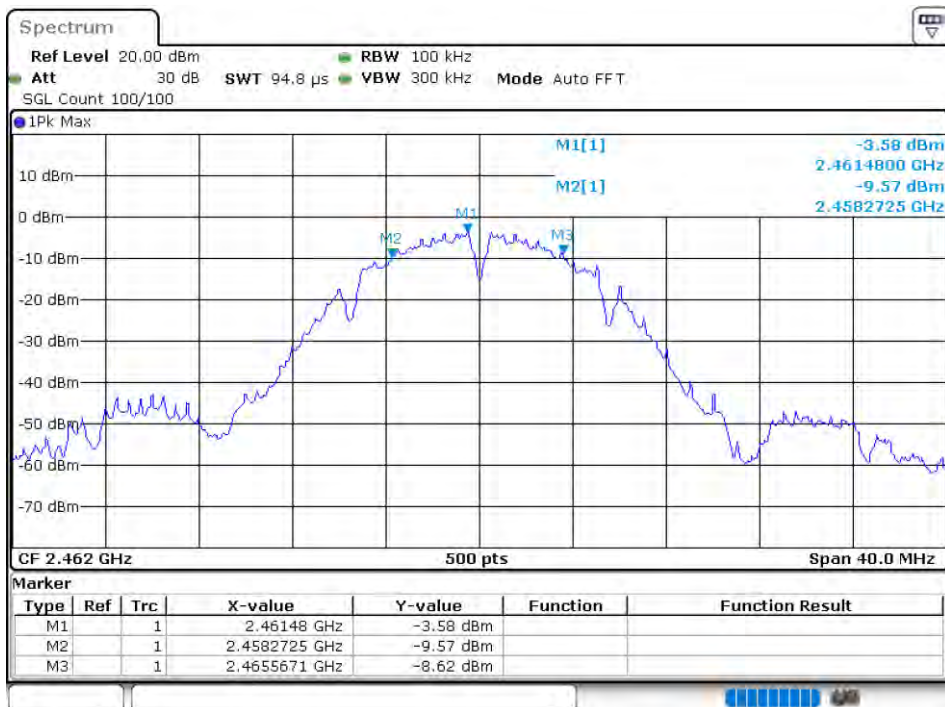


OBW NVNT 802.11g 2412MHz Ant 1




-6 dB BW NVNT 802.11g 2412MHz Ant 1

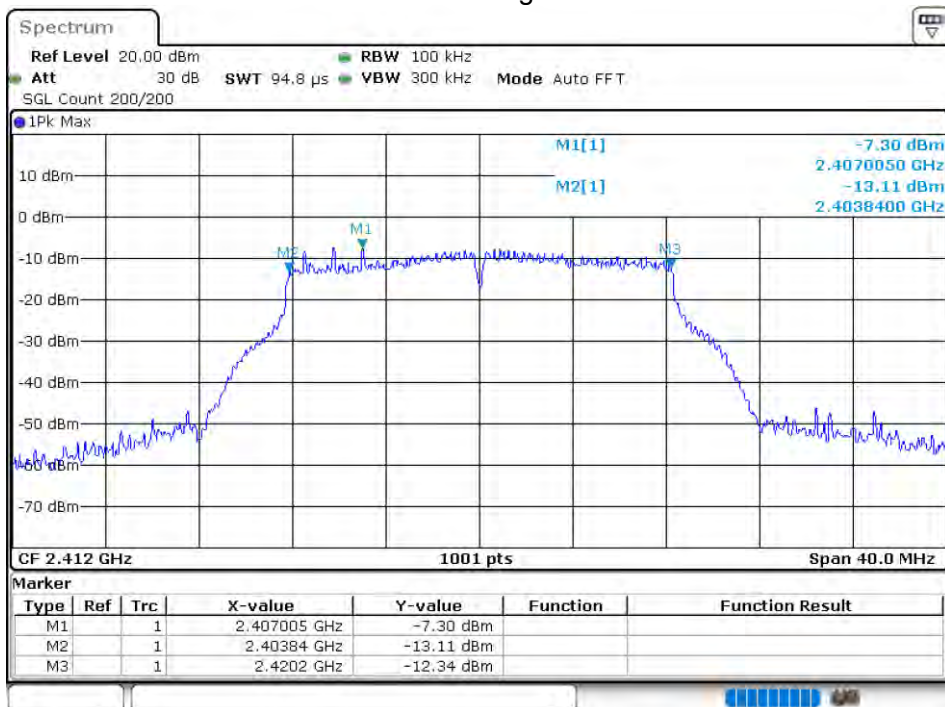


OBW NVNT 802.11g 2437MHz Ant 1

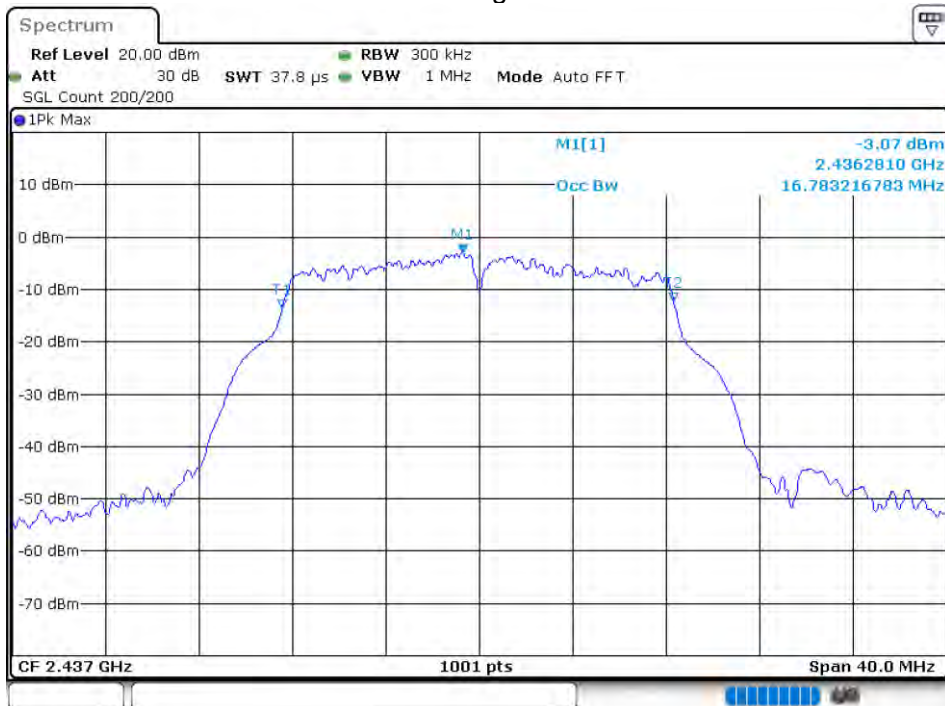


-6 dB BW NVNT 802.11g 2437MHz Ant 1

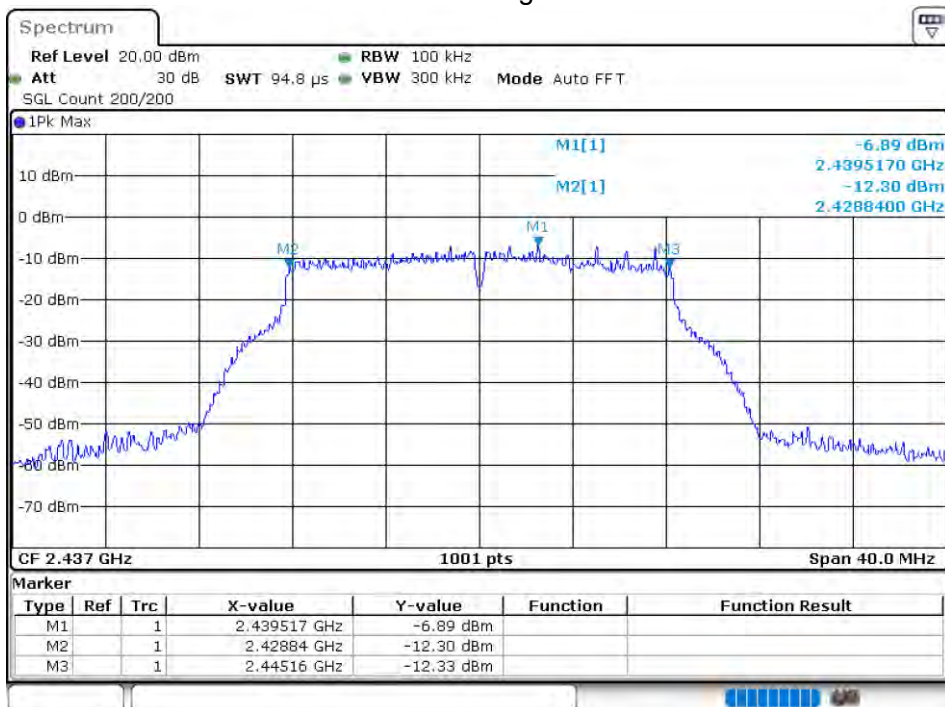

OBW NVNT 802.11g 2462MHz Ant 1

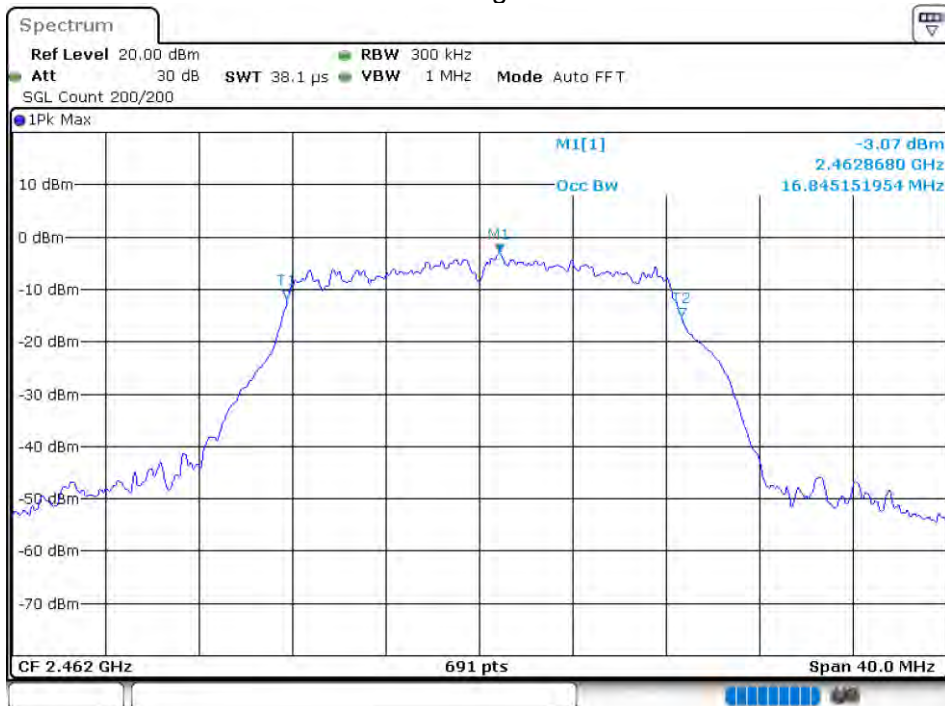


-6 dB BW NVNT 802.11g 2462MHz Ant 1

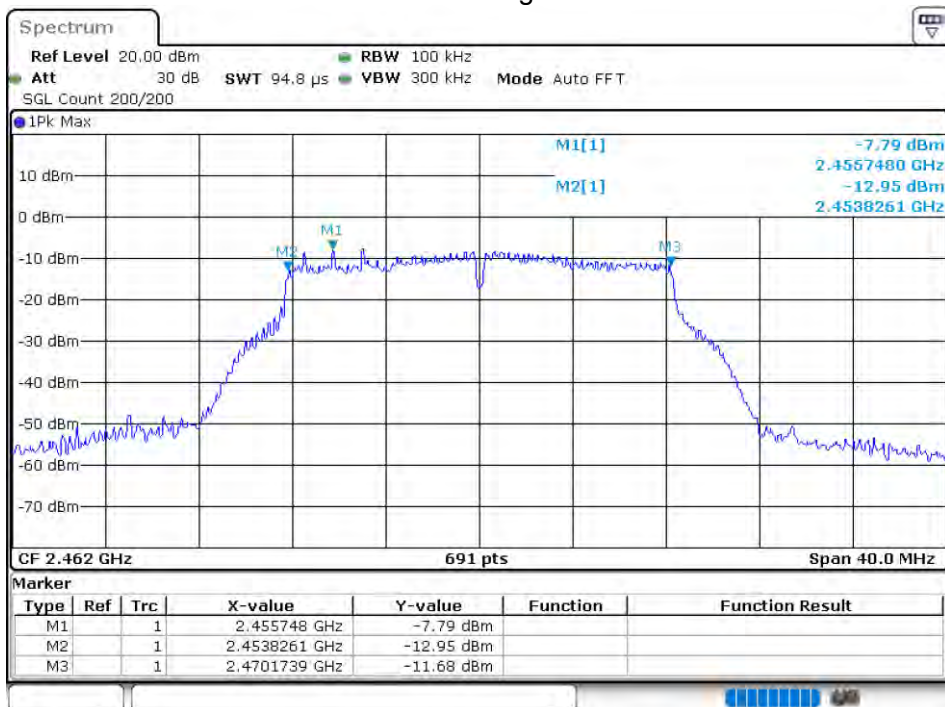

OBW NVNT 802.11g 2412MHz Ant 2




-6 dB BW NVNT 802.11g 2412MHz Ant 2

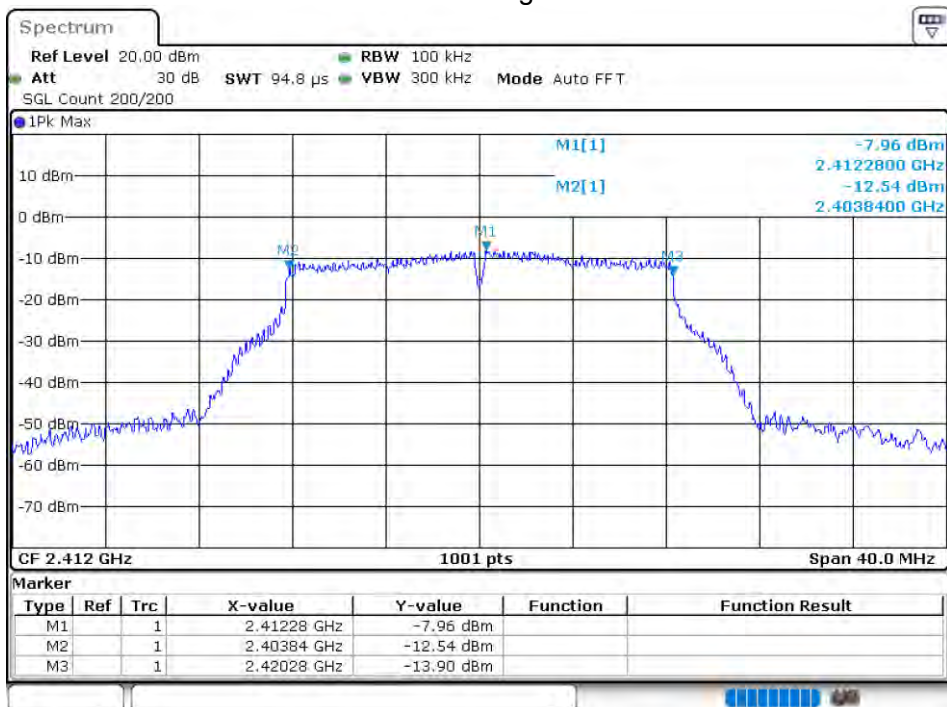


OBW NVNT 802.11g 2437MHz Ant 2




-6 dB BW NVNT 802.11g 2437MHz Ant 2

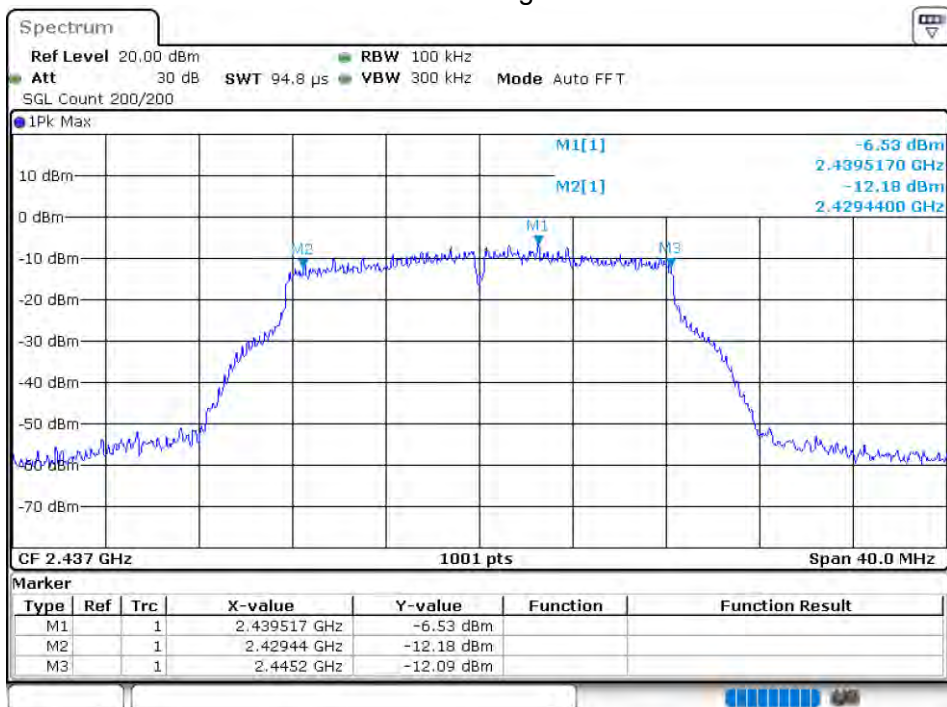

OBW NVNT 802.11g 2462MHz Ant 2

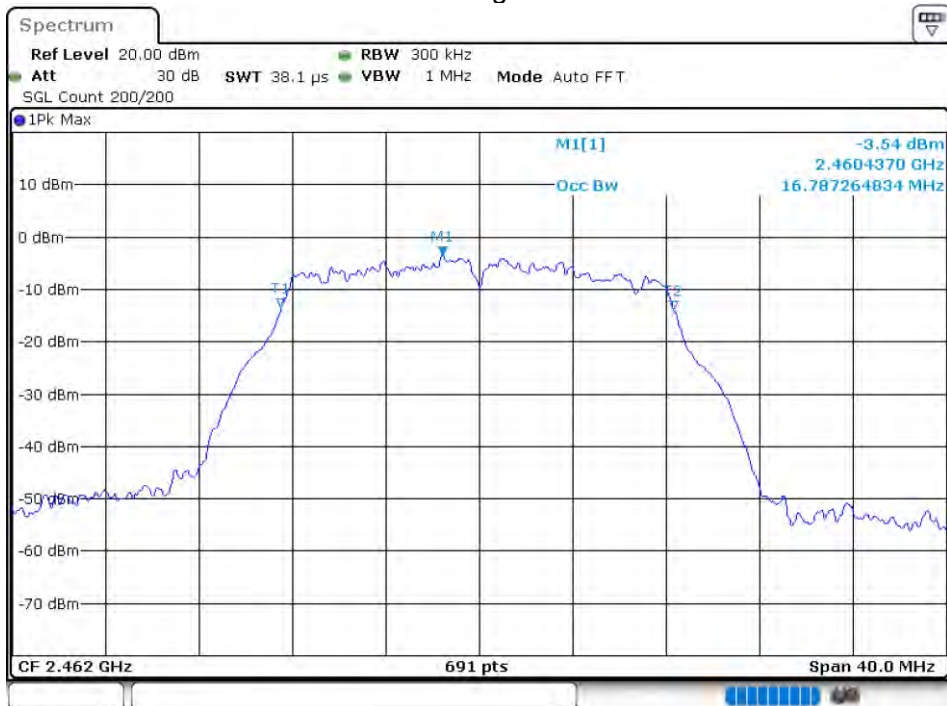


-6 dB BW NVNT 802.11g 2462MHz Ant 2

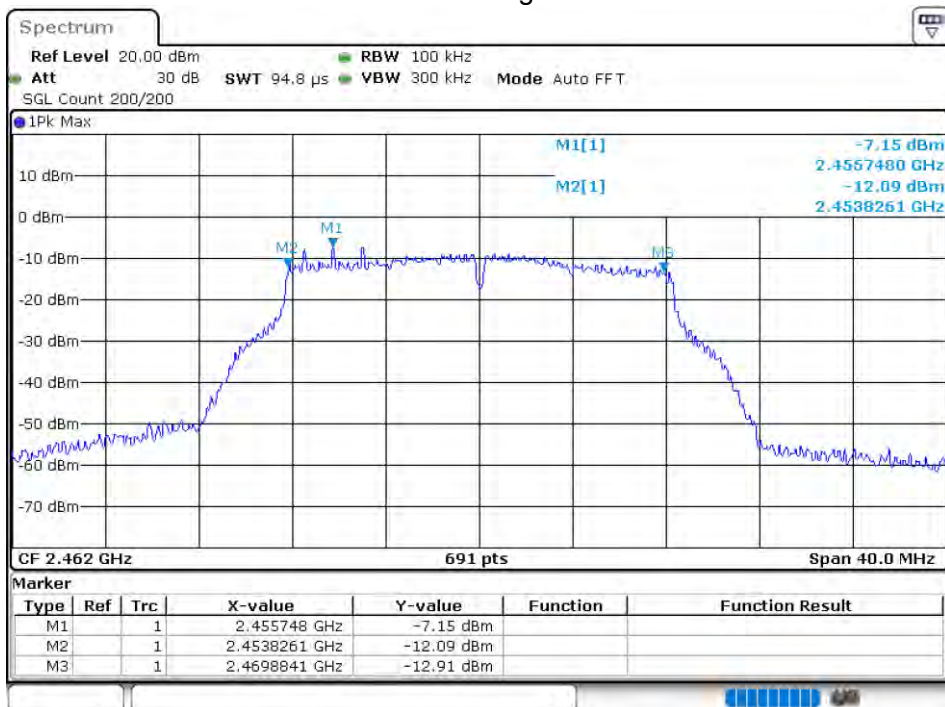

OBW NVNT 802.11n(HT20) 2412MHz Ant 1




-6 dB BW NVNT 802.11n(HT20) 2412MHz Ant 1

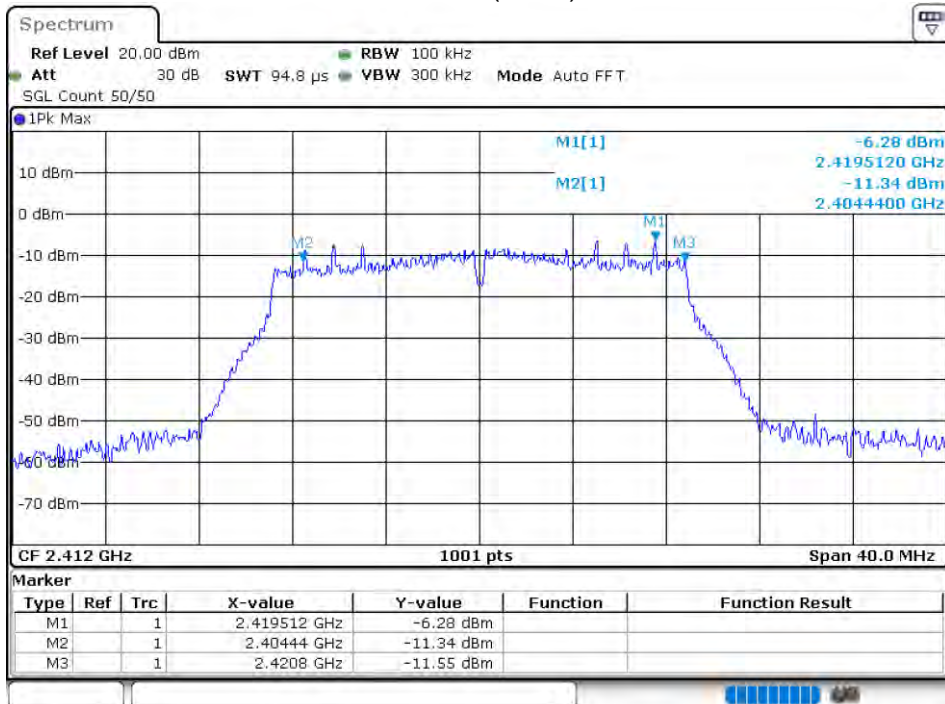

OBW NVNT 802.11n(HT20) 2437MHz Ant 1



-6 dB BW NVNT 802.11n(HT20) 2437MHz Ant 1

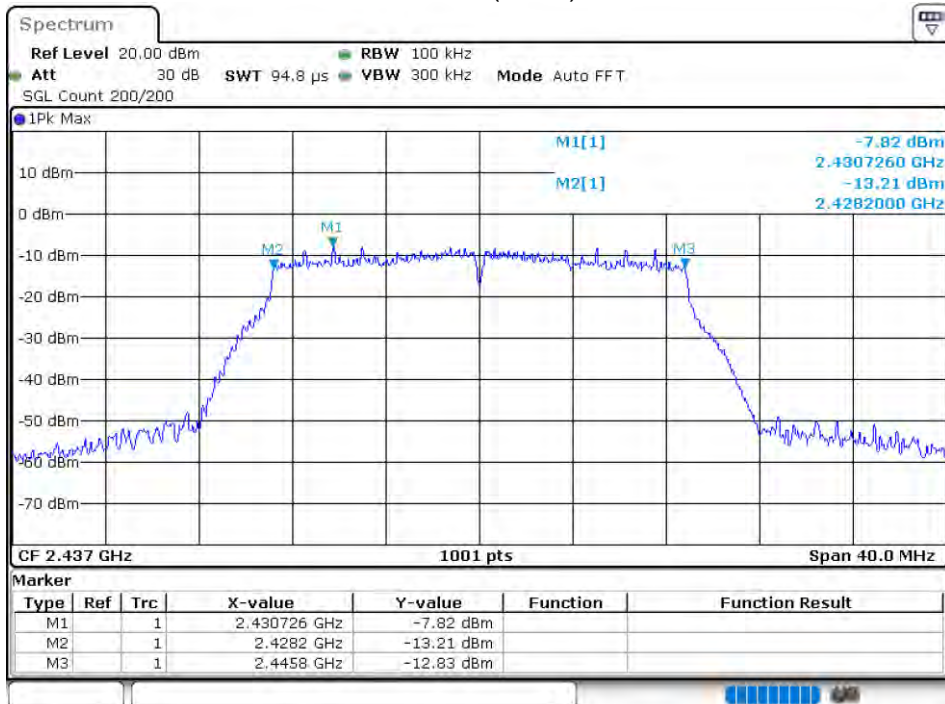

OBW NVNT 802.11n(HT20) 2462MHz Ant 1

