



11G Ant1_2462_1000~26500

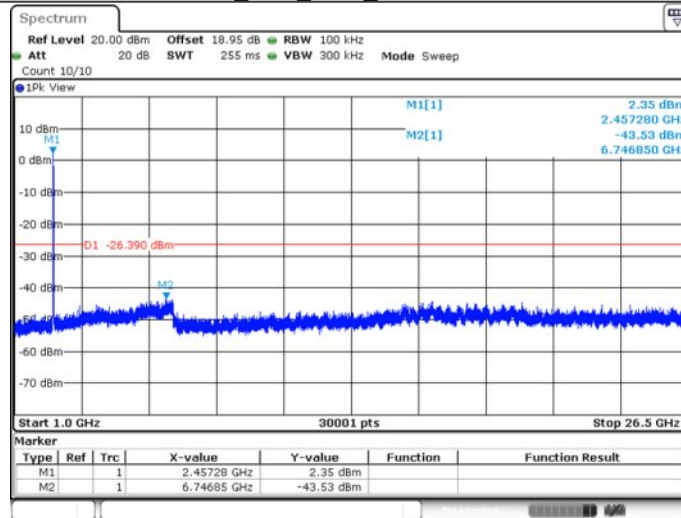


Date: 11.SEP.2025 21:07:26

11N20SiSO_Ant1_2412_0~Reference

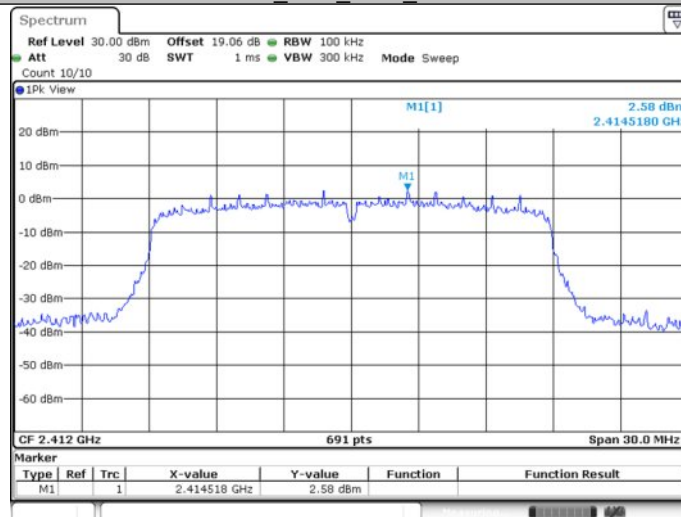


Date: 11.SEP.2025 21:12:22

11N20SiSO_Ant1_2412_30~1000

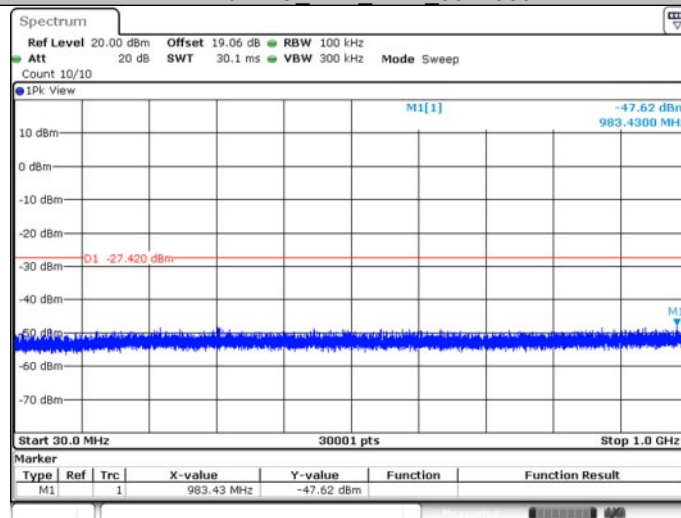


Date: 11.SEP.2025 21:12:31

11N20SISO_Ant1_2412_1000~26500

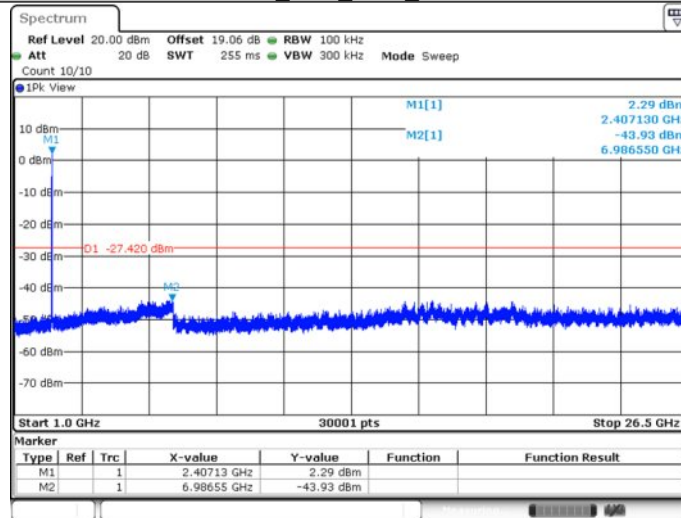


Date: 11.SEP.2025 21:12:54

11N20SISO_Ant1_2437_0~Reference

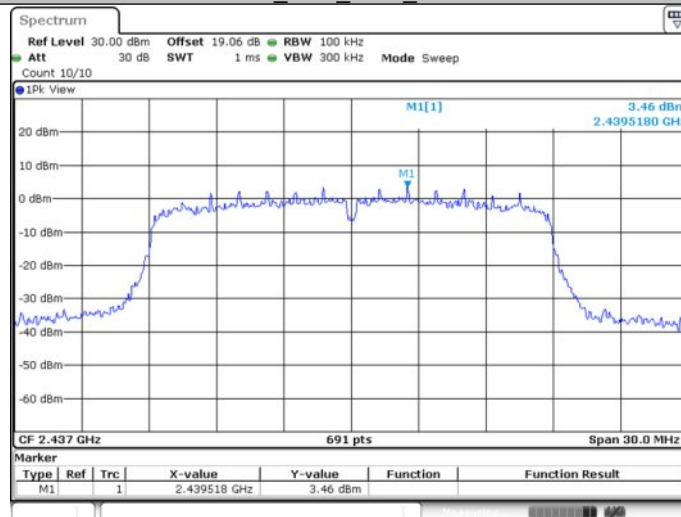


Date: 11.SEP.2025 21:18:38

11N20SISO_Ant1_2437_30~1000

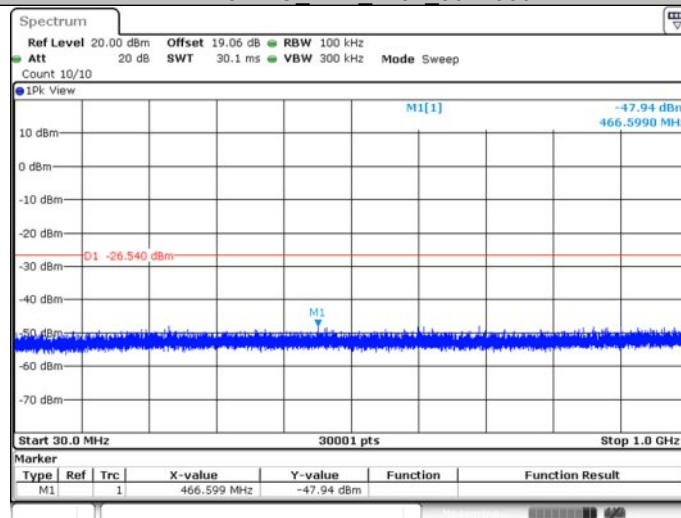


Date: 11.SEP.2025 21:18:47

11N20SISO_Ant1_2437_1000~26500

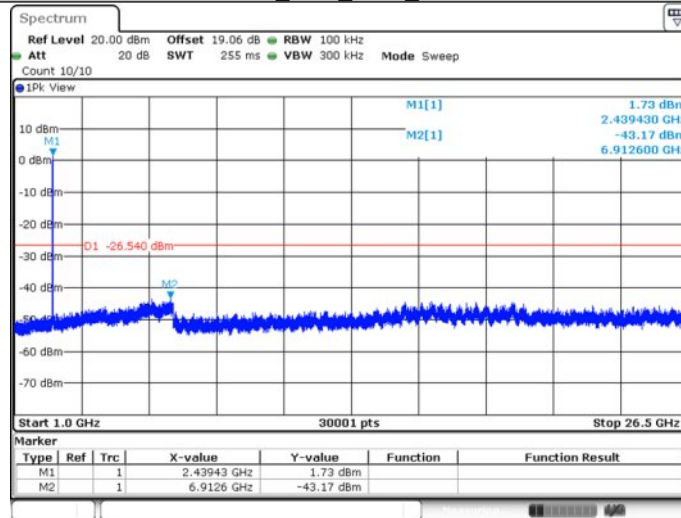


Date: 11.SEP.2025 21:19:09

11N20SISO_Ant1_2462_0~Reference

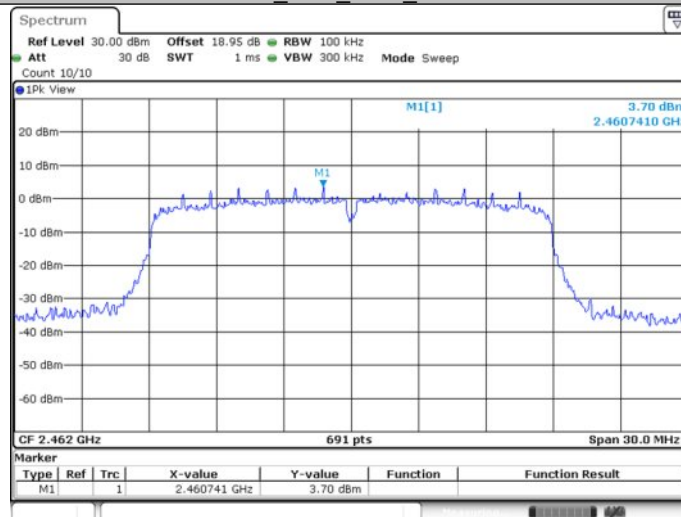


Date: 11.SEP.2025 21:28:01

11N20SISO_Ant1_2462_30~1000

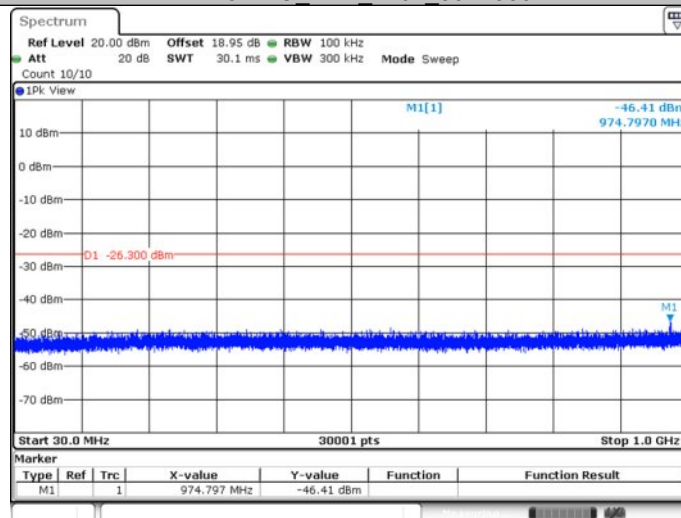


Date: 11.SEP.2025 21:28:10

11N20SISO_Ant1_2462_1000~26500

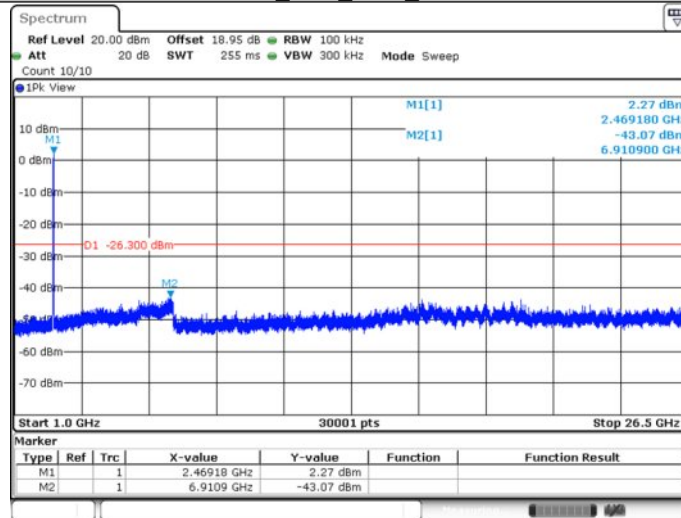


Date: 11.SEP.2025 21:28:32

11N40SISO_Ant1_2422_0~Reference

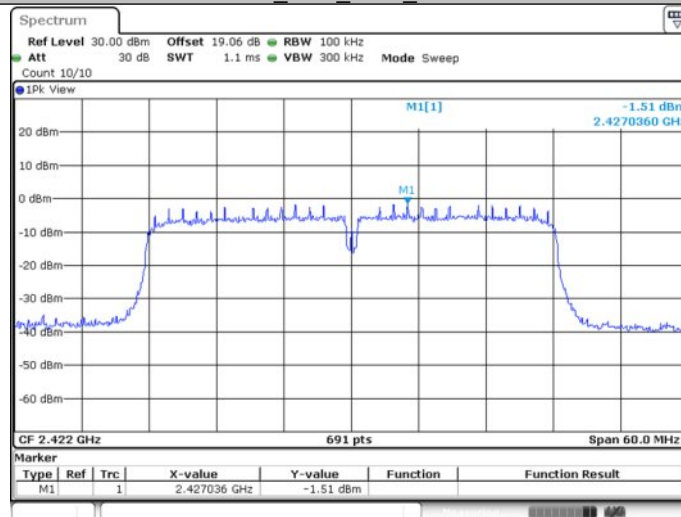


Date: 11.SEP.2025 21:33:11

11N40SISO_Ant1_2422_30~1000

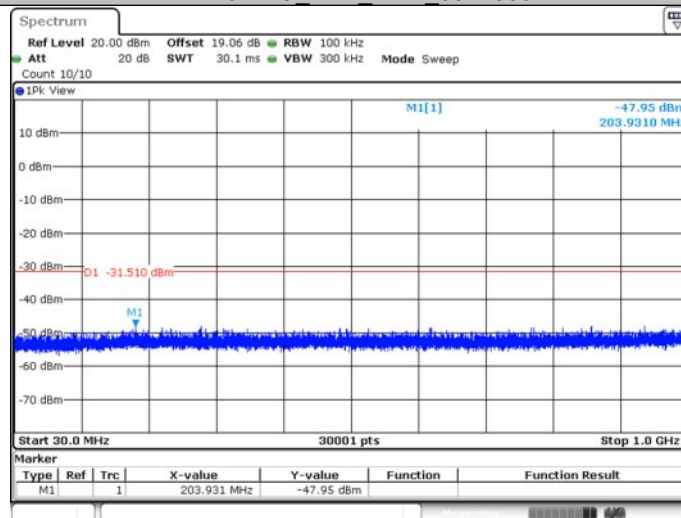


Date: 11.SEP.2025 21:33:20

11N40SISO_Ant1_2422_1000~26500

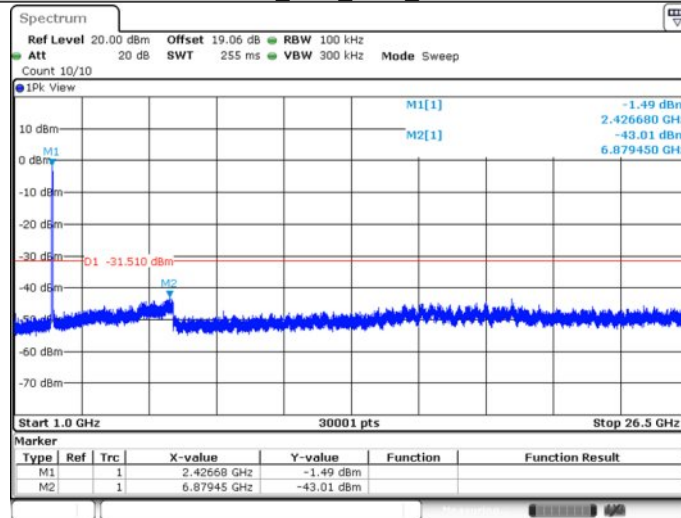


Date: 11.SEP.2025 21:33:42

11N40SISO_Ant1_2437_0~Reference

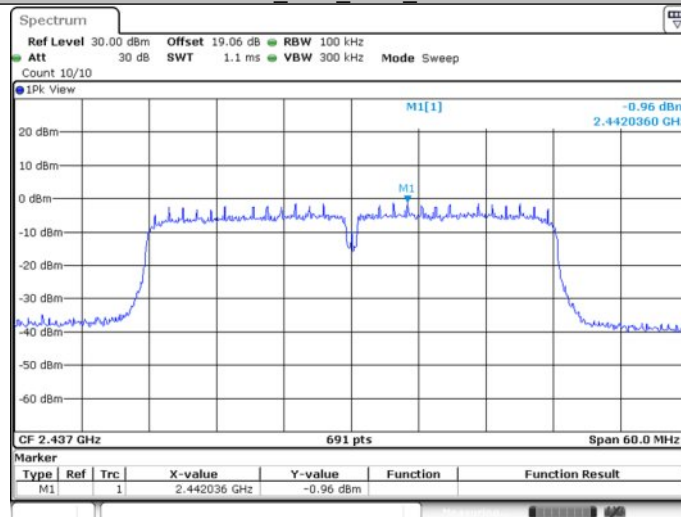


Date: 11.SEP.2025 21:48:27

11N40SISO_Ant1_2437_30~1000

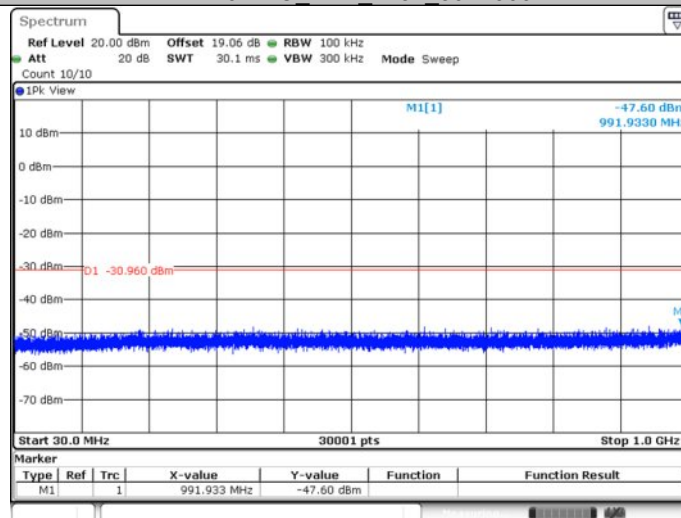


Date: 11.SEP.2025 21:48:36

11N40SISO_Ant1_2437_1000~26500

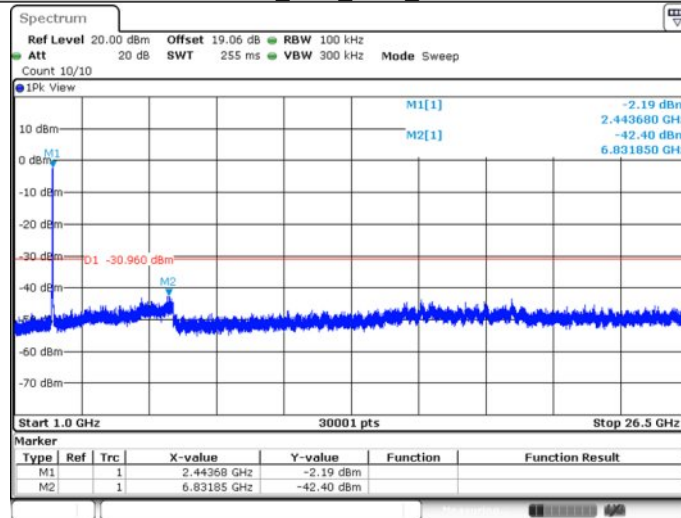


Date: 11.SEP.2025 21:48:58

11N40SISO_Ant1_2452_0~Reference

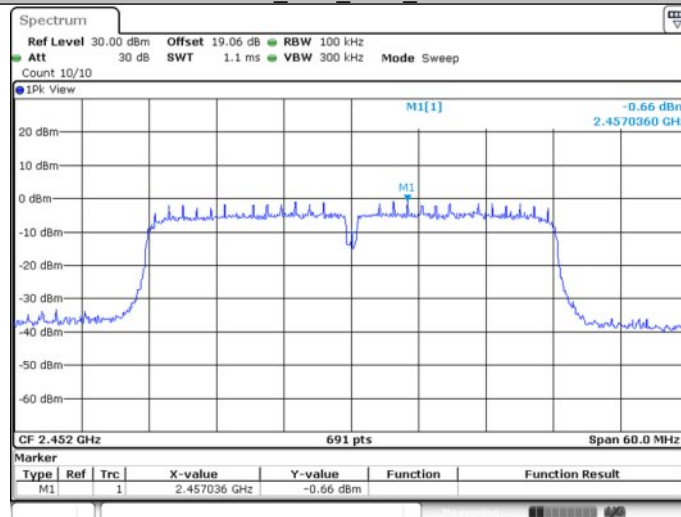


Date: 11.SEP.2025 21:54:16

11N40SISO_Ant1_2452_30~1000

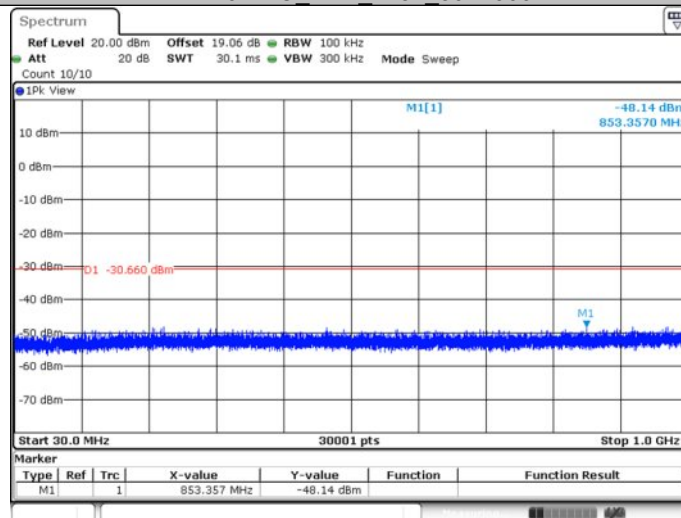

Date: 11.SEP.2025 21:54:25

11N40SISO_Ant1_2452_1000~26500

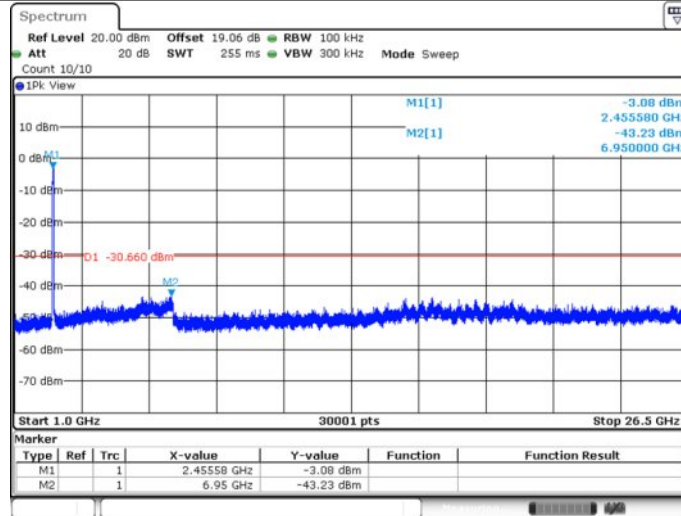

Date: 11.SEP.2025 21:54:47


Appendix A.6: Test Results of Band Edge Measurements

Test Result


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass

Test Graphs


11B_Ant1_Low_2412

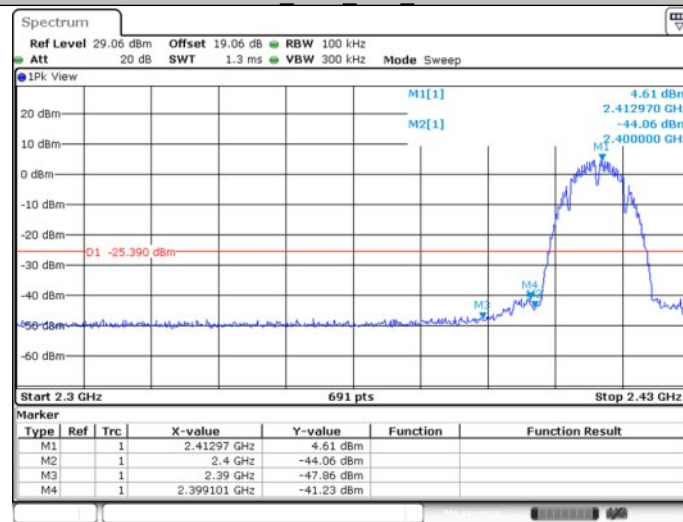

11B_Ant1_High_2462

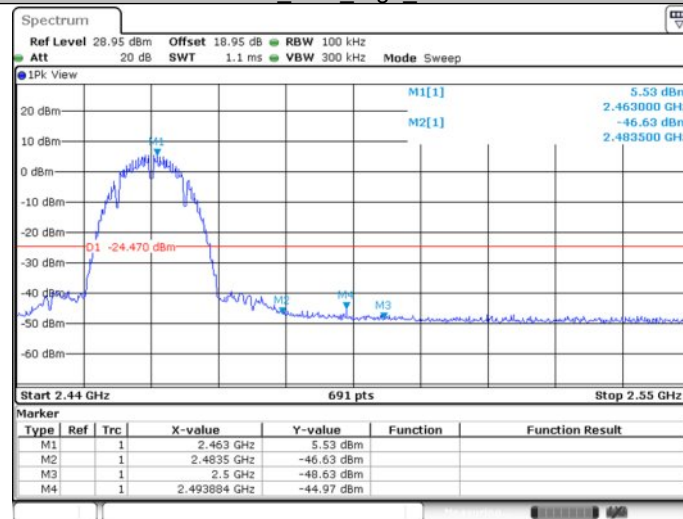


11G_Ant1_Low_2412

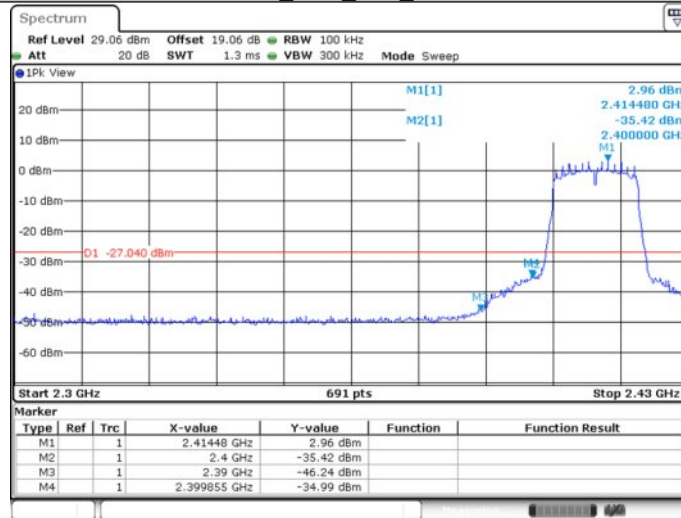


Date: 11.SEP.2025 20:59:42

11G_Ant1_High_2462

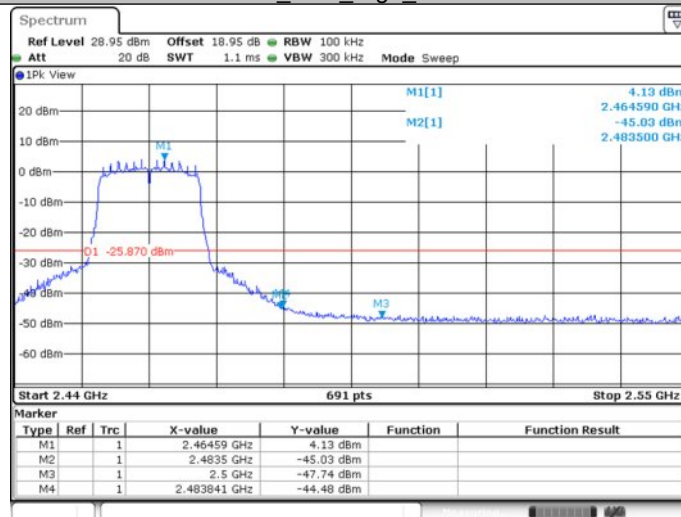


Date: 11.SEP.2025 21:06:46

11N20SISO_Ant1_Low_2412

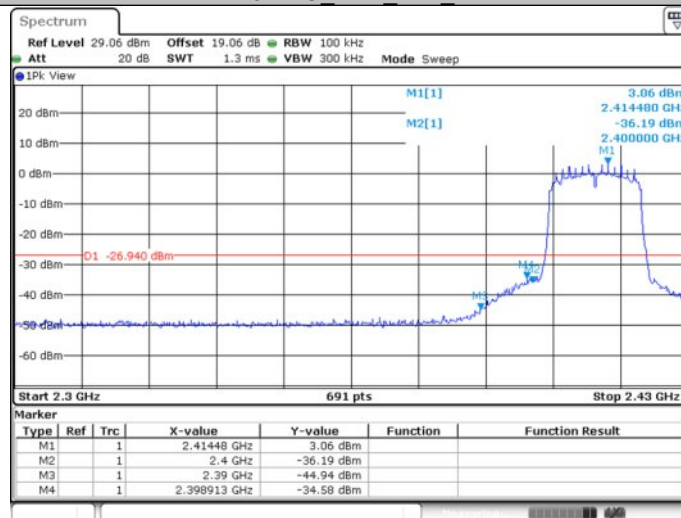


Date: 11.SEP.2025 21:12:13

11N20SISO_Ant1_High_2462

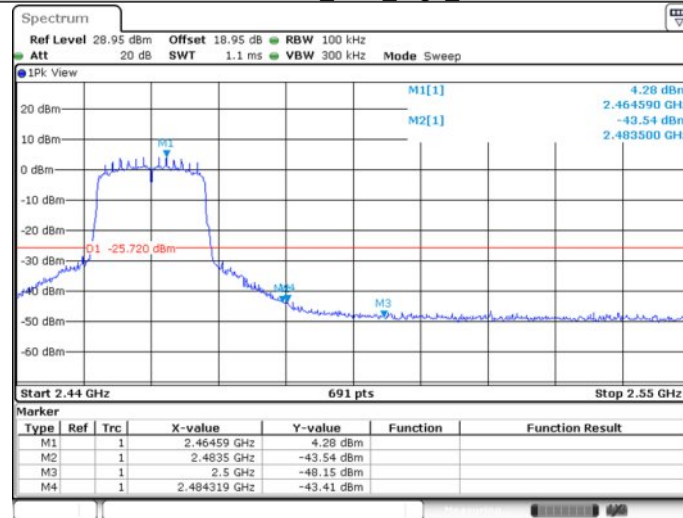


Date: 11.SEP.2025 21:27:53

11N40SISO_Ant1_Low_2422

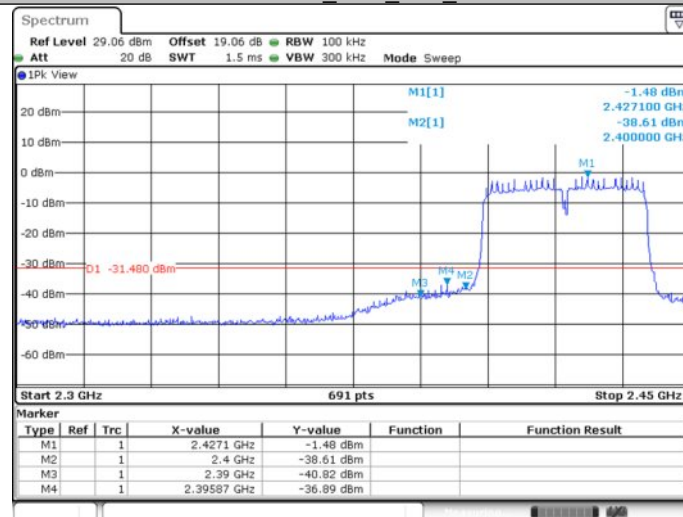

Date: 11.SEP.2025 21:33:03

11N40SISO_Ant1_High_2452

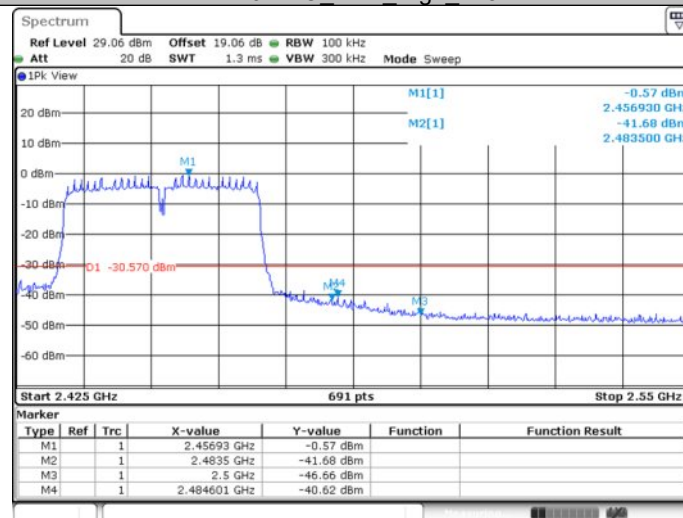

Date: 11.SEP.2025 21:54:08


Appendix A.7: Test Results of Radiated Spurious Emissions

Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

Test Date: 2025-09-10 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 2.4G Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC BELOW1G\21
Memo: Sample Numbel:S25080710-003

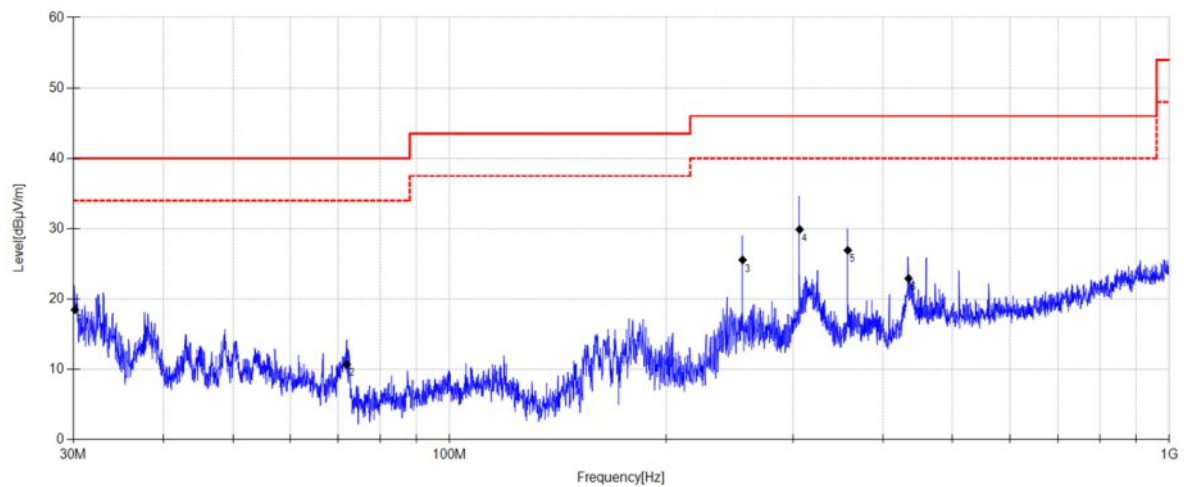


Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.148	36.59	10.47	3.72	18.48	40.00	21.52	QP	Horizontal
2	71.971	29.5	9.50	4.02	10.72	40.00	29.28	QP	Horizontal
3	255.335	40.92	12.20	4.84	25.56	46.00	20.44	QP	Horizontal
4	306.396	43.34	13.79	5.17	29.89	46.00	16.11	QP	Horizontal
5	357.501	38.86	15.15	5.38	26.93	46.00	19.07	QP	Horizontal
6	434.138	33.64	16.13	5.68	22.92	46.00	23.08	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date: 2025-09-10 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 2.4G Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC BELOW1G\22
Memo: Sample Numbel:S25080710-003

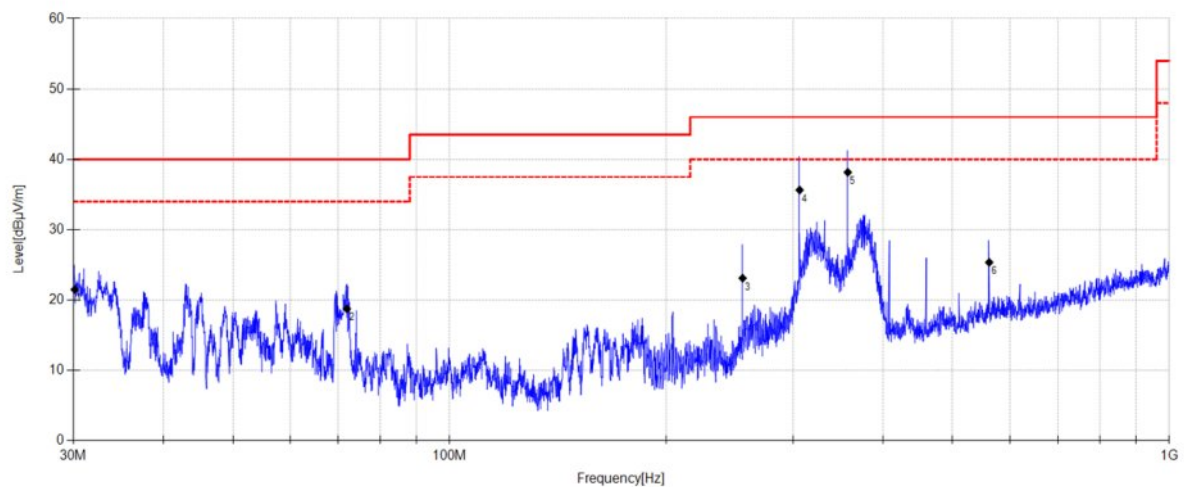

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.126	39.6	10.47	3.72	21.49	40.00	18.51	QP	Vertical
2	71.971	37.53	9.50	4.02	18.75	40.00	21.25	QP	Vertical
3	255.335	38.47	12.20	4.84	23.11	46.00	22.89	QP	Vertical
4	306.396	49.09	13.79	5.17	35.64	46.00	10.36	QP	Vertical
5	357.501	50.09	15.15	5.38	38.16	46.00	7.84	QP	Vertical
6	561.939	33.8	18.17	6.14	25.36	46.00	20.64	QP	Vertical


Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

1GHz - 18GHz

Note: The highest waveform in the figure is Wi-Fi Fundamental.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\33
Memo: Sample Numbler:S25080710-003 Power Setting:-16

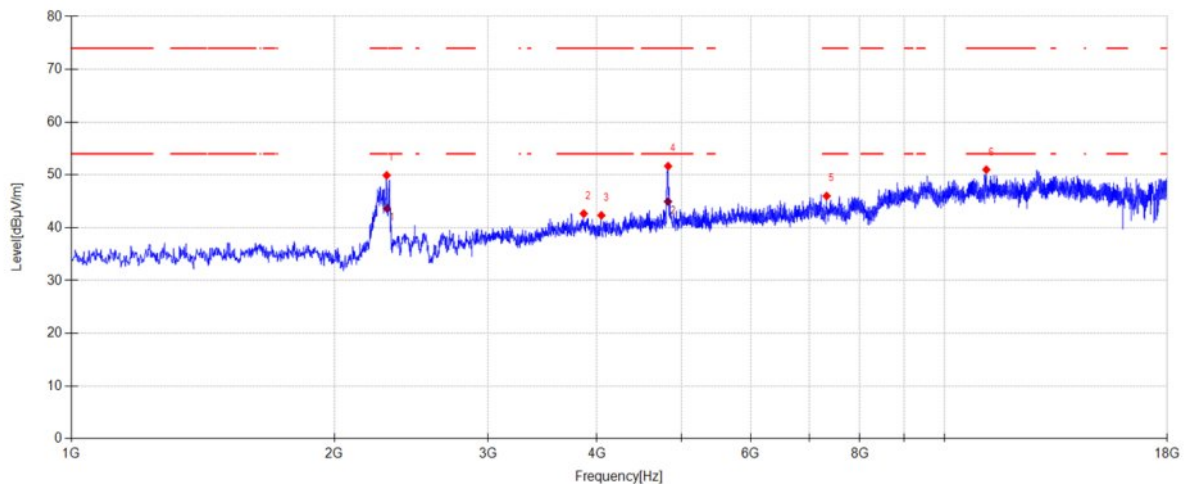

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2297.100	56.87	26.83	4.78	-38.55	49.93	74.00	24.07	PK	Horizontal
2	3862.800	46.26	30.98	5.07	-39.65	42.66	74.00	31.34	PK	Horizontal
3	4046.400	45.95	30.99	5.08	-39.68	42.34	74.00	31.66	PK	Horizontal
4	4825.000	52.58	33.15	5.55	-39.61	51.67	74.00	22.33	PK	Horizontal
5	7329.100	43.26	36.84	6.61	-40.70	46.01	74.00	27.99	PK	Horizontal
6	11167.700	42.70	39.23	8.24	-39.17	51.00	74.00	23.00	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2299.090	50.56	26.83	4.78	43.62	54.00	10.38	AV	Horizontal
2	4823.580	45.87	33.15	5.55	44.96	54.00	9.04	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\34
Memo: Sample Numbel:S25080710-003 Power Setting:-16

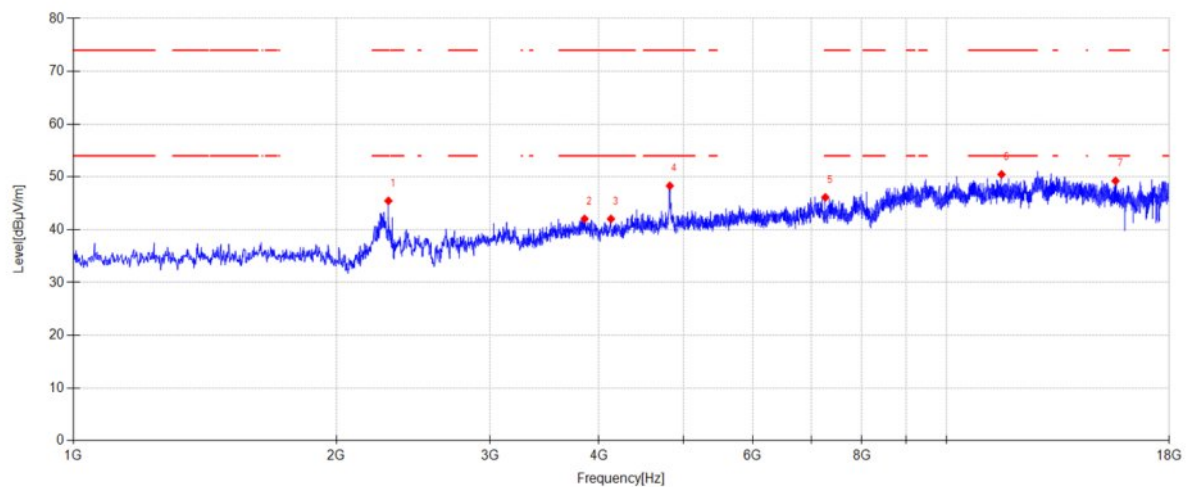


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2295.400	52.39	26.85	4.78	-38.55	45.47	74.00	28.53	PK	Vertical
2	3850.900	45.71	30.91	5.08	-39.64	42.06	74.00	31.94	PK	Vertical
3	4128.000	45.42	31.16	5.13	-39.67	42.04	74.00	31.96	PK	Vertical
4	4821.600	49.32	33.06	5.54	-39.61	48.31	74.00	25.69	PK	Vertical
5	7266.200	43.48	36.83	6.58	-40.76	46.13	74.00	27.87	PK	Vertical
6	11563.800	42.49	39.07	8.49	-39.56	50.49	74.00	23.51	PK	Vertical
7	15616.600	40.18	38.58	9.89	-39.40	49.25	74.00	24.75	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 2437MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\35
Memo: Sample Numbel:S25080710-003 Power Setting:-16

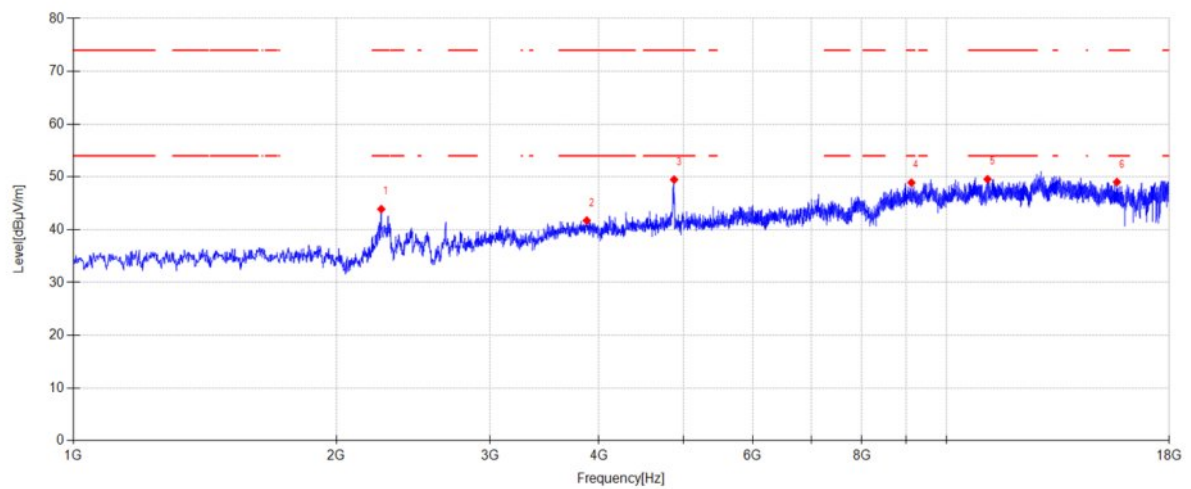


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2252.900	50.38	27.27	4.75	-38.50	43.90	74.00	30.10	PK	Horizontal
2	3873.000	45.27	31.04	5.07	-39.65	41.73	74.00	32.27	PK	Horizontal
3	4876.000	50.14	33.38	5.58	-39.61	49.49	74.00	24.51	PK	Horizontal
4	9117.500	41.97	38.50	7.34	-38.89	48.92	74.00	25.08	PK	Horizontal
5	11143.900	41.23	39.26	8.22	-39.14	49.57	74.00	24.43	PK	Horizontal
6	15677.800	39.98	38.52	9.93	-39.40	49.03	74.00	24.97	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 2437MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\36
Memo: Sample Numbel:S25080710-003 Power Setting:-16

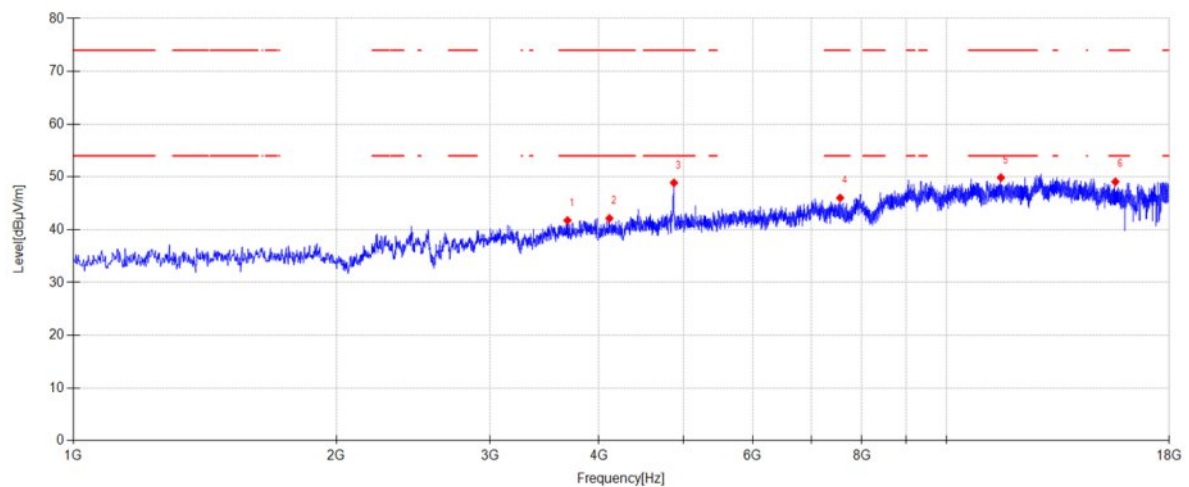


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3680.900	45.93	30.32	5.10	-39.60	41.75	74.00	32.25	PK	Vertical
2	4111.000	45.58	31.12	5.12	-39.67	42.15	74.00	31.85	PK	Vertical
3	4874.300	49.52	33.41	5.57	-39.61	48.89	74.00	25.11	PK	Vertical
4	7555.200	43.39	36.41	6.73	-40.50	46.03	74.00	27.97	PK	Vertical
5	11543.400	41.83	39.11	8.47	-39.54	49.87	74.00	24.13	PK	Vertical
6	15613.200	40.00	38.59	9.89	-39.40	49.08	74.00	24.92	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\37
Memo: Sample Numbel:S25080710-003 Power Setting:-16

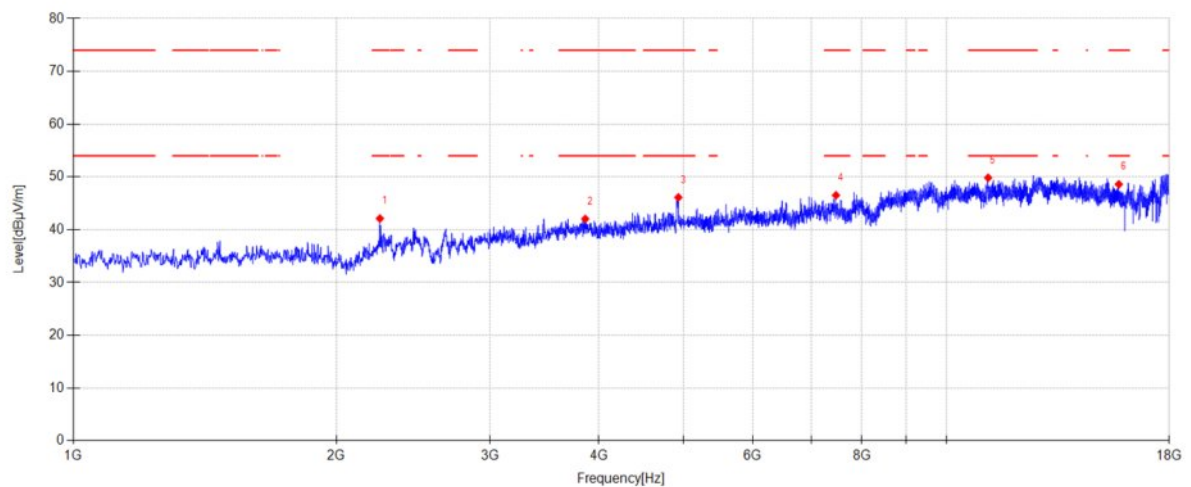


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2244.400	48.51	27.36	4.74	-38.49	42.12	74.00	31.88	PK	Horizontal
2	3857.700	45.68	30.95	5.07	-39.65	42.05	74.00	31.95	PK	Horizontal
3	4930.400	47.06	33.06	5.61	-39.61	46.12	74.00	27.88	PK	Horizontal
4	7471.900	43.85	36.56	6.69	-40.58	46.52	74.00	27.48	PK	Horizontal
5	11162.600	41.54	39.24	8.23	-39.16	49.85	74.00	24.15	PK	Horizontal
6	15756.000	39.62	38.39	9.99	-39.40	48.60	74.00	25.40	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\38
Memo: Sample Numbler:S25080710-003 Power Setting:-16

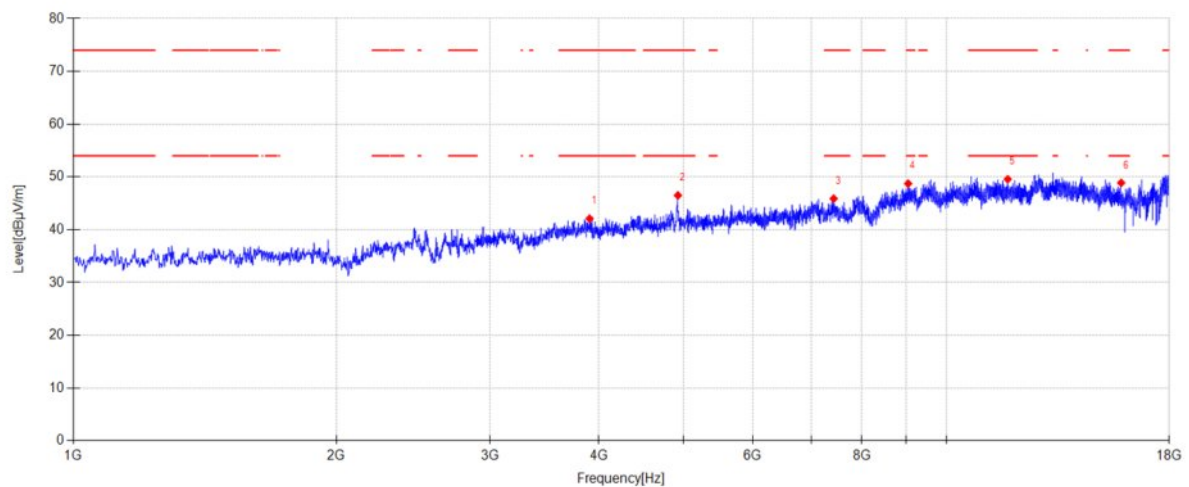

Suspected Data List


N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3901.900	45.49	31.20	5.07	-39.66	42.10	74.00	31.90	PK	Vertical
2	4925.300	47.46	33.05	5.61	-39.61	46.51	74.00	27.49	PK	Vertical
3	7427.700	43.20	36.64	6.67	-40.62	45.89	74.00	28.11	PK	Vertical
4	9039.300	41.88	38.38	7.31	-38.83	48.74	74.00	25.26	PK	Vertical
5	11754.200	41.76	38.95	8.61	-39.75	49.57	74.00	24.43	PK	Vertical
6	15852.900	40.04	38.19	10.05	-39.40	48.88	74.00	25.12	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Appendix A.8: Test Results of Radiated Emissions in Restricted Bands

Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\87
Memo: Sample Numbler:S25080710-003 Power Setting:-16

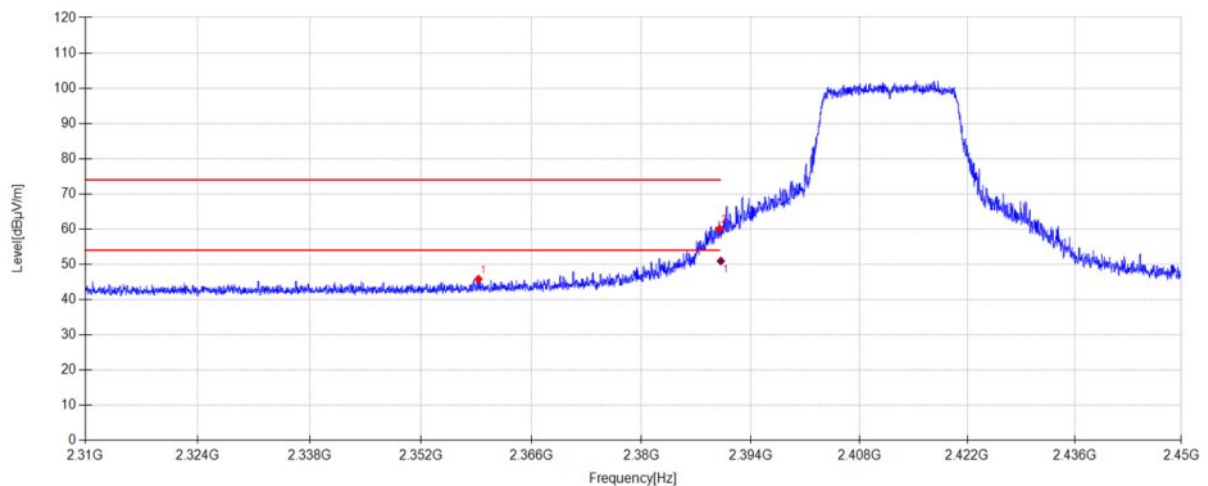

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2359.280	13.86	27.14	4.82	0.00	45.82	74.00	28.18	PK	Horizontal
2	2390.000	27.98	27.26	4.84	0.00	60.08	74.00	13.92	PK	Horizontal


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2390.174	18.84	27.26	4.84	50.94	54.0	3.06	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\88
Memo: Sample Numbel:S25080710-003 Power Setting:-16

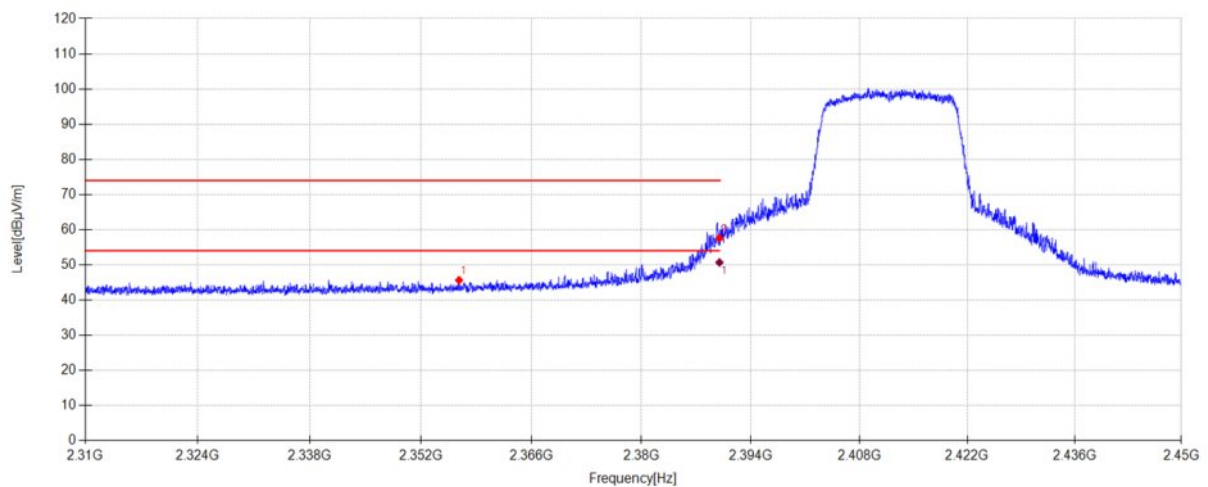

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2356.816	13.71	27.13	4.81	0.00	45.65	74.00	28.35	PK	Vertical
2	2390.000	25.51	27.26	4.84	0.00	57.61	74.00	16.39	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2390.000	18.59	27.26	4.84	50.69	54.00	3.31	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\89
Memo: Sample Numbler:S25080710-003 Power Setting:-16

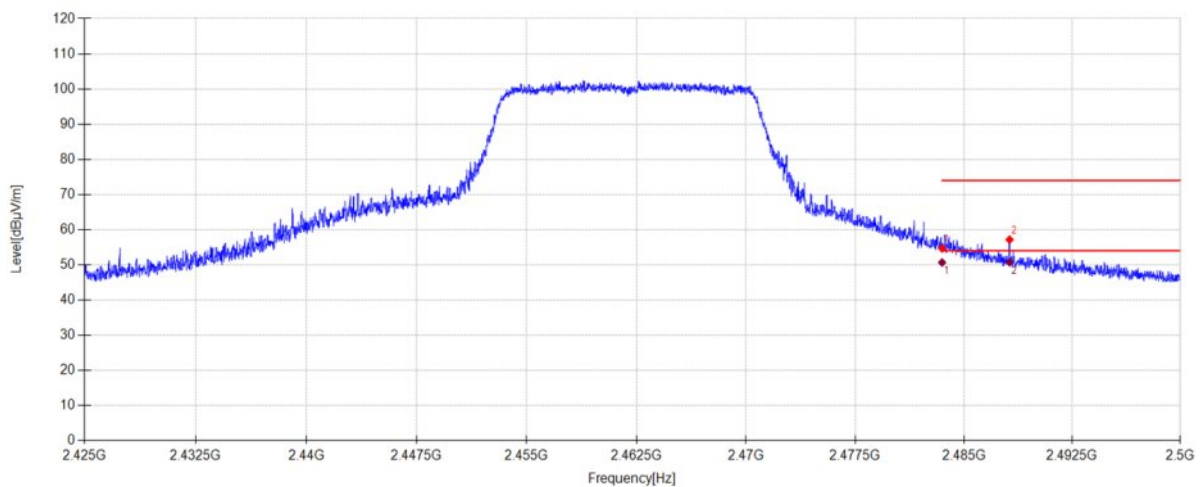

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	22.30	27.53	4.89	0.00	54.72	74.00	19.28	PK	Horizontal
2	2488.165	24.73	27.55	4.90	0.00	57.18	74.00	16.82	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.26	27.53	4.89	50.68	54.00	3.32	AV	Horizontal
2	2488.165	18.29	27.55	4.90	50.74	54.00	3.26	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\90
Memo: Sample Numbel:S25080710-003 Power Setting:-16

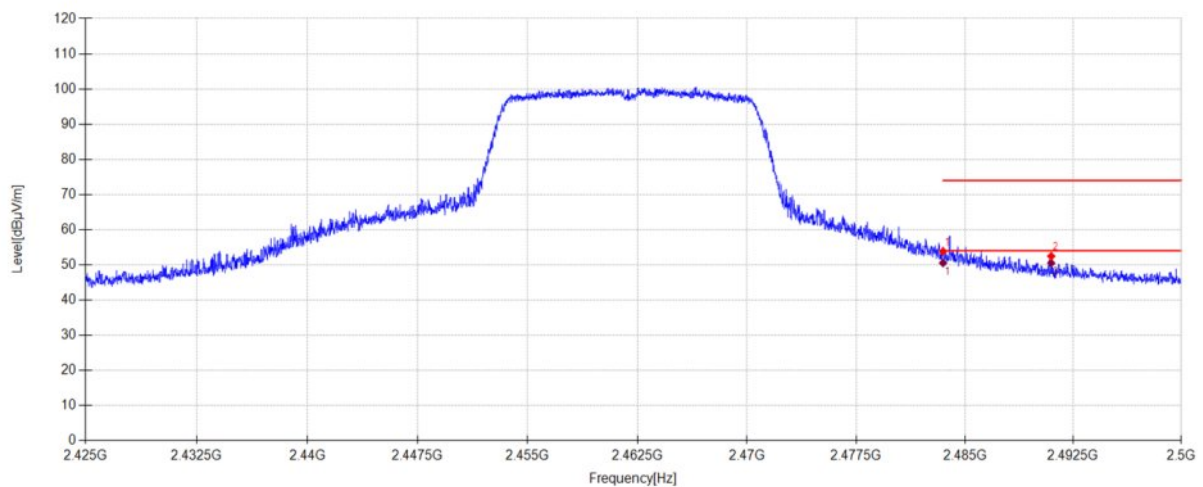

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.42	27.53	4.89	0.00	53.84	74.00	20.16	PK	Vertical
2	2490.978	20.01	27.56	4.90	0.00	52.47	74.00	21.53	PK	Vertical


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.13	27.53	4.89	50.55	54.00	3.45	AV	Vertical
2	2490.978	18.05	27.56	4.90	50.51	54.00	3.49	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11B 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\91
Memo: Sample Numbler:S25080710-003 Power Setting:-16

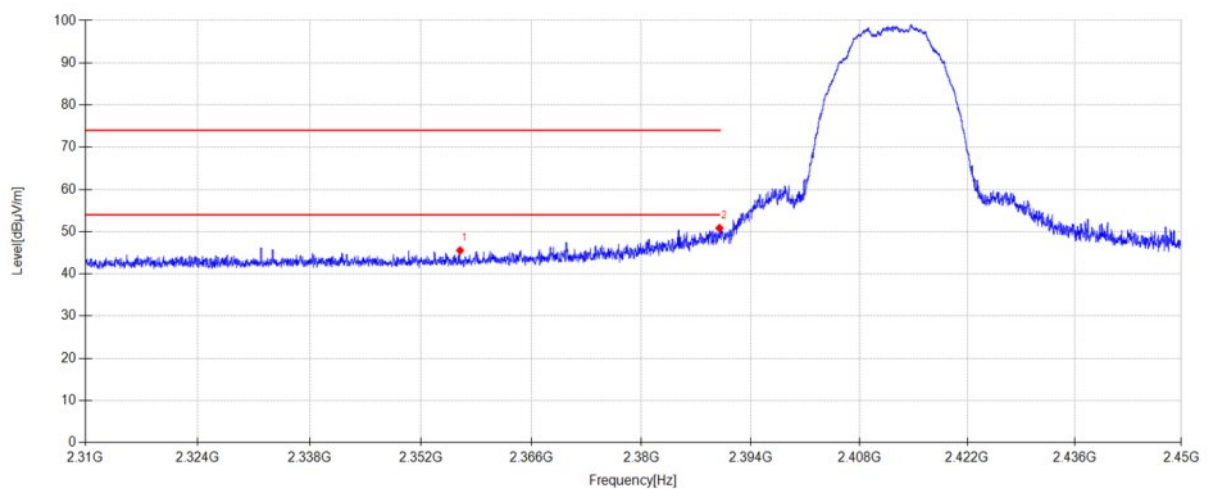

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2356.942	13.61	27.13	4.81	0.00	45.55	74.00	28.45	PK	Horizontal
2	2390.000	18.74	27.26	4.84	0.00	50.84	74.00	23.16	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11B 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\92
Memo: Sample Numbler:S25080710-003 Power Setting:-16

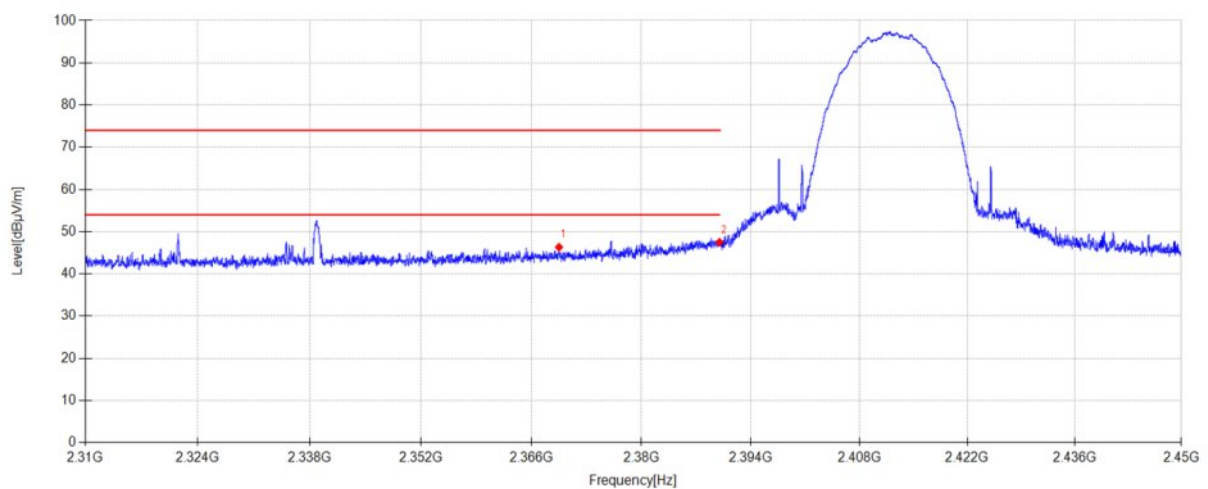

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2369.500	14.34	27.18	4.82	0.00	46.34	74.00	27.66	PK	Vertical
2	2390.000	15.41	27.26	4.84	0.00	47.51	74.00	26.49	PK	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11B 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\93
Memo: Sample Numbler:S25080710-003 Power Setting:-16

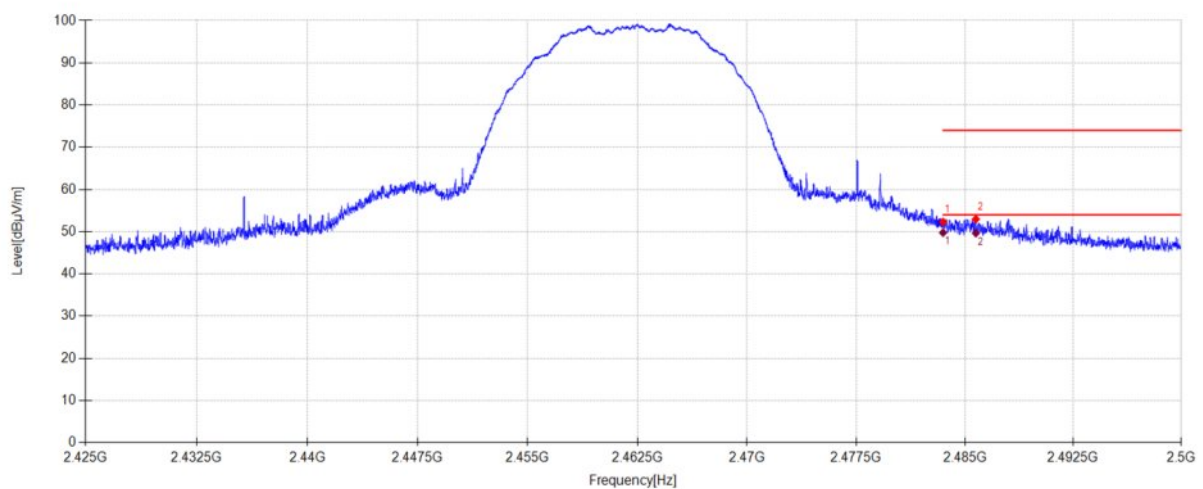

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.91	27.53	4.89	0.00	52.33	74.00	21.67	PK	Horizontal
2	2485.765	20.53	27.54	4.90	0.00	52.97	74.00	21.03	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.36	27.53	4.89	49.78	54.00	4.22	AV	Horizontal
2	2485.765	17.22	27.54	4.90	49.66	54.00	4.34	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11B 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\94
Memo: Sample Numbler:S25080710-003 Power Setting:-16

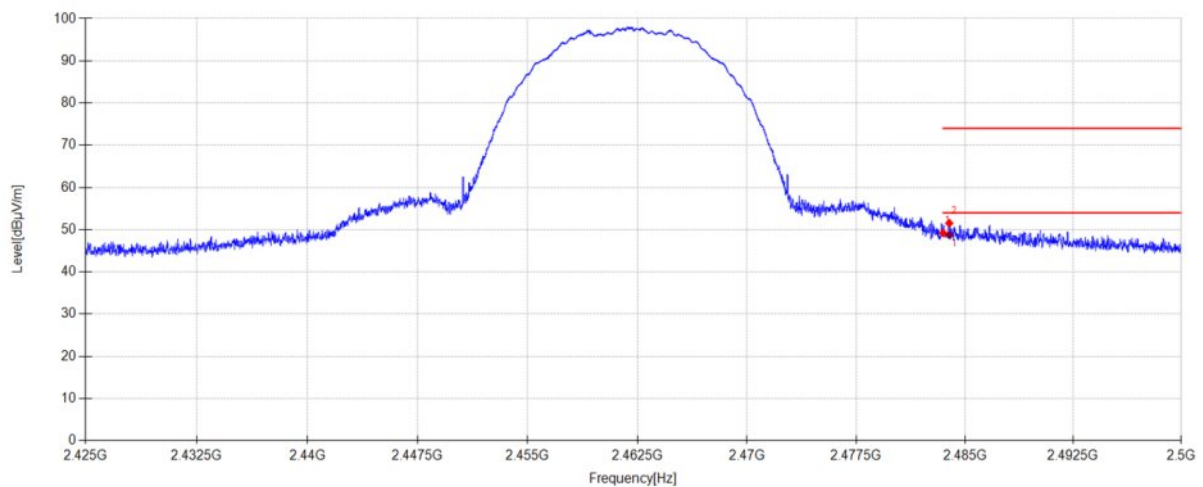

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	16.80	27.53	4.89	0.00	49.22	74.00	24.78	PK	Vertical
2	2483.928	19.12	27.54	4.89	0.00	51.55	74.00	22.45	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.928	16.32	27.54	4.89	48.75	54.00	5.25	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11G 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\95
Memo: Sample Numbler:S25080710-003 Power Setting:-16

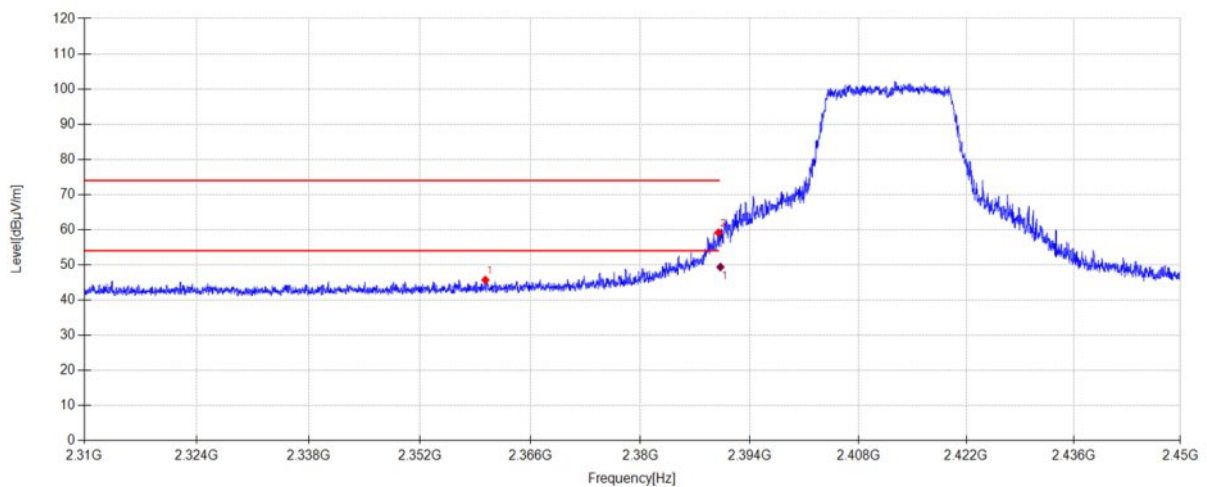

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2360.274	13.74	27.14	4.82	0.00	45.70	74.00	28.30	PK	Horizontal
2	2390.000	27.07	27.26	4.84	0.00	59.17	74.00	14.83	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2390.244	17.29	27.26	4.84	49.39	54.0	4.61	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11G 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\96
Memo: Sample Numbel:S25080710-003 Power Setting:-16

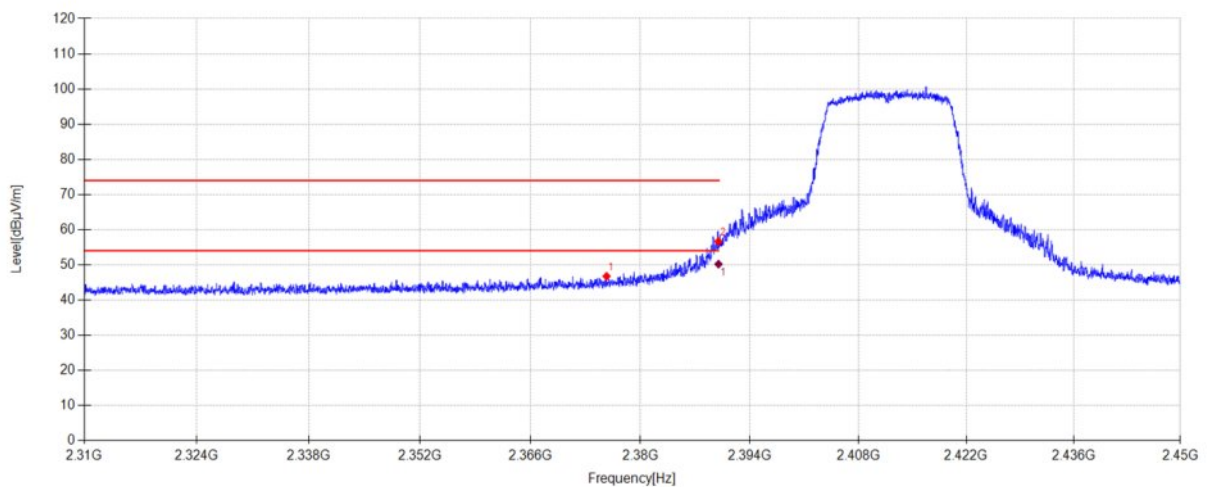

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2375.674	14.73	27.20	4.83	0.00	46.76	74.00	27.24	PK	Vertical
2	2390.000	24.56	27.26	4.84	0.00	56.66	74.00	17.34	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2390.000	18.11	27.26	4.84	50.21	54.00	3.79	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11G 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\97
Memo: Sample Numbler:S25080710-003 Power Setting:-16

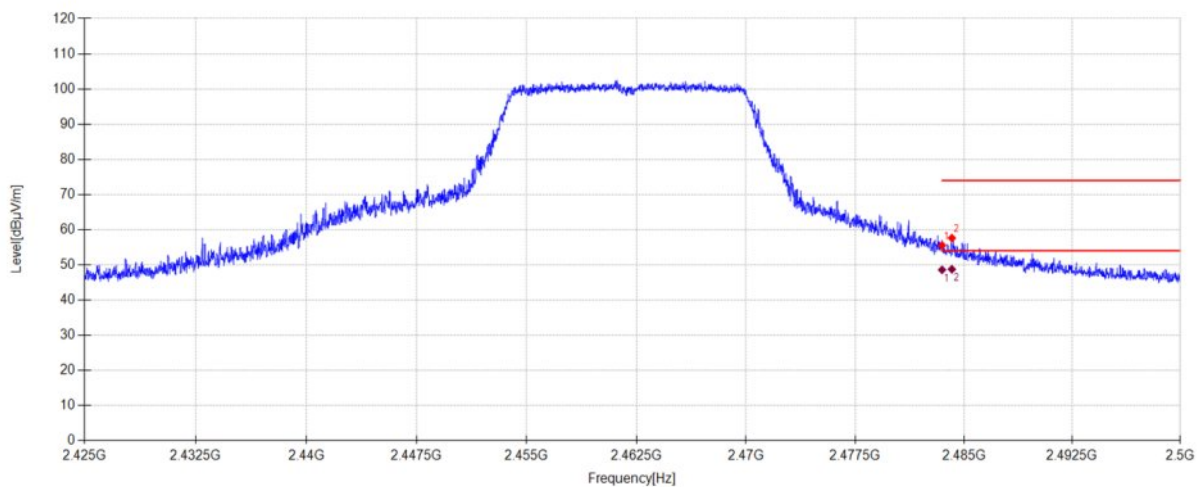

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	23.12	27.53	4.89	0.00	55.54	74.00	18.46	PK	Horizontal
2	2484.175	25.18	27.54	4.90	0.00	57.62	74.00	16.38	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	16.18	27.53	4.89	48.60	54.00	5.40	AV	Horizontal
2	2484.175	16.32	27.54	4.90	48.76	54.00	5.24	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-29 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11G 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\98
Memo: Sample Numbler:S25080710-003 Power Setting:-16

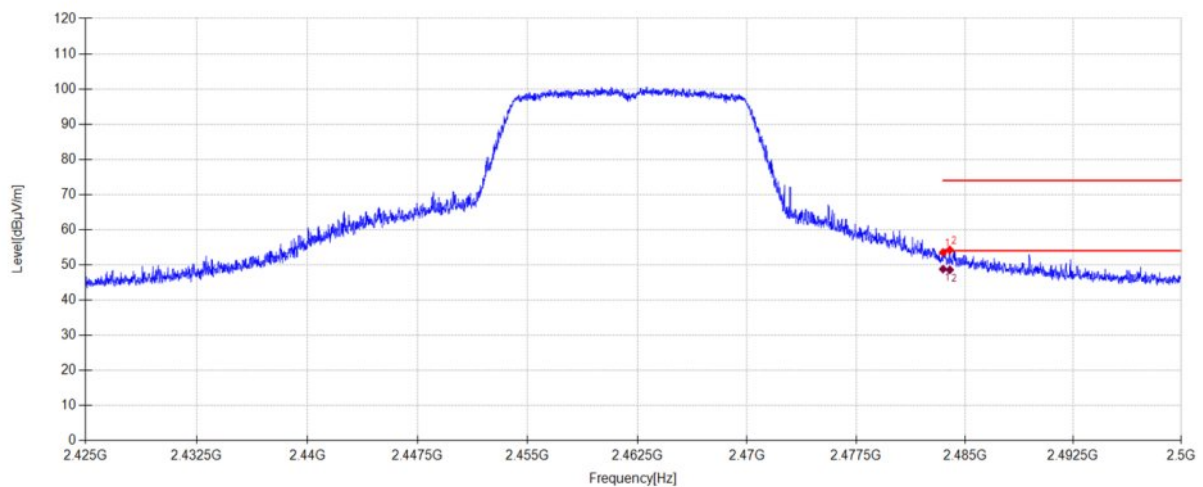

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.12	27.53	4.89	0.00	53.54	74.00	20.46	PK	Vertical
2	2483.965	21.83	27.54	4.89	0.00	54.26	74.00	19.74	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	16.39	27.53	4.89	48.81	54.00	5.19	AV	Vertical
2	2483.965	16.15	27.54	4.89	48.58	54.00	5.42	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\110
Memo: Sample Numbler:S25080710-003 Power Setting:-16

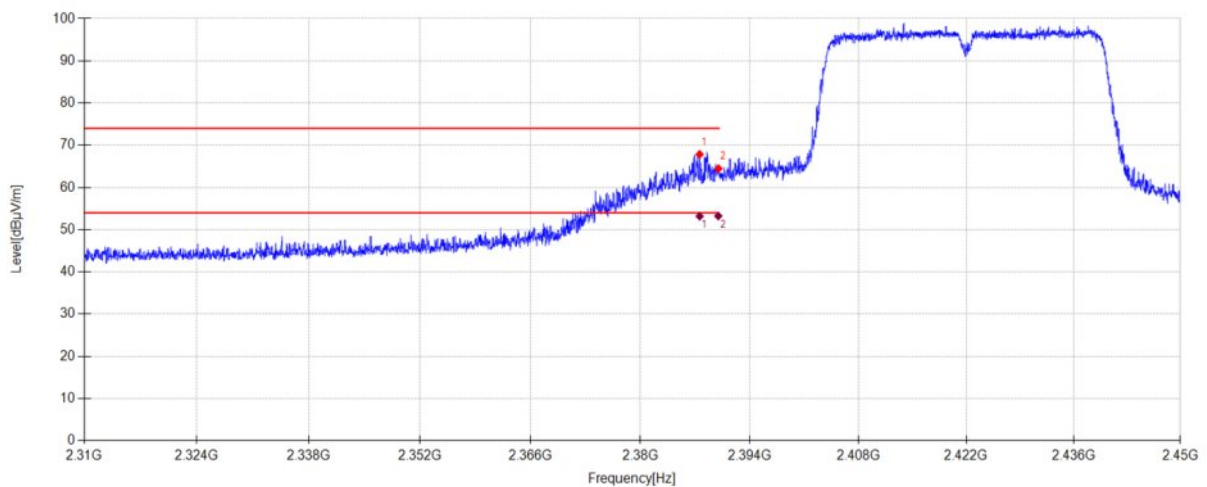

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.588	35.25	27.77	4.83	0.00	67.85	74.00	6.15	PK	Horizontal
2	2389.000	31.85	27.78	4.84	0.00	64.47	74.00	9.53	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.588	20.59	27.77	4.83	53.19	54.00	0.81	AV	Horizontal
2	2389.970	20.62	27.78	4.84	53.24	54.00	0.76	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\111
Memo: Sample Numbler:S25080710-003 Power Setting:-16

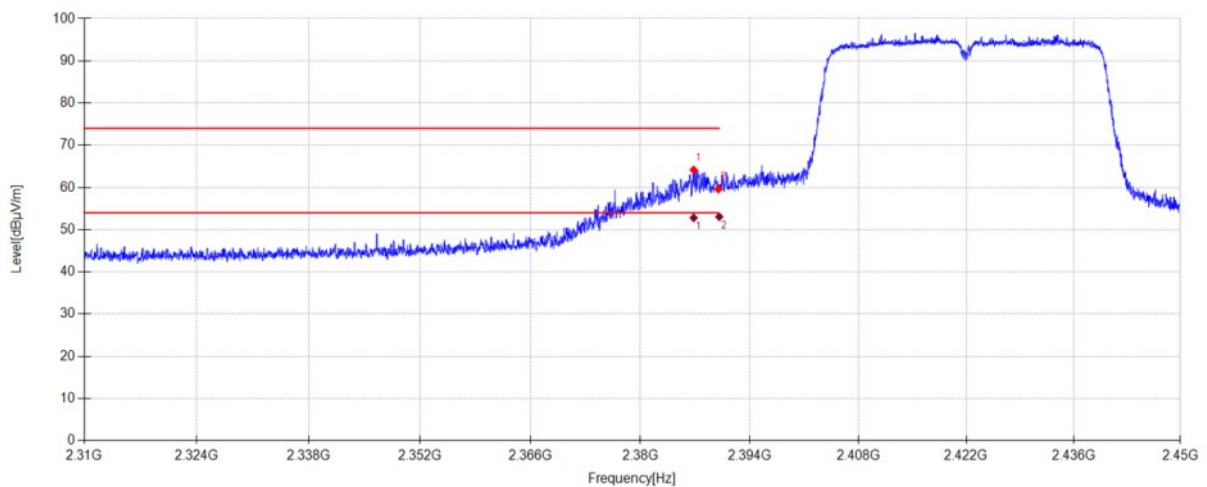

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.818	31.58	27.77	4.83	0.00	64.18	74.00	9.82	PK	Vertical
2	2390.000	26.98	27.78	4.84	0.00	59.60	74.00	14.40	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.818	20.21	27.77	4.83	52.81	54.00	1.19	AV	Vertical
2	2390.090	20.44	27.78	4.84	53.06	54.0	0.94	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\112
Memo: Sample Numbel:S25080710-003 Power Setting:-16

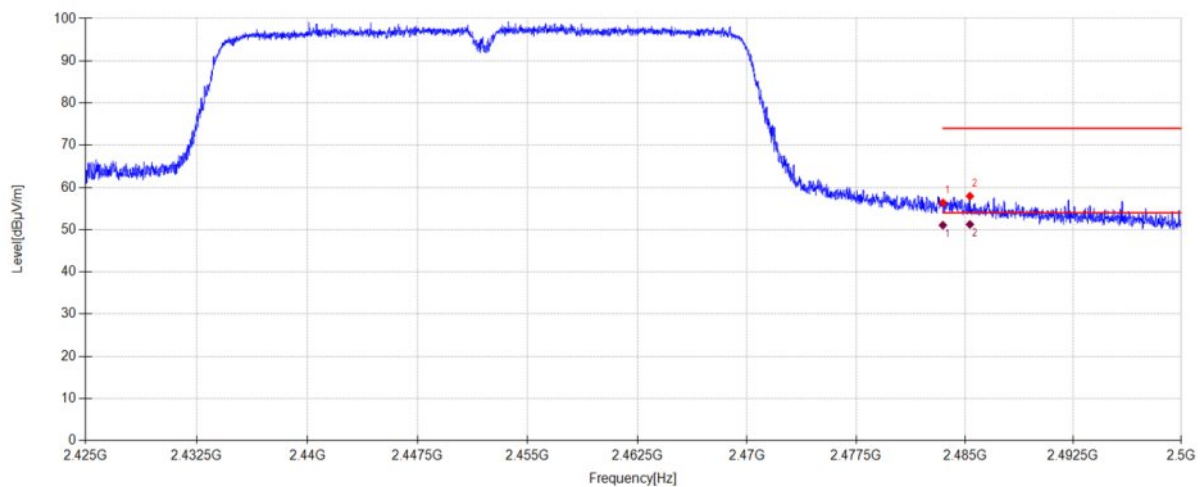


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	23.46	28.01	4.89	0.00	56.36	74.00	17.64	PK	Horizontal
2	2485.353	25.04	28.01	4.90	0.00	57.95	74.00	16.05	PK	Horizontal

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.490	18.17	28.01	4.89	51.07	54.00	2.93	AV	Horizontal
2	2485.353	18.35	28.01	4.90	51.26	54.00	2.74	AV	Horizontal

- Note:
- Level = Reading + Cable loss + Antenna Factor + AMP
 - If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 2.4G\113
Memo: Sample Numbler:S25080710-003 Power Setting:-16

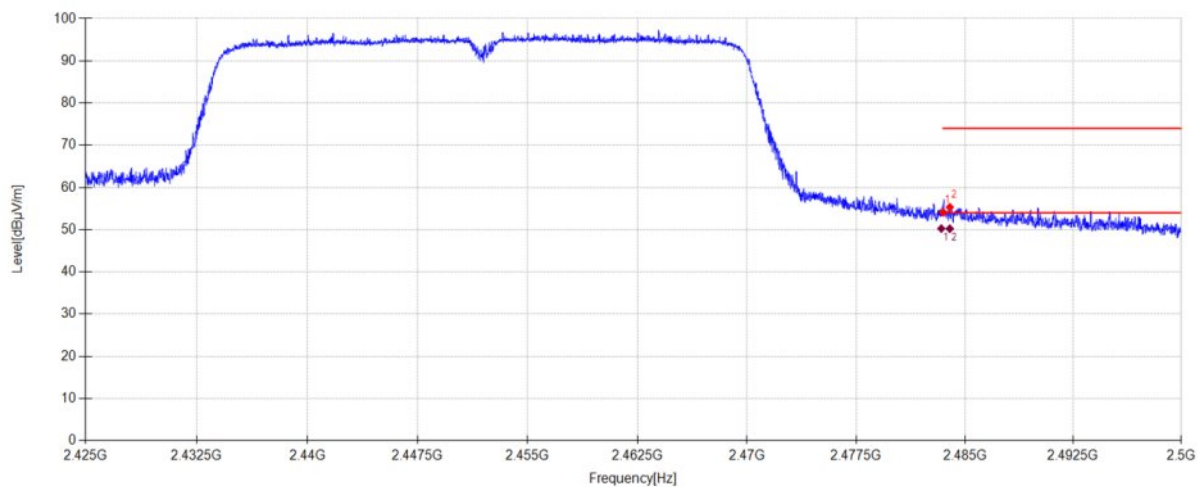

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.20	28.01	4.89	0.00	54.10	74.00	19.90	PK	Vertical
2	2483.965	22.42	28.01	4.89	0.00	55.32	74.00	18.68	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.381	17.37	28.01	4.89	50.27	54.00	3.73	AV	Vertical
2	2483.965	17.33	28.01	4.89	50.23	54.00	3.77	AV	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Appendix A.9: Test Results of Conducted Emissions on AC Mains

Test Site : DDT 5# Shield Room
Test Date : 2025-09-12
EUT : Dreame NAVO Care SE 1 Incam
Power Supply : AC 120V/60Hz
Condition : Temp:22.3°C,Humi:51.5%
Memo : S25080710-008

D:\2025 report data\Q25080710-4E\0912 CE.EM6
Tested By : Li Xiongbin
Model Number : A121
Test Mode : 2.4G WIFI Mode
LISN : 2025 2# 216/NEUTRAL

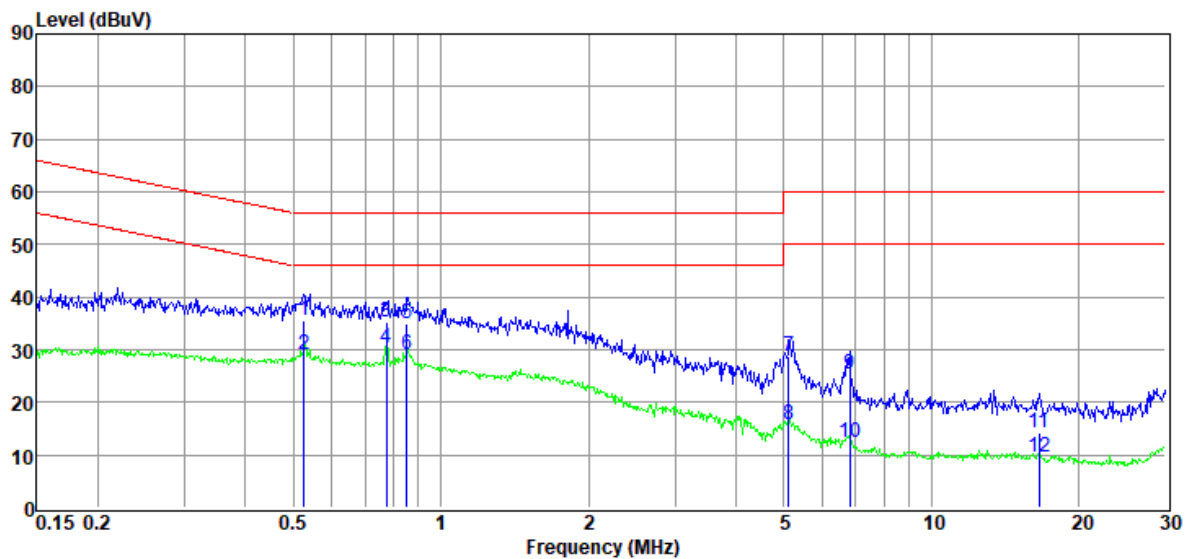


Data: 6

Item	Freq.	Read Level	LISN Factor	Cabl e Loss	Pulse Limite r Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.53	15.80	9.48	0.10	10.33	35.71	56.00	20.29	QP	NEUTRAL
2	0.53	9.22	9.48	0.10	10.33	29.13	46.00	16.87	Average	NEUTRAL
3	0.78	15.30	9.48	0.14	10.37	35.29	56.00	20.71	QP	NEUTRAL
4	0.78	10.40	9.48	0.14	10.37	30.39	46.00	15.61	Average	NEUTRAL
5	0.85	15.02	9.48	0.15	10.38	35.03	56.00	20.97	QP	NEUTRAL
6	0.85	9.17	9.48	0.15	10.38	29.18	46.00	16.82	Average	NEUTRAL
7	5.11	8.68	9.54	0.24	10.26	28.72	60.00	31.28	QP	NEUTRAL
8	5.11	-4.17	9.54	0.24	10.26	15.87	50.00	34.13	Average	NEUTRAL
9	6.81	5.27	9.57	0.25	10.21	25.30	60.00	34.70	QP	NEUTRAL
10	6.81	-7.72	9.57	0.25	10.21	12.31	50.00	37.69	Average	NEUTRAL
11	16.57	-6.12	9.85	0.33	10.24	14.30	60.00	45.70	QP	NEUTRAL
12	16.57	-10.78	9.85	0.33	10.24	9.64	50.00	40.36	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25080710-4E\0912 CE.EM6
Test Date	: 2025-09-12	Tested By : Li Xiongbin
EUT	: Dreame Indoor Cam 2K	Model Number : A121
Power Supply	: AC 120V/60Hz	Test Mode : 2.4G WIFI Mode
Condition	: Temp:22.3°C,Humi:51.5%	LISN : 2025 2# 216/LINE
Memo	: S25080710-008	

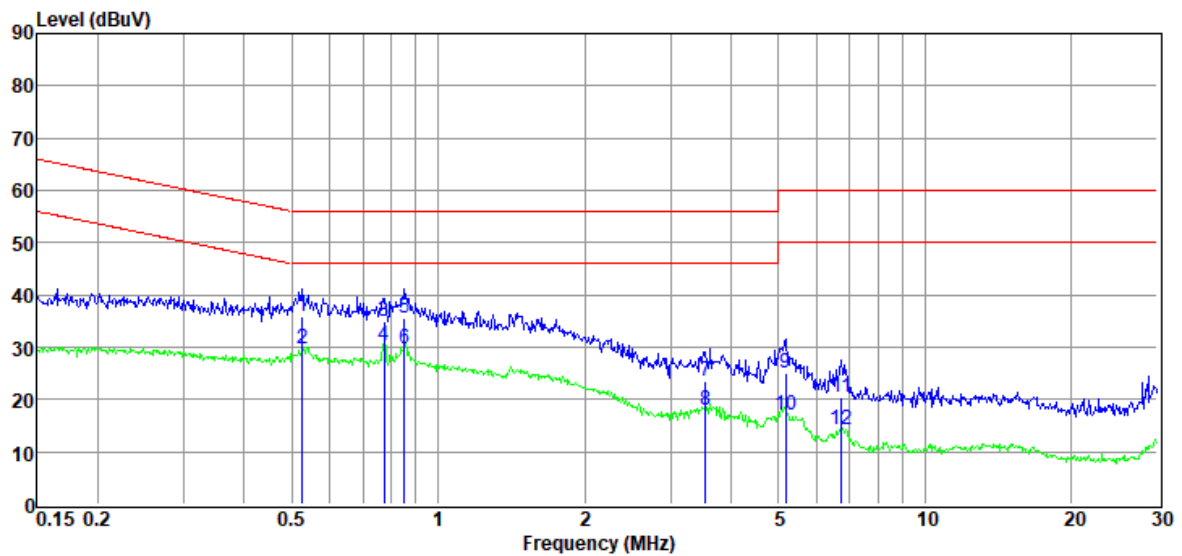

Data: 8

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.53	16.02	9.49	0.10	10.33	35.94	56.00	20.06	QP	LINE
2	0.53	9.77	9.49	0.10	10.33	29.69	46.00	16.31	Average	LINE
3	0.78	14.96	9.51	0.14	10.37	34.98	56.00	21.02	QP	LINE
4	0.78	10.29	9.51	0.14	10.37	30.31	46.00	15.69	Average	LINE
5	0.85	15.63	9.51	0.15	10.38	35.67	56.00	20.33	QP	LINE
6	0.85	9.76	9.51	0.15	10.38	29.80	46.00	16.20	Average	LINE
7	3.55	3.30	9.53	0.23	10.31	23.37	56.00	32.63	QP	LINE
8	3.55	-2.25	9.53	0.23	10.31	17.82	46.00	28.18	Average	LINE
9	5.17	5.00	9.54	0.24	10.25	25.03	60.00	34.97	QP	LINE
10	5.17	-3.13	9.54	0.24	10.25	16.90	50.00	33.10	Average	LINE
11	6.73	0.31	9.55	0.25	10.21	20.32	60.00	39.68	QP	LINE
12	6.73	-5.69	9.55	0.25	10.21	14.32	50.00	35.68	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.