



11N40SISO_Ant1_5710

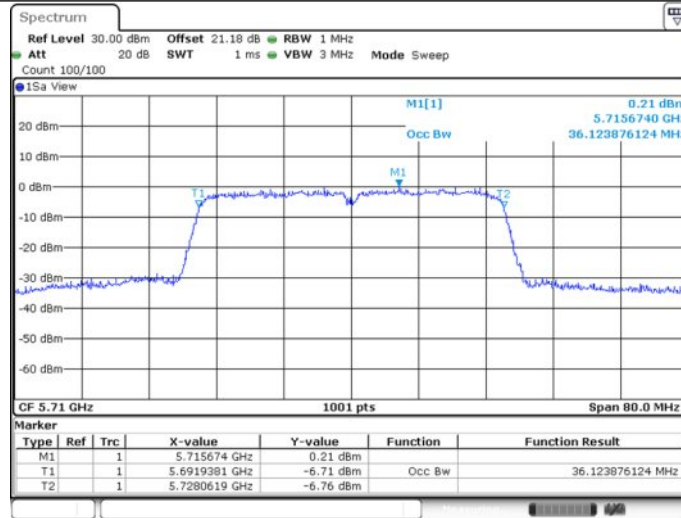


Date: 15.AUG.2025 02:52:53

11N40SISO_Ant1_5755

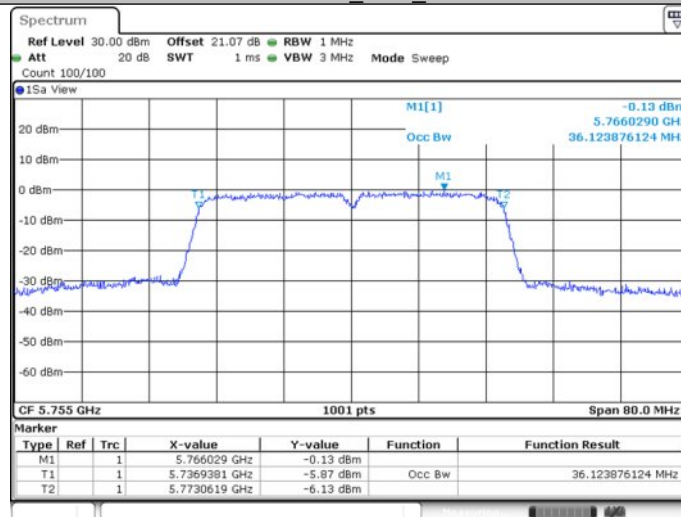

Date: 15.AUG.2025 02:57:03

11N40SISO_Ant1_5795

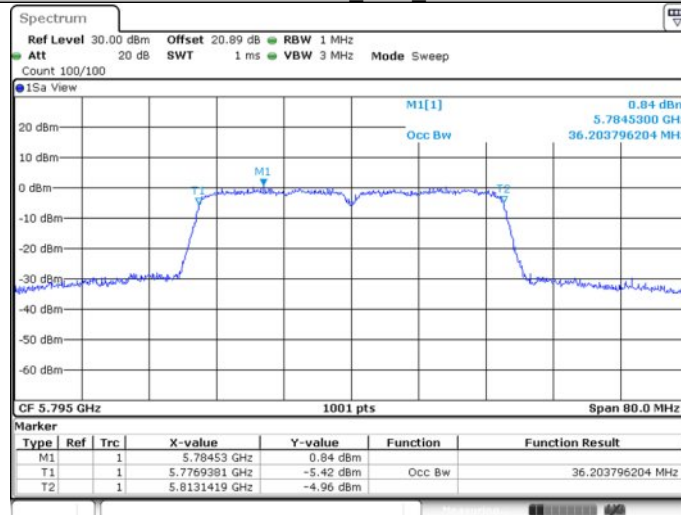


Date: 15.AUG.2025 03:01:06

Appendix A.5: Test Results of 6dB Bandwidth


Test Result

Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.00	5737.00	5753.00	0.5	PASS
		5785	15.68	5777.20	5792.88	0.5	PASS
		5825	15.64	5817.20	5832.84	0.5	PASS
11N20SISO	Ant1	5745	16.56	5736.68	5753.24	0.5	PASS
		5785	15.72	5776.96	5792.68	0.5	PASS
		5825	15.92	5816.96	5832.88	0.5	PASS
11N40SISO	Ant1	5755	35.76	5737.08	5772.84	0.5	PASS
		5795	36.24	5776.92	5813.16	0.5	PASS

Test Graphs

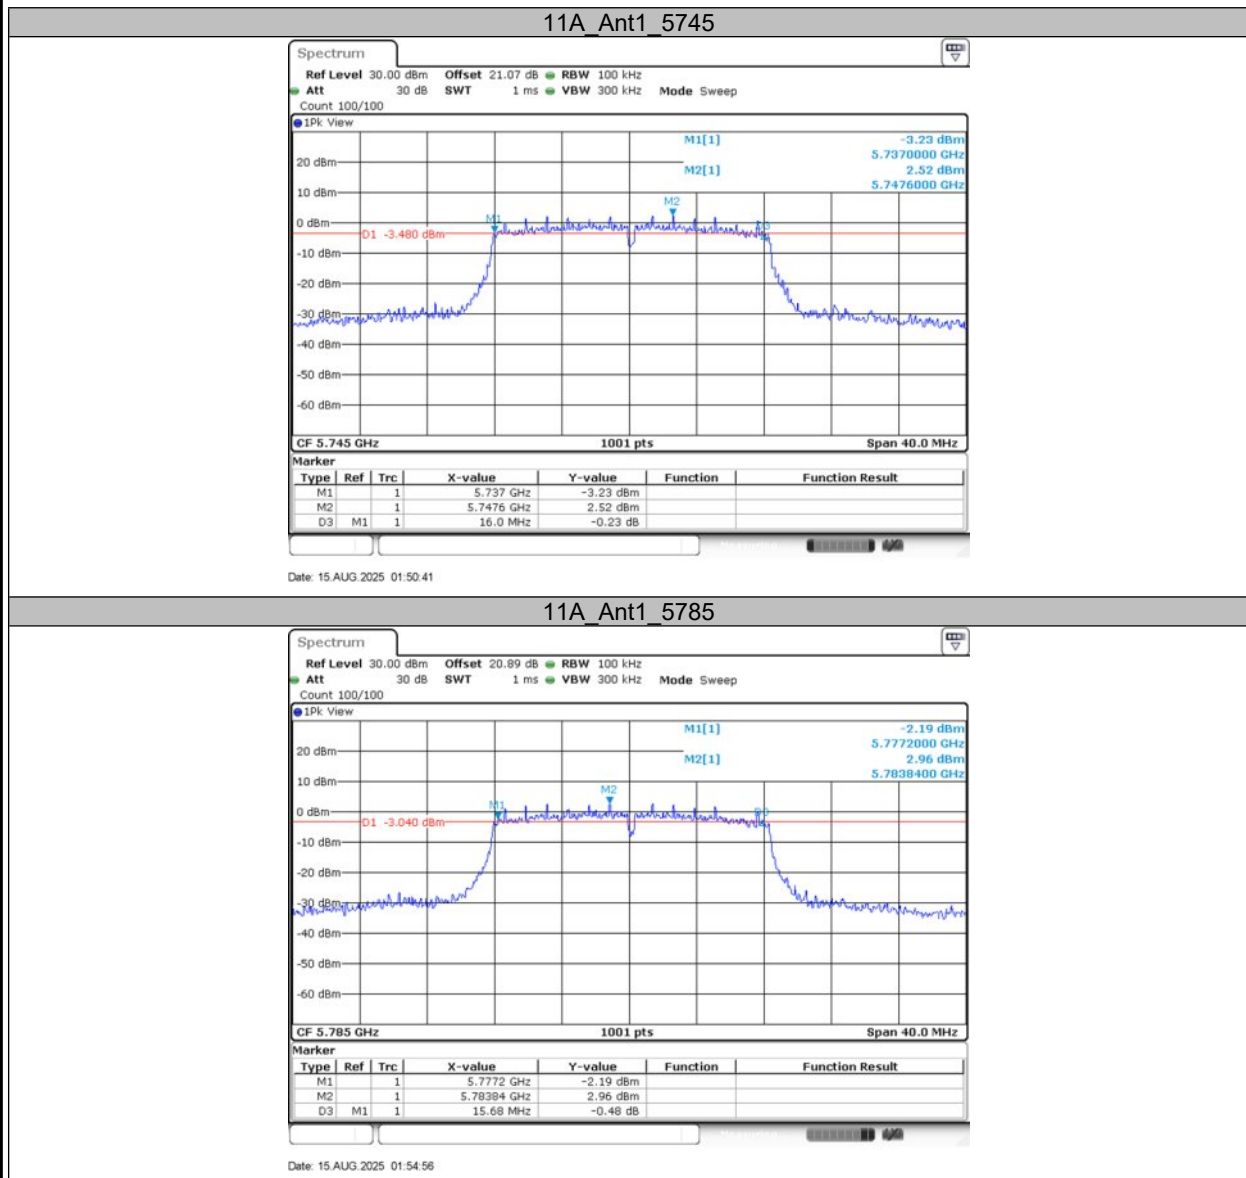


11A_Ant1_5825

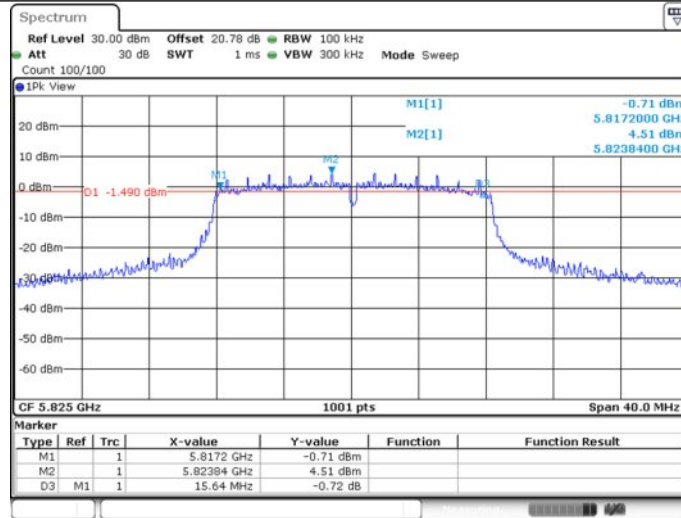


Date: 15.AUG.2025 01:59:55

11N20SISO_Ant1_5745

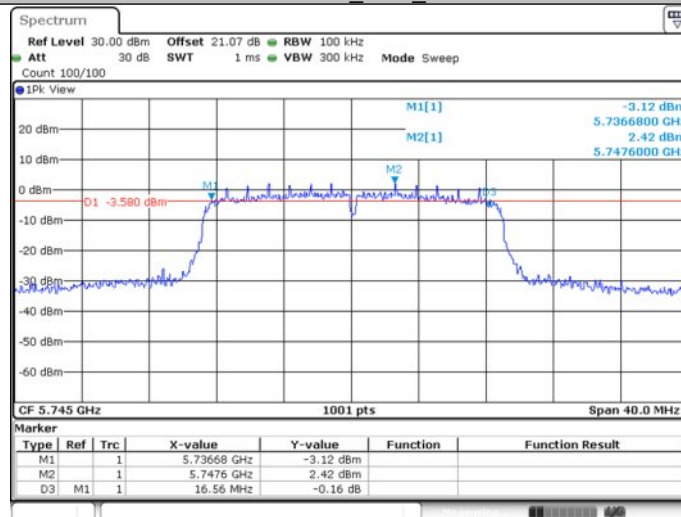


Date: 15.AUG.2025 02:19:01

11N20SISO_Ant1_5785

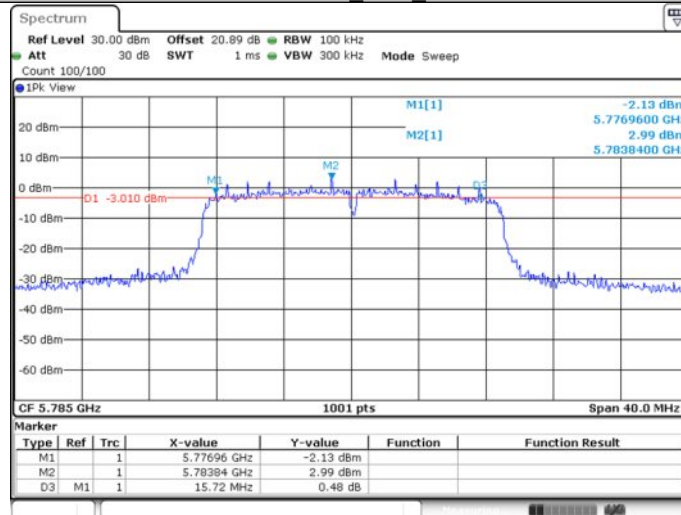


Date: 15.AUG.2025 02:20:21

11N20SISO Ant1 5825

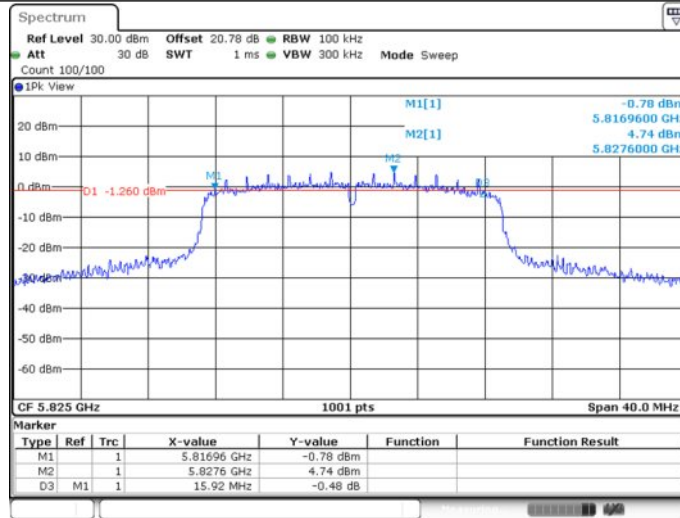


Date: 15.AUG.2025 02:21:57

11N40SISO Ant1 5755

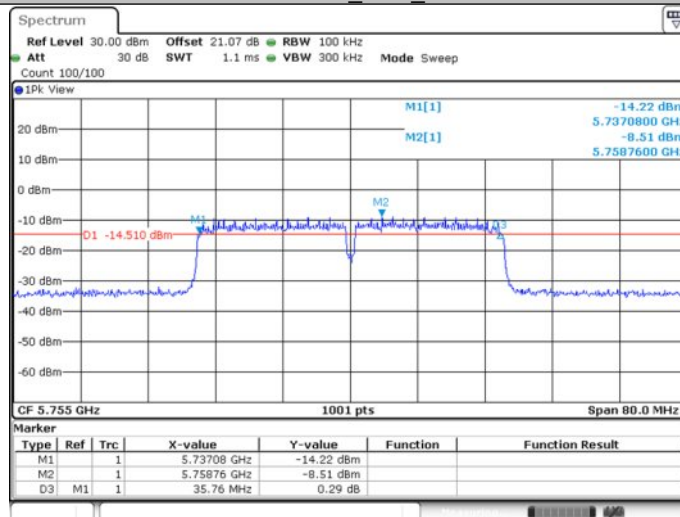

Date: 15.AUG.2025 02:56:49

11N40SISO Ant1 5795

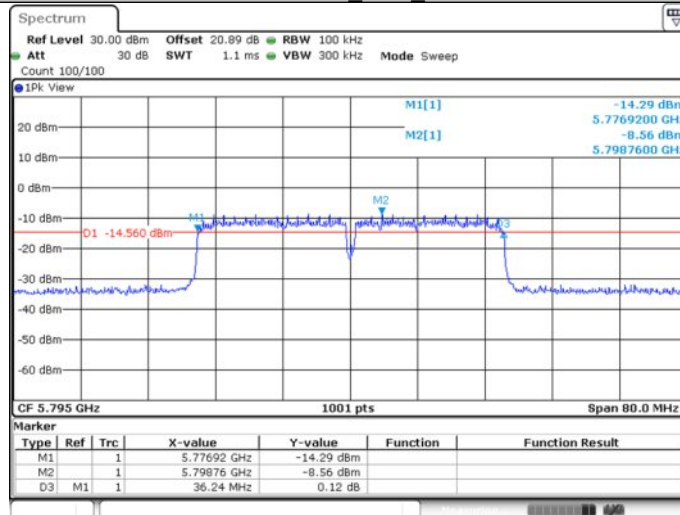

Date: 15.AUG.2025 03:00:53


Appendix A.6: Test Results of Duty Cycle

Test Result


Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5180	1.38	1.42	97.18
		5200	1.37	1.41	97.16
		5240	1.38	1.42	97.18
		5260	1.38	1.42	97.18
		5280	1.38	1.42	97.18
		5320	1.38	1.42	97.18
		5500	1.38	1.42	97.18
		5580	1.37	1.41	97.16
		5700	1.38	1.42	97.18
		5720	1.38	1.42	97.18
		5745	1.38	1.42	97.18
		5785	1.37	1.41	97.16
11N20SISO	Ant1	5825	1.37	1.41	97.16
		5180	1.29	1.33	96.99
		5200	1.29	1.33	96.99
		5240	1.29	1.33	96.99
		5260	1.29	1.33	96.99
		5280	1.29	1.33	96.99
		5320	1.29	1.33	96.99
		5500	1.29	1.33	96.99
		5580	1.29	1.33	96.99
		5700	1.29	1.33	96.99
		5720	1.29	1.33	96.99
		5745	1.29	1.33	96.99
11N40SISO	Ant1	5785	1.29	1.33	96.99
		5825	1.29	1.33	96.99
		5190	0.64	0.69	92.75
		5230	0.64	0.68	94.12
		5270	0.64	0.68	94.12
		5310	0.64	0.68	94.12
		5510	0.64	0.69	92.75
		5550	0.64	0.69	92.75
		5670	0.64	0.69	92.75
		5710	0.64	0.68	94.12
		5755	0.64	0.68	94.12
		5795	0.64	0.68	94.12

Test Graphs


11A_Ant1_5180

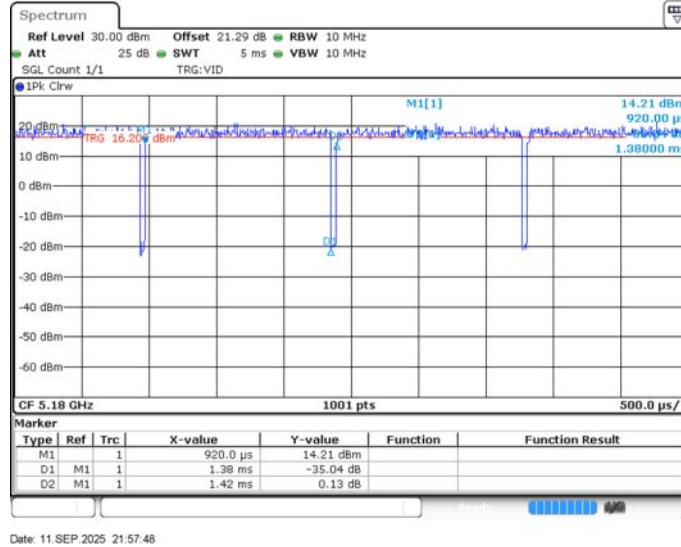


11A_Ant1_5200

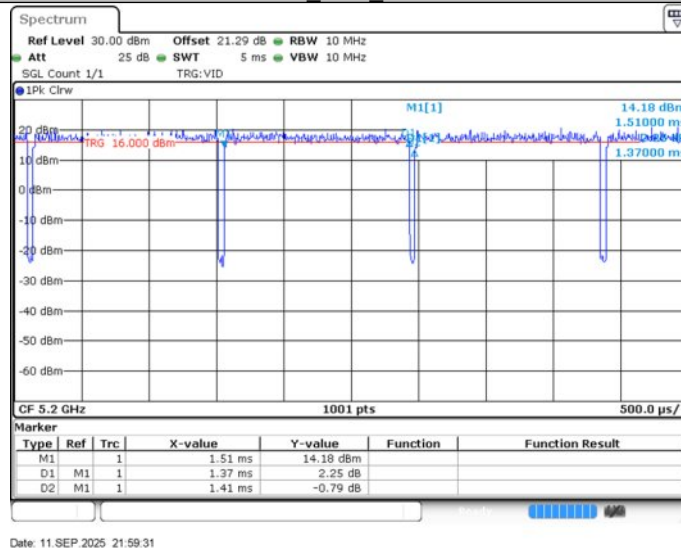

11A_Ant1_5240

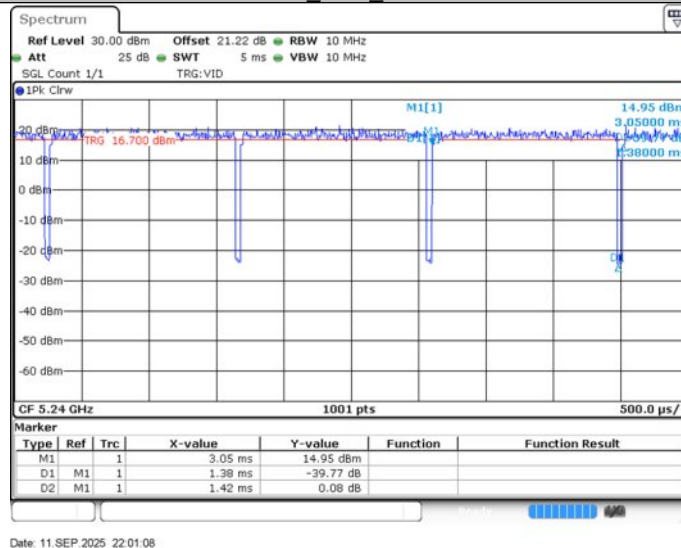


11A_Ant1_5260

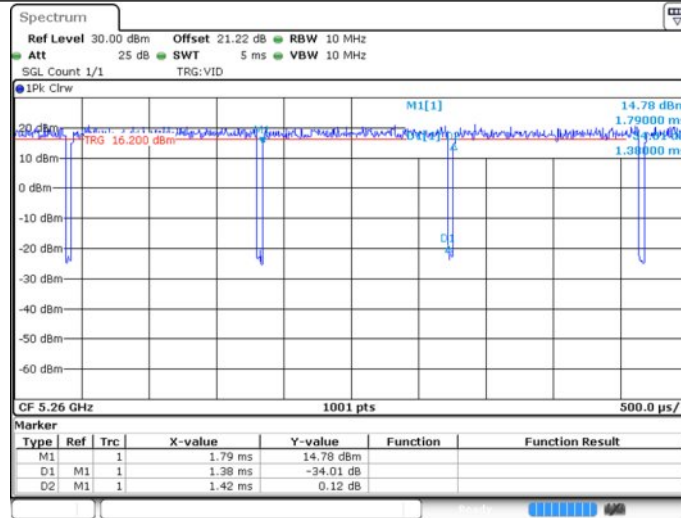


Date: 11.SEP.2025 22:02:48

11A_Ant1_5280

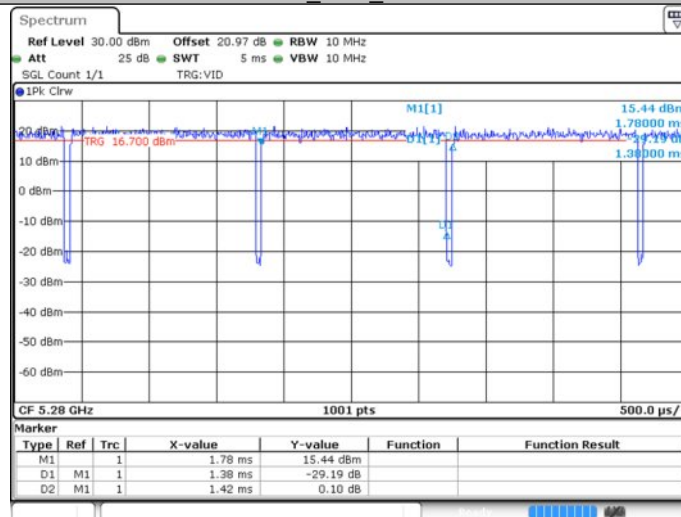


Date: 11.SEP.2025 22:04:27

11A_Ant1_5320

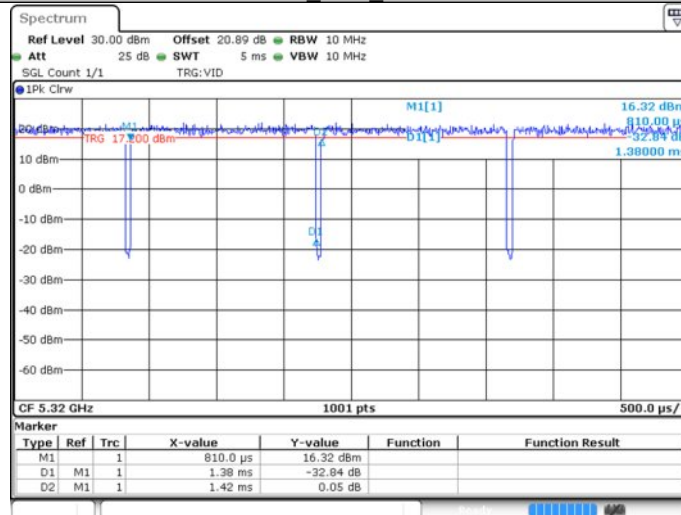


Date: 11.SEP.2025 22:06:03

11A_Ant1_5500

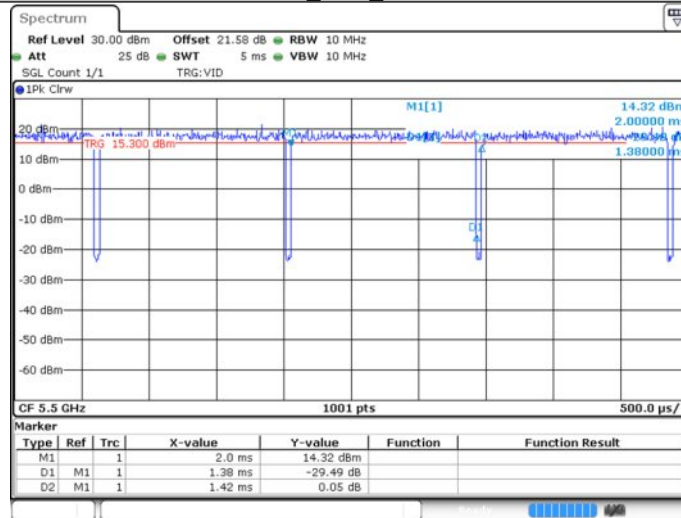


Date: 11.SEP.2025 22:07:42

11A_Ant1_5580

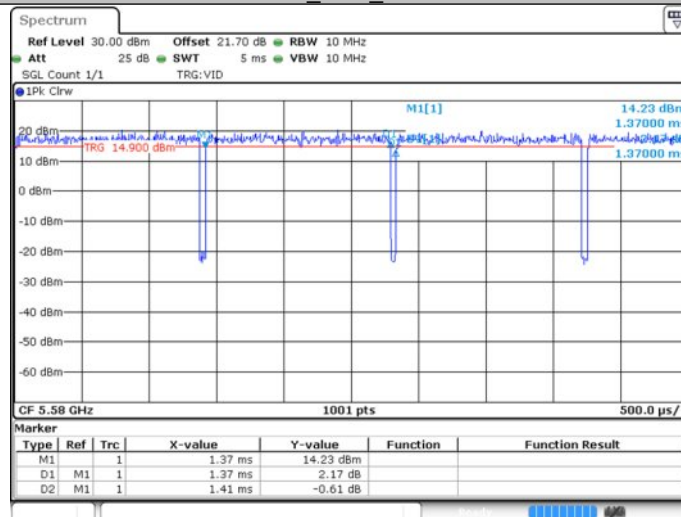


Date: 11.SEP.2025 22:09:19

11A_Ant1_5700

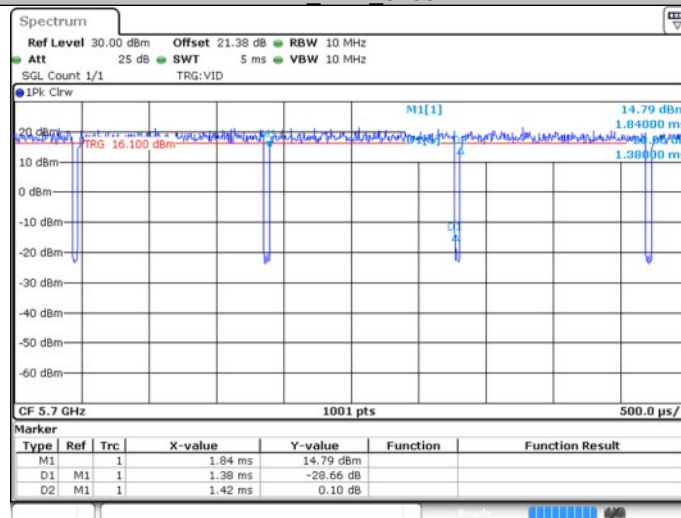


Date: 11.SEP.2025 22:10:53

11A_Ant1_5720

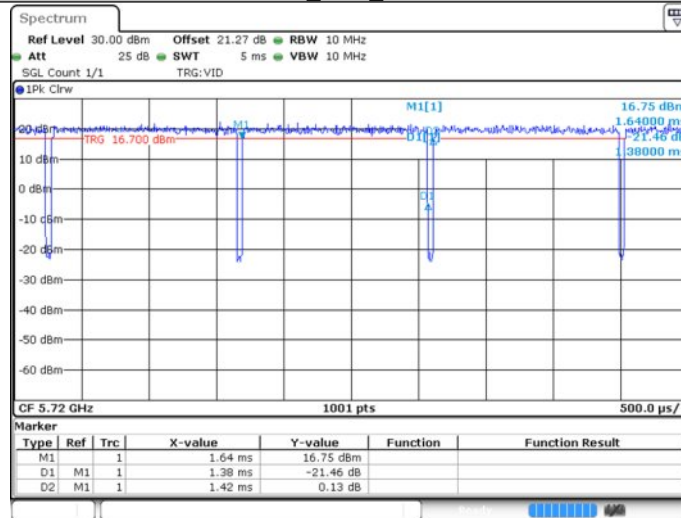


Date: 11 SEP 2025 22:12:28

11A_Ant1_5745

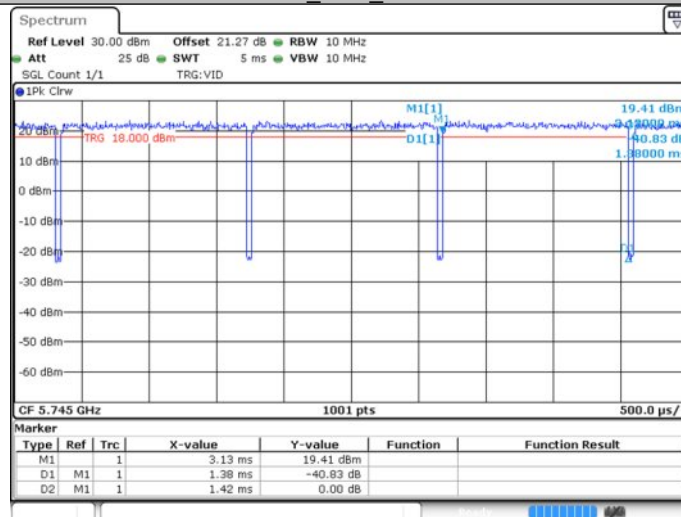


Date: 12 SEP 2025 08:55:15

11A_Ant1_5785

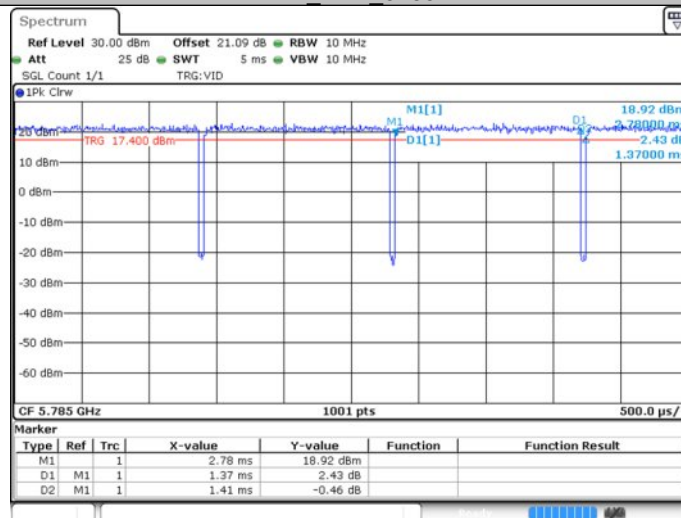


Date: 12 SEP 2025 08:57:30

11A_Ant1_5825

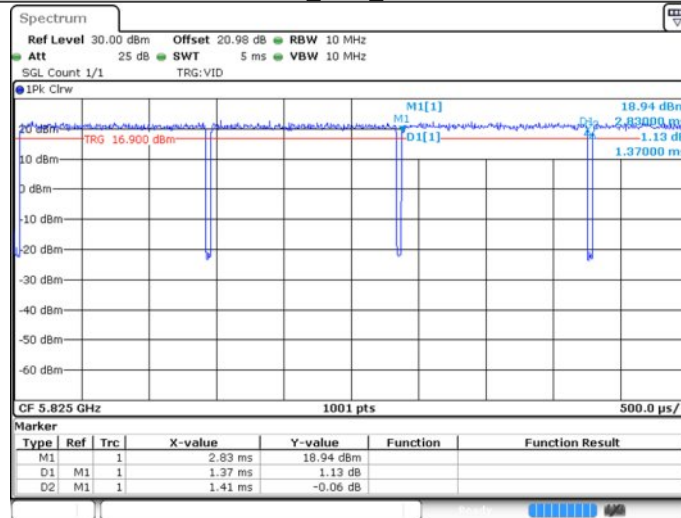


Date: 12 SEP 2025 08:59:17

11N20SISO_Ant1_5180

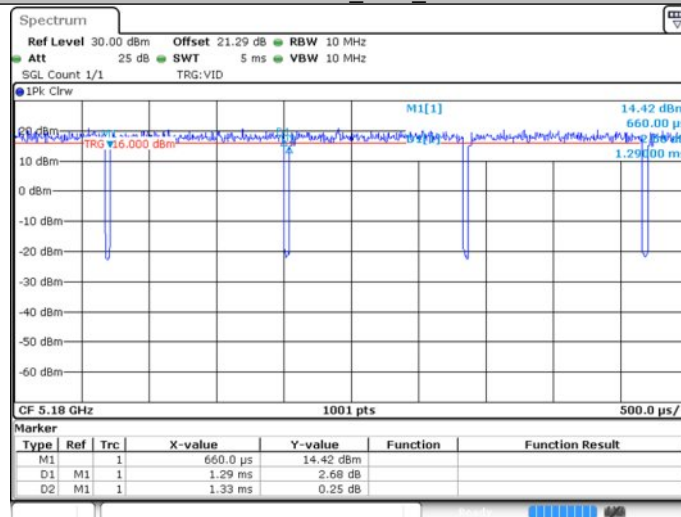


Date: 12 SEP 2025 09:05:22

11N20SISO_Ant1_5200

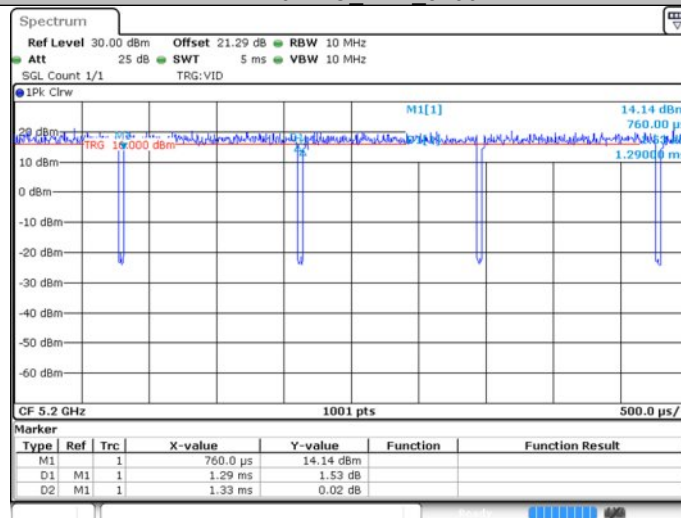


Date: 12 SEP 2025 09:07:11

11N20SISO_Ant1_5240

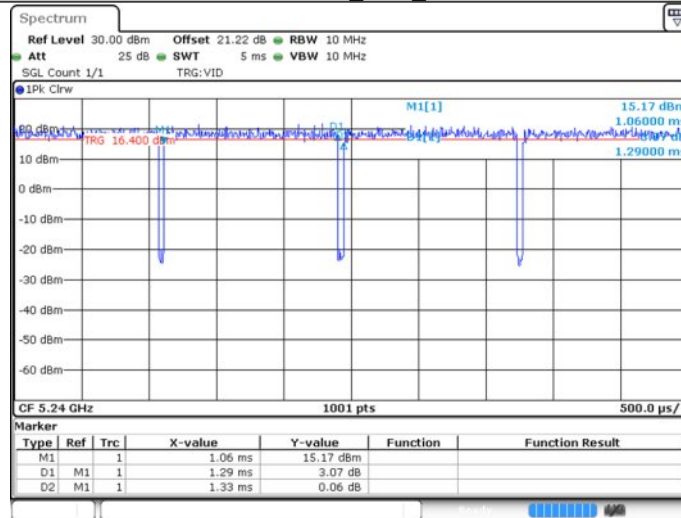


Date: 12 SEP 2025 09:08:51

11N20SISO_Ant1_5260

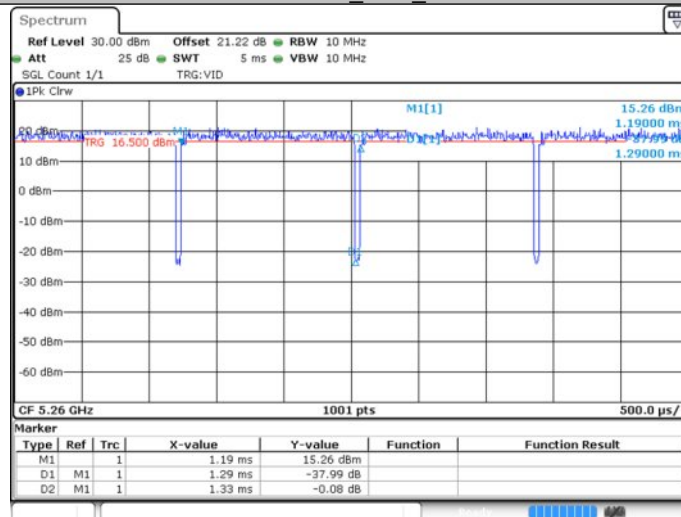


Date: 12 SEP 2025 09:10:44

11N20SISO_Ant1_5280

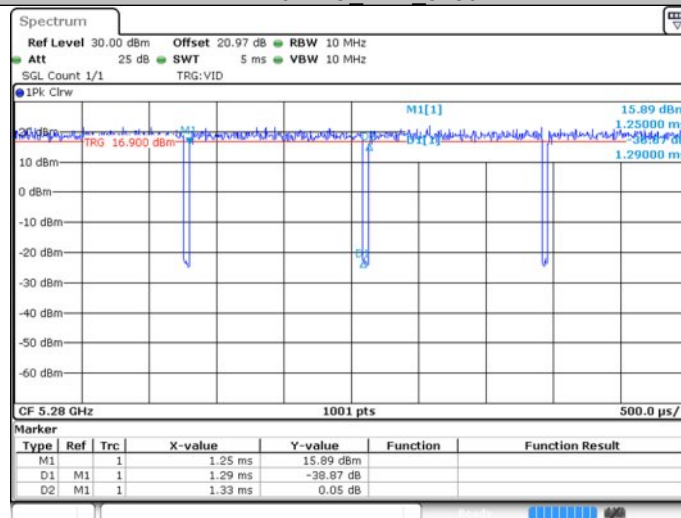


Date: 12 SEP 2025 09:12:24

11N20SISO_Ant1_5320

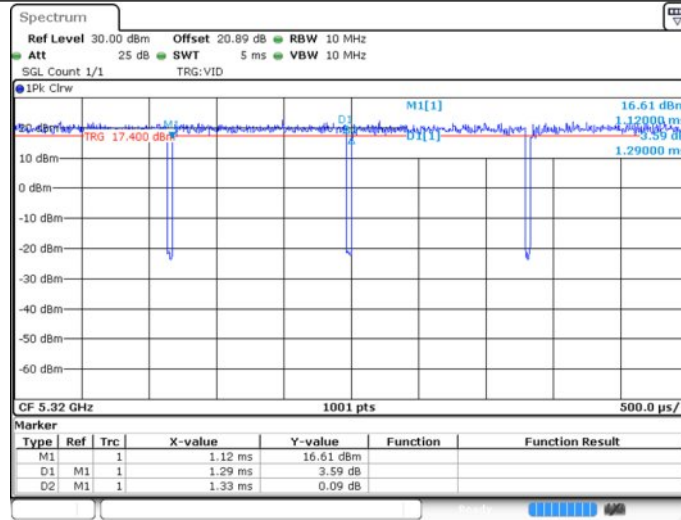


Date: 12 SEP 2025 09:14:07

11N20SISO_Ant1_5500

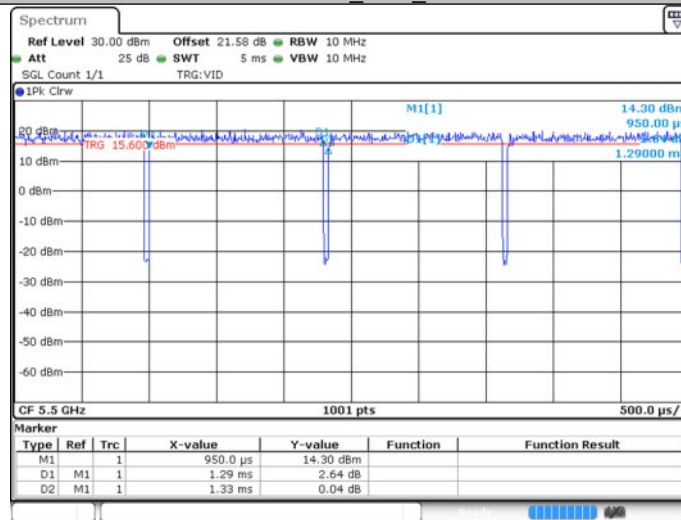


Date: 12 SEP 2025 09:15:53

11N20SISO_Ant1_5580

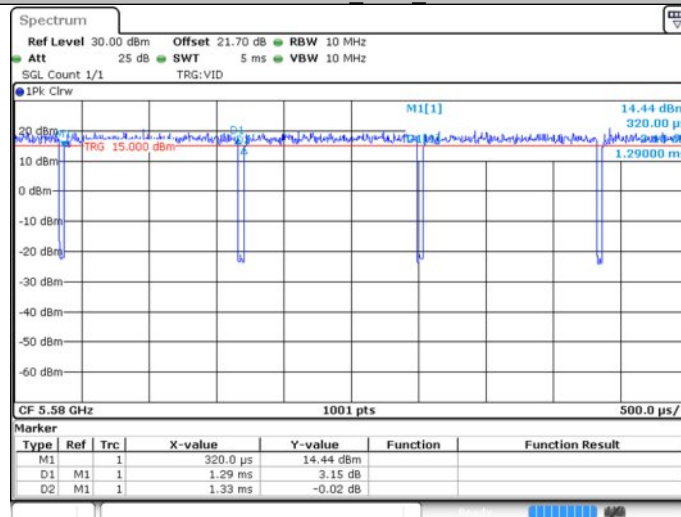


Date: 12 SEP 2025 09:17:56

11N20SISO_Ant1_5700

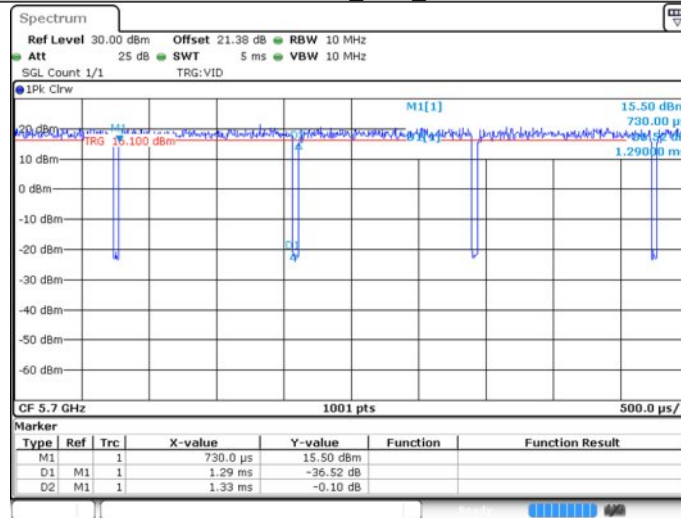


Date: 12 SEP 2025 09:19:35

11N20SISO_Ant1_5720

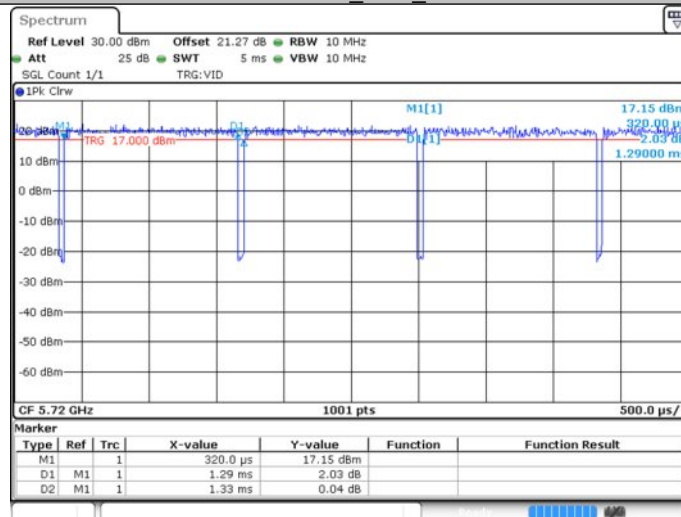


Date: 12 SEP 2025 09:21:50

11N20SISO_Ant1_5745

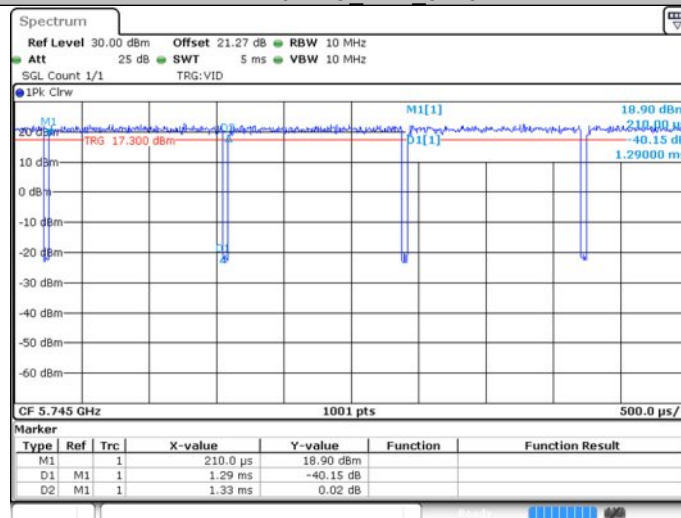


Date: 12 SEP 2025 09:26:39

11N20SISO_Ant1_5785

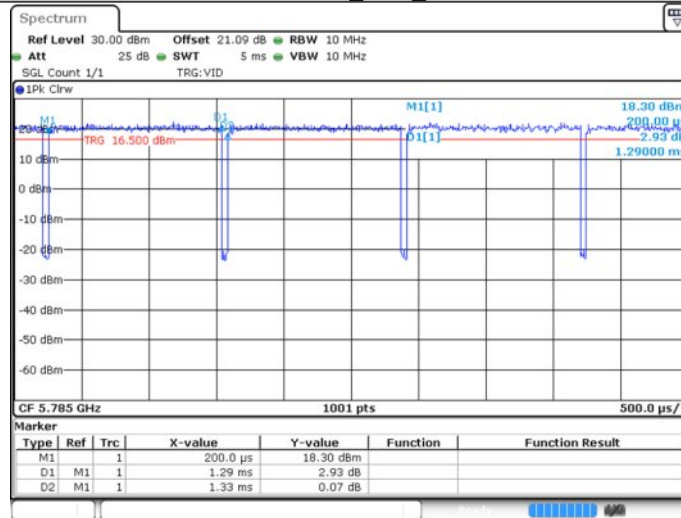


Date: 12 SEP 2025 09:29:26

11N20SISO_Ant1_5825

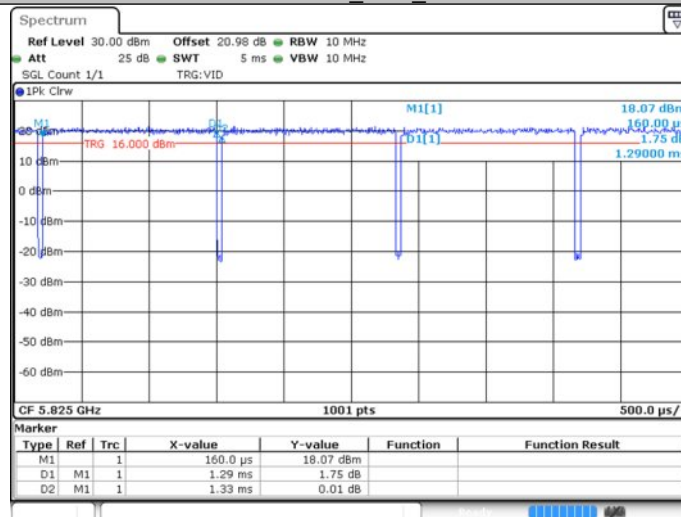


Date: 12 SEP 2025 09:31:21

11N40SISO_Ant1_5190

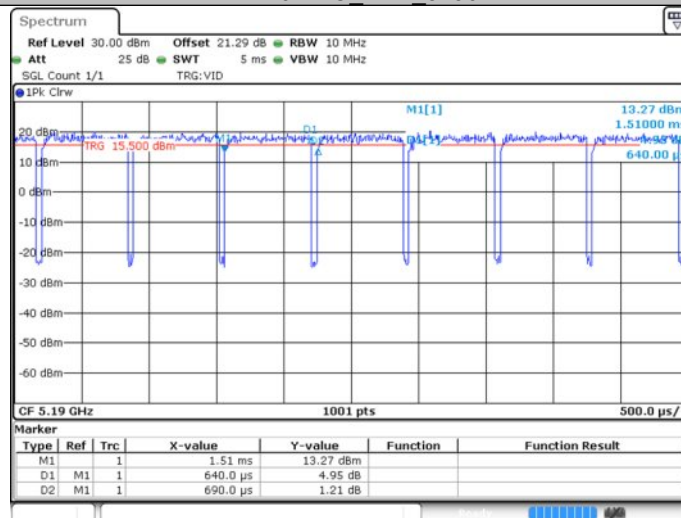


Date: 12 SEP 2025 09:33:09

11N40SISO_Ant1_5230

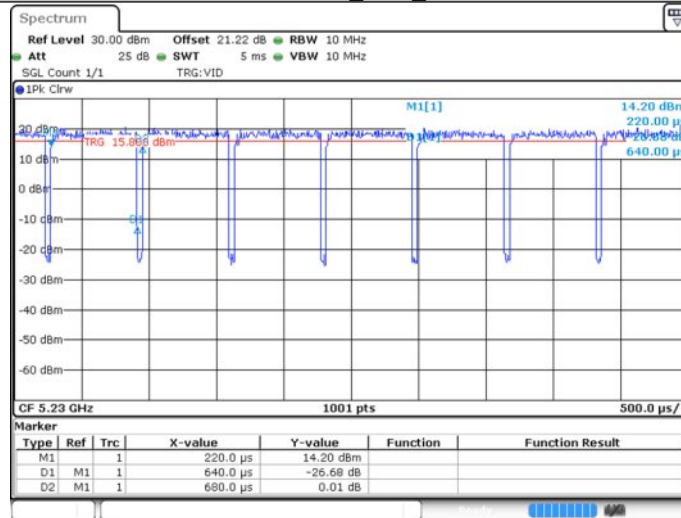


Date: 12 SEP 2025 09:34:50

11N40SISO_Ant1_5270

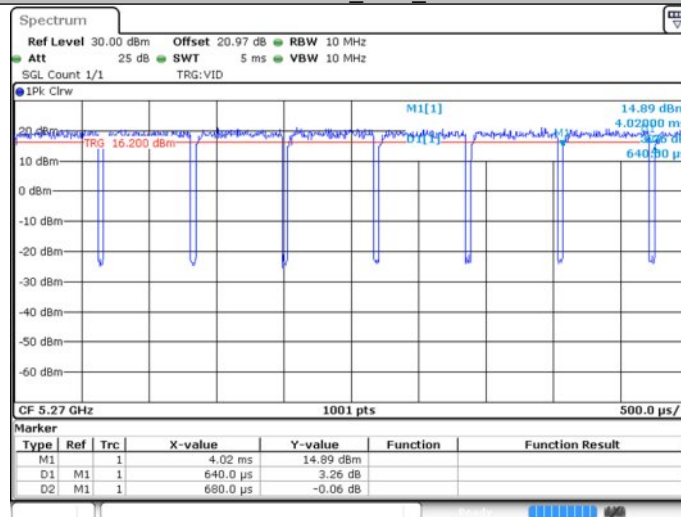


Date: 12 SEP 2025 09:37:00

11N40SISO_Ant1_5310

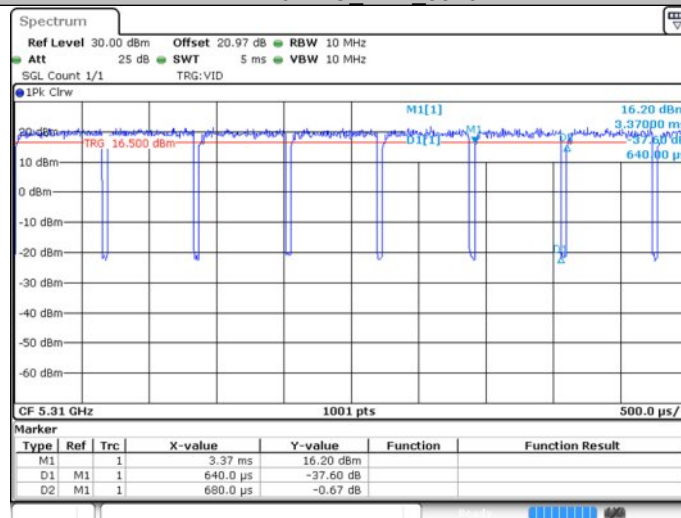


Date: 12 SEP 2025 09:39:37

11N40SISO_Ant1_5510

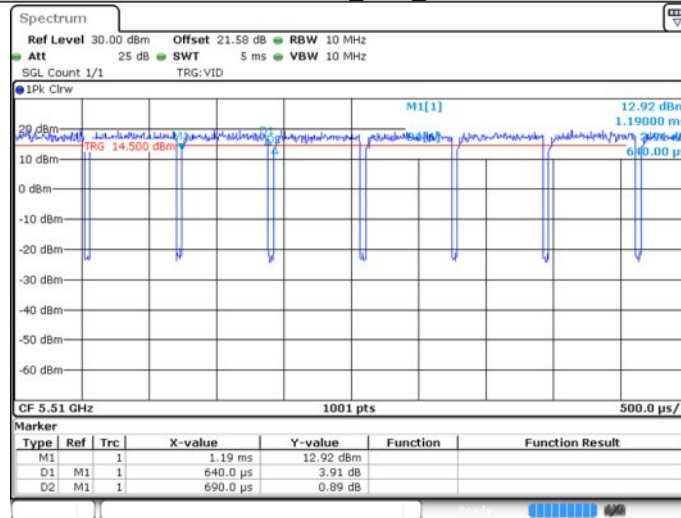


Date: 12 SEP 2025 09:41:26

11N40SISO_Ant1_5550

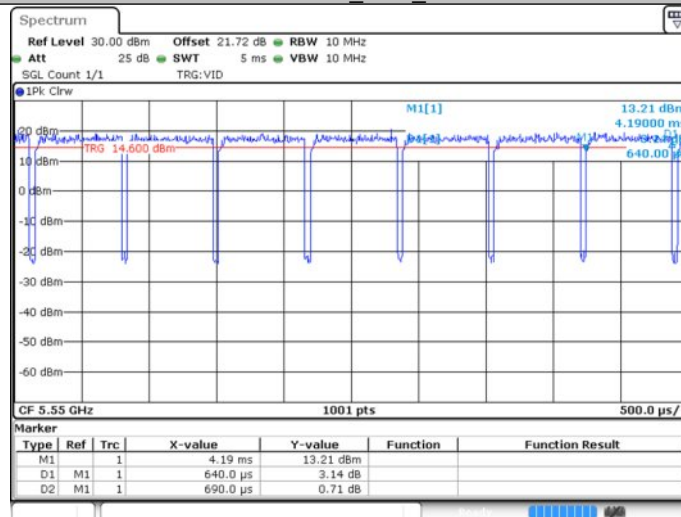


Date: 12 SEP 2025 09:43:06

11N40SISO_Ant1_5670

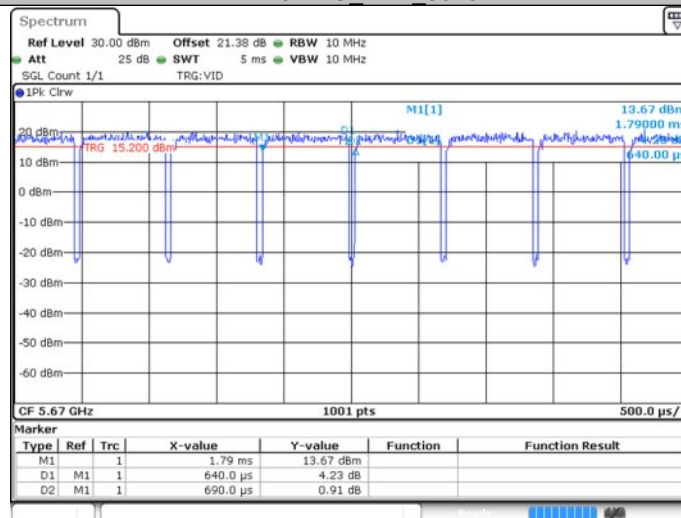


Date: 12 SEP 2025 09:44:59

11N40SISO_Ant1_5710

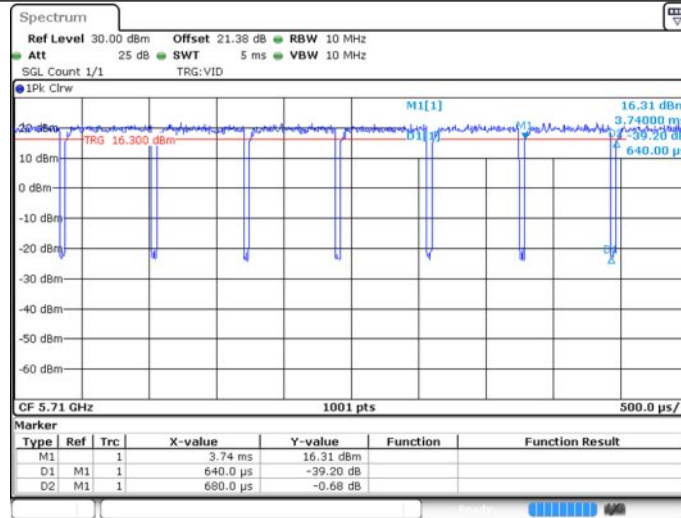


Date: 12 SEP 2025 09:48:49

11N40SISO_Ant1_5755

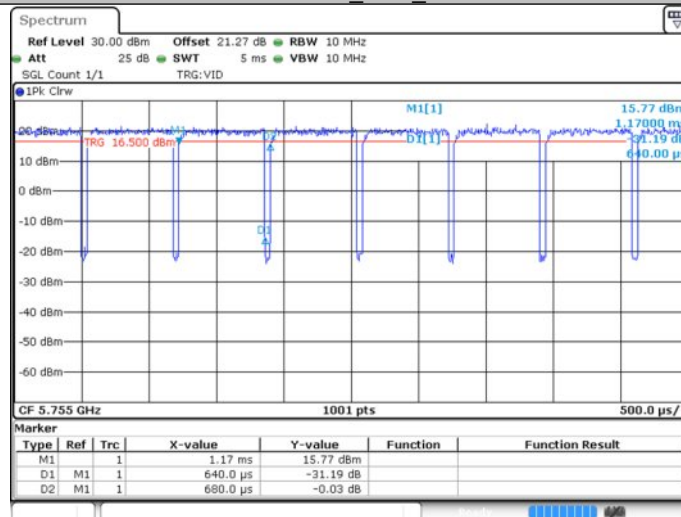

Date: 12 SEP 2025 09:50:36

11N40SISO_Ant1_5795

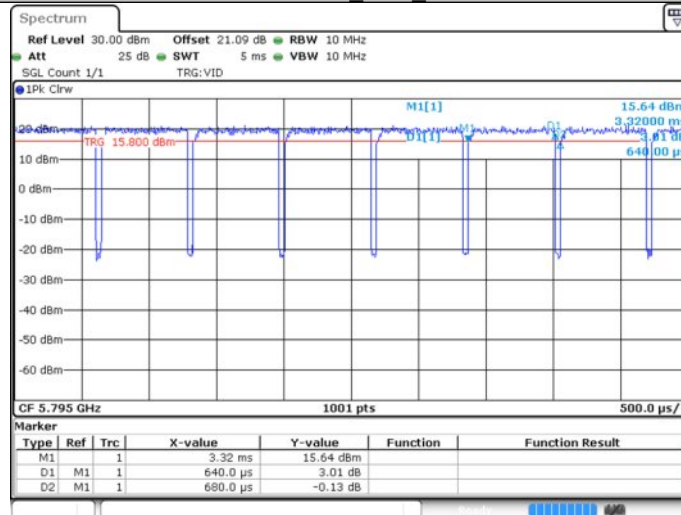

Date: 12 SEP 2025 09:52:27

Appendix A.7: Test Results of Frequency Stability

Test Result

Test Mode	Antenna	Frequency[MHz]	Voltage		Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
			Voltage [Vdc]	Temperature (°C)				
11A	Ant1	5180	NV	NT	20000.00	3.861004	20	PASS
			LV	NT	20000.00	3.861004	20	PASS
			HV	NT	40000.00	7.722008	20	PASS
		5200	NV	NT	40000.00	7.692308	20	PASS
			LV	NT	60000.00	11.538462	20	PASS
			HV	NT	60000.00	11.538462	20	PASS
		5240	NV	NT	60000.00	11.450382	20	PASS
			LV	NT	40000.00	7.633588	20	PASS
			HV	NT	60000.00	11.450382	20	PASS
		5260	NV	NT	60000.00	11.406844	20	PASS
			LV	NT	60000.00	11.406844	20	PASS
			HV	NT	40000.00	7.604563	20	PASS
		5280	NV	NT	60000.00	11.363636	20	PASS
			LV	NT	80000.00	15.151515	20	PASS
			HV	NT	80000.00	15.151515	20	PASS
		5320	NV	NT	60000.00	11.278195	20	PASS
			LV	NT	60000.00	11.278195	20	PASS
			HV	NT	60000.00	11.278195	20	PASS
		5500	NV	NT	60000.00	10.909091	20	PASS
			LV	NT	80000.00	14.545455	20	PASS
			HV	NT	80000.00	14.545455	20	PASS
		5580	NV	NT	100000.00	17.921147	20	PASS
			LV	NT	100000.00	17.921147	20	PASS
			HV	NT	100000.00	17.921147	20	PASS
		5700	NV	NT	100000.00	17.543860	20	PASS
			LV	NT	100000.00	17.543860	20	PASS
			HV	NT	80000.00	14.035088	20	PASS
		5720	NV	NT	100000.00	17.482517	20	PASS
			LV	NT	100000.00	17.482517	20	PASS
			HV	NT	100000.00	17.482517	20	PASS
		5745	NV	NT	100000.00	17.406440	20	PASS
			LV	NT	100000.00	17.406440	20	PASS
			HV	NT	100000.00	17.406440	20	PASS
		5785	NV	NT	100000.00	17.286085	20	PASS
			LV	NT	100000.00	17.286085	20	PASS
			HV	NT	100000.00	17.286085	20	PASS
		5825	NV	NT	100000.00	17.167382	20	PASS
			LV	NT	100000.00	17.167382	20	PASS
			HV	NT	100000.00	17.167382	20	PASS
11N40SISO	Ant1	5190	NV	NT	40000.00	7.707129	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	40000.00	7.707129	20	PASS
		5230	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5270	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5310	NV	NT	0.00	0.000000	20	PASS
			LV	NT	-40000.00	-7.532957	20	PASS
			HV	NT	-40000.00	-7.532957	20	PASS
		5510	NV	NT	-40000.00	-7.259528	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5550	NV	NT	0.00	0.000000	20	PASS
			LV	NT	-40000.00	-7.207207	20	PASS

		5670	HV	NT	0.00	0.000000	20	PASS
			NV	NT	-40000.00	-7.054674	20	PASS
			LV	NT	-40000.00	-7.054674	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5710	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5755	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5795	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS

Temperature								
Test Mode	Antenna	Frequency[MHz]	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	-20	40000.00	7.722008	20	PASS
			NV	-10	60000.00	11.583012	20	PASS
			NV	0	60000.00	11.583012	20	PASS
			NV	10	60000.00	11.583012	20	PASS
			NV	20	40000.00	7.722008	20	PASS
			NV	30	20000.00	3.861004	20	PASS
			NV	40	40000.00	7.722008	20	PASS
			NV	50	60000.00	11.583012	20	PASS
		5200	NV	-20	60000.00	11.538462	20	PASS
			NV	-10	60000.00	11.538462	20	PASS
			NV	0	60000.00	11.538462	20	PASS
			NV	10	60000.00	11.538462	20	PASS
			NV	20	60000.00	11.538462	20	PASS
			NV	30	60000.00	11.538462	20	PASS
			NV	40	60000.00	11.538462	20	PASS
			NV	50	60000.00	11.538462	20	PASS
		5240	NV	-20	80000.00	15.267176	20	PASS
			NV	-10	60000.00	11.450382	20	PASS
			NV	0	60000.00	11.450382	20	PASS
			NV	10	80000.00	15.267176	20	PASS
			NV	20	60000.00	11.450382	20	PASS
			NV	30	80000.00	15.267176	20	PASS
			NV	40	80000.00	15.267176	20	PASS
			NV	50	60000.00	11.450382	20	PASS
		5260	NV	-20	60000.00	11.406844	20	PASS
			NV	-10	60000.00	11.406844	20	PASS
			NV	0	60000.00	11.406844	20	PASS
			NV	10	60000.00	11.406844	20	PASS
			NV	20	60000.00	11.406844	20	PASS
			NV	30	60000.00	11.406844	20	PASS
			NV	40	60000.00	11.406844	20	PASS
			NV	50	60000.00	11.406844	20	PASS
		5280	NV	-20	80000.00	15.151515	20	PASS
			NV	-10	80000.00	15.151515	20	PASS
			NV	0	60000.00	11.363636	20	PASS
			NV	10	60000.00	11.363636	20	PASS
			NV	20	60000.00	11.363636	20	PASS
			NV	30	60000.00	11.363636	20	PASS
			NV	40	80000.00	15.151515	20	PASS
			NV	50	60000.00	11.363636	20	PASS
		5320	NV	-20	80000.00	15.037594	20	PASS
			NV	-10	60000.00	11.278195	20	PASS
			NV	0	80000.00	15.037594	20	PASS
			NV	10	100000.00	18.796992	20	PASS
			NV	20	100000.00	18.796992	20	PASS
			NV	30	80000.00	15.037594	20	PASS

Appendix A
CN25TN8C 003



Prüfbericht - Produkte
Test Report - Products

Page 61 of 127

			NV	40	80000.00	15.037594	20	PASS
			NV	50	100000.00	18.796992	20	PASS
		5500	NV	-20	80000.00	14.545455	20	PASS
			NV	-10	80000.00	14.545455	20	PASS
			NV	0	80000.00	14.545455	20	PASS
			NV	10	100000.00	18.181818	20	PASS
			NV	20	100000.00	18.181818	20	PASS
			NV	30	80000.00	14.545455	20	PASS
			NV	40	80000.00	14.545455	20	PASS
			NV	50	80000.00	14.545455	20	PASS
		5580	NV	-20	100000.00	17.921147	20	PASS
			NV	-10	100000.00	17.921147	20	PASS
			NV	0	100000.00	17.921147	20	PASS
			NV	10	100000.00	17.921147	20	PASS
			NV	20	100000.00	17.921147	20	PASS
			NV	30	100000.00	17.921147	20	PASS
			NV	40	100000.00	17.921147	20	PASS
			NV	50	80000.00	14.336918	20	PASS
		5700	NV	-20	80000.00	14.035088	20	PASS
			NV	-10	100000.00	17.543860	20	PASS
			NV	0	100000.00	17.543860	20	PASS
			NV	10	100000.00	17.543860	20	PASS
			NV	20	100000.00	17.543860	20	PASS
			NV	30	100000.00	17.543860	20	PASS
			NV	40	100000.00	17.543860	20	PASS
			NV	50	100000.00	17.543860	20	PASS
		5720	NV	-20	100000.00	17.482517	20	PASS
			NV	-10	100000.00	17.482517	20	PASS
			NV	0	100000.00	17.482517	20	PASS
			NV	10	100000.00	17.482517	20	PASS
			NV	20	100000.00	17.482517	20	PASS
			NV	30	100000.00	17.482517	20	PASS
			NV	40	100000.00	17.482517	20	PASS
			NV	50	100000.00	17.482517	20	PASS
		5745	NV	-20	100000.00	17.406440	20	PASS
			NV	-10	100000.00	17.406440	20	PASS
			NV	0	100000.00	17.406440	20	PASS
			NV	10	100000.00	17.406440	20	PASS
			NV	20	100000.00	17.406440	20	PASS
			NV	30	100000.00	17.406440	20	PASS
			NV	40	100000.00	17.406440	20	PASS
			NV	50	100000.00	17.406440	20	PASS
		5785	NV	-20	100000.00	17.286085	20	PASS
			NV	-10	100000.00	17.286085	20	PASS
			NV	0	100000.00	17.286085	20	PASS
			NV	10	100000.00	17.286085	20	PASS
			NV	20	100000.00	17.286085	20	PASS
			NV	30	100000.00	17.286085	20	PASS
			NV	40	100000.00	17.286085	20	PASS
			NV	50	100000.00	17.286085	20	PASS
		5825	NV	-20	100000.00	17.167382	20	PASS
			NV	-10	100000.00	17.167382	20	PASS
			NV	0	100000.00	17.167382	20	PASS
			NV	10	100000.00	17.167382	20	PASS
			NV	20	100000.00	17.167382	20	PASS
			NV	30	100000.00	17.167382	20	PASS
			NV	40	100000.00	17.167382	20	PASS
			NV	50	100000.00	17.167382	20	PASS
11N40SISO	Ant1	5190	NV	-20	40000.00	7.707129	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	40000.00	7.707129	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS

			NV	30	40000.00	7.707129	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
		5230	NV	-20	0.00	0.000000	20	PASS
			NV	-10	-40000.00	-7.648184	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	-40000.00	-7.648184	20	PASS
		5270	NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	-40000.00	-7.590133	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	-40000.00	-7.590133	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	-80000.00	- 15.180266	20	PASS
		5310	NV	-20	0.00	0.000000	20	PASS
			NV	-10	-40000.00	-7.532957	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	-40000.00	-7.532957	20	PASS
			NV	30	-40000.00	-7.532957	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	-40000.00	-7.532957	20	PASS
		5510	NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
		5550	NV	50	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	-40000.00	-7.207207	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	-40000.00	-7.207207	20	PASS
		5670	NV	50	-40000.00	-7.207207	20	PASS
			NV	-20	-40000.00	-7.054674	20	PASS
			NV	-10	40000.00	7.054674	20	PASS
			NV	0	40000.00	7.054674	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	40000.00	7.054674	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	40000.00	7.054674	20	PASS
		5710	NV	50	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	-40000.00	-7.005254	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	-40000.00	-7.005254	20	PASS
			NV	40	0.00	0.000000	20	PASS
		5755	NV	50	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS

			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
		5795	NV	-20	0.00	0.000000	20	PASS
			NV	-10	-40000.00	-6.902502	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	40000.00	6.902502	20	PASS
			NV	50	0.00	0.000000	20	PASS


Appendix A.8: Test Results of Radiated Spurious Emissions

Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

Test Date: 2025-09-10 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 5G Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC BELOW1G\17
Memo: Sample Numble:S25080710-003

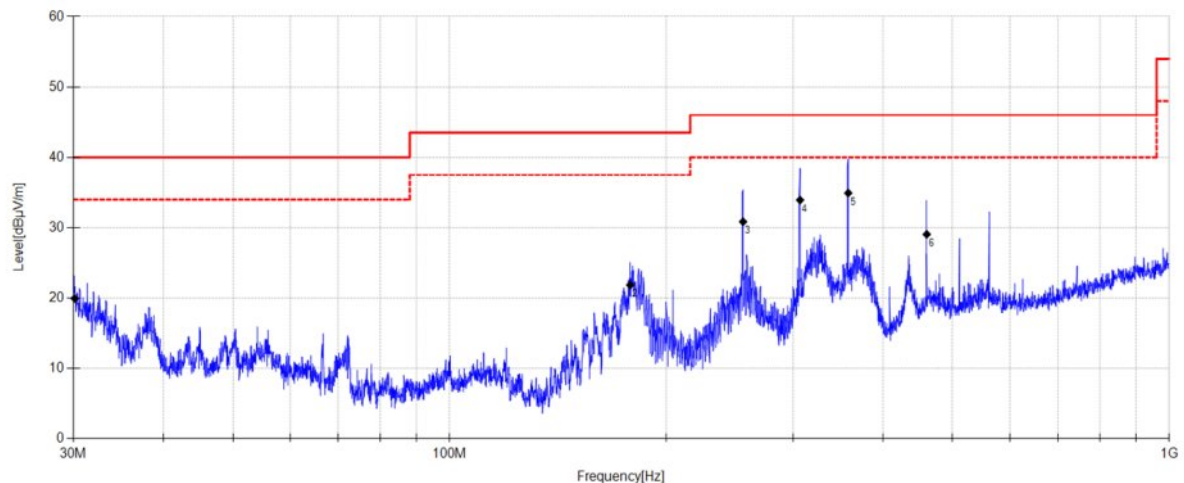


Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.126	38.06	10.47	3.72	19.95	40.00	20.05	QP	Horizontal
2	178.194	40.95	8.87	4.41	21.85	43.50	21.65	QP	Horizontal
3	255.693	46.21	12.20	4.84	30.85	46.00	15.15	QP	Horizontal
4	306.826	47.42	13.75	5.17	33.93	46.00	12.07	QP	Horizontal
5	358.002	46.87	15.14	5.38	34.93	46.00	11.07	QP	Horizontal
6	460.153	39.65	16.20	5.77	29.06	46.00	16.94	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date: 2025-09-10 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 5G Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC BELOW1G\18
Memo: Sample Numbel:S25080710-003

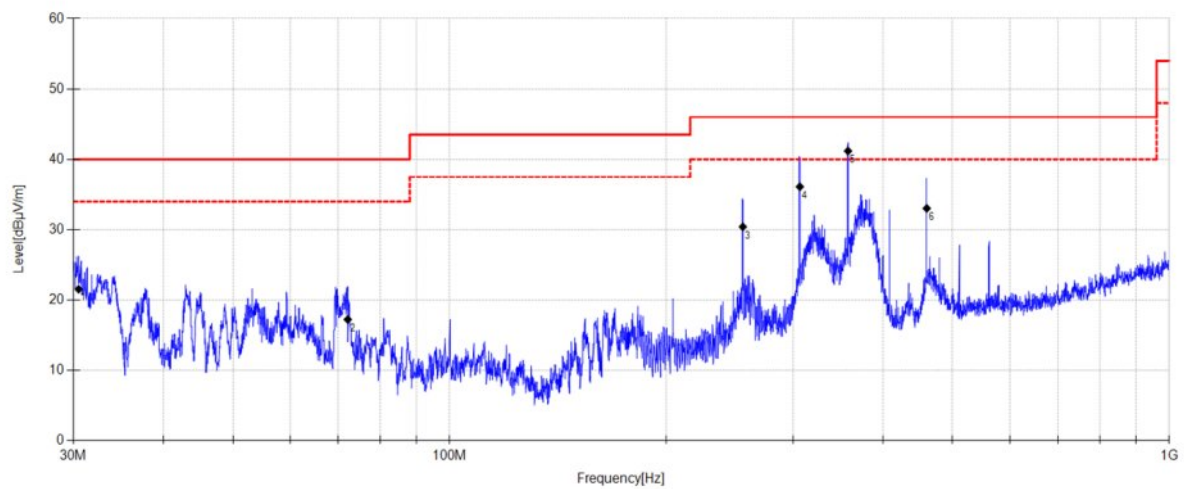

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.509	39.73	10.40	3.72	21.55	40.00	18.45	QP	Vertical
2	72.173	36.07	9.45	4.02	17.24	40.00	22.76	QP	Vertical
3	255.514	45.77	12.20	4.84	30.41	46.00	15.59	QP	Vertical
4	306.611	49.58	13.77	5.17	36.11	46.00	9.89	QP	Vertical
5	357.690	53.13	15.14	5.38	41.19	46.00	4.81	QP	Vertical
6	460.153	43.62	16.20	5.77	33.03	46.00	12.97	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Prüfbericht - Produkte
Test Report - Products

Test Date: 2025-09-10 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 5.8G Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC BELOW1G\19
Memo: Sample Numbel:S25080710-003

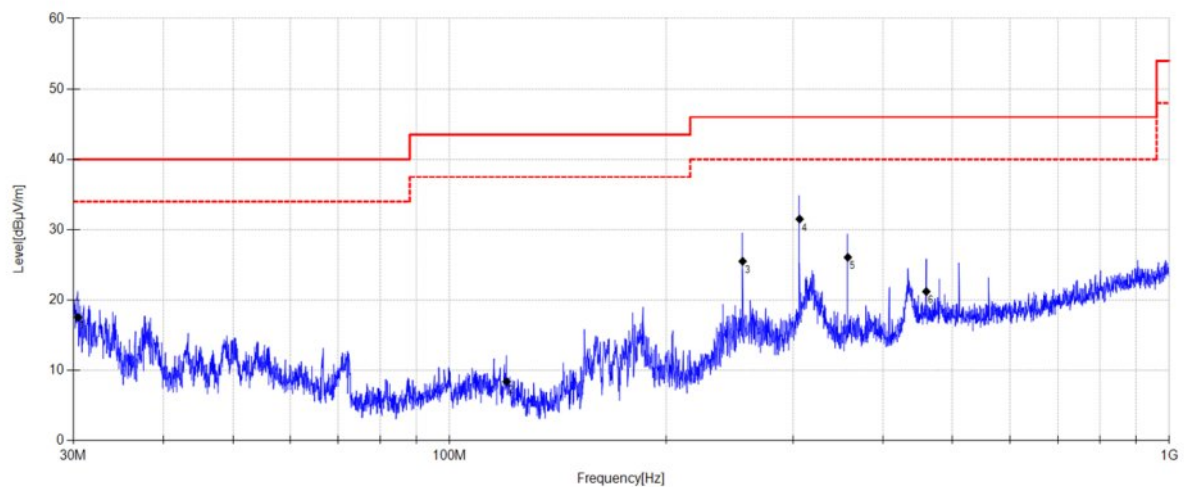

Final Data List


NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	30.445	35.71	10.41	3.72	17.54	40.00	22.46	QP	Horizontal
2	119.991	26.78	9.70	4.25	8.41	43.50	35.09	QP	Horizontal
3	255.335	40.87	12.20	4.84	25.51	46.00	20.49	QP	Horizontal
4	306.396	44.97	13.79	5.17	31.52	46.00	14.48	QP	Horizontal
5	357.501	38	15.15	5.38	26.07	46.00	19.93	QP	Horizontal
6	459.508	31.81	16.19	5.77	21.21	46.00	24.79	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Prüfbericht - Produkte
Test Report - Products

Test Date: 2025-09-10 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 5.8G Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC BELOW1G\20
Memo: Sample Numbel:S25080710-003

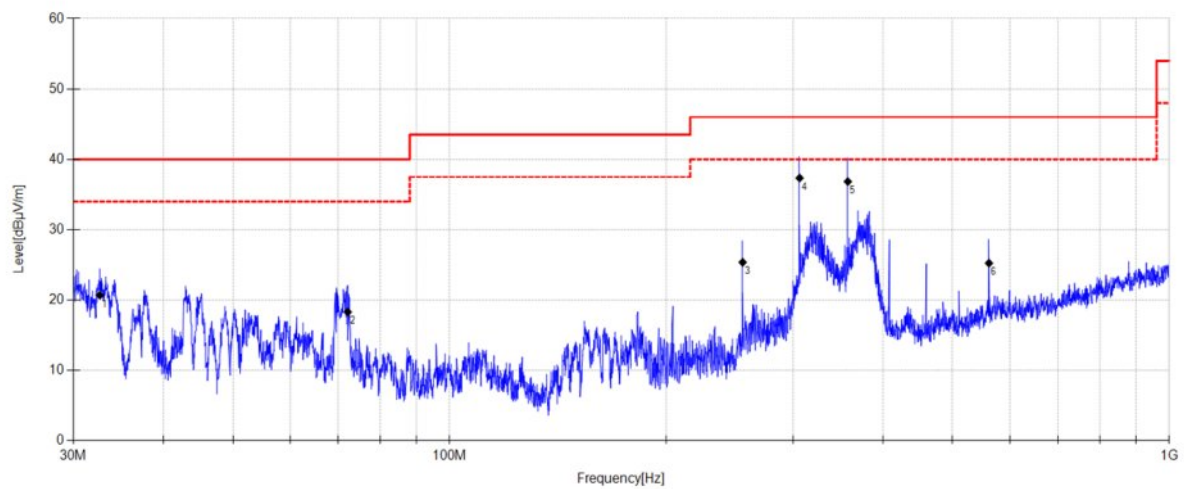

Final Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	32.656	38.35	10.90	3.74	20.69	40.00	19.31	QP	Vertical
2	72.173	37.13	9.45	4.02	18.30	40.00	21.70	QP	Vertical
3	255.335	40.73	12.20	4.84	25.37	46.00	20.63	QP	Vertical
4	306.396	50.8	13.79	5.17	37.35	46.00	8.65	QP	Vertical
5	357.501	48.77	15.15	5.38	36.84	46.00	9.16	QP	Vertical
6	561.545	33.65	18.21	6.14	25.25	46.00	20.75	QP	Vertical


Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

1GHz - 18GHz

Note: The highest waveform in the figure is 5GHz Wi-Fi Fundamental.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\43
Memo: Sample Numbler:S25080710-003 Power Setting:-6

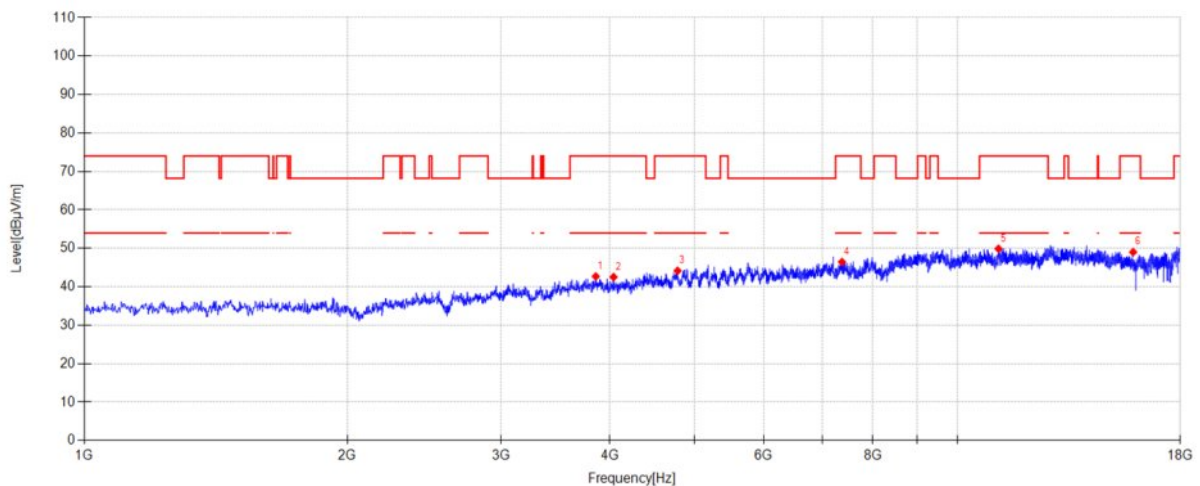


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3852.600	46.16	30.92	5.26	-39.64	42.70	74.00	31.30	PK	Horizontal
2	4037.900	45.88	30.98	5.36	-39.68	42.54	74.00	31.46	PK	Horizontal
3	4780.800	45.13	32.42	6.24	-39.62	44.17	74.00	29.83	PK	Horizontal
4	7375.000	42.90	36.75	7.47	-40.66	46.46	74.00	27.54	PK	Horizontal
5	11143.900	41.26	39.26	8.51	-39.14	49.89	74.00	24.11	PK	Horizontal
6	15893.700	40.14	38.11	10.19	-39.40	49.04	74.00	24.96	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\44
Memo: Sample Numbler:S25080710-003 Power Setting:-6

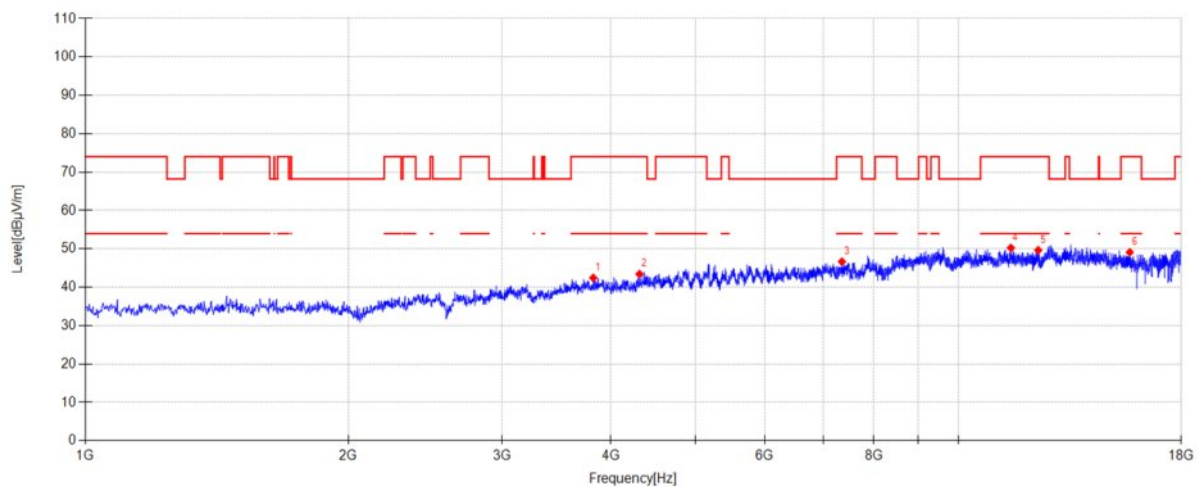


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3816.900	46.07	30.77	5.25	-39.64	42.45	74.00	31.55	PK	Vertical
2	4311.600	45.82	31.60	5.68	-39.66	43.44	74.00	30.56	PK	Vertical
3	7354.600	43.11	36.79	7.46	-40.68	46.68	74.00	27.32	PK	Vertical
4	11482.200	41.81	39.22	8.71	-39.48	50.26	74.00	23.74	PK	Vertical
5	12340.700	41.12	39.30	9.18	-39.93	49.67	74.00	24.33	PK	Vertical
6	15711.800	39.93	38.48	10.11	-39.40	49.12	74.00	24.88	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Prüfbericht - Produkte
Test Report - Products

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\41
Memo: Sample Numbel:S25080710-003 Power Setting:-6

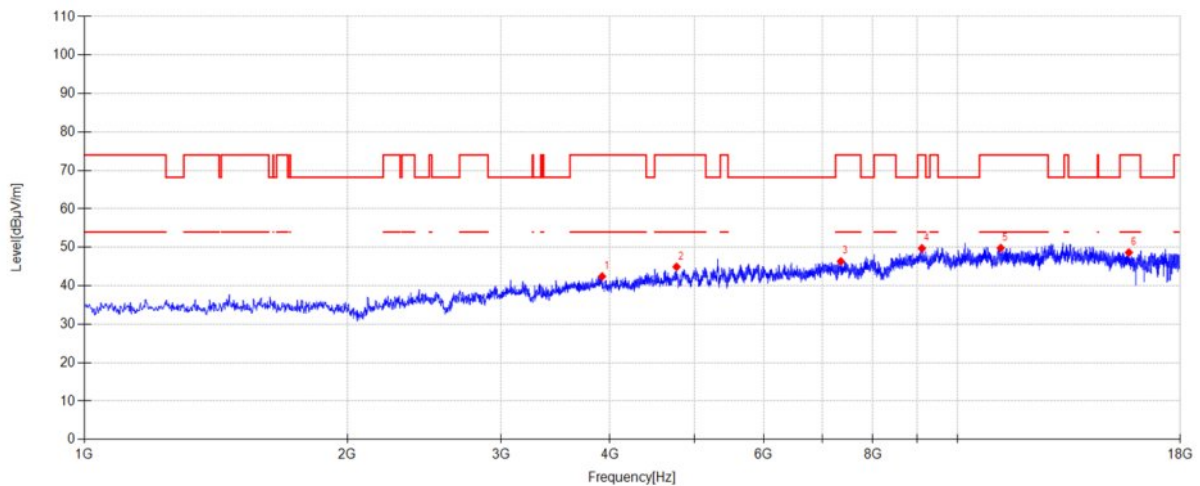


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3917.200	45.64	31.17	5.28	-39.66	42.43	74.00	31.57	PK	Horizontal
2	4767.200	45.96	32.37	6.22	-39.62	44.93	74.00	29.07	PK	Horizontal
3	7352.900	42.78	36.79	7.46	-40.68	46.35	74.00	27.65	PK	Horizontal
4	9105.600	42.00	38.50	8.13	-38.88	49.75	74.00	24.25	PK	Horizontal
5	11210.200	41.30	39.20	8.55	-39.21	49.84	74.00	24.16	PK	Horizontal
6	15715.200	39.47	38.47	10.11	-39.40	48.65	74.00	25.35	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\42
Memo: Sample Numbler:S25080710-003 Power Setting:-6

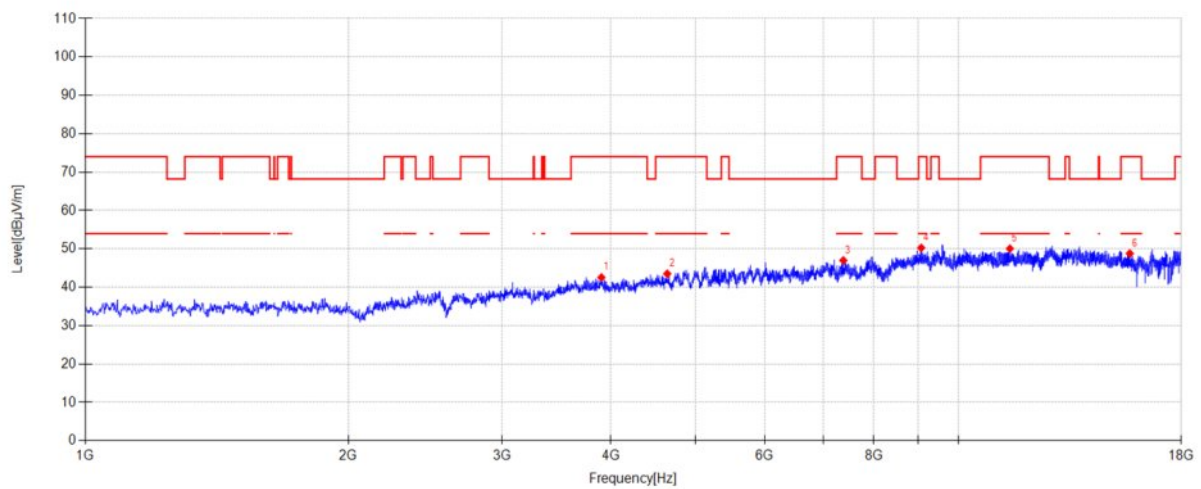


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3900.200	45.74	31.20	5.28	-39.66	42.56	74.00	31.44	PK	Vertical
2	4639.700	45.10	31.98	6.07	-39.63	43.52	74.00	30.48	PK	Vertical
3	7381.800	43.45	36.74	7.47	-40.66	47.00	74.00	27.00	PK	Vertical
4	9064.800	42.56	38.43	8.13	-38.85	50.27	74.00	23.73	PK	Vertical
5	11453.300	41.57	39.25	8.69	-39.45	50.06	74.00	23.94	PK	Vertical
6	15711.800	39.60	38.48	10.11	-39.40	48.79	74.00	25.21	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\45
Memo: Sample Numbler:S25080710-003 Power Setting:-6

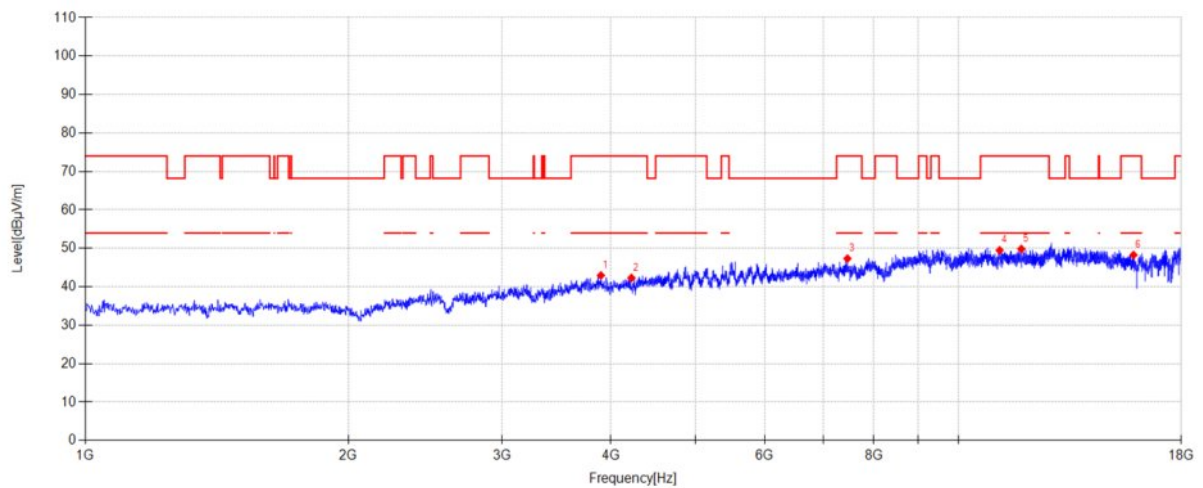


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3895.100	46.16	31.17	5.28	-39.65	42.96	74.00	31.04	PK	Horizontal
2	4221.500	45.11	31.29	5.57	-39.66	42.31	74.00	31.69	PK	Horizontal
3	7461.700	43.81	36.58	7.53	-40.58	47.34	74.00	26.66	PK	Horizontal
4	11147.300	40.88	39.25	8.51	-39.15	49.49	74.00	24.51	PK	Horizontal
5	11803.500	41.84	38.90	8.90	-39.80	49.84	74.00	24.16	PK	Horizontal
6	15869.900	39.34	38.16	10.18	-39.40	48.28	74.00	25.72	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\46
Memo: Sample Numbler:S25080710-003 Power Setting:-6

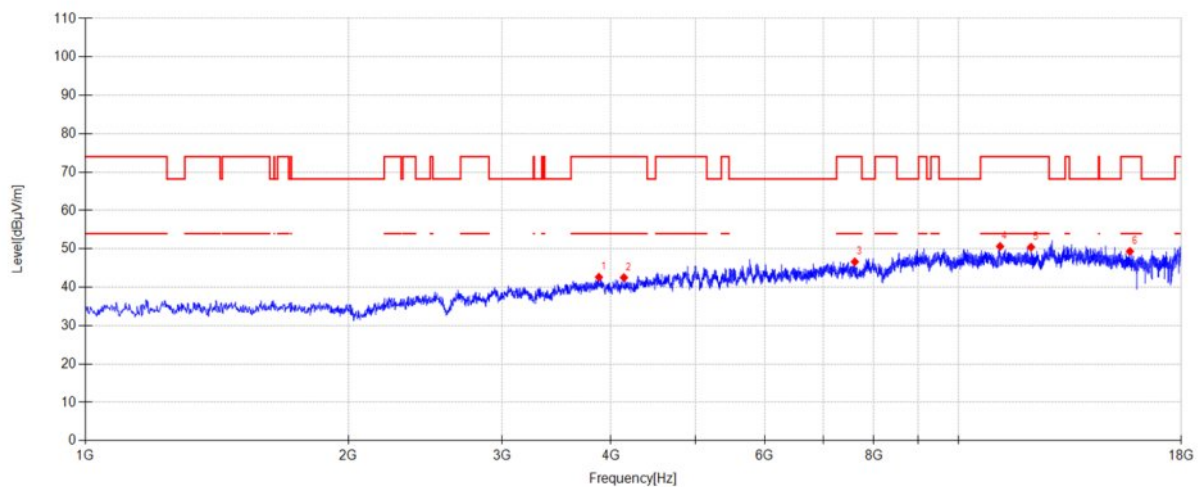


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3874.700	45.97	31.05	5.27	-39.65	42.64	74.00	31.36	PK	Vertical
2	4138.200	45.55	31.18	5.47	-39.67	42.53	74.00	31.47	PK	Vertical
3	7607.900	42.94	36.52	7.62	-40.45	46.63	74.00	27.37	PK	Vertical
4	11160.900	42.06	39.24	8.52	-39.16	50.66	74.00	23.34	PK	Vertical
5	12109.500	42.06	39.30	9.07	-39.98	50.45	74.00	23.55	PK	Vertical
6	15715.200	40.17	38.47	10.11	-39.40	49.35	74.00	24.65	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5700MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\47
Memo: Sample Numbler:S25080710-003 Power Setting:-6

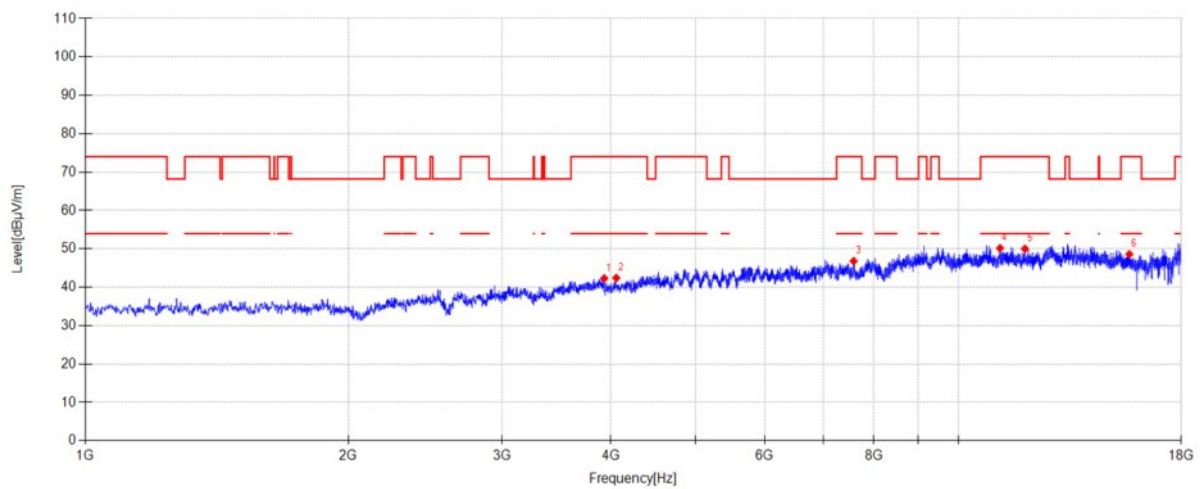


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3929.100	45.53	31.14	5.29	-39.66	42.30	74.00	31.70	PK	Horizontal
2	4056.600	45.71	31.01	5.38	-39.68	42.42	74.00	31.58	PK	Horizontal
3	7585.800	43.21	36.47	7.60	-40.47	46.81	74.00	27.19	PK	Horizontal
4	11159.200	41.57	39.24	8.52	-39.16	50.17	74.00	23.83	PK	Horizontal
5	11917.400	42.02	38.95	8.97	-39.92	50.02	74.00	23.98	PK	Horizontal
6	15694.800	39.40	38.51	10.10	-39.40	48.61	74.00	25.39	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5700MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\48
Memo: Sample Numbler:S25080710-003 Power Setting:-6

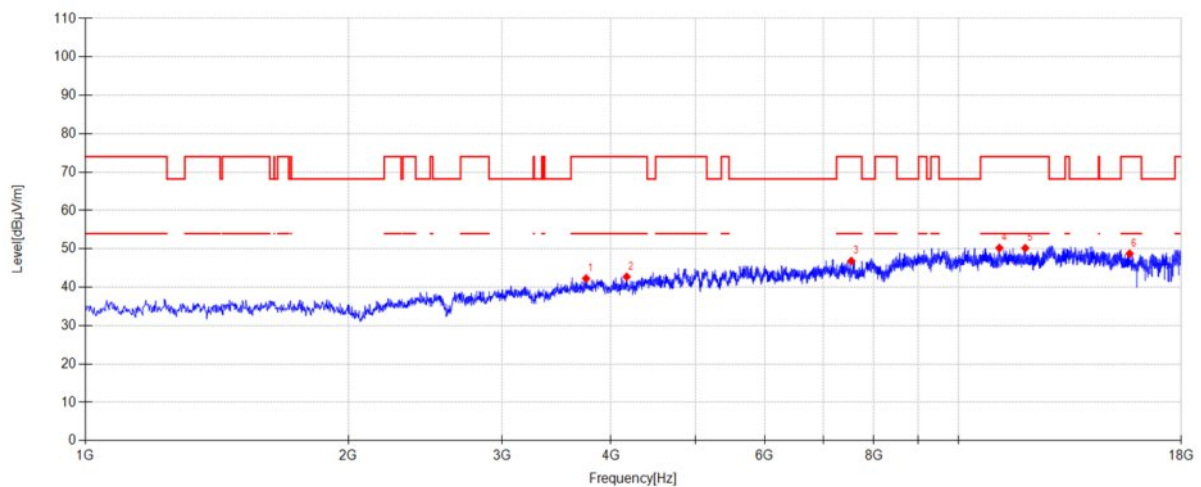


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3745.500	46.18	30.49	5.23	-39.62	42.28	74.00	31.72	PK	Vertical
2	4168.800	45.70	31.20	5.51	-39.67	42.74	74.00	31.26	PK	Vertical
3	7538.200	43.38	36.42	7.57	-40.52	46.85	74.00	27.15	PK	Vertical
4	11140.500	41.60	39.26	8.50	-39.14	50.22	74.00	23.78	PK	Vertical
5	11925.900	42.17	38.98	8.98	-39.93	50.20	74.00	23.80	PK	Vertical
6	15705.000	39.55	38.49	10.11	-39.40	48.75	74.00	25.25	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5745MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\49
Memo: Sample Numbel:S25080710-003 Power Setting:-2

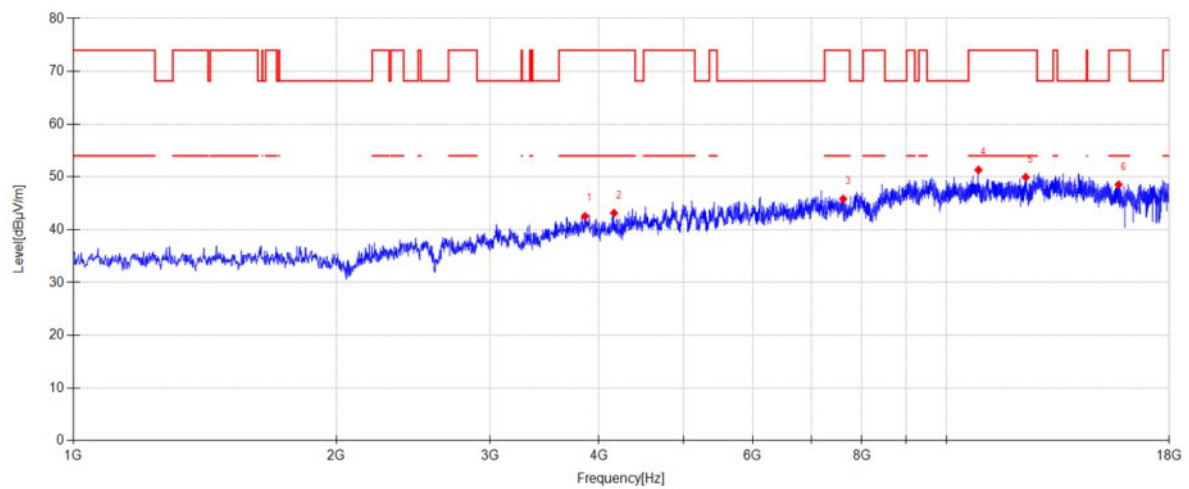


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3854.300	46.03	30.93	5.26	-39.65	42.57	74.00	31.43	PK	Horizontal
2	4162.000	46.13	31.20	5.50	-39.67	43.16	74.00	30.84	PK	Horizontal
3	7616.400	42.13	36.53	7.62	-40.45	45.83	74.00	28.17	PK	Horizontal
4	10880.400	42.71	39.32	8.38	-39.07	51.34	74.00	22.66	PK	Horizontal
5	12325.400	41.41	39.30	9.17	-39.93	49.95	74.00	24.05	PK	Horizontal
6	15745.800	39.40	38.41	10.13	-39.40	48.54	74.00	25.46	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5745MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\50
Memo: Sample Numbler:S25080710-003 Power Setting:-2

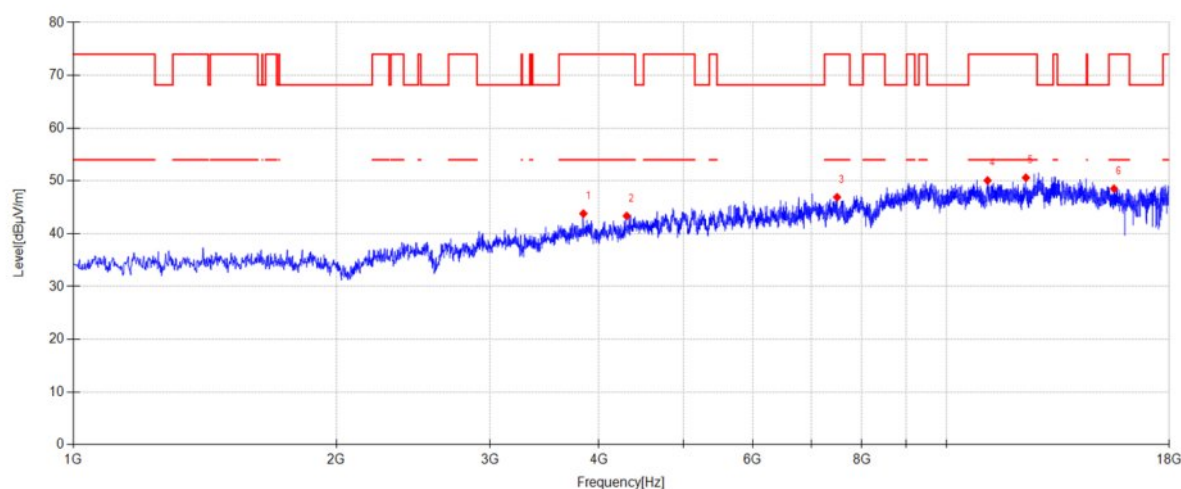


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3839.000	47.33	30.86	5.26	-39.64	43.81	74.00	30.19	PK	Vertical
2	4303.100	45.76	31.60	5.67	-39.66	43.37	74.00	30.63	PK	Vertical
3	7494.000	43.42	36.51	7.55	-40.56	46.92	74.00	27.08	PK	Vertical
4	11143.900	41.46	39.26	8.51	-39.14	50.09	74.00	23.91	PK	Vertical
5	12332.200	42.08	39.30	9.17	-39.93	50.62	74.00	23.38	PK	Vertical
6	15555.400	39.19	38.69	10.04	-39.40	48.52	74.00	25.48	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\51
Memo: Sample Numbler:S25080710-003 Power Setting:-2

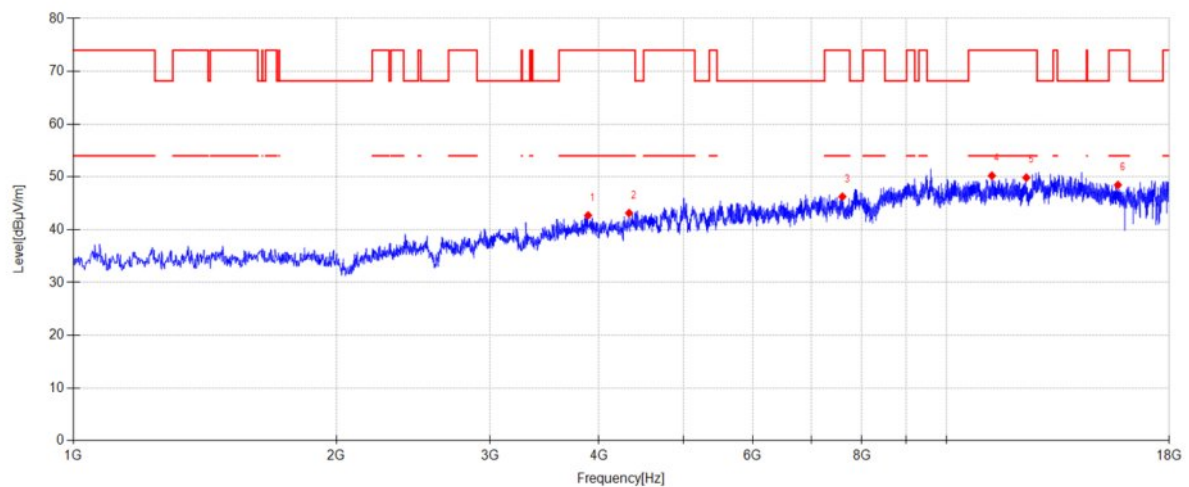


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3886.600	45.97	31.12	5.27	-39.65	42.71	74.00	31.29	PK	Horizontal
2	4330.300	45.50	31.60	5.70	-39.65	43.15	74.00	30.85	PK	Horizontal
3	7601.100	42.61	36.50	7.61	-40.46	46.26	74.00	27.74	PK	Horizontal
4	11273.100	41.72	39.20	8.58	-39.27	50.23	74.00	23.77	PK	Horizontal
5	12344.100	41.33	39.30	9.18	-39.93	49.88	74.00	24.12	PK	Horizontal
6	15716.900	39.29	38.47	10.11	-39.40	48.47	74.00	25.53	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\52
Memo: Sample Numbler:S25080710-003 Power Setting:-2

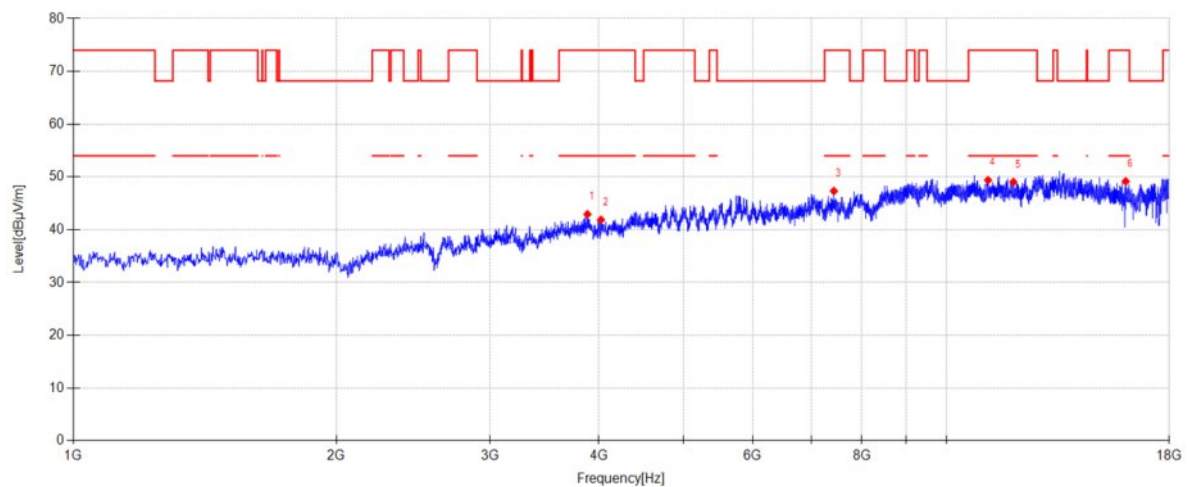


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3879.800	46.23	31.08	5.27	-39.65	42.93	74.00	31.07	PK	Vertical
2	4020.900	45.29	30.94	5.33	-39.68	41.88	74.00	32.12	PK	Vertical
3	7431.100	43.79	36.64	7.51	-40.61	47.33	74.00	26.67	PK	Vertical
4	11159.200	40.79	39.24	8.52	-39.16	49.39	74.00	24.61	PK	Vertical
5	11929.300	41.01	38.99	8.98	-39.93	49.05	74.00	24.95	PK	Vertical
6	16043.300	40.37	37.96	10.27	-39.43	49.17	74.00	24.83	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\53
Memo: Sample Numbler:S25080710-003 Power Setting:-2

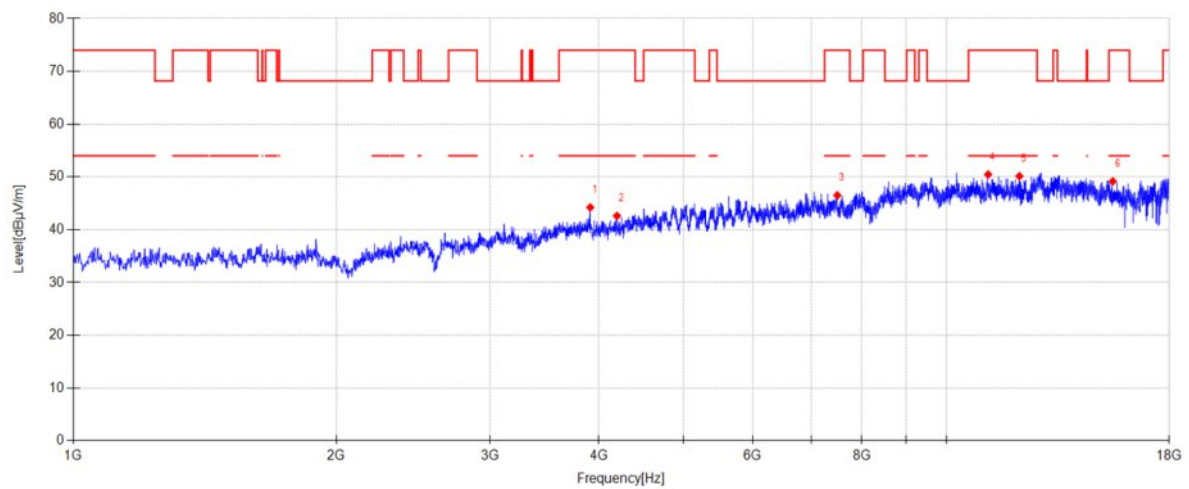


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3908.700	47.43	31.18	5.28	-39.66	44.23	74.00	29.77	PK	Horizontal
2	4194.300	45.54	31.20	5.54	-39.66	42.62	74.00	31.38	PK	Horizontal
3	7497.400	43.00	36.51	7.55	-40.55	46.51	74.00	27.49	PK	Horizontal
4	11160.900	41.87	39.24	8.52	-39.16	50.47	74.00	23.53	PK	Horizontal
5	12121.400	41.74	39.30	9.08	-39.98	50.14	74.00	23.86	PK	Horizontal
6	15506.100	39.76	38.79	10.02	-39.40	49.17	74.00	24.83	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-08-18 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\54
Memo: Sample Numbler:S25080710-003 Power Setting:-2

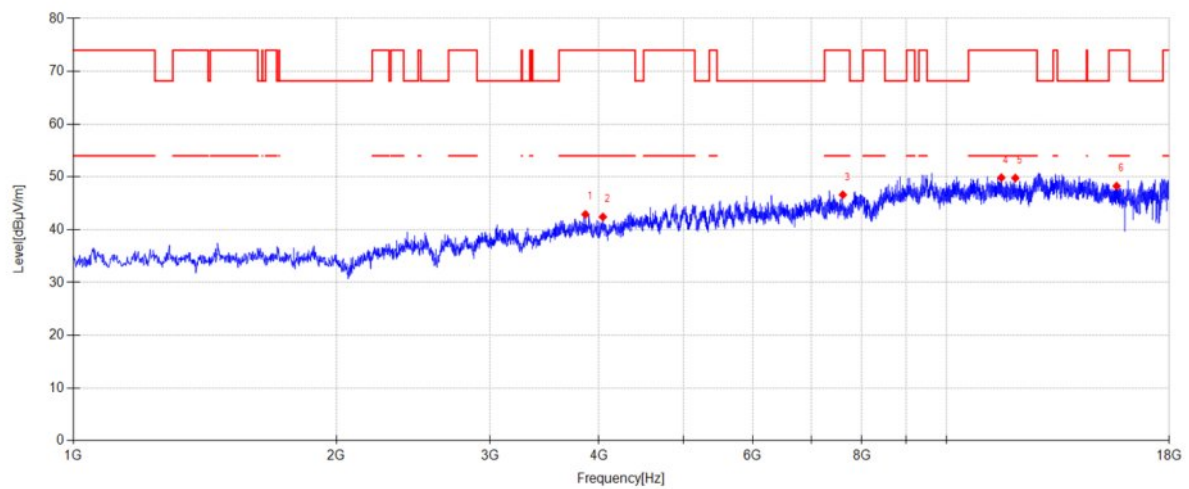

Suspected Data List


N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3859.400	46.33	30.96	5.27	-39.65	42.91	74.00	31.09	PK	Vertical
2	4041.300	45.77	30.98	5.36	-39.68	42.43	74.00	31.57	PK	Vertical
3	7609.600	42.93	36.52	7.62	-40.45	46.62	74.00	27.38	PK	Vertical
4	11558.700	41.59	39.08	8.76	-39.56	49.87	74.00	24.13	PK	Vertical
5	11992.200	41.58	39.18	9.02	-39.99	49.79	74.00	24.21	PK	Vertical
6	15662.500	39.03	38.54	10.09	-39.40	48.26	74.00	25.74	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Appendix A.9: Test Results of Radiated Emissions in Restricted Bands

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\61
Memo: Sample Numbler:S25080710-003 Power Setting:-6

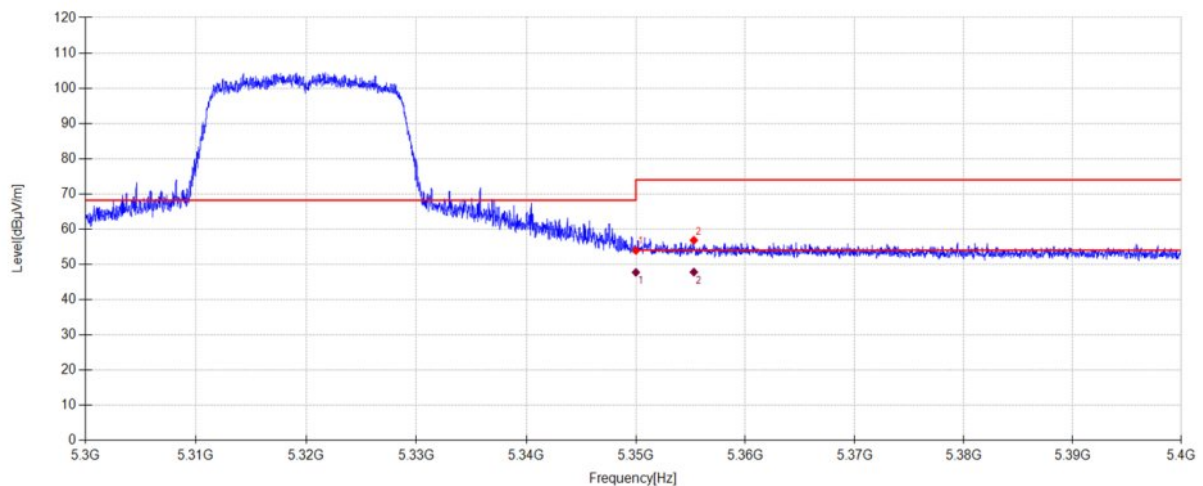


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.69	34.19	6.67	-29.60	53.95	68.20	14.25	PK	Horizontal
2	5355.290	45.59	34.19	6.67	-29.60	56.85	74.00	17.15	PK	Horizontal

Final Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	36.47	34.19	6.67	47.73	54.0	6.27	AV	Horizontal	
2	5355.290	36.55	34.19	6.67	47.81	54.0	6.19	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\62
Memo: Sample Numbel:S25080710-003 Power Setting:-6

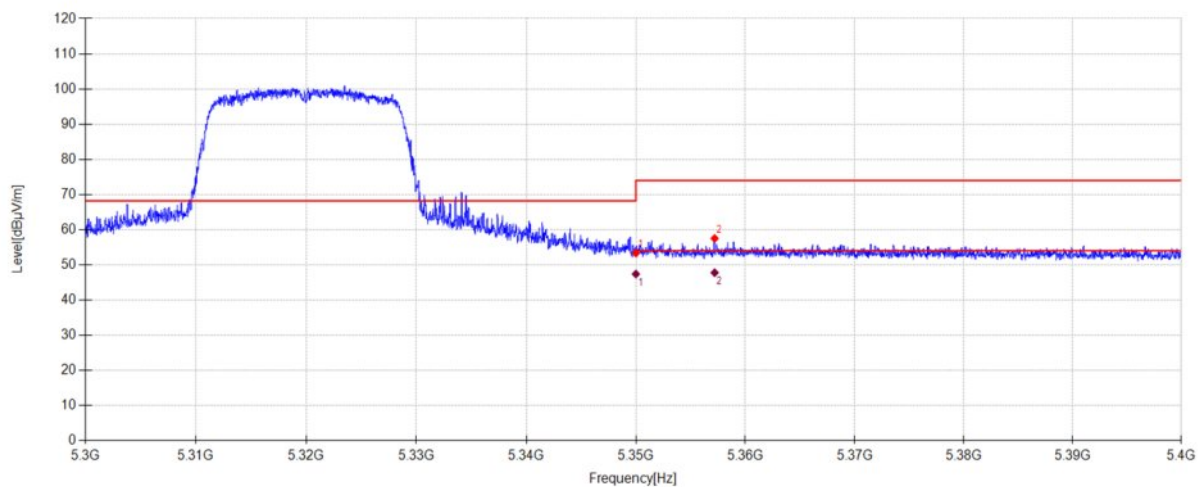

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.09	34.19	6.67	-29.60	53.35	68.20	14.85	PK	Vertical
2	5357.190	46.24	34.19	6.68	-29.60	57.51	74.00	16.49	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	36.14	34.19	6.67	47.40	54.0	6.60	AV	Vertical
2	5357.190	36.51	34.19	6.68	47.78	54.0	6.22	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\63
Memo: Sample Numbler:S25080710-003 Power Setting:-6

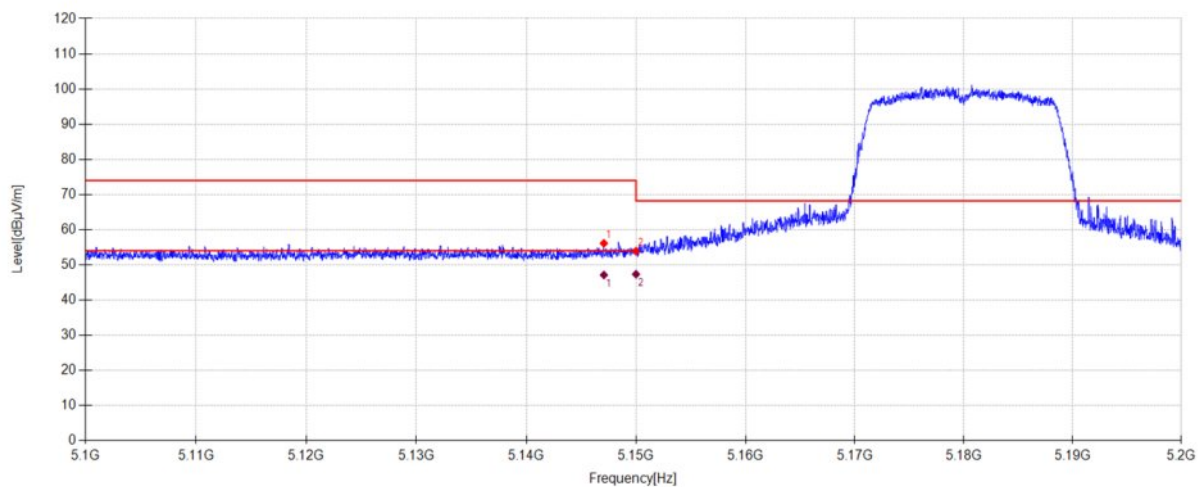

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.070	45.19	33.96	6.57	-29.60	56.12	74.00	17.88	PK	Horizontal
2	5150.000	42.96	33.97	6.57	-29.60	53.90	68.20	14.30	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.070	36.19	33.96	6.57	47.12	54.0	6.88	AV	Horizontal
2	5150.000	36.41	33.97	6.57	47.35	54.0	6.65	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\64
Memo: Sample Numbler:S25080710-003 Power Setting:-6

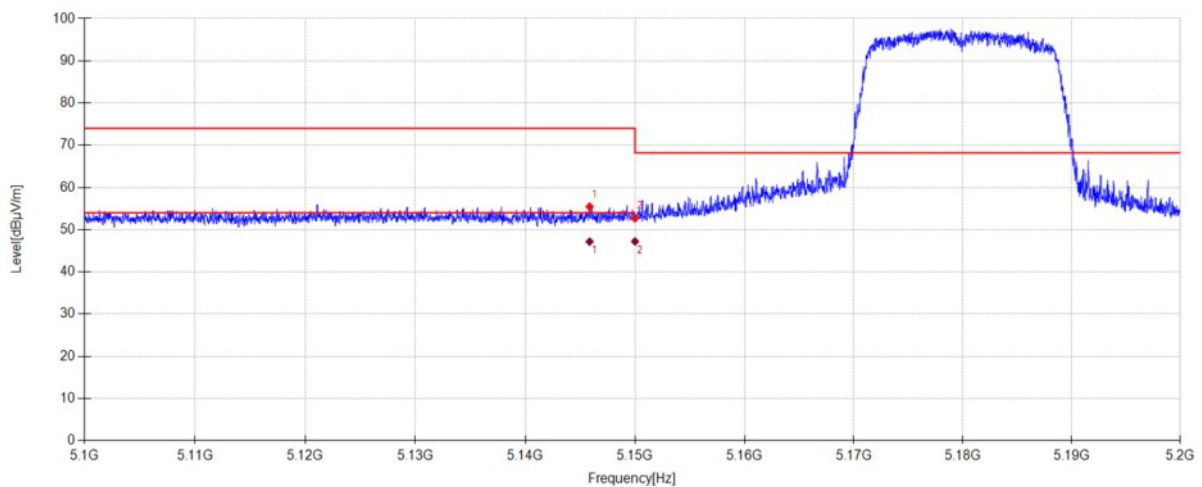

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.860	44.53	33.96	6.57	-29.60	55.46	74.00	18.54	PK	Vertical
2	5150.000	41.75	33.97	6.57	-29.60	52.69	68.20	15.51	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.860	36.24	33.96	6.57	47.17	54.0	6.83	AV	Vertical
2	5150.000	36.28	33.97	6.57	47.22	54.0	6.78	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\65
Memo: Sample Numbler:S25080710-003 Power Setting:-6

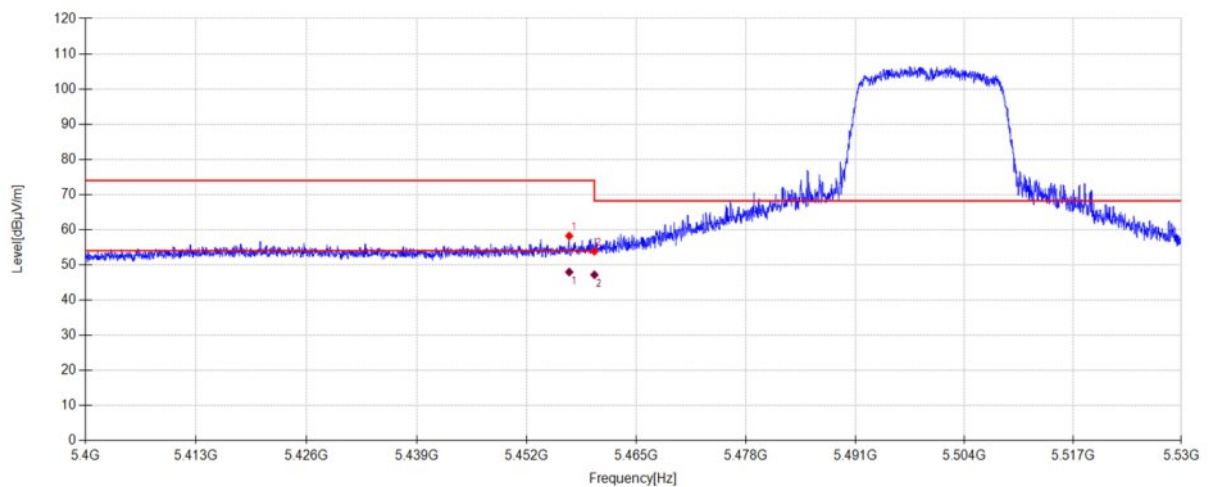

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.018	46.80	34.30	6.72	-29.60	58.22	74.00	15.78	PK	Horizontal
2	5460.000	42.42	34.31	6.73	-29.60	53.86	68.20	14.34	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.018	36.55	34.30	6.72	47.97	54.0	6.03	AV	Horizontal
2	5460.000	35.74	34.31	6.73	47.18	54.0	6.82	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\66
Memo: Sample Numbler:S25080710-003 Power Setting:-6

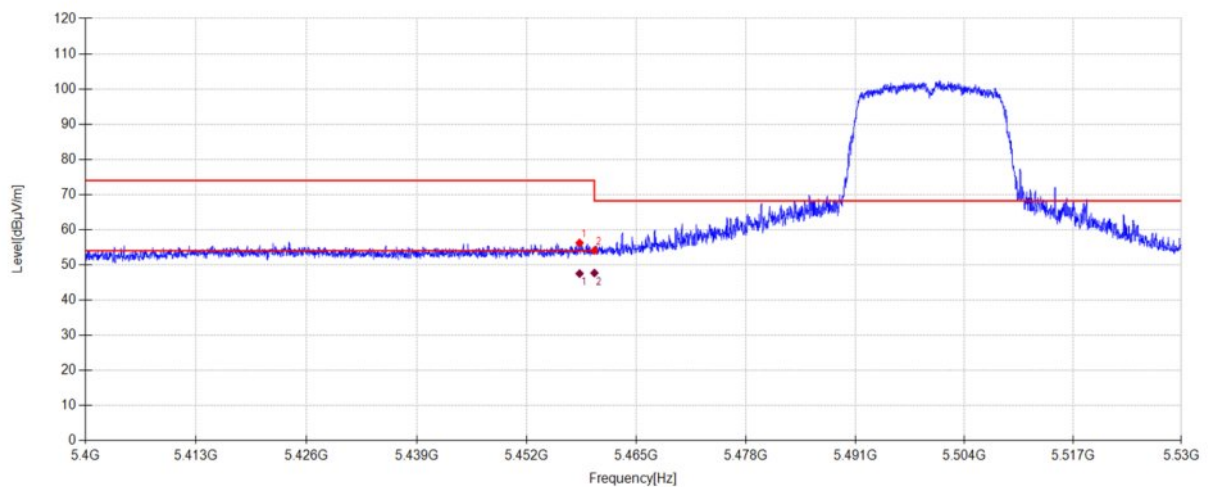

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.240	44.83	34.30	6.72	-29.60	56.25	74.00	17.75	PK	Vertical
2	5460.000	42.66	34.31	6.73	-29.60	54.10	68.20	14.10	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.240	36.11	34.30	6.72	47.53	54.0	6.47	AV	Vertical
2	5460.000	36.24	34.31	6.73	47.68	54.0	6.32	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5700MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\67
Memo: Sample Numbler:S25080710-003 Power Setting:-6

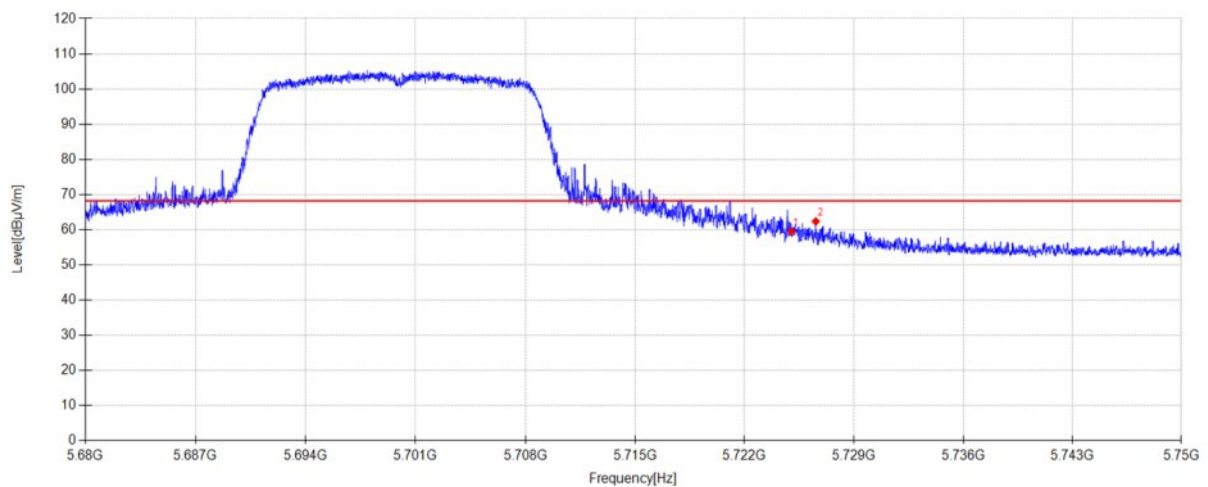


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	47.65	34.60	6.86	-29.60	59.51	68.20	8.69	PK	Horizontal
2	5726.557	50.50	34.60	6.86	-29.60	62.36	68.20	5.84	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5700MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\68
Memo: Sample Numbler:S25080710-003 Power Setting:-6

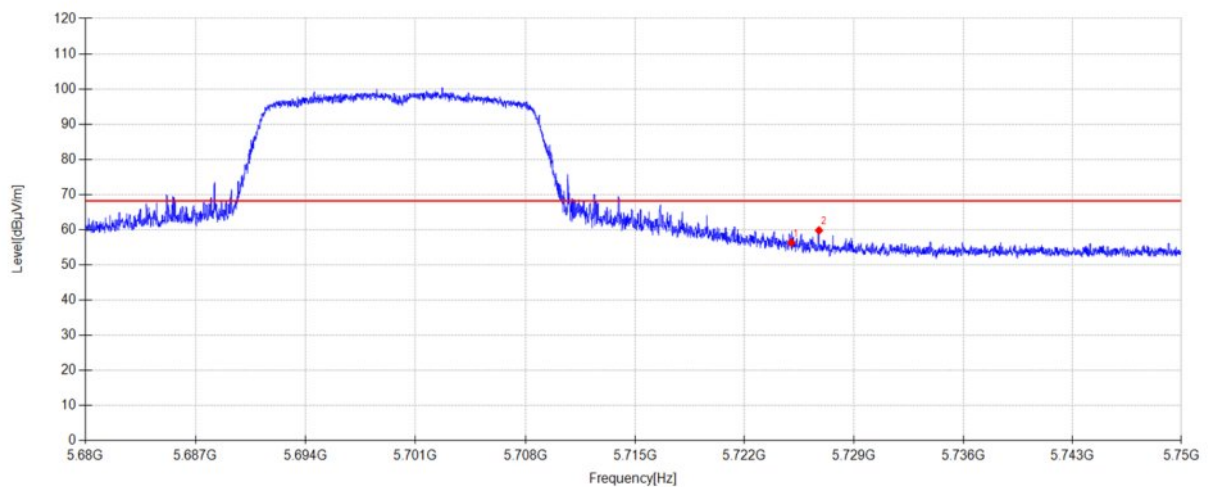


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.49	34.60	6.86	-29.60	56.35	68.20	11.85	PK	Vertical
2	5726.767	47.94	34.60	6.86	-29.60	59.80	68.20	8.40	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5700MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\69
Memo: Sample Numbel:S25080710-003 Power Setting:-6

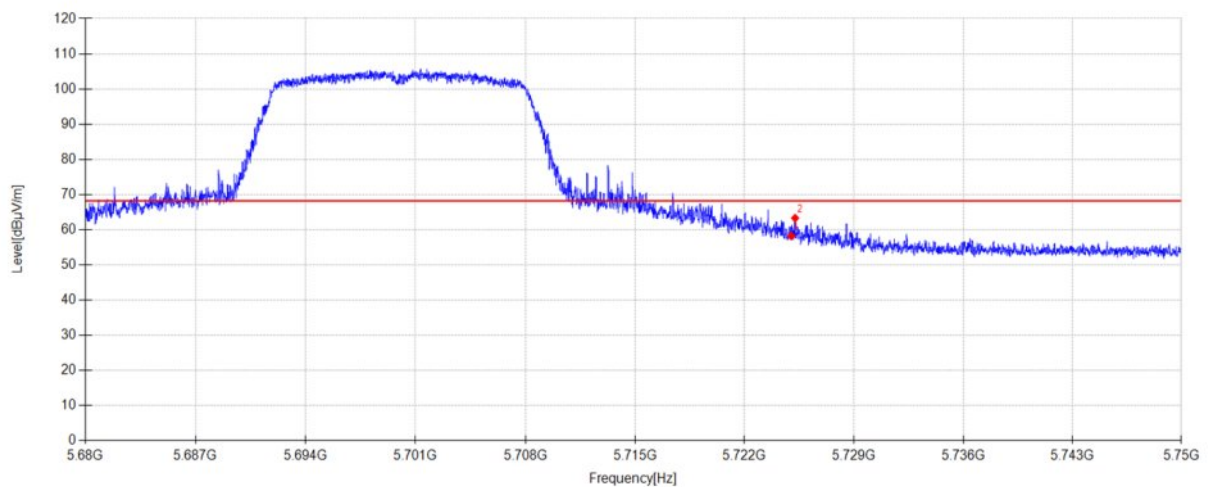


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	46.37	34.60	6.86	-29.60	58.23	68.20	9.97	PK	Horizontal
2	5725.234	51.45	34.60	6.86	-29.60	63.31	68.20	4.89	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5700MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\70
Memo: Sample Numbler:S25080710-003 Power Setting:-6

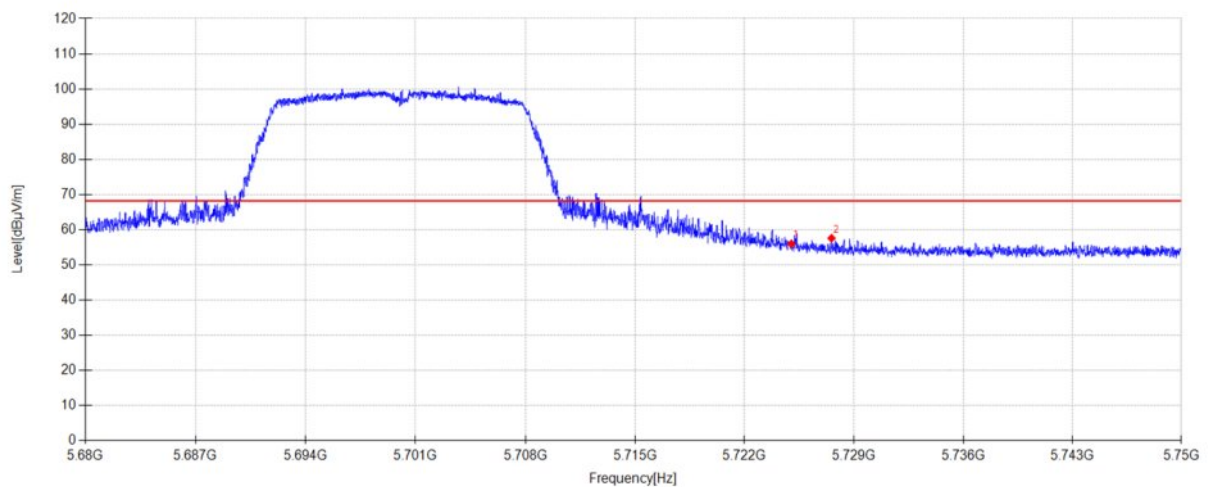


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.08	34.60	6.86	-29.60	55.94	68.20	12.26	PK	Vertical
2	5727.565	45.72	34.60	6.86	-29.60	57.58	68.20	10.62	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\71
Memo: Sample Numbler:S25080710-003 Power Setting:-6

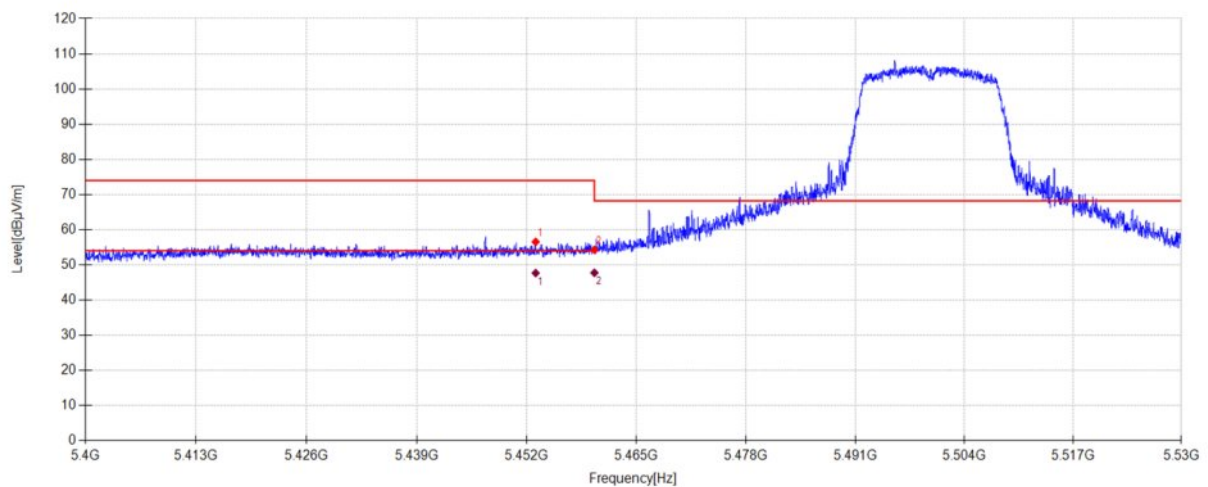


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.040	45.13	34.30	6.72	-29.60	56.55	74.00	17.45	PK	Horizontal
2	5460.000	42.86	34.31	6.73	-29.60	54.30	68.20	13.90	PK	Horizontal

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.040	36.25	34.30	6.72	47.67	54.0	6.33	AV	Horizontal
2	5460.000	36.31	34.31	6.73	47.75	54.0	6.25	AV	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\72
Memo: Sample Numbler:S25080710-003 Power Setting:-6

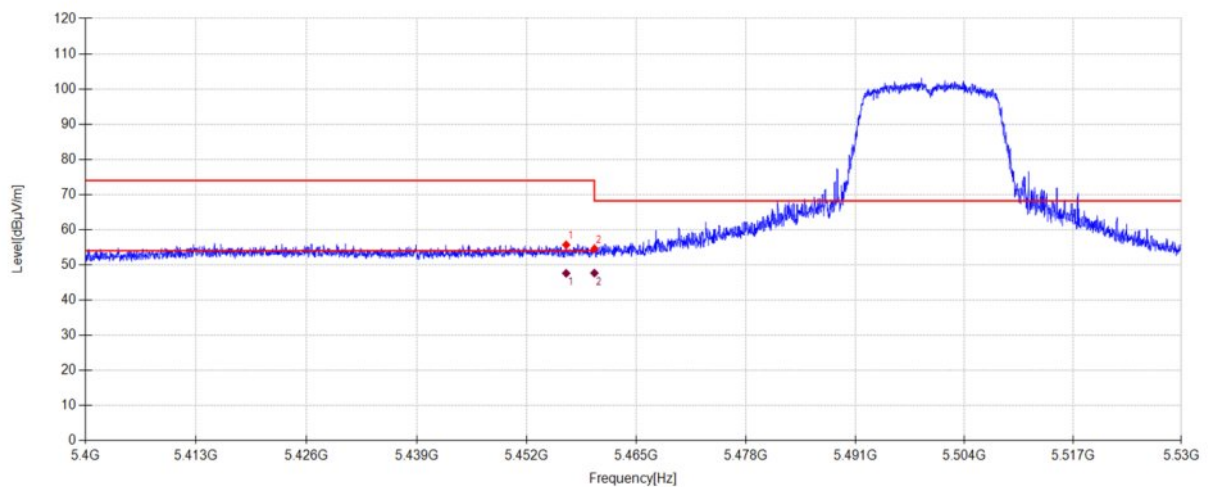

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.654	44.28	34.30	6.72	-29.60	55.70	74.00	18.30	PK	Vertical
2	5460.000	43.12	34.31	6.73	-29.60	54.56	68.20	13.64	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.654	36.19	34.30	6.72	47.61	54.0	6.39	AV	Vertical
2	5460.000	36.23	34.31	6.73	47.67	54.0	6.33	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\73
Memo: Sample Numbler:S25080710-003 Power Setting:-6

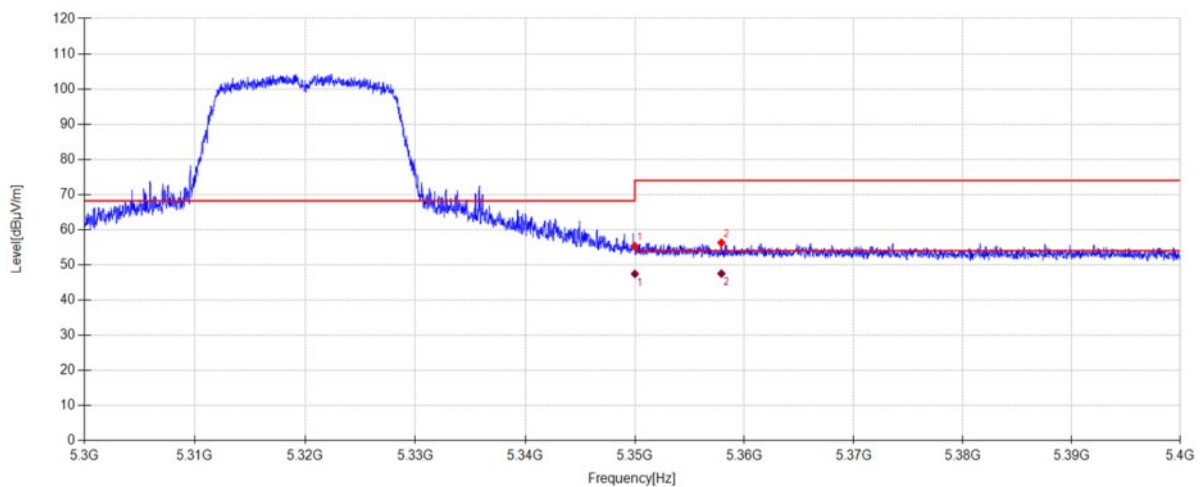

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.06	34.19	6.67	-29.60	55.32	68.20	12.88	PK	Horizontal
2	5357.900	45.01	34.19	6.68	-29.60	56.28	74.00	17.72	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	36.18	34.19	6.67	47.44	54.0	6.56	AV	Horizontal
2	5357.900	36.25	34.19	6.68	47.52	54.0	6.48	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\74
Memo: Sample Numbler:S25080710-003 Power Setting:-6

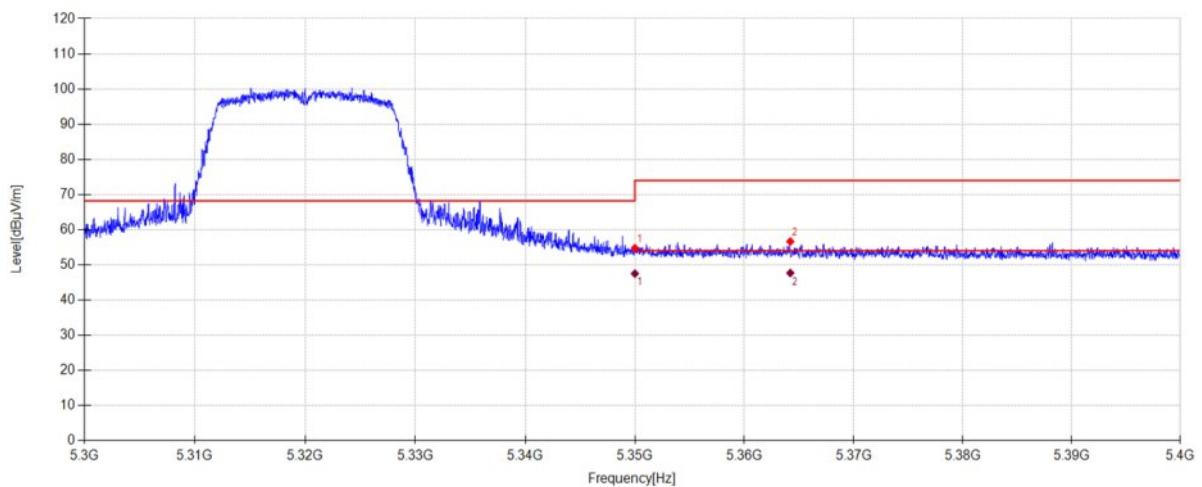

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.52	34.19	6.67	-29.60	54.78	68.20	13.42	PK	Vertical
2	5364.200	45.37	34.20	6.68	-29.60	56.65	74.00	17.35	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	36.25	34.19	6.67	47.51	54.0	6.49	AV	Vertical
2	5364.200	36.42	34.20	6.68	47.70	54.0	6.30	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\75
Memo: Sample Numbler:S25080710-003 Power Setting:-6

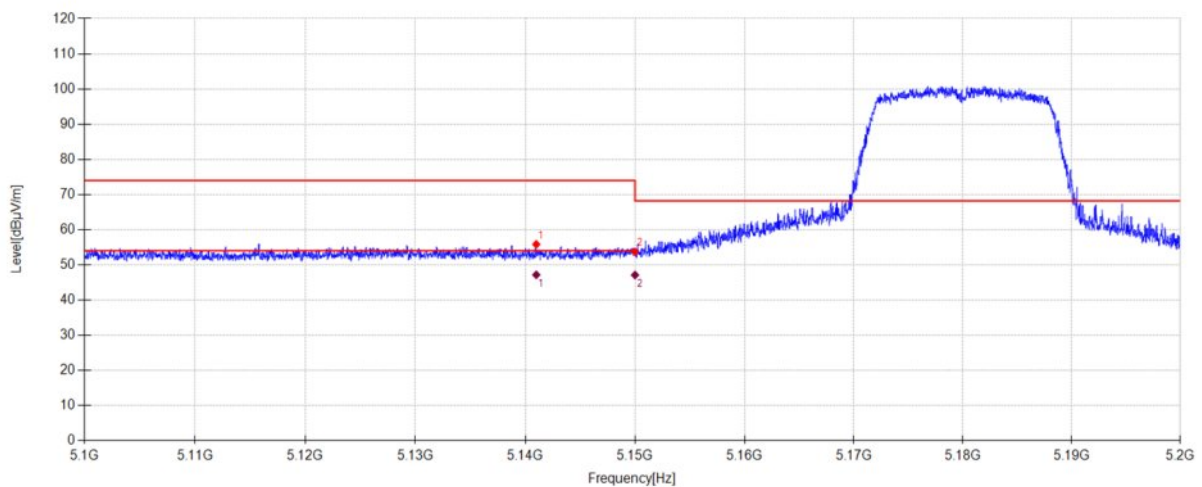

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.000	44.91	33.96	6.57	-29.60	55.84	74.00	18.16	PK	Horizontal
2	5150.000	42.79	33.97	6.57	-29.60	53.73	68.20	14.47	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.000	36.25	33.96	6.57	47.18	54.0	6.82	AV	Horizontal
2	5150.000	36.18	33.97	6.57	47.12	54.0	6.88	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\76
Memo: Sample Numbler:S25080710-003 Power Setting:-6

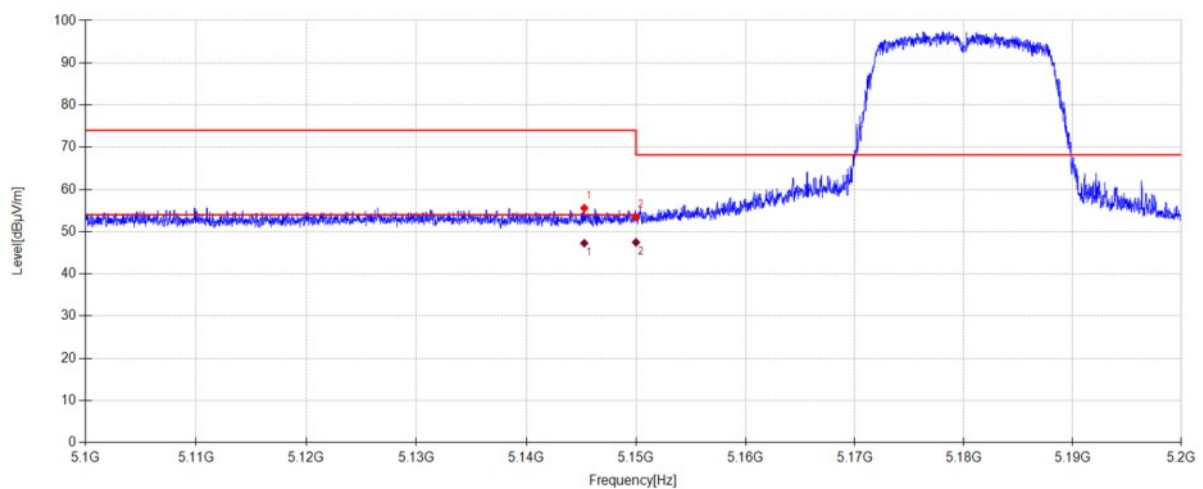

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.280	44.67	33.96	6.57	-29.60	55.60	74.00	18.40	PK	Vertical
2	5150.000	42.52	33.97	6.57	-29.60	53.46	68.20	14.74	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.280	36.35	33.96	6.57	47.28	54.0	6.72	AV	Vertical
2	5150.000	36.54	33.97	6.57	47.48	54.0	6.52	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\81
Memo: Sample Numbler:S25080710-003 Power Setting:-6

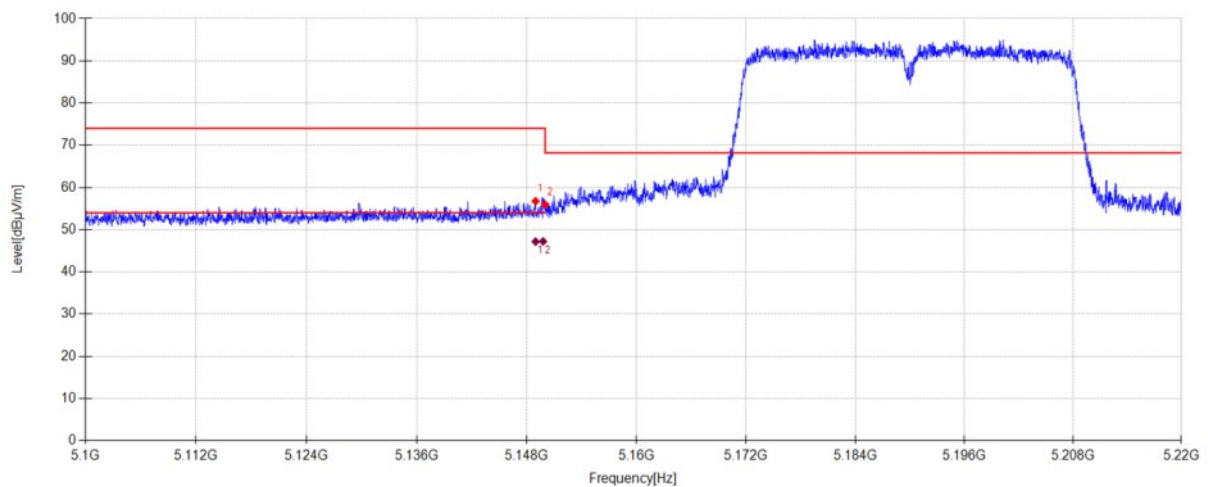

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.960	45.84	33.96	6.57	-29.60	56.77	74.00	17.23	PK	Horizontal
2	5150.000	45.00	33.97	6.57	-29.60	55.94	68.20	12.26	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.960	36.25	33.96	6.57	47.18	54.0	6.82	AV	Horizontal
2	5149.779	36.30	33.97	6.57	47.24	54.0	6.76	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\82
Memo: Sample Numbler:S25080710-003 Power Setting:-6

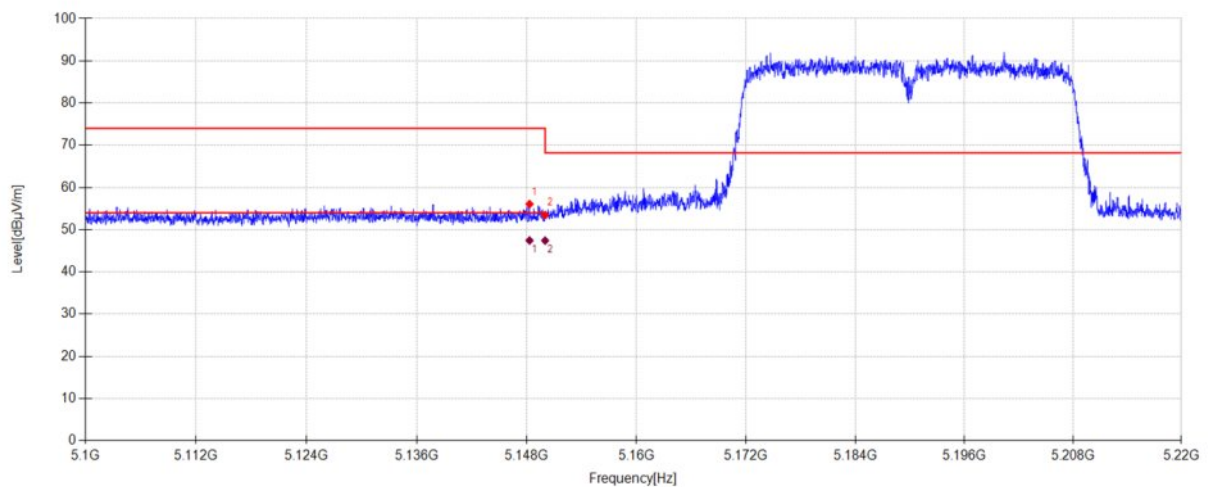

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.300	45.14	33.96	6.57	-29.60	56.07	74.00	17.93	PK	Vertical
2	5150.000	42.56	33.97	6.57	-29.60	53.50	68.20	14.70	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.300	36.52	33.96	6.57	47.45	54.0	6.55	AV	Vertical
2	5150.000	36.48	33.97	6.57	47.42	54.0	6.58	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\83
Memo: Sample Numbler:S25080710-003 Power Setting:-6

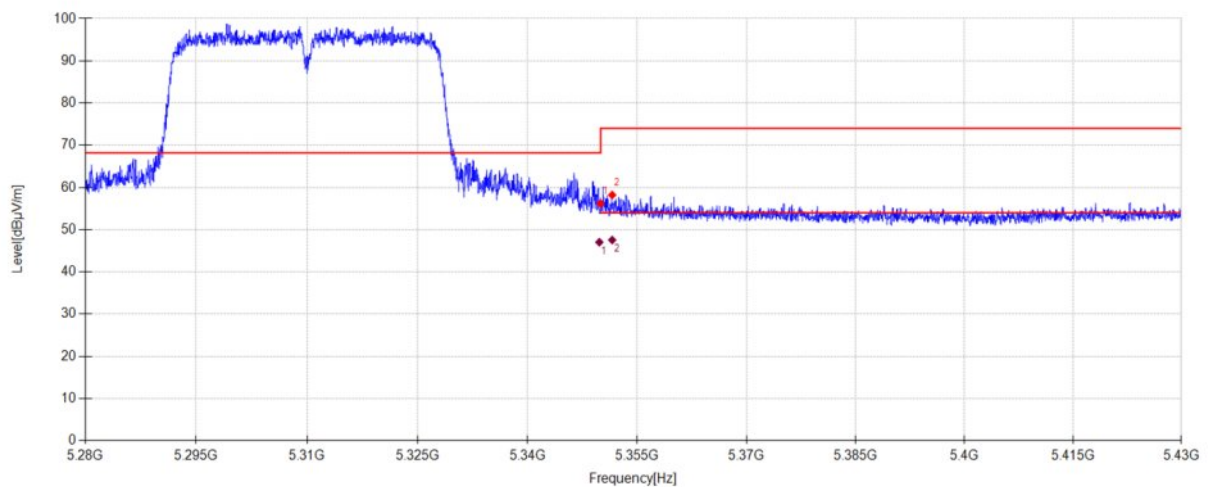

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.93	34.19	6.67	-29.60	56.19	68.20	12.01	PK	Horizontal
2	5351.580	46.96	34.19	6.67	-29.60	58.22	74.00	15.78	PK	Horizontal


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5349.827	35.78	34.19	6.67	47.04	54.0	6.96	AV	Horizontal
2	5351.580	36.29	34.19	6.67	47.55	54.0	6.45	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\84
Memo: Sample Numbler:S25080710-003 Power Setting:-6

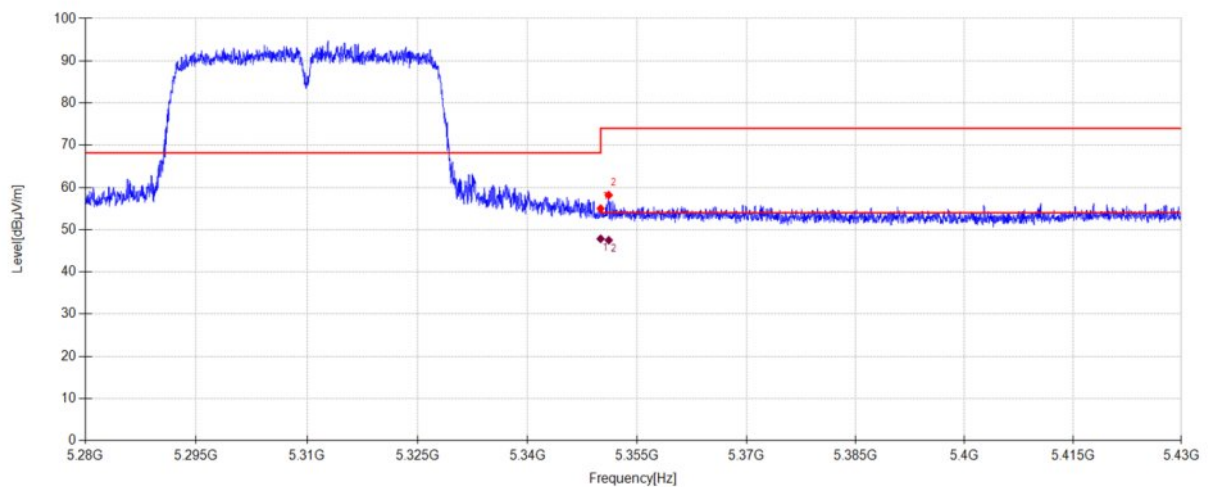

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.75	34.19	6.67	-29.60	55.01	68.20	13.19	PK	Vertical
2	5351.115	46.94	34.19	6.67	-29.60	58.20	74.00	15.80	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	36.59	34.19	6.67	47.85	54.0	6.15	AV	Vertical
2	5351.115	36.24	34.19	6.67	47.50	54.0	6.50	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\85
Memo: Sample Numbler:S25080710-003 Power Setting:-6

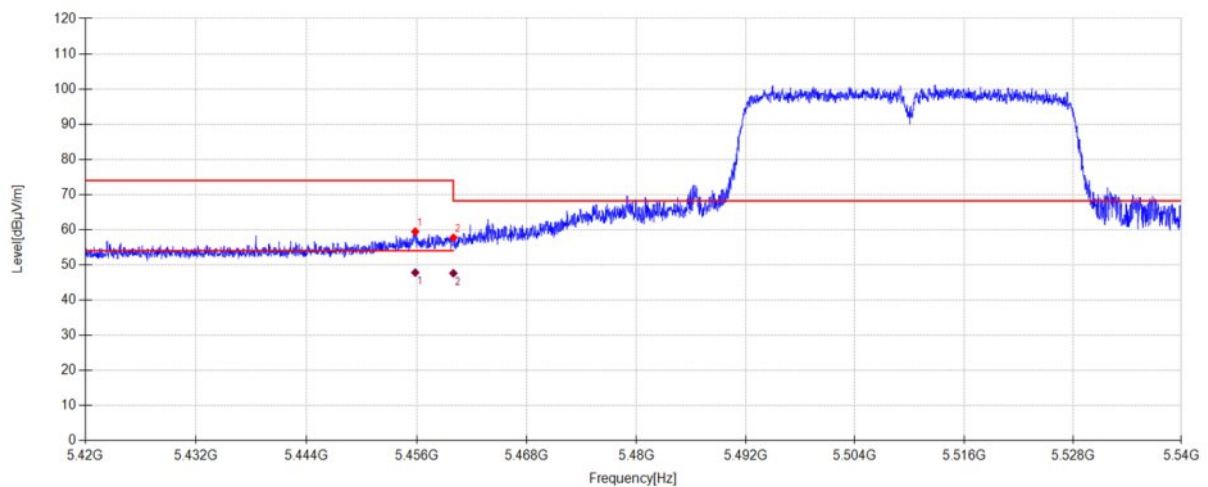

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.844	48.04	34.30	6.72	-29.60	59.46	74.00	14.54	PK	Horizontal
2	5460.000	46.27	34.31	6.73	-29.60	57.71	68.20	10.49	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.844	36.39	34.30	6.72	47.81	54.0	6.19	AV	Horizontal
2	5460.000	36.18	34.31	6.73	47.62	54.0	6.38	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\86
Memo: Sample Numbler:S25080710-003 Power Setting:-6

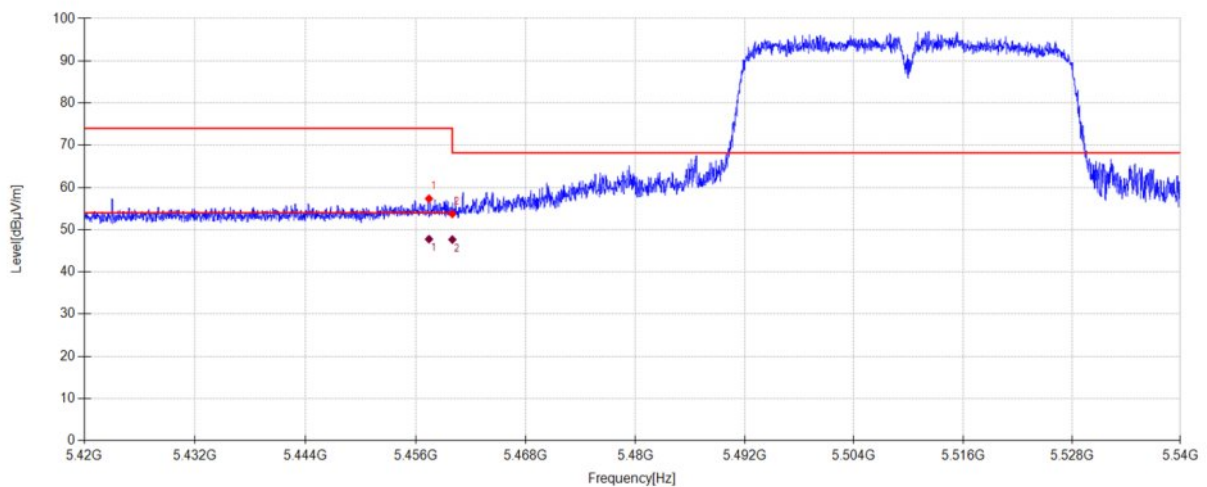

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.452	45.92	34.30	6.72	-29.60	57.34	74.00	16.66	PK	Vertical
2	5460.000	42.30	34.31	6.73	-29.60	53.74	68.20	14.46	PK	Vertical


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.452	36.34	34.30	6.72	47.76	54.0	6.24	AV	Vertical
2	5460.000	36.22	34.31	6.73	47.66	54.0	6.34	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5670MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\87
Memo: Sample Numbler:S25080710-003 Power Setting:-6

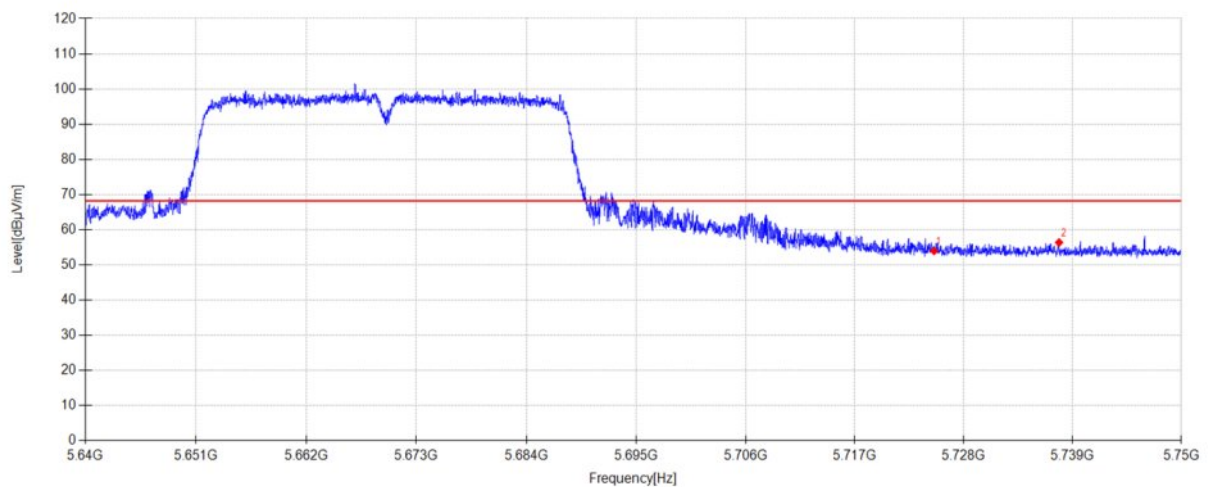


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.09	34.60	6.86	-29.60	53.95	68.20	14.25	PK	Horizontal
2	5737.625	44.50	34.61	6.86	-29.60	56.37	68.20	11.83	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5670MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5G\88
Memo: Sample Numbler:S25080710-003 Power Setting:-6

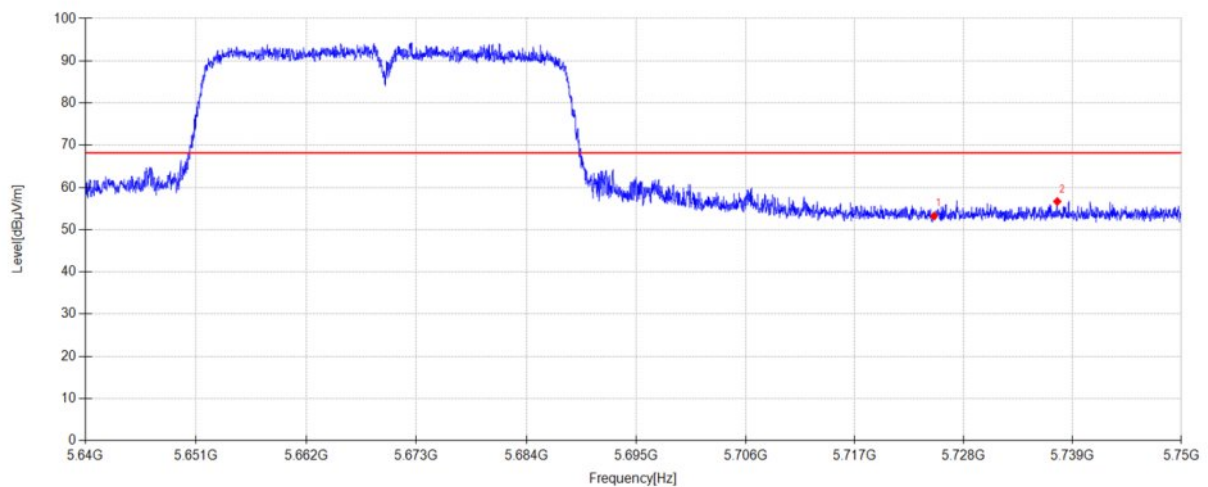


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.40	34.60	6.86	-29.60	53.26	68.20	14.94	PK	Vertical
2	5737.438	44.81	34.61	6.86	-29.60	56.68	68.20	11.52	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5745MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\25
Memo: Sample Numbler:S25080710-003 Power Setting:-2

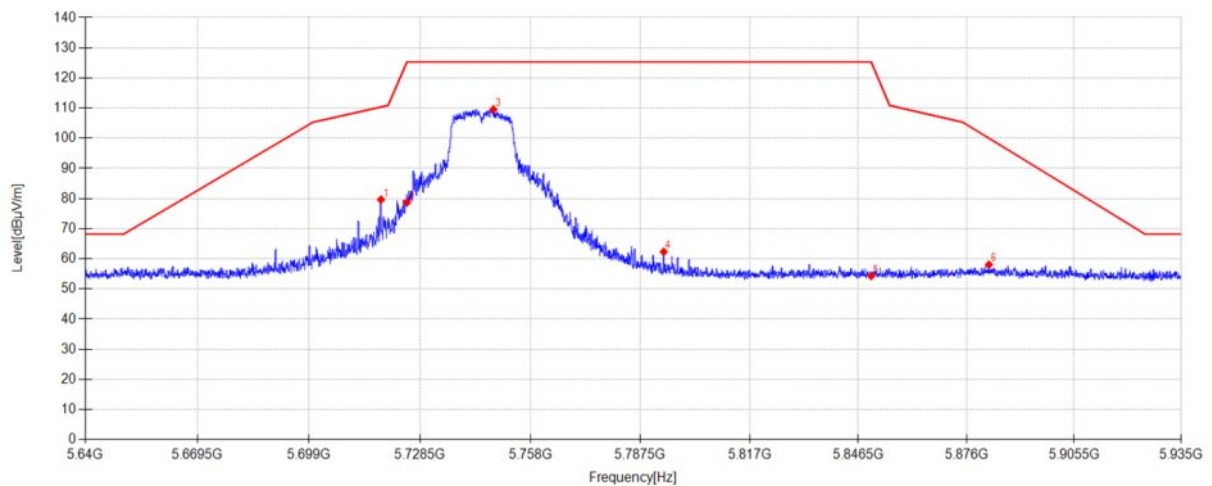


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5718.116	68.64	34.59	6.03	-29.60	79.66	110.37	30.71	PK	Horizontal
2	5725.000	67.66	34.60	6.03	-29.60	78.69	125.30	46.61	PK	Horizontal
3	5748.088	98.51	34.62	6.05	-29.60	109.58	125.30	15.72	PK	Horizontal
4	5793.813	51.19	34.67	6.07	-29.60	62.33	125.30	62.97	PK	Horizontal
5	5850.000	43.09	34.74	6.10	-29.60	54.33	125.30	70.97	PK	Horizontal
6	5882.136	46.79	34.77	6.12	-29.60	58.08	100.01	41.93	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5745MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\26
Memo: Sample Numbel:S25080710-003 Power Setting:-2

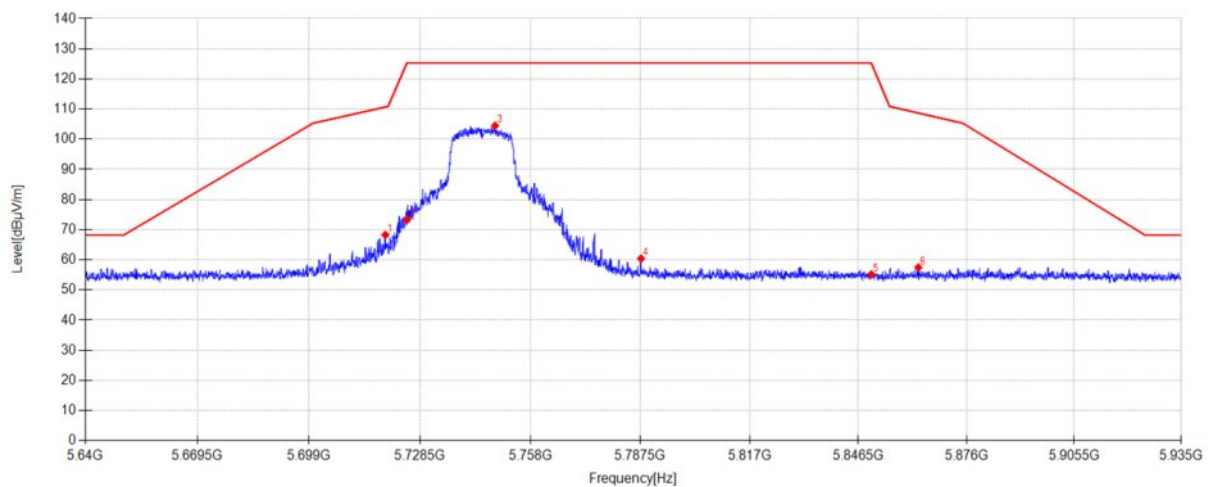


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.267	57.25	34.59	6.03	-29.60	68.27	110.69	42.42	PK	Vertical
2	5725.000	62.28	34.60	6.03	-29.60	73.31	125.30	51.99	PK	Vertical
3	5748.531	93.40	34.62	6.05	-29.60	104.47	125.30	20.83	PK	Vertical
4	5787.707	49.27	34.67	6.07	-29.60	60.41	125.30	64.89	PK	Vertical
5	5850.000	43.93	34.74	6.10	-29.60	55.17	125.30	70.13	PK	Vertical
6	5862.843	46.19	34.75	6.11	-29.60	57.45	108.70	51.25	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\27
Memo: Sample Numbel:S25080710-003 Power Setting:-2

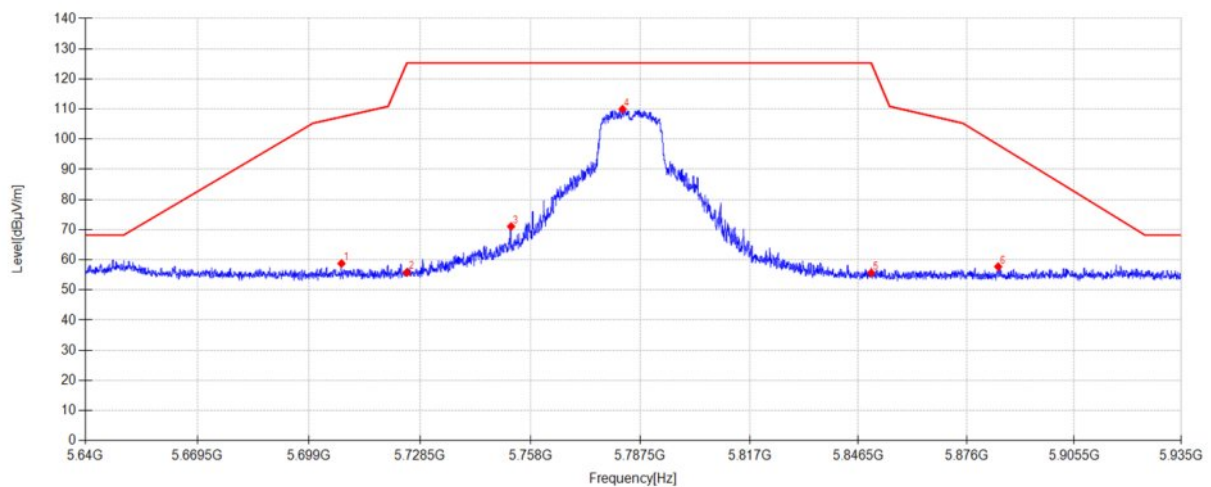


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5707.614	47.78	34.58	6.03	-29.60	58.79	107.43	48.64	PK	Horizontal
2	5725.000	44.77	34.60	6.03	-29.60	55.80	125.30	69.50	PK	Horizontal
3	5752.808	59.99	34.63	6.05	-29.60	71.07	125.30	54.23	PK	Horizontal
4	5782.721	98.84	34.66	6.06	-29.60	109.96	125.30	15.34	PK	Horizontal
5	5850.000	44.42	34.74	6.10	-29.60	55.66	125.30	69.64	PK	Horizontal
6	5884.644	46.47	34.77	6.12	-29.60	57.76	98.14	40.38	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\28
Memo: Sample Numbel:S25080710-003 Power Setting:-2

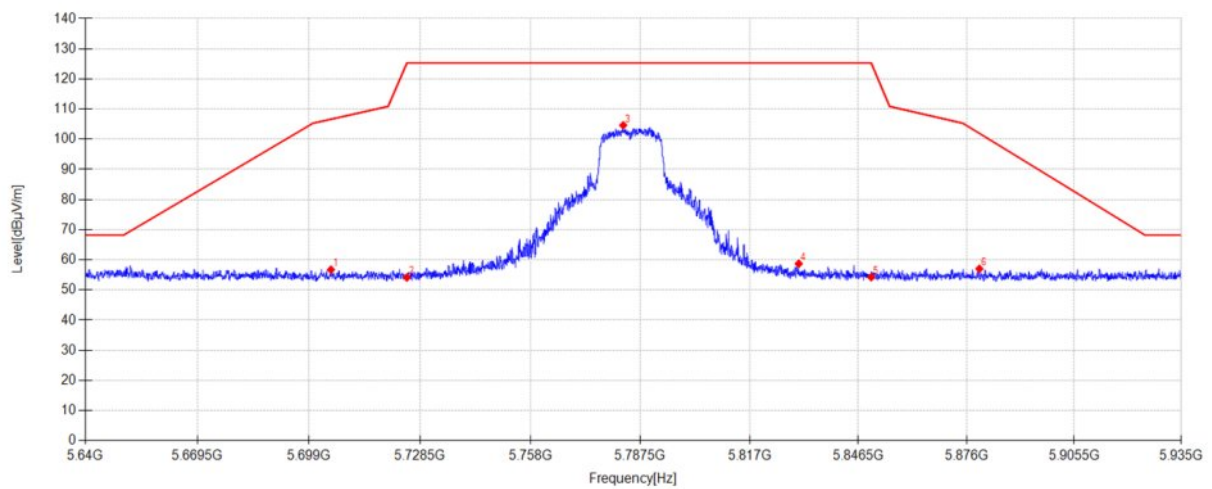


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5704.812	45.75	34.58	6.02	-29.60	56.75	106.65	49.90	PK	Vertical
2	5725.000	43.13	34.60	6.03	-29.60	54.16	125.30	71.14	PK	Vertical
3	5782.898	93.50	34.66	6.06	-29.60	104.62	125.30	20.68	PK	Vertical
4	5830.305	47.53	34.71	6.09	-29.60	58.73	125.30	66.57	PK	Vertical
5	5850.000	43.02	34.74	6.10	-29.60	54.26	125.30	71.04	PK	Vertical
6	5879.511	45.76	34.77	6.12	-29.60	57.05	101.95	44.90	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\29
Memo: Sample Numbel:S25080710-003 Power Setting:-2

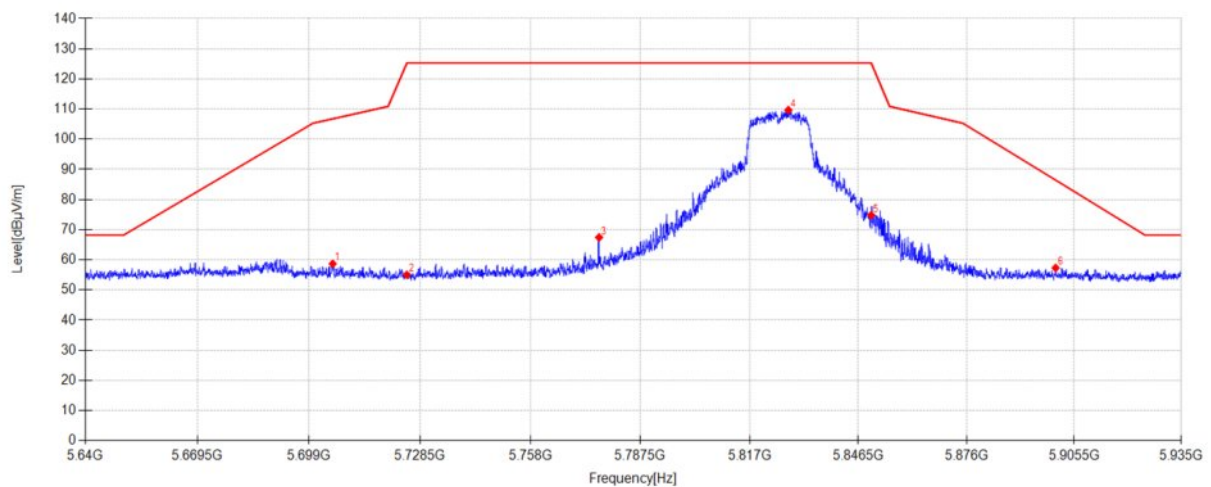


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5705.284	47.71	34.58	6.02	-29.60	58.71	106.78	48.07	PK	Horizontal
2	5725.000	44.00	34.60	6.03	-29.60	55.03	125.30	70.27	PK	Horizontal
3	5776.408	56.33	34.65	6.06	-29.60	67.44	125.30	57.86	PK	Horizontal
4	5827.502	98.48	34.71	6.09	-29.60	109.68	125.30	15.62	PK	Horizontal
5	5850.000	63.58	34.74	6.10	-29.60	74.82	125.30	50.48	PK	Horizontal
6	5900.397	46.01	34.79	6.13	-29.60	57.33	86.46	29.13	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX 11A 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\30
Memo: Sample Numbel:S25080710-003 Power Setting:-2

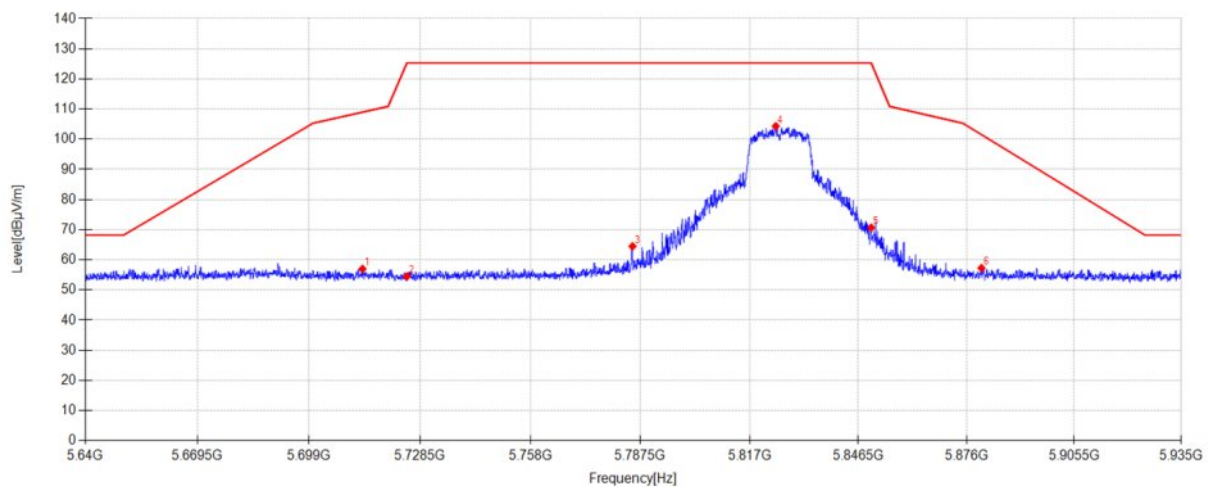


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5713.190	46.00	34.58	6.03	-29.60	57.01	108.99	51.98	PK	Vertical
2	5725.000	43.46	34.60	6.03	-29.60	54.49	125.30	70.81	PK	Vertical
3	5785.406	53.38	34.66	6.07	-29.60	64.51	125.30	60.79	PK	Vertical
4	5824.080	93.13	34.71	6.09	-29.60	104.33	125.30	20.97	PK	Vertical
5	5850.000	59.45	34.74	6.10	-29.60	70.69	125.30	54.61	PK	Vertical
6	5880.071	45.98	34.77	6.12	-29.60	57.27	101.54	44.27	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5745MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\19
Memo: Sample Numbler:S25080710-003 Power Setting:-2

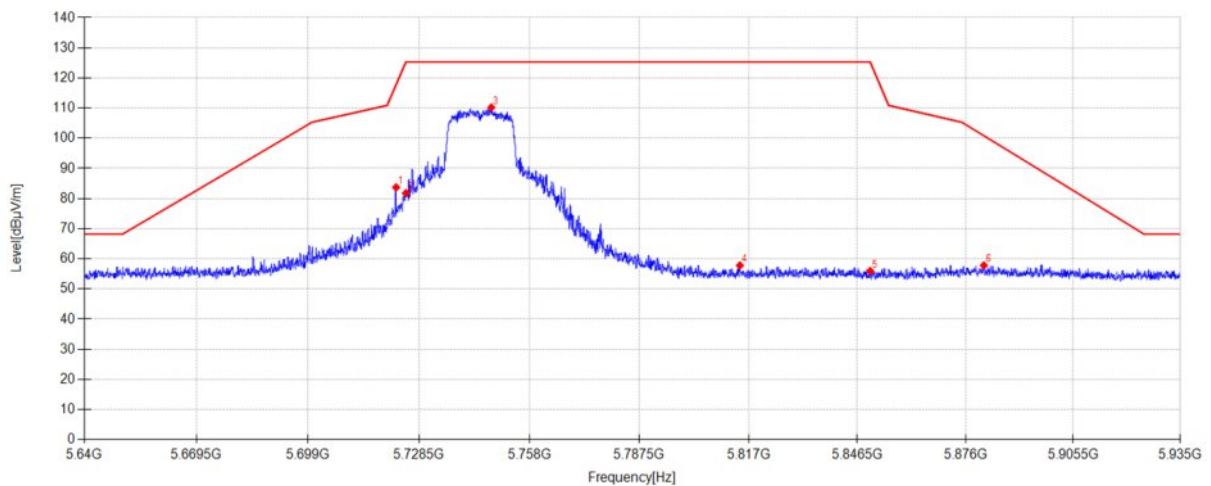


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.394	72.70	34.59	6.03	-29.60	83.72	117.79	34.07	PK	Horizontal
2	5725.000	70.75	34.60	6.03	-29.60	81.78	125.30	43.52	PK	Horizontal
3	5747.793	99.12	34.62	6.05	-29.60	110.19	125.30	15.11	PK	Horizontal
4	5814.640	46.62	34.70	6.08	-29.60	57.80	125.30	67.50	PK	Horizontal
5	5850.000	44.71	34.74	6.10	-29.60	55.95	125.30	69.35	PK	Horizontal
6	5881.015	46.52	34.77	6.12	-29.60	57.81	100.84	43.03	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5745MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\20
Memo: Sample Numbel:S25080710-003 Power Setting:-2

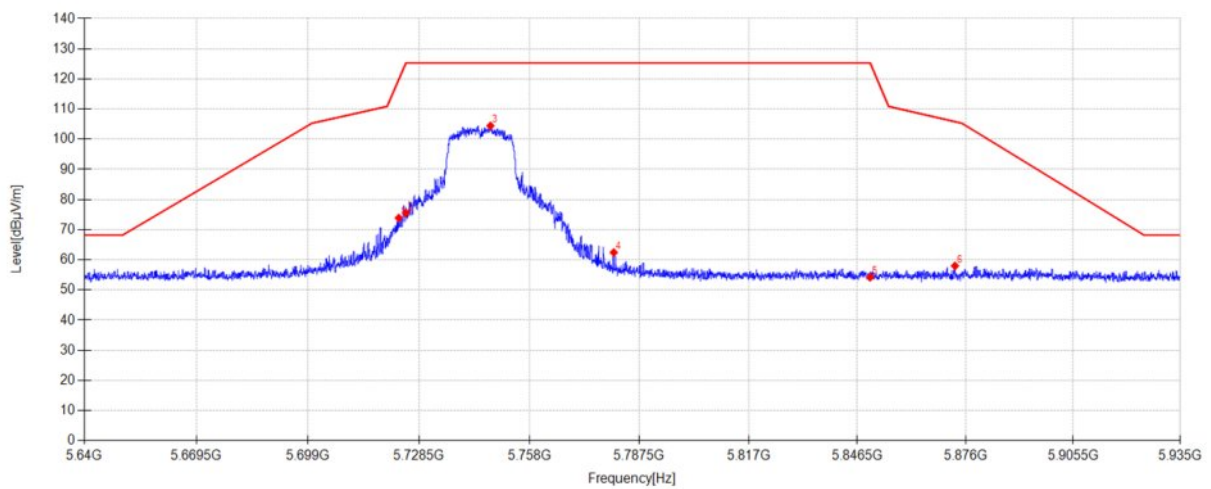


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.102	62.85	34.60	6.03	-29.60	73.88	119.83	45.95	PK	Vertical
2	5725.000	64.54	34.60	6.03	-29.60	75.57	125.30	49.73	PK	Vertical
3	5747.557	93.39	34.62	6.05	-29.60	104.46	125.30	20.84	PK	Vertical
4	5780.627	51.33	34.66	6.06	-29.60	62.45	125.30	62.85	PK	Vertical
5	5850.000	43.00	34.74	6.10	-29.60	54.24	125.30	71.06	PK	Vertical
6	5873.109	46.73	34.76	6.11	-29.60	58.00	105.83	47.83	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\21
Memo: Sample Numbler:S25080710-003 Power Setting:-2

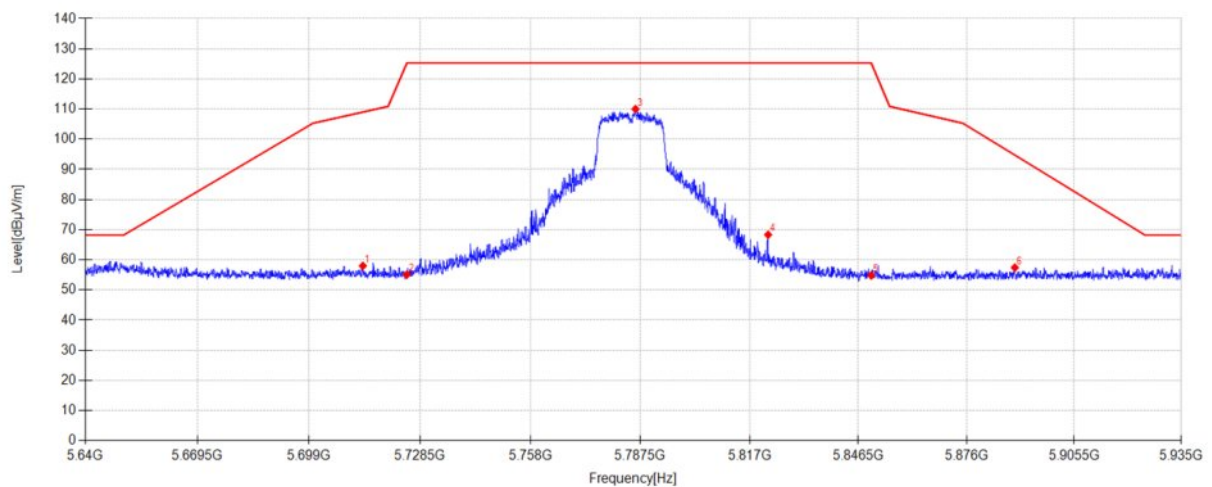


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5713.278	47.00	34.58	6.03	-29.60	58.01	109.02	51.01	PK	Horizontal
2	5725.000	44.05	34.60	6.03	-29.60	55.08	125.30	70.22	PK	Horizontal
3	5786.202	98.87	34.66	6.07	-29.60	110.00	125.30	15.30	PK	Horizontal
4	5822.015	57.15	34.70	6.09	-29.60	68.34	125.30	56.96	PK	Horizontal
5	5850.000	43.56	34.74	6.10	-29.60	54.80	125.30	70.50	PK	Horizontal
6	5889.216	46.14	34.78	6.12	-29.60	57.44	94.75	37.31	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\22
Memo: Sample Numbler:S25080710-003 Power Setting:-2

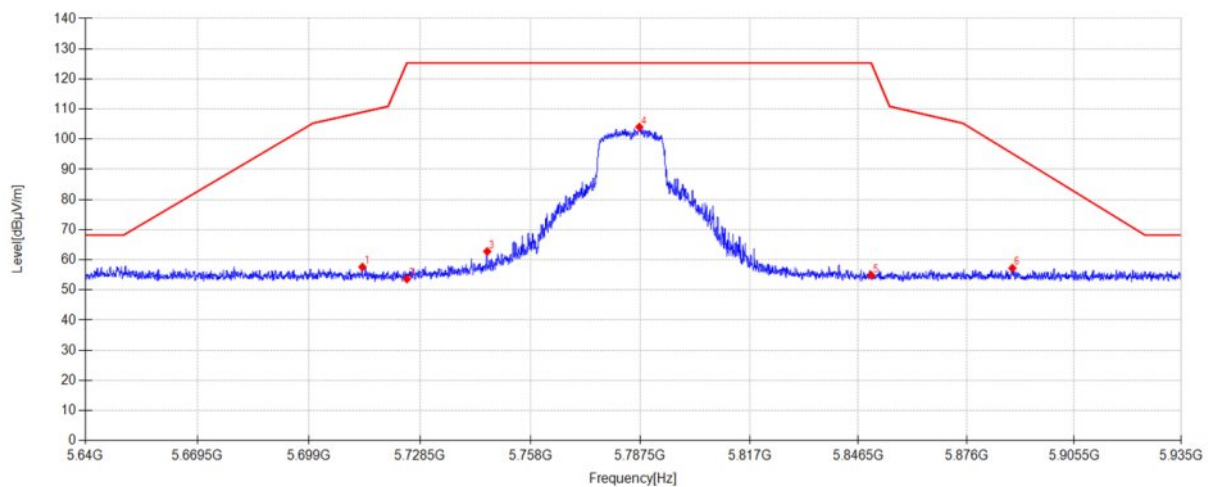


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5713.160	46.61	34.58	6.03	-29.60	57.62	108.98	51.36	PK	Vertical
2	5725.000	42.60	34.60	6.03	-29.60	53.63	125.30	71.67	PK	Vertical
3	5746.436	51.73	34.62	6.05	-29.60	62.80	125.30	62.50	PK	Vertical
4	5787.235	92.92	34.67	6.07	-29.60	104.06	125.30	21.24	PK	Vertical
5	5850.000	43.66	34.74	6.10	-29.60	54.90	125.30	70.40	PK	Vertical
6	5888.538	45.93	34.78	6.12	-29.60	57.23	95.26	38.03	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\23
Memo: Sample Numbel:S25080710-003 Power Setting:-2

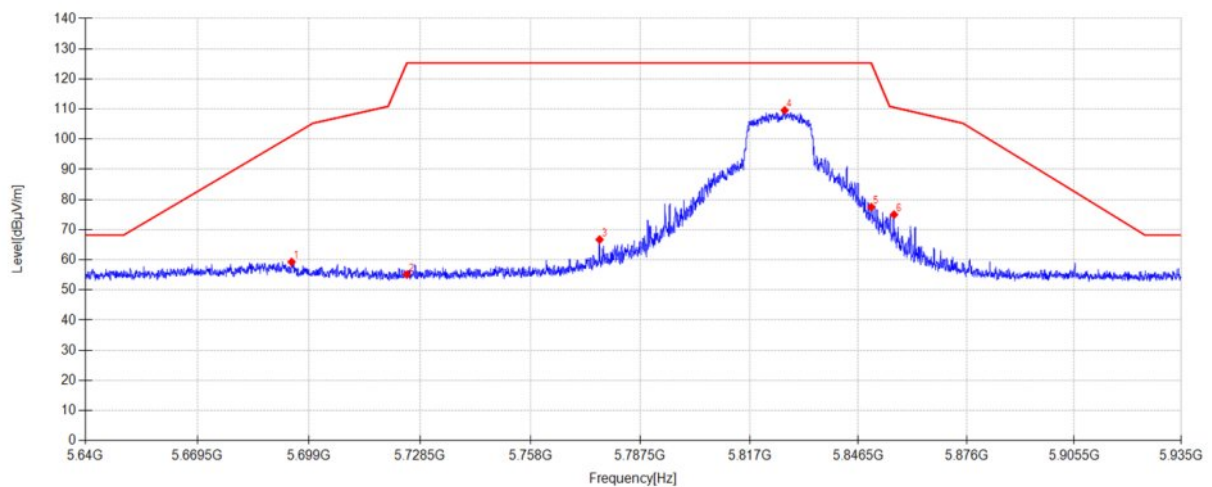


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5694.398	48.30	34.56	6.02	-29.60	59.28	101.14	41.86	PK	Horizontal
2	5725.000	44.11	34.60	6.03	-29.60	55.14	125.30	70.16	PK	Horizontal
3	5776.556	55.59	34.65	6.06	-29.60	66.70	125.30	58.60	PK	Horizontal
4	5826.499	98.39	34.71	6.09	-29.60	109.59	125.30	15.71	PK	Horizontal
5	5850.000	66.26	34.74	6.10	-29.60	77.50	125.30	47.80	PK	Horizontal
6	5856.206	63.78	34.74	6.10	-29.60	75.02	110.56	35.54	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N20 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\24
Memo: Sample Numbel:S25080710-003 Power Setting:-2

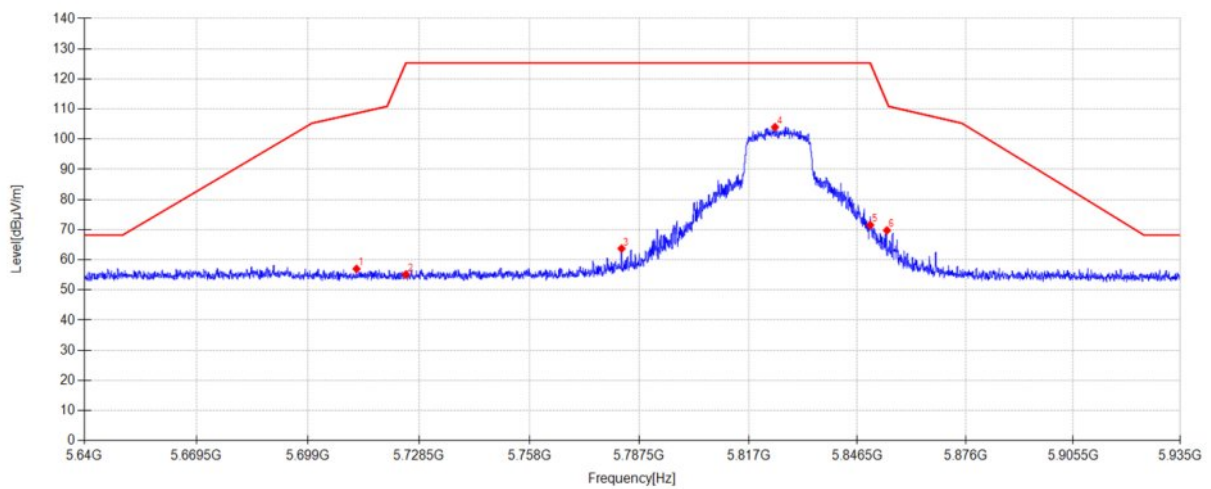


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.862	46.01	34.58	6.03	-29.60	57.02	108.62	51.60	PK	Vertical
2	5725.000	44.09	34.60	6.03	-29.60	55.12	125.30	70.18	PK	Vertical
3	5782.721	52.62	34.66	6.06	-29.60	63.74	125.30	61.56	PK	Vertical
4	5824.139	92.83	34.71	6.09	-29.60	104.03	125.30	21.27	PK	Vertical
5	5850.000	60.32	34.74	6.10	-29.60	71.56	125.30	53.74	PK	Vertical
6	5854.554	58.54	34.74	6.10	-29.60	69.78	112.19	42.41	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5755MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\31
Memo: Sample Numbler:S25080710-003 Power Setting:6

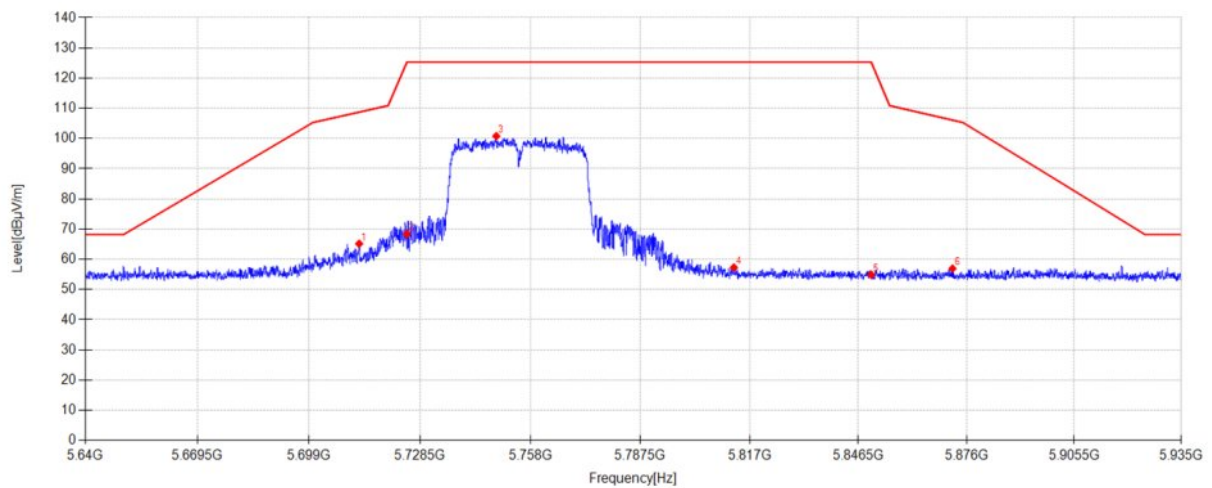


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5712.305	54.15	34.58	6.03	-29.60	65.16	108.75	43.59	PK	Horizontal
2	5725.000	57.33	34.60	6.03	-29.60	68.36	125.30	56.94	PK	Horizontal
3	5748.855	89.73	34.62	6.05	-29.60	100.80	125.30	24.50	PK	Horizontal
4	5812.752	46.12	34.69	6.08	-29.60	57.29	125.30	68.01	PK	Horizontal
5	5850.000	43.67	34.74	6.10	-29.60	54.91	125.30	70.39	PK	Horizontal
6	5872.165	45.67	34.76	6.11	-29.60	56.94	106.09	49.15	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5755MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\32
Memo: Sample Numbler:S25080710-003 Power Setting:6

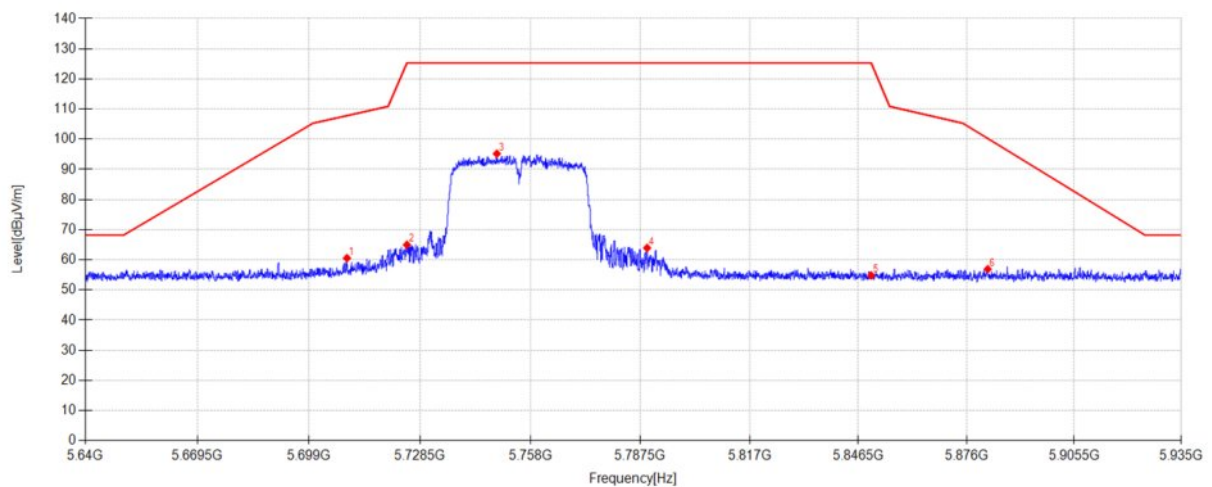


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5709.060	49.57	34.58	6.03	-29.60	60.58	107.84	47.26	PK	Vertical
2	5725.000	53.95	34.60	6.03	-29.60	64.98	125.30	60.32	PK	Vertical
3	5749.003	84.14	34.62	6.05	-29.60	95.21	125.30	30.09	PK	Vertical
4	5789.329	52.81	34.67	6.07	-29.60	63.95	125.30	61.35	PK	Vertical
5	5850.000	43.58	34.74	6.10	-29.60	54.82	125.30	70.48	PK	Vertical
6	5881.782	45.63	34.77	6.12	-29.60	56.92	100.27	43.35	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5795MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\33
Memo: Sample Numbler:S25080710-003 Power Setting:6

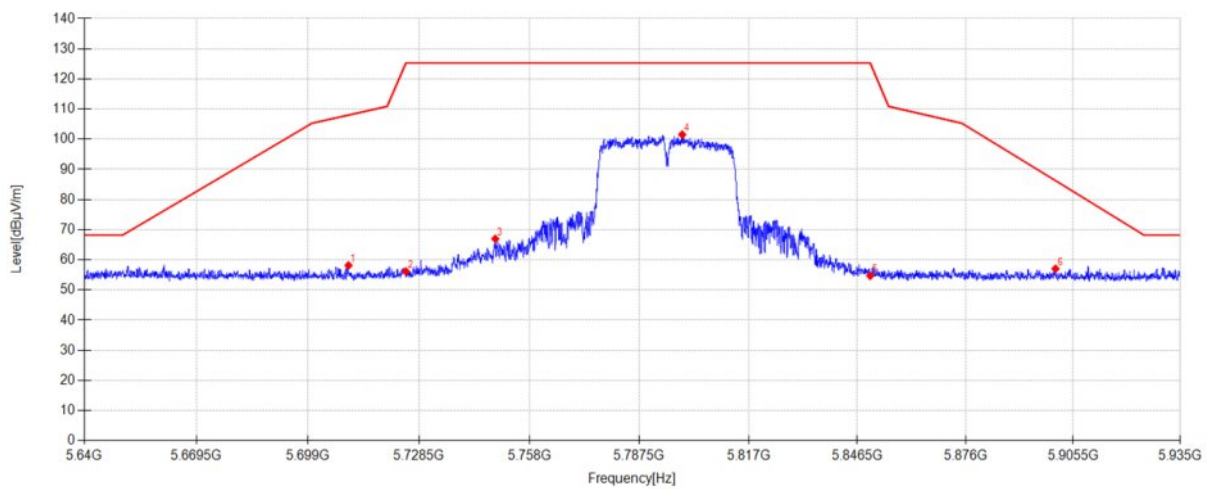


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5709.738	47.14	34.58	6.03	-29.60	58.15	108.03	49.88	PK	Horizontal
2	5725.000	45.13	34.60	6.03	-29.60	56.16	125.30	69.14	PK	Horizontal
3	5748.855	55.92	34.62	6.05	-29.60	66.99	125.30	58.31	PK	Horizontal
4	5799.064	90.41	34.68	6.07	-29.60	101.56	125.30	23.74	PK	Horizontal
5	5850.000	43.46	34.74	6.10	-29.60	54.70	125.30	70.60	PK	Horizontal
6	5900.633	45.74	34.79	6.13	-29.60	57.06	86.28	29.22	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-09-09 **Tested By:** Nan Zhong
EUT: Dreame NAVO Care SE 1 Incam **Model Number:** A121
Test Mode: TX N40 5795MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25080710-4E\FCC ABOVE1G 5.8G\34
Memo: Sample Numbler:S25080710-003 Power Setting:6

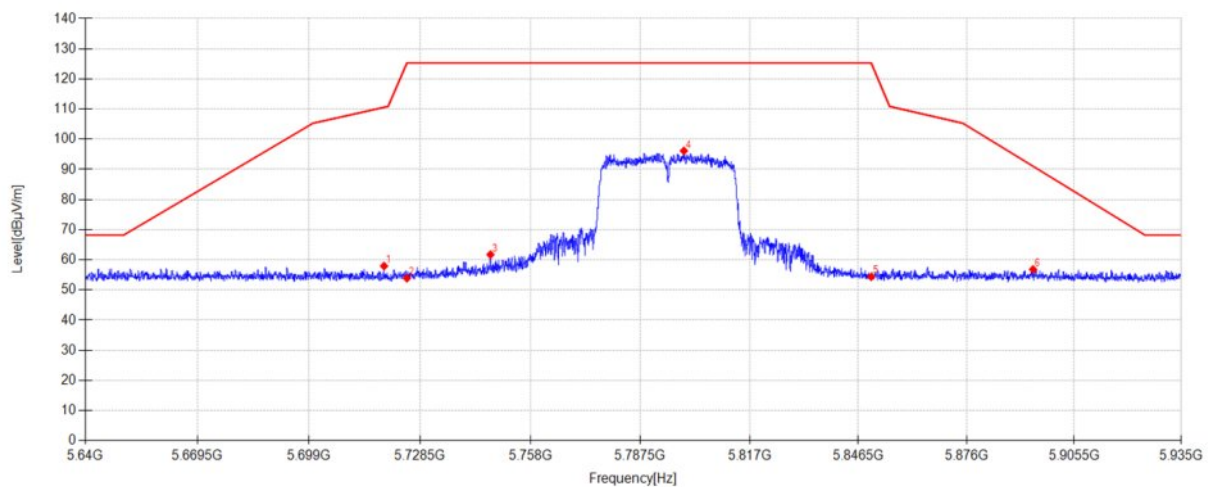

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5718.913	46.92	34.59	6.03	-29.60	57.94	110.60	52.66	PK	Vertical
2	5725.000	42.86	34.60	6.03	-29.60	53.89	125.30	71.41	PK	Vertical
3	5747.292	50.69	34.62	6.05	-29.60	61.76	125.30	63.54	PK	Vertical
4	5799.241	84.99	34.68	6.07	-29.60	96.14	125.30	29.16	PK	Vertical
5	5850.000	43.15	34.74	6.10	-29.60	54.39	125.30	70.91	PK	Vertical
6	5894.202	45.52	34.78	6.12	-29.60	56.82	91.05	34.23	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Appendix A.10: Test Results of Dynamic Frequency Selection (DFS)


Radar Waveform Calibration Result:

TestMode	Frequency[MHz]	Radar Type	Result	Limit[dbm]	Verdict
11N40SISO	5270	Type0	-60.26	-59.96	PASS
		Type1	-60.18	-59.96	PASS
		Type2	-60.10	-59.96	PASS
		Type3	-60.32	-59.96	PASS
		Type4	-60.04	-59.96	PASS
		Type5	-60.40	-59.96	PASS
		Type6	-60.15	-59.96	PASS


11N40SISO_5270_Type0

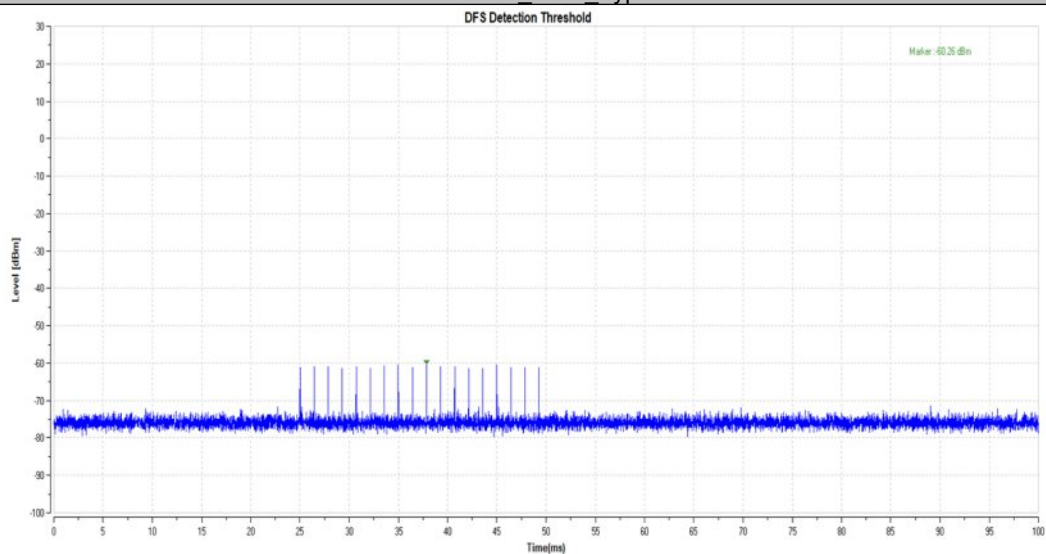


11N40SISO_5270_Type1

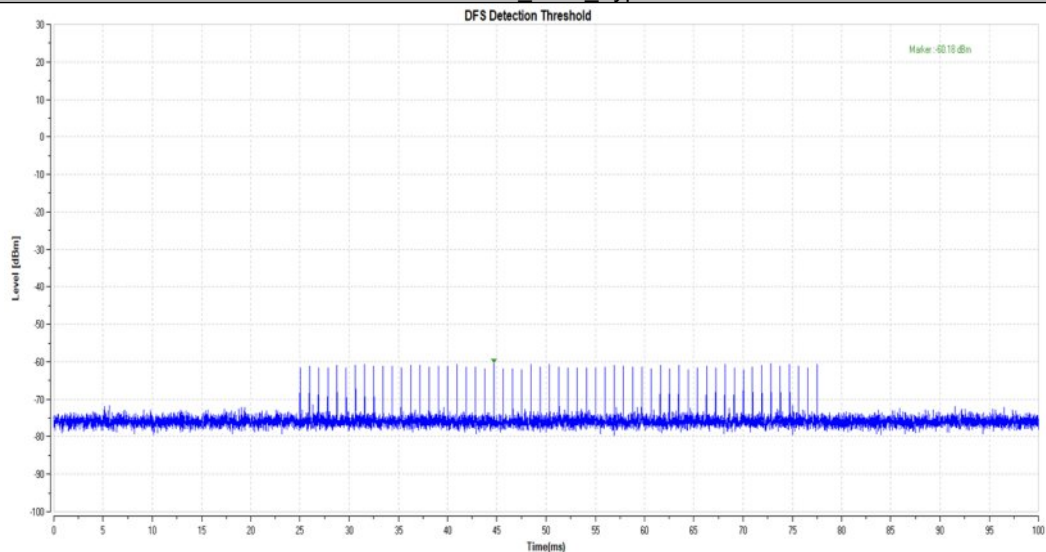


11N40SISO_5270_Type2

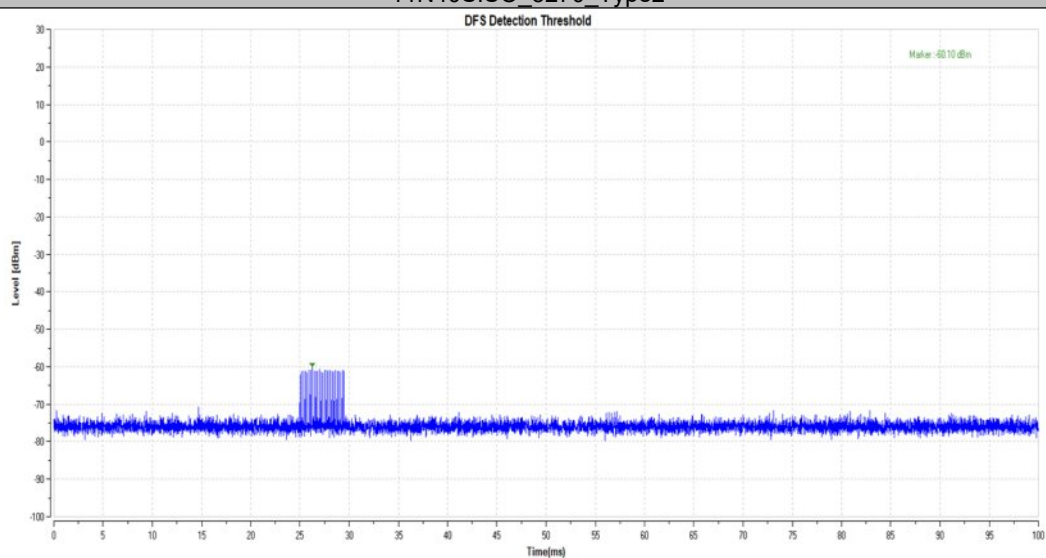


11N40SISO_5270_Type3

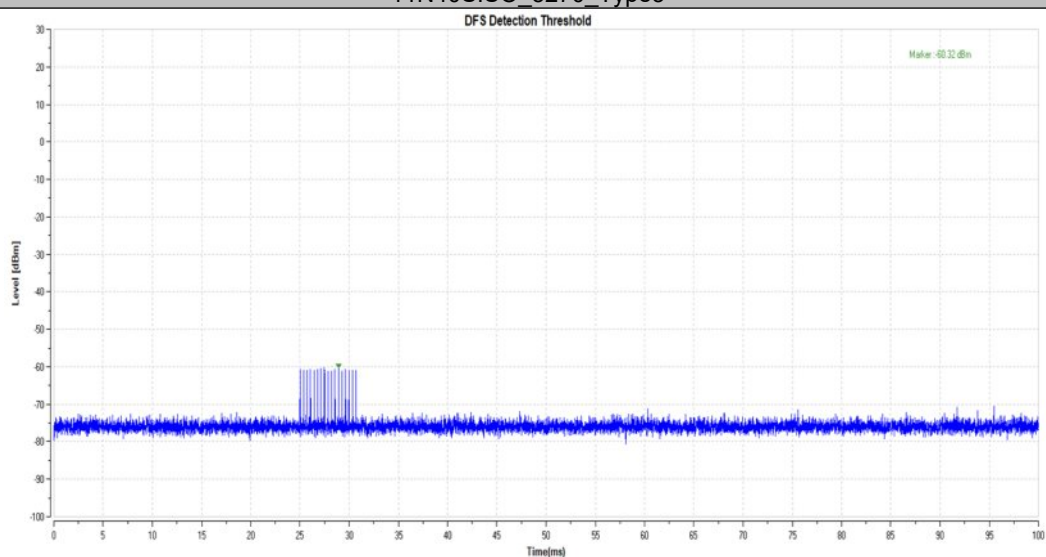


11N40SISO_5270_Type4

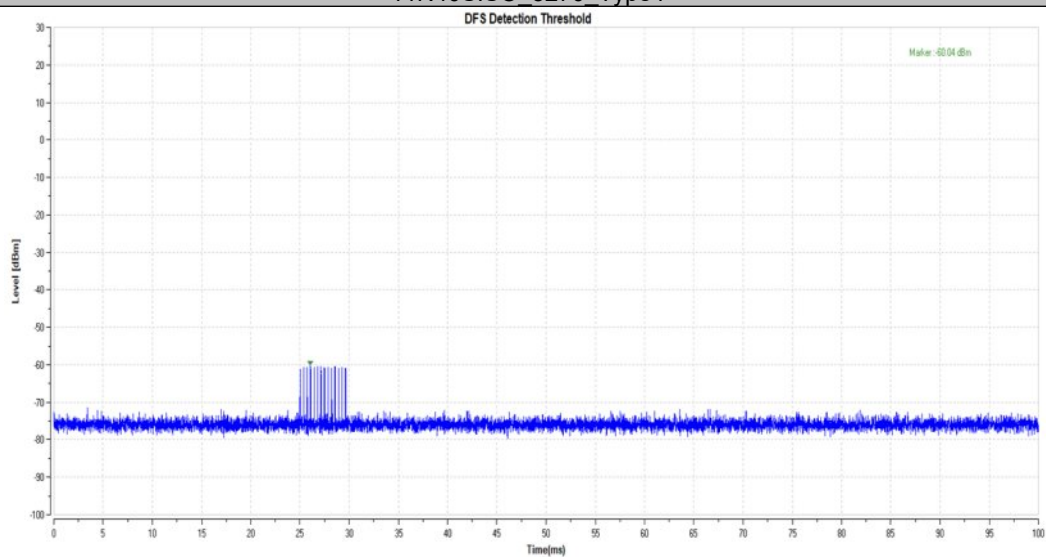

11N40SISO_5270_Type5

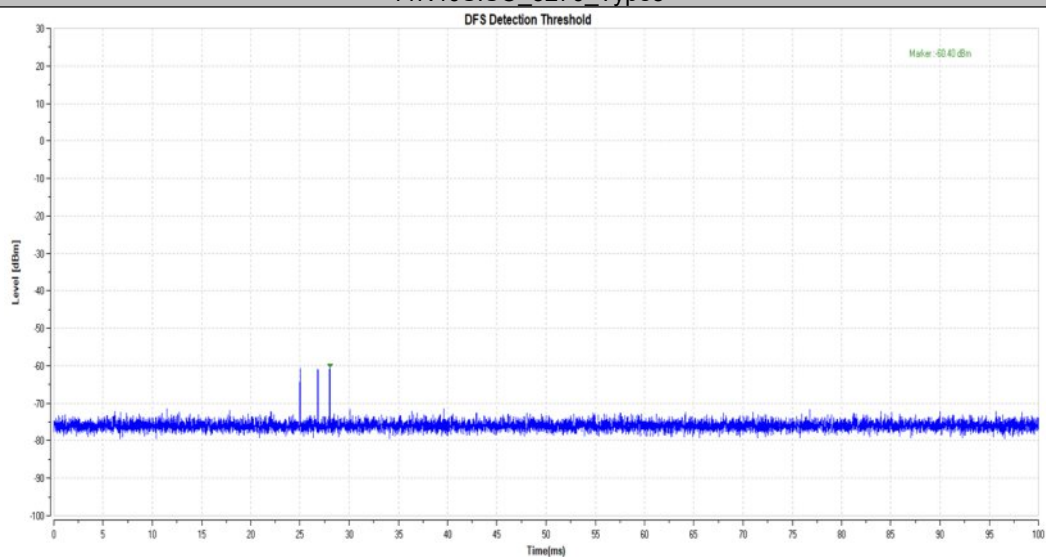


11N40SISO_5270_Type6

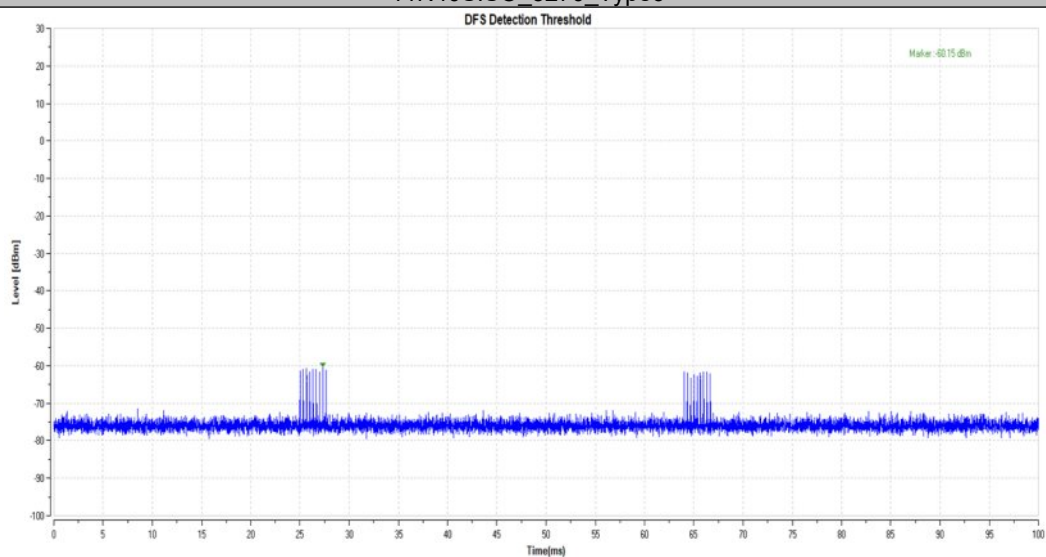

Channel Move Time and Channel Closing Transmission Time


TestMode	Frequency[MHz]	CCTT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11N40SISO	5270	200+44.2	200+60	1233.4	10000	PASS

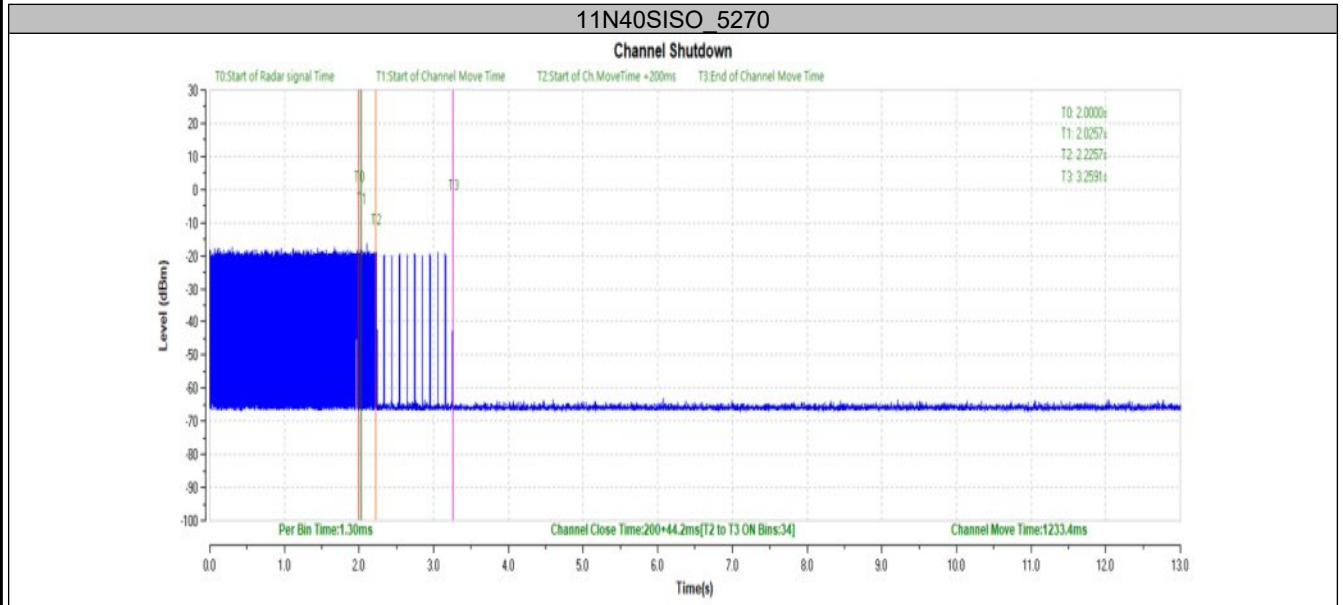

Appendix A.11: Test Results of Conducted Emissions on AC Mains

Test Site : DDT 5# Shield Room
Test Date : 2025-09-12
EUT : Dreame NAVO Care SE 1 Incam
Power Supply : AC 120V/60Hz
Condition : Temp:22.3°C,Humi:51.5%
Memo : S25080710-008

D:\2025 report data\Q25080710-4E\0912 CE.EM6
Tested By : Li Xiongbin
Model Number : A121
Test Mode : 5G WIFI Mode
LISN : 2025 2# 216/LINE

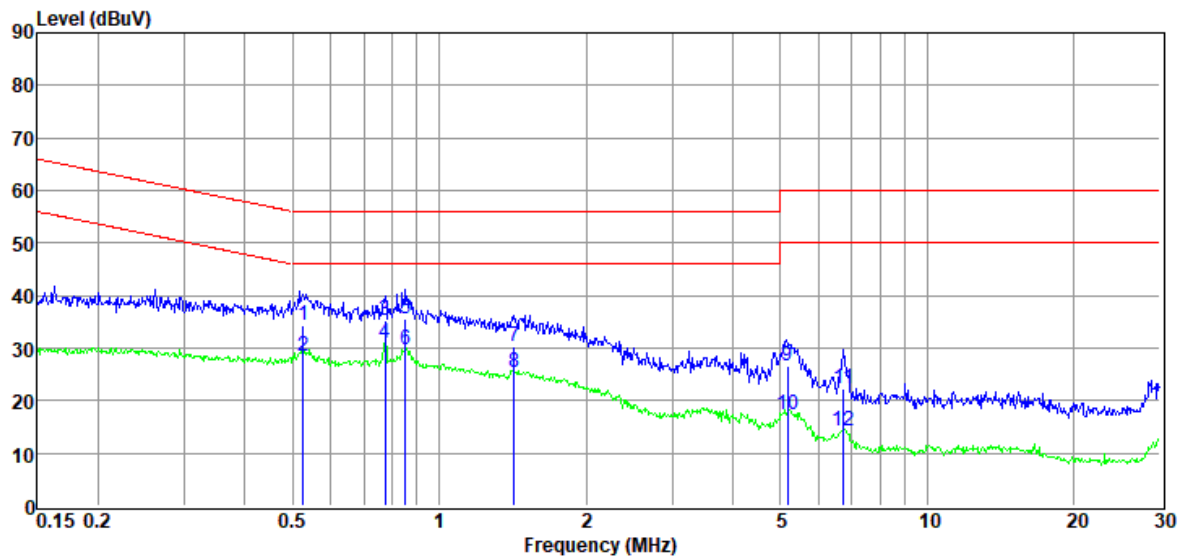


Data: 10

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.53	14.45	9.49	0.10	10.33	34.37	56.00	21.63	QP	LINE
2	0.53	8.54	9.49	0.10	10.33	28.46	46.00	17.54	Average	LINE
3	0.78	15.19	9.51	0.14	10.37	35.21	56.00	20.79	QP	LINE
4	0.78	10.95	9.51	0.14	10.37	30.97	46.00	15.03	Average	LINE
5	0.85	15.46	9.51	0.15	10.38	35.50	56.00	20.50	QP	LINE
6	0.85	9.72	9.51	0.15	10.38	29.76	46.00	16.24	Average	LINE
7	1.43	10.20	9.50	0.19	10.39	30.28	56.00	25.72	QP	LINE
8	1.43	5.14	9.50	0.19	10.39	25.22	46.00	20.78	Average	LINE
9	5.17	6.63	9.54	0.24	10.25	26.66	60.00	33.34	QP	LINE
10	5.17	-2.81	9.54	0.24	10.25	17.22	50.00	32.78	Average	LINE
11	6.73	2.13	9.55	0.25	10.21	22.14	60.00	37.86	QP	LINE
12	6.73	-5.85	9.55	0.25	10.21	14.16	50.00	35.84	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site : DDT 5# Shield Room **D:\2025 report data\Q25080710-4E\0912 CE.EM6**
Test Date : 2025-09-12 **Tested By** : Li Xiongbín
EUT : Dreame NAVO Care SE 1 Incam **Model Number** : A121
Power Supply : AC 120V/60Hz **Test Mode** : 5G WIFI Mode
Condition : Temp:22.3°C,Humi:51.5% **LISN** : 2025 2# 216/NEUTRAL
Memo : S25080710-008

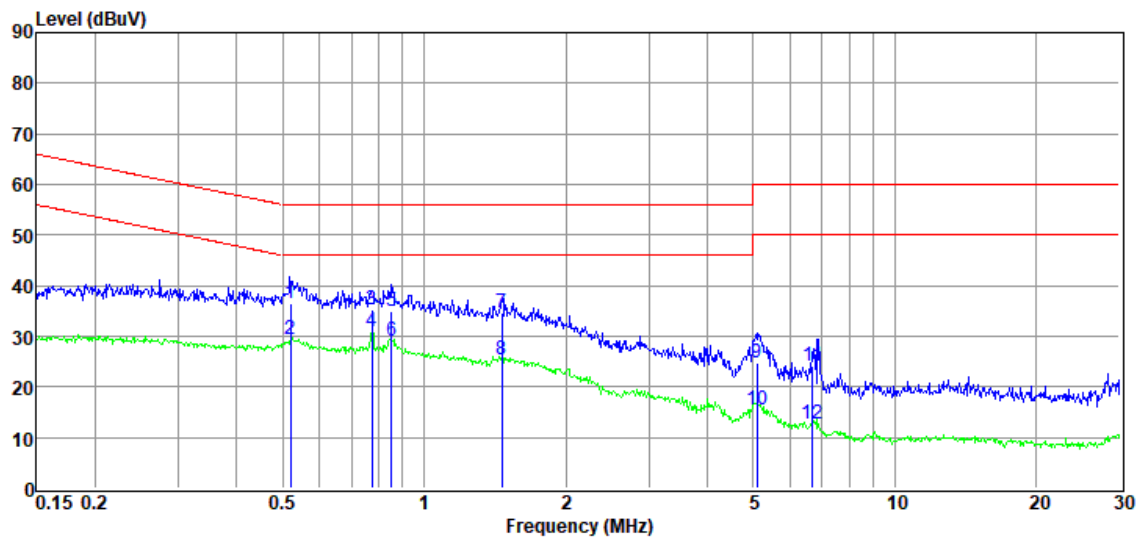

Data: 12

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.52	16.59	9.48	0.10	10.32	36.49	56.00	19.51	QP	NEUTRAL
2	0.52	9.43	9.48	0.10	10.32	29.33	46.00	16.67	Average	NEUTRAL
3	0.78	15.26	9.48	0.14	10.37	35.25	56.00	20.75	QP	NEUTRAL
4	0.78	10.80	9.48	0.14	10.37	30.79	46.00	15.21	Average	NEUTRAL
5	0.85	15.04	9.48	0.15	10.38	35.05	56.00	20.95	QP	NEUTRAL
6	0.85	8.96	9.48	0.15	10.38	28.97	46.00	17.03	Average	NEUTRAL
7	1.46	14.50	9.50	0.19	10.39	34.58	56.00	21.42	QP	NEUTRAL
8	1.46	5.21	9.50	0.19	10.39	25.29	46.00	20.71	Average	NEUTRAL
9	5.09	4.79	9.54	0.24	10.26	24.83	60.00	35.17	QP	NEUTRAL
10	5.09	-4.51	9.54	0.24	10.26	15.53	50.00	34.47	Average	NEUTRAL
11	6.70	4.06	9.57	0.25	10.21	24.09	60.00	35.91	QP	NEUTRAL
12	6.70	-7.33	9.57	0.25	10.21	12.70	50.00	37.30	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.