

TEST REPORT

Product Name : Dreame NAVO Care SE 1 OutCam
Model Number : A321
FCC ID : 2AXGD-A321
IC : 26444-A321

Prepared for : Dreame Trading (Tianjin) Co.,Ltd.
Address : Room 2112-1-1, South District, Finance and Trade Center,
No.6975 Yazhou Road, Dongjiang Bonded Port Area,
Tianjin Pilot Free Trade Zone, 300463 Tianjin, P.R. China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2601200221W00501R
Date(s) of Tests : January 21, 2026 to February 2, 2026
Date of issue : February 2, 2026

Table of Contents

1 TEST RESULT CERTIFICATION	3
2 EUT TECHNICAL DESCRIPTION	5
3 SUMMARY OF TEST RESULT	6
4 TEST METHODOLOGY	7
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2 MEASUREMENT EQUIPMENT USED	7
4.3 DESCRIPTION OF TEST MODES	8
5 FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES	9
5.2 EQUIPMENT	9
5.3 LABORATORY ACCREDITATIONS AND LISTINGS	9
6 TEST SYSTEM UNCERTAINTY	10
7 SETUP OF EQUIPMENT UNDER TEST	11
7.1 RADIO FREQUENCY TEST SETUP 1	11
7.2 RADIO FREQUENCY TEST SETUP 2	11
7.3 CONDUCTED EMISSION TEST SETUP	14
7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	15
7.5 SUPPORT EQUIPMENT	15
8 TEST REQUIREMENTS	16
8.1 ON TIME AND DUTY CYCLE	16
8.2 DTS 6DB BANDWIDTH	17
8.3 DTS 99% BANDWIDTH	25
8.4 MAXIMUM PEAK CONDUCTED OUTPUT POWER	32
8.5 MAXIMUM POWER SPECTRAL DENSITY	46
8.6 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	48
8.7 RADIATED SPURIOUS EMISSION	61
8.8 CONDUCTED EMISSIONS TEST	91
8.9 ANTENNA APPLICATION	94

1 TEST RESULT CERTIFICATION

Applicant : Dreame Trading (Tianjin) Co.,Ltd.
Address : Room 2112-1-1, South District, Finance and Trade Center, No.6975 Yazhou Road, Dongjiang Bonded Port Area, Tianjin Pilot Free Trade Zone, 300463 Tianjin, P.R. China
Manufacturer : Dreame Trading (Tianjin) Co.,Ltd.
Address : Room 2112-1-1, South District, Finance and Trade Center, No.6975 Yazhou Road, Dongjiang Bonded Port Area, Tianjin Pilot Free Trade Zone, 300463 Tianjin, P.R. China
EUT : Dreame NAVO Care SE 1 OutCam
Model Name : A321
Trademark : DREAME

Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 , Subpart J FCC 47 CFR Part 15, Subpart C	PASS
IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 4(07-2025)	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2020) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247, IC RSS-247 Issue 4 and IC RSS-GEN, Issue 5.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : January 21, 2026 to February 2, 2026

Prepared by : 
Yu Xiaolan/Editor

Reviewer : 
Xia lilu /Supervisor

Approve & Authorized Signer : 
Wang li/Manager



Modified History

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2601200221W00501R	February 2, 2026	Original Report



2 EUT TECHNICAL DESCRIPTION

Product:	Dreame NAVO Care SE 1 OutCam
Model Number:	A321
Sample number:	2#
Device Type:	Bluetooth V5.0
Data Rate :	125 Kbps, 500 Kbps, 1 Mbps, 2 Mbps
Modulation:	GFSK
Operating Frequency Range:	2402-2480MHz
Number of Channels:	40 Channels
Antenna Information:	Type: Internal Antenna Gain: 1.61 dBi Note: The antenna information provided by the manufacturer will have a certain impact on the test results.
Power Supply:	USB Input: 5V/1A 5V from Solar Panel 3.7V from Internal Li-ion Battery
HVIN:	A321
FVIN:	V1.0.0
Temperature Range:	-20° C to 50° C

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	IC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 15.407 (e) 2.1049	RSS-247 clause 7.3.4.2 RSS-Gen 6.7	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	RSS-247 clause 7.3.2.2 RSS-247 clause 7.3.3.2 RSS-247 clause 7.3.4.3	Maximum Conducted Output Power	PASS	
15.407 (a)	RSS-247 clause 7.3.1.2 RSS-247 clause 7.3.2.2 RSS-247 clause 7.3.3.2 RSS-247 clause 7.3.4.3	PeakPower Spectral Density	PASS	
15.407 (b) 15.209 15.205	RSS-247 clause 7.3.1.3 RSS-247 clause 7.3.2.3 RSS-247 clause 7.3.3.3 RSS-247 clause 7.3.4.4 RSS-Gen 8.9 RSS-Gen 8.10 RSS-Gen 6.13	RadiatedSpurious Emission	PASS	
15.207	RSS-Gen 8.8	Power Line Conducted Emission	PASS	
15.407(a) 15.203	RSS-Gen 6.8	Antenna Application	PASS	
NOTE1:N/A (Not Applicable) NOTE2:According to FCC OET KDB 789033, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.				

RELATED SUBMITTAL(S)/GRANT(S):

This submittal(s) (test report) is intended for **FCC ID:2AXGD-A321** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

This submittal(s) (test report) is intended for **IC:26444-A321** filing to comply with RSS-247 Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021)

IC RSS-247 Issue 4(07-2025)

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

Conducted Emission Test Equipment:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Test Receiver	Rohde & Schwarz	ESCI	101384	2025/5/9	1 Year
L.I.S.N.	Rohde & Schwarz	ENV216	101161	2025/5/9	1 Year
L.I.S.N.	Kyoritsu	KNW-407	8-1492-9	2025/5/10	1 Year

For Spurious Emissions Test:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Pre-Amplifier	Bonn	BLMA 011001N	2213967A	2025/10/16	1 Year
EMI Test Receiver	Rohde & Schwarz	ESR7	102551	2025/10/16	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163142	2024/7/8	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1198	2025/5/13	2 Year
Pre-Amplifier	Bonn	BLMA 0118-5G	2213967B-01	2025/10/16	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101290	2025/10/16	1 Year
Coaxial Cable	TIMES	NmNm-7-C15702	N/A	2025/5/22	1 Year
Coaxial Cable	TIMES	HF290-NMSM-6.5M	N/A	2025/5/22	1 Year
Coaxial Cable	TIMES	LMR-240 N-N	N/A	2025/5/22	1 Year
Wideband Radio Communication Tester	R&S	CMW500	171168	2025/9/9	1 Year

For other test items:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wideband Radio Communication Tester	R&S	CMW500	171168	2025/9/9	1 Year
Frequency Extender	R&S	CMW-Z800A	100430	2025/9/9	1 Year
Spectrum Analyzer	R&S	FSV3044	101289	2025/12/17	1 Year
Analog Signal Generator	R&S	SMB100A	183237	2025/9/9	1 Year
Vector Signal Generator	R&S	SMM100A	101808	2025/9/9	1 Year
RF Control Unit	Tonscend	JS0806-2	22C8060567	2025/9/9	1 Year
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	2025/5/10	1 Year

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (Bluetooth DTS:125 Kbps, 500 Kbps,1 Mbps, 2 Mbps) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth DTS:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	19	2440	...	...
1	2404	20	2442	37	2476
2	2406	21	2444	38	2478
...	...	...	...	39	2480
Note: $f_c = 2402\text{MHz} + k \times 1\text{MHz}$ $k=1$ to 39					

Test Frequency and channel for Bluetooth DTS:

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	19	2440	39	2480

Power Level Setting:

GFSK	125 Kbps	11
	500 Kbps	11
	1 Mbps	11
	2 Mbps	11

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (Shenzhen) Co., Ltd.

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.	Accredited by CNAS The Certificate Registration Number is L2291. The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017) Accredited by FCC Designation Number: CN1204 Test Firm Registration Number: 882943 Accredited by A2LA The Certificate Number is 4321.01. Accredited by Industry Canada The Conformity Assessment Body Identifier is CN0008
Name of Firm	: EMTEK (SHENZHEN) CO., LTD.
Site Location	: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Test Parameter	Measurement Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2020 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Measurements shall be taken, using the following steps, at a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment (see RSS-Gen for applicable versions of ANSI and CISPR standards).

(1) Line the ground plane with absorbers between the transmitter and the receive antenna to minimize reflections. The absorbers used should have a minimum-rated attenuation of 20 dB through the measurement frequency range of interest. The absorbers shall be positioned to replicate the layout used when compliance with the applicable acceptability criterion was achieved, as set forth in the aforementioned standards on site validation.

(2) Set the height of the receive antenna to 1.5 m. The receive antenna must be one that was designed and fabricated to operate over the entire frequency range of interest, for example, an appropriate standard gain horn.

(3) The distance between the receive antenna and the radiating source shall be sufficient in order to ensure far-field conditions.

(4) Mount the transmitter at a height of 1.5 m.

(5) Configure the device under test (DUT) to produce the maximum power spectral density as measured while assessing compliance with Section 6.2.2 (i.e. channel frequency, modulation type and data rate). If the DUT is equipped with a detachable antenna and the antenna is intended for remote installation (i.e.

tower-mounted), the DUT may be substituted with a suitable signal generator. The level and frequency settings on the generator shall be set so as to reproduce the maximum power spectral density, measured within a 1 MHz bandwidth, obtained while assessing compliance to Section 6.2.2.

(6) Position the transmitter or the radiating antenna so that elevation pattern measurements can be taken.

(7) Find the 0° reference point in the horizontal plane.

(8) Care should be taken when positioning the receive antenna to avoid cross-polarization. Antennas of known mounting polarization should be assessed with the receive antenna oriented in the same polarity. If the polarization of the transmit antenna is unknown or the transmit antenna can be mounted in either polarization, e.i.r.p. measurements should be performed to find which mounting polarity provides the highest e.i.r.p. value. Testing shall be carried out with the receive antenna and the DUT mounted in each polarity.

(9) The emission shall be centred on the display of the spectrum analyzer with the following settings:

i. If the power spectral density of the DUT was assessed with a peak detector and the antenna cannot be detached from the DUT, the spectrum analyzer shall be set to a peak detector with a resolution bandwidth and video bandwidth of 1 MHz.

ii. If the power spectral density of the DUT was assessed using a sample detector with power averaging and the antenna cannot be detached from the DUT, the spectrum analyzer shall be set to a sample detector, configured to produce 100 power averages and set with a resolution bandwidth, as well as a video bandwidth of 1 MHz.

iii. If the antenna can be detached from the DUT, a continuous wave (CW) signal equal to that of the power spectral density measurement may be used, the spectrum analyzer shall be set to peak detector with a resolution bandwidth and video bandwidth of 1 MHz.

(10) Rotate the turntable 360° recording the field strength at each step. Throughout the main beam of the antenna, the step size shall be kept to a maximum of 1°.

Once outside the main beam of the antenna, the maximum step size shall be as follows, when compared to the requirements of Section 6.2.2:

i. Between 0° and 8°, maximum step size of 2°;

ii. Between 8° and 40°, maximum step size of 4°;

iii. Between 40° and 45°, maximum step size of 1°;

iv. Between 45° and 90°, maximum step size of 5°.

Once the mask reaches 90°, the mask will be inverted and the step size will follow in the same manner as above.

For the purpose of this procedure, the main beam of the antenna is defined as the 3 dB beamwidth.

(11) Convert the measured field strength values in terms of e.i.r.p. density (dBW/1 MHz) using the following equation:

$$\text{e.i.r.p. density (dBW/MHz)} = 10 \log((E \cdot r)^2 / 30)$$

E = field strength in V/m

r = measurement distance in metres

(12) Plot the results against the emission mask with reference to the horizontal plane.


(13) Using the plot, the 0° can be rotated to determine the worst-case installation tilt angle.

(14) Testing shall be performed using the highest gain antenna for every antenna type, if applicable.


(15) Antenna type(s), antenna model number(s), and worst-case tilt angle(s) necessary to remain compliant with the elevation mask requirement set forth in Section 6.2.2(3) of RSS-247 shall be clearly indicated in the user manual.

The following figure is an example of a polar elevation mask measured using the Method 1 reference to dBμV/m at 3 m.


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

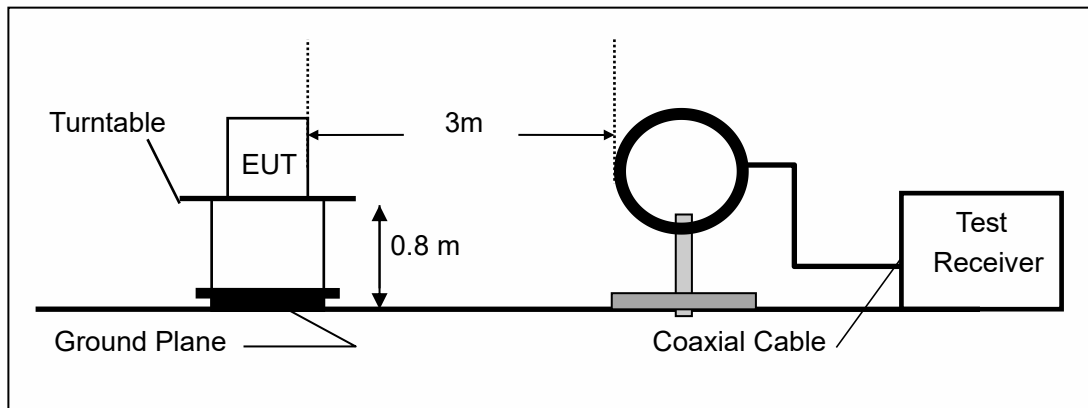

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

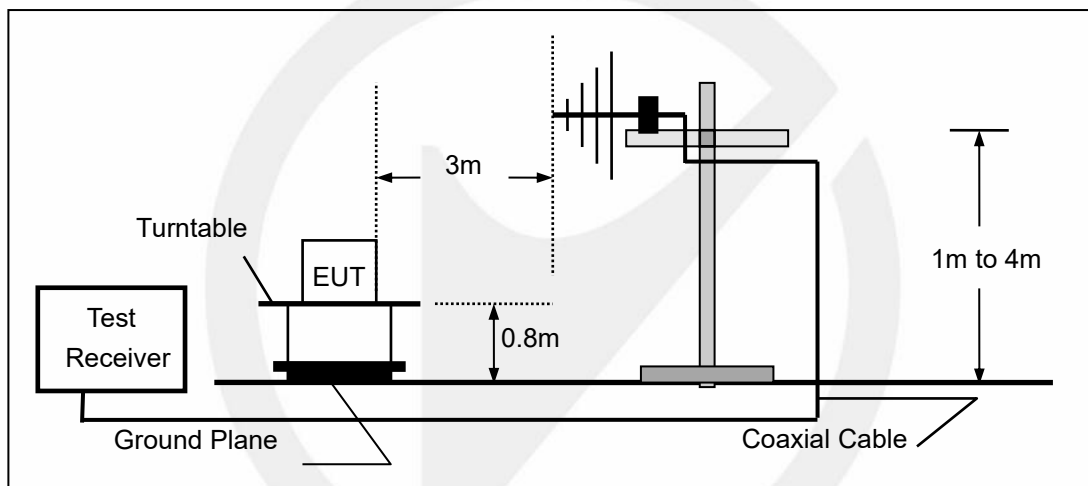

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

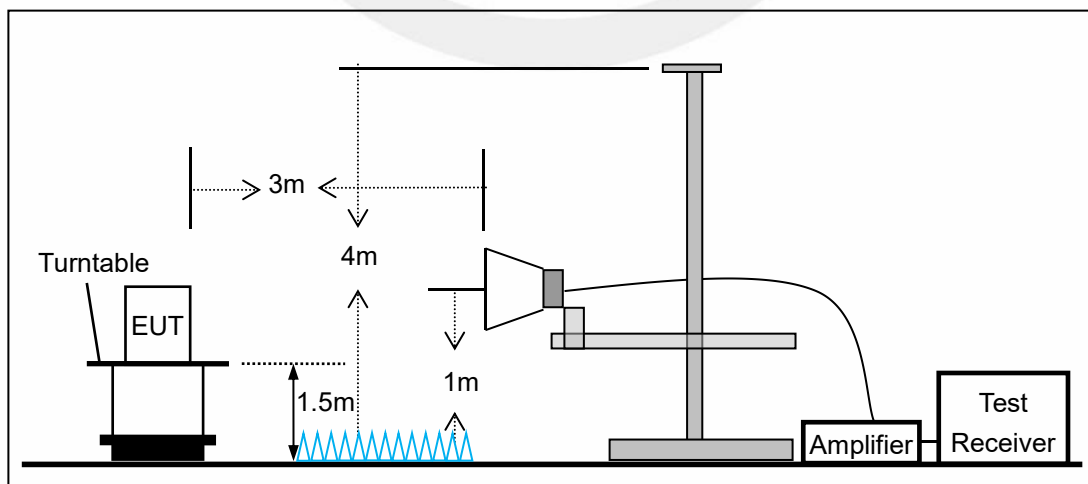


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2020 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

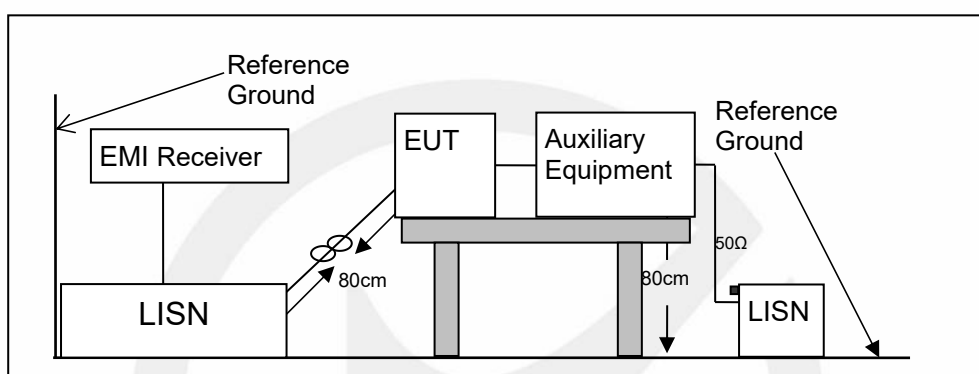

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

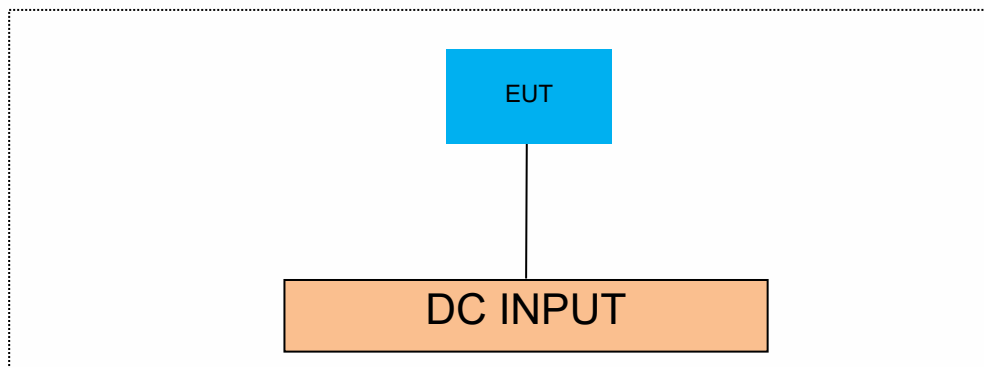

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 ON TIME AND DUTY CYCLE

8.1.1 Applicable Standard

According to 558074 D01 Section 6

8.1.2 Conformance Limit

N/A; for reporting purposes only.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup.

8.1.4 Test Procedure


The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. Set VBW $\geq$ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

8.1.5 Test Results


Temperature:	22.6°C
Relative Humidity:	49%
ATM Pressure:	1011 mbar
Test Engineer:	GJ

Note: N/A


TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	20.00	20.00	100.00	0.00
BLE_1M	Ant1	2440	20.00	20.00	100.00	0.00
BLE_1M	Ant1	2480	20.00	20.00	100.00	0.00
BLE_2M	Ant1	2402	20.00	20.00	100.00	0.00
BLE_2M	Ant1	2440	20.00	20.00	100.00	0.00
BLE_2M	Ant1	2480	20.00	20.00	100.00	0.00
BLE_125K	Ant1	2402	20.00	20.00	100.00	0.00
BLE_125K	Ant1	2440	20.00	20.00	100.00	0.00
BLE_125K	Ant1	2480	20.00	20.00	100.00	0.00
BLE_500K	Ant1	2402	20.00	20.00	100.00	0.00
BLE_500K	Ant1	2440	20.00	20.00	100.00	0.00
BLE_500K	Ant1	2480	20.00	20.00	100.00	0.00

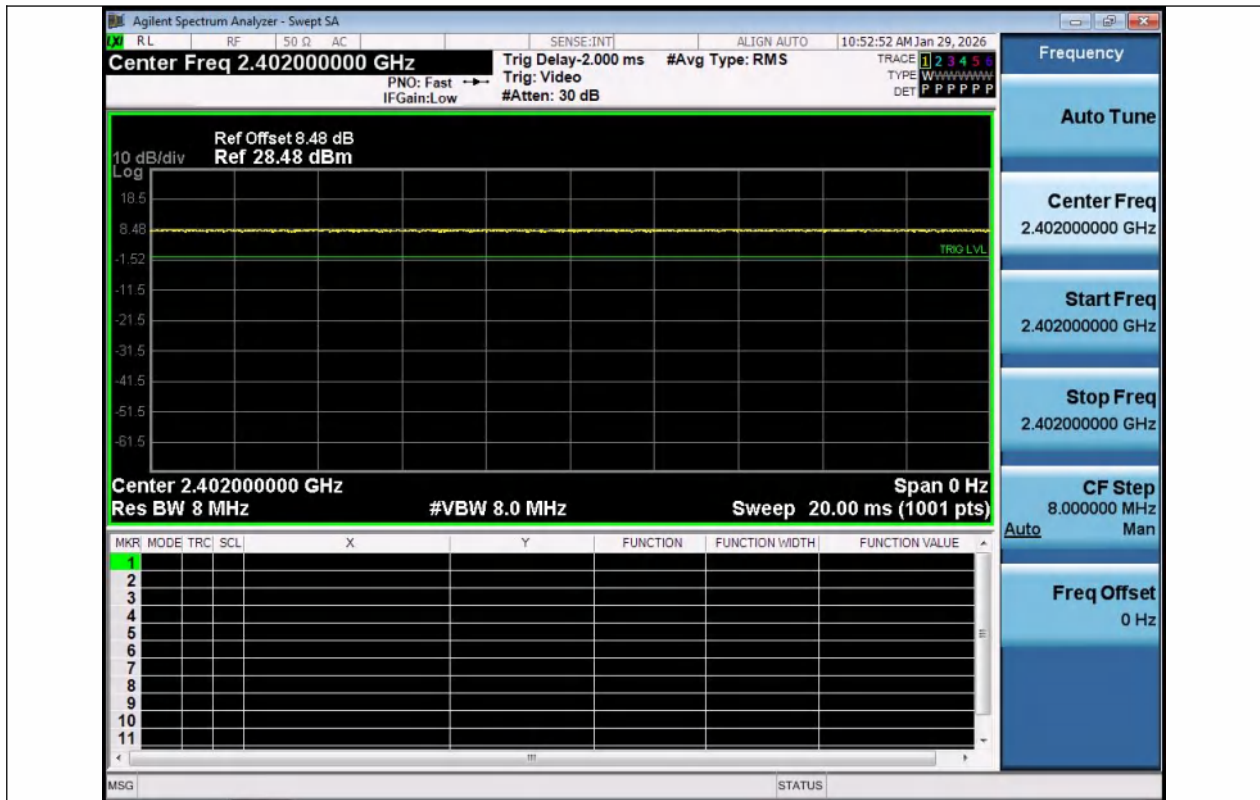


NTNV-BLE_1M-Ant1-2402

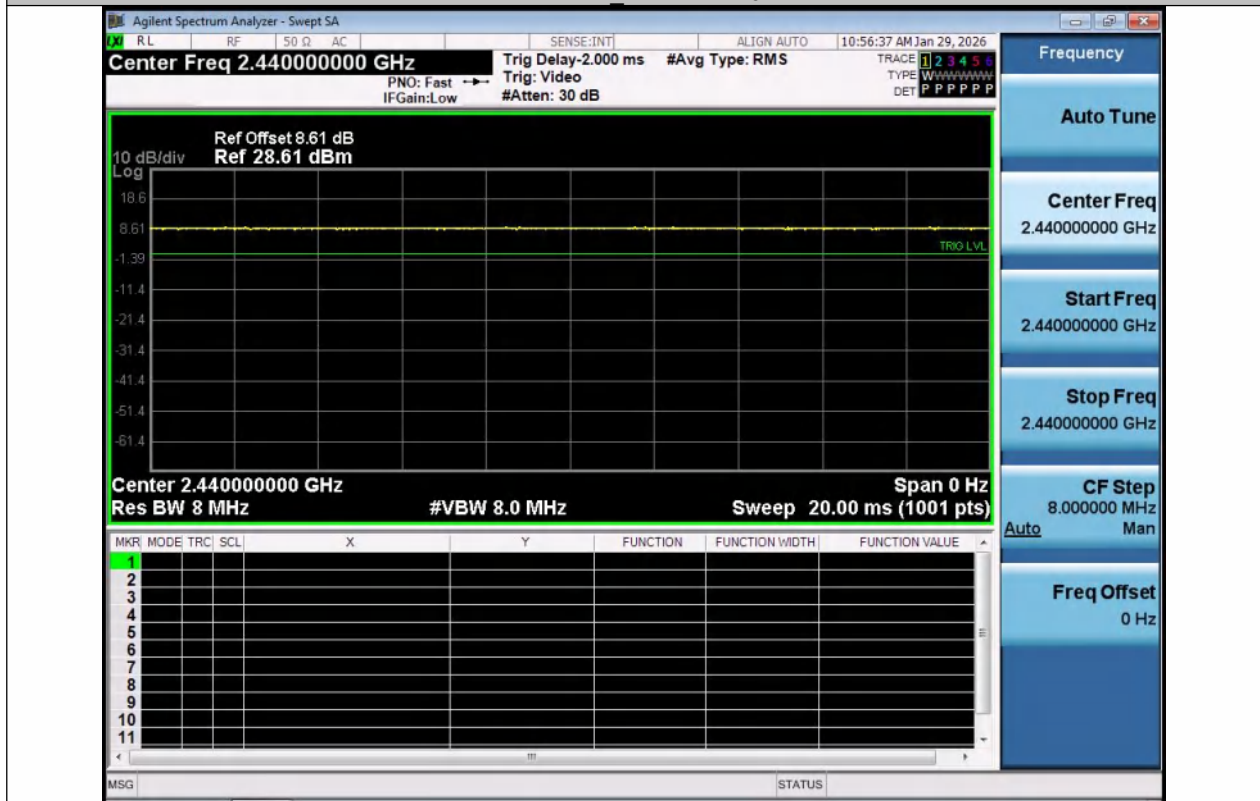


NTNV-BLE_1M-Ant1-2440

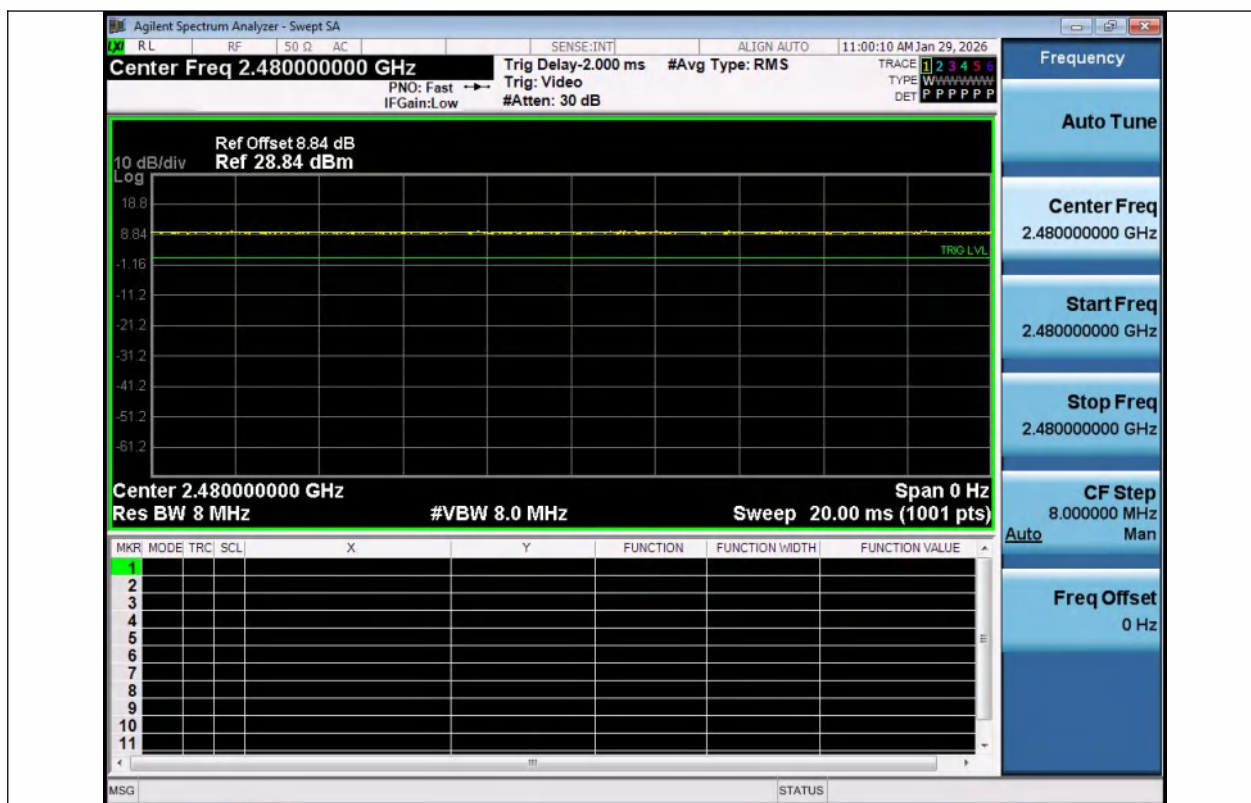


NTNV-BLE_1M-Ant1-2480

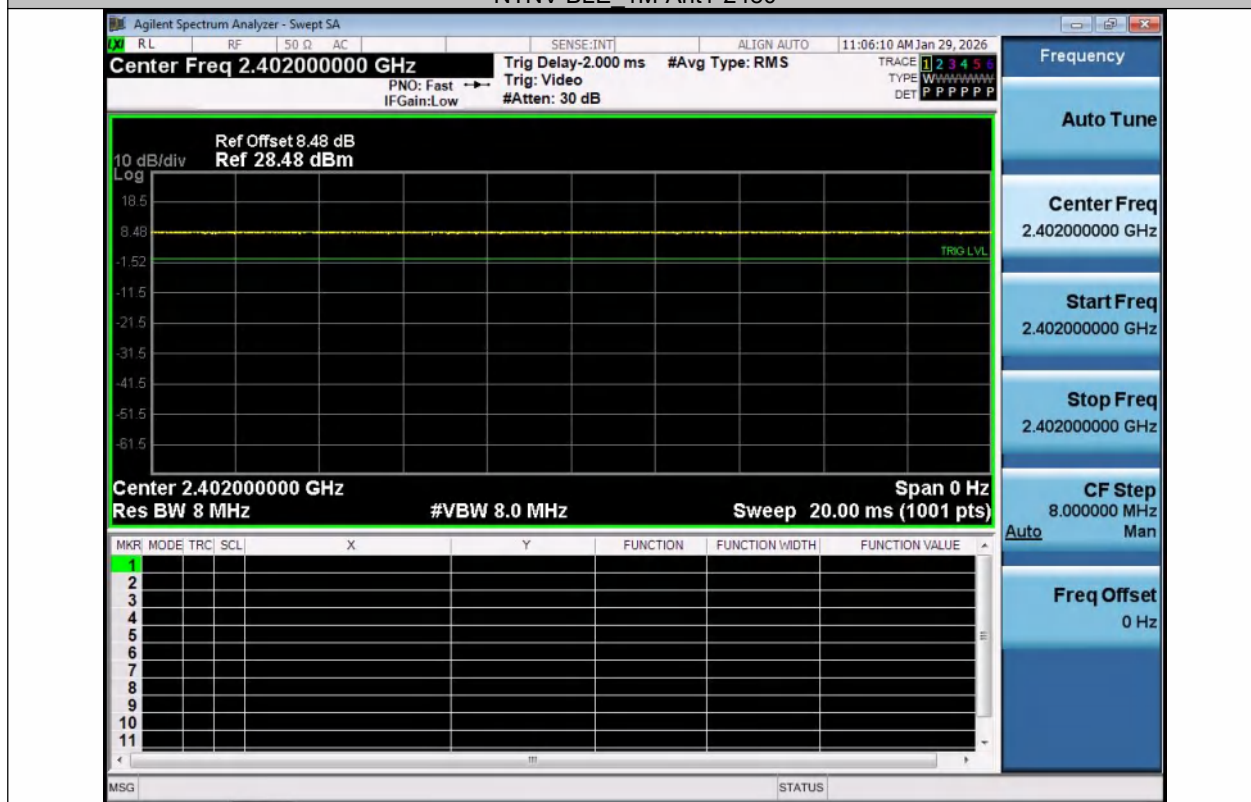



NTNV-BLE_2M-Ant1-2402

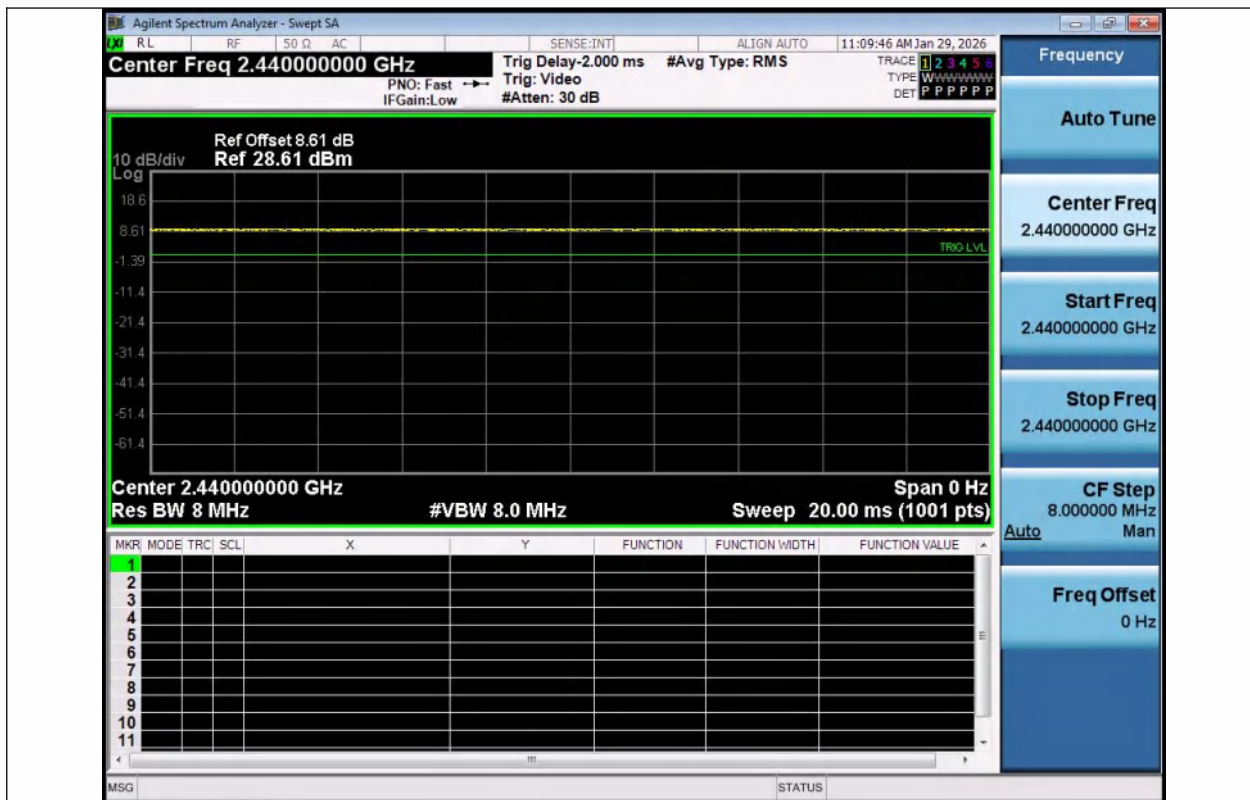


NTNV-BLE_2M-Ant1-2440

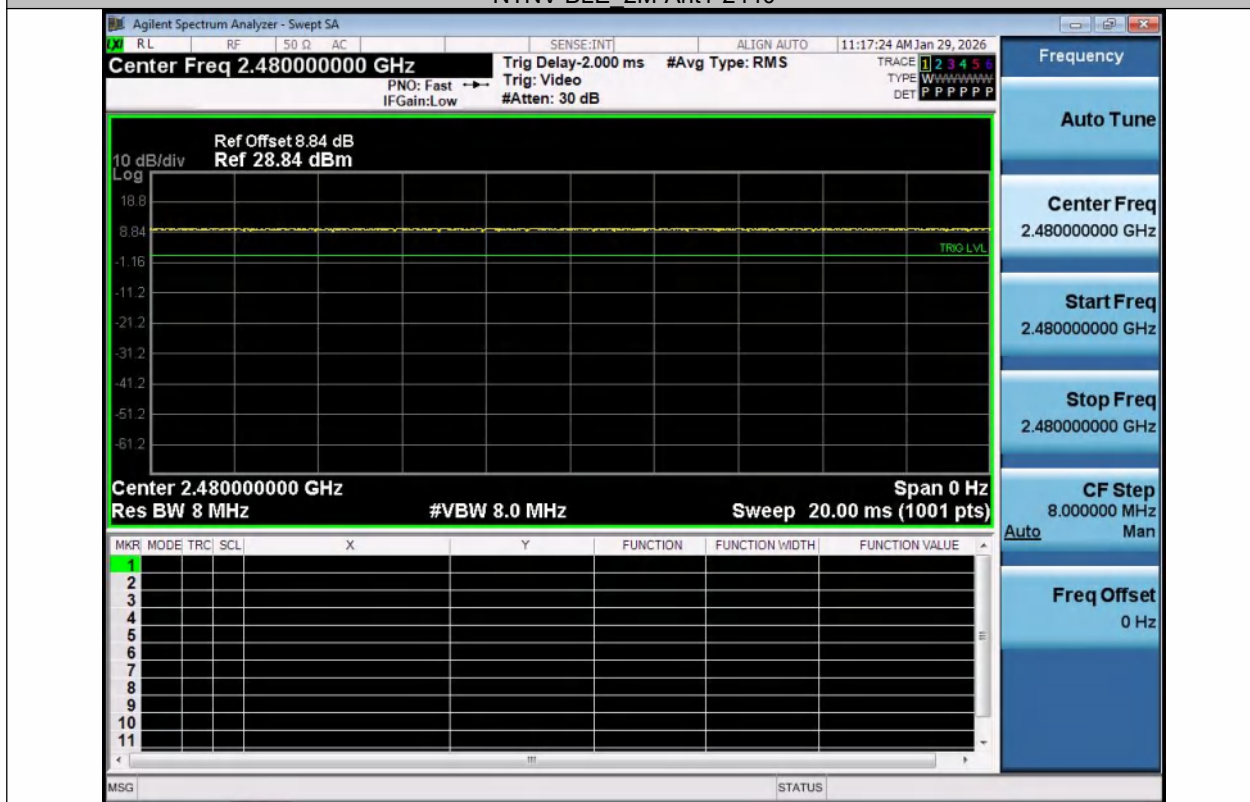


NTNV-BLE_2M-Ant1-2480

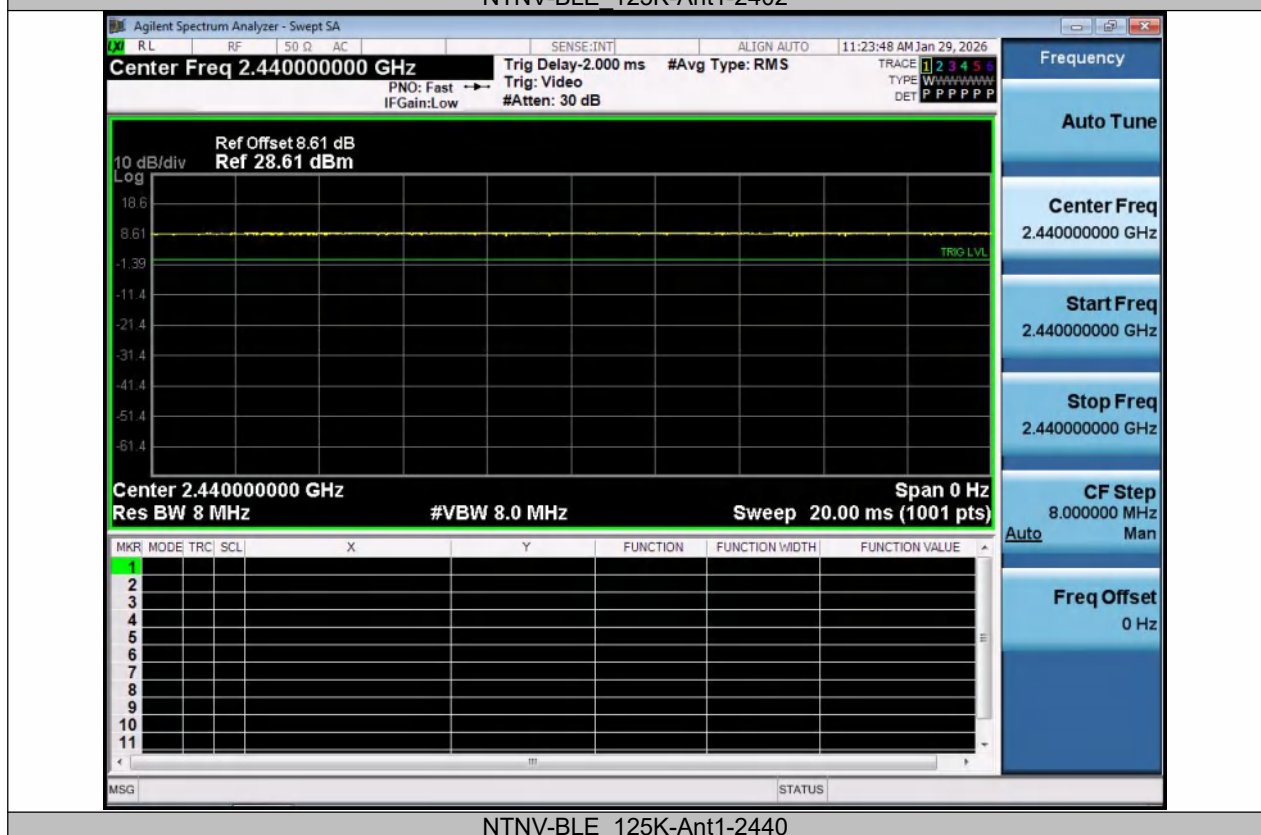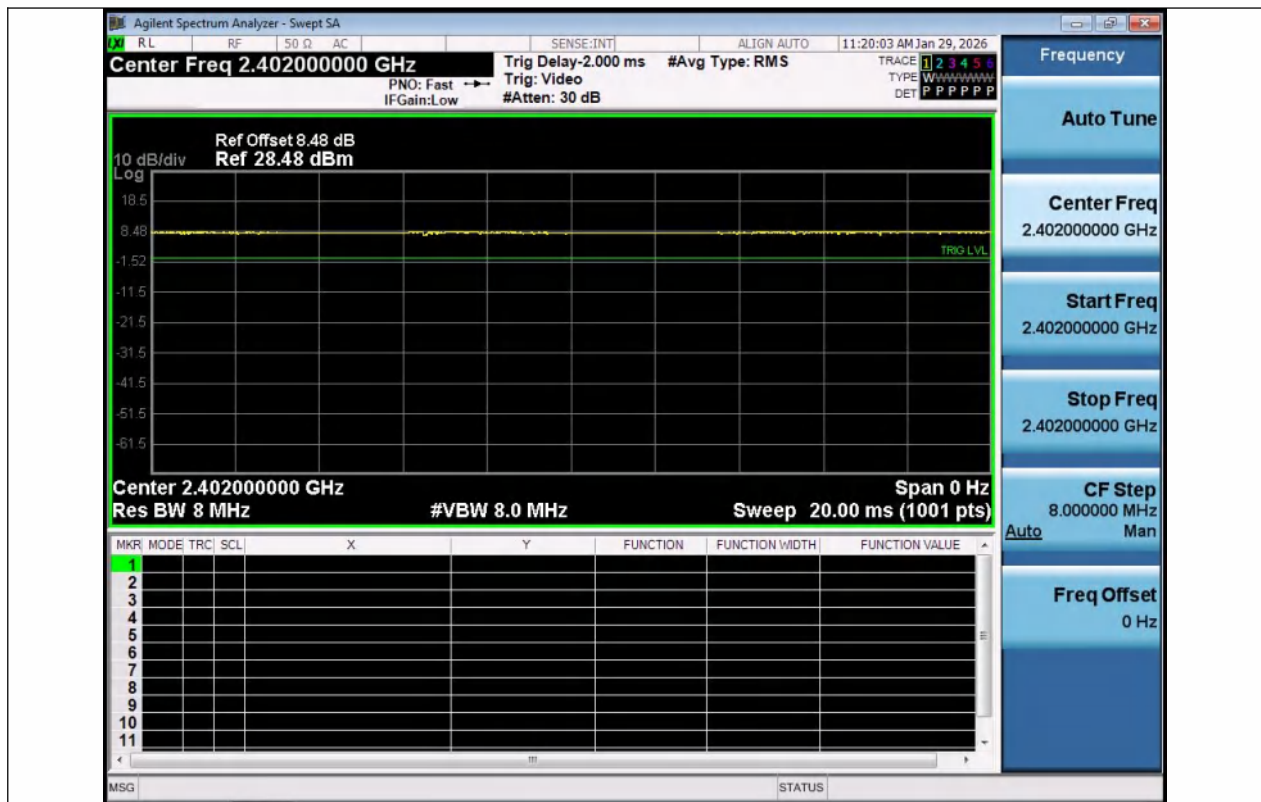


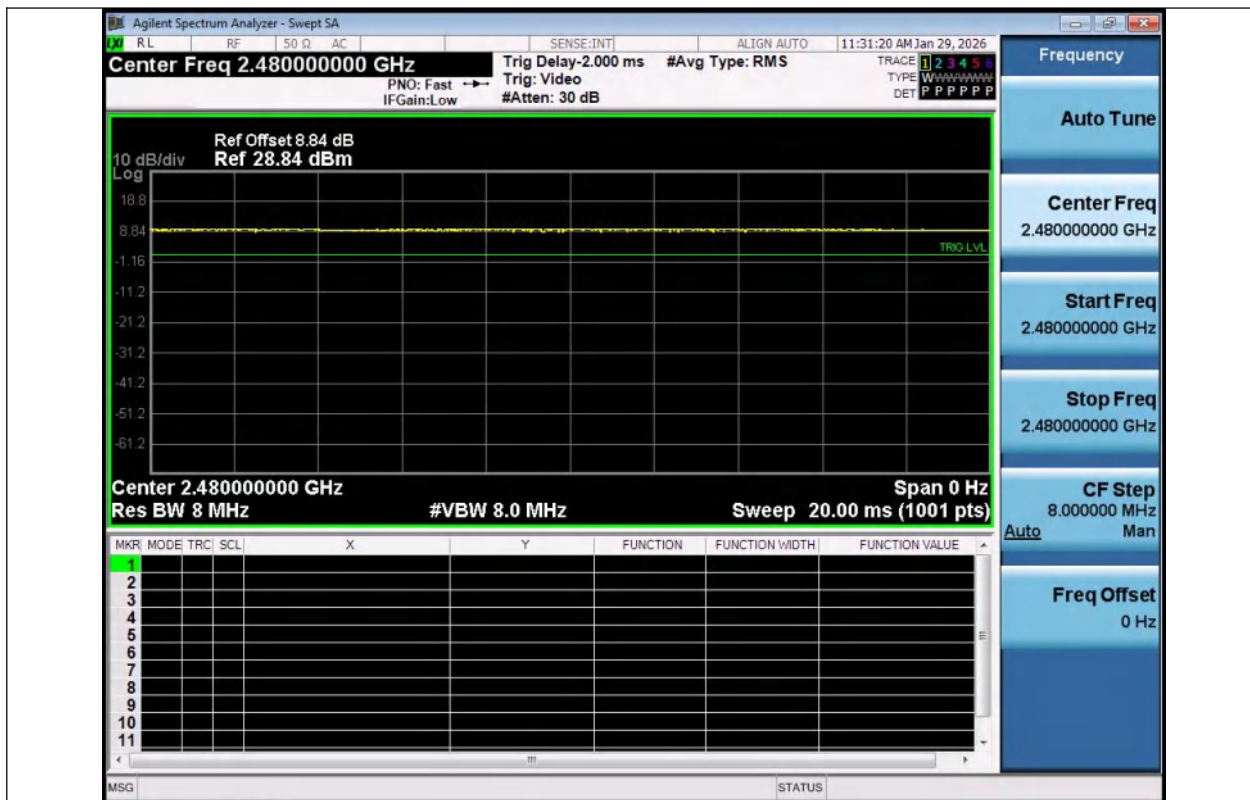


NTNV-BLE_125K-Ant1-2480

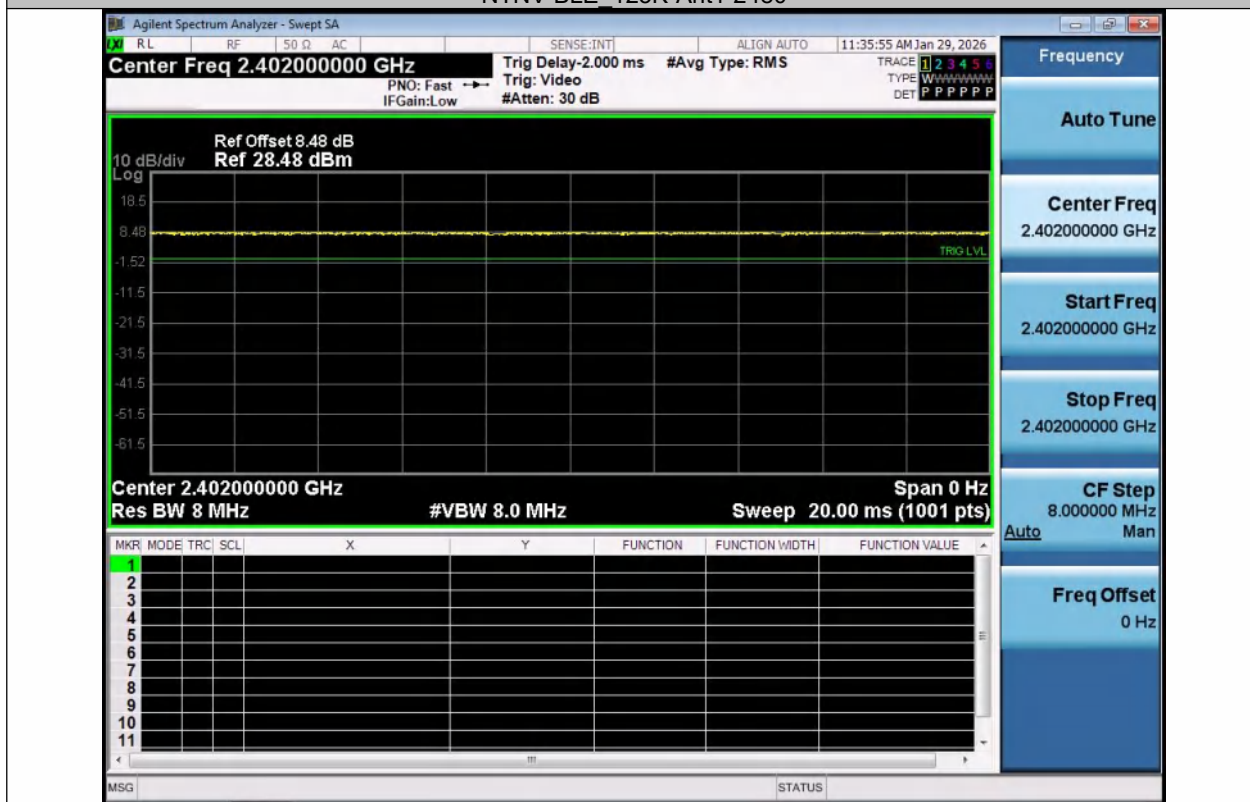

NTNV-BLE_500K-Ant1-2402

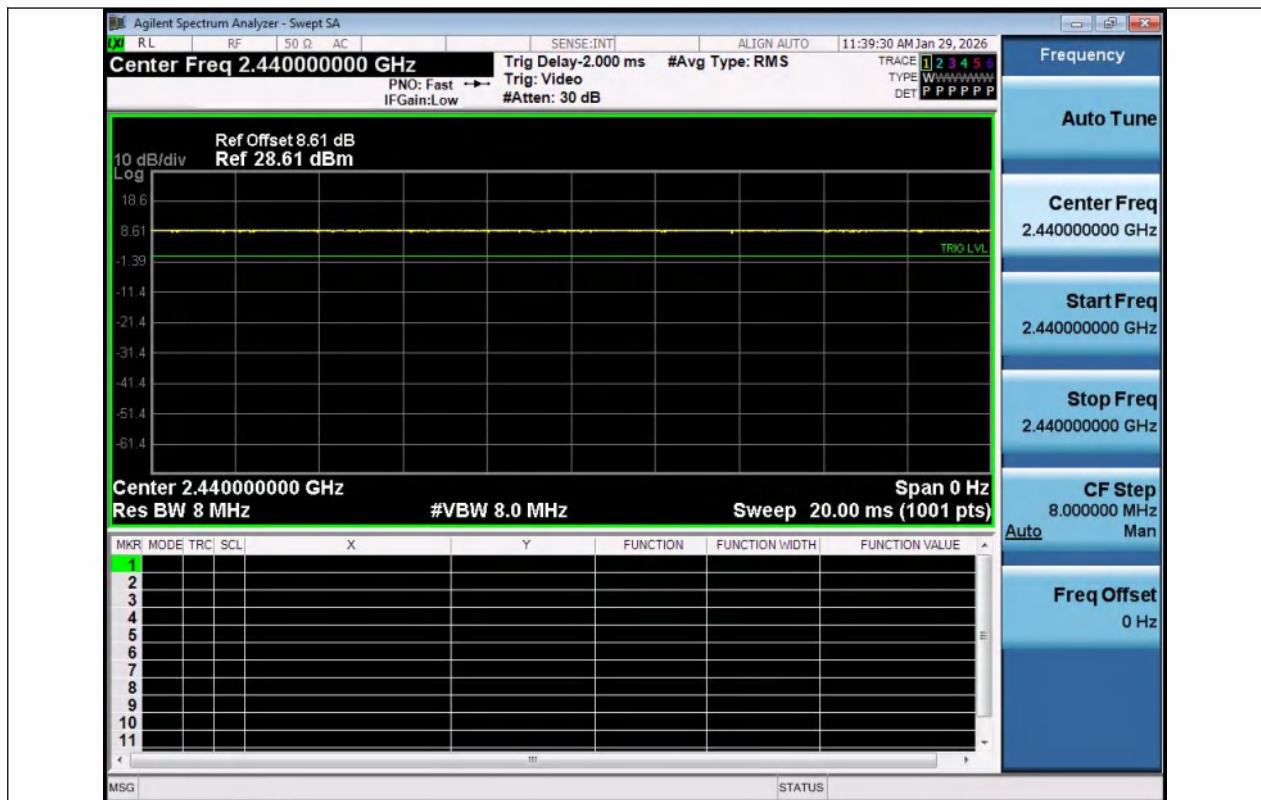

NTNV-BLE_500K-Ant1-2440

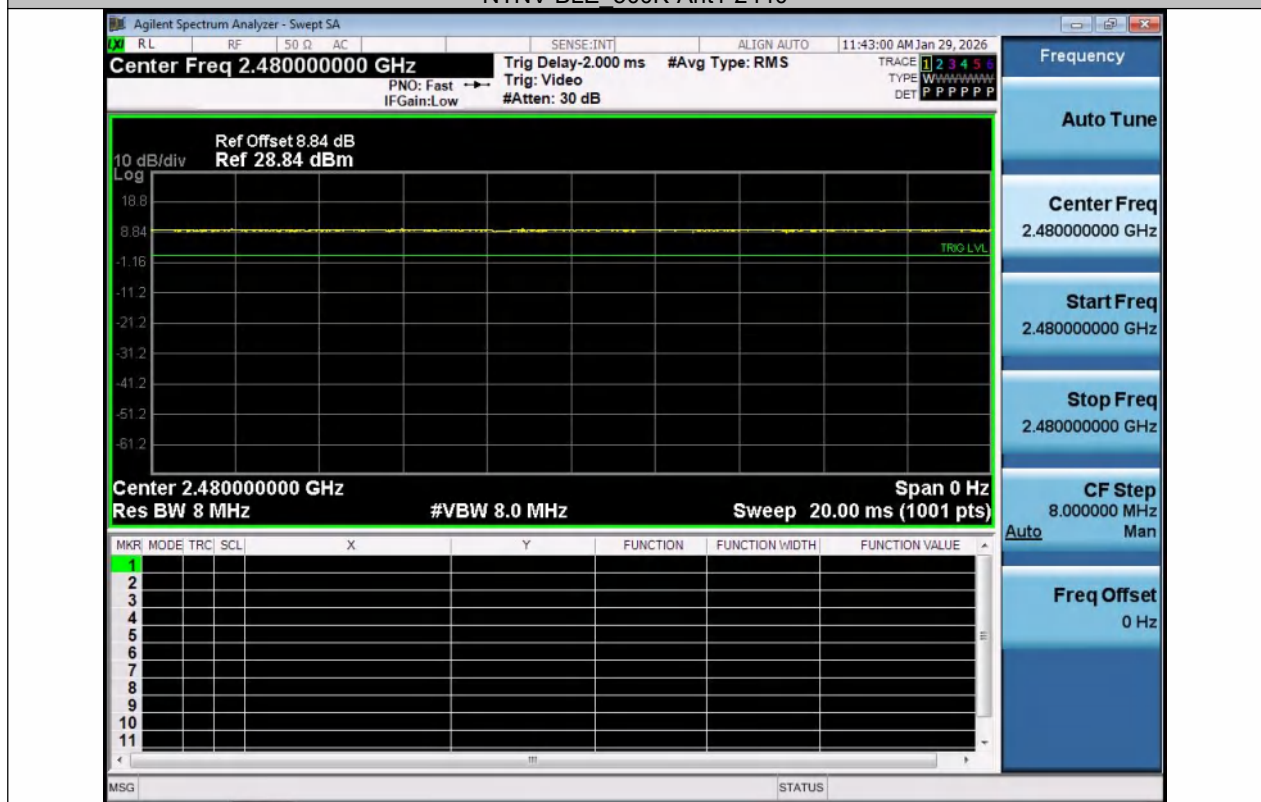

NTNV-BLE_500K-Ant1-2480

8.2 DTS 6DB BANDWIDTH

8.2.1 Applicable Standard

According to FCC Part15.247 (a)(2)

According to RSS-247 5.2(a)

According to 558074 D01 15.247 Meas Guidance v05r02 Section 8.2

According to ANSI C63.10 Section 11.8

8.2.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

The EUT was operating in Bluetooth mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.


8.2.5 Test Results

Temperature:	22.6°C
Relative Humidity:	49%
ATM Pressure:	1011 mbar
Test Engineer:	GJ

Note: N/A

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.668	2401.648	2402.316	0.5	PASS
BLE_1M	Ant1	2440	0.648	2439.668	2440.316	0.5	PASS
BLE_1M	Ant1	2480	0.692	2479.632	2480.324	0.5	PASS
BLE_2M	Ant1	2402	1.116	2401.432	2402.548	0.5	PASS
BLE_2M	Ant1	2440	1.132	2439.420	2440.552	0.5	PASS
BLE_2M	Ant1	2480	1.120	2479.424	2480.544	0.5	PASS
BLE_125K	Ant1	2402	0.640	2401.668	2402.308	0.5	PASS
BLE_125K	Ant1	2440	0.640	2439.668	2440.308	0.5	PASS
BLE_125K	Ant1	2480	0.636	2479.668	2480.304	0.5	PASS
BLE_500K	Ant1	2402	0.652	2401.664	2402.316	0.5	PASS
BLE_500K	Ant1	2440	0.644	2439.668	2440.312	0.5	PASS
BLE_500K	Ant1	2480	0.644	2479.664	2480.308	0.5	PASS



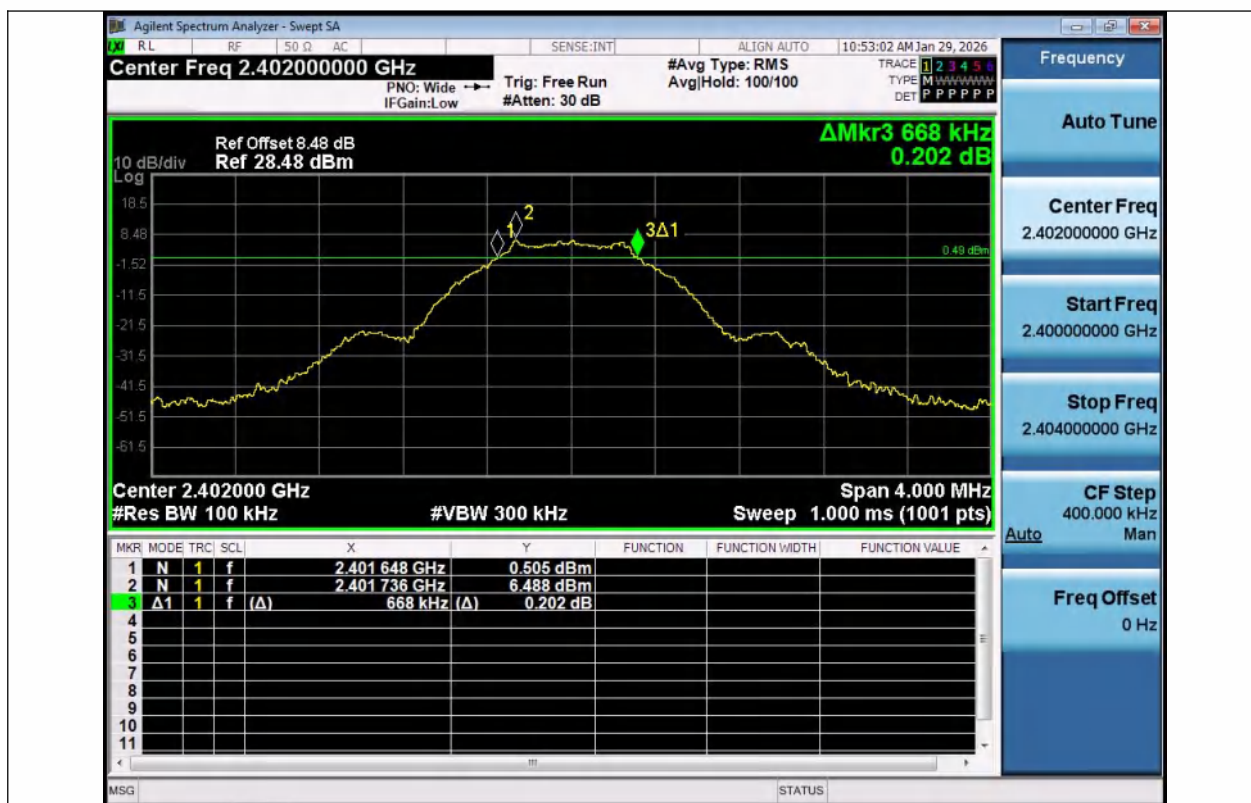


BLE_1M-Ant1-2402-PASS



BLE_1M-Ant1-2440-PASS




BLE_1M-Ant1-2480-PASS

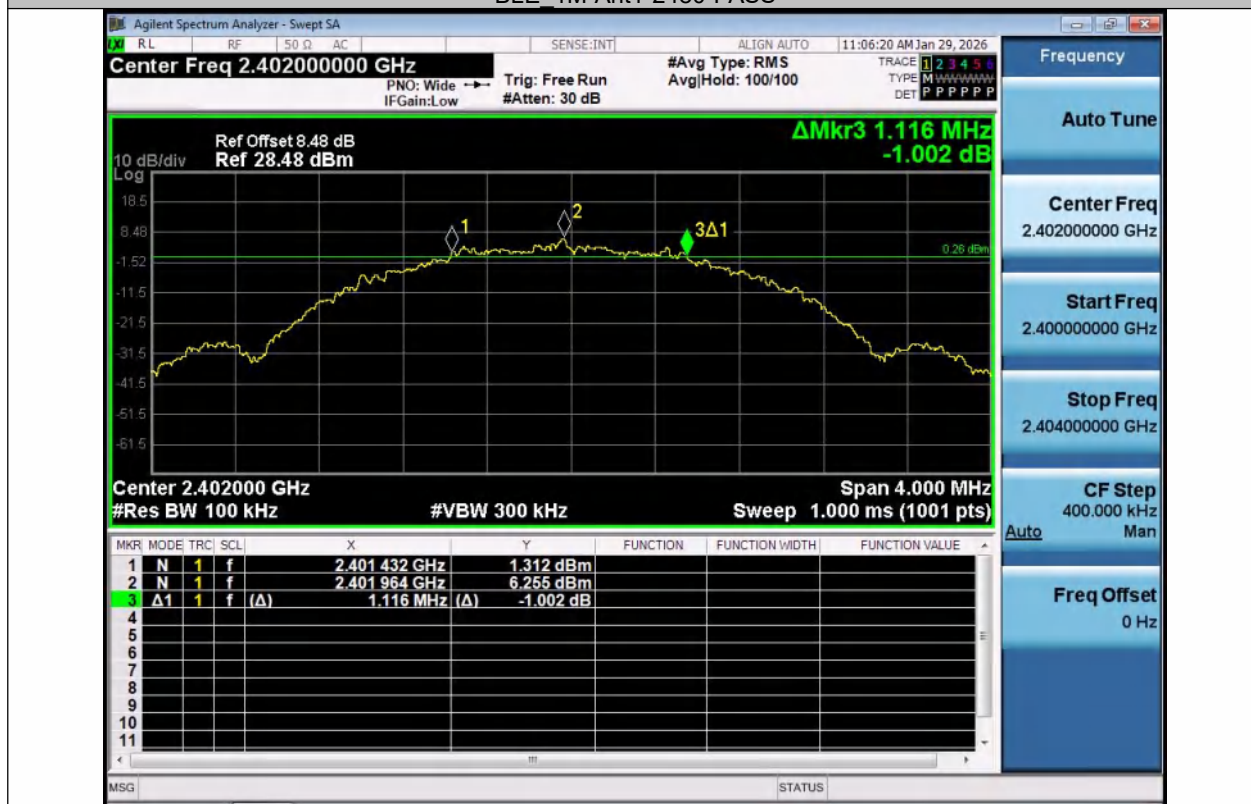


BLE_2M-Ant1-2402-PASS




BLE_2M-Ant1-2440-PASS

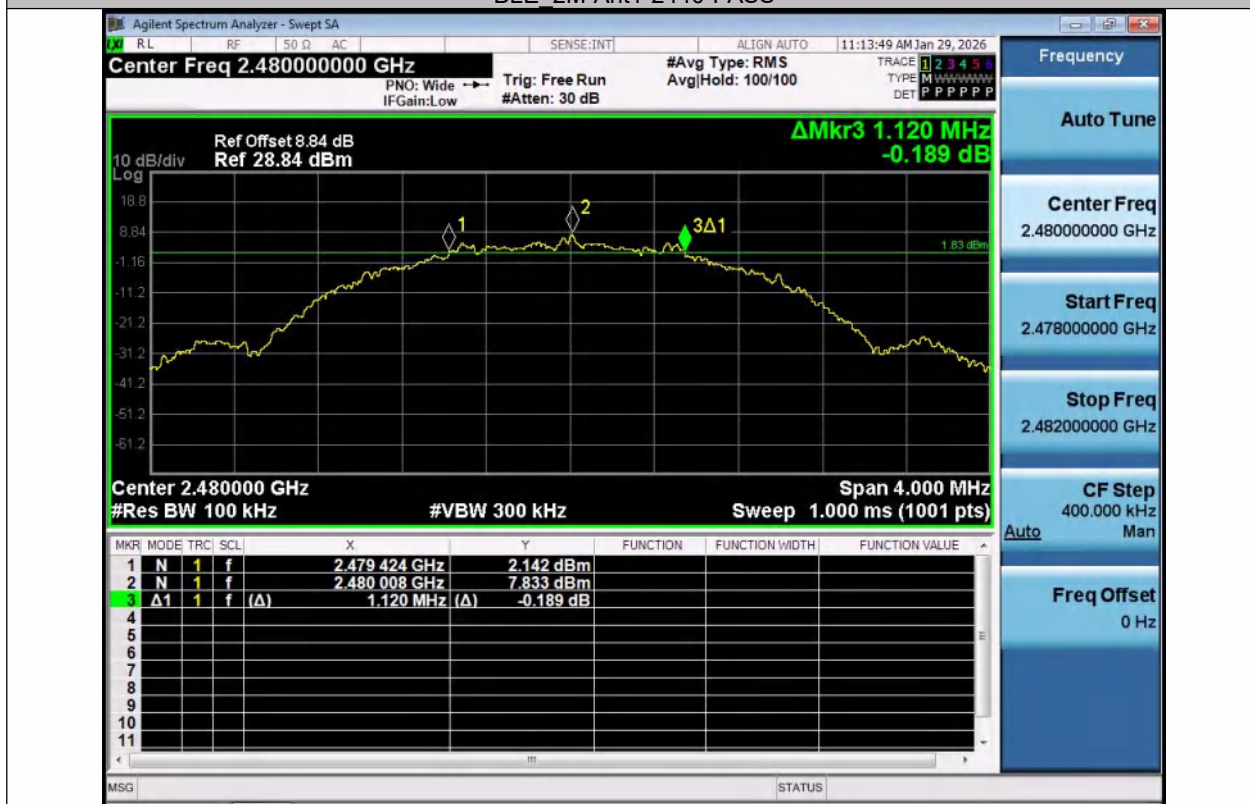

BLE_2M-Ant1-2480-PASS

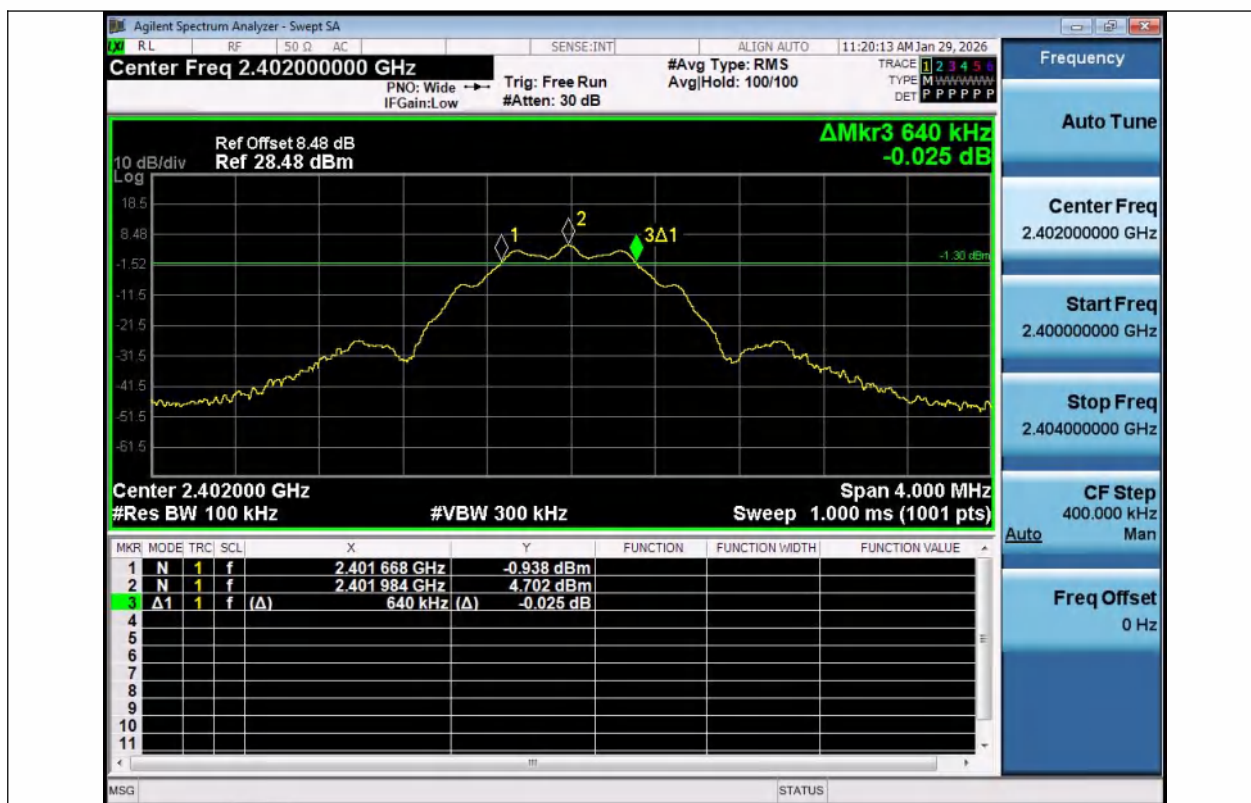


BLE_125K-Ant1-2402-PASS

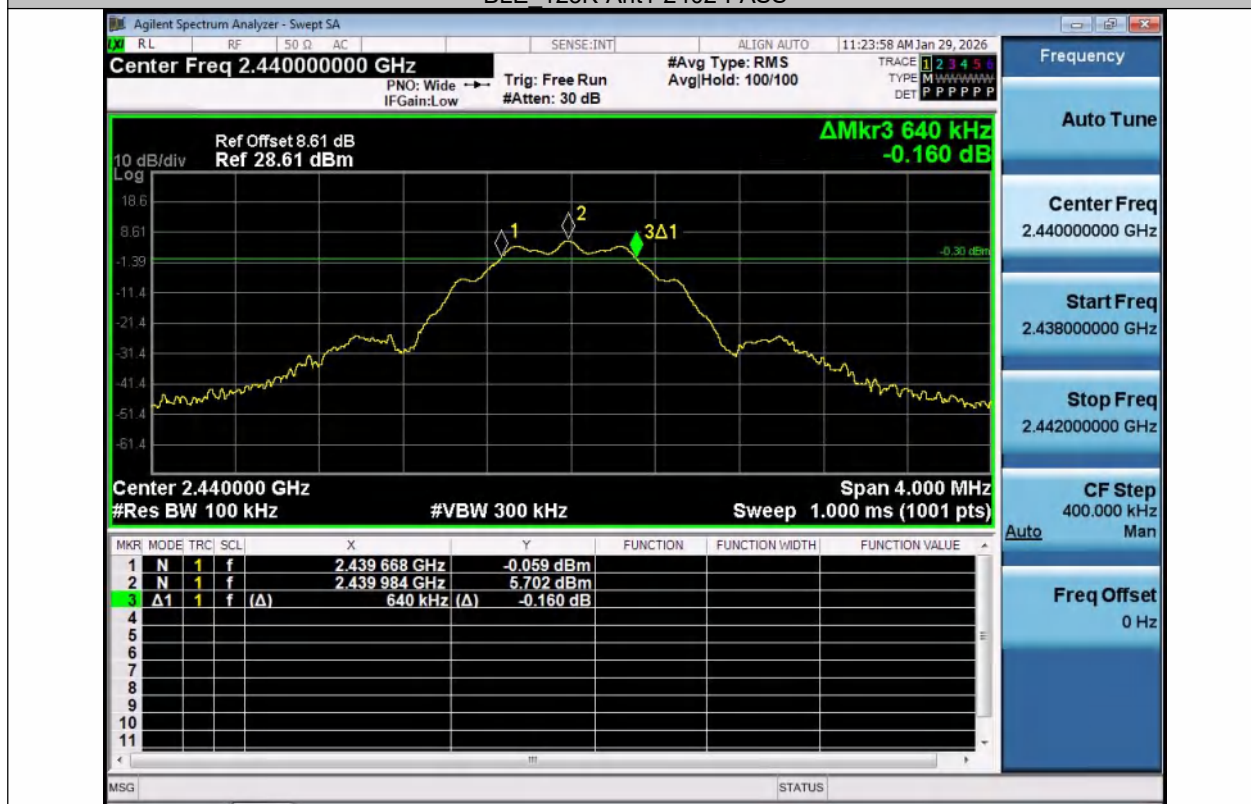


BLE_125K-Ant1-2440-PASS



BLE_125K-Ant1-2480-PASS

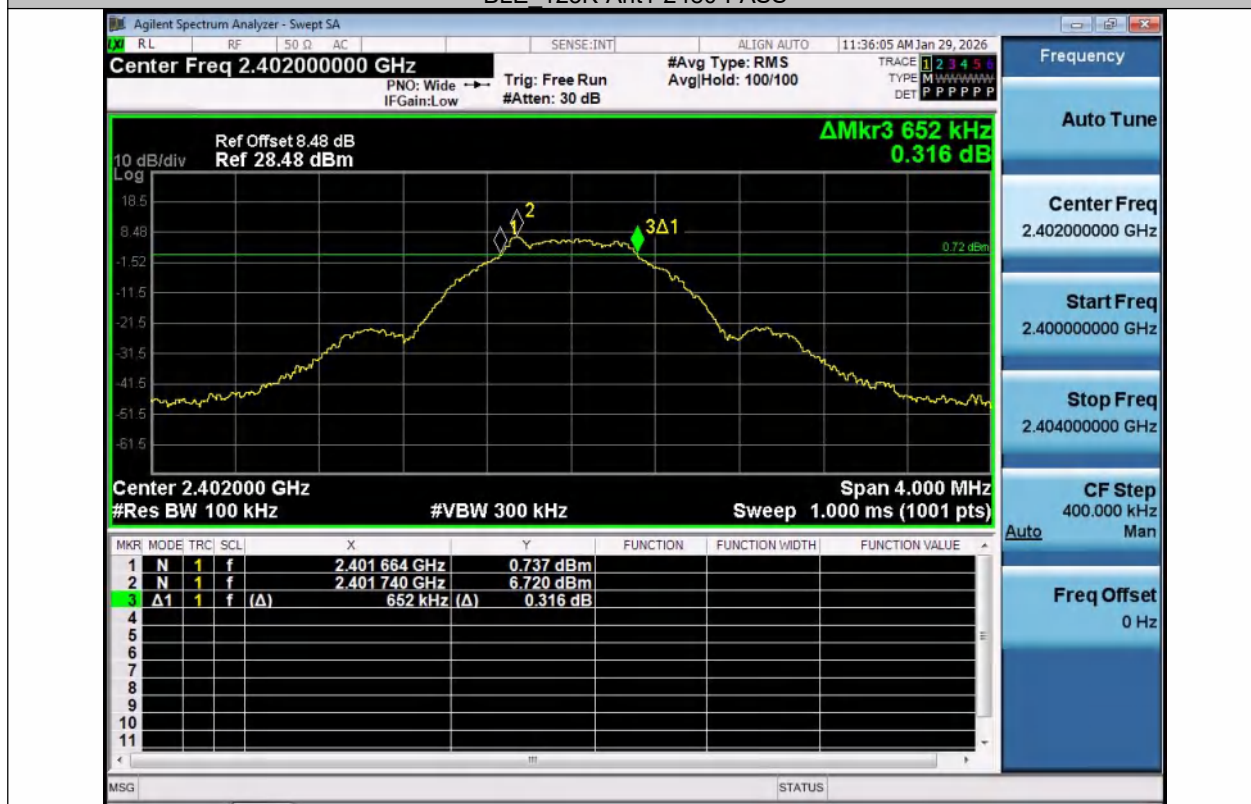

BLE_500K-Ant1-2402-PASS

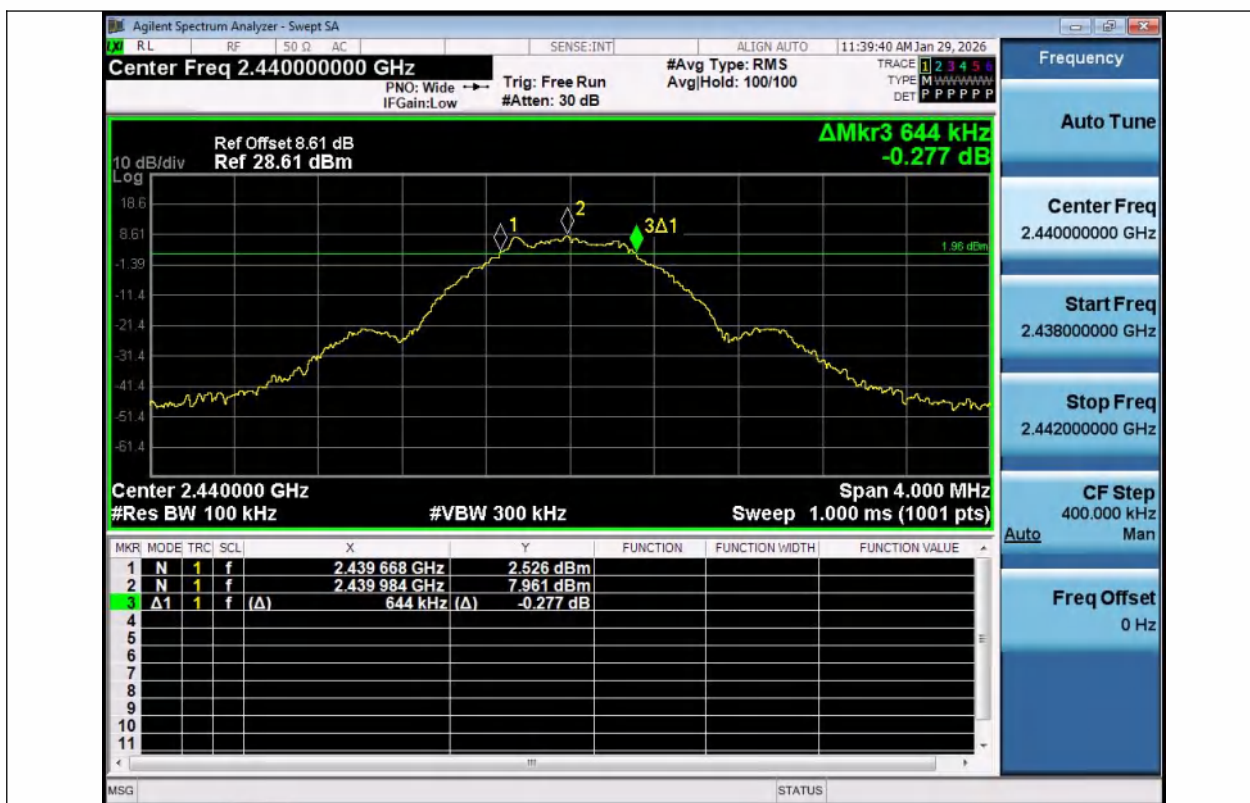

BLE_500K-Ant1-2440-PASS



BLE_500K-Ant1-2480-PASS

8.3 DTS 99% BANDWIDTH

8.3.1 Applicable Standard

According to RSS-Gen6.7, RSS-247 Clause 7.3.4.2

8.3.2 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.3 Test Procedure

The EUT was operating in Bluetooth mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 1%-5% OBW(43KHz).

Set the video bandwidth (VBW) =130 kHz.

Set Span=4MHz

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Use the 99 % power bandwidth function of the instrument

Measure the maximum width of the emission.


Measure and record the results in the test report.

8.3.4 Test Results


Temperature:	22.6°C
Relative Humidity:	49%
ATM Pressure:	1011 mbar
Test Engineer:	GJ

Note: N/A

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0669	2401.4550	2402.5219	---	---
BLE_1M	Ant1	2440	1.0610	2439.4600	2440.5210	---	---
BLE_1M	Ant1	2480	1.0608	2479.4597	2480.5205	---	---
BLE_2M	Ant1	2402	2.0664	2400.9591	2403.0255	---	---
BLE_2M	Ant1	2440	2.0507	2438.9704	2441.0211	---	---
BLE_2M	Ant1	2480	2.0658	2478.9579	2481.0237	---	---
BLE_125K	Ant1	2402	1.0602	2401.4571	2402.5173	---	---
BLE_125K	Ant1	2440	1.0607	2439.4549	2440.5156	---	---
BLE_125K	Ant1	2480	1.0618	2479.4532	2480.5150	---	---
BLE_500K	Ant1	2402	1.0331	2401.4697	2402.5028	---	---
BLE_500K	Ant1	2440	1.0459	2439.4622	2440.5081	---	---
BLE_500K	Ant1	2480	1.0469	2479.4594	2480.5063	---	---

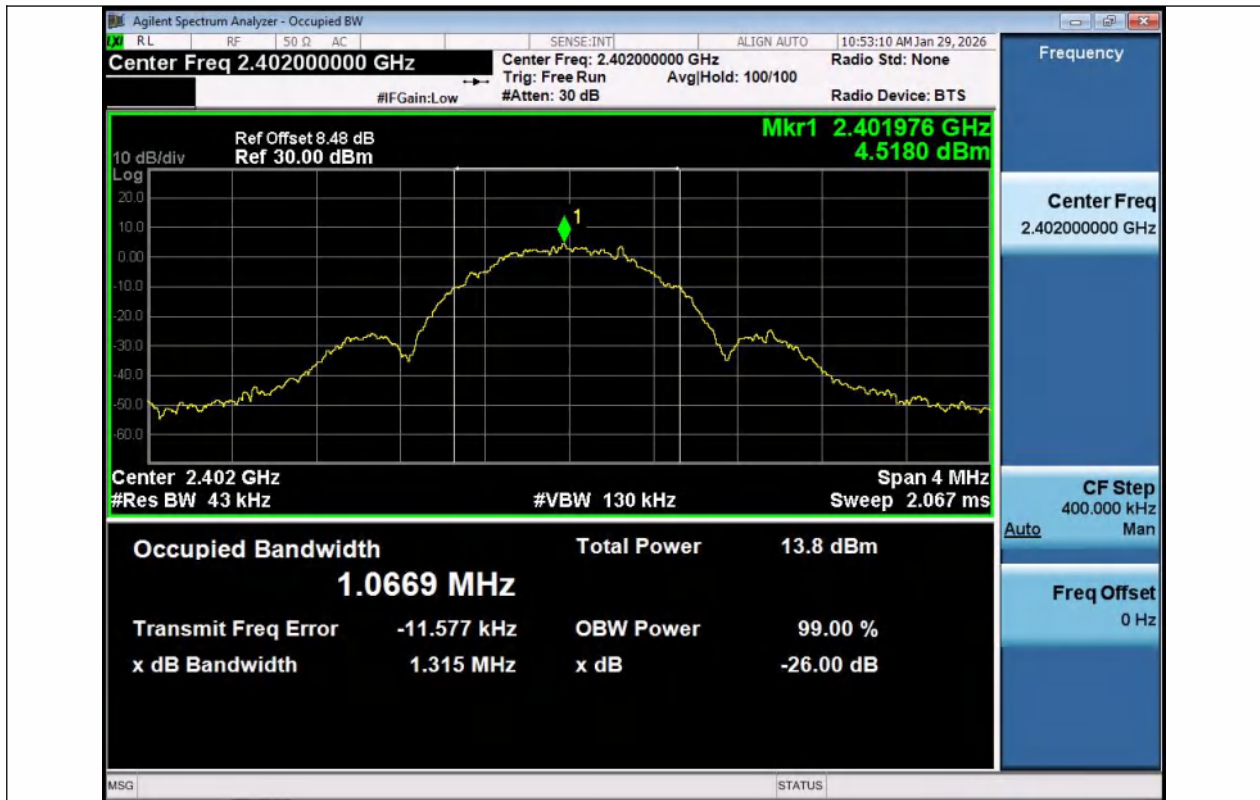

BLE_1M-Ant1-2402

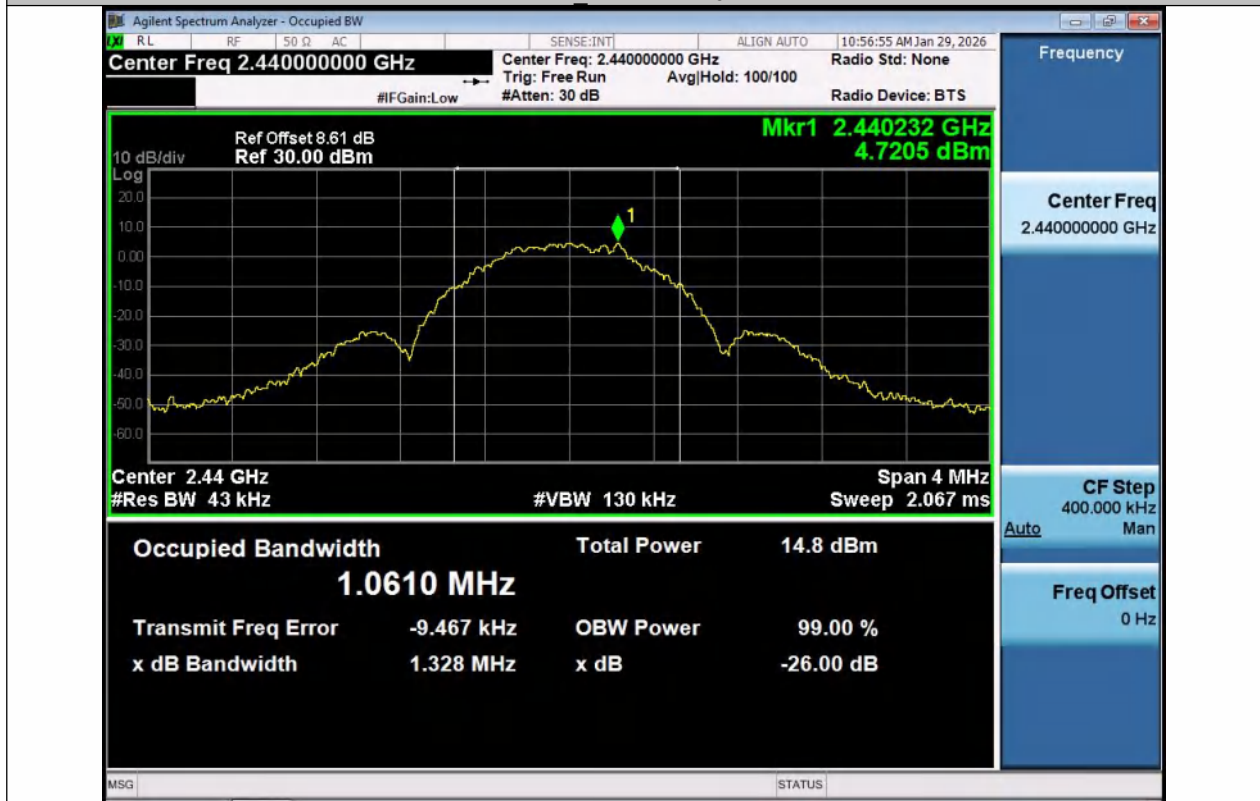

BLE_1M-Ant1-2440



BLE_1M-Ant1-2480



BLE_2M-Ant1-2402



BLE_2M-Ant1-2440



BLE_2M-Ant1-2480



BLE_125K-Ant1-2402



BLE_125K-Ant1-2440



BLE_125K-Ant1-2480



BLE_500K-Ant1-2402



BLE_500K-Ant1-2440



BLE_500K-Ant1-2480

8.4 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.4.1 Applicable Standard

According to FCC Part15.247 (b)(3)

According to RSS-247

According to 558074 D01 15.247 Meas Guidance v05r02 Section 8.3.2.2

According to ANSI C63.10 Section 11.9.2.2.4

8.4.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

- a) Measure the duty cycle D of the transmitter output signal.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- d) Set VBW $\geq [3 \times \text{RBW}]$.
- e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to "free run."
- i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6)


8.4.5 Test Results

Temperature:	22.6°C
Relative Humidity:	49%
ATM Pressure:	1011 mbar
Test Engineer:	GJ


Note: N/A

TestMode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Ant1	2402	8.04	≤30	9.65	≤36	PASS
BLE_1M	Ant1	2440	8.90	≤30	10.51	≤36	PASS
BLE_1M	Ant1	2480	9.53	≤30	11.14	≤36	PASS
BLE_2M	Ant1	2402	8.01	≤30	9.62	≤36	PASS
BLE_2M	Ant1	2440	8.88	≤30	10.49	≤36	PASS
BLE_2M	Ant1	2480	9.50	≤30	11.11	≤36	PASS
BLE_125K	Ant1	2402	7.99	≤30	9.60	≤36	PASS
BLE_125K	Ant1	2440	8.82	≤30	10.43	≤36	PASS
BLE_125K	Ant1	2480	9.46	≤30	11.07	≤36	PASS
BLE_500K	Ant1	2402	8.05	≤30	9.66	≤36	PASS
BLE_500K	Ant1	2440	8.91	≤30	10.52	≤36	PASS
BLE_500K	Ant1	2480	9.45	≤30	11.06	≤36	PASS




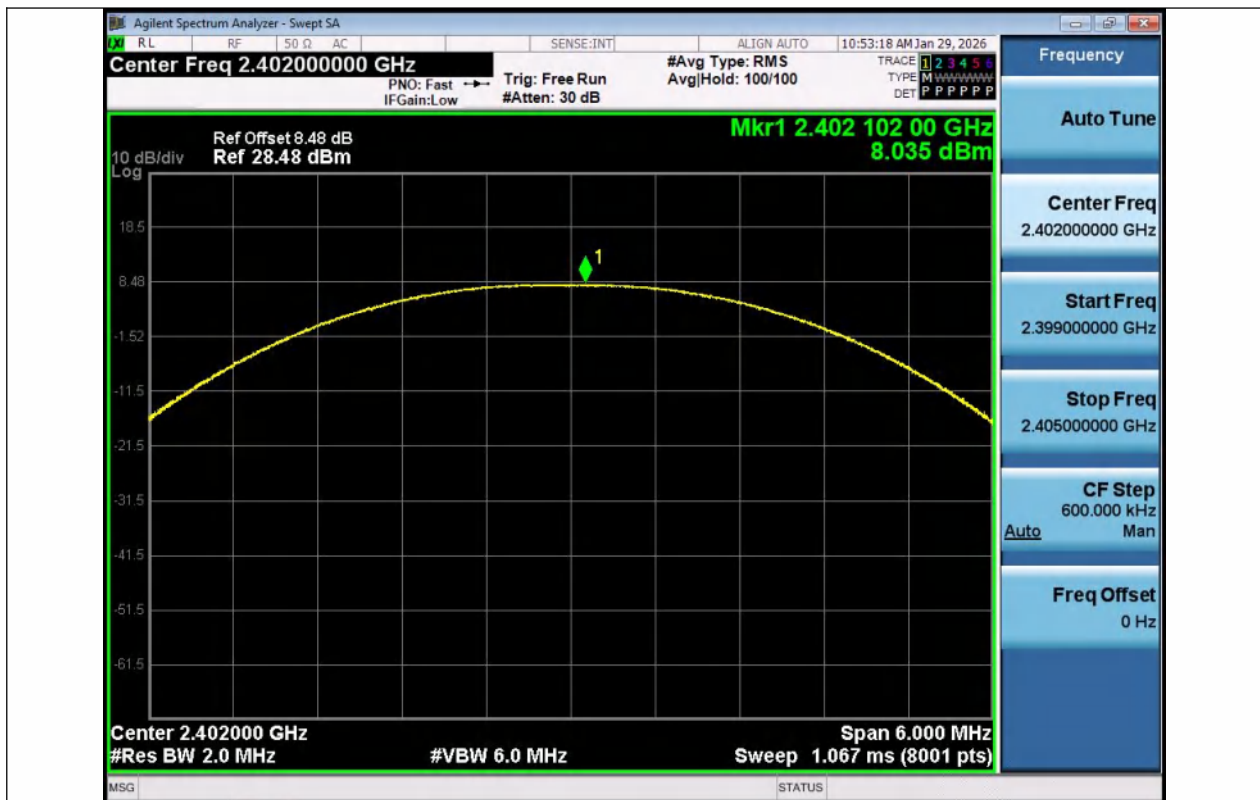

BLE_1M-Ant1-2402-PASS

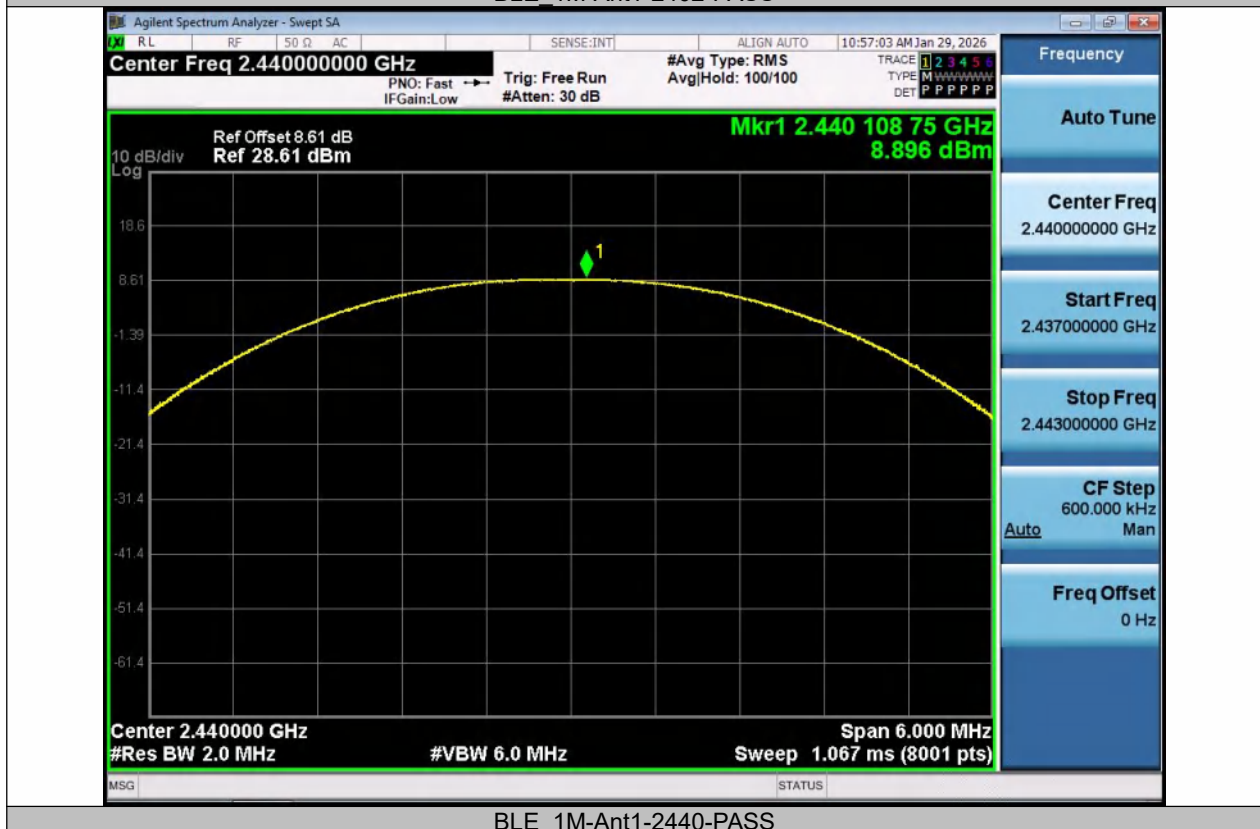

BLE_1M-Ant1-2440-PASS

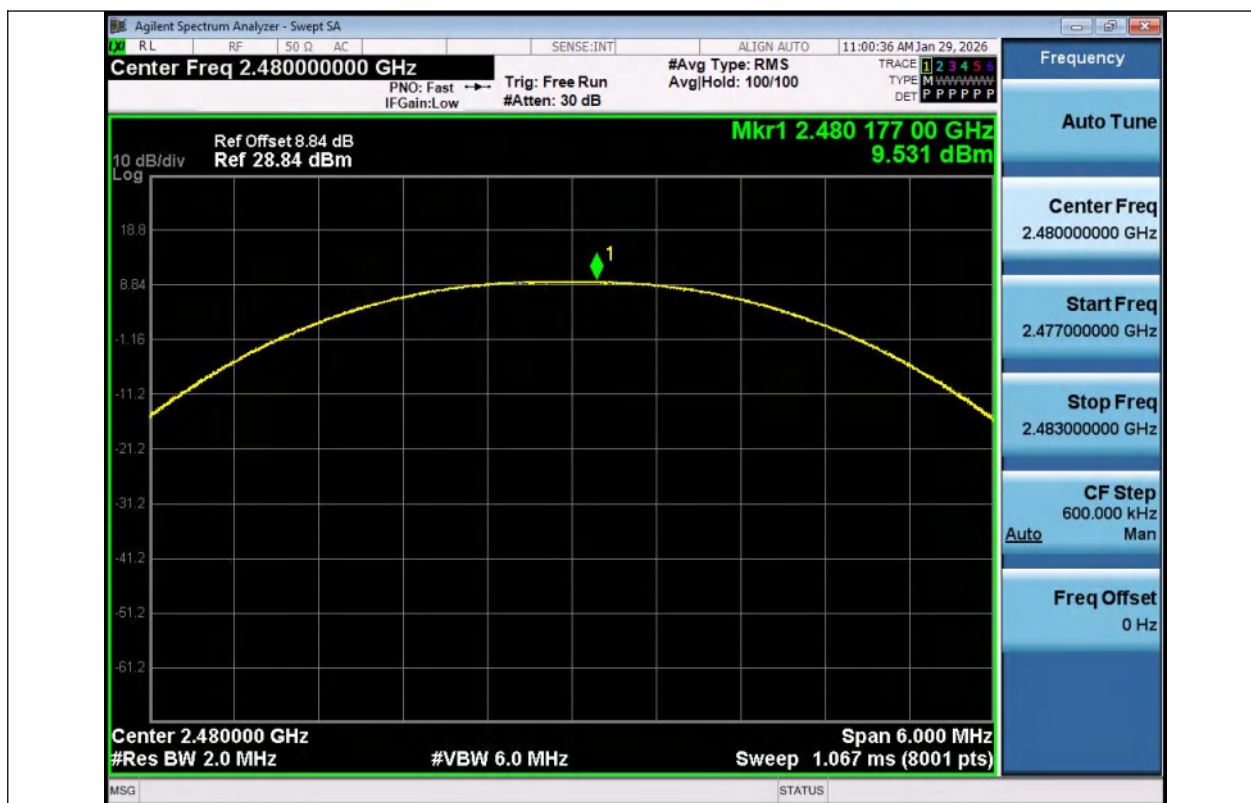

BLE 1M-Ant1-2480-PASS




BLE 2M-Ant1-2402-PASS




BLE 2M-Ant1-2440-PASS




BLE 2M-Ant1-2480-PASS

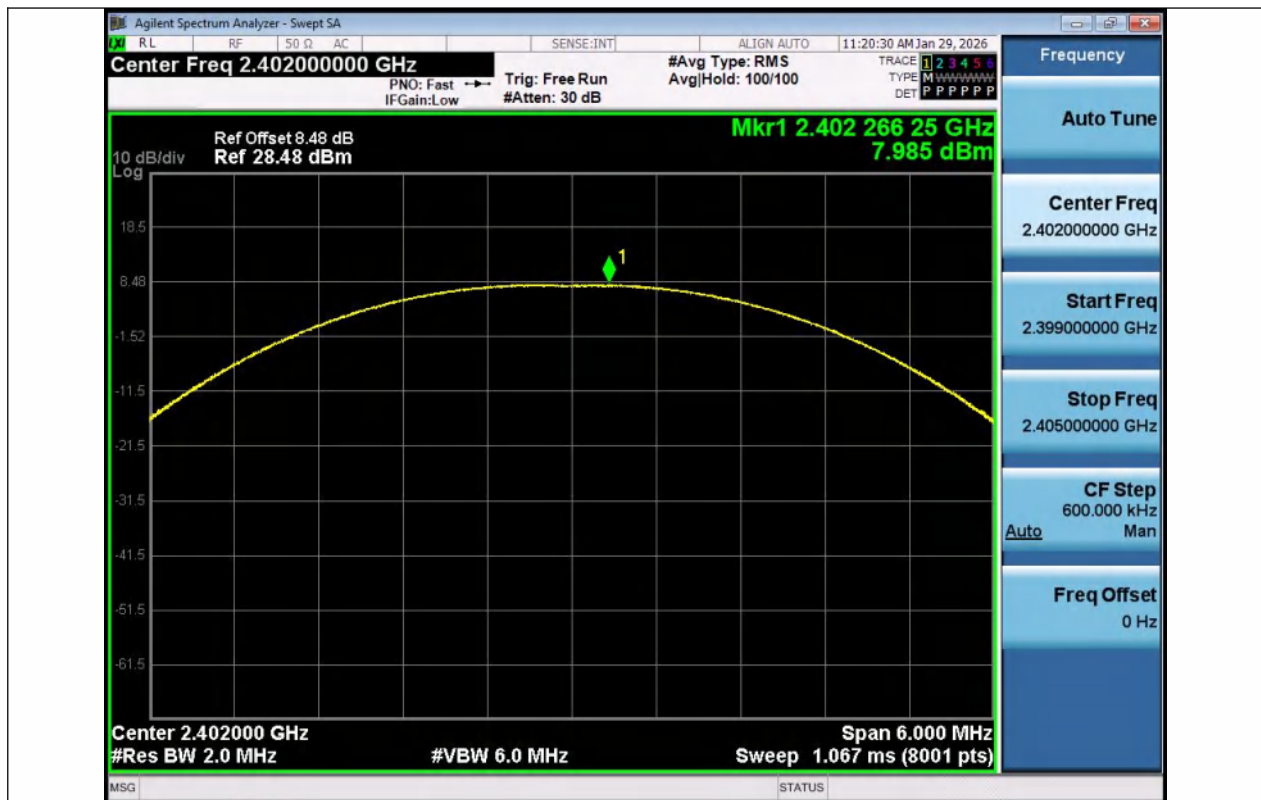

BLE_125K-Ant1-2402-PASS

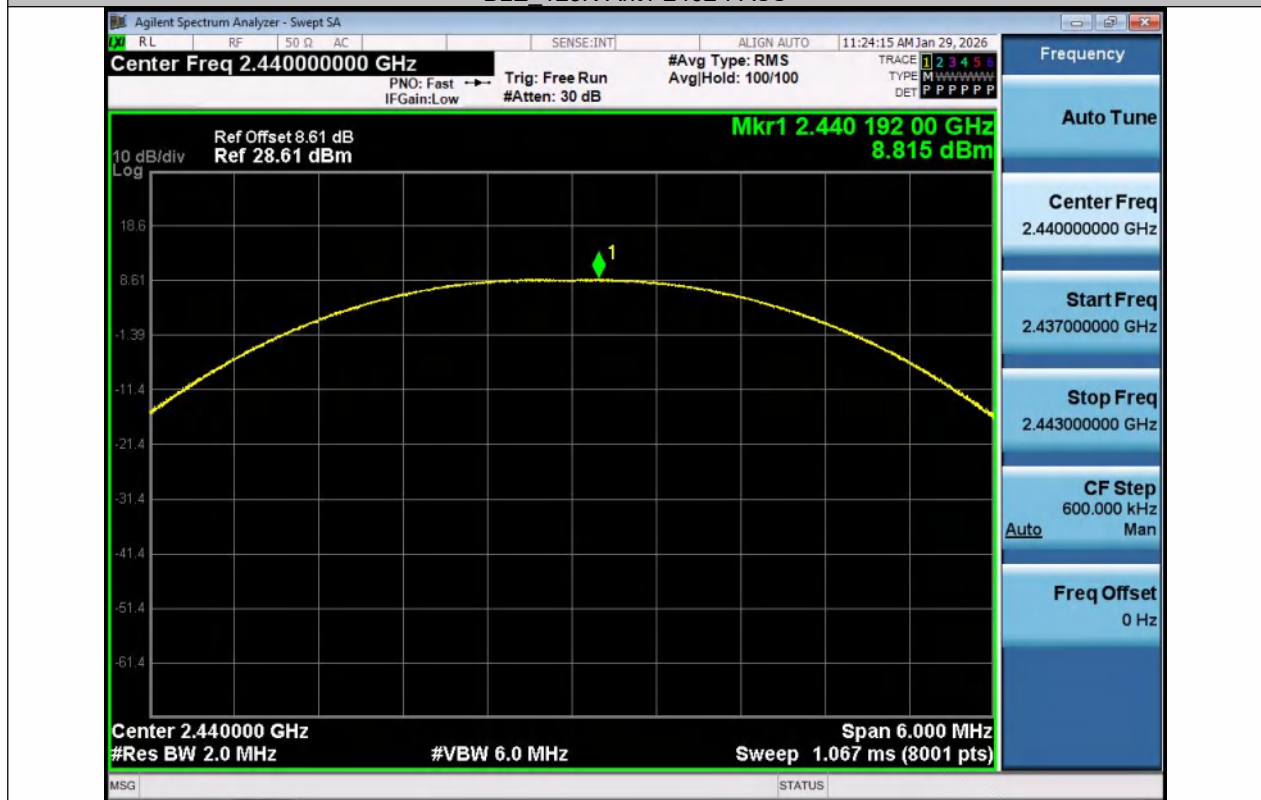


BLE_125K-Ant1-2440-PASS

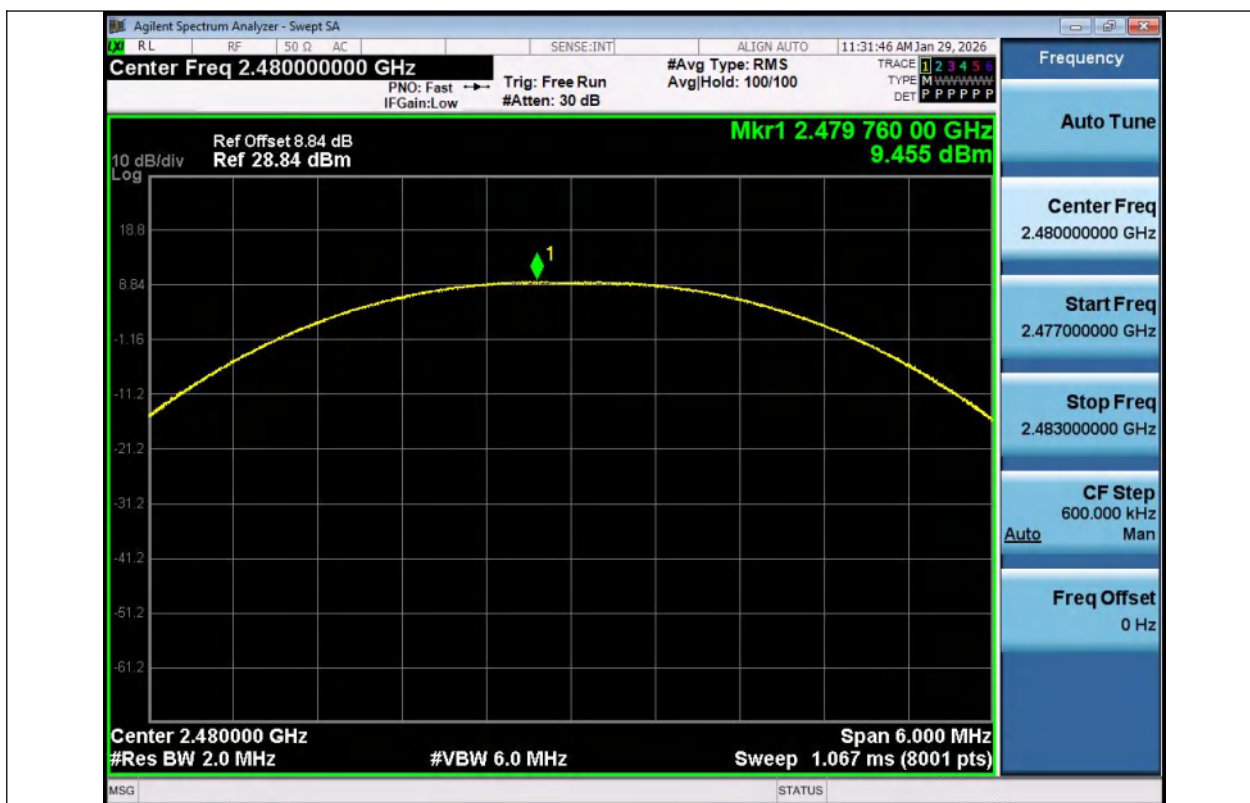


BLE_125K-Ant1-2480-PASS



BLE_500K-Ant1-2402-PASS

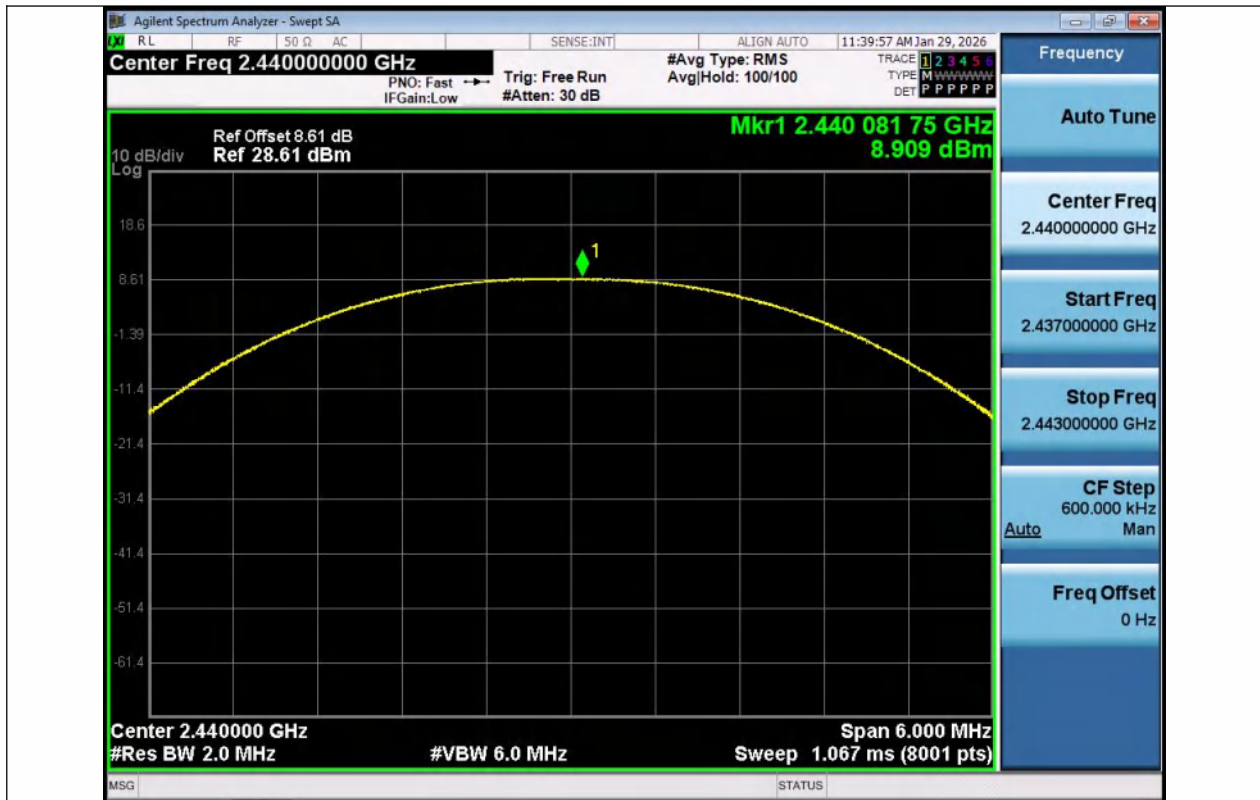

BLE_500K-Ant1-2440-PASS

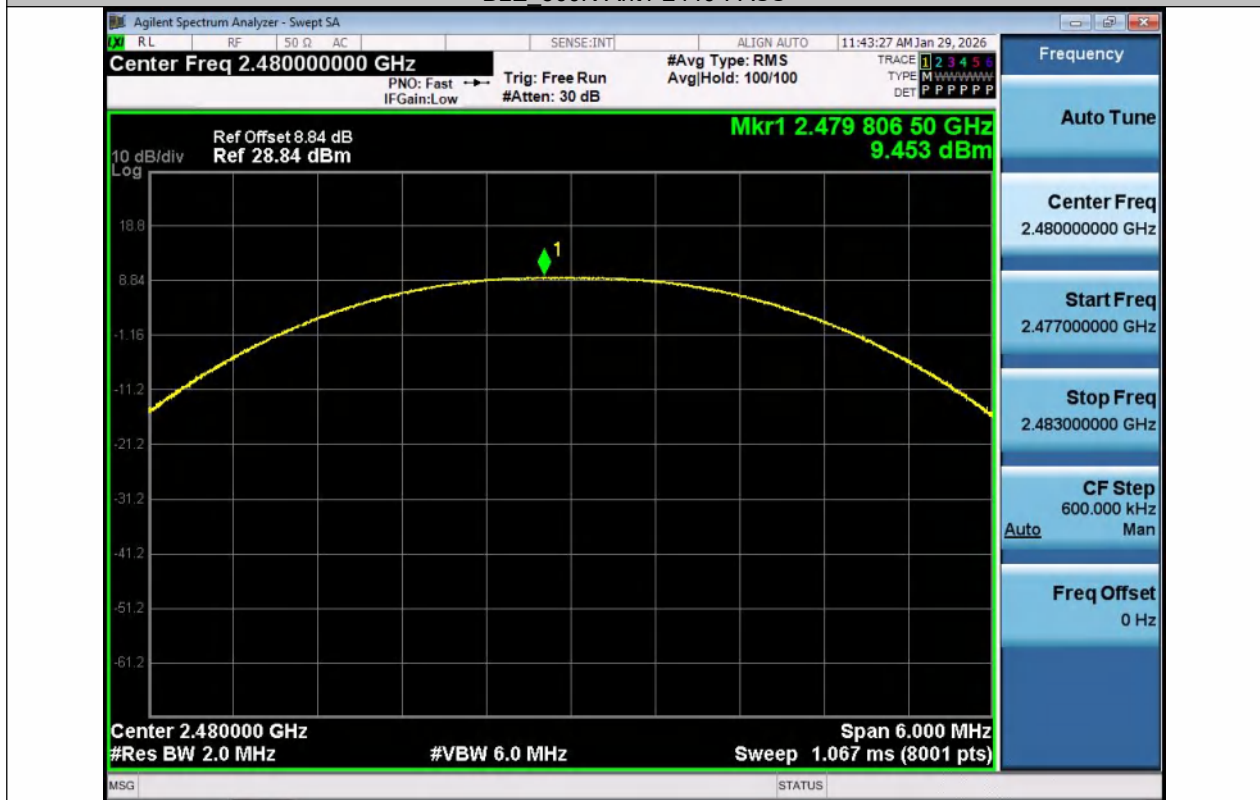

BLE_500K-Ant1-2480-PASS

8.5 MAXIMUM POWER SPECTRAL DENSITY

8.5.1 Applicable Standard

According to FCC Part15.247(e)

According to RSS-247

According to 558074 D01 15.247 Meas Guidance v05r02 Section 8.4

According to ANSI C63.10 Section 11.10.5

8.5.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.5.4 Test Procedure

- a) Measure the duty cycle (D) of the transmitter output signal
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least 1.5 times the OBW.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq [3 \times \text{RBW}]$.
- f) Detector = power averaging (rms) or sample detector (when rms not available).
- g) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering; allow sweep to "free run."
- j) Employ trace averaging (rms) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- m) If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

8.5.5 Test Results

Temperature:	22.6°C
Relative Humidity:	49%
ATM Pressure:	1011 mbar
Test Engineer:	GJ

Note: N/A

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-5.86	≤8.00	PASS
BLE_1M	Ant1	2440	-4.94	≤8.00	PASS
BLE_1M	Ant1	2480	-4.37	≤8.00	PASS
BLE_2M	Ant1	2402	-8.12	≤8.00	PASS
BLE_2M	Ant1	2440	-7.26	≤8.00	PASS
BLE_2M	Ant1	2480	-6.71	≤8.00	PASS
BLE_125K	Ant1	2402	0.73	≤8.00	PASS
BLE_125K	Ant1	2440	1.53	≤8.00	PASS
BLE_125K	Ant1	2480	2.13	≤8.00	PASS
BLE_500K	Ant1	2402	0.45	≤8.00	PASS
BLE_500K	Ant1	2440	1.31	≤8.00	PASS
BLE_500K	Ant1	2480	1.95	≤8.00	PASS







BLE_1M-Ant1-2402-PASS




BLE_1M-Ant1-2440-PASS

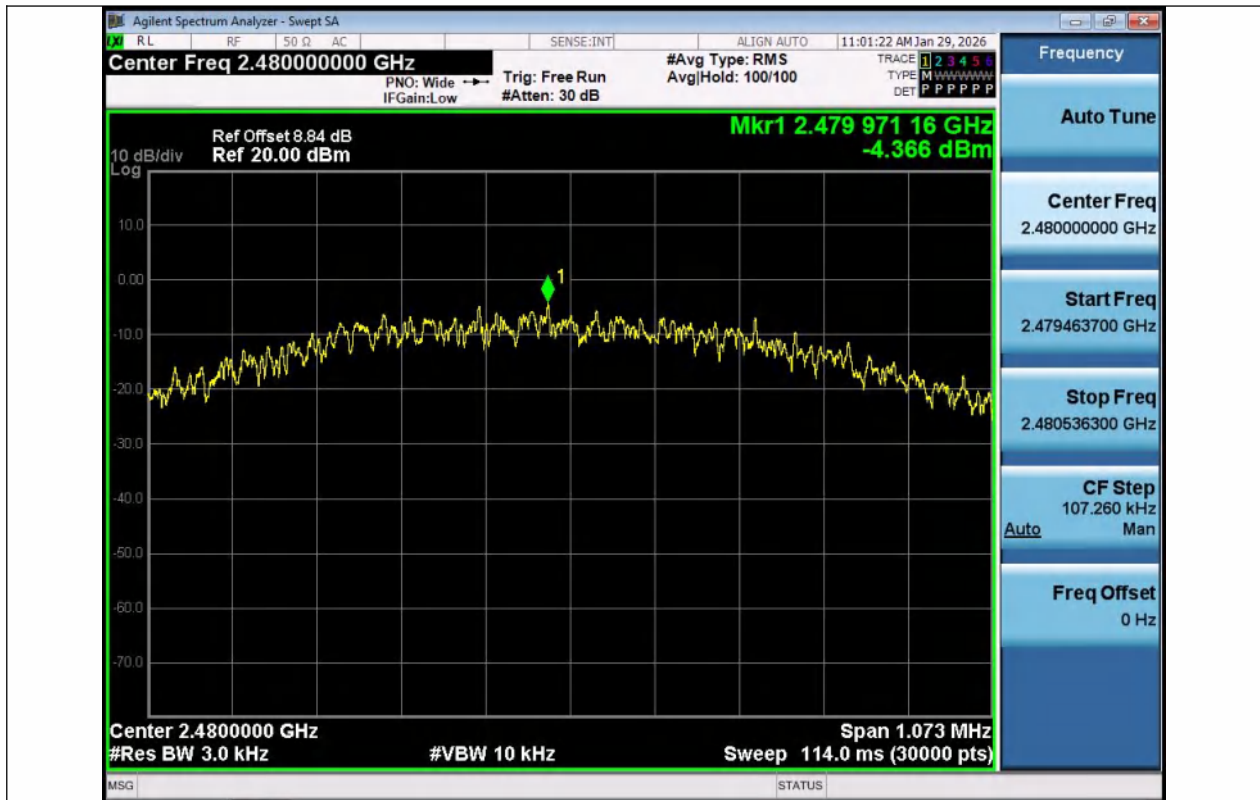


BLE_1M-Ant1-2480-PASS

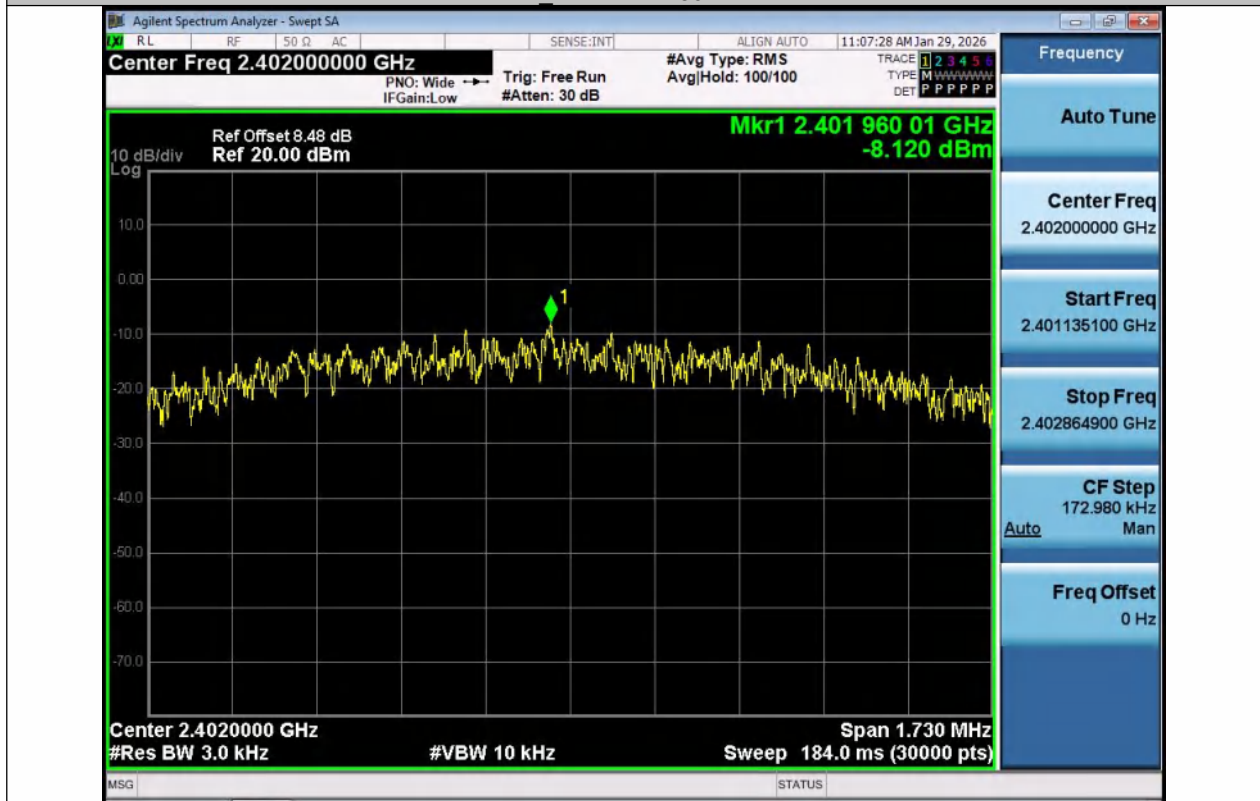


BLE_2M-Ant1-2402-PASS

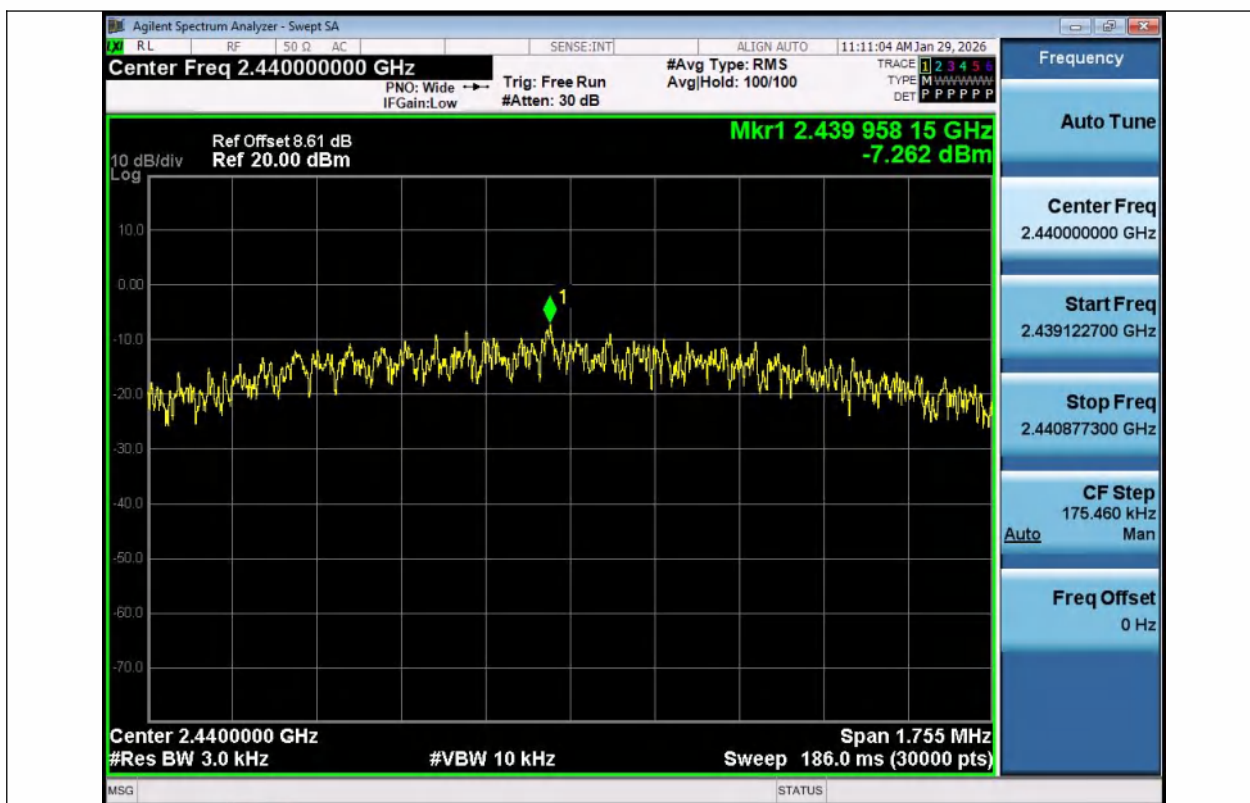


BLE 2M-Ant1-2440-PASS

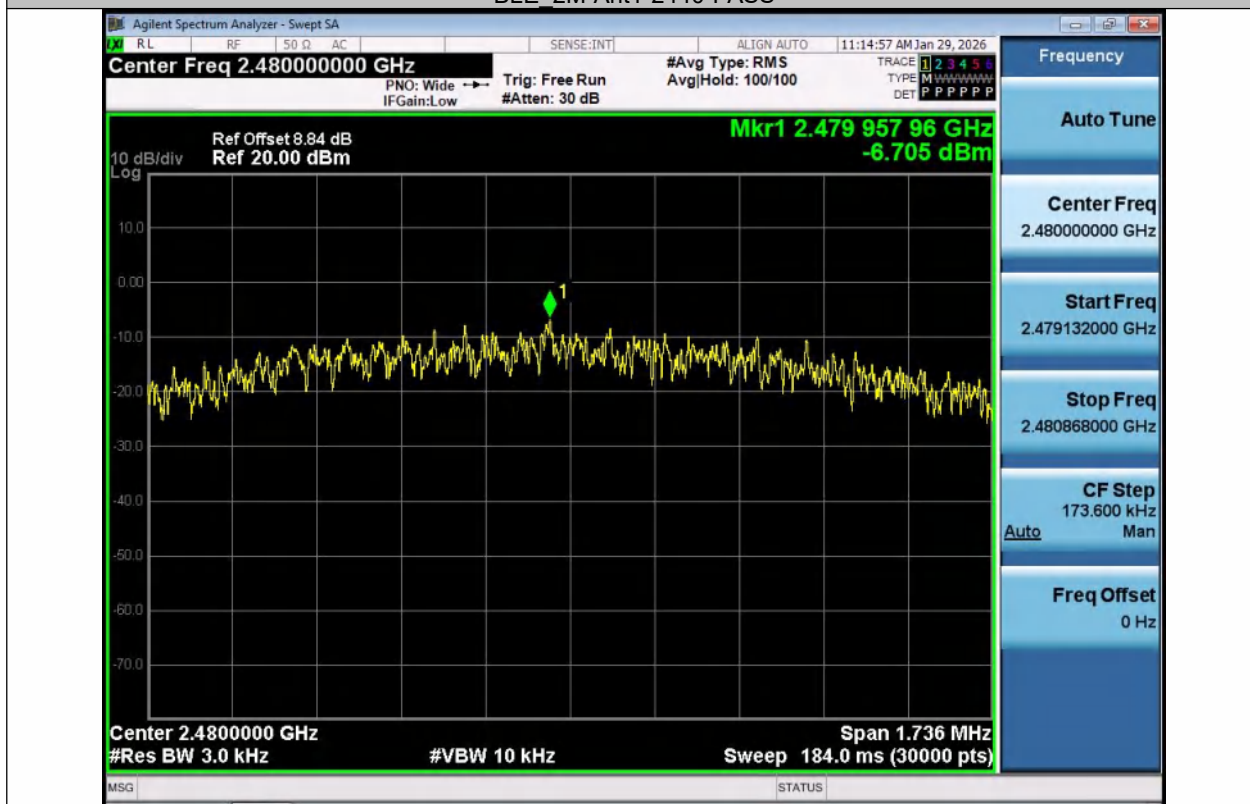


BLE 2M-Ant1-2480-PASS

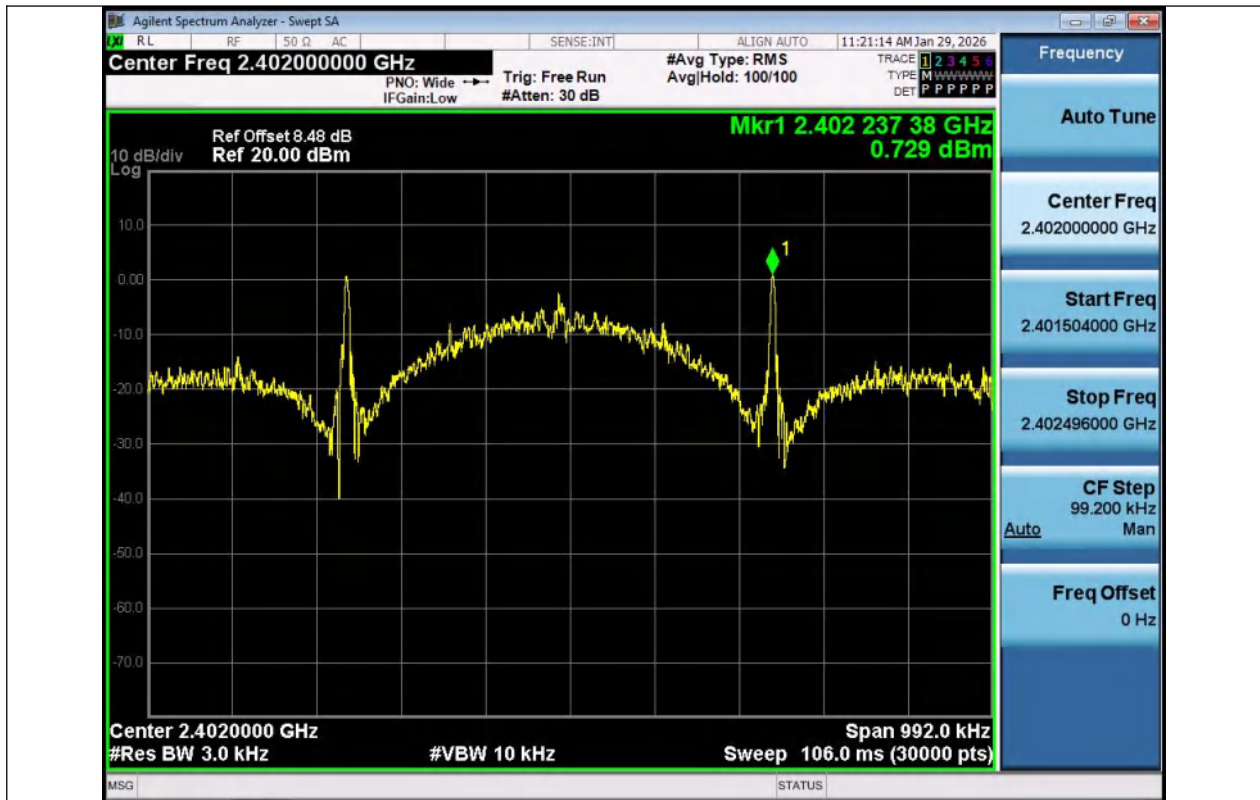


BLE_125K-Ant1-2402-PASS

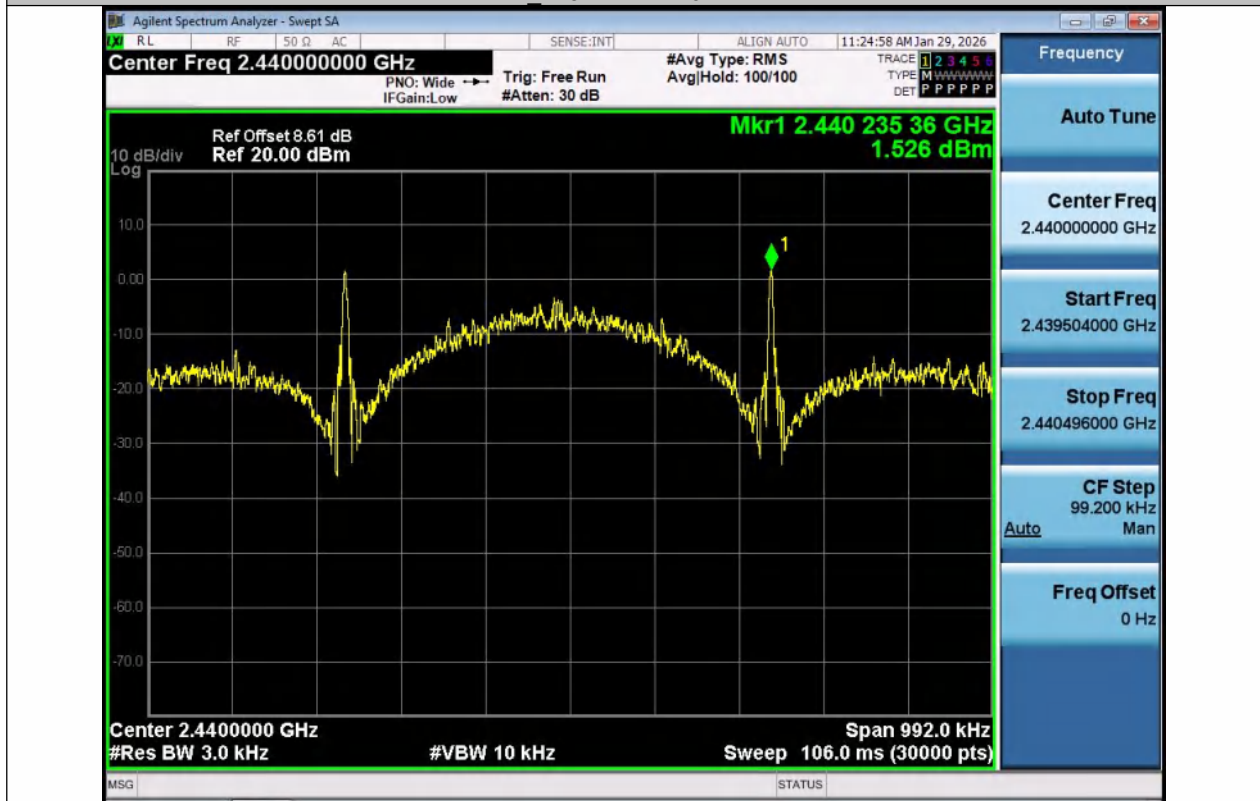

BLE_125K-Ant1-2440-PASS

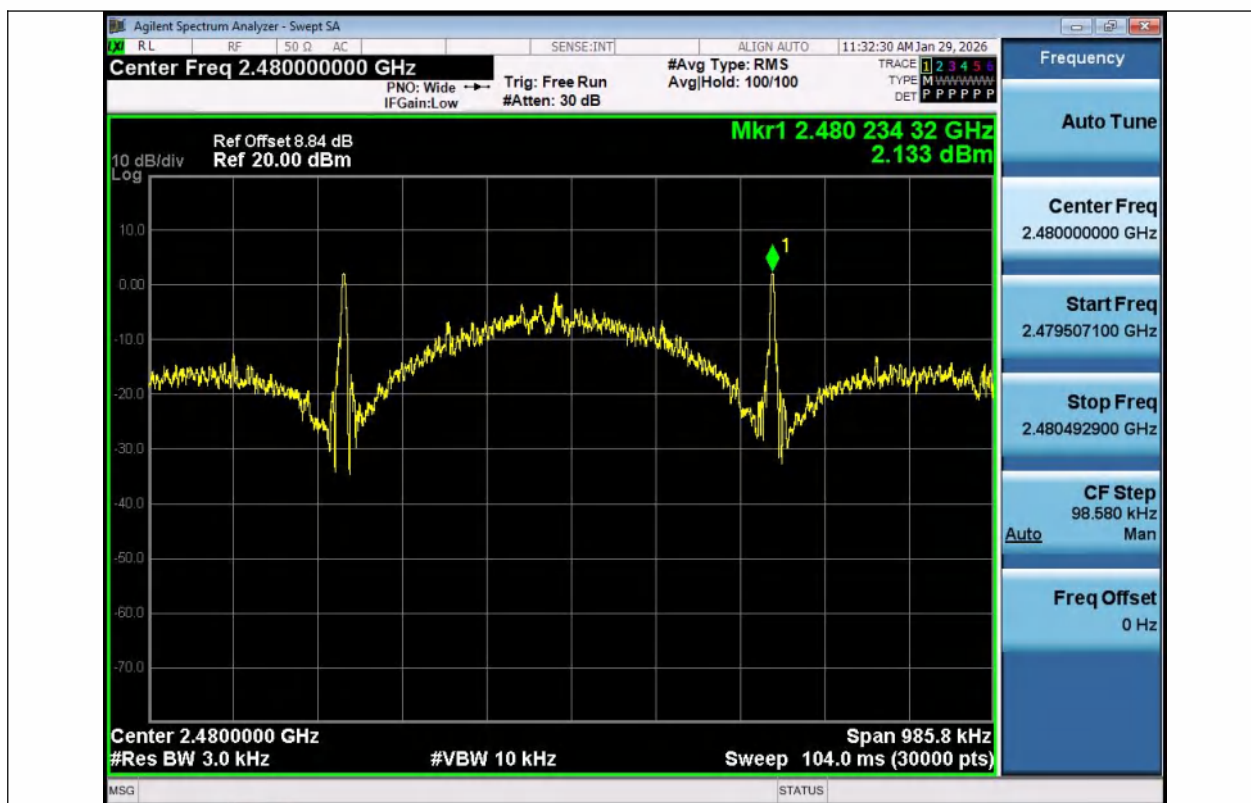

BLE_125K-Ant1-2480-PASS

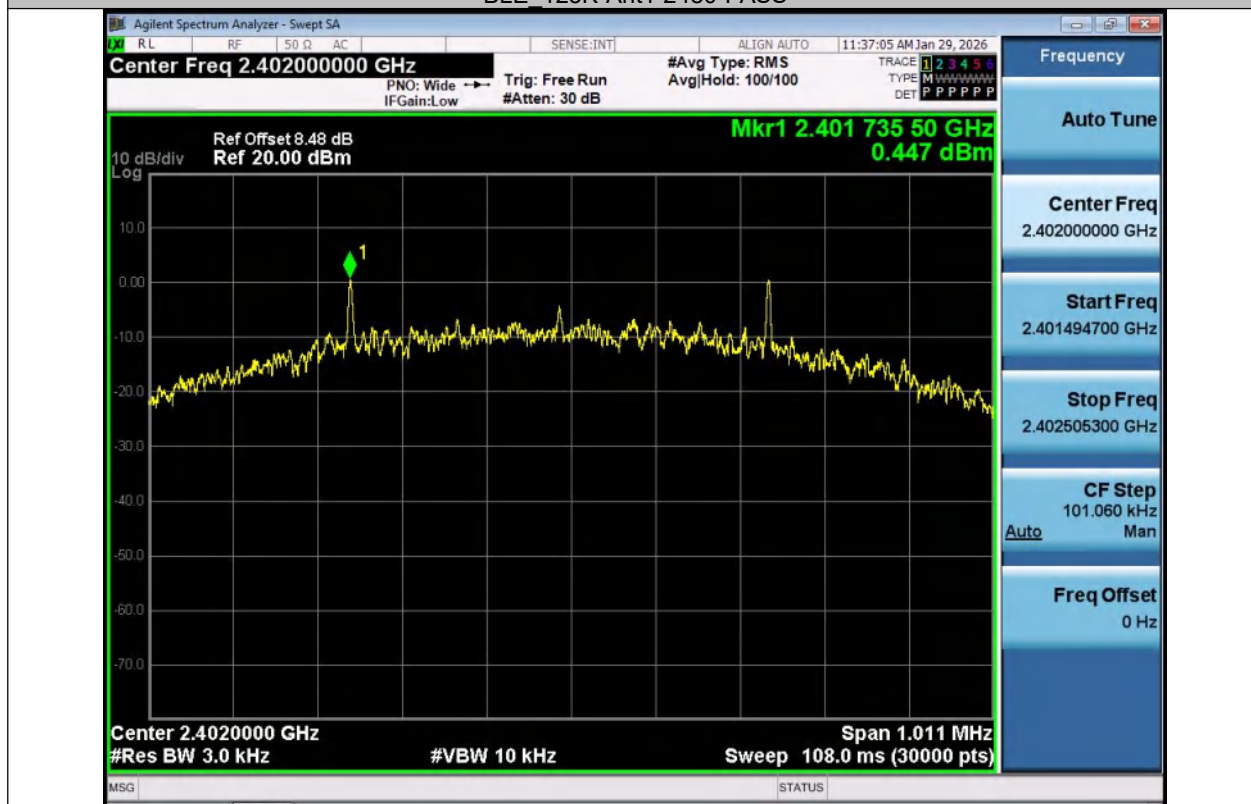

BLE_500K-Ant1-2402-PASS



BLE_500K-Ant1-2440-PASS



BLE_500K-Ant1-2480-PASS

8.6 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.6.1 Applicable Standard

According to FCC Part15.247(d)

According to RSS-247

According to 558074 D01 15.247 Meas Guidance v05r02 Section 8.5

According to ANSI C63.10 Section 11.11

8.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to = 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW $\geq 1\%$ of the span=100kHz Set VBW $\geq 3 \times$ RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW =300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.6.5 Test Results

Temperature:	22.6°C
Relative Humidity:	49%
ATM Pressure:	1011 mbar
Test Engineer:	GJ

Note: N/A

Band edge measurements

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	6.29	-47.75	≤-13.71	PASS
BLE_1M	Ant1	High	2480	7.89	-53.09	≤-12.11	PASS
BLE_2M	Ant1	Low	2402	4.01	-37.79	≤-15.99	PASS
BLE_2M	Ant1	High	2480	6.29	-51.96	≤-13.71	PASS
BLE_125K	Ant1	Low	2402	4.58	-46.79	≤-15.43	PASS
BLE_125K	Ant1	High	2480	6.04	-52.9	≤-13.96	PASS
BLE_500K	Ant1	Low	2402	6.44	-46.47	≤-13.56	PASS
BLE_500K	Ant1	High	2480	7.90	-53.32	≤-12.1	PASS


Conducted Spurious Emission


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0~Reference	6.48	6.48	---	PASS
BLE_1M	Ant1	2402	30~1000	6.48	-60.82	≤-13.52	PASS
BLE_1M	Ant1	2402	1000~26500	6.48	-51.05	≤-13.52	PASS
BLE_1M	Ant1	2440	0~Reference	6.01	6.01	---	PASS
BLE_1M	Ant1	2440	30~1000	6.01	-57.62	≤-13.99	PASS
BLE_1M	Ant1	2440	1000~26500	6.01	-50.81	≤-13.99	PASS
BLE_1M	Ant1	2480	0~Reference	7.97	7.97	---	PASS
BLE_1M	Ant1	2480	30~1000	7.97	-59.2	≤-12.03	PASS
BLE_1M	Ant1	2480	1000~26500	7.97	-50.72	≤-12.03	PASS
BLE_2M	Ant1	2402	0~Reference	3.73	3.73	---	PASS
BLE_2M	Ant1	2402	30~1000	3.73	-62.6	≤-16.27	PASS
BLE_2M	Ant1	2402	1000~26500	3.73	-50.98	≤-16.27	PASS
BLE_2M	Ant1	2440	0~Reference	4.62	4.62	---	PASS
BLE_2M	Ant1	2440	30~1000	4.62	-61.23	≤-15.38	PASS
BLE_2M	Ant1	2440	1000~26500	4.62	-51.35	≤-15.38	PASS
BLE_2M	Ant1	2480	0~Reference	5.29	5.29	---	PASS
BLE_2M	Ant1	2480	30~1000	5.29	-59.72	≤-14.71	PASS
BLE_2M	Ant1	2480	1000~26500	5.29	-44.24	≤-14.71	PASS
BLE_125K	Ant1	2402	0~Reference	4.69	4.69	---	PASS
BLE_125K	Ant1	2402	30~1000	4.69	-60.76	≤-15.31	PASS
BLE_125K	Ant1	2402	1000~26500	4.69	-51.04	≤-15.31	PASS
BLE_125K	Ant1	2440	0~Reference	5.34	5.34	---	PASS
BLE_125K	Ant1	2440	30~1000	5.34	-61.64	≤-14.66	PASS
BLE_125K	Ant1	2440	1000~26500	5.34	-51.19	≤-14.66	PASS
BLE_125K	Ant1	2480	0~Reference	6.23	6.23	---	PASS
BLE_125K	Ant1	2480	30~1000	6.23	-59.71	≤-13.77	PASS
BLE_125K	Ant1	2480	1000~26500	6.23	-50.89	≤-13.77	PASS

BLE_500K	Ant1	2402	0~Reference	5.59	5.59	---	PASS
BLE_500K	Ant1	2402	30~1000	5.59	-59.96	≤-14.41	PASS
BLE_500K	Ant1	2402	1000~26500	5.59	-50.91	≤-14.41	PASS
BLE_500K	Ant1	2440	0~Reference	5.25	5.25	---	PASS
BLE_500K	Ant1	2440	30~1000	5.25	-58.89	≤-14.75	PASS
BLE_500K	Ant1	2440	1000~26500	5.25	-50.04	≤-14.75	PASS
BLE_500K	Ant1	2480	0~Reference	7.13	7.13	---	PASS
BLE_500K	Ant1	2480	30~1000	7.13	-59.22	≤-12.87	PASS
BLE_500K	Ant1	2480	1000~26500	7.13	-50.87	≤-12.87	PASS




Band edge measurements

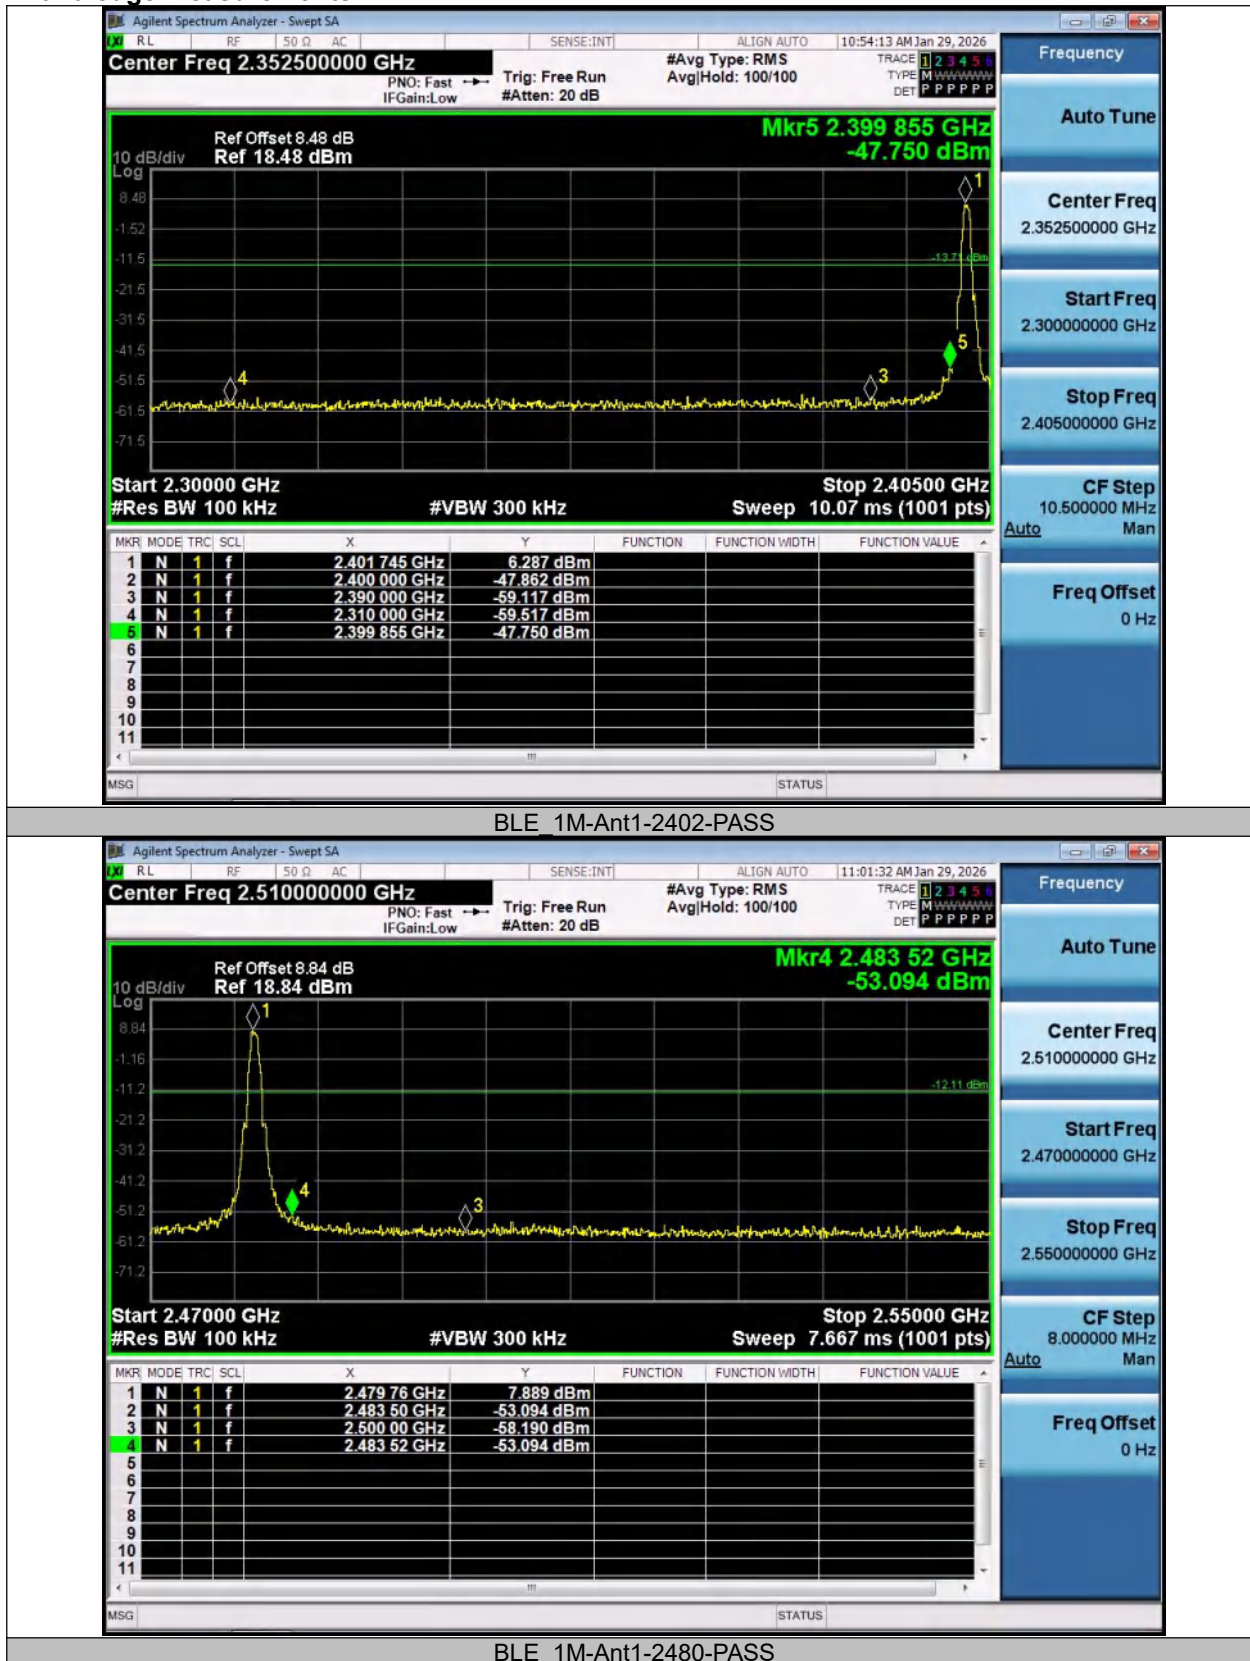


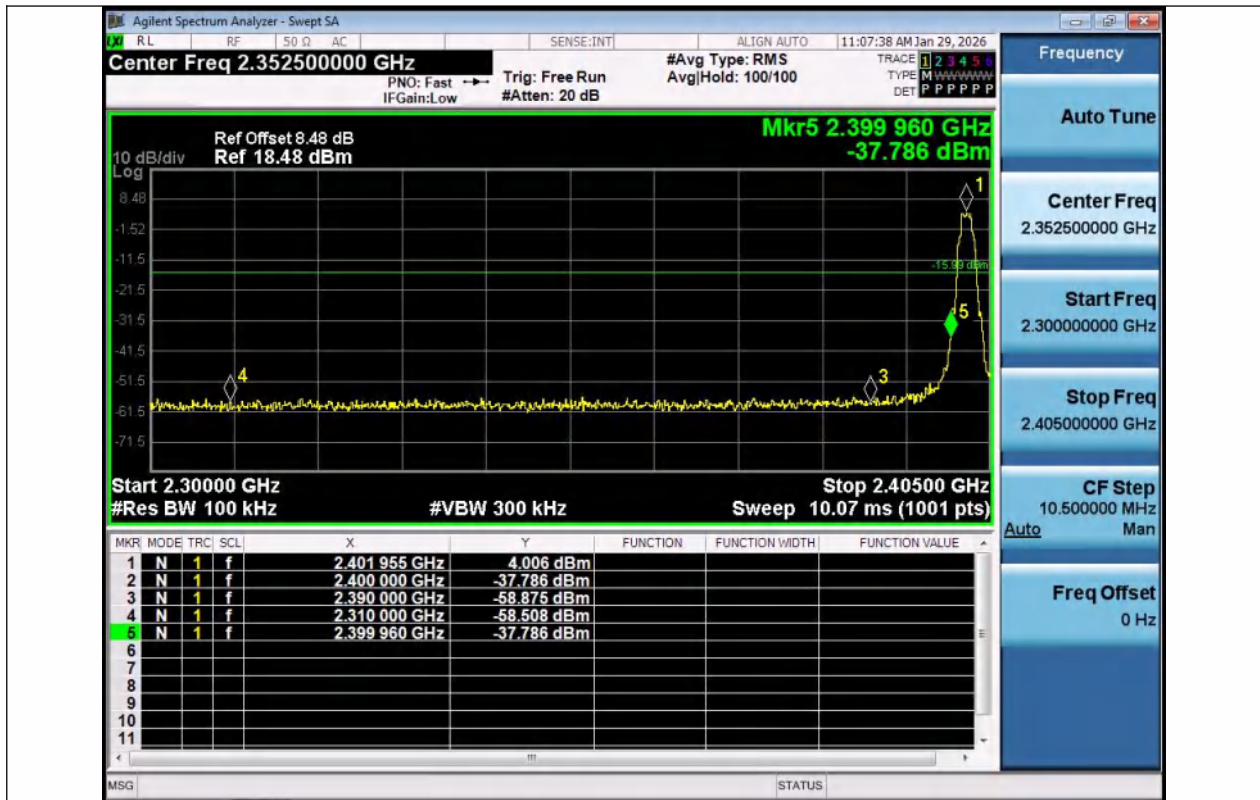


BLE_2M-Ant1-2402-PASS

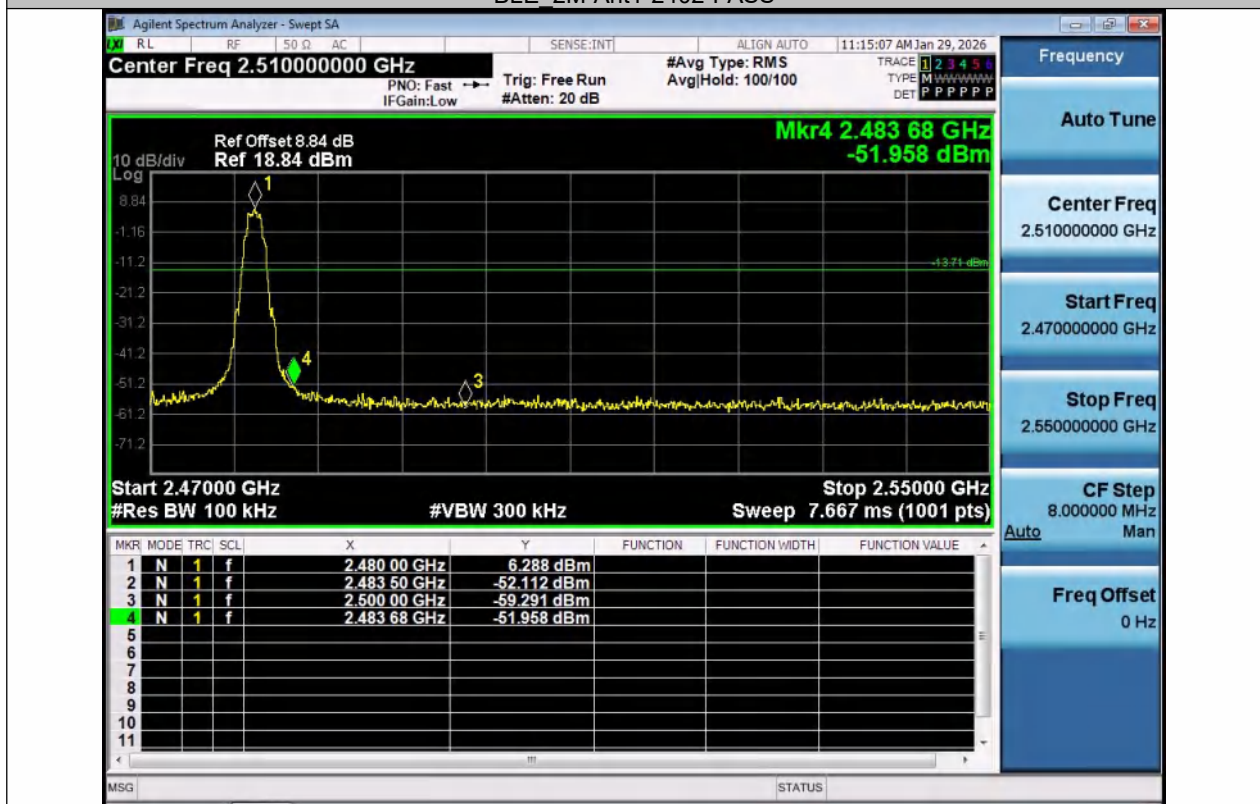


BLE_2M-Ant1-2480-PASS

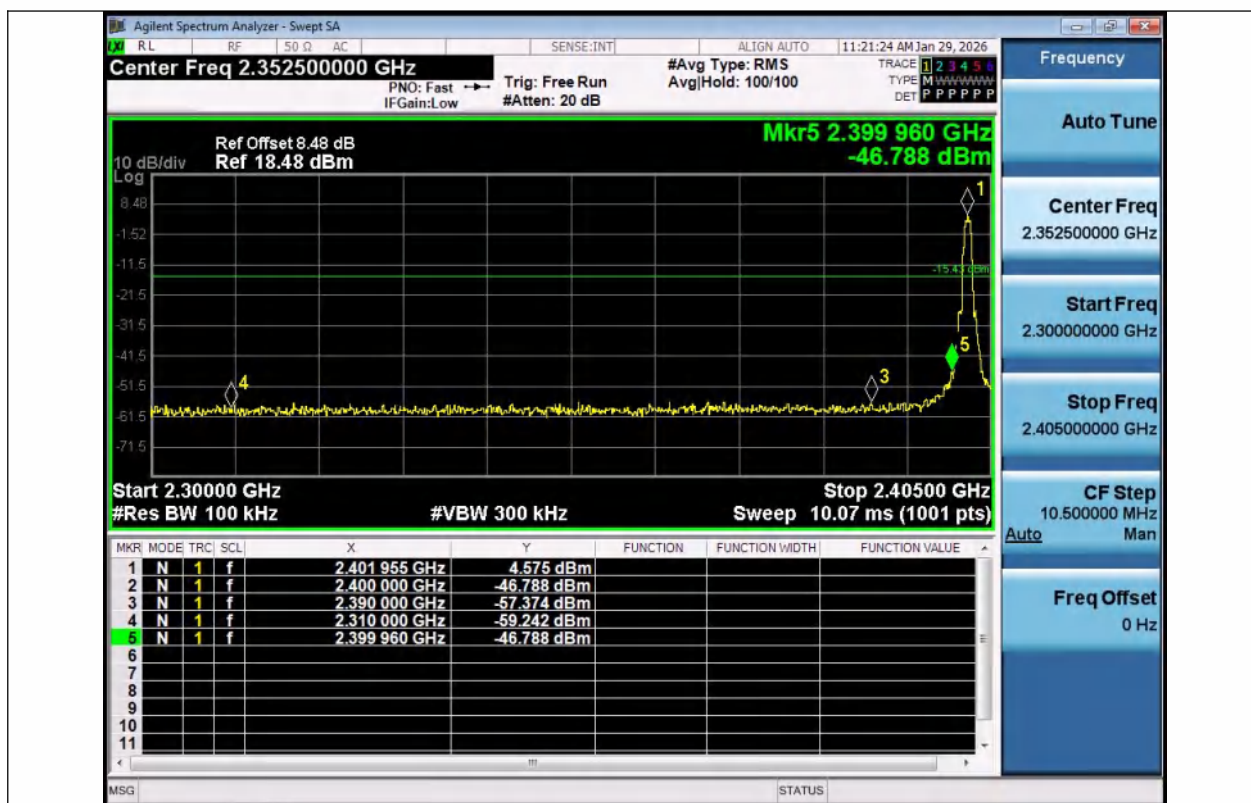


BLE_125K-Ant1-2402-PASS

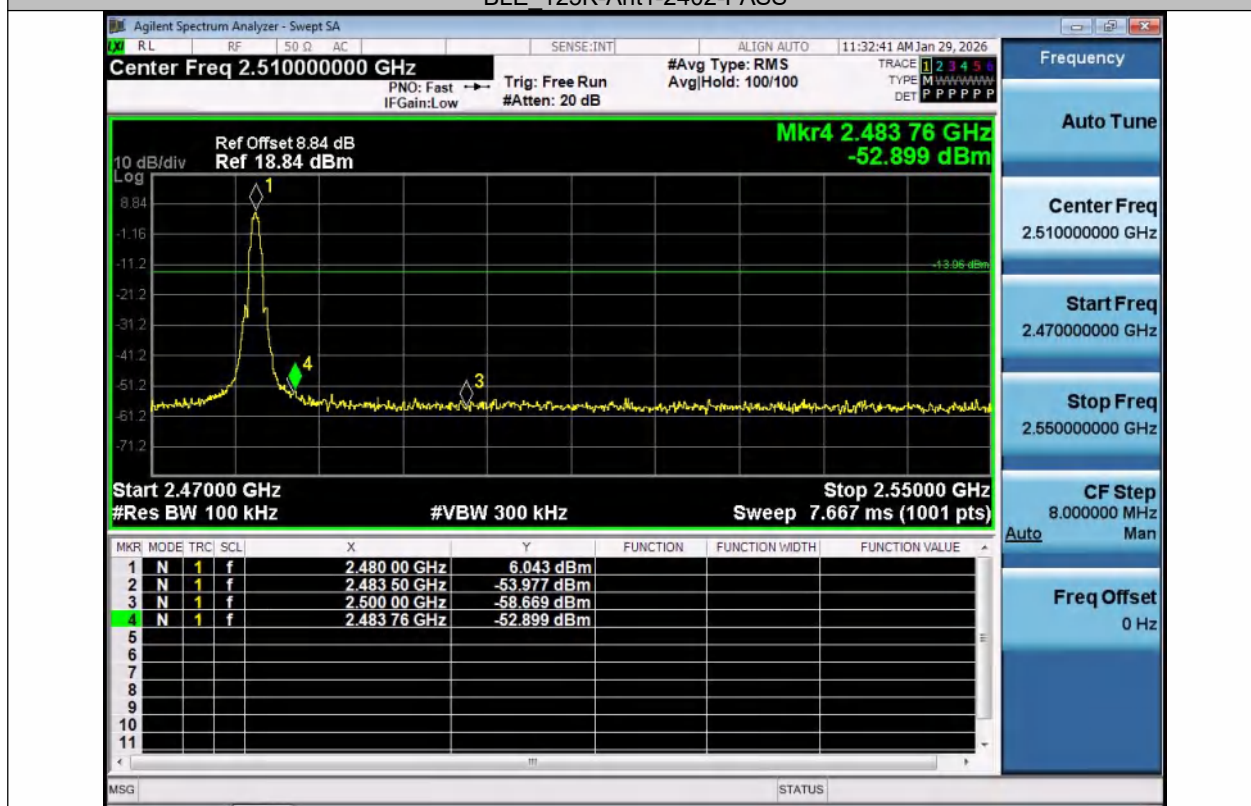

BLE_125K-Ant1-2480-PASS

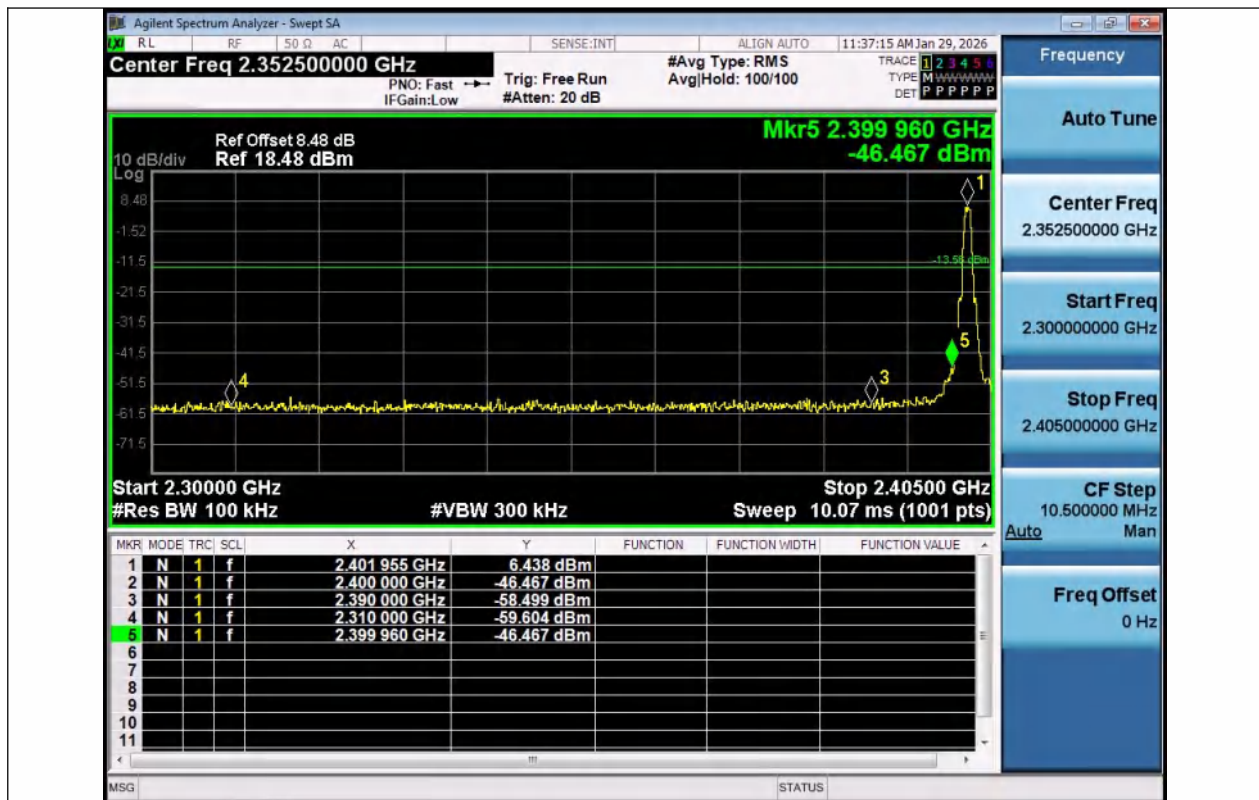



BLE_500K-Ant1-2402-PASS

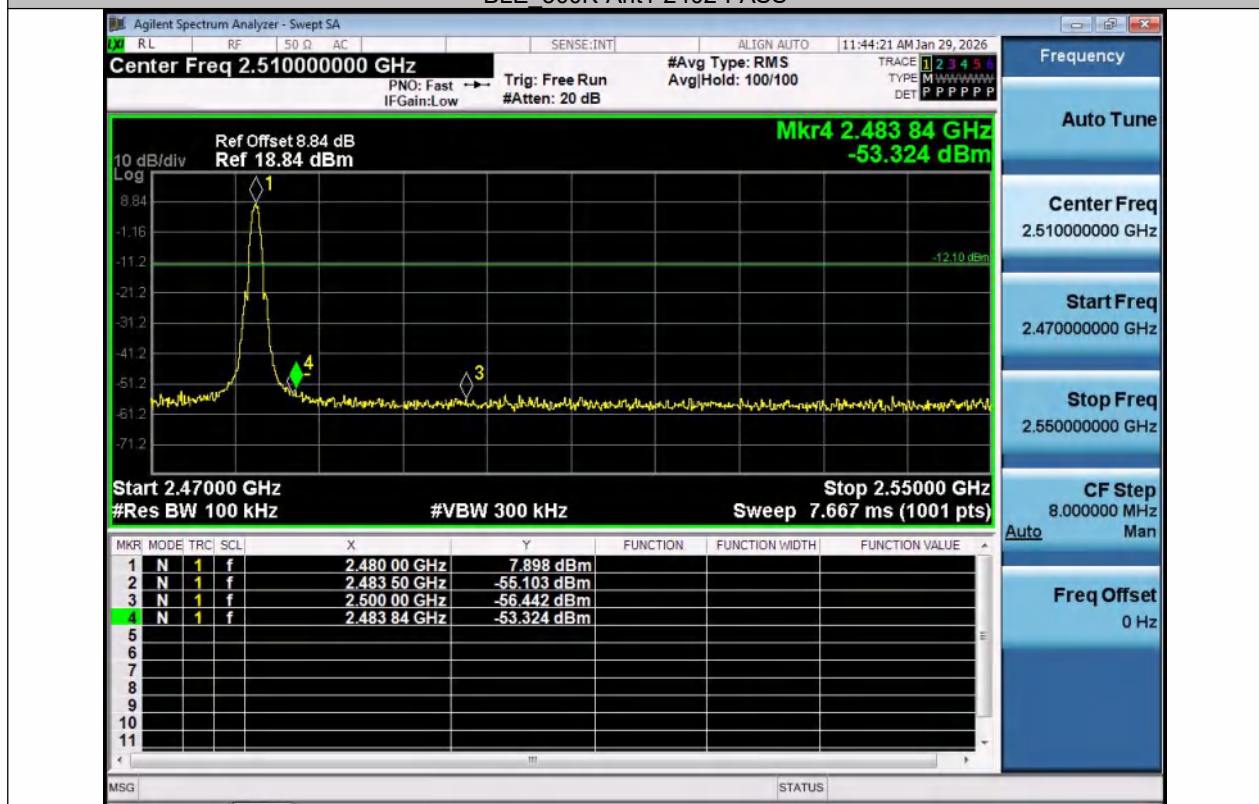

BLE_500K-Ant1-2480-PASS

Conducted Spurious Emission

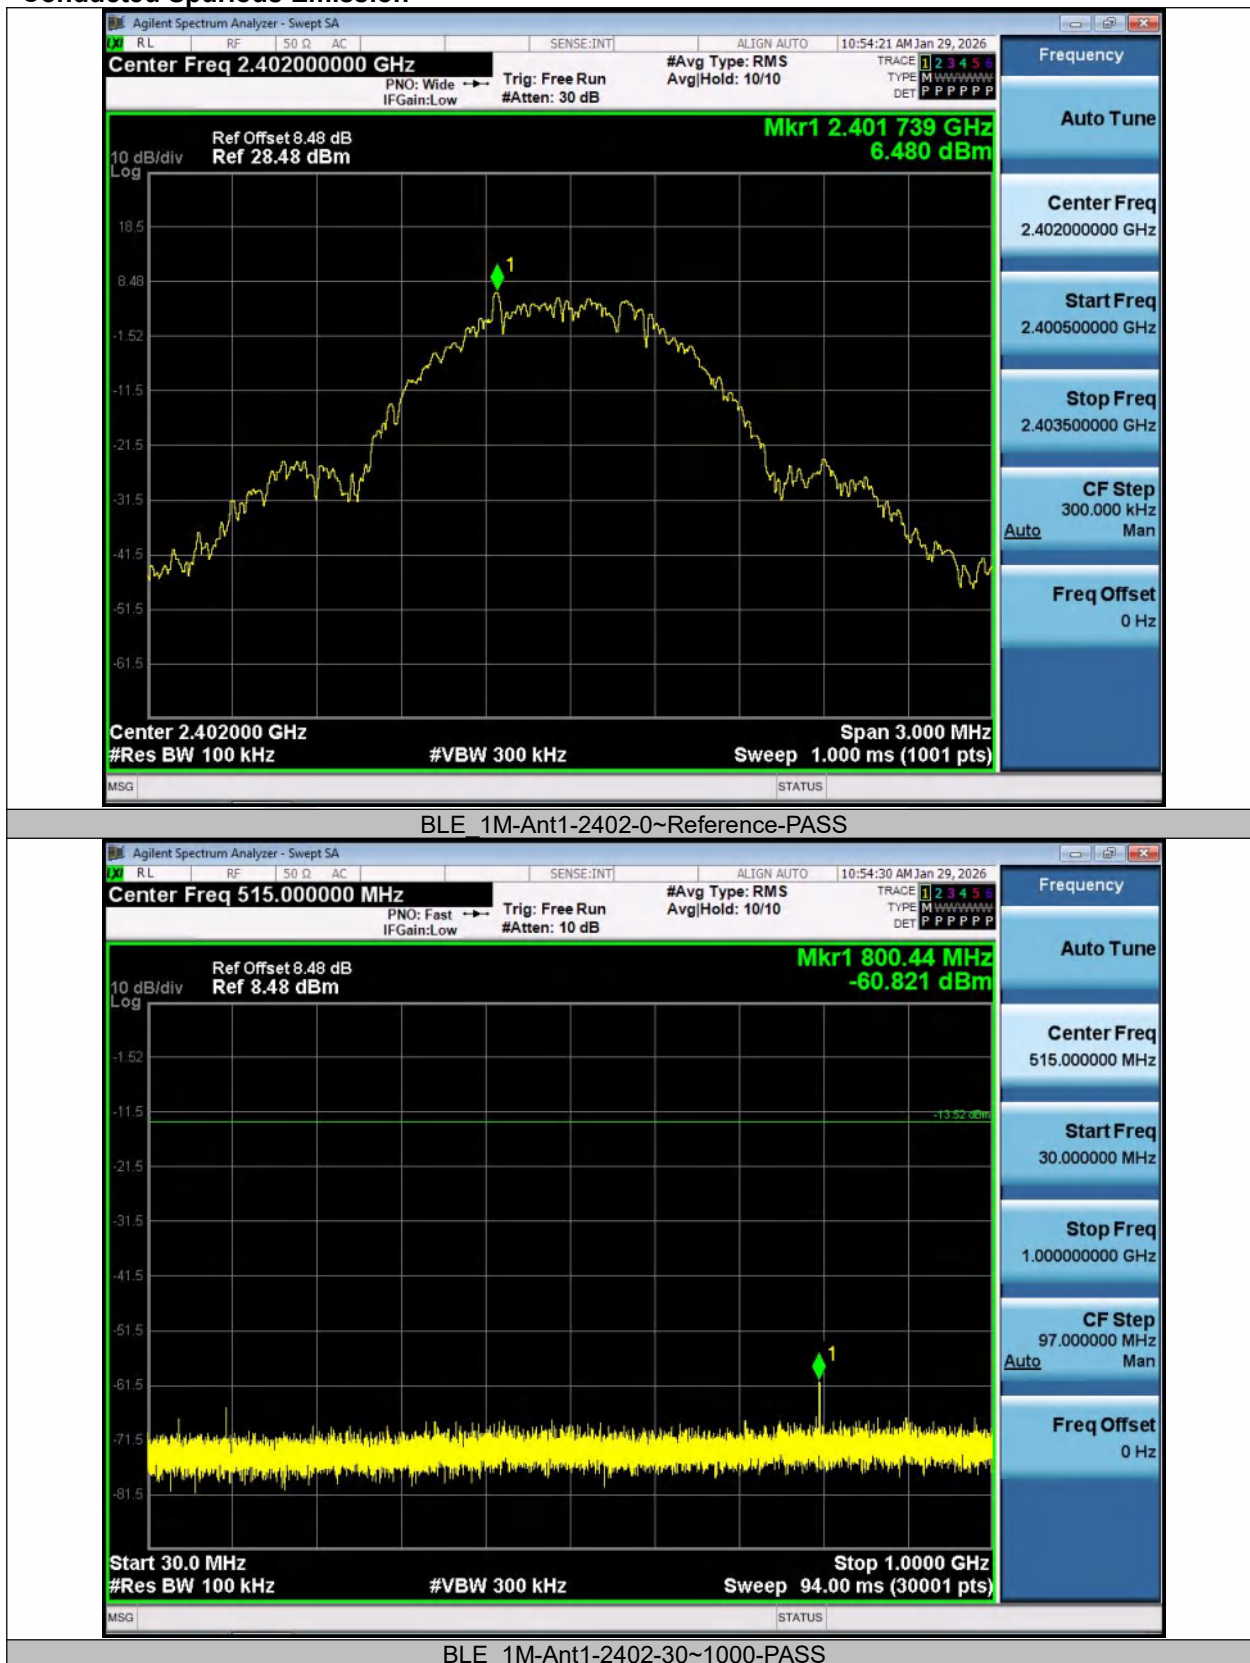


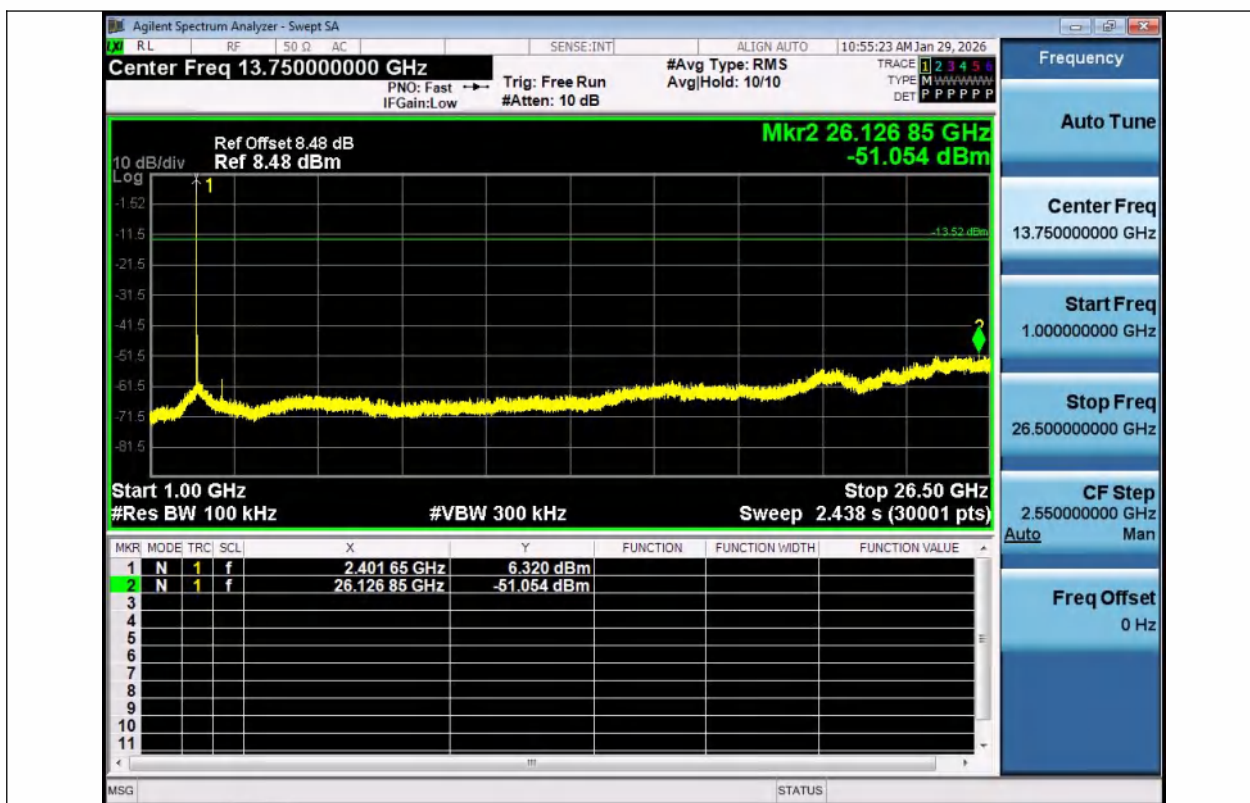


BLE_1M-Ant1-2402-1000~26500-PASS



BLE_1M-Ant1-2440-0~Reference-PASS

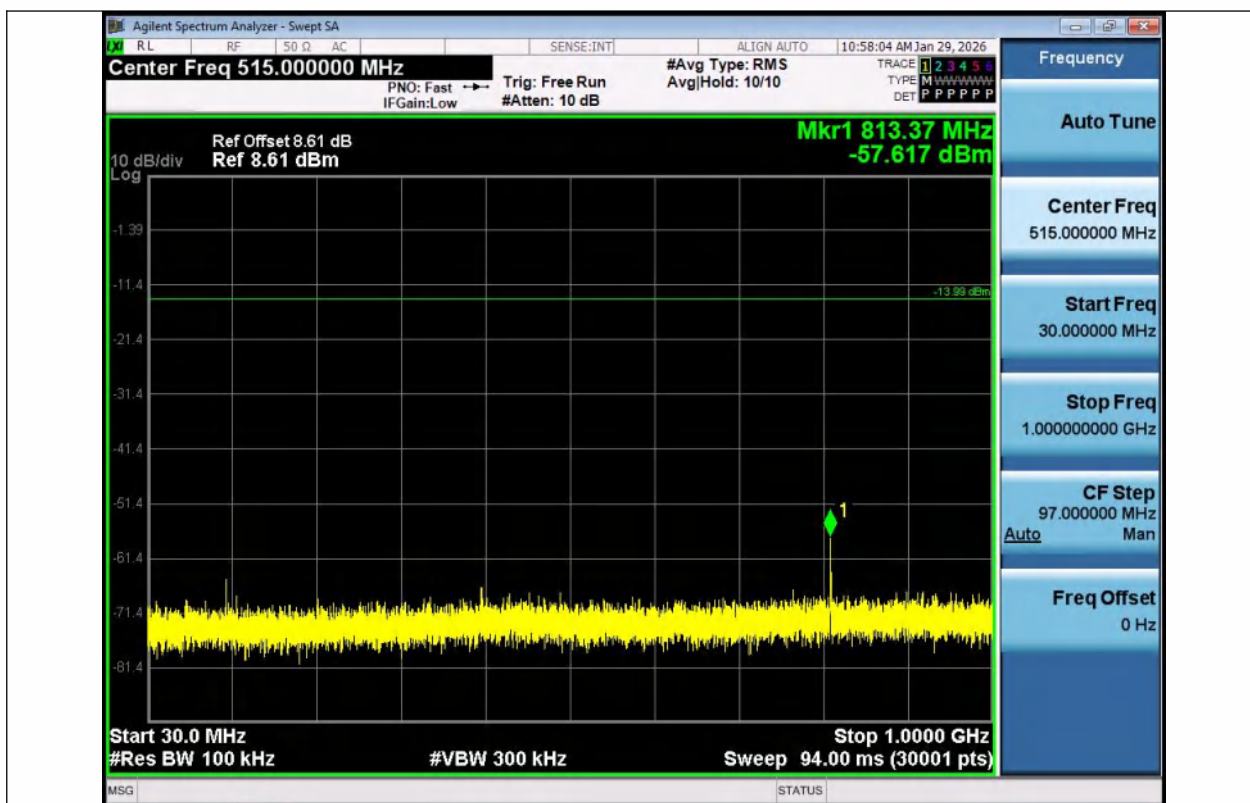


BLE_1M-Ant1-2440-30~1000-PASS

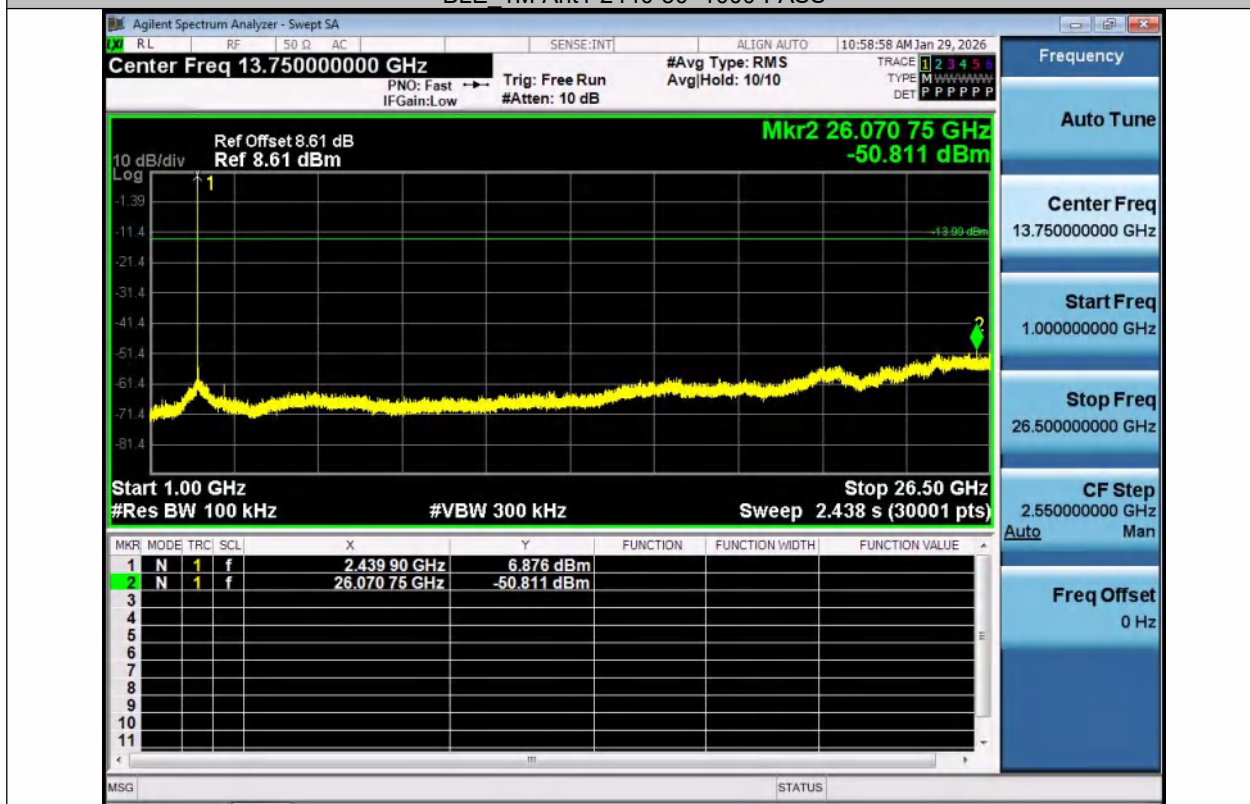


BLE_1M-Ant1-2440-1000~26500-PASS



BLE_1M-Ant1-2480-0~Reference-PASS

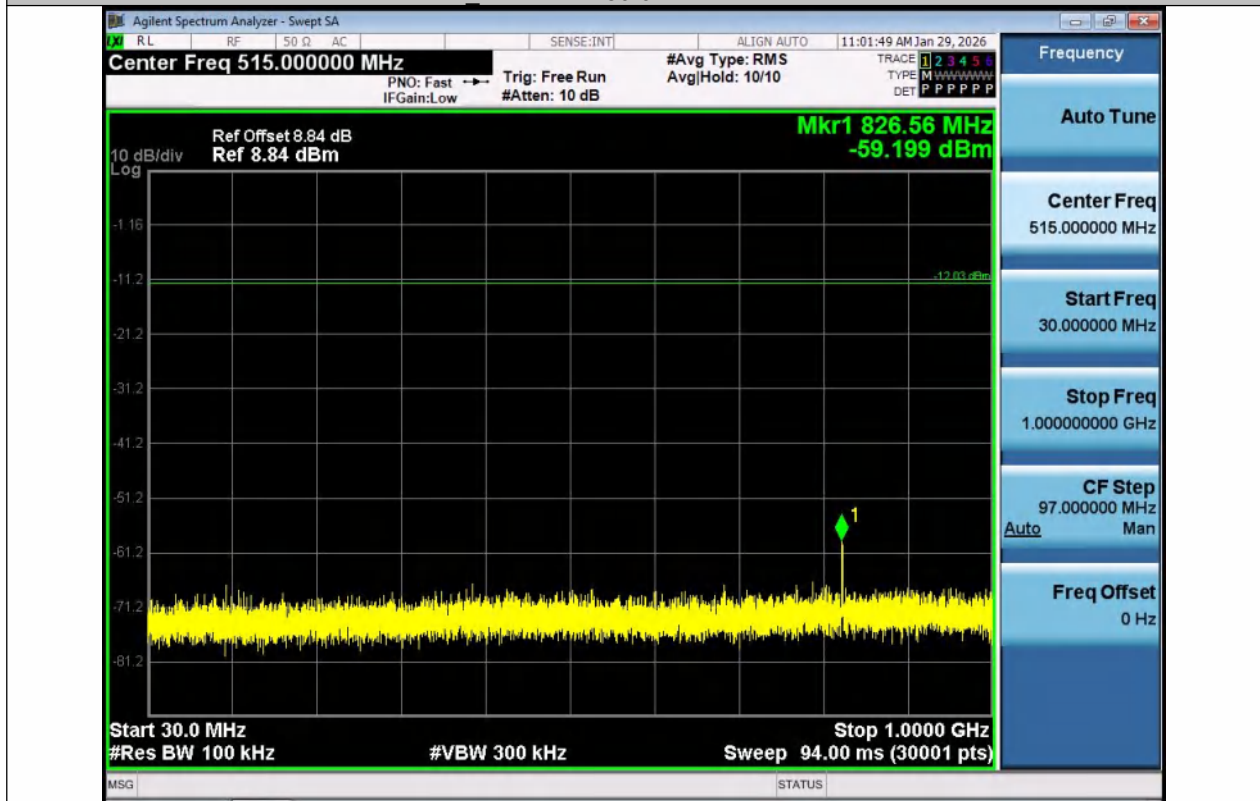


BLE_1M-Ant1-2480-30~1000-PASS

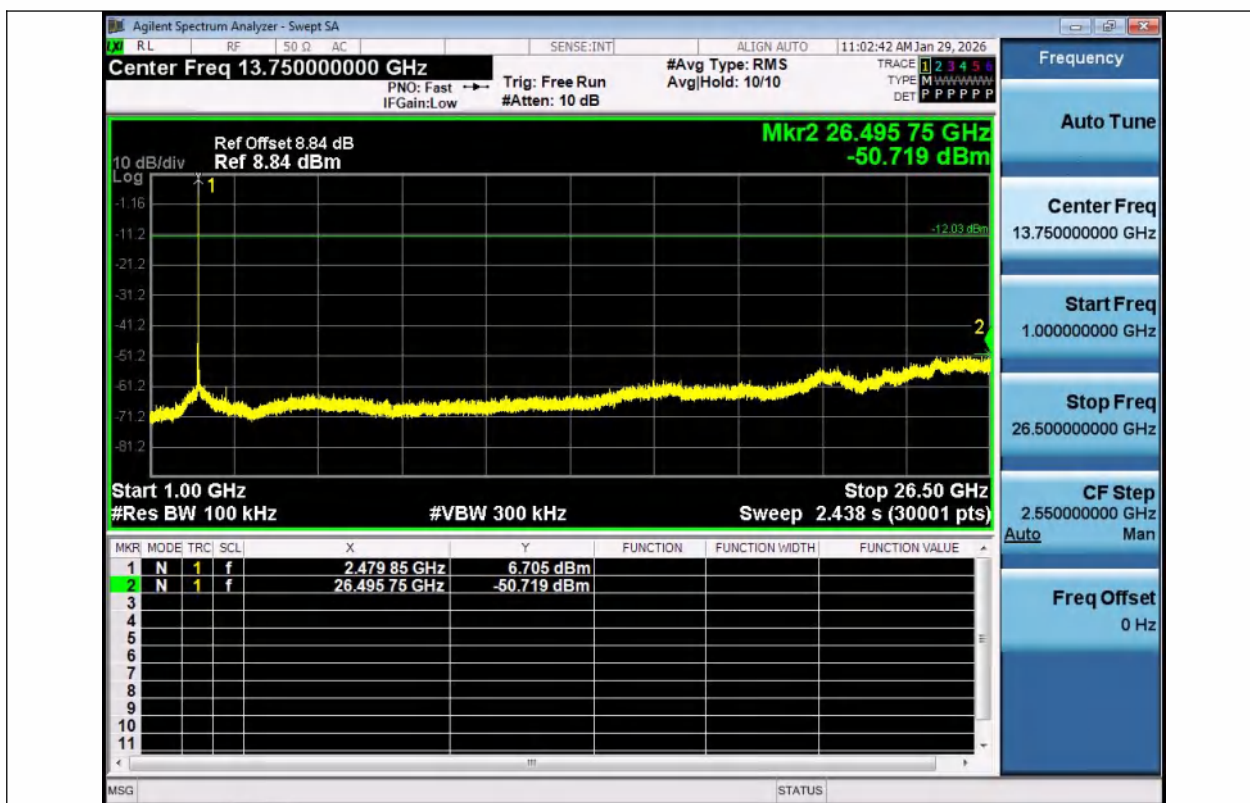


BLE_1M-Ant1-2480-1000~26500-PASS



BLE_2M-Ant1-2402-0~Reference-PASS

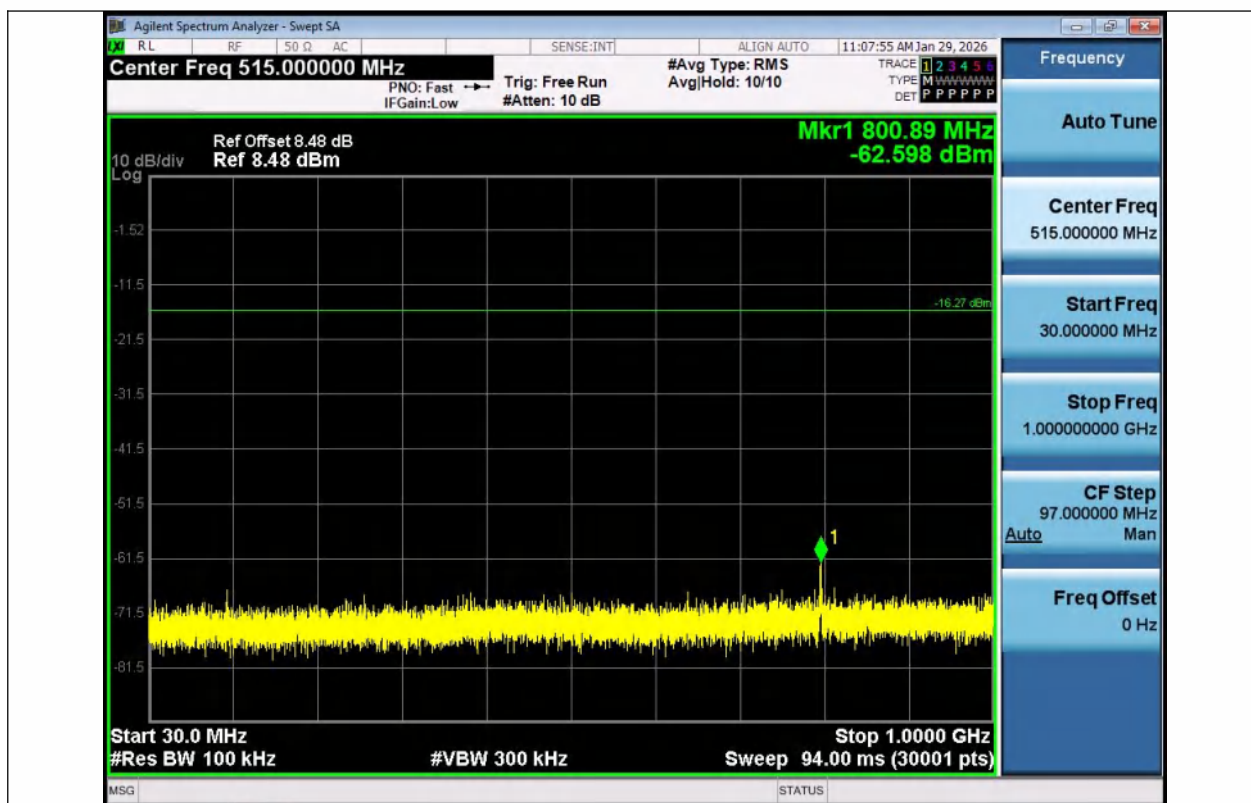


BLE_2M-Ant1-2402-30~1000-PASS

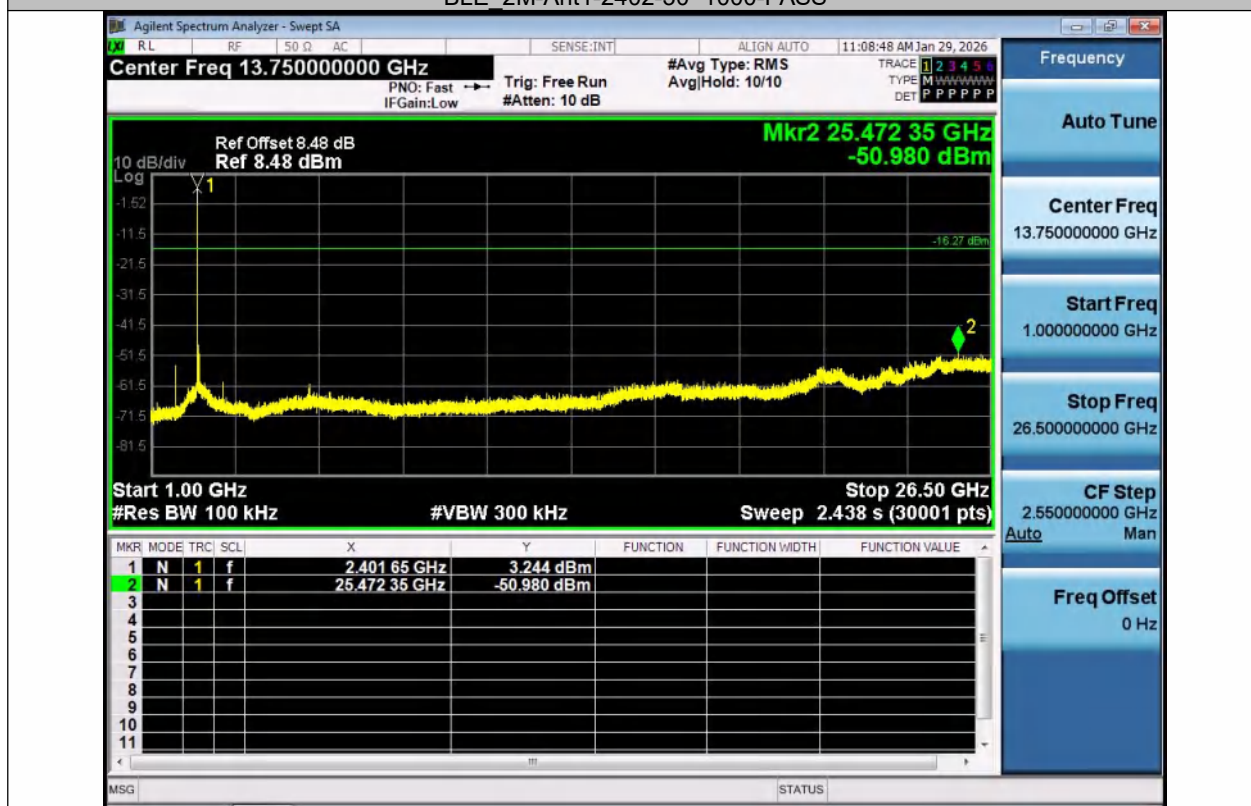

BLE_2M-Ant1-2402-1000~26500-PASS



BLE_2M-Ant1-2440-0~Reference-PASS

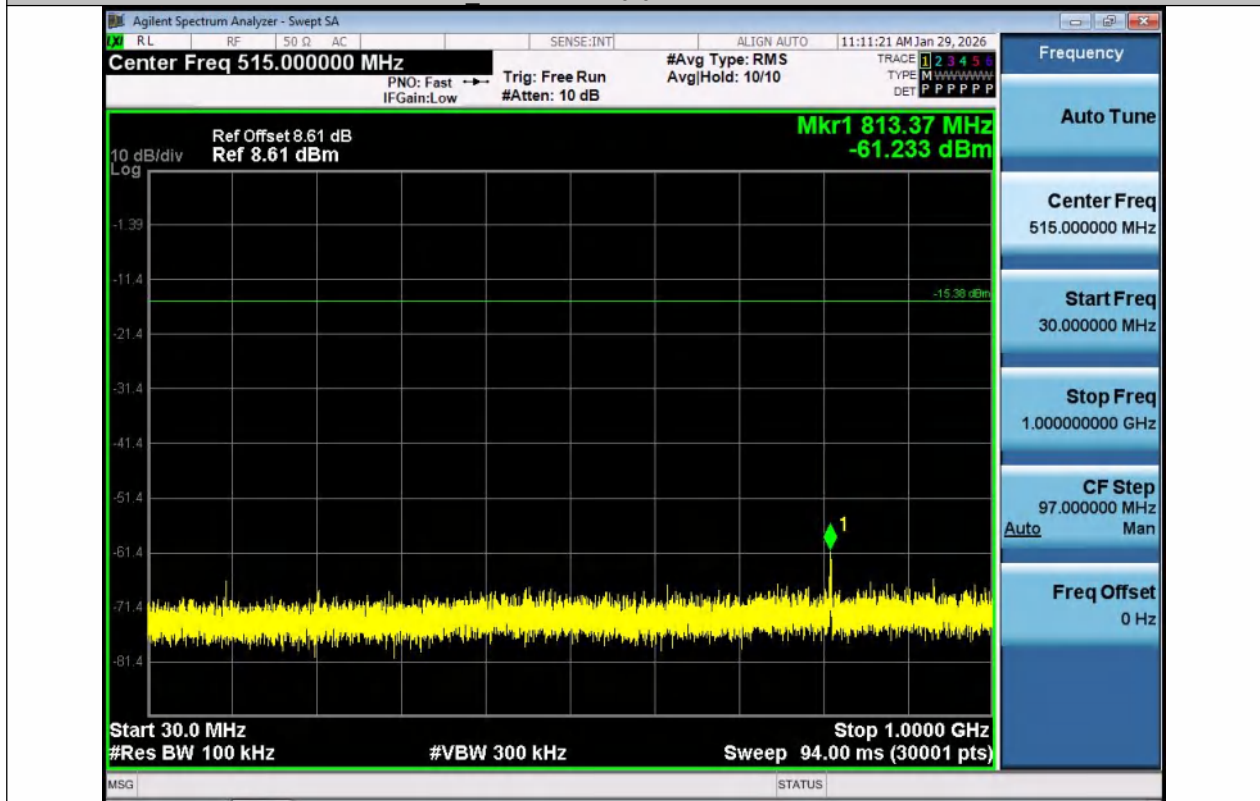

BLE_2M-Ant1-2440-30~1000-PASS