


Appendix A: Test Results of Bluetooth Low Energy

APPENDIX A: TEST RESULTS OF BLUETOOTH LOW ENERGY	1
APPENDIX A.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
APPENDIX A.2: TEST RESULTS OF 6dB BANDWIDTH	5
APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH	8
APPENDIX A.4: TEST RESULTS OF DUTY CYCLE.....	11
APPENDIX A.5: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	14
APPENDIX A.6: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	23
30 MHz - 1GHz.....	23
1GHz - 18GHz	27
APPENDIX A.7: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	39
APPENDIX A.8: TEST RESULTS OF CONDUCTED EMISSIONS ON AC MAINS.....	51


Appendix A.1: Test Results of Conducted Power Spectral Density

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-7.26	≤8.00	PASS
		2440	-6.94	≤8.00	PASS
		2480	-7.26	≤8.00	PASS
BLE_2M	Ant1	2404	-11.50	≤8.00	PASS
		2440	-11.43	≤8.00	PASS
		2478	-11.70	≤8.00	PASS


BLE_1M_Ant1_2402

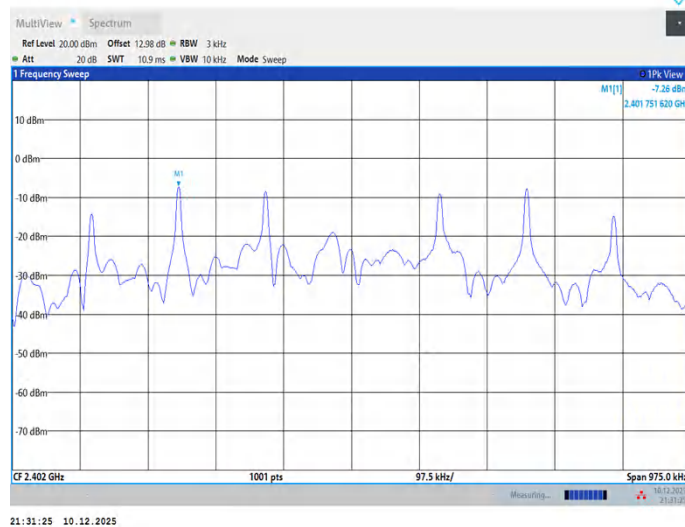


BLE_1M_Ant1_2440

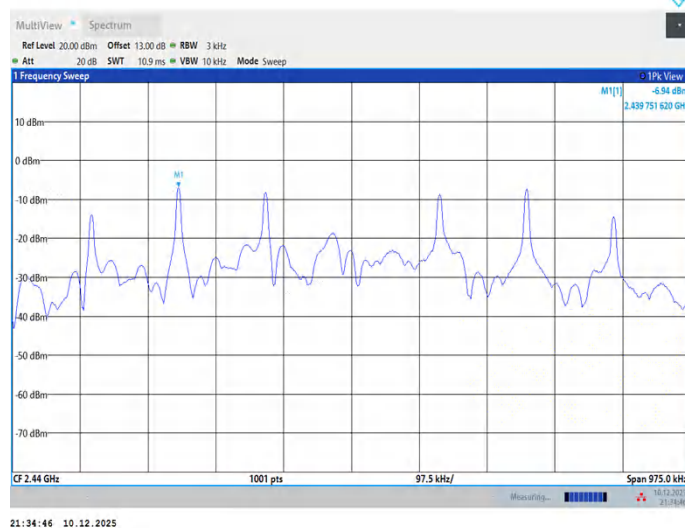


BLE_1M_Ant1_2480

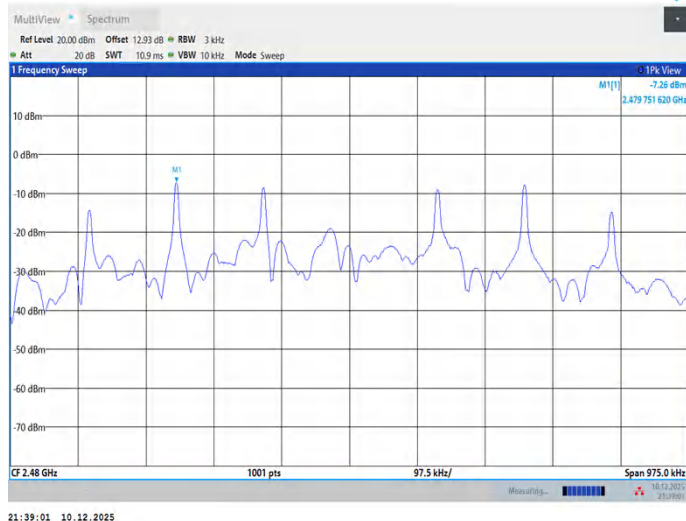


BLE_2M_Ant1_2404

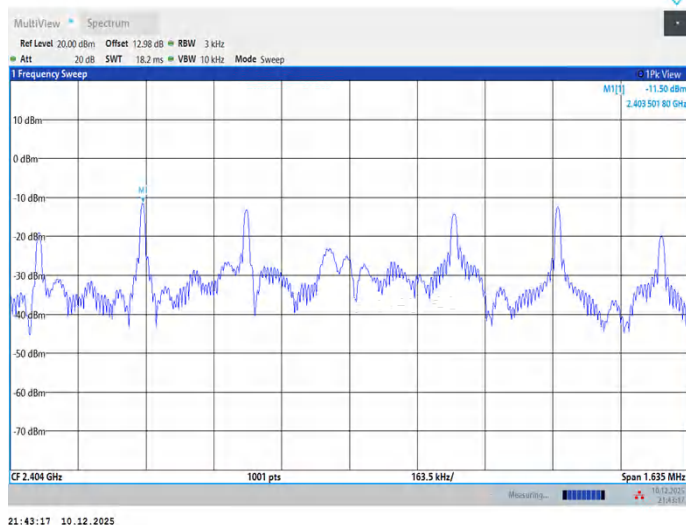

BLE_2M_Ant1_2440

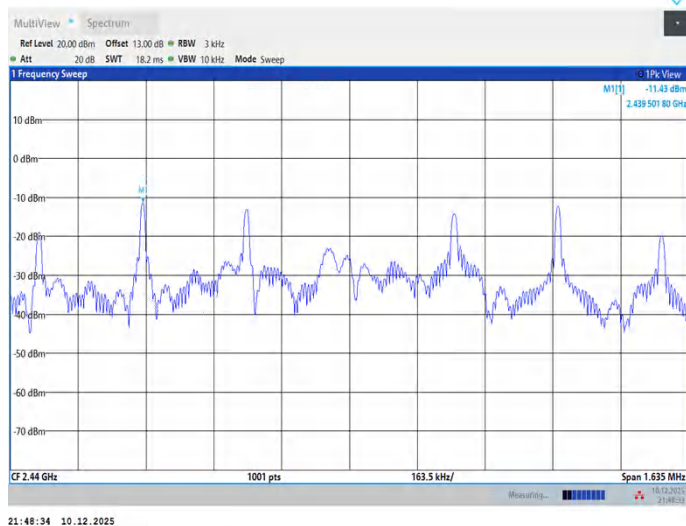


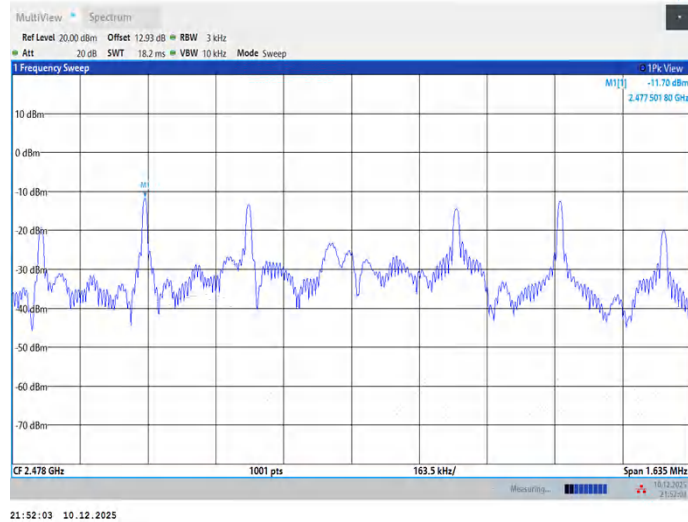


Appendix A.2: Test Results of 6dB Bandwidth

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.65	2401.65	2402.30	0.5	PASS
		2440	0.65	2439.65	2440.30	0.5	PASS
		2480	0.65	2479.65	2480.30	0.5	PASS
BLE_2M	Ant1	2404	1.09	2403.44	2404.53	0.5	PASS
		2440	1.09	2439.44	2440.53	0.5	PASS
		2478	1.09	2477.44	2478.53	0.5	PASS

BLE_1M_Ant1_2402

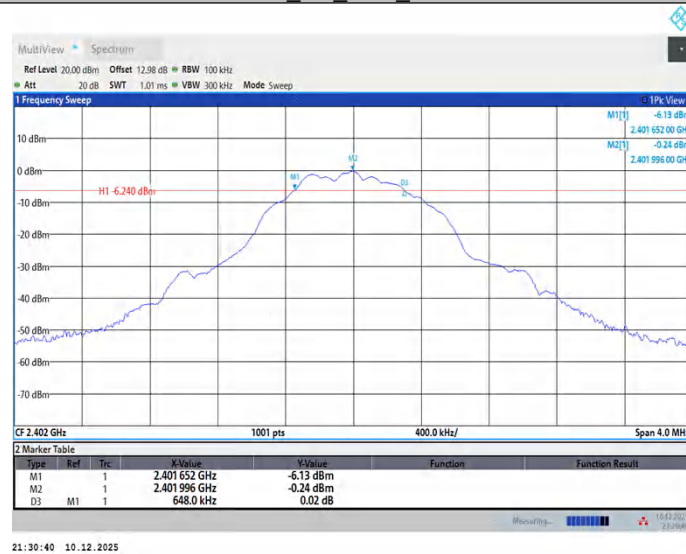

BLE_1M_Ant1_2440

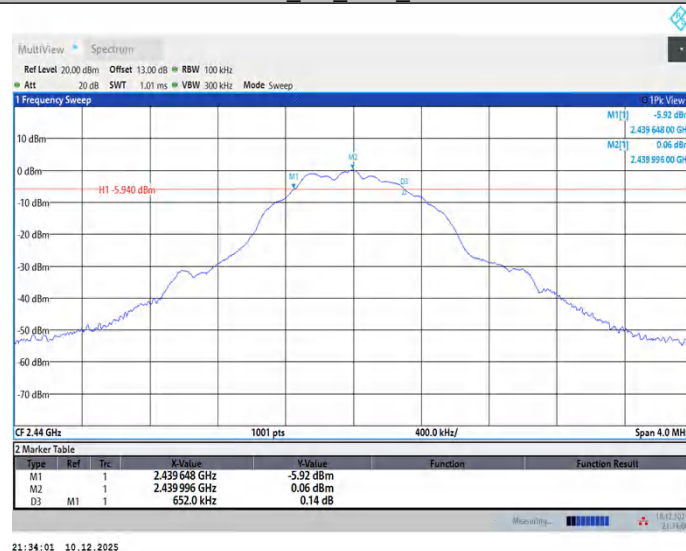


BLE_1M_Ant1_2480



BLE_2M_Ant1_2404



BLE_2M_Ant1_2440

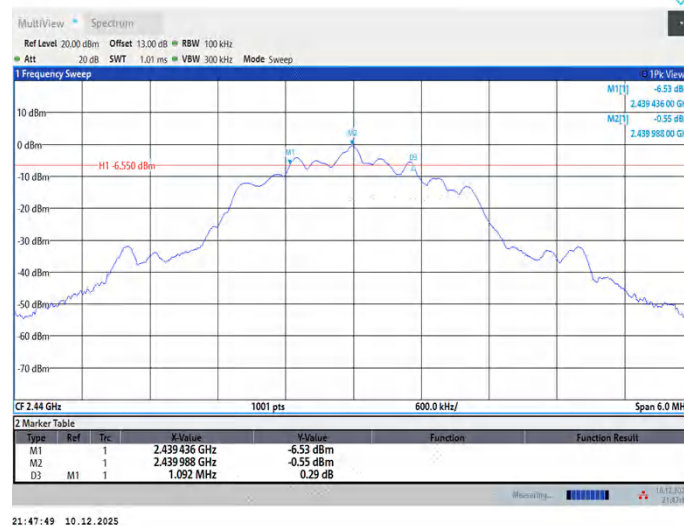

BLE 2M_Ant1_2478



Appendix A.3: Test Results of 99% Bandwidth

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	1.0459	2401.4898	2402.5357	---	---
		2440	1.0470	2439.4891	2440.5362	---	---
		2480	1.0466	2479.4894	2480.5359	---	---
BLE_2M	Ant1	2404	2.0718	2402.9743	2405.0461	---	---
		2440	2.0710	2438.9754	2441.0464	---	---
		2478	2.0716	2476.9757	2479.0472	---	---

BLE_1M_Ant1_2402




21:30:55 10.12.2025

BLE_1M_Ant1_2440




21:34:16 10.12.2025


BLE_1M_Ant1_2480

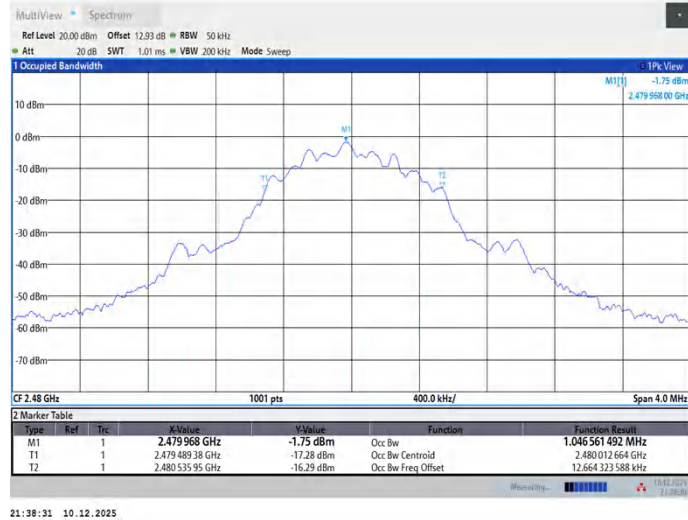


BLE_2M_Ant1_2404

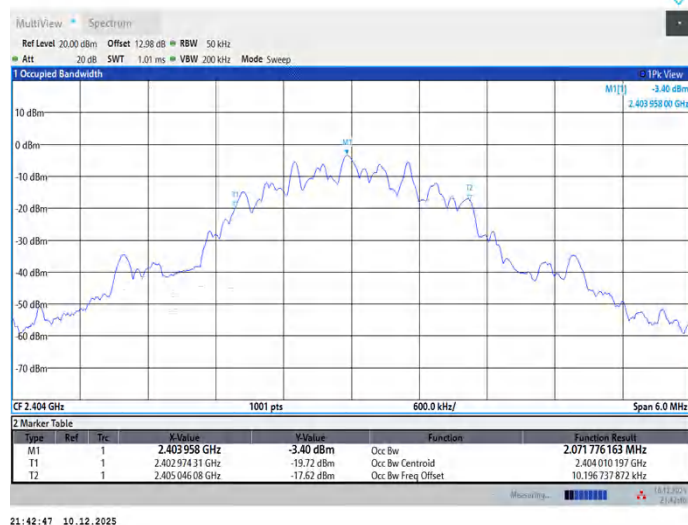

BLE_2M_Ant1_2440

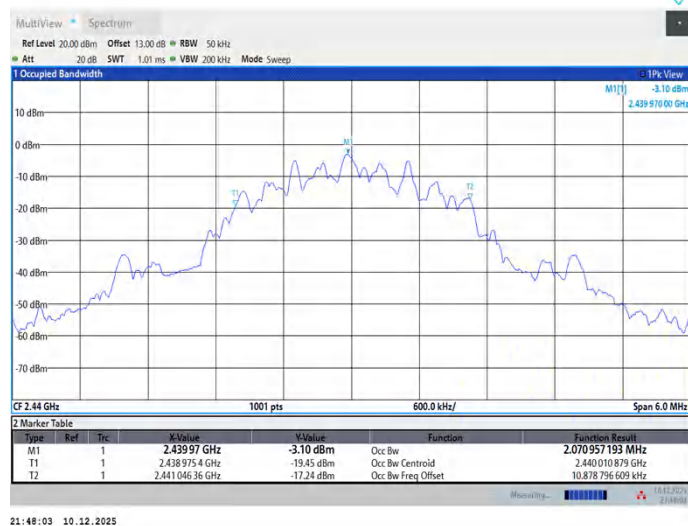


BLE_2M_Ant1_2478

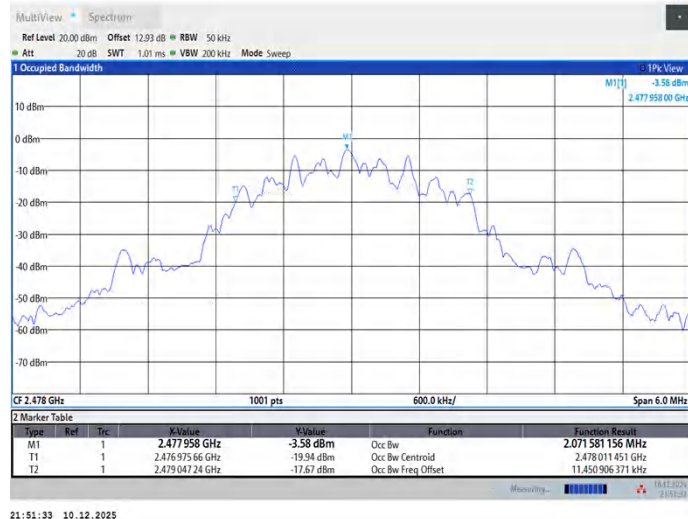

Appendix A.4: Test Results of Duty Cycle


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.30	0.93	32.26	4.91
		2440	0.30	0.93	32.26	4.91
		2480	0.30	0.93	32.26	4.91
BLE_2M	Ant1	2404	0.16	0.93	17.20	7.64
		2440	0.15	0.92	16.30	7.88
		2478	0.15	0.92	16.30	7.88

BLE_1M_Ant1_2402

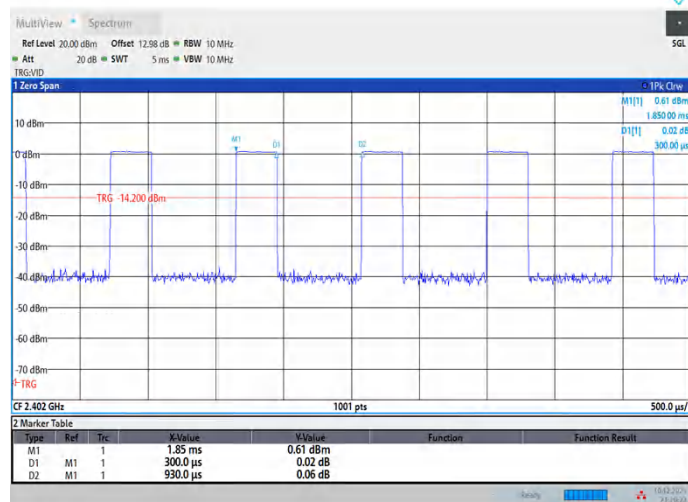


21:30:23 10.12.2025

BLE_1M_Ant1_2440

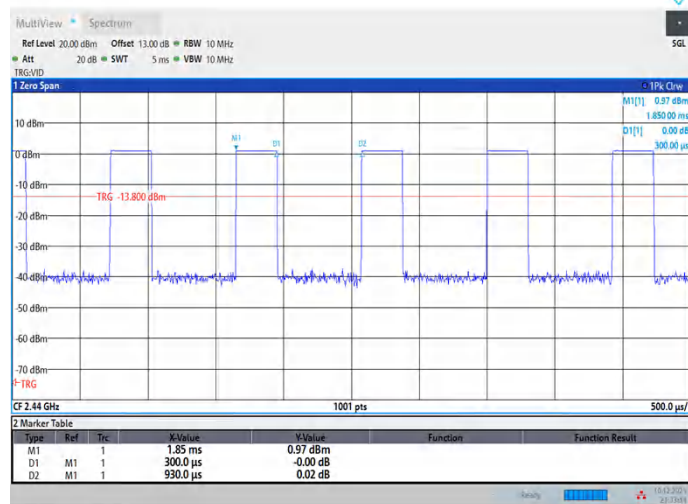


21:33:44 10.12.2025


BLE_1M_Ant1_2480

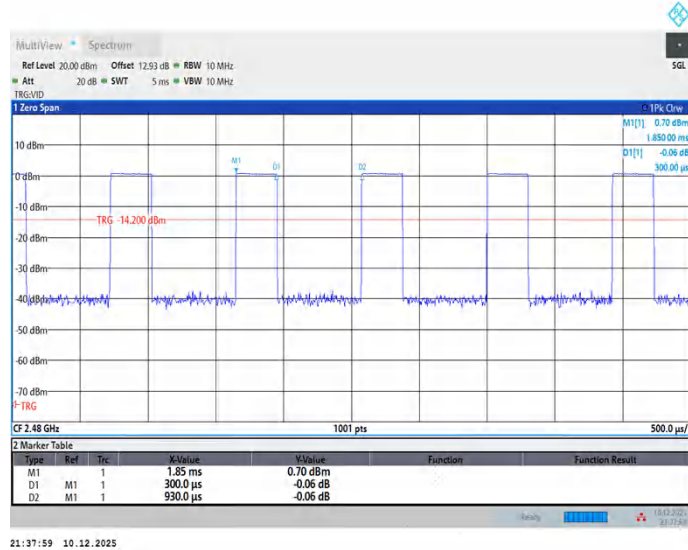


BLE_2M_Ant1_2404

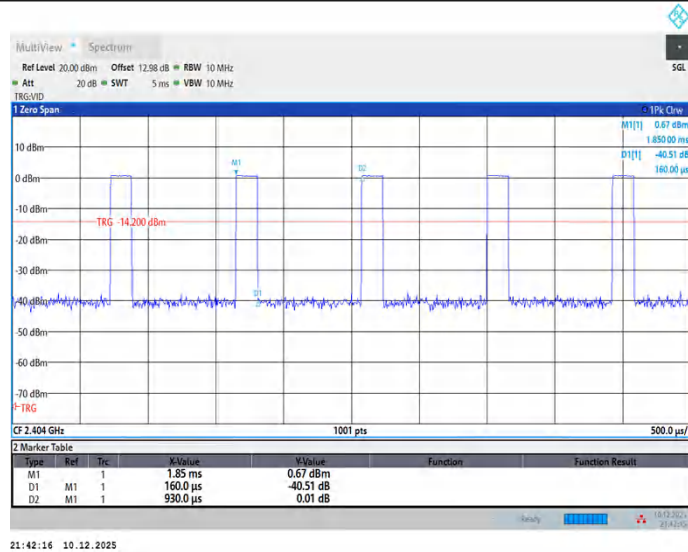

BLE_2M_Ant1_2440

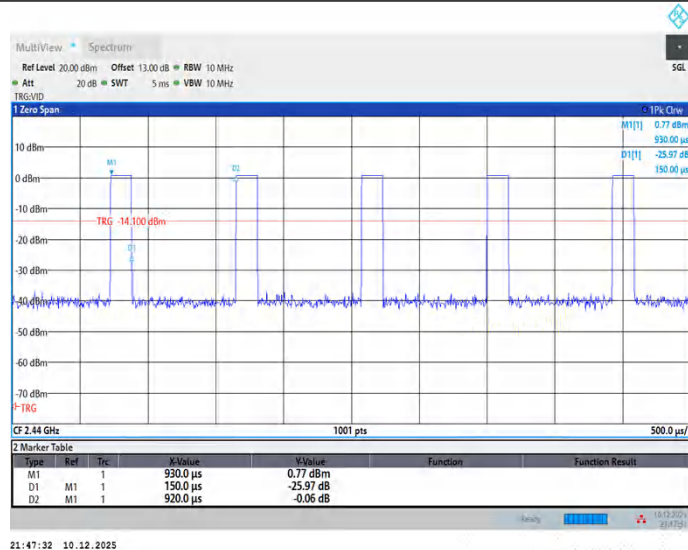


BLE_2M_Ant1_2478

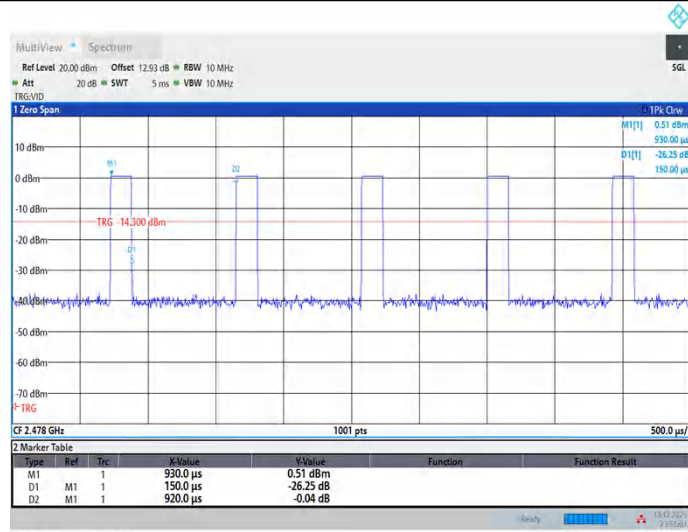


Appendix A.5: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Mode	Frequency [MHz]	Verdict
GFSK 1M	2402	Pass
	2440	Pass
	2480	Pass
GFSK 2M	2404	Pass
	2440	Pass
	2478	Pass


BLE_1M_Ant1_2402_0~Reference

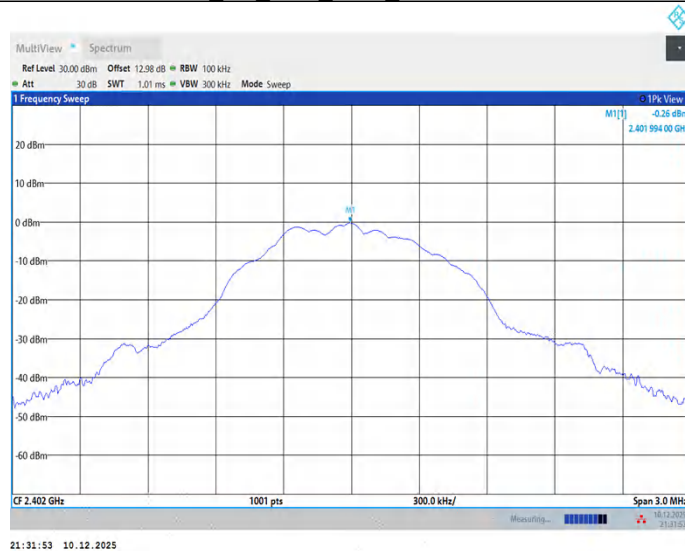


BLE_1M_Ant1_2402_30~1000

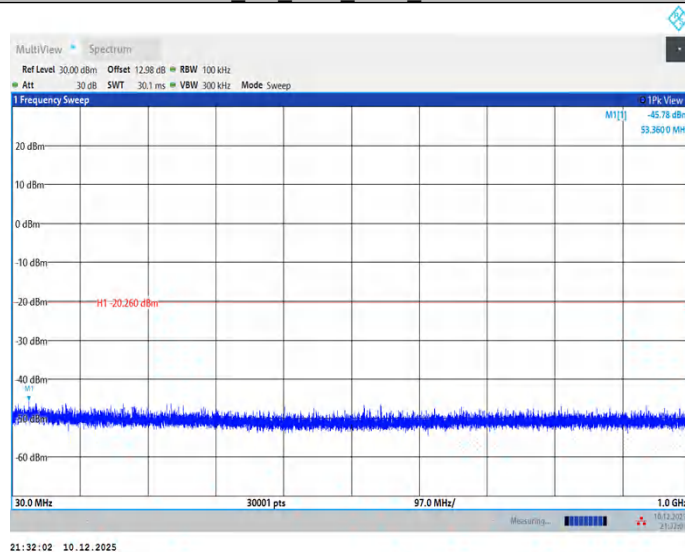


BLE_1M_Ant1_2402_1000~26500

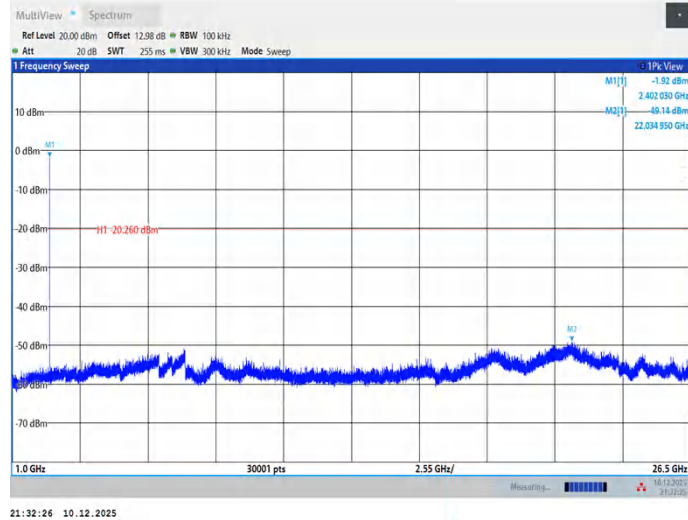


BLE_1M_Ant1_2440_0~Reference

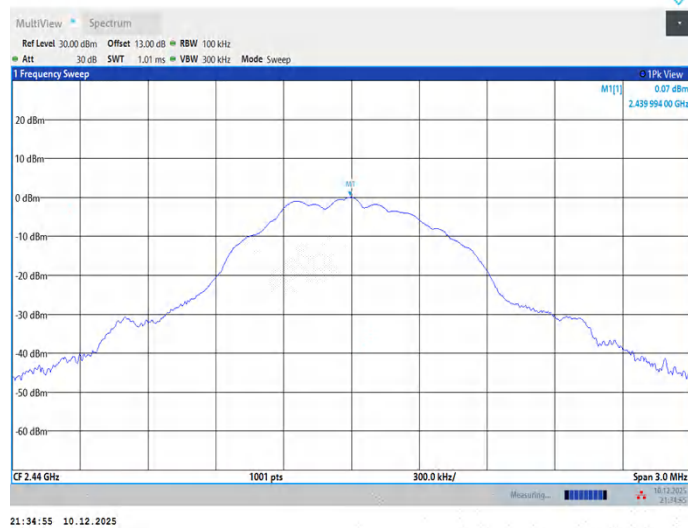


BLE_1M_Ant1_2440_30~1000

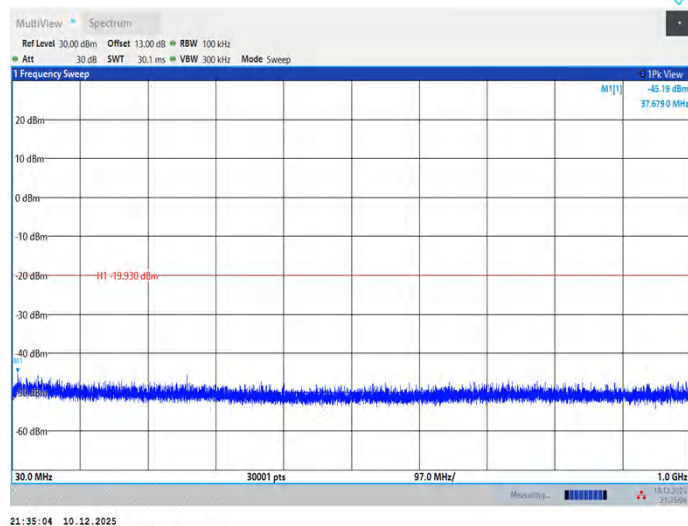


BLE_1M_Ant1_2440_1000~26500



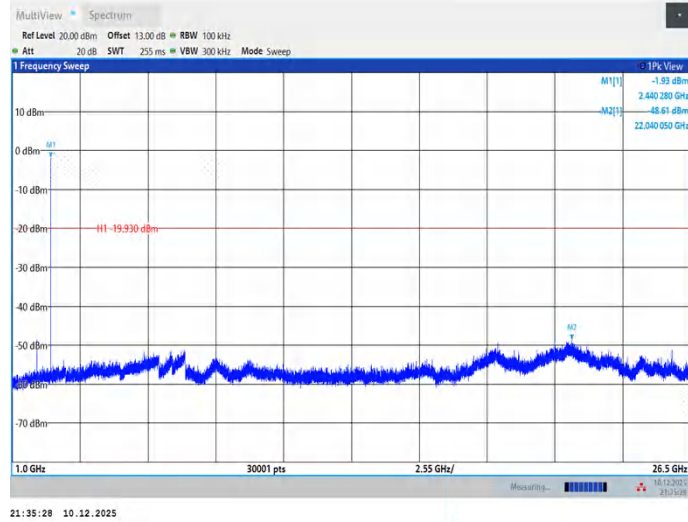


BLE_1M_Ant1_2480_0~Reference

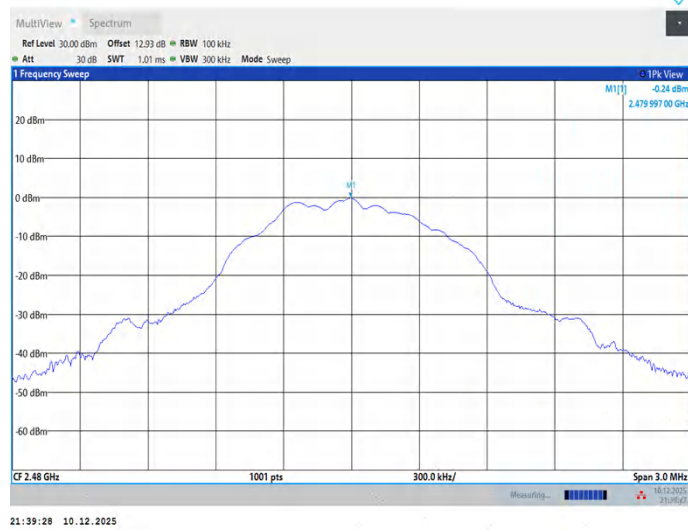


BLE_1M_Ant1_2480_30~1000

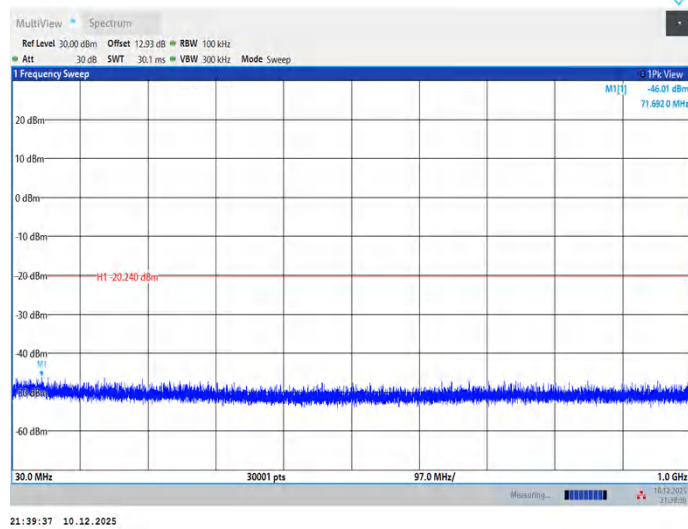


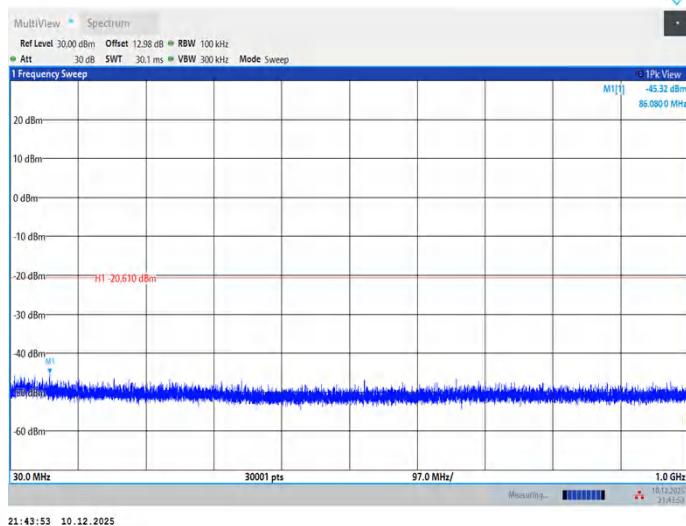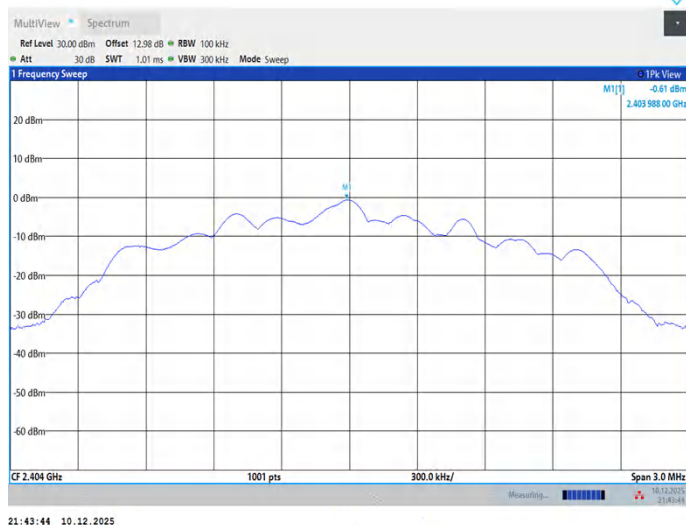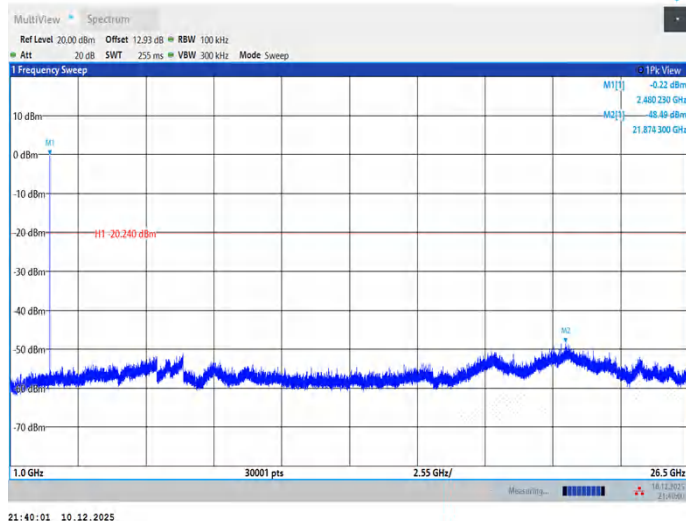


BLE_2M_Ant1_2404_1000~26500

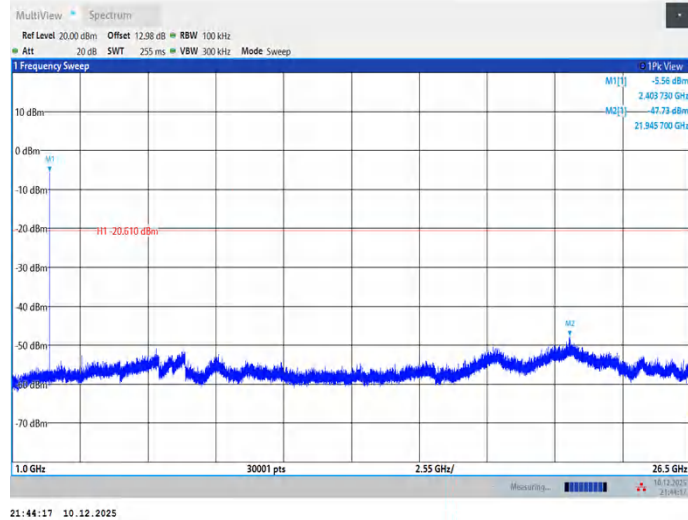


BLE_2M_Ant1_2440_0~Reference

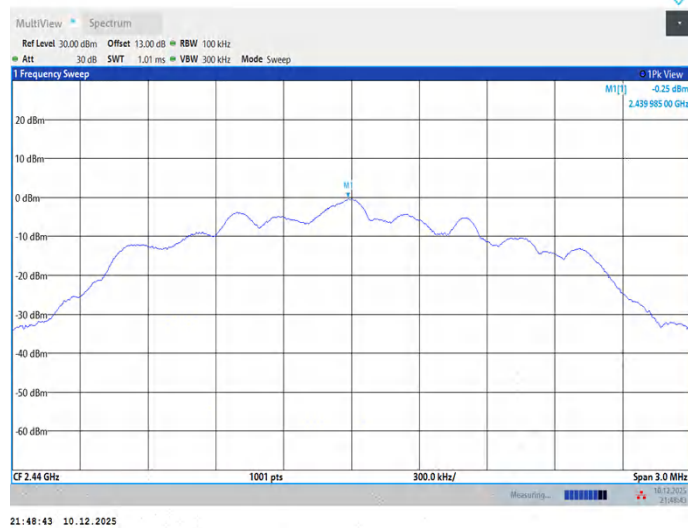


BLE_2M_Ant1_2440_30~1000

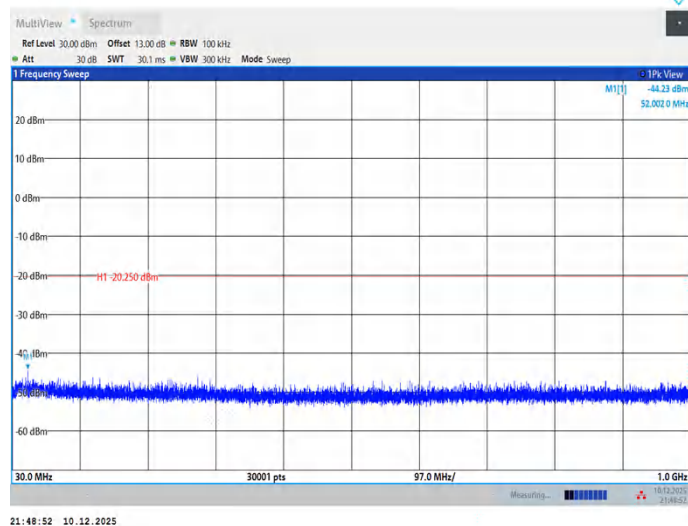


BLE_2M_Ant1_2440_1000~26500

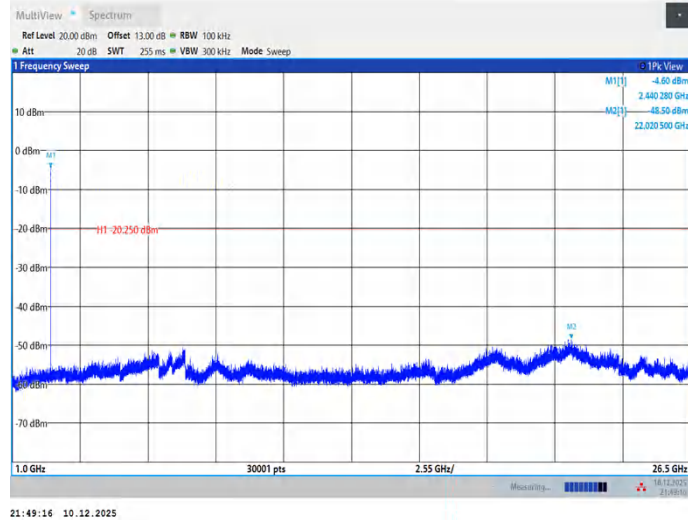


BLE_2M_Ant1_2478_0~Reference

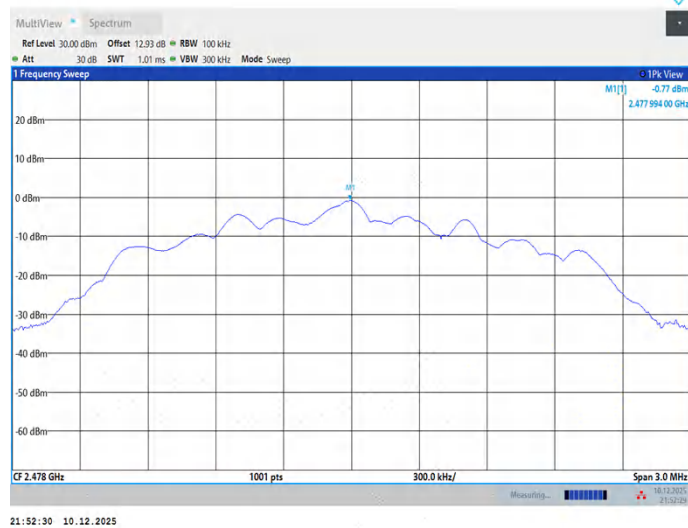

BLE_2M_Ant1_2478_30~1000

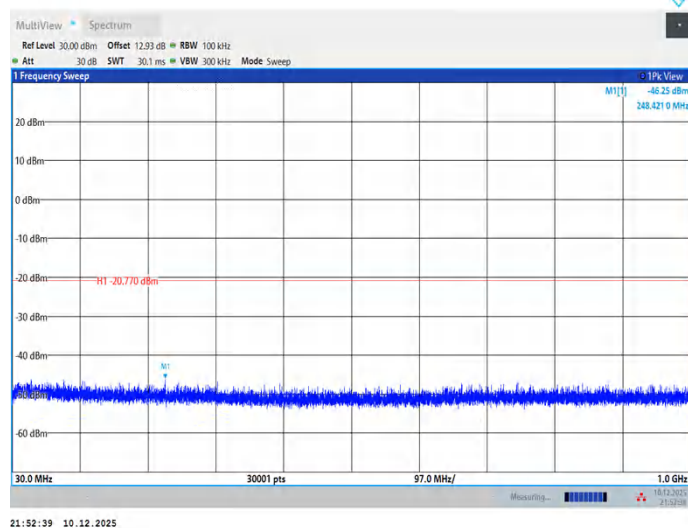


BLE_2M_Ant1_2478_1000~26500

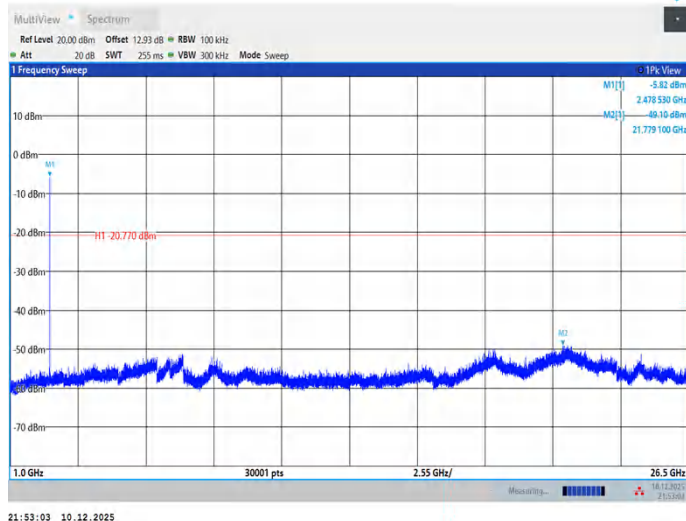


Band Edge Compliance (Conducted Method)

Mode	Frequency [MHz]	Measured Range	Verdict
GFSK 1M	2402	2.310 GHz - 2.410 GHz	Pass
	2480	2.470 GHz - 2.500 GHz	Pass
GFSK 2M	2404	2.310 GHz - 2.410 GHz	Pass
	2478	2.470 GHz - 2.500 GHz	Pass


BLE 1M Ant1 Low 2402

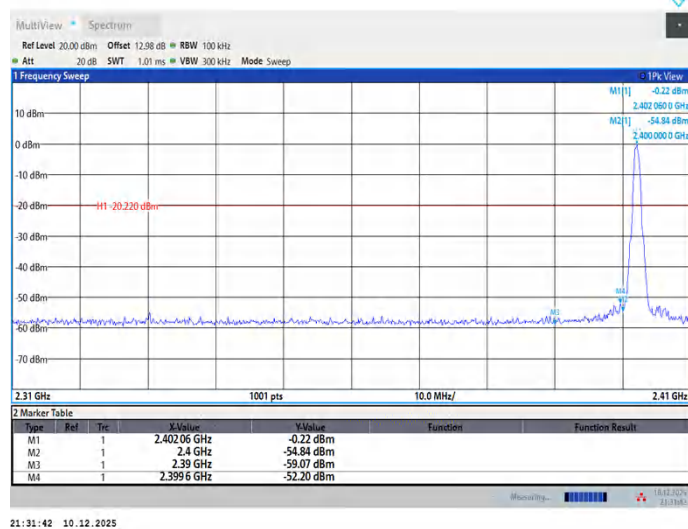


BLE 1M Ant1 High 2480

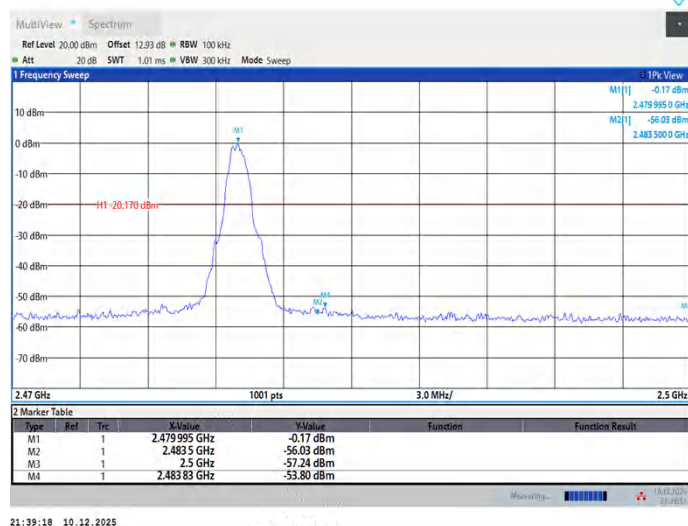

BLE 2M_Ant1_Low_2404

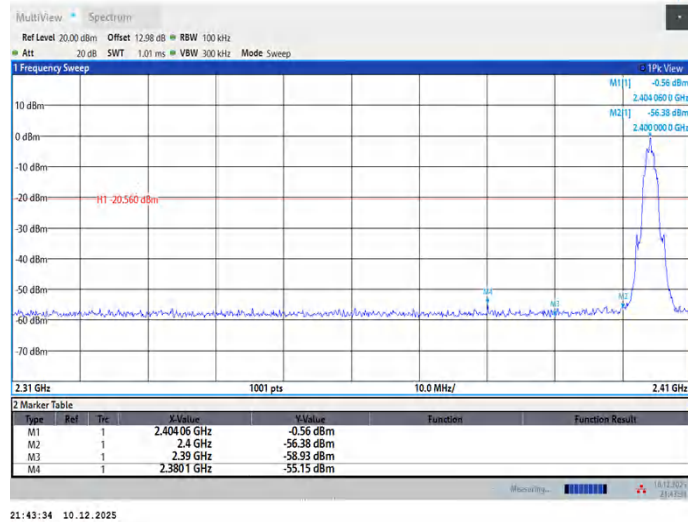

BLE 2M_Ant1_High_2478

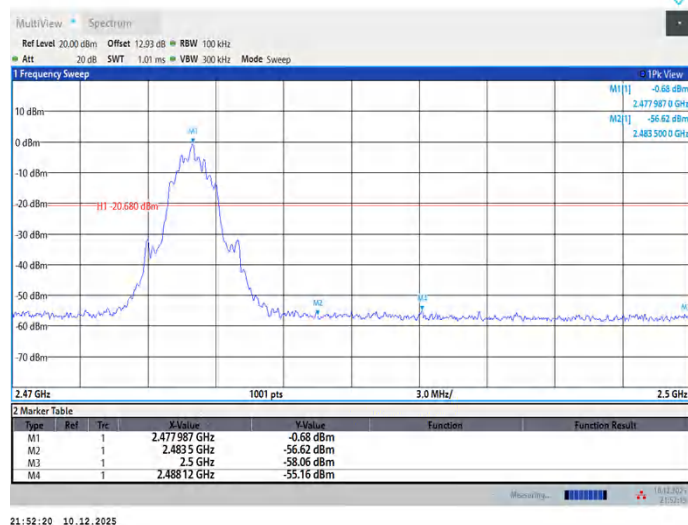

Appendix A.6: Test Results of Radiated Spurious Emissions

Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

Test Date: 2025-12-24


Tested By: Li Xiongbín

Test Mode: BLE1M TX Mode

Power Supply: AC 120V/60Hz

Condition: Temp:22.1°C;Humi:51.4%

Test Site: DDT 3# Chamber

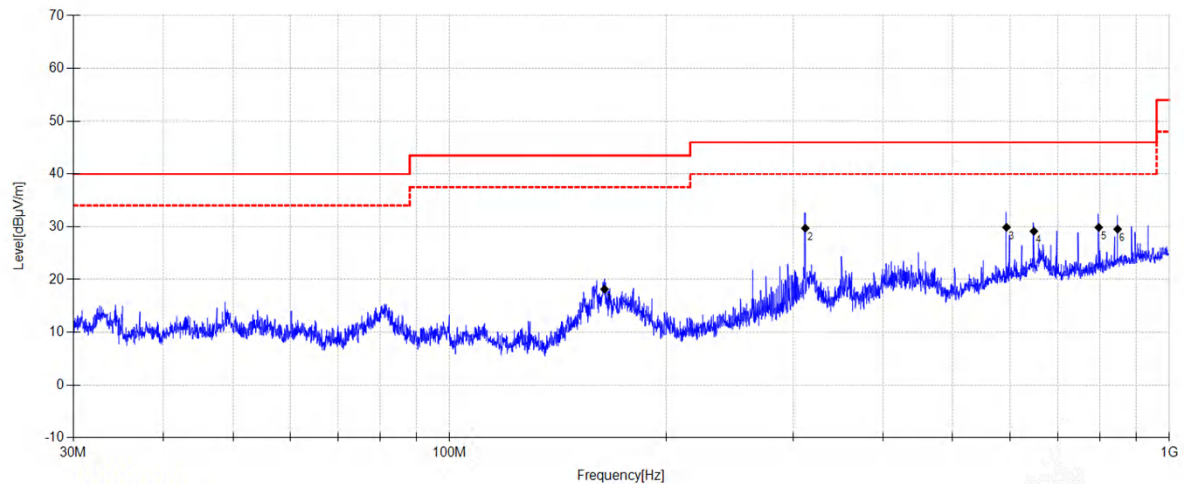


Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	164.159	36.58	9.27	4.67	18.16	43.50	25.34	QP	Horizontal
2	312.033	43.17	13.62	5.33	29.71	46.00	16.29	QP	Horizontal
3	593.944	37.24	19.10	6.38	29.89	46.00	16.11	QP	Horizontal
4	648.350	36.36	19.24	6.51	29.14	46.00	16.86	QP	Horizontal
5	797.896	35.32	20.13	6.93	29.87	46.00	16.13	QP	Horizontal
6	847.490	33.24	21.50	7.02	29.54	46.00	16.46	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date: 2025-12-24 **Tested By:** Li Xiongbín
Test Mode: BLE1M TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

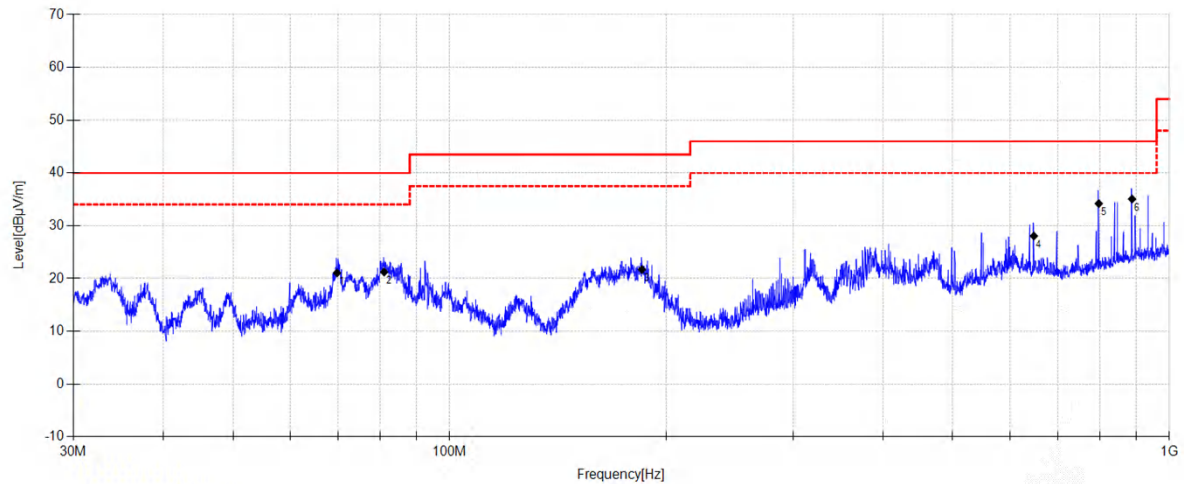


Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	69.735	39.28	9.91	4.17	21.06	40.00	18.94	QP	Vertical
2	81.082	40.33	8.99	4.20	21.22	40.00	18.78	QP	Vertical
3	185.071	39.39	9.91	4.79	21.70	43.50	21.80	QP	Vertical
4	648.350	35.27	19.24	6.51	28.05	46.00	17.95	QP	Vertical
5	797.896	39.64	20.13	6.93	34.19	46.00	11.81	QP	Vertical
6	887.631	38.39	21.55	7.09	35.06	46.00	10.94	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date: 2025-12-24 **Tested By:** Li Xiongbín
Test Mode: BLE2M TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

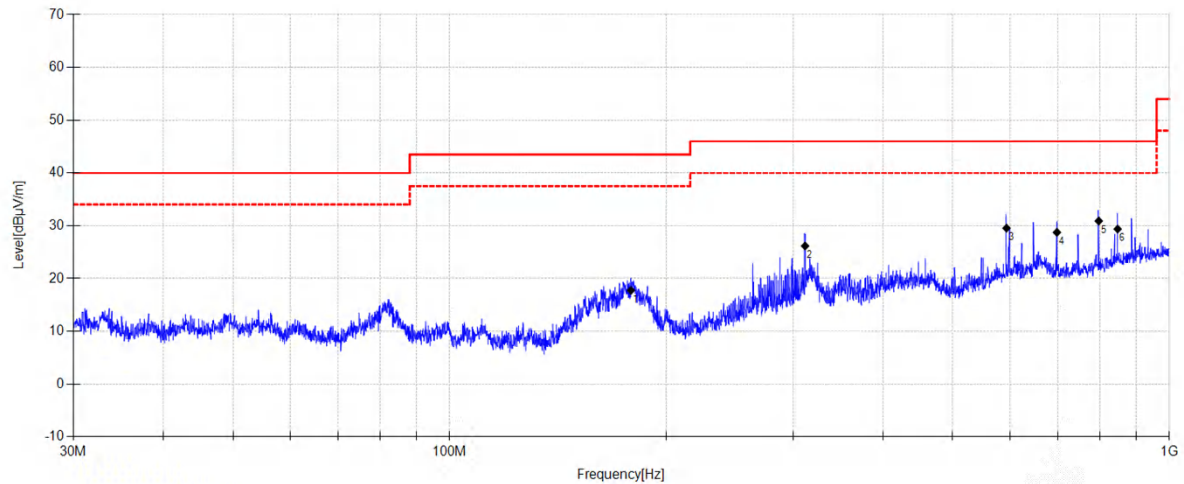


Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	178.569	36.15	9.21	4.76	17.74	43.50	25.76	QP	Horizontal
2	311.815	39.63	13.61	5.33	26.16	46.00	19.84	QP	Horizontal
3	593.944	36.89	19.10	6.38	29.54	46.00	16.46	QP	Horizontal
4	697.885	35.38	19.82	6.63	28.74	46.00	17.26	QP	Horizontal
5	797.896	36.35	20.13	6.93	30.90	46.00	15.10	QP	Horizontal
6	847.490	33.06	21.50	7.02	29.36	46.00	16.64	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date: 2025-12-24 **Tested By:** Li Xiongbín
Test Mode: BLE2M TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

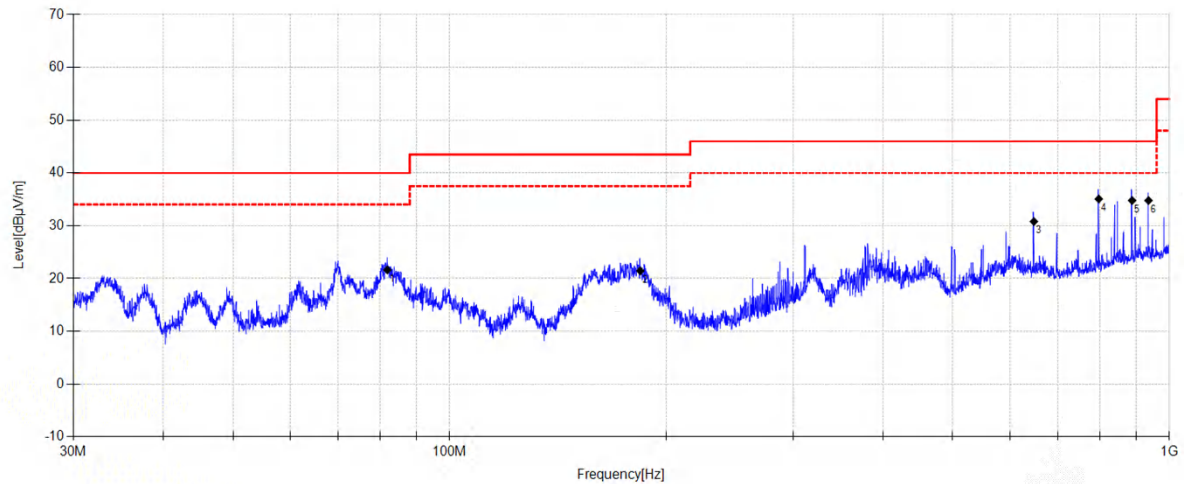

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	81.939	40.82	8.91	4.20	21.63	40.00	18.37	QP	Vertical
2	184.035	39.42	9.61	4.79	21.44	43.50	22.06	QP	Vertical
3	648.350	38.01	19.24	6.51	30.79	46.00	15.21	QP	Vertical
4	797.896	40.52	20.13	6.93	35.07	46.00	10.93	QP	Vertical
5	887.631	38.11	21.55	7.09	34.78	46.00	11.22	QP	Vertical
6	935.559	37.11	22.16	7.20	34.78	46.00	11.22	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

Test Date: 2025-12-17


Tested By: Li Xiongbín

Test Mode: BLE1M 2402MHz TX Mode

Power Supply: AC 120V/60Hz

Condition: Temp:22.1°C;Humi:51.4%

Test Site: DDT 3# Chamber

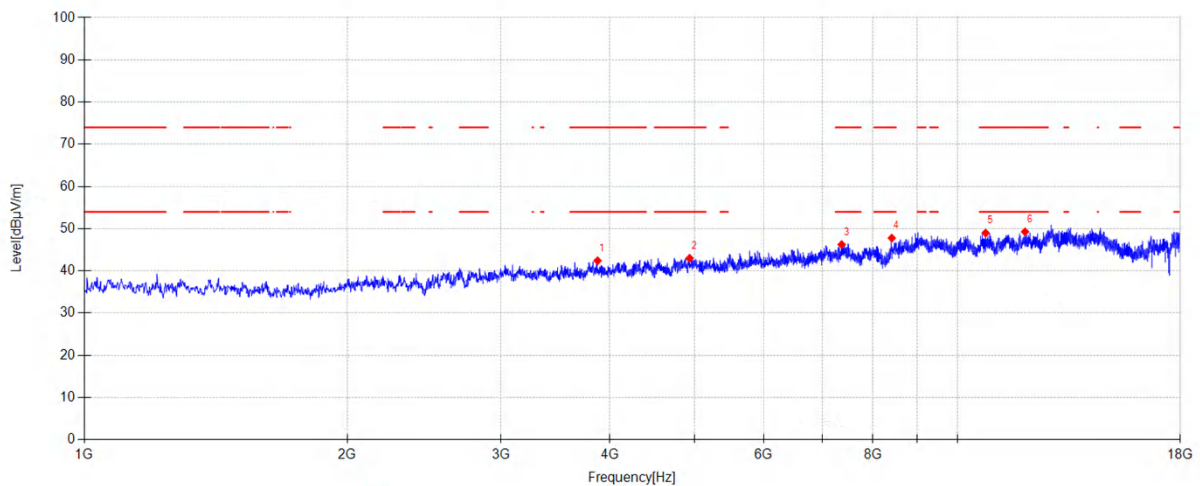


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3871.300	46.96	30.56	4.55	-39.65	42.42	74.00	31.58	PK	Horizontal
2	4933.800	44.50	33.10	5.20	-39.79	43.01	74.00	30.99	PK	Horizontal
3	7369.900	43.48	36.88	5.75	-39.86	46.25	74.00	27.75	PK	Horizontal
4	8410.300	43.18	37.60	6.31	-39.31	47.78	74.00	26.22	PK	Horizontal
5	10771.600	42.23	39.14	7.24	-39.62	48.99	74.00	25.01	PK	Horizontal
6	11951.400	42.33	38.76	7.79	-39.60	49.28	74.00	24.72	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbín
Test Mode: BLE1M 2402MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

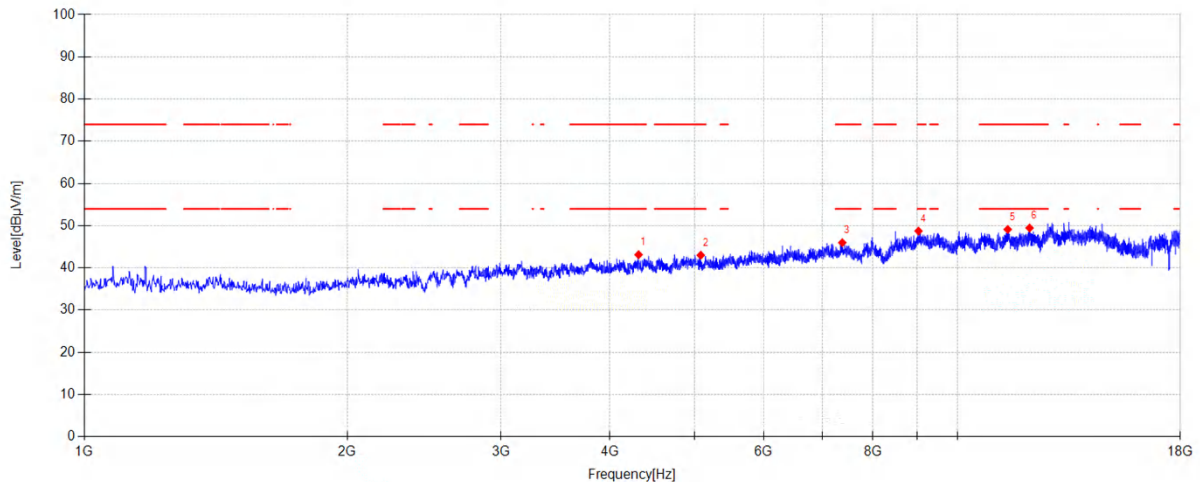


Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	4313.300	46.27	31.81	4.78	-39.73	43.13	74.00	30.87	PK	Vertical
2	5081.700	44.79	32.72	5.28	-39.78	43.01	74.00	30.99	PK	Vertical
3	7380.100	43.27	36.82	5.75	-39.86	45.98	74.00	28.02	PK	Vertical
4	9024.000	41.88	38.69	6.80	-38.63	48.74	74.00	25.26	PK	Vertical
5	11417.600	41.51	39.62	7.58	-39.60	49.11	74.00	24.89	PK	Vertical
6	12094.200	41.70	39.47	7.81	-39.52	49.46	74.00	24.54	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbín
Test Mode: BLE1M 2440MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

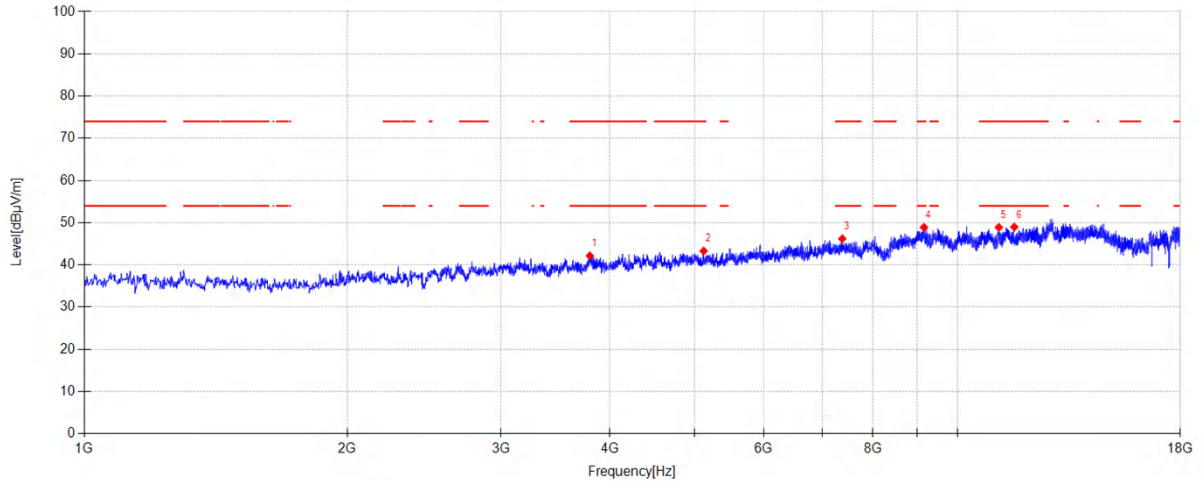


Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3793.100	46.50	30.75	4.54	-39.62	42.17	74.00	31.83	PK	Horizontal
2	5120.800	45.13	32.67	5.29	-39.78	43.31	74.00	30.69	PK	Horizontal
3	7380.100	43.51	36.82	5.75	-39.86	46.22	74.00	27.78	PK	Horizontal
4	9156.600	41.97	38.92	6.78	-38.77	48.90	74.00	25.10	PK	Horizontal
5	11152.400	42.18	38.85	7.47	-39.60	48.90	74.00	25.10	PK	Horizontal
6	11616.500	42.33	38.58	7.66	-39.60	48.97	74.00	25.03	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbín
Test Mode: BLE1M 2440MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

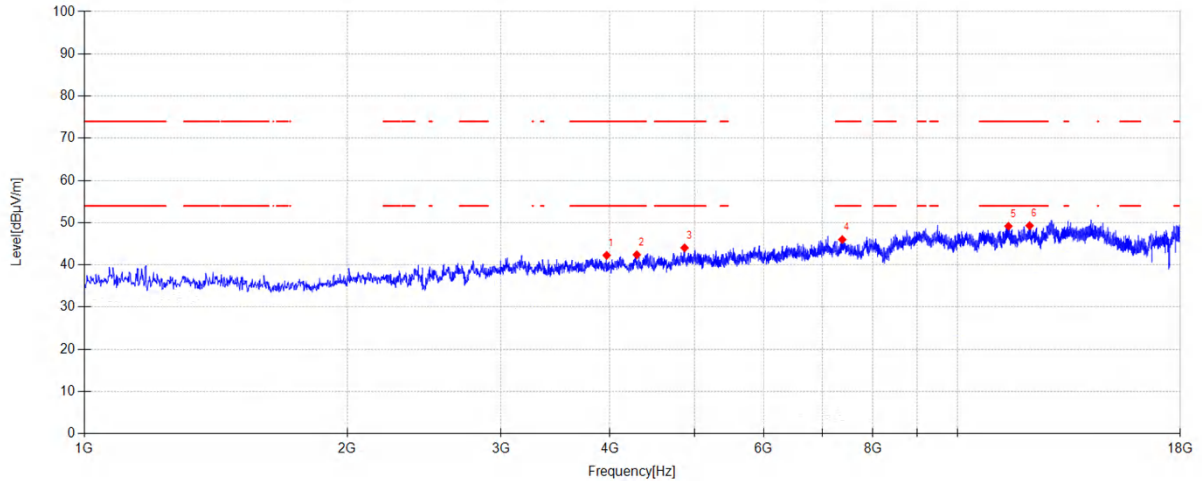


Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3964.800	46.92	30.48	4.57	-39.69	42.28	74.00	31.72	PK	Vertical
2	4292.900	45.48	31.89	4.77	-39.73	42.41	74.00	31.59	PK	Vertical
3	4869.200	45.70	32.98	5.16	-39.79	44.05	74.00	29.95	PK	Vertical
4	7380.100	43.29	36.82	5.75	-39.86	46.00	74.00	28.00	PK	Vertical
5	11439.700	41.79	39.40	7.59	-39.60	49.18	74.00	24.82	PK	Vertical
6	12095.900	41.53	39.48	7.81	-39.52	49.30	74.00	24.70	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE1M 2480MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

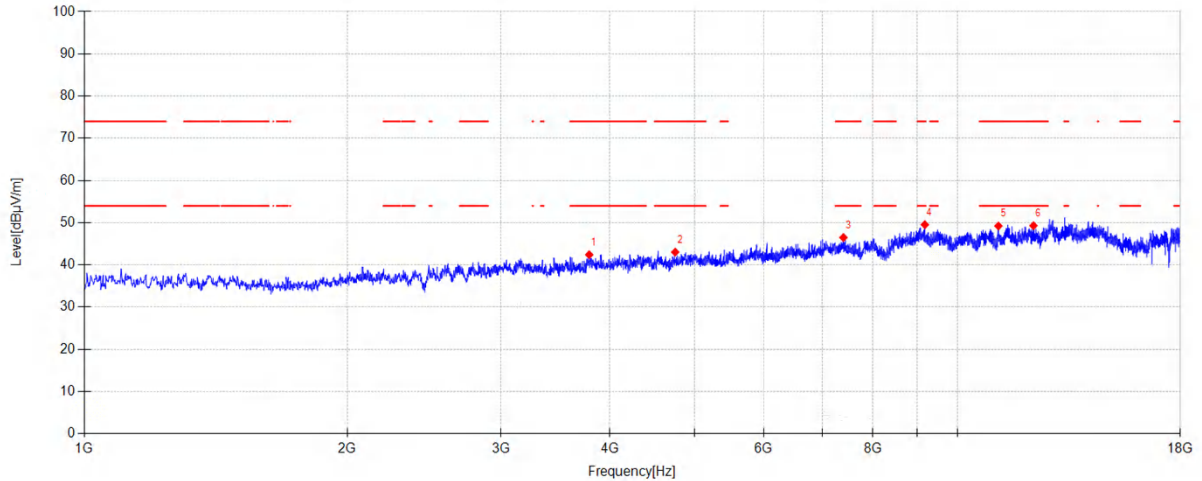


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3786.300	46.88	30.60	4.54	-39.61	42.41	74.00	31.59	PK	Horizontal
2	4750.200	45.55	32.20	5.08	-39.78	43.05	74.00	30.95	PK	Horizontal
3	7402.200	43.89	36.70	5.76	-39.86	46.49	74.00	27.51	PK	Horizontal
4	9175.300	42.85	38.70	6.78	-38.79	49.54	74.00	24.46	PK	Horizontal
5	11140.500	42.50	38.86	7.47	-39.60	49.23	74.00	24.77	PK	Horizontal
6	12220.000	41.67	39.24	7.81	-39.42	49.30	74.00	24.70	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE1M 2480MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

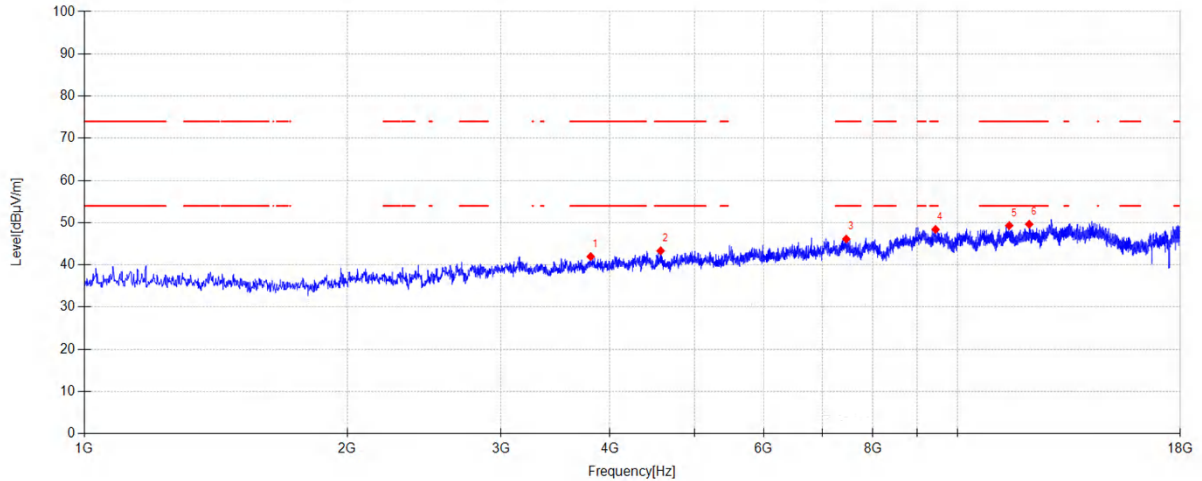


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3801.600	46.18	30.88	4.54	-39.62	41.98	74.00	32.02	PK	Vertical
2	4571.700	46.35	31.80	4.96	-39.76	43.35	74.00	30.65	PK	Vertical
3	7458.300	43.56	36.65	5.78	-39.85	46.14	74.00	27.86	PK	Vertical
4	9438.800	42.44	38.31	6.74	-39.08	48.41	74.00	25.59	PK	Vertical
5	11463.500	42.16	39.17	7.60	-39.60	49.33	74.00	24.67	PK	Vertical
6	12084.000	41.94	39.42	7.81	-39.53	49.64	74.00	24.36	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE2M 2404MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

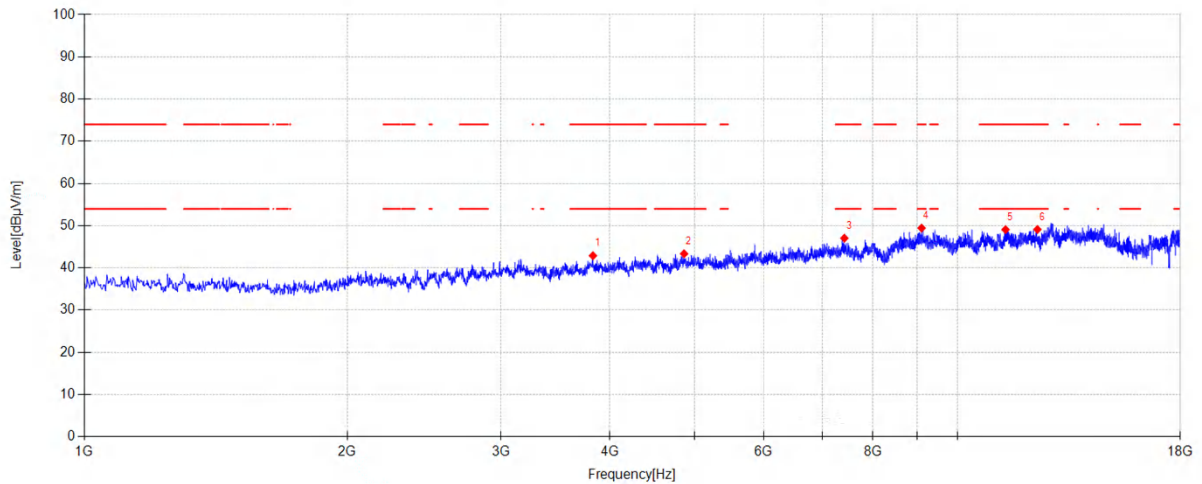


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3823.700	47.36	30.62	4.55	-39.63	42.90	74.00	31.10	PK	Horizontal
2	4862.400	45.04	32.95	5.16	-39.79	43.36	74.00	30.64	PK	Horizontal
3	7420.900	44.48	36.66	5.77	-39.86	47.05	74.00	26.95	PK	Horizontal
4	9097.100	43.32	38.05	6.79	-38.71	49.45	74.00	24.55	PK	Horizontal
5	11351.300	41.91	39.22	7.55	-39.60	49.08	74.00	24.92	PK	Horizontal
6	12347.500	41.36	39.26	7.81	-39.32	49.11	74.00	24.89	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE2M 2404MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

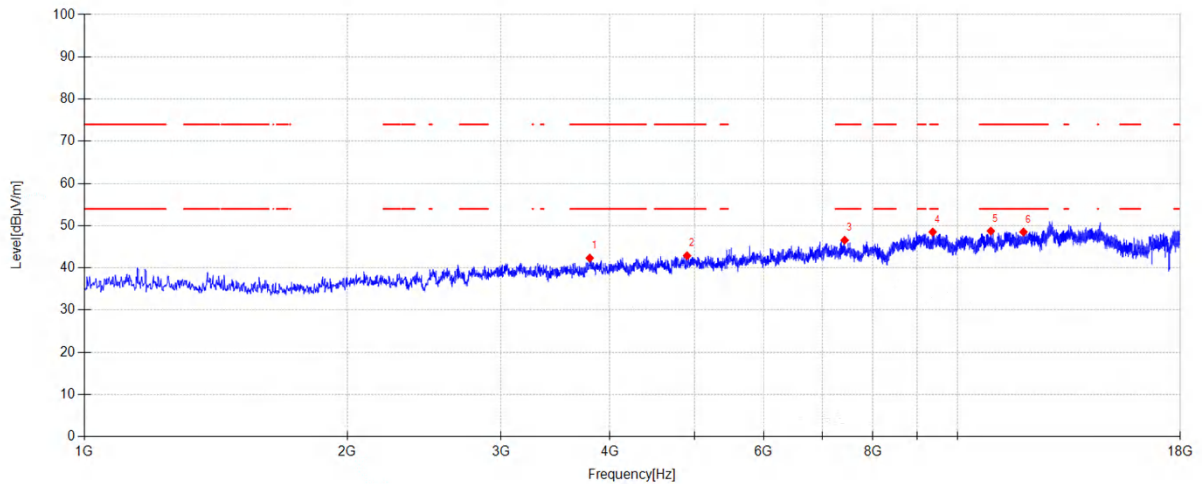


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3791.400	46.72	30.71	4.54	-39.62	42.35	74.00	31.65	PK	Vertical
2	4901.500	44.40	33.10	5.18	-39.79	42.89	74.00	31.11	PK	Vertical
3	7426.000	44.01	36.65	5.77	-39.86	46.57	74.00	27.43	PK	Vertical
4	9367.400	41.99	38.77	6.75	-39.00	48.51	74.00	25.49	PK	Vertical
5	10921.200	41.38	39.62	7.35	-39.61	48.74	74.00	25.26	PK	Vertical
6	11902.100	41.84	38.51	7.77	-39.60	48.52	74.00	25.48	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbín
Test Mode: BLE2M 2440MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

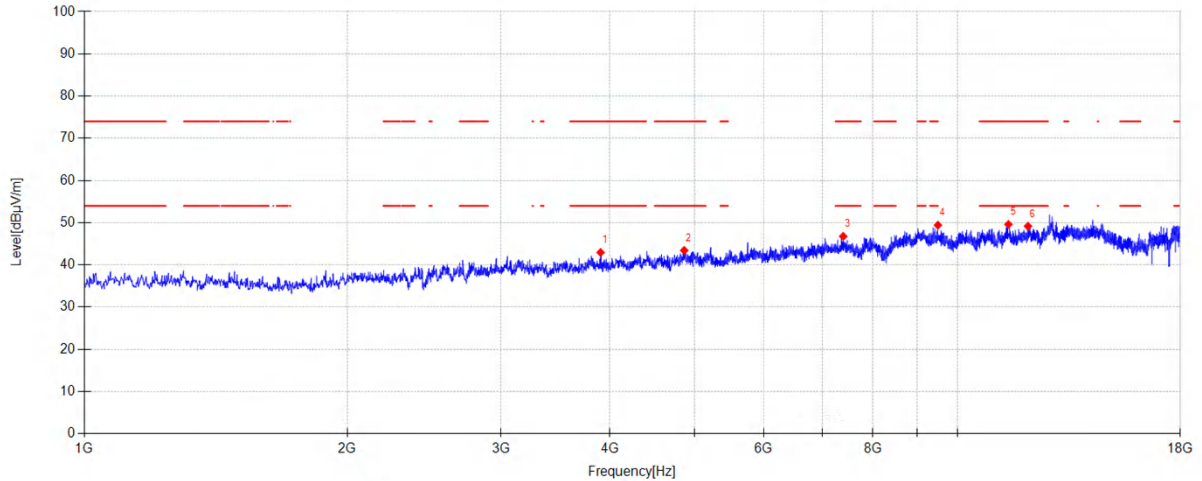


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3901.900	47.17	30.88	4.56	-39.66	42.95	74.00	31.05	PK	Horizontal
2	4864.100	45.11	32.96	5.16	-39.79	43.44	74.00	30.56	PK	Horizontal
3	7398.800	44.16	36.71	5.76	-39.86	46.77	74.00	27.23	PK	Horizontal
4	9498.300	42.96	38.88	6.74	-39.15	49.43	74.00	24.57	PK	Horizontal
5	11438.000	42.19	39.42	7.59	-39.60	49.60	74.00	24.40	PK	Horizontal
6	12044.900	41.71	39.22	7.81	-39.56	49.18	74.00	24.82	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE2M 2440MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

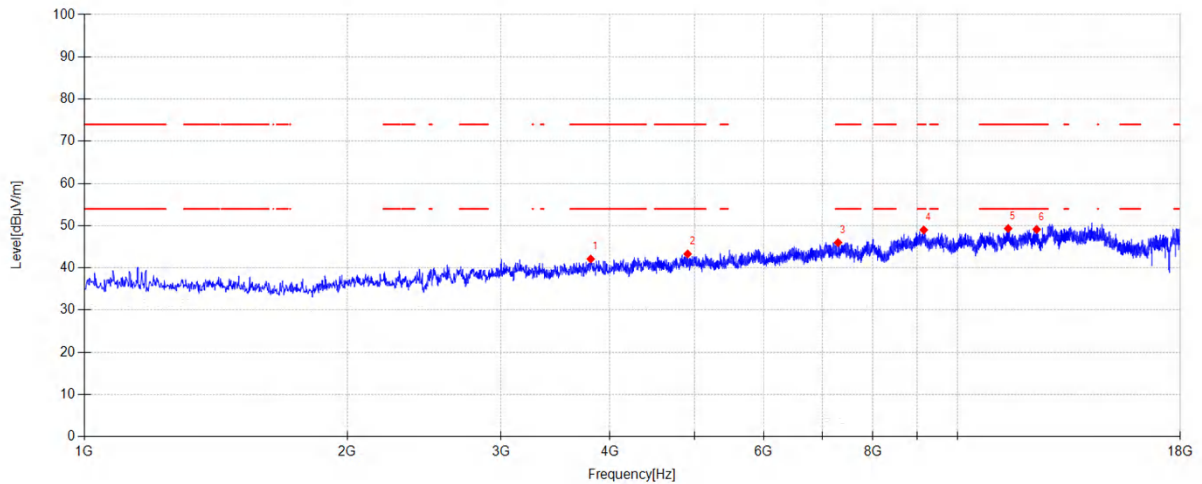


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3801.600	46.32	30.88	4.54	-39.62	42.12	74.00	31.88	PK	Vertical
2	4908.300	44.81	33.10	5.19	-39.79	43.31	74.00	30.69	PK	Vertical
3	7298.500	43.16	37.00	5.72	-39.87	46.01	74.00	27.99	PK	Vertical
4	9151.500	42.01	38.98	6.78	-38.77	49.00	74.00	25.00	PK	Vertical
5	11431.200	41.87	39.49	7.58	-39.60	49.34	74.00	24.66	PK	Vertical
6	12322.000	41.32	39.33	7.81	-39.34	49.12	74.00	24.88	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbín
Test Mode: BLE2M 2478MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

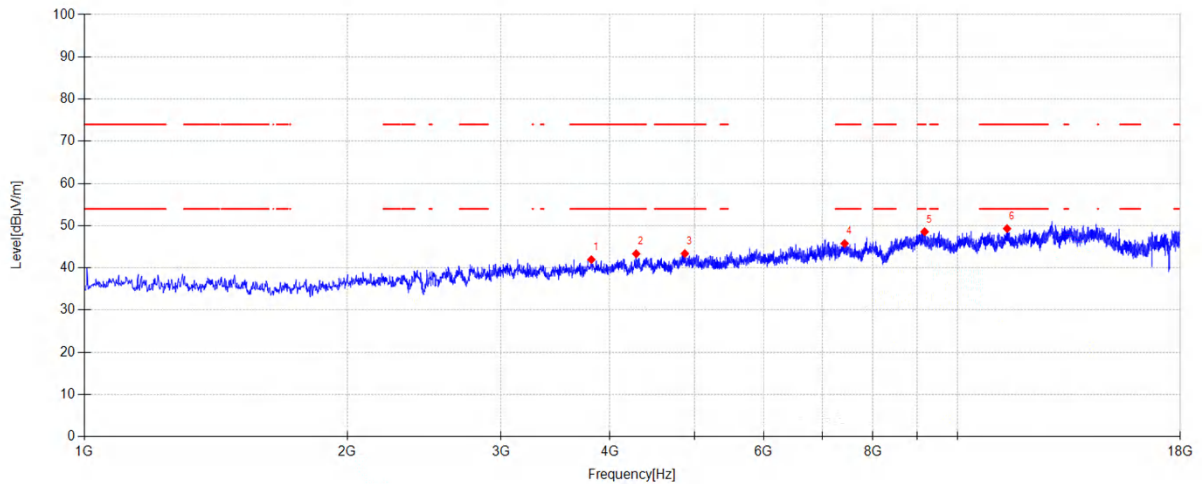


Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3808.400	46.25	30.80	4.55	-39.62	41.98	74.00	32.02	PK	Horizontal
2	4286.100	46.54	31.78	4.76	-39.73	43.35	74.00	30.65	PK	Horizontal
3	4872.600	45.04	32.99	5.16	-39.79	43.40	74.00	30.60	PK	Horizontal
4	7426.000	43.23	36.65	5.77	-39.86	45.79	74.00	28.21	PK	Horizontal
5	9170.200	41.82	38.76	6.78	-38.79	48.57	74.00	25.43	PK	Horizontal
6	11398.900	41.55	39.79	7.57	-39.60	49.31	74.00	24.69	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE2M 2478MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

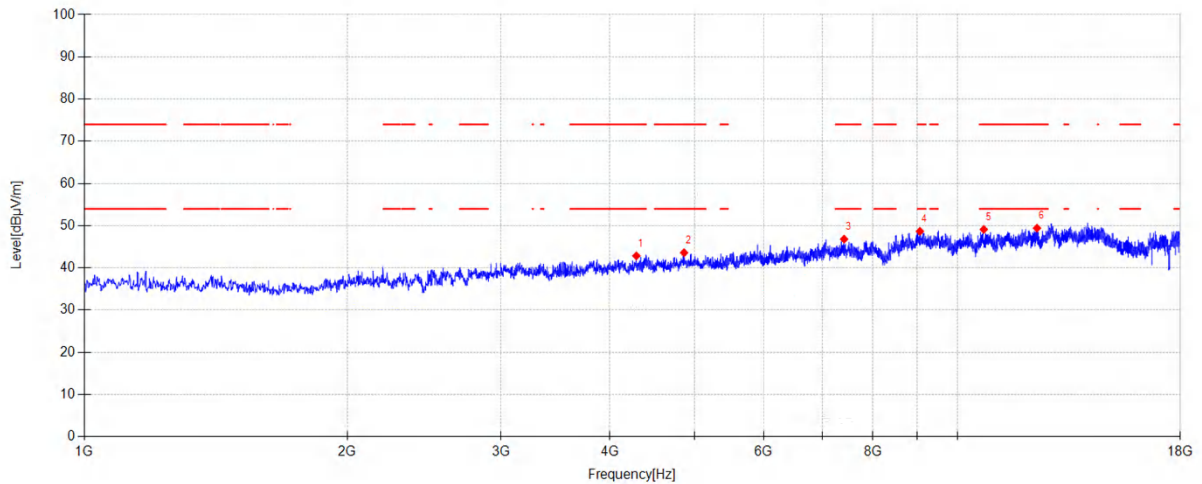

Suspected Data List


N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	4287.800	46.03	31.80	4.77	-39.73	42.87	74.00	31.13	PK	Vertical
2	4862.400	45.29	32.95	5.16	-39.79	43.61	74.00	30.39	PK	Vertical
3	7415.800	44.24	36.67	5.77	-39.86	46.82	74.00	27.18	PK	Vertical
4	9056.300	41.76	38.79	6.79	-38.66	48.68	74.00	25.32	PK	Vertical
5	10718.900	42.13	39.41	7.20	-39.63	49.11	74.00	24.89	PK	Vertical
6	12333.900	41.65	39.30	7.81	-39.33	49.43	74.00	24.57	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Appendix A.7: Test Results of Radiated Emissions in Restricted Bands

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE1M 2402MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

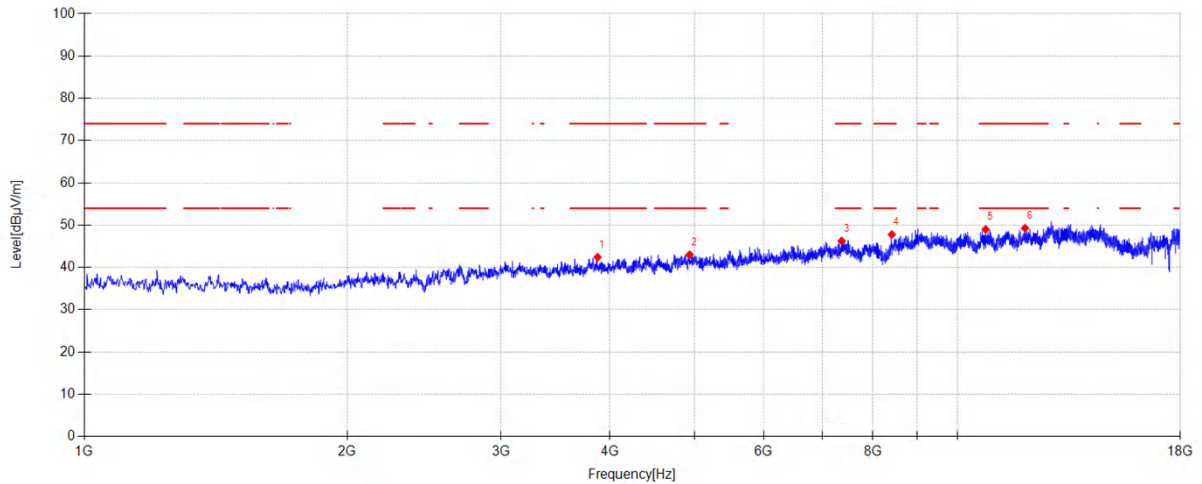


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3871.300	46.96	30.56	4.55	-39.65	42.42	74.00	31.58	PK	Horizontal
2	4933.800	44.50	33.10	5.20	-39.79	43.01	74.00	30.99	PK	Horizontal
3	7369.900	43.48	36.88	5.75	-39.86	46.25	74.00	27.75	PK	Horizontal
4	8410.300	43.18	37.60	6.31	-39.31	47.78	74.00	26.22	PK	Horizontal
5	10771.600	42.23	39.14	7.24	-39.62	48.99	74.00	25.01	PK	Horizontal
6	11951.400	42.33	38.76	7.79	-39.60	49.28	74.00	24.72	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbín
Test Mode: BLE1M 2402MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

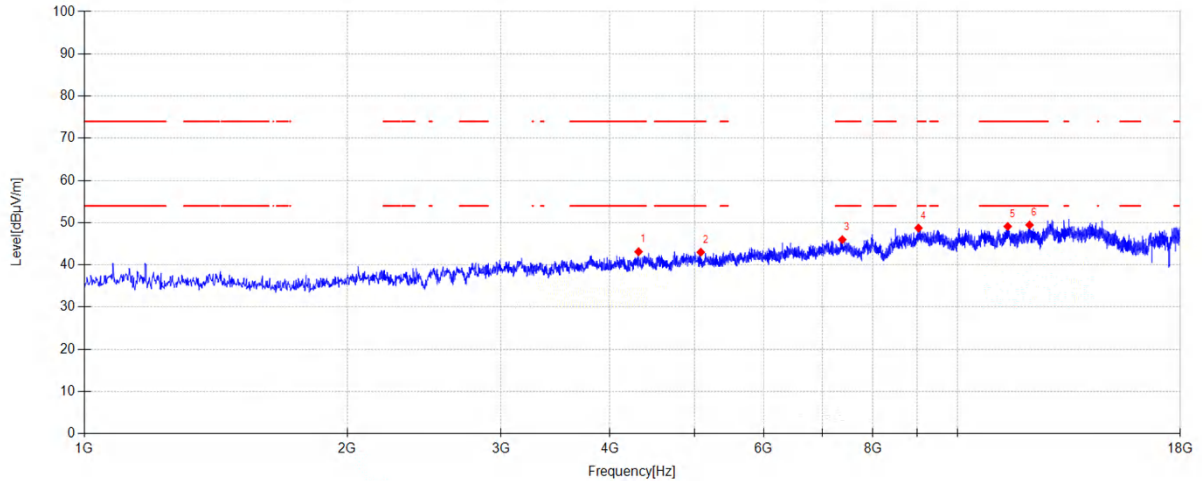


Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	4313.300	46.27	31.81	4.78	-39.73	43.13	74.00	30.87	PK	Vertical
2	5081.700	44.79	32.72	5.28	-39.78	43.01	74.00	30.99	PK	Vertical
3	7380.100	43.27	36.82	5.75	-39.86	45.98	74.00	28.02	PK	Vertical
4	9024.000	41.88	38.69	6.80	-38.63	48.74	74.00	25.26	PK	Vertical
5	11417.600	41.51	39.62	7.58	-39.60	49.11	74.00	24.89	PK	Vertical
6	12094.200	41.70	39.47	7.81	-39.52	49.46	74.00	24.54	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbín
Test Mode: BLE1M 2440MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

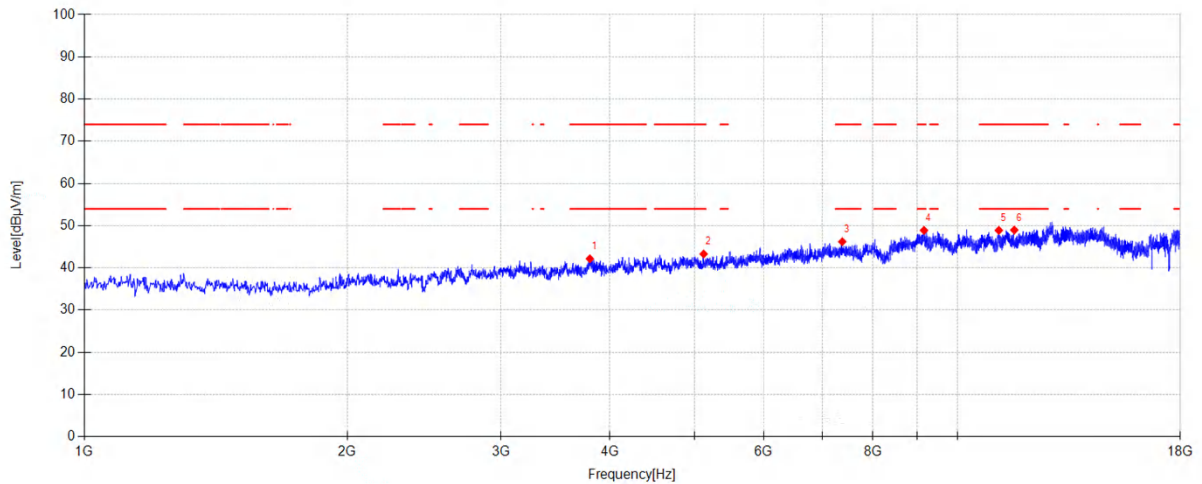


Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3793.100	46.50	30.75	4.54	-39.62	42.17	74.00	31.83	PK	Horizontal
2	5120.800	45.13	32.67	5.29	-39.78	43.31	74.00	30.69	PK	Horizontal
3	7380.100	43.51	36.82	5.75	-39.86	46.22	74.00	27.78	PK	Horizontal
4	9156.600	41.97	38.92	6.78	-38.77	48.90	74.00	25.10	PK	Horizontal
5	11152.400	42.18	38.85	7.47	-39.60	48.90	74.00	25.10	PK	Horizontal
6	11616.500	42.33	38.58	7.66	-39.60	48.97	74.00	25.03	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbín
Test Mode: BLE1M 2440MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

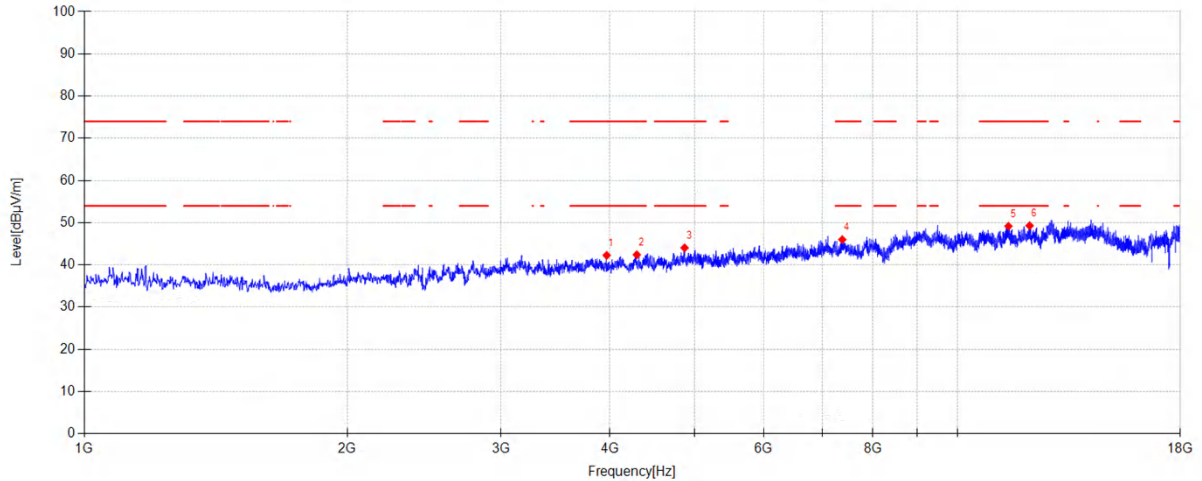


Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3964.800	46.92	30.48	4.57	-39.69	42.28	74.00	31.72	PK	Vertical
2	4292.900	45.48	31.89	4.77	-39.73	42.41	74.00	31.59	PK	Vertical
3	4869.200	45.70	32.98	5.16	-39.79	44.05	74.00	29.95	PK	Vertical
4	7380.100	43.29	36.82	5.75	-39.86	46.00	74.00	28.00	PK	Vertical
5	11439.700	41.79	39.40	7.59	-39.60	49.18	74.00	24.82	PK	Vertical
6	12095.900	41.53	39.48	7.81	-39.52	49.30	74.00	24.70	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE1M 2480MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

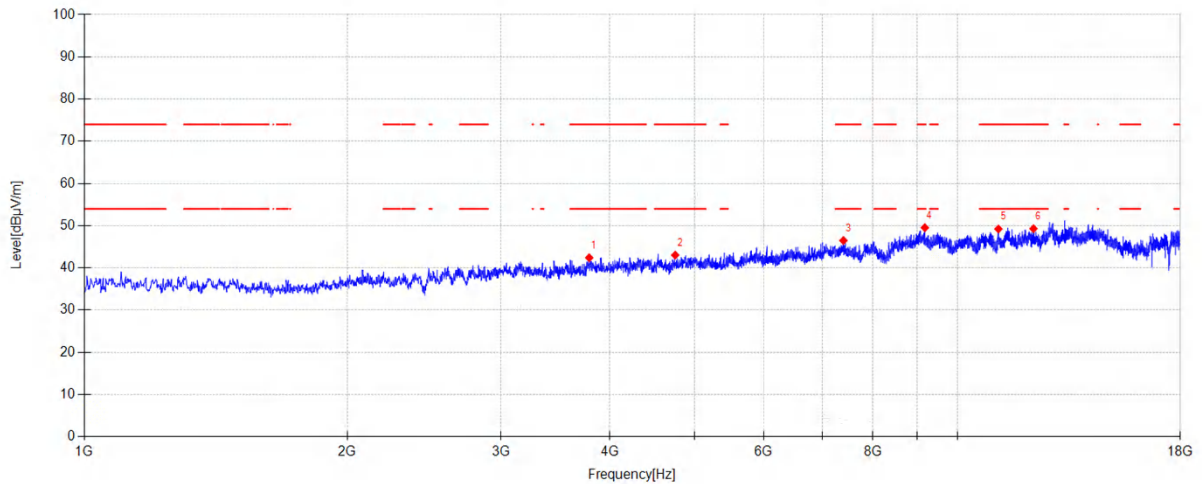


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3786.300	46.88	30.60	4.54	-39.61	42.41	74.00	31.59	PK	Horizontal
2	4750.200	45.55	32.20	5.08	-39.78	43.05	74.00	30.95	PK	Horizontal
3	7402.200	43.89	36.70	5.76	-39.86	46.49	74.00	27.51	PK	Horizontal
4	9175.300	42.85	38.70	6.78	-38.79	49.54	74.00	24.46	PK	Horizontal
5	11140.500	42.50	38.86	7.47	-39.60	49.23	74.00	24.77	PK	Horizontal
6	12220.000	41.67	39.24	7.81	-39.42	49.30	74.00	24.70	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE1M 2480MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

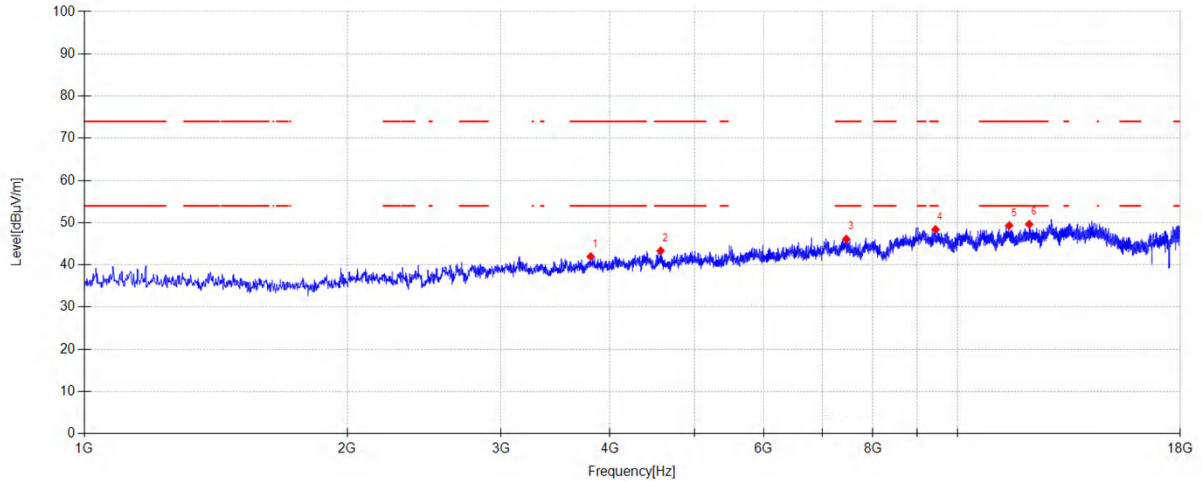


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3801.600	46.18	30.88	4.54	-39.62	41.98	74.00	32.02	PK	Vertical
2	4571.700	46.35	31.80	4.96	-39.76	43.35	74.00	30.65	PK	Vertical
3	7458.300	43.56	36.65	5.78	-39.85	46.14	74.00	27.86	PK	Vertical
4	9438.800	42.44	38.31	6.74	-39.08	48.41	74.00	25.59	PK	Vertical
5	11463.500	42.16	39.17	7.60	-39.60	49.33	74.00	24.67	PK	Vertical
6	12084.000	41.94	39.42	7.81	-39.53	49.64	74.00	24.36	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE2M 2404MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

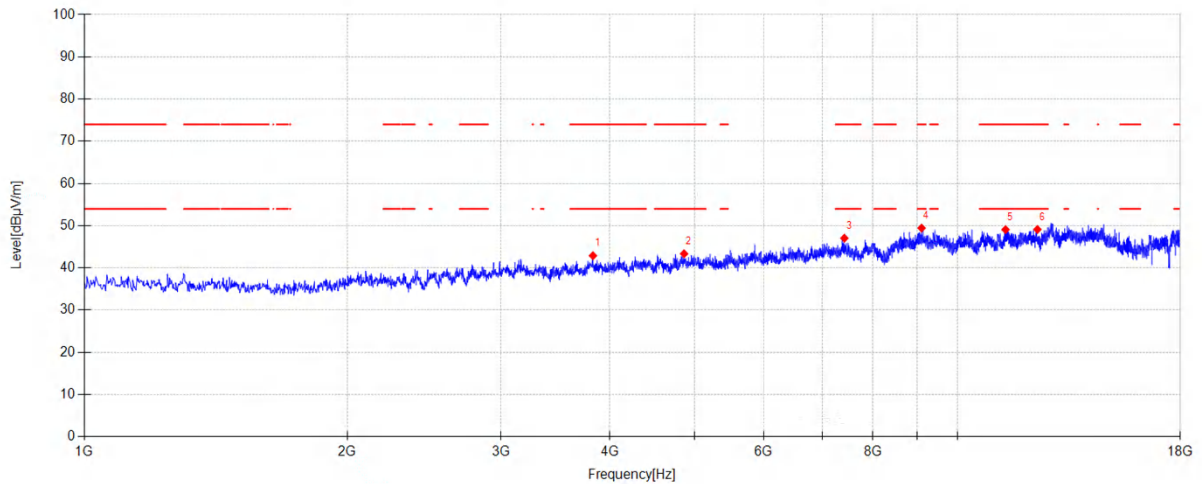


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3823.700	47.36	30.62	4.55	-39.63	42.90	74.00	31.10	PK	Horizontal
2	4862.400	45.04	32.95	5.16	-39.79	43.36	74.00	30.64	PK	Horizontal
3	7420.900	44.48	36.66	5.77	-39.86	47.05	74.00	26.95	PK	Horizontal
4	9097.100	43.32	38.05	6.79	-38.71	49.45	74.00	24.55	PK	Horizontal
5	11351.300	41.91	39.22	7.55	-39.60	49.08	74.00	24.92	PK	Horizontal
6	12347.500	41.36	39.26	7.81	-39.32	49.11	74.00	24.89	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE2M 2404MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

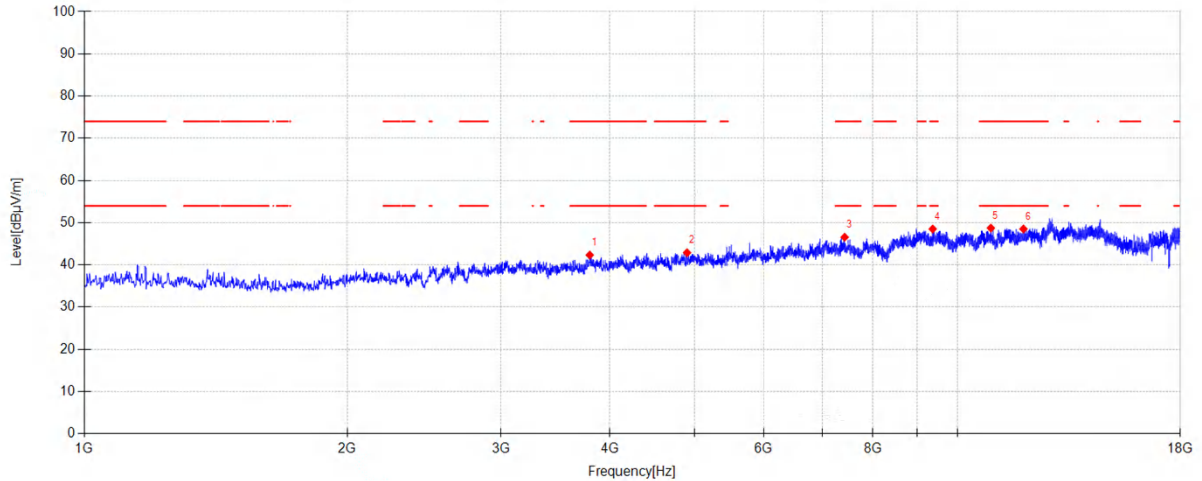


Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3791.400	46.72	30.71	4.54	-39.62	42.35	74.00	31.65	PK	Vertical
2	4901.500	44.40	33.10	5.18	-39.79	42.89	74.00	31.11	PK	Vertical
3	7426.000	44.01	36.65	5.77	-39.86	46.57	74.00	27.43	PK	Vertical
4	9367.400	41.99	38.77	6.75	-39.00	48.51	74.00	25.49	PK	Vertical
5	10921.200	41.38	39.62	7.35	-39.61	48.74	74.00	25.26	PK	Vertical
6	11902.100	41.84	38.51	7.77	-39.60	48.52	74.00	25.48	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE2M 2440MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

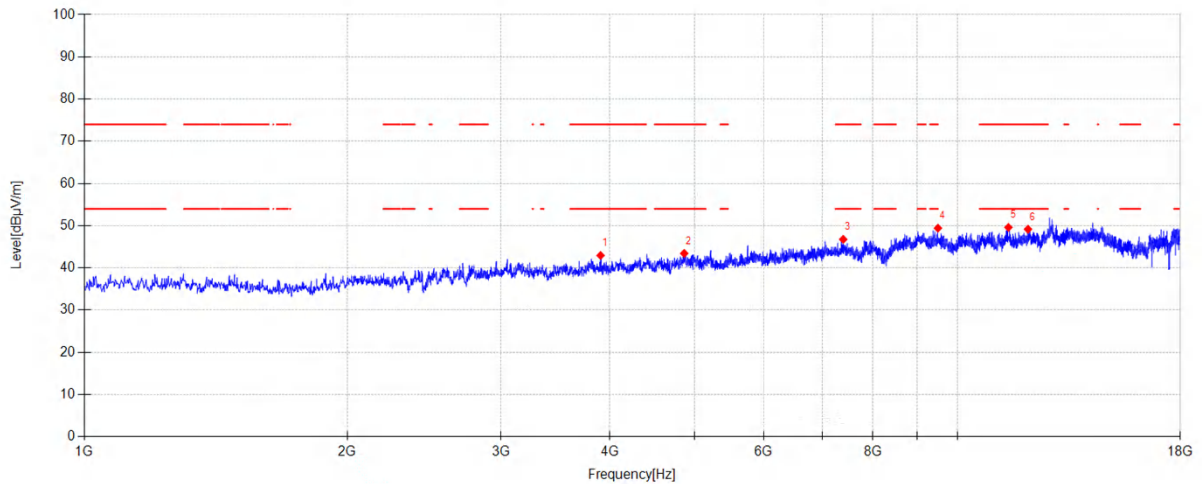


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3901.900	47.17	30.88	4.56	-39.66	42.95	74.00	31.05	PK	Horizontal
2	4864.100	45.11	32.96	5.16	-39.79	43.44	74.00	30.56	PK	Horizontal
3	7398.800	44.16	36.71	5.76	-39.86	46.77	74.00	27.23	PK	Horizontal
4	9498.300	42.96	38.88	6.74	-39.15	49.43	74.00	24.57	PK	Horizontal
5	11438.000	42.19	39.42	7.59	-39.60	49.60	74.00	24.40	PK	Horizontal
6	12044.900	41.71	39.22	7.81	-39.56	49.18	74.00	24.82	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE2M 2440MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

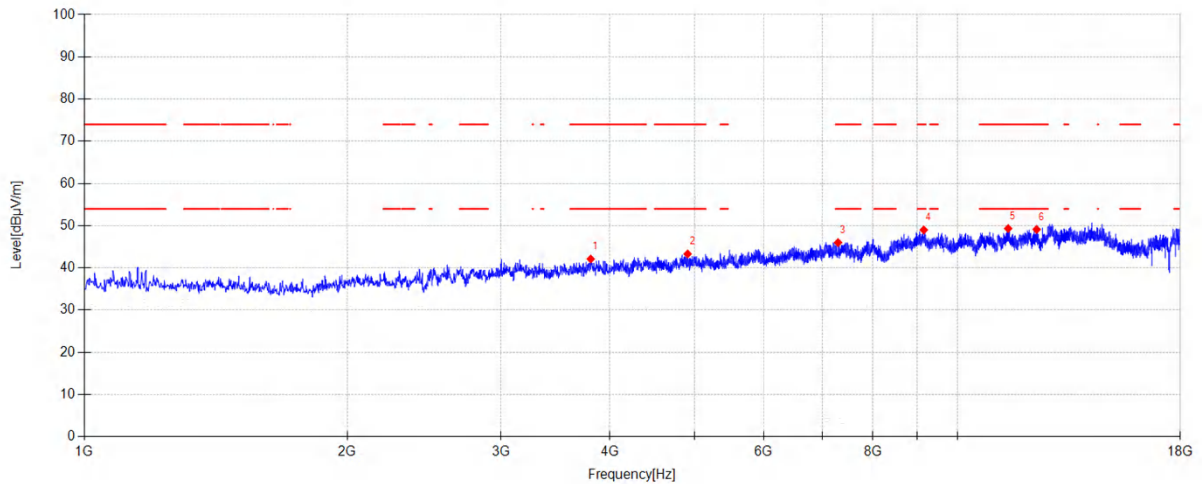


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3801.600	46.32	30.88	4.54	-39.62	42.12	74.00	31.88	PK	Vertical
2	4908.300	44.81	33.10	5.19	-39.79	43.31	74.00	30.69	PK	Vertical
3	7298.500	43.16	37.00	5.72	-39.87	46.01	74.00	27.99	PK	Vertical
4	9151.500	42.01	38.98	6.78	-38.77	49.00	74.00	25.00	PK	Vertical
5	11431.200	41.87	39.49	7.58	-39.60	49.34	74.00	24.66	PK	Vertical
6	12322.000	41.32	39.33	7.81	-39.34	49.12	74.00	24.88	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: BLE2M 2478MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

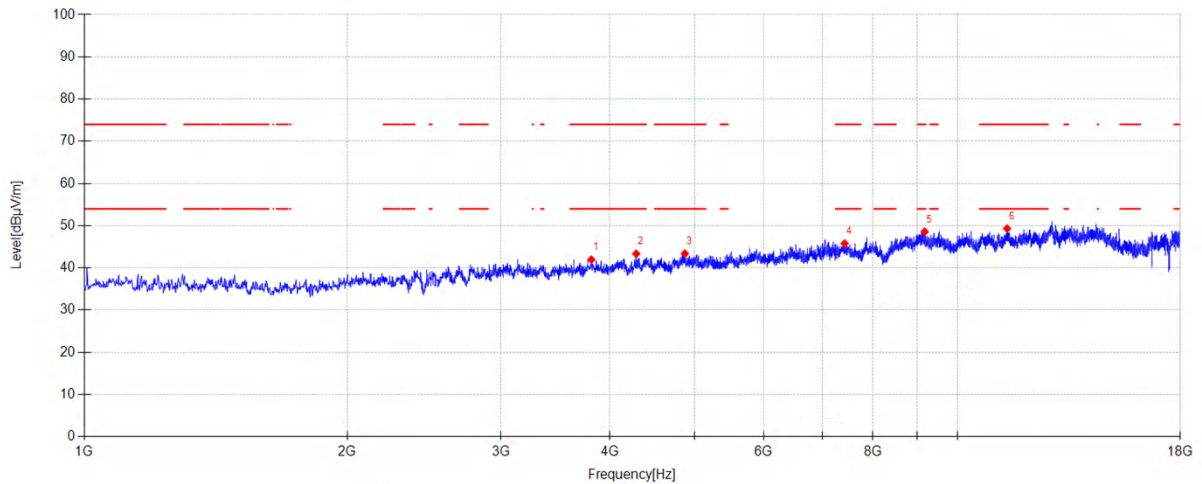


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3808.400	46.25	30.80	4.55	-39.62	41.98	74.00	32.02	PK	Horizontal
2	4286.100	46.54	31.78	4.76	-39.73	43.35	74.00	30.65	PK	Horizontal
3	4872.600	45.04	32.99	5.16	-39.79	43.40	74.00	30.60	PK	Horizontal
4	7426.000	43.23	36.65	5.77	-39.86	45.79	74.00	28.21	PK	Horizontal
5	9170.200	41.82	38.76	6.78	-38.79	48.57	74.00	25.43	PK	Horizontal
6	11398.900	41.55	39.79	7.57	-39.60	49.31	74.00	24.69	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbín
Test Mode: BLE2M 2478MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

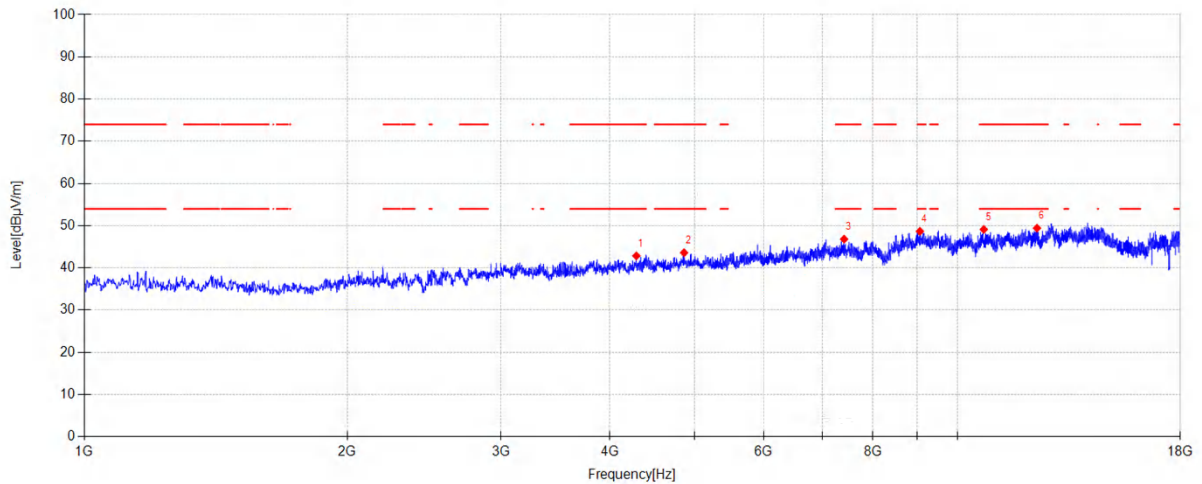

Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	4287.800	46.03	31.80	4.77	-39.73	42.87	74.00	31.13	PK	Vertical
2	4862.400	45.29	32.95	5.16	-39.79	43.61	74.00	30.39	PK	Vertical
3	7415.800	44.24	36.67	5.77	-39.86	46.82	74.00	27.18	PK	Vertical
4	9056.300	41.76	38.79	6.79	-38.66	48.68	74.00	25.32	PK	Vertical
5	10718.900	42.13	39.41	7.20	-39.63	49.11	74.00	24.89	PK	Vertical
6	12333.900	41.65	39.30	7.81	-39.33	49.43	74.00	24.57	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Appendix A.8: Test Results of Conducted Emissions on AC Mains

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25110709-2E\1124 CE.EM6
Test Date : 2025-12-24 Tested By : Yisheng Ling
Power Supply : AC 120V/60Hz Test Mode : BLE 1M mode
Condition : TEMP:24.9°C, RH:47.2% LISN : 2025 1# 216/NEUTRAL

Data: 2

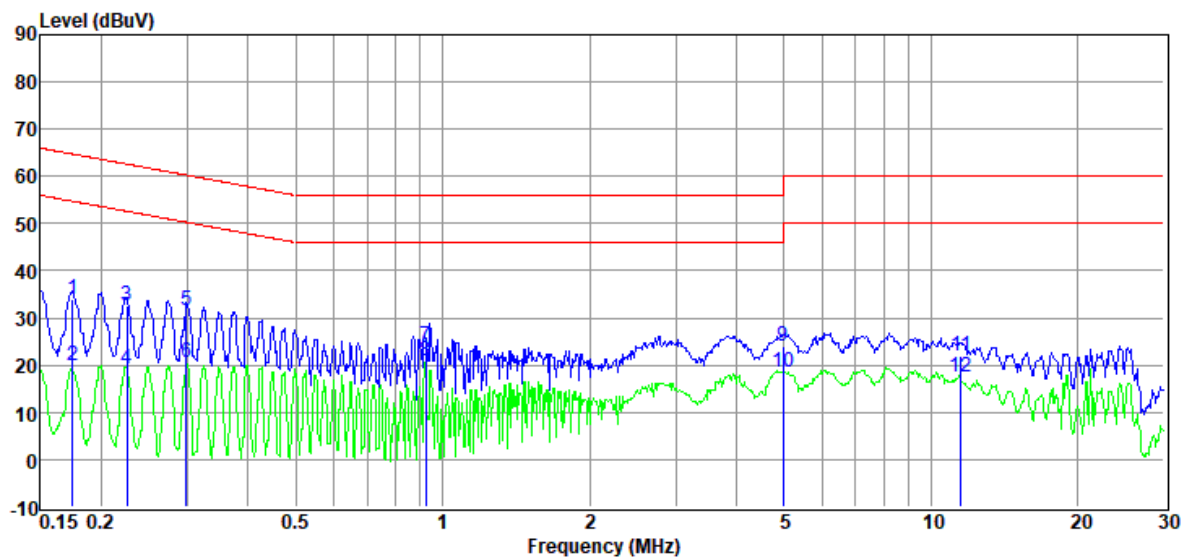


Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV)	(dBuV)	(dB)		
1	0.17	14.42	9.71	0.06	9.89	34.08	64.72	30.64	QP	NEUTRAL
2	0.17	0.13	9.71	0.06	9.89	19.79	54.72	34.93	Average	NEUTRAL
3	0.23	12.74	9.84	0.06	9.89	32.53	62.61	30.08	QP	NEUTRAL
4	0.23	-0.45	9.84	0.06	9.89	19.34	52.61	33.27	Average	NEUTRAL
5	0.30	11.87	9.65	0.06	9.89	31.47	60.28	28.81	QP	NEUTRAL
6	0.30	0.86	9.65	0.06	9.89	20.46	50.28	29.82	Average	NEUTRAL
7	0.92	3.97	9.89	0.14	9.90	23.90	56.00	32.10	QP	NEUTRAL
8	0.92	1.03	9.89	0.14	9.90	20.96	46.00	25.04	Average	NEUTRAL
9	4.98	4.17	9.87	0.19	9.86	24.09	56.00	31.91	QP	NEUTRAL
10	4.98	-1.38	9.87	0.19	9.86	18.54	46.00	27.46	Average	NEUTRAL
11	11.50	1.47	10.24	0.29	9.85	21.85	60.00	38.15	QP	NEUTRAL
12	11.50	-3.04	10.24	0.29	9.85	17.34	50.00	32.66	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25110709-2E\1124 CE.EM6
Test Date : 2025-12-24 Tested By : Yisheng Ling
Power Supply : AC 120V/60Hz Test Mode : BLE 1M mode
Condition : TEMP:24.9°C, RH:47.2% LISN : 2025 1# 216/LINE

Data: 4

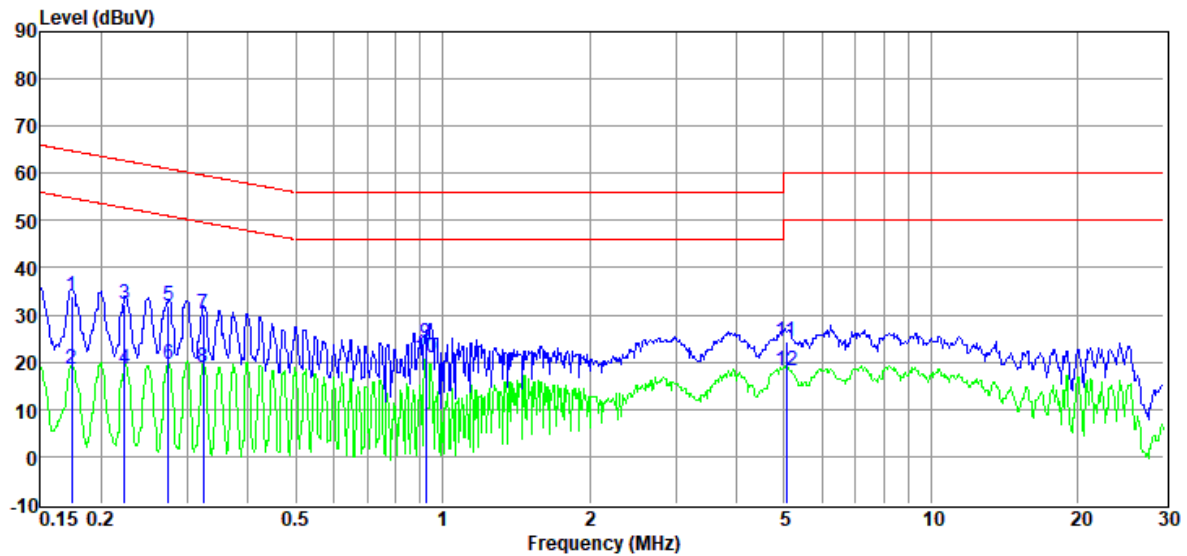


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.17	14.12	9.84	0.06	9.89	33.91	64.77	30.86	QP	LINE
2	0.17	-1.37	9.84	0.06	9.89	18.42	54.77	36.35	Average	LINE
3	0.22	12.43	9.82	0.06	9.89	32.20	62.70	30.50	QP	LINE
4	0.22	-1.14	9.82	0.06	9.89	18.63	52.70	34.07	Average	LINE
5	0.27	12.17	9.76	0.06	9.89	31.88	60.98	29.10	QP	LINE
6	0.27	-0.29	9.76	0.06	9.89	19.42	50.98	31.56	Average	LINE
7	0.32	10.62	9.68	0.06	9.89	30.25	59.62	29.37	QP	LINE
8	0.32	-0.69	9.68	0.06	9.89	18.94	49.62	30.68	Average	LINE
9	0.92	4.27	9.88	0.14	9.90	24.19	56.00	31.81	QP	LINE
10	0.92	0.85	9.88	0.14	9.90	20.77	46.00	25.23	Average	LINE
11	5.06	4.25	9.97	0.19	9.86	24.27	60.00	35.73	QP	LINE
12	5.06	-1.68	9.97	0.19	9.86	18.34	50.00	31.66	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25110709-2E\1124 CE.EM6
Test Date : 2025-12-24 Tested By : Yisheng Ling
Power Supply : AC 120V/60Hz Test Mode : BLE 2M mode
Condition : TEMP:24.9°C, RH:47.2% LISN : 2025 1# 216/LINE

Data: 6

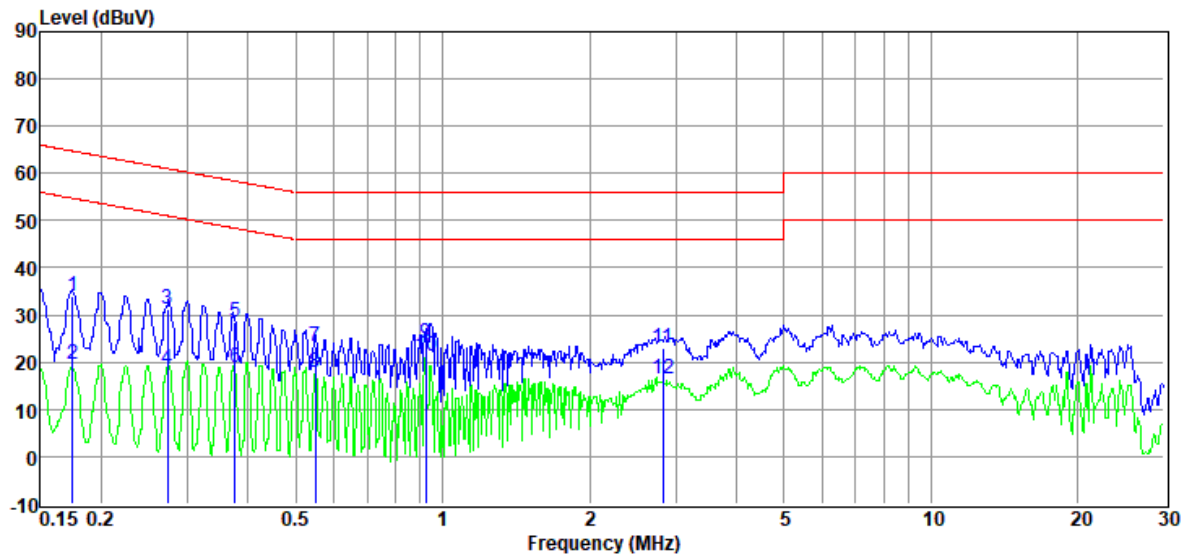


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.17	14.06	9.84	0.06	9.89	33.85	64.72	30.87	QP	LINE
2	0.17	-0.14	9.84	0.06	9.89	19.65	54.72	35.07	Average	LINE
3	0.27	11.59	9.76	0.06	9.89	31.30	61.03	29.73	QP	LINE
4	0.27	-1.09	9.76	0.06	9.89	18.62	51.03	32.41	Average	LINE
5	0.38	8.78	9.68	0.07	9.89	28.42	58.39	29.97	QP	LINE
6	0.38	-0.75	9.68	0.07	9.89	18.89	48.39	29.50	Average	LINE
7	0.55	3.62	9.86	0.10	9.89	23.47	56.00	32.53	QP	LINE
8	0.55	-2.08	9.86	0.10	9.89	17.77	46.00	28.23	Average	LINE
9	0.92	4.26	9.88	0.14	9.90	24.18	56.00	31.82	QP	LINE
10	0.92	1.29	9.88	0.14	9.90	21.21	46.00	24.79	Average	LINE
11	2.82	2.95	9.89	0.18	9.88	22.90	56.00	33.10	QP	LINE
12	2.82	-3.36	9.89	0.18	9.88	16.59	46.00	29.41	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 1# Shield Room	D:\2025 CE report data\Q25110709-2E\1124 CE.EM6
Test Date	: 2025-12-24	Tested By : Yisheng Ling
Power Supply	: AC 120V/60Hz	Test Mode : BLE 2M mode
Condition	: TEMP:24.9°C, RH:47.2%	LISN : 2025 1# 216/NEUTRAL

Data: 8

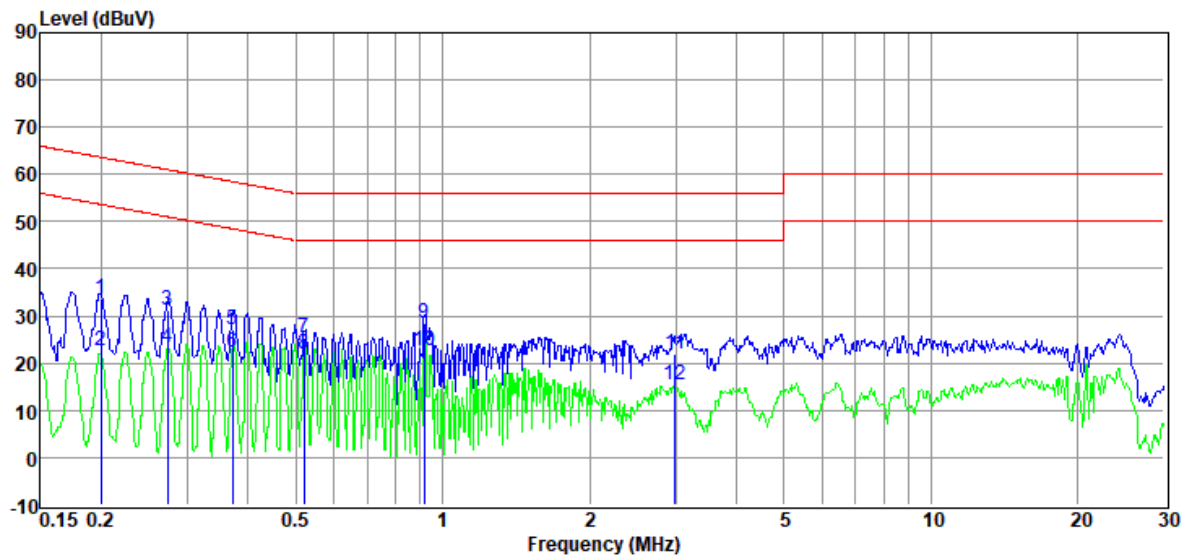

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.20	13.76	9.83	0.06	9.89	33.54	63.62	30.08	QP	NEUTRAL
2	0.20	2.86	9.83	0.06	9.89	22.64	53.62	30.98	Average	NEUTRAL
3	0.27	11.70	9.75	0.06	9.89	31.40	61.03	29.63	QP	NEUTRAL
4	0.27	3.64	9.75	0.06	9.89	23.34	51.03	27.69	Average	NEUTRAL
5	0.37	7.28	9.87	0.07	9.89	27.11	58.47	31.36	QP	NEUTRAL
6	0.37	2.31	9.87	0.07	9.89	22.14	48.47	26.33	Average	NEUTRAL
7	0.52	5.35	9.90	0.09	9.89	25.23	56.00	30.77	QP	NEUTRAL
8	0.52	2.02	9.90	0.09	9.89	21.90	46.00	24.10	Average	NEUTRAL
9	0.92	8.42	9.89	0.14	9.90	28.35	56.00	27.65	QP	NEUTRAL
10	0.92	2.82	9.89	0.14	9.90	22.75	46.00	23.25	Average	NEUTRAL
11	2.99	2.23	9.82	0.18	9.88	22.11	56.00	33.89	QP	NEUTRAL
12	2.99	-4.51	9.82	0.18	9.88	15.37	46.00	30.63	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.