

Appendix A: Test Results of 2.4GHz Wi-Fi

APPENDIX A: TEST RESULTS OF 2.4GHZ WI-FI	1
APPENDIX A.1: TEST RESULTS OF 6DB BANDWIDTH	2
Test Result	2
Test Graphs	2
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH	7
Test Result	7
Test Graphs	7
APPENDIX A.3: TEST RESULTS OF DUTY CYCLE.....	12
Test Result	12
Test Graphs	12
APPENDIX A.4: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	17
Test Result	17
Test Graphs	17
APPENDIX A.5: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS.....	22
Test Result	22
Test Graphs	22
APPENDIX A.6: TEST RESULTS OF BAND EDGE MEASUREMENTS	35
Test Result	35
Test Graphs	35
APPENDIX A.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	38
30MHz - 1GHz	38
1GHz - 18GHz	40
APPENDIX A.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	46


Appendix A.1: Test Results of 6dB Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	9.44	2407.28	2416.72	0.5	PASS
		2437	9.44	2432.28	2441.72	0.5	PASS
		2462	9.40	2457.28	2466.68	0.5	PASS
11G	Ant1	2412	16.60	2403.72	2420.32	0.5	PASS
		2437	16.68	2428.68	2445.36	0.5	PASS
		2462	16.60	2453.72	2470.32	0.5	PASS
11N20SISO	Ant1	2412	17.84	2403.08	2420.92	0.5	PASS
		2437	17.84	2428.08	2445.92	0.5	PASS
		2462	17.84	2453.08	2470.92	0.5	PASS
11AX20SISO	Ant1	2412	19.08	2402.44	2421.52	0.5	PASS
		2437	19.08	2427.44	2446.52	0.5	PASS
		2462	19.08	2452.44	2471.52	0.5	PASS

Test Graphs


11B_Ant1_2412

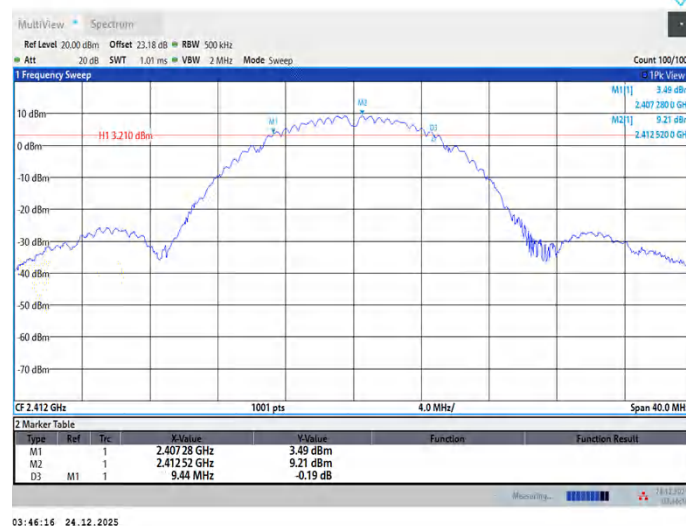


11B_Ant1_2437




11B_Ant1_2462

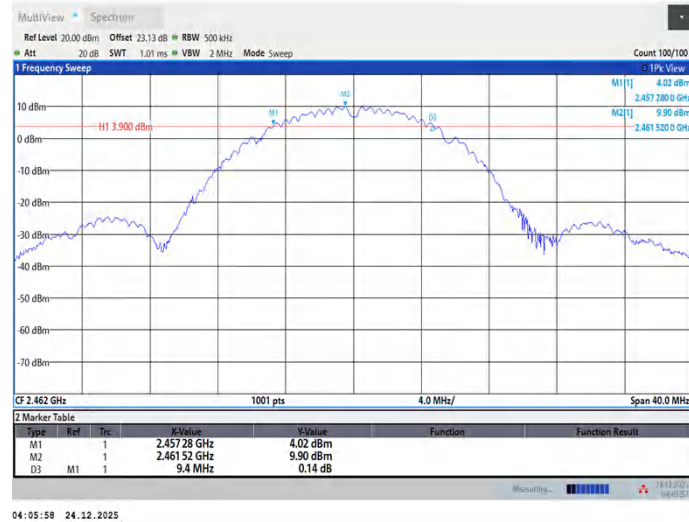


11G_Ant1_2412

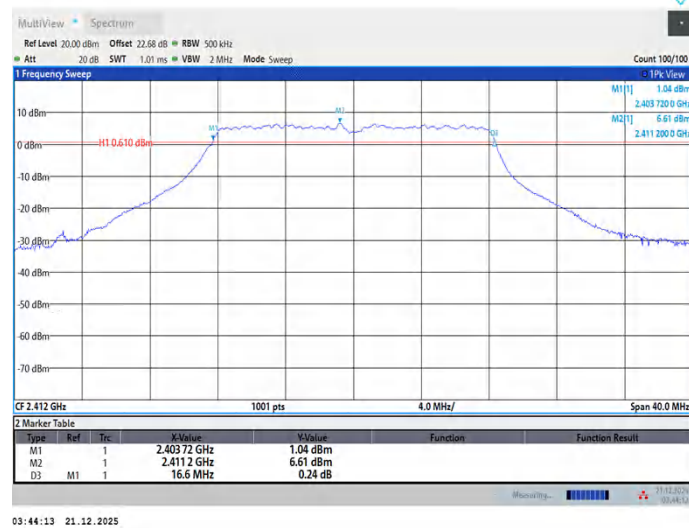


11G_Ant1_2437

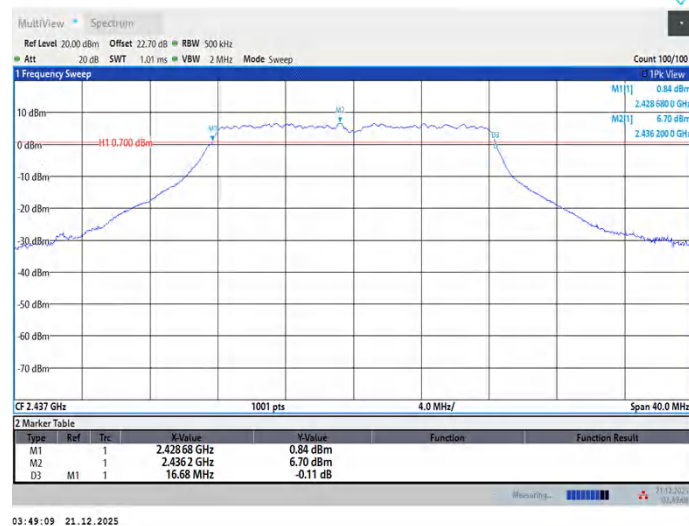


11G_Ant1_2462

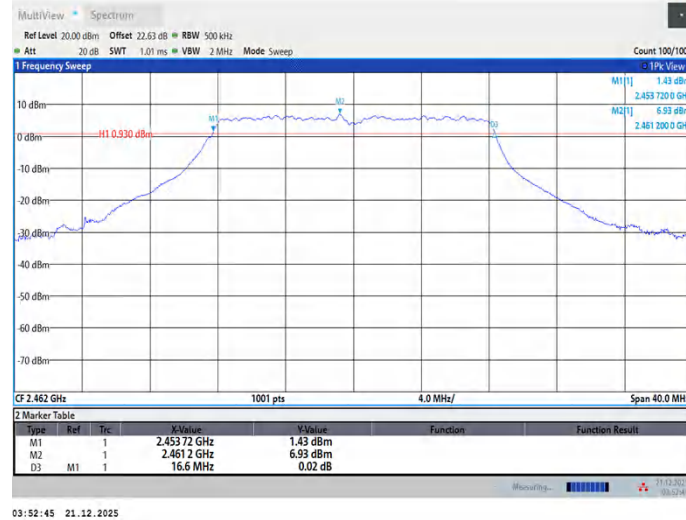


11N20SISO_Ant1_2412

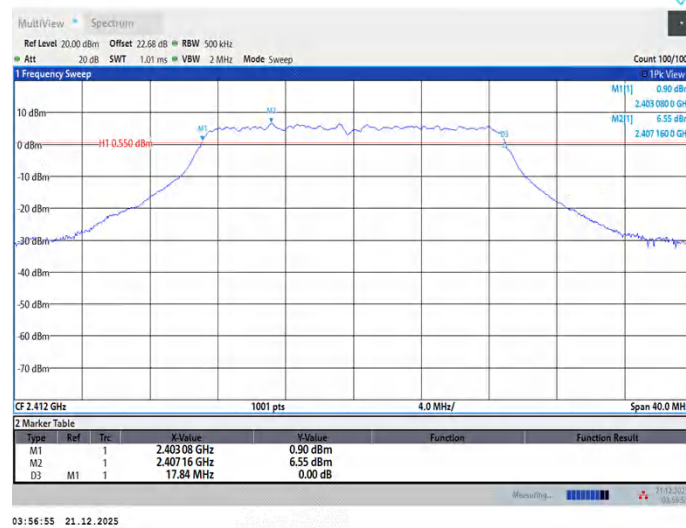

11N20SISO_Ant1_2437

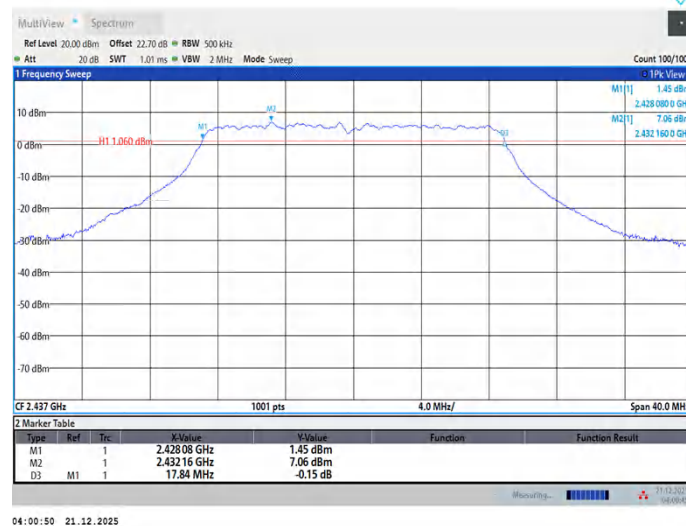


11N20SISO_Ant1_2462

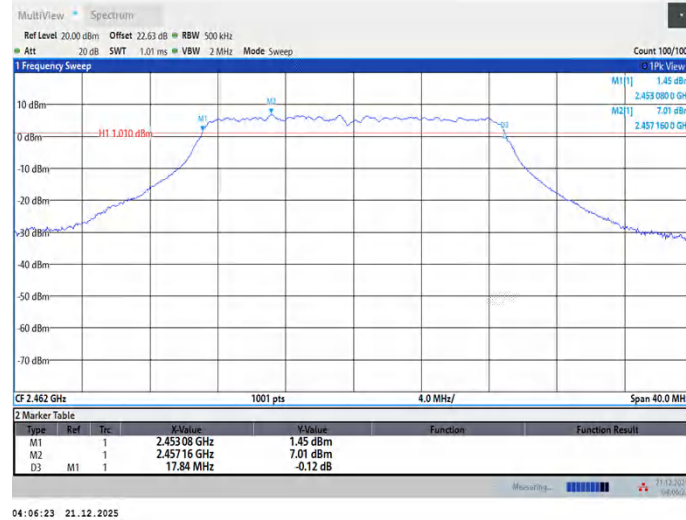


04:06:23 21.12.2025

11AX20SISO_Ant1_2412

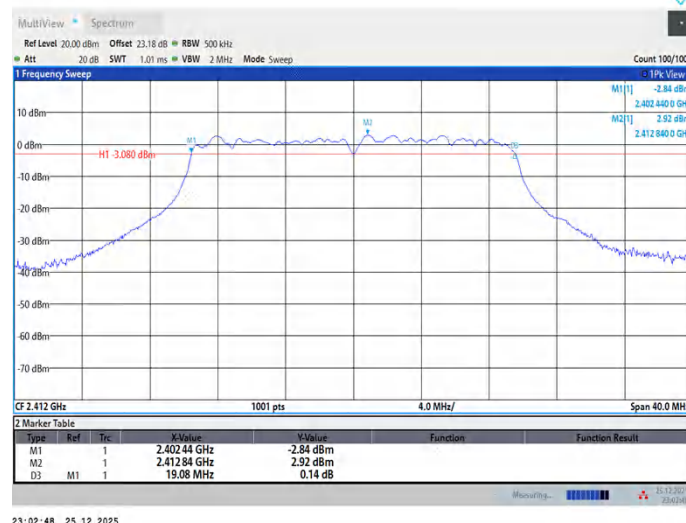


23:02:48 25.12.2025

11AX20SISO_Ant1_2437

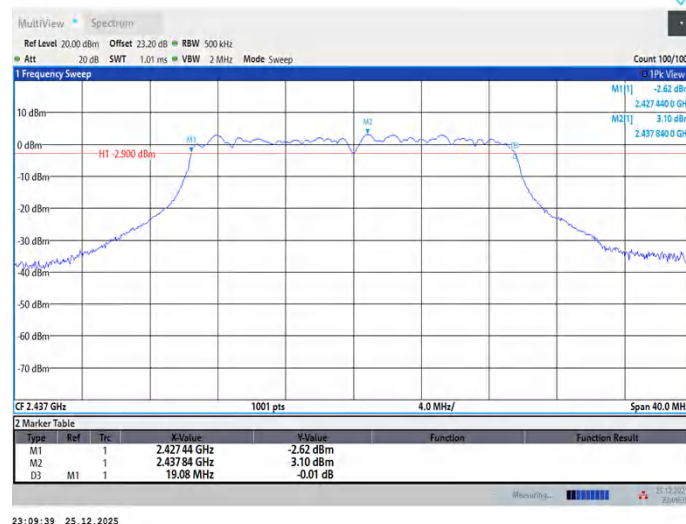

23:09:39 25.12.2025

11AX20SISO_Ant1_2462

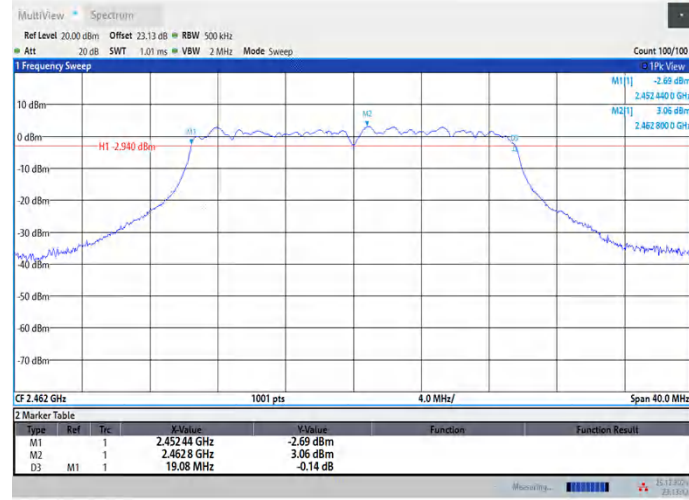

Appendix A.2: Test Results of 99% Bandwidth

Test Result


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.927	2404.9475	2418.8748	---	---
		2437	13.887	2429.9632	2443.8501	---	---
		2462	13.826	2454.9880	2468.8138	---	---
11G	Ant1	2412	17.572	2403.0021	2420.5737	---	---
		2437	17.578	2427.9964	2445.5747	---	---
		2462	17.568	2452.9938	2470.5621	---	---
11N20SISO	Ant1	2412	18.659	2402.6090	2421.2679	---	---
		2437	18.635	2427.6131	2446.2486	---	---
		2462	18.624	2452.6048	2471.2284	---	---
11AX20SISO	Ant1	2412	19.162	2402.4241	2421.5856	---	---
		2437	19.154	2427.4209	2446.5750	---	---
		2462	19.153	2452.4188	2471.5717	---	---

Test Graphs


11B_Ant1_2412




11B_Ant1_2437

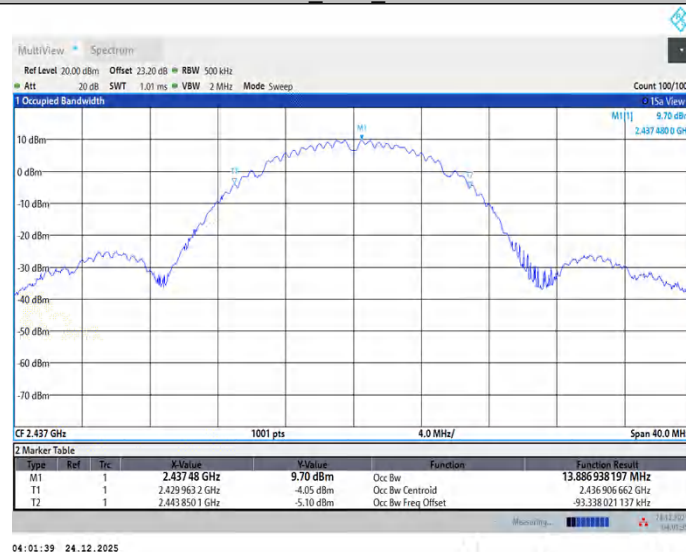


11B_Ant1_2462

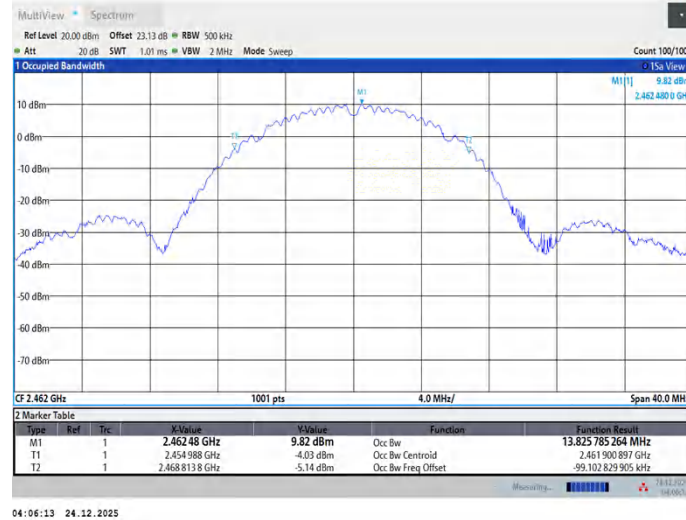


11G_Ant1_2412

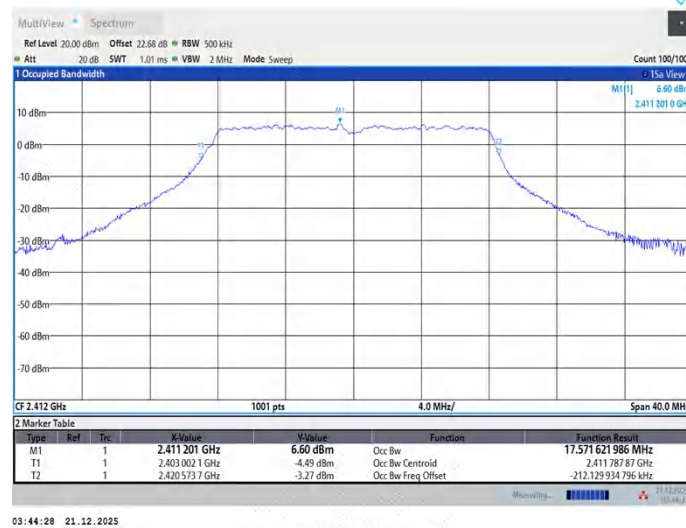


11G_Ant1_2437

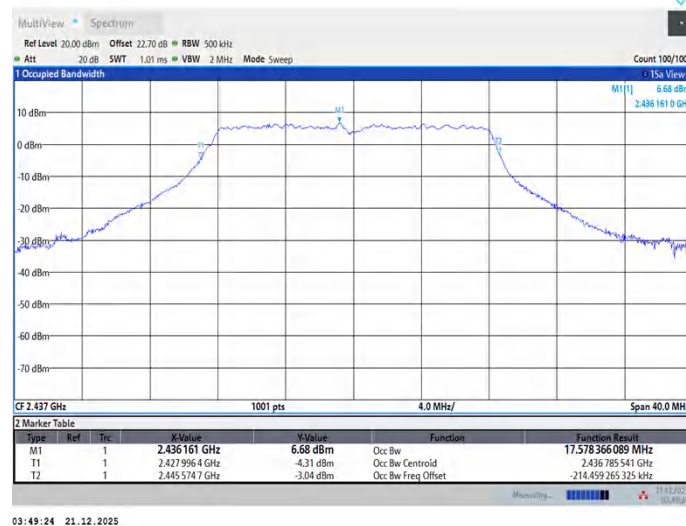


11G_Ant1_2462

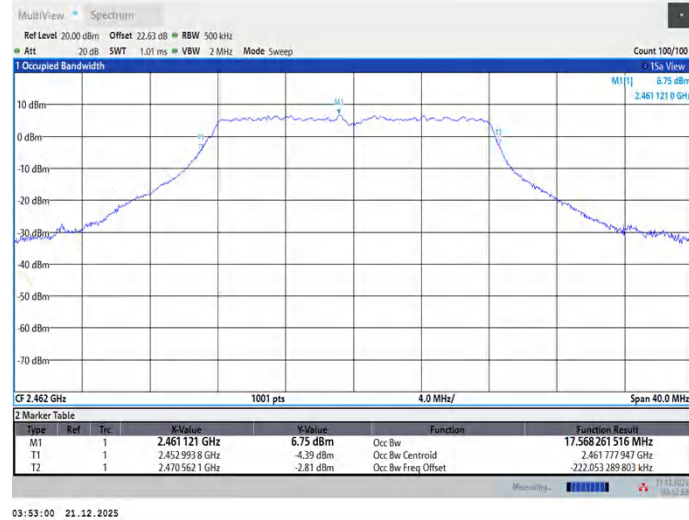


11N20SISO_Ant1_2412

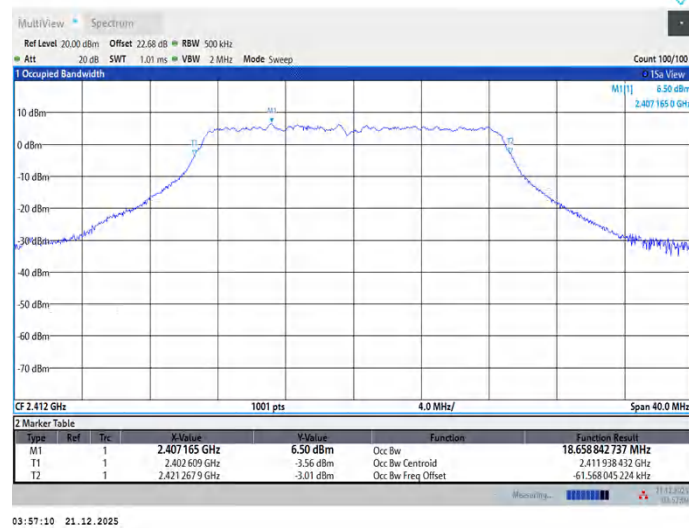


11N20SISO_Ant1_2437

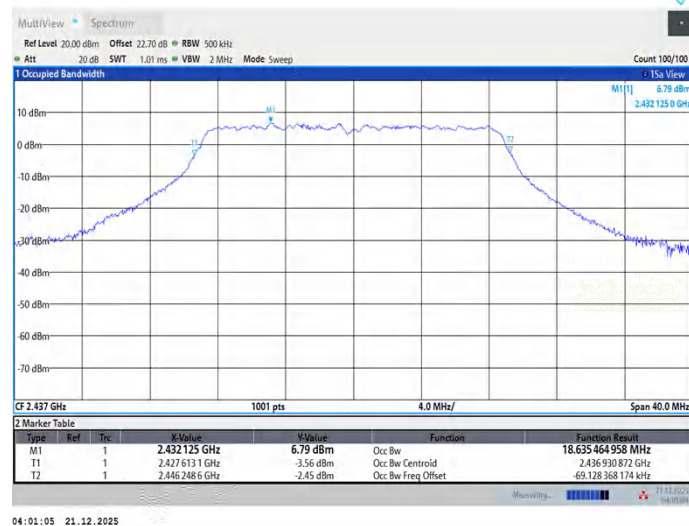


11N20SISO_Ant1_2462

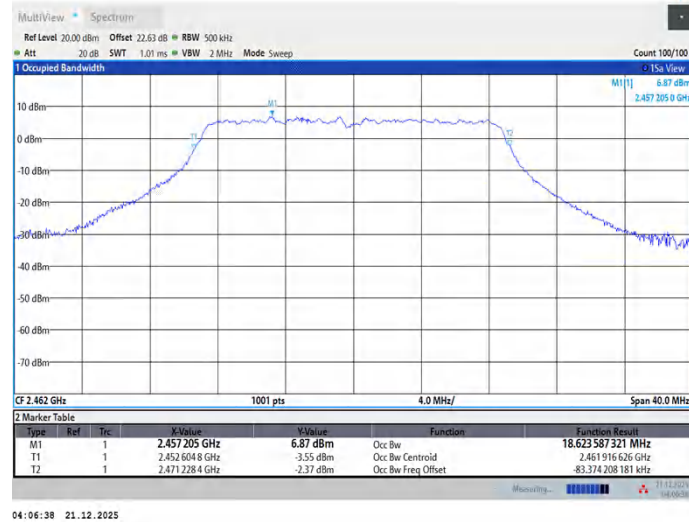


11AX20SISO_Ant1_2412

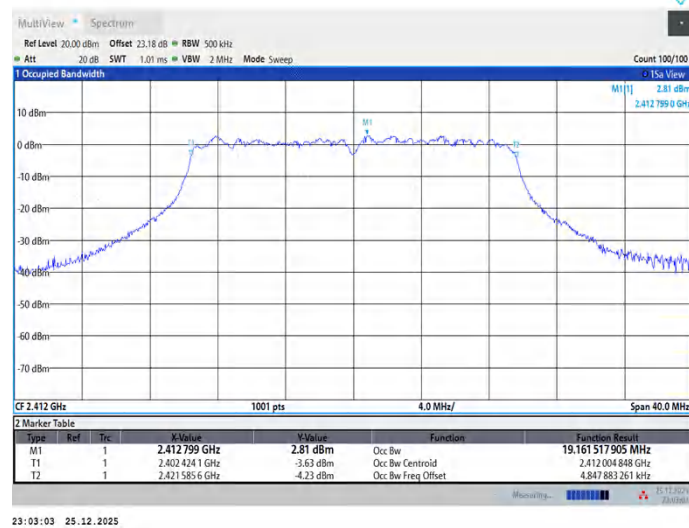

11AX20SISO_Ant1_2437

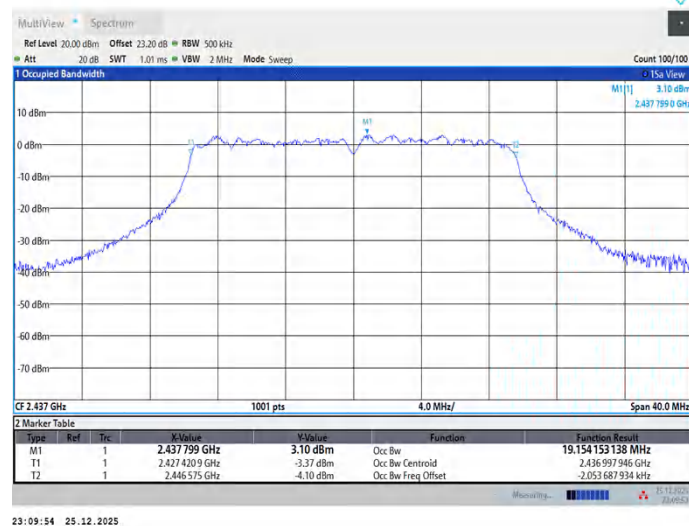

11AX20SISO_Ant1_2462

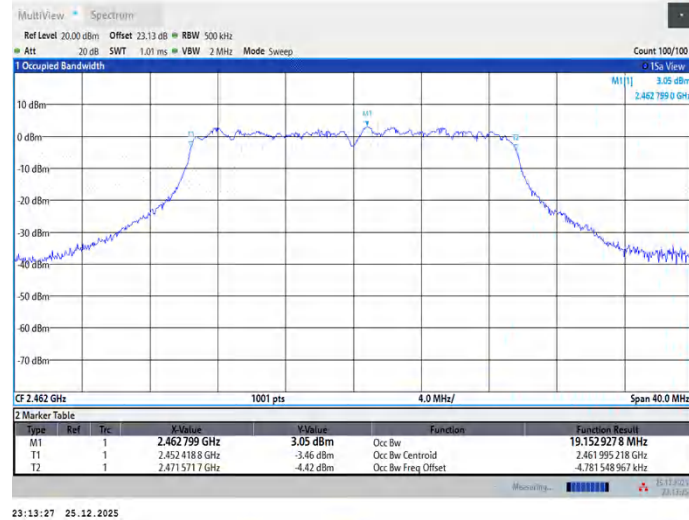


Appendix A.3: Test Results of Duty Cycle

Test Result


Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	8.19	8.21	99.76
		2437	40.00	40.00	100.00
		2462	40.00	40.00	100.00
11G	Ant1	2412	1.36	1.38	98.55
		2437	1.36	1.38	98.55
		2462	1.36	1.38	98.55
11N20SISO	Ant1	2412	1.27	1.29	98.45
		2437	1.27	1.29	98.45
		2462	1.27	1.29	98.45
11AX20SISO	Ant1	2412	0.98	1.00	98.00
		2437	0.98	1.00	98.00
		2462	0.98	1.00	98.00

Test Graphs


11B_Ant1_2412

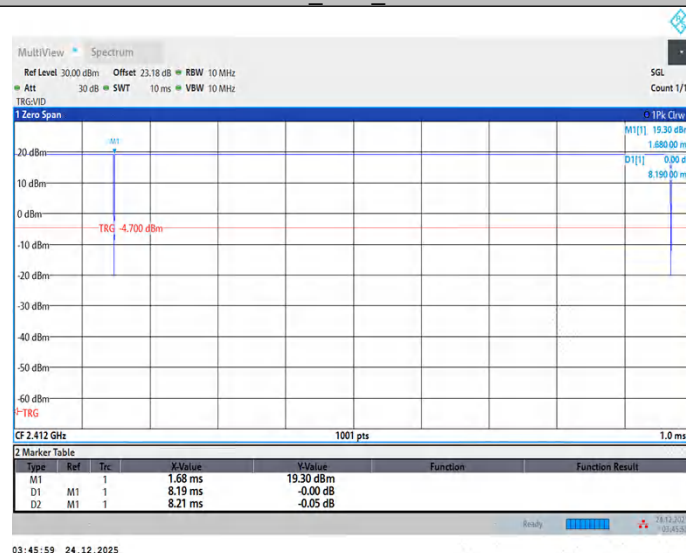


11B_Ant1_2437

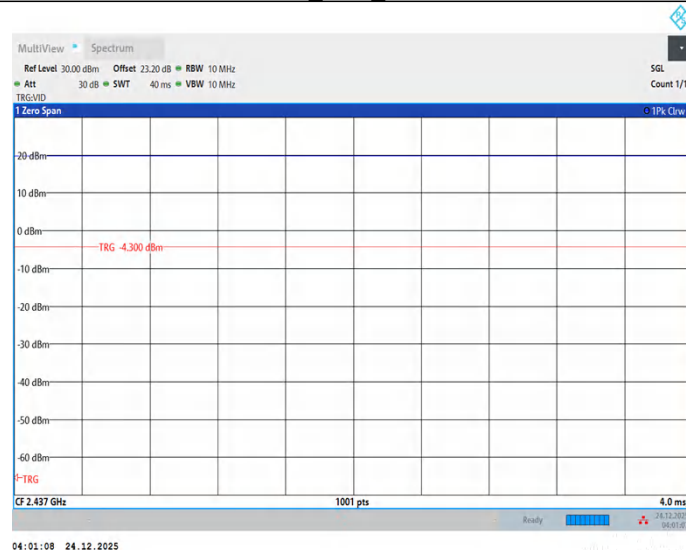


11B_Ant1_2462

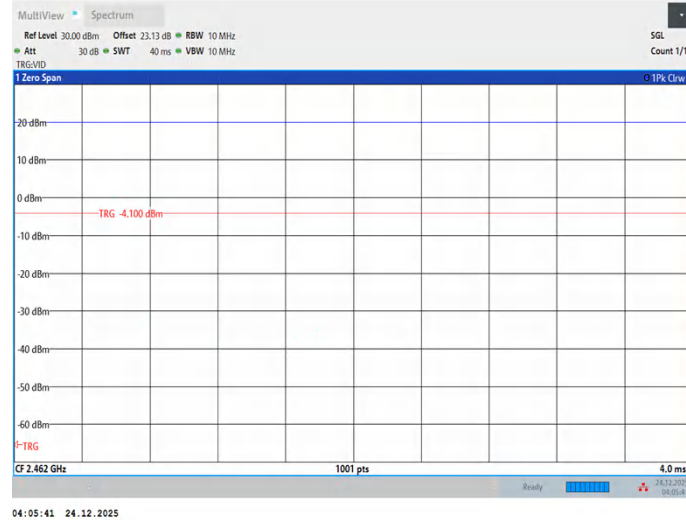


11G_Ant1_2412

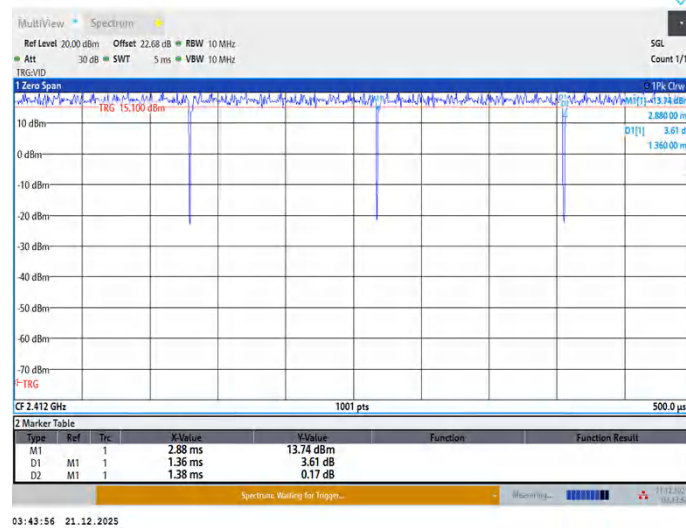


11G_Ant1_2437

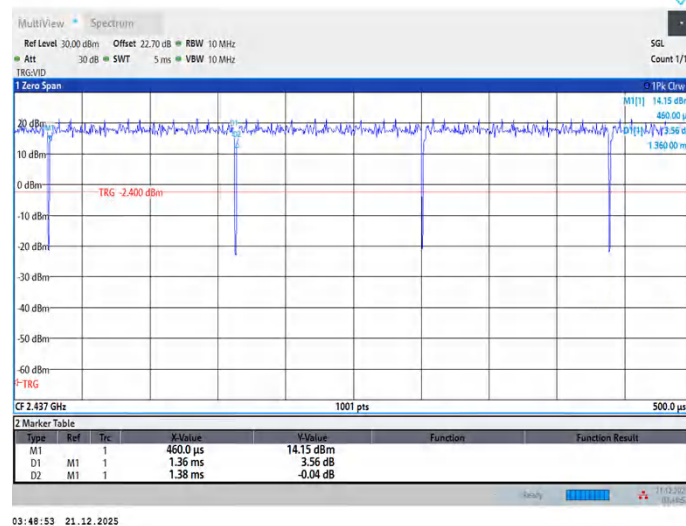


11G_Ant1_2462

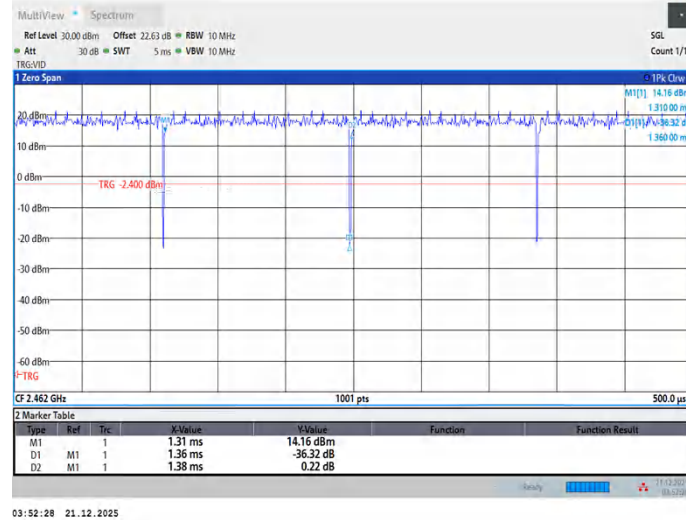


11N20SISO_Ant1_2412

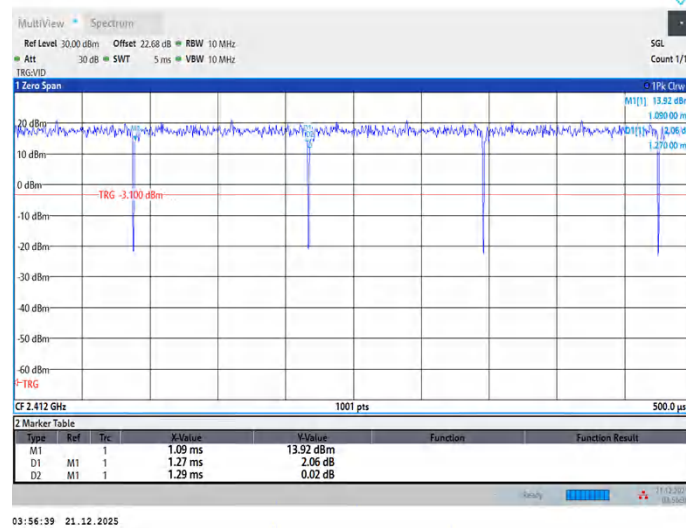


11N20SISO_Ant1_2437

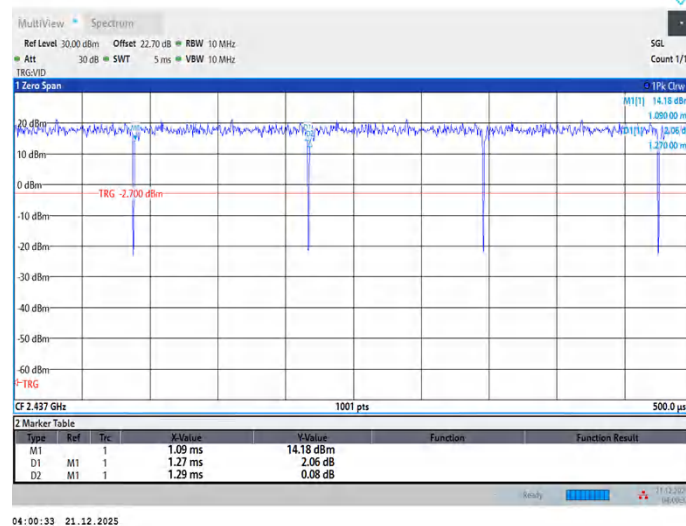


11N20SISO_Ant1_2462

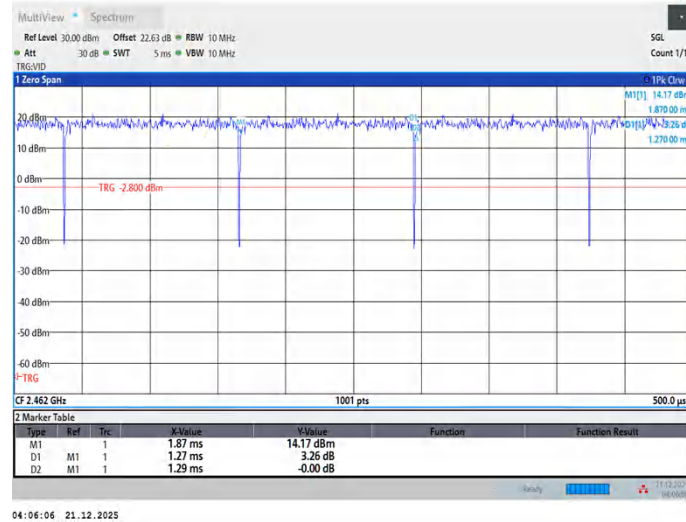


11AX20SISO_Ant1_2412

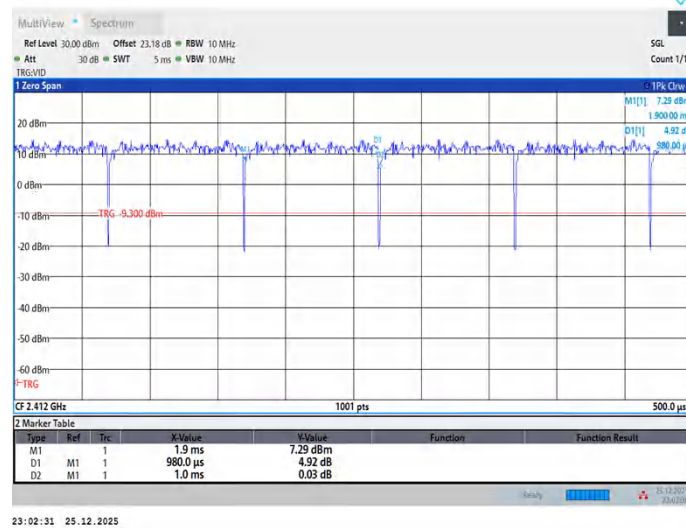

11AX20SISO_Ant1_2437

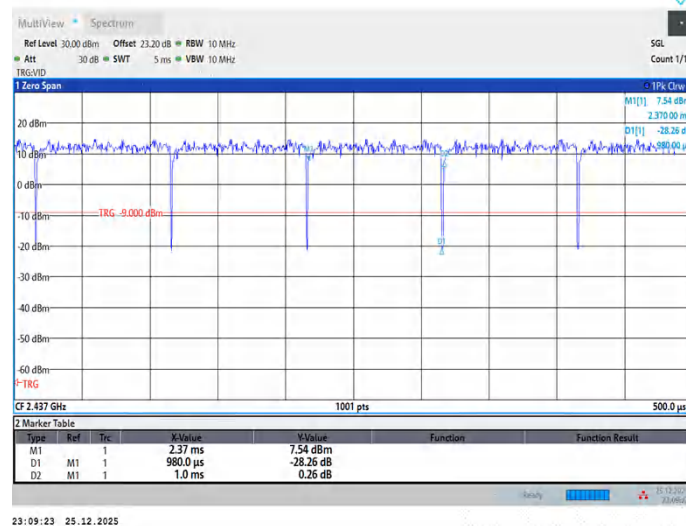

11AX20SISO_Ant1_2462

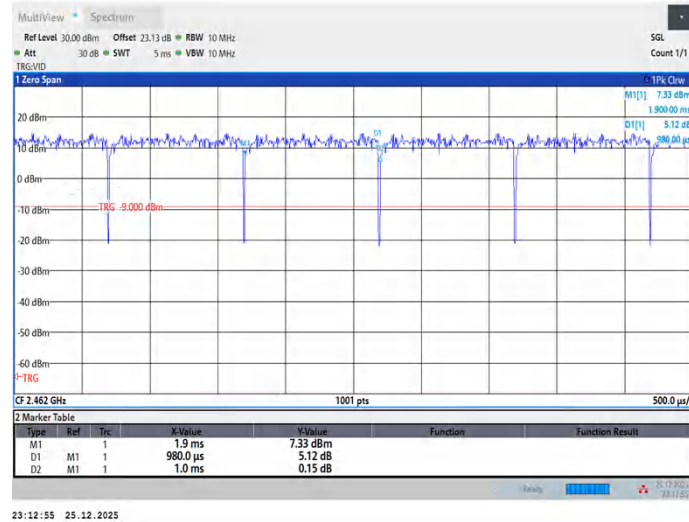


Appendix A.4: Test Results of Conducted Power Spectral Density

Test Result


Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-11.34	≤8.00	PASS
		2437	-10.93	≤8.00	PASS
		2462	-10.81	≤8.00	PASS
11G	Ant1	2412	-18.11	≤8.00	PASS
		2437	-18.04	≤8.00	PASS
		2462	-18.23	≤8.00	PASS
11N20SISO	Ant1	2412	-18.90	≤8.00	PASS
		2437	-18.60	≤8.00	PASS
		2462	-18.57	≤8.00	PASS
11AX20SISO	Ant1	2412	-25.48	≤8.00	PASS
		2437	-24.59	≤8.00	PASS
		2462	-25.33	≤8.00	PASS

Test Graphs


11B_Ant1_2412

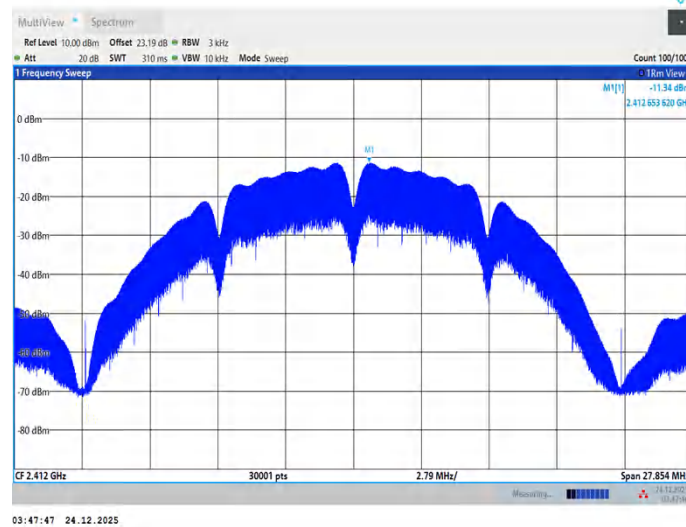


11B_Ant1_2437

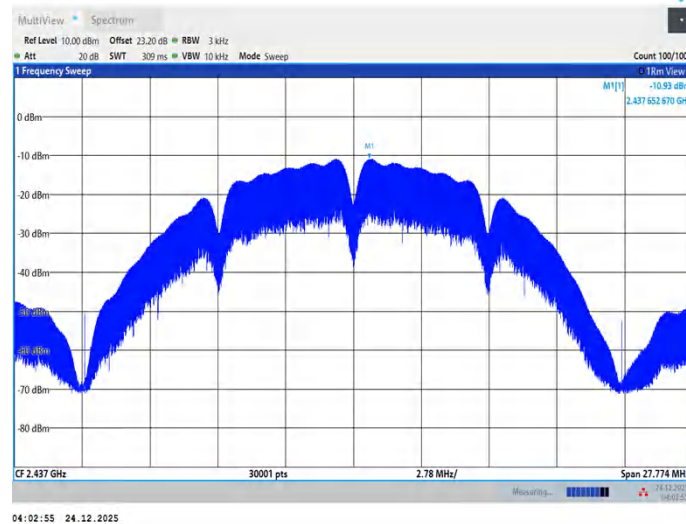


11B_Ant1_2462

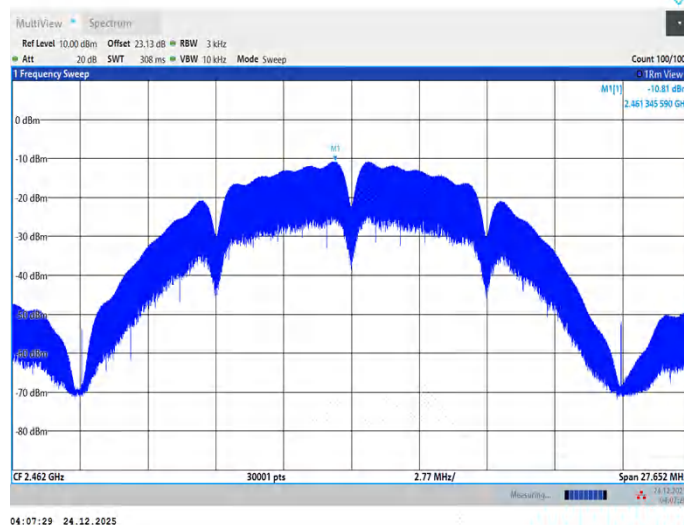


11G_Ant1_2412

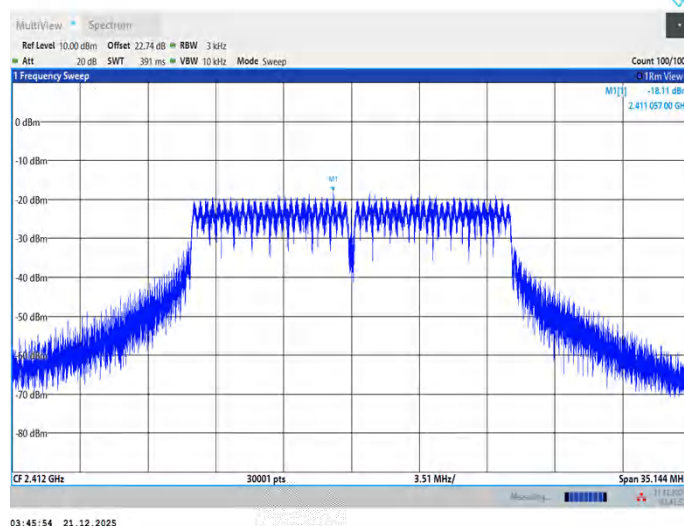


11G_Ant1_2437

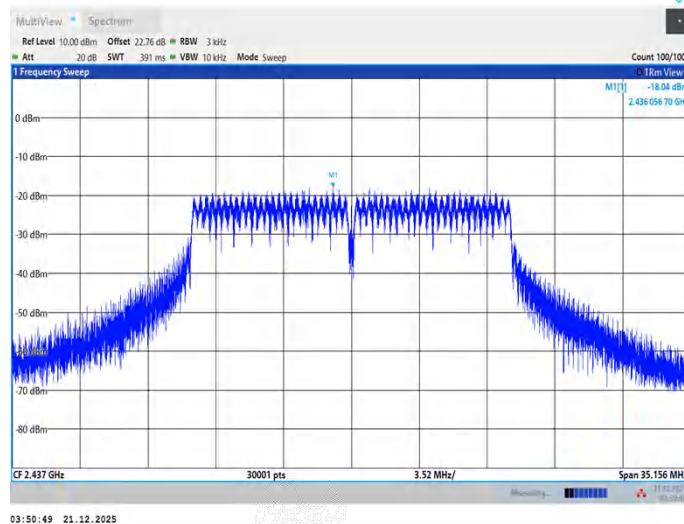


11G_Ant1_2462

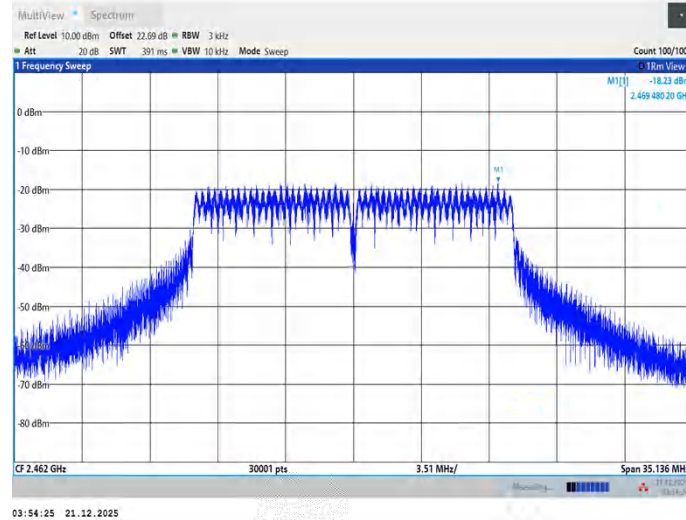


11N20SISO_Ant1_2412

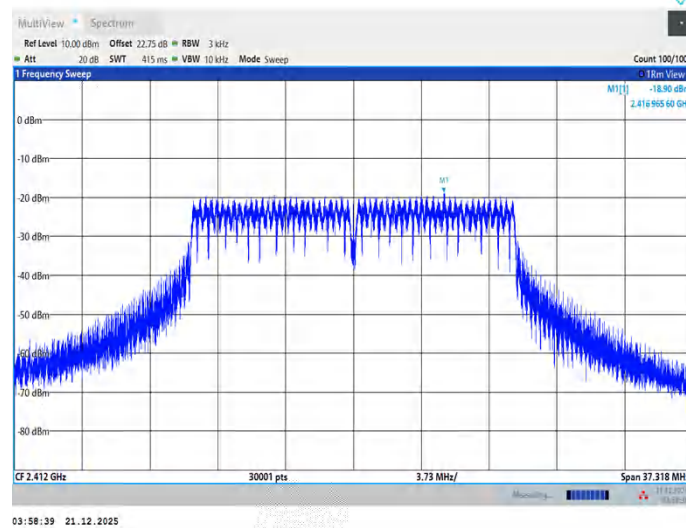


11N20SISO_Ant1_2437

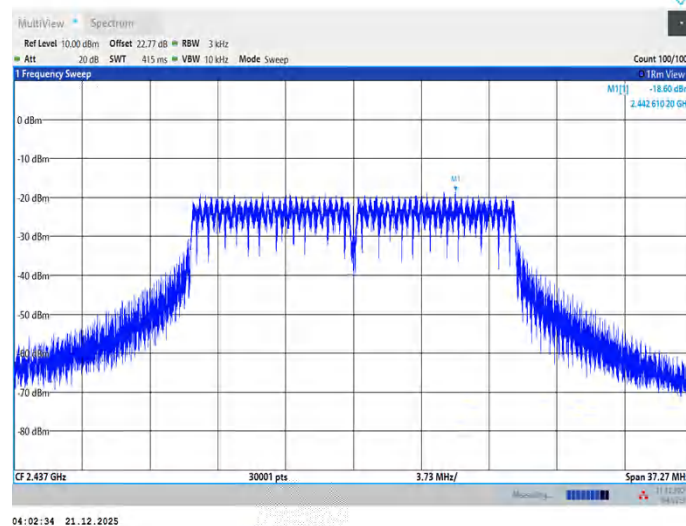


11N20SISO_Ant1_2462

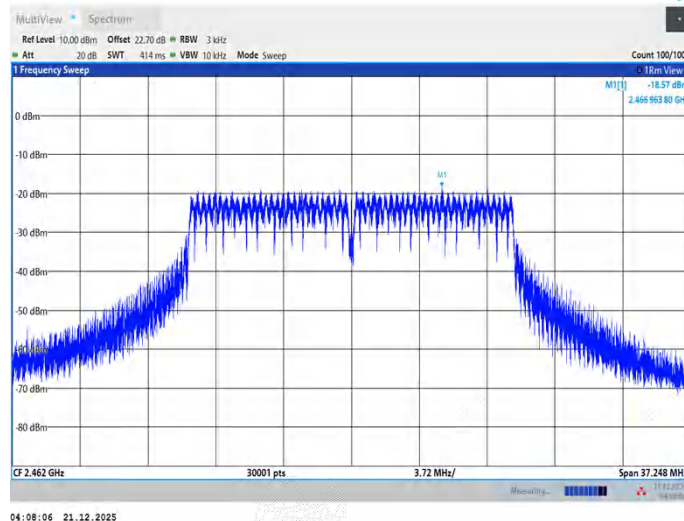


11AX20SISO_Ant1_2412

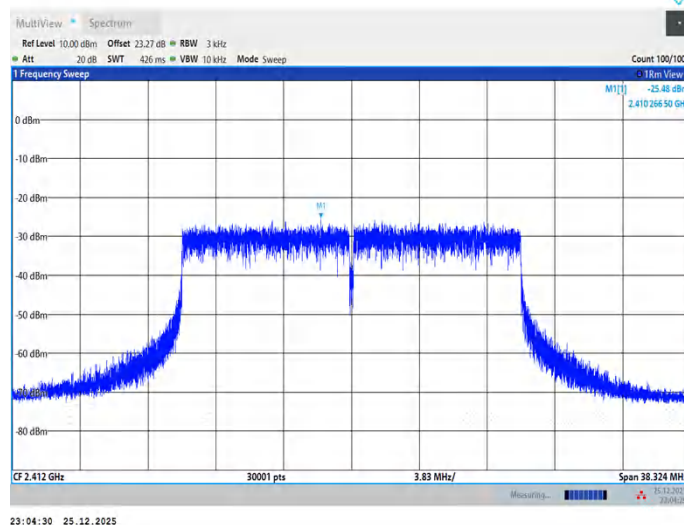

11AX20SISO_Ant1_2437

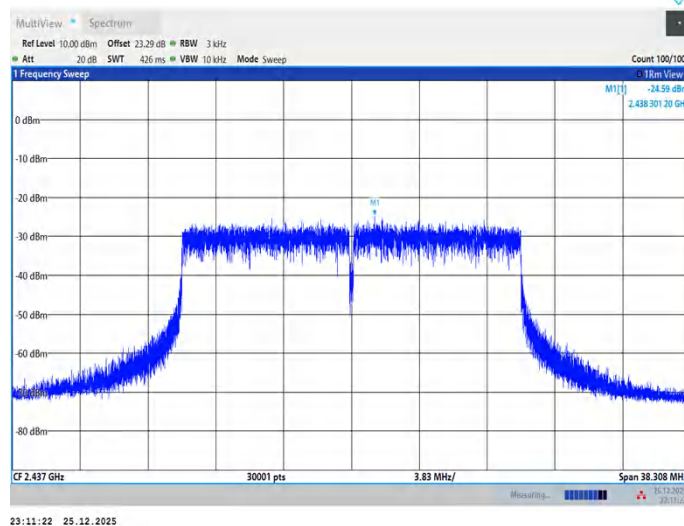

11AX20SISO_Ant1_2462

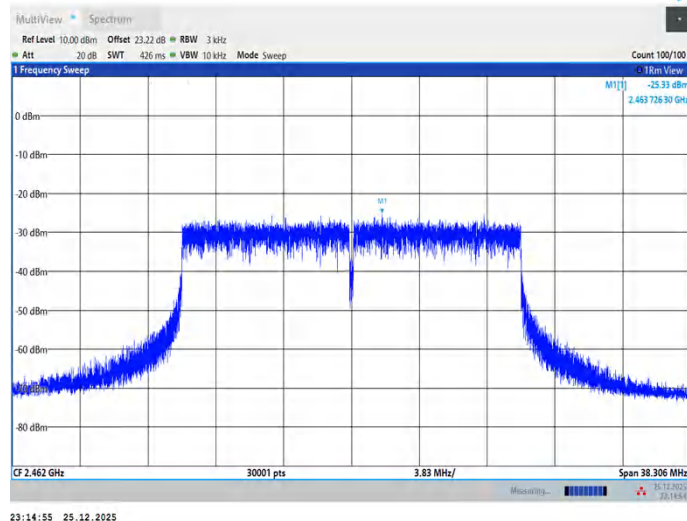


Appendix A.5: Test Results of Conducted Spurious Emissions

Test Result


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	/	/	/
	CH11	Pass		/	/

Test Graphs


11B_Ant1_2412_0~Reference

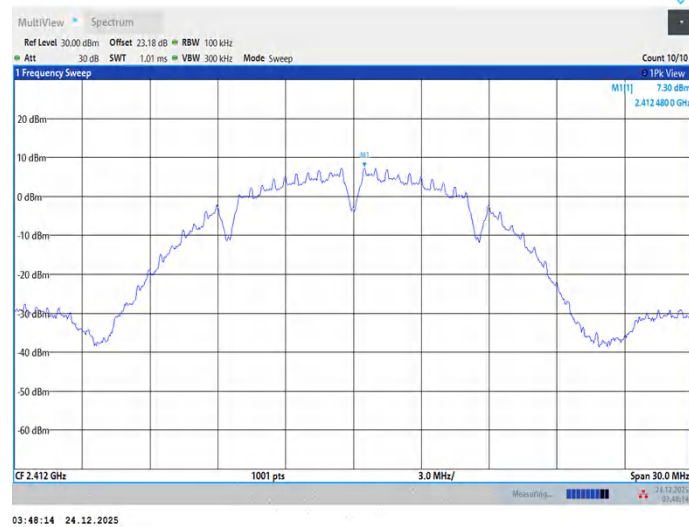


11B_Ant1_2412_30~1000

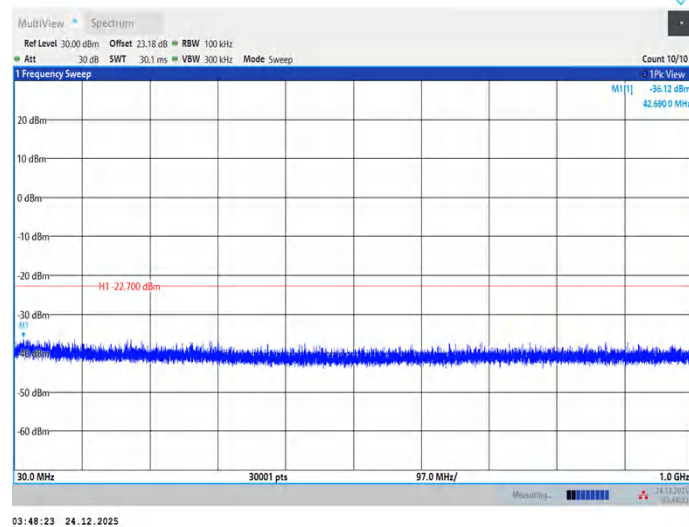


11B_Ant1_2412_1000~26500

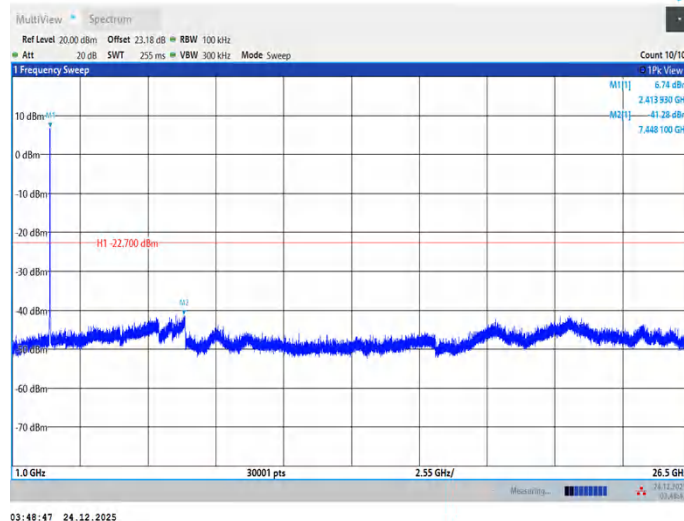


11B_Ant1_2437_0~Reference

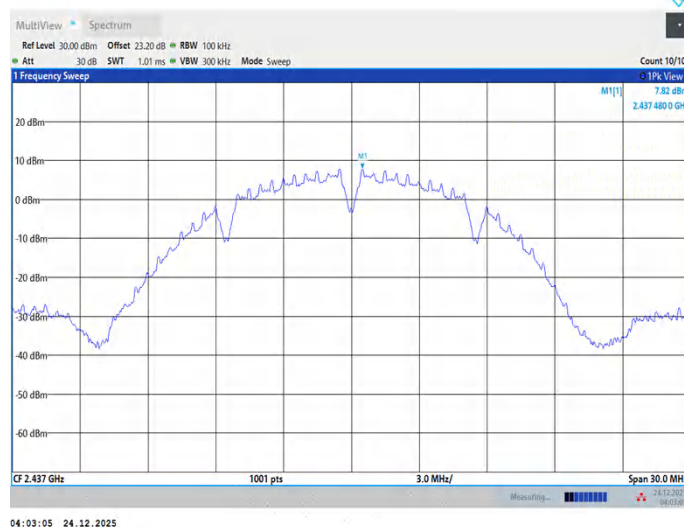


11B_Ant1_2437_30~1000

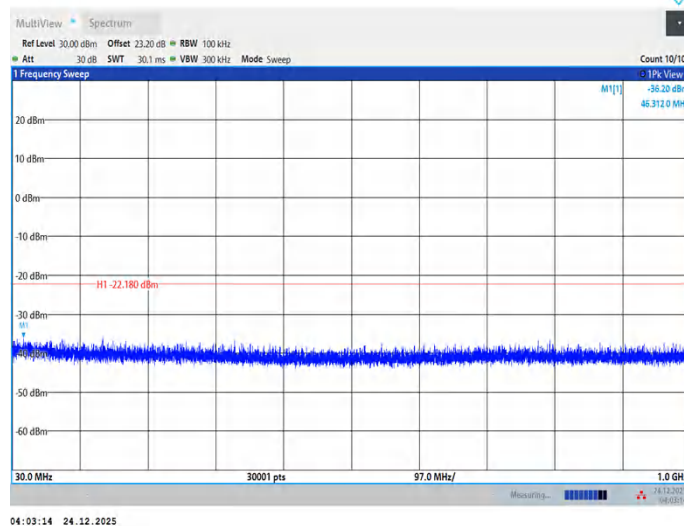


11B_Ant1_2437_1000~26500

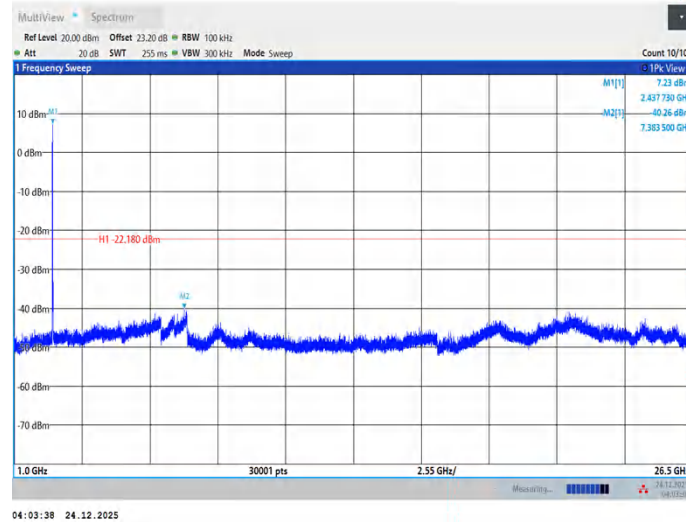


11B_Ant1_2462_0~Reference

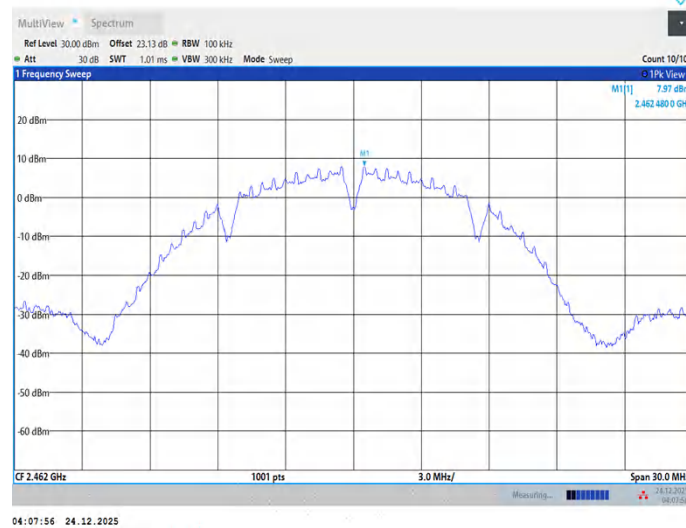


11B_Ant1_2462_30~1000

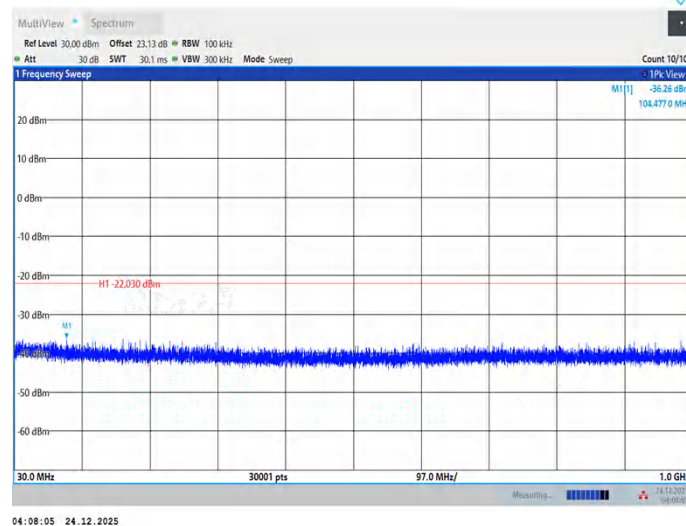


11B_Ant1_2462_1000~26500

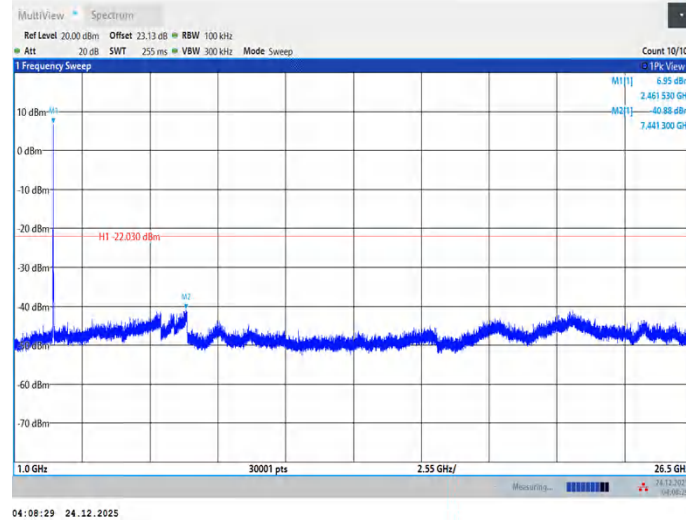


11G_Ant1_2412_0~Reference

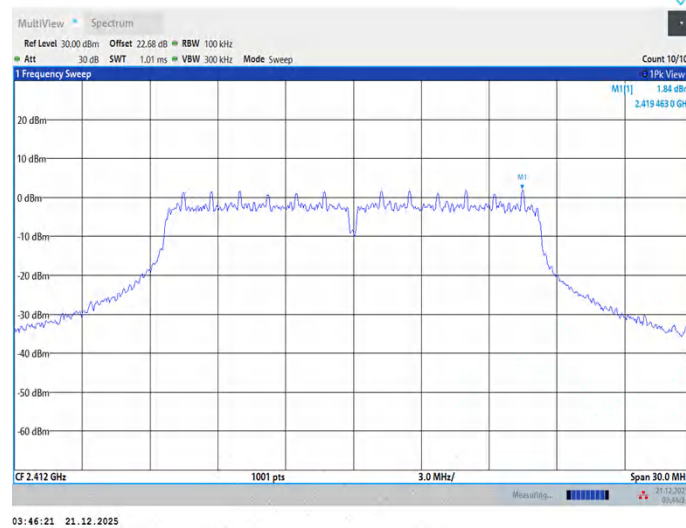


11G_Ant1_2412_30~1000

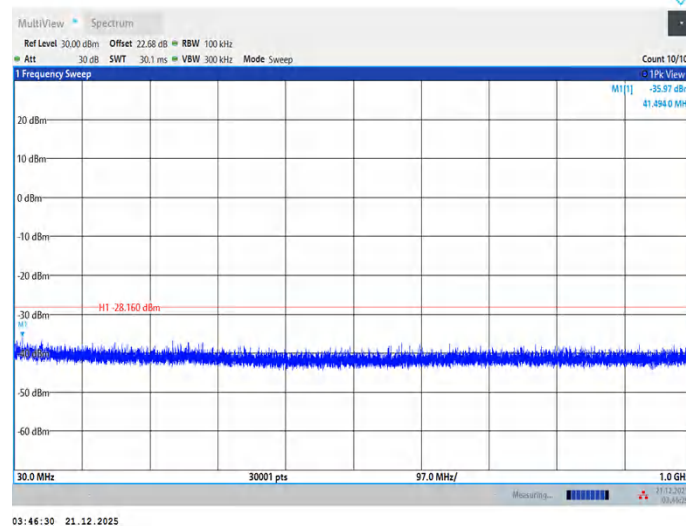


11G_Ant1_2412_1000~26500

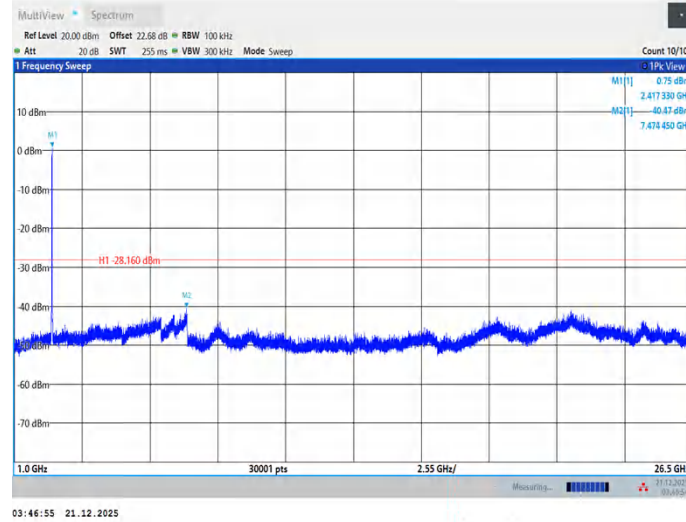


11G_Ant1_2437_0~Reference

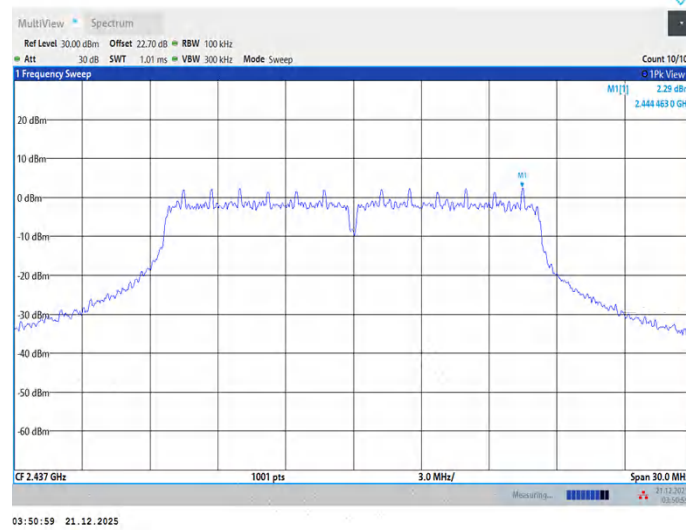


11G_Ant1_2437_30~1000

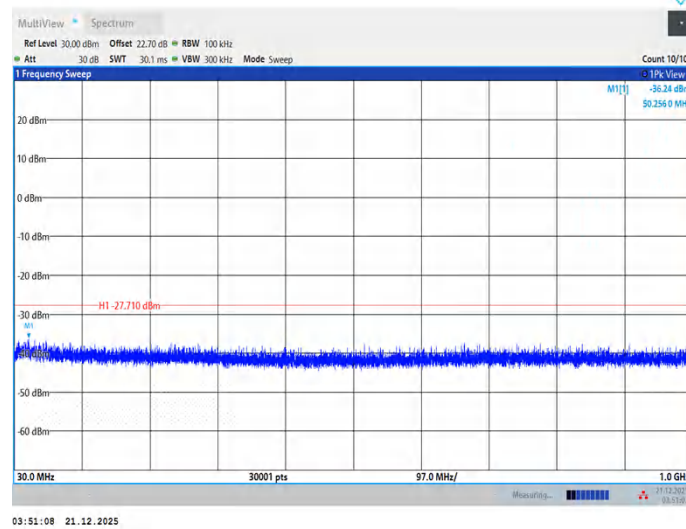


11G_Ant1_2437_1000~26500

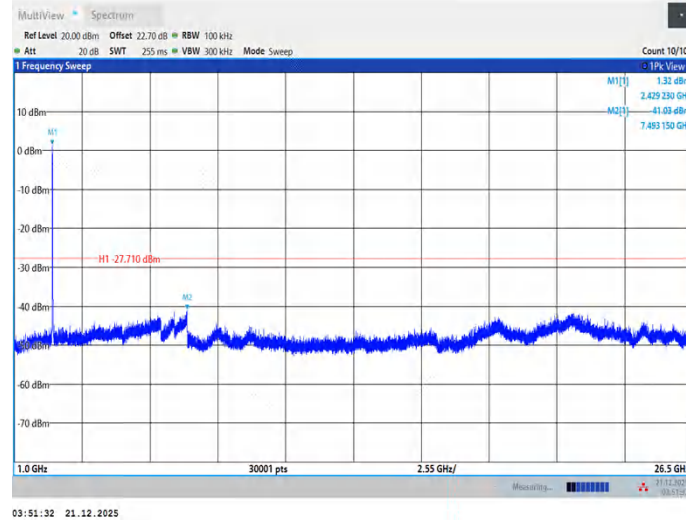


11G_Ant1_2462_0~Reference

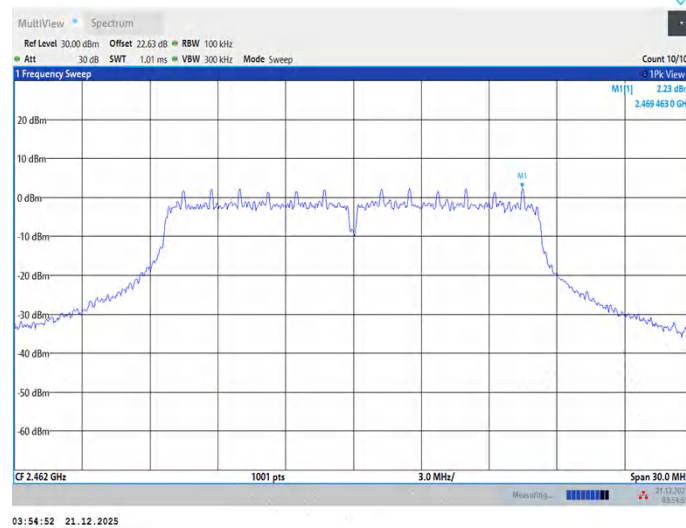


11G_Ant1_2462_30~1000

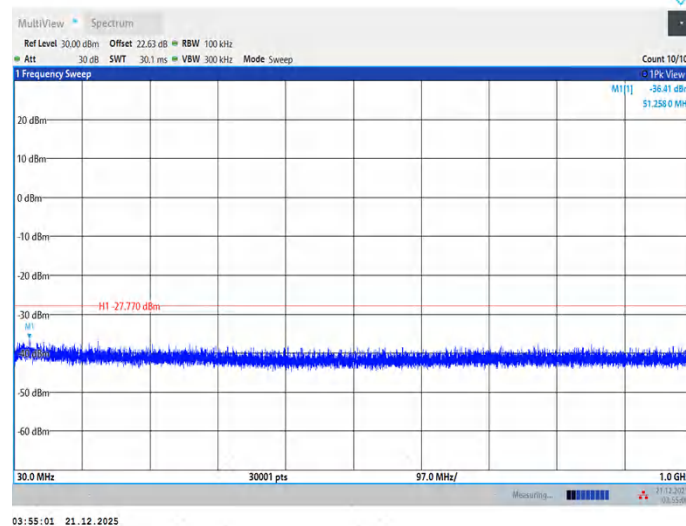


11G_Ant1_2462_1000~26500

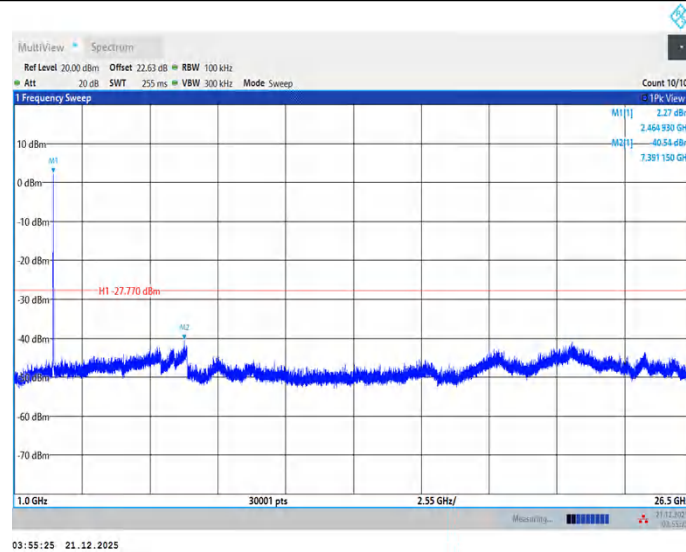


11N20SISO_Ant1_2412_0~Reference

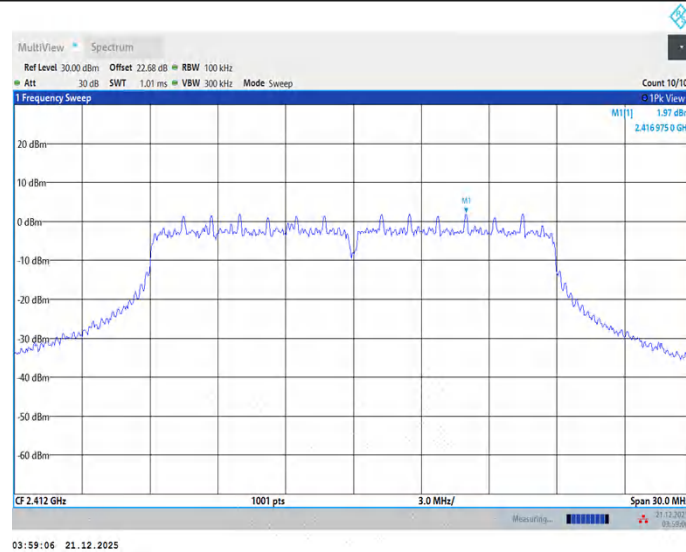


11N20SISO_Ant1_2412_30~1000

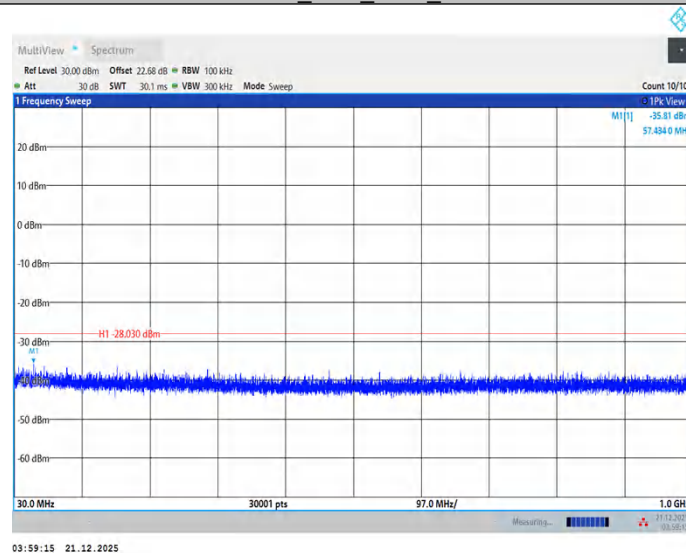


11N20SISO_Ant1_2412_1000~26500

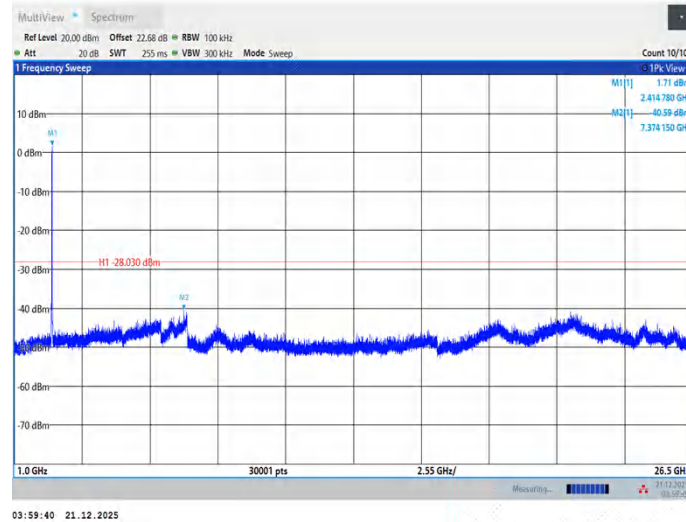


11N20SISO_Ant1_2437_0~Reference

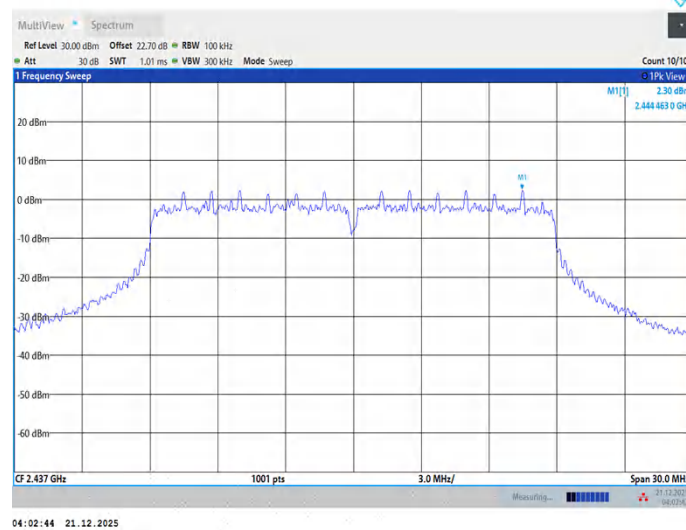


11N20SISO_Ant1_2437_30~1000

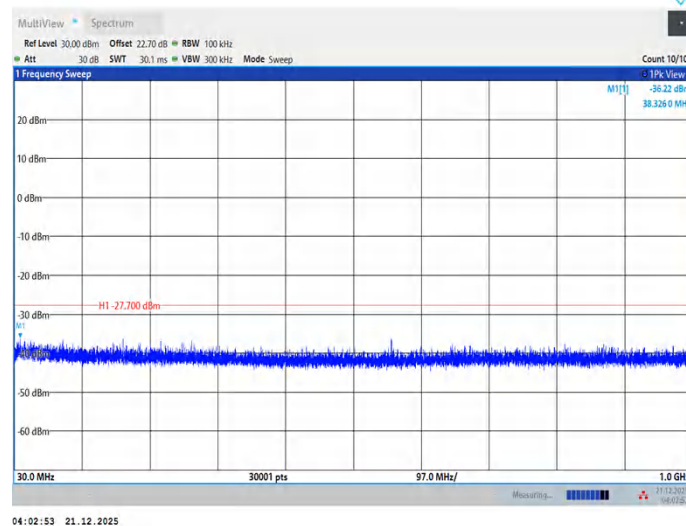


11N20SISO_Ant1_2437_1000~26500

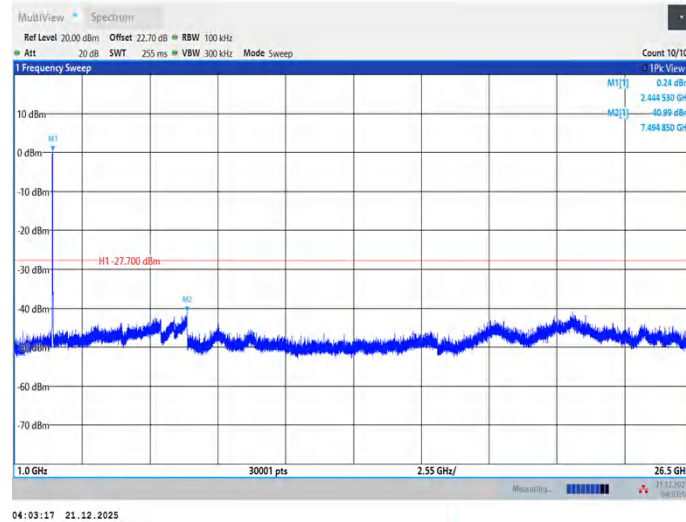


11N20SISO_Ant1_2462_0~Reference

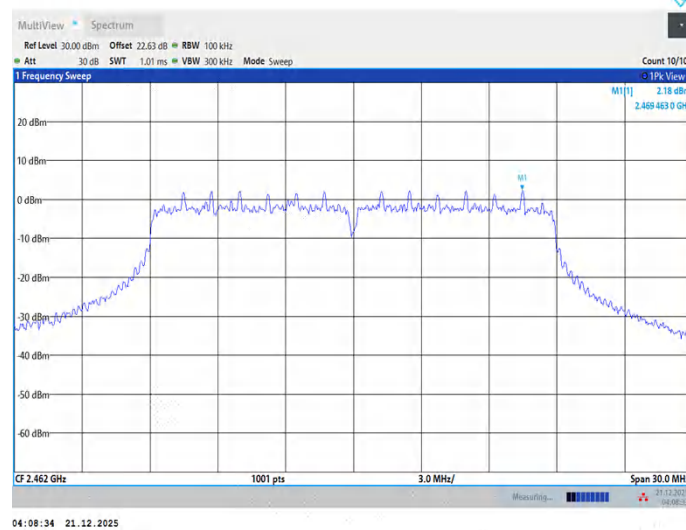


11N20SISO_Ant1_2462_30~1000

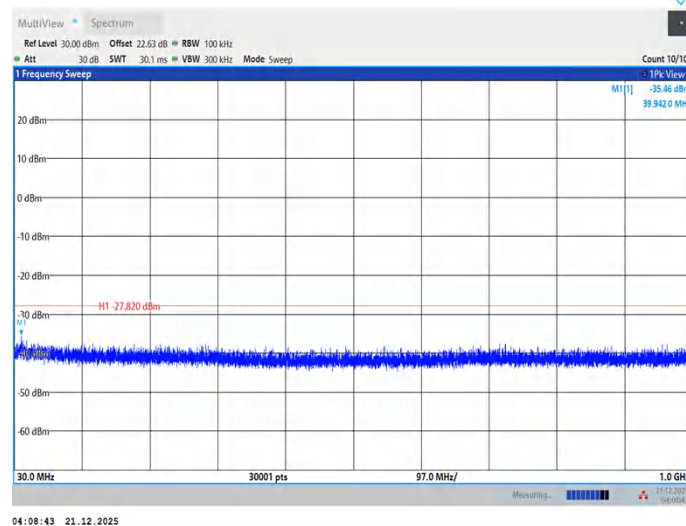


11N20SISO_Ant1_2462_1000~26500

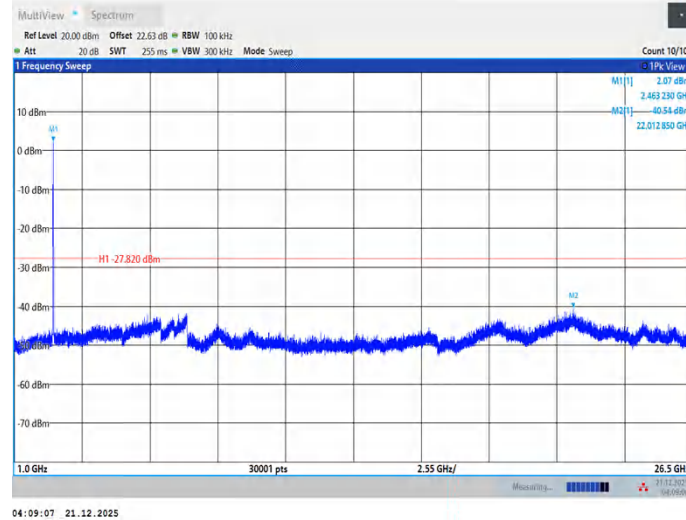


11AX20SISO_Ant1_2412_0~Reference

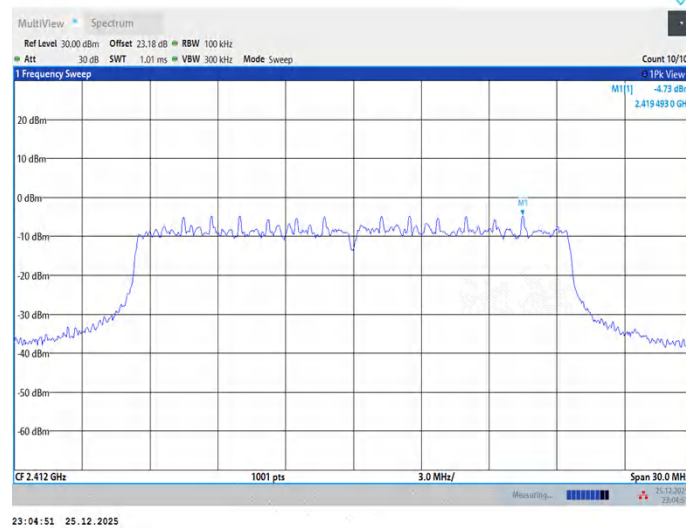


11AX20SISO_Ant1_2412_30~1000

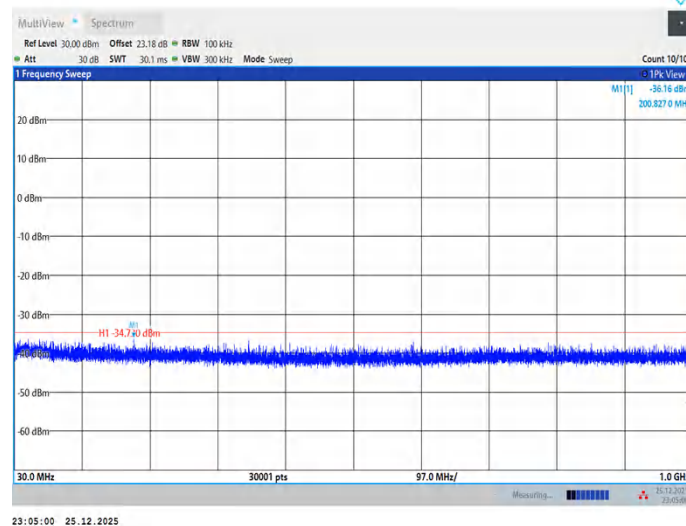


11AX20SISO_Ant1_2412_1000~26500

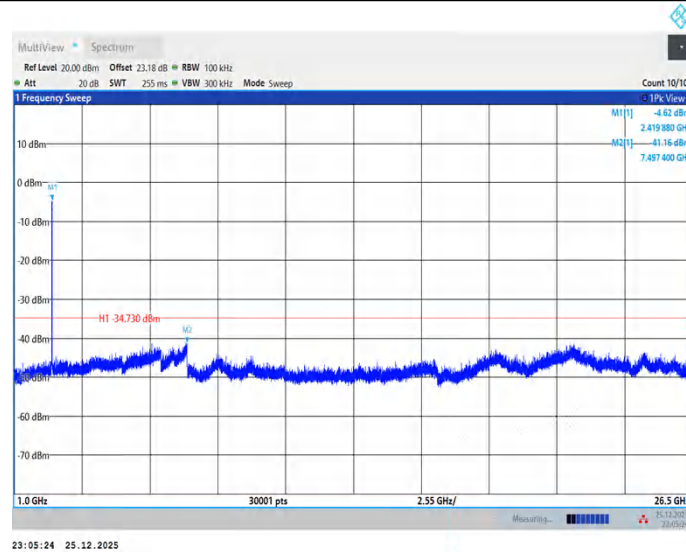


11AX20SISO_Ant1_2437_0~Reference

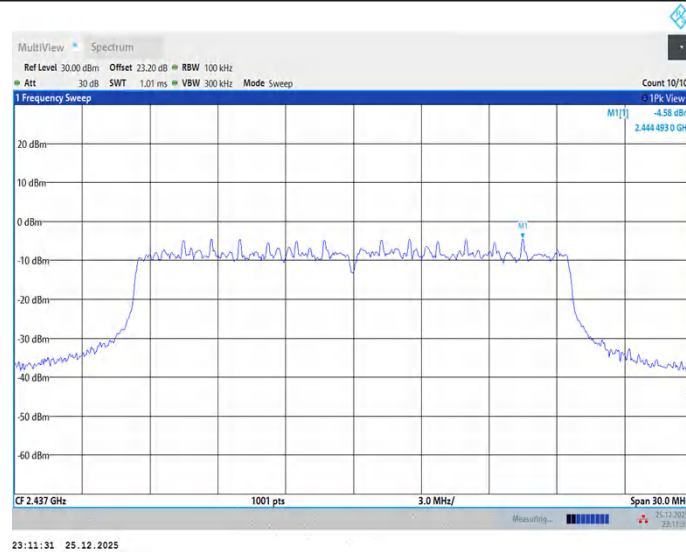


11AX20SISO_Ant1_2437_30~1000

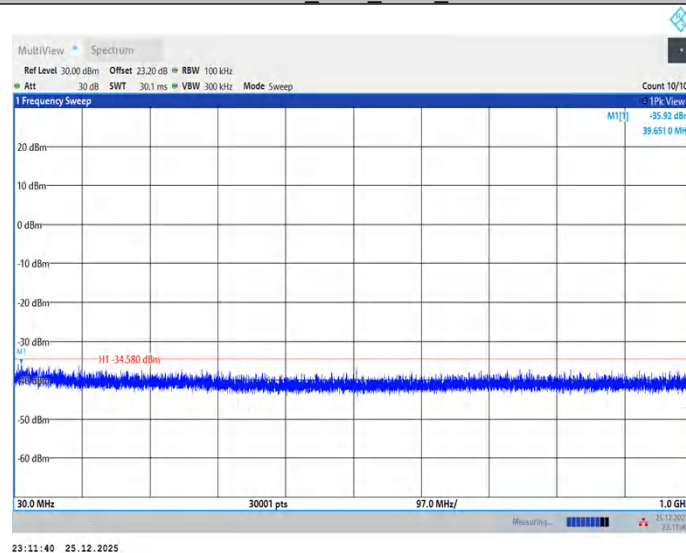


11AX20SISO_Ant1_2437_1000~26500

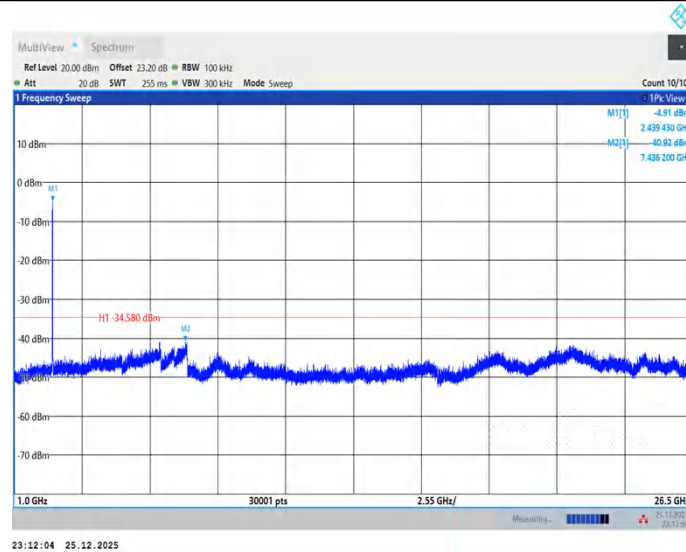


11AX20SISO_Ant1_2462_0~Reference

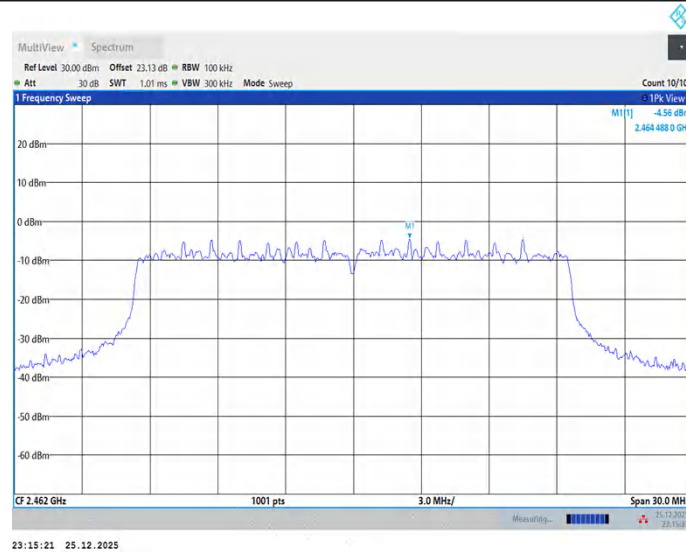

11AX20SISO_Ant1_2462_30~1000

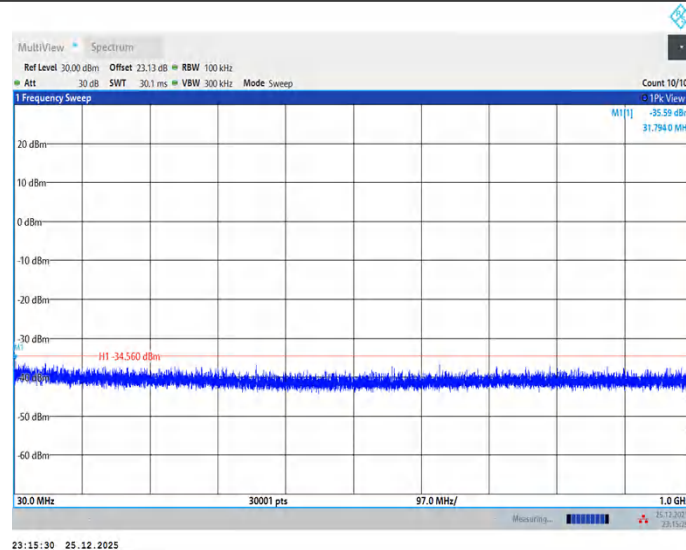

11AX20SISO_Ant1_2462_1000~26500

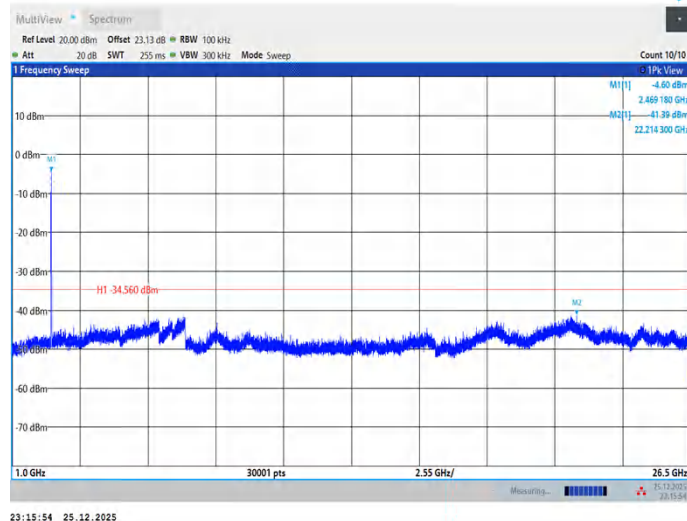

Appendix A.6: Test Results of Band Edge Measurements

Test Result

EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	/	/	/
	CH11	Pass		/	/


Test Graphs

11B_Ant1_Low_2412




03:48:04 24.12.2025

11B_Ant1_High_2462

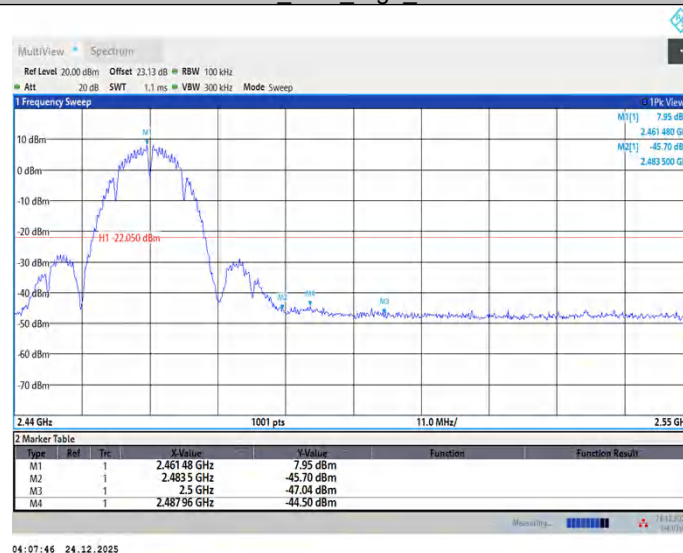


04:07:46 24.12.2025


11G_Ant1_Low_2412

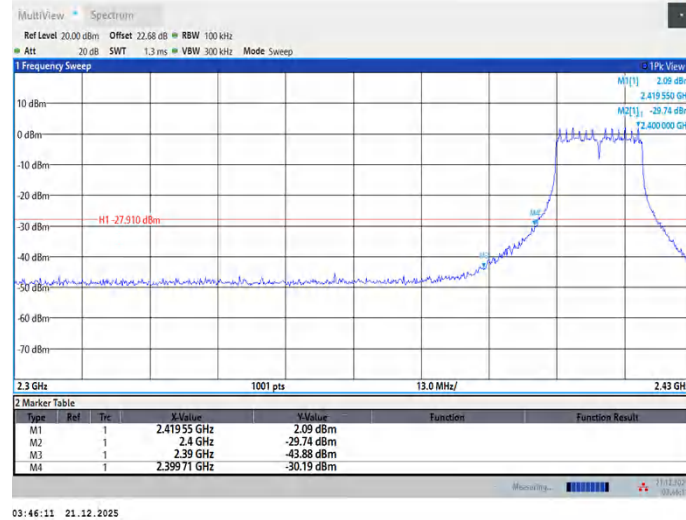


11G_Ant1_High_2462

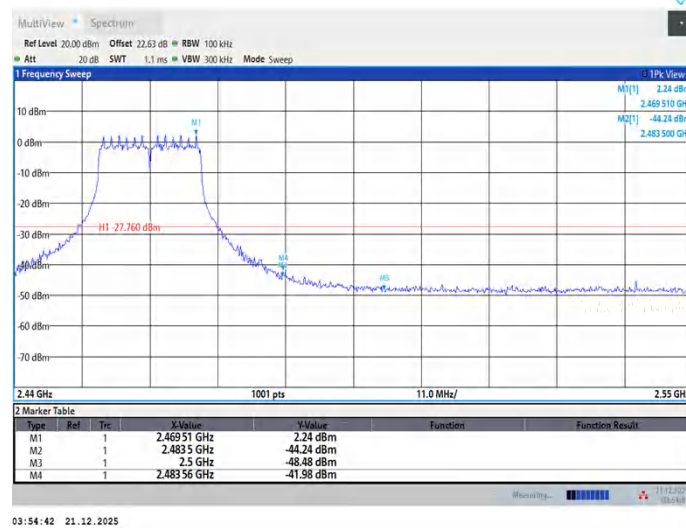


11N20SISO_Ant1_Low_2412

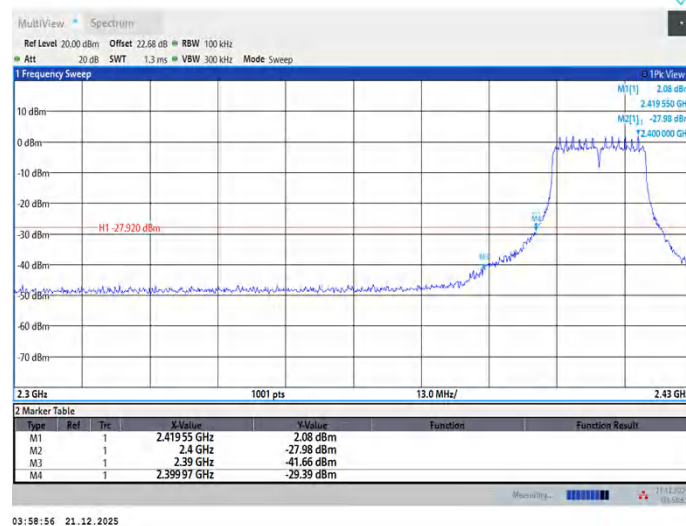


11N20SISO_Ant1_High_2462

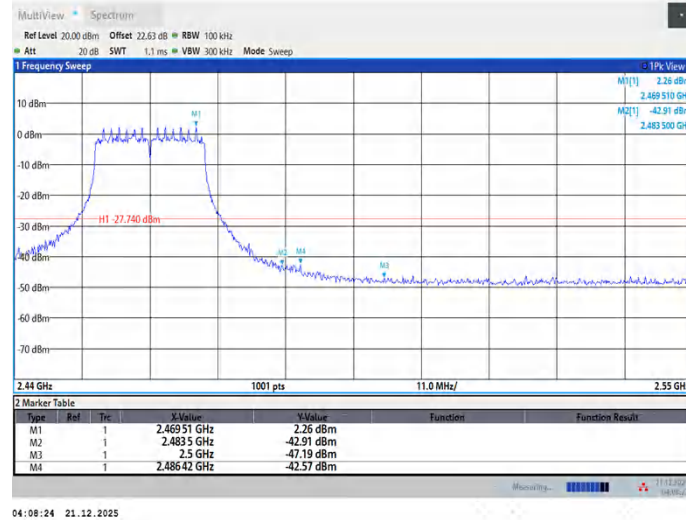

11AX20SISO_Ant1_Low_2412

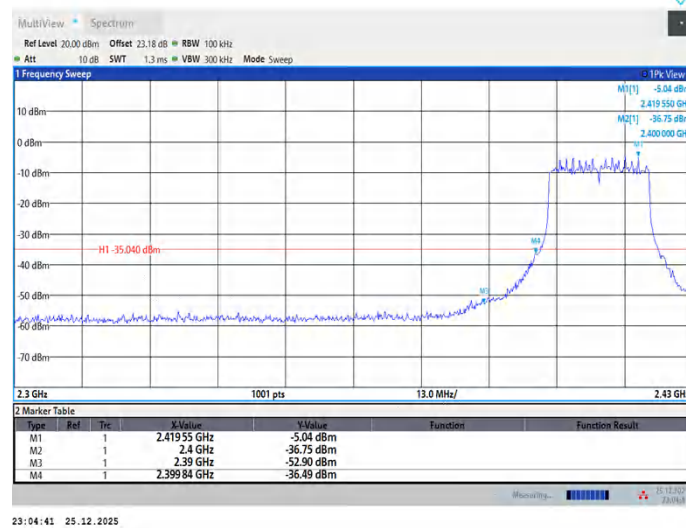

11AX20SISO_Ant1_High_2462

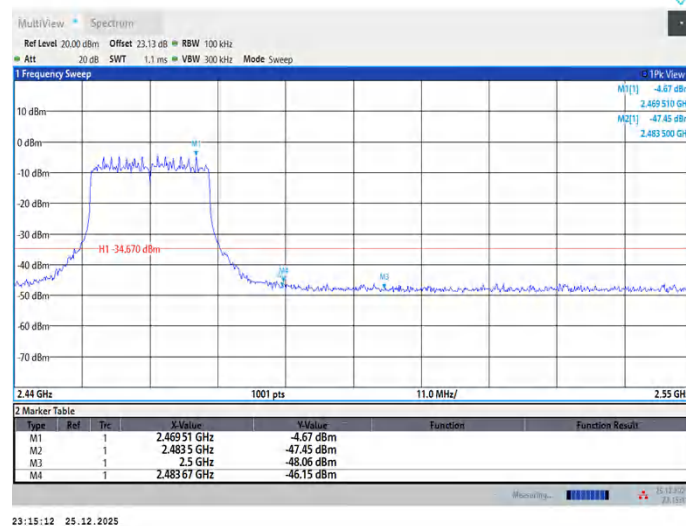

Appendix A.7: Test Results of Radiated Spurious Emissions

Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

Test Date: 2025-12-24


Tested By: Li Xiongbín

Test Mode: 2.4G WiFi TX Mode

Power Supply: AC 120V/60Hz

Condition: Temp:22.1°C;Humi:51.4%

Test Site: DDT 3# Chamber

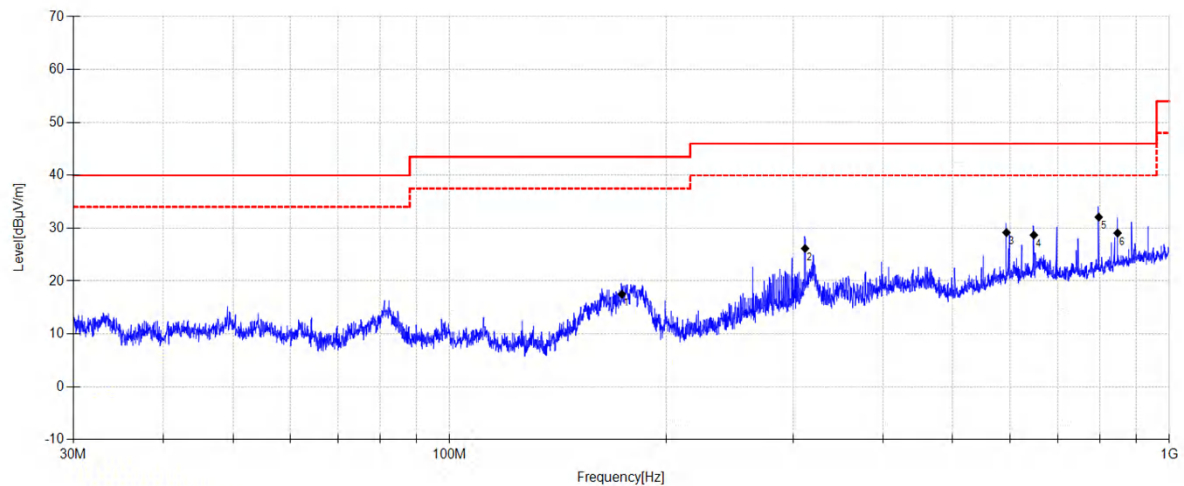


Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	173.509	35.49	9.65	4.73	17.50	43.50	26.00	QP	Horizontal
2	311.815	39.62	13.61	5.33	26.15	46.00	19.85	QP	Horizontal
3	593.944	36.51	19.10	6.38	29.16	46.00	16.84	QP	Horizontal
4	648.350	35.91	19.24	6.51	28.69	46.00	17.31	QP	Horizontal
5	797.896	37.53	20.13	6.93	32.08	46.00	13.92	QP	Horizontal
6	847.490	32.77	21.50	7.02	29.07	46.00	16.93	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date: 2025-12-24 **Tested By:** Li Xiongbín
Test Mode: 2.4G WiFi TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

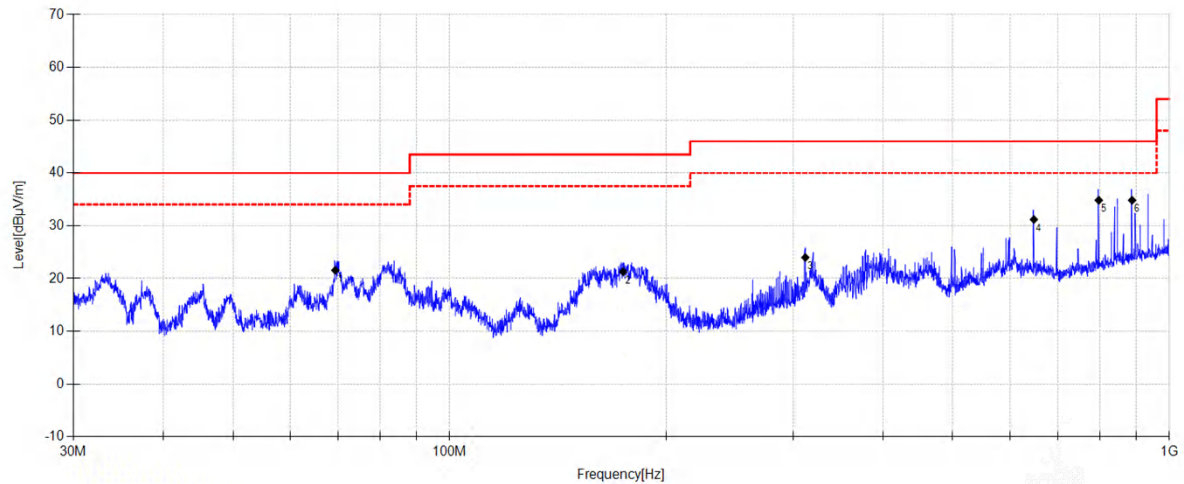

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	69.345	39.47	10.22	4.16	21.55	40.00	18.45	QP	Vertical
2	174.240	39.57	9.36	4.73	21.29	43.50	22.21	QP	Vertical
3	312.033	37.44	13.62	5.33	23.98	46.00	22.02	QP	Vertical
4	648.350	38.4	19.24	6.51	31.18	46.00	14.82	QP	Vertical
5	797.896	40.28	20.13	6.93	34.83	46.00	11.17	QP	Vertical
6	887.631	38.15	21.55	7.09	34.82	46.00	11.18	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

1GHz - 18GHz

Note: The highest waveform in the figure is Wi-Fi Fundamental.

Test Date: 2025-12-17


Tested By: Li Xiongbín

Test Mode: 11N20 2412MHz TX Mode

Power Supply: AC 120V/60Hz

Condition: Temp:22.1°C;Humi:51.4%

Test Site: DDT 3# Chamber

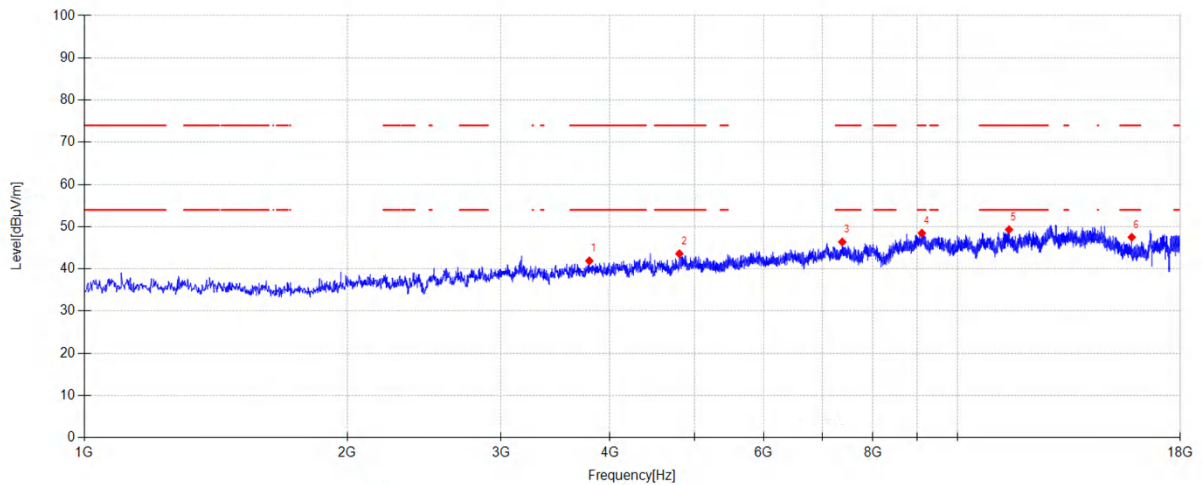


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3788.000	46.35	30.64	4.54	-39.62	41.91	74.00	32.09	PK	Horizontal
2	4802.900	46.12	32.15	5.12	-39.78	43.61	74.00	30.39	PK	Horizontal
3	7380.100	43.68	36.82	5.75	-39.86	46.39	74.00	27.61	PK	Horizontal
4	9103.900	42.31	38.08	6.79	-38.71	48.47	74.00	25.53	PK	Horizontal
5	11456.700	42.10	39.23	7.59	-39.60	49.32	74.00	24.68	PK	Horizontal
6	15835.900	40.33	38.06	8.55	-39.42	47.52	74.00	26.48	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: 11N20 2412MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

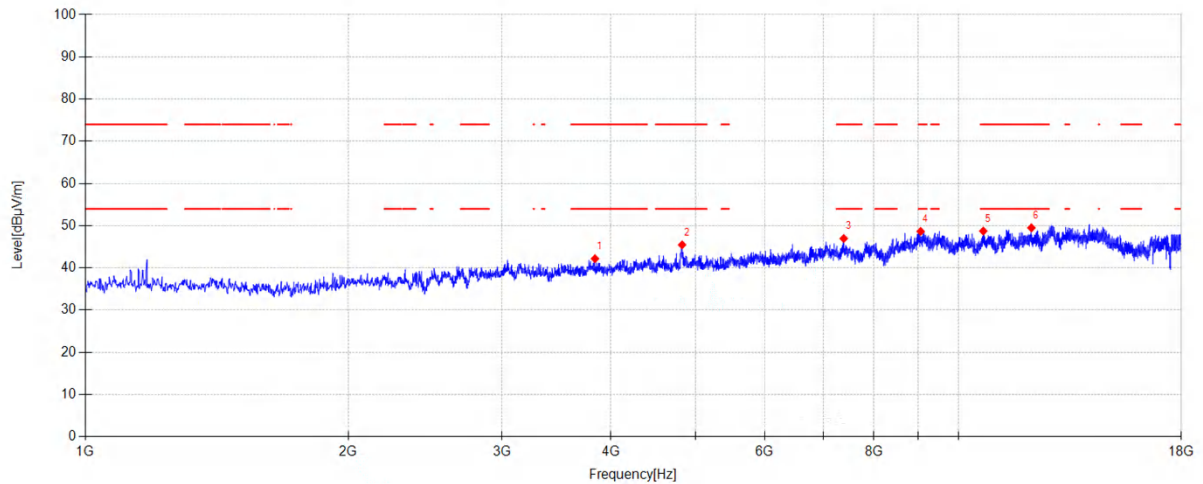


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3833.900	46.78	30.49	4.55	-39.63	42.19	74.00	31.81	PK	Vertical
2	4825.000	47.62	32.50	5.13	-39.78	45.47	74.00	28.53	PK	Vertical
3	7388.600	44.30	36.77	5.76	-39.86	46.97	74.00	27.03	PK	Vertical
4	9049.500	41.62	38.90	6.79	-38.65	48.66	74.00	25.34	PK	Vertical
5	10676.400	41.77	39.43	7.17	-39.63	48.74	74.00	25.26	PK	Vertical
6	12121.400	41.74	39.44	7.81	-39.50	49.49	74.00	24.51	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: 11N20 2437MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

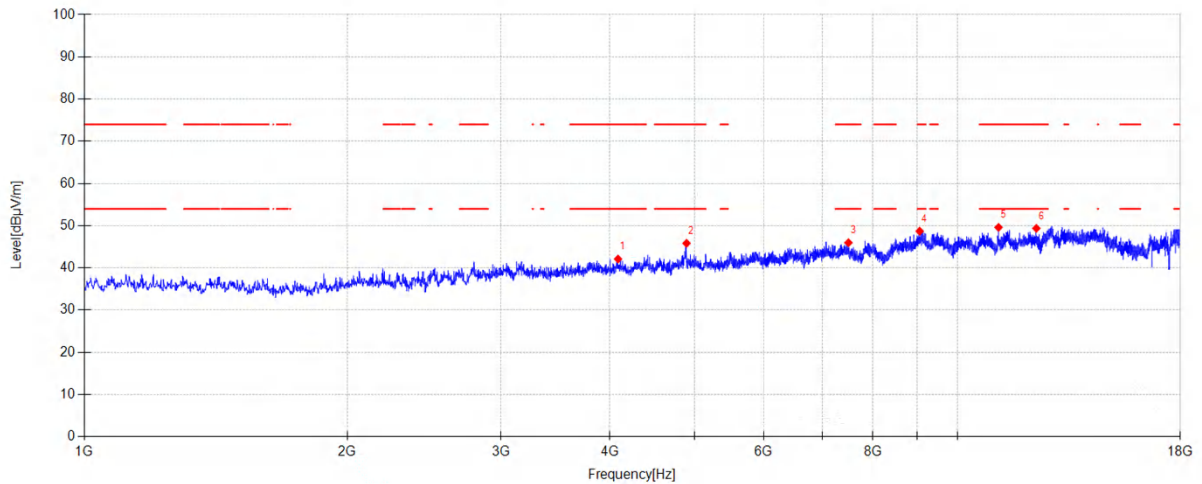


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4085.500	46.07	31.13	4.63	-39.71	42.12	74.00	31.88	PK	Horizontal
2	4894.700	47.37	33.08	5.18	-39.79	45.84	74.00	28.16	PK	Horizontal
3	7500.800	43.13	36.89	5.80	-39.85	45.97	74.00	28.03	PK	Horizontal
4	9049.500	41.67	38.90	6.79	-38.65	48.71	74.00	25.29	PK	Horizontal
5	11143.900	42.87	38.86	7.47	-39.60	49.60	74.00	24.40	PK	Horizontal
6	12311.800	41.56	39.36	7.81	-39.35	49.38	74.00	24.62	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: 11N20 2437MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

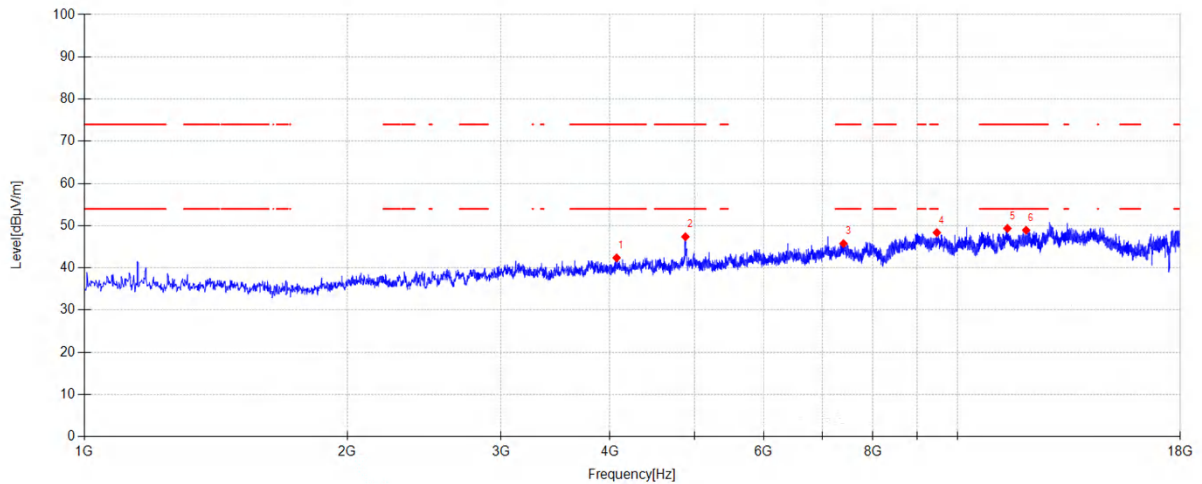


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4070.200	46.33	31.16	4.62	-39.71	42.40	74.00	31.60	PK	Vertical
2	4879.400	48.99	33.02	5.17	-39.79	47.39	74.00	26.61	PK	Vertical
3	7403.900	43.18	36.69	5.76	-39.86	45.77	74.00	28.23	PK	Vertical
4	9471.100	42.24	38.50	6.74	-39.12	48.36	74.00	25.64	PK	Vertical
5	11409.100	41.69	39.71	7.57	-39.60	49.37	74.00	24.63	PK	Vertical
6	11985.400	41.81	38.93	7.80	-39.60	48.94	74.00	25.06	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: 11N20 2462MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

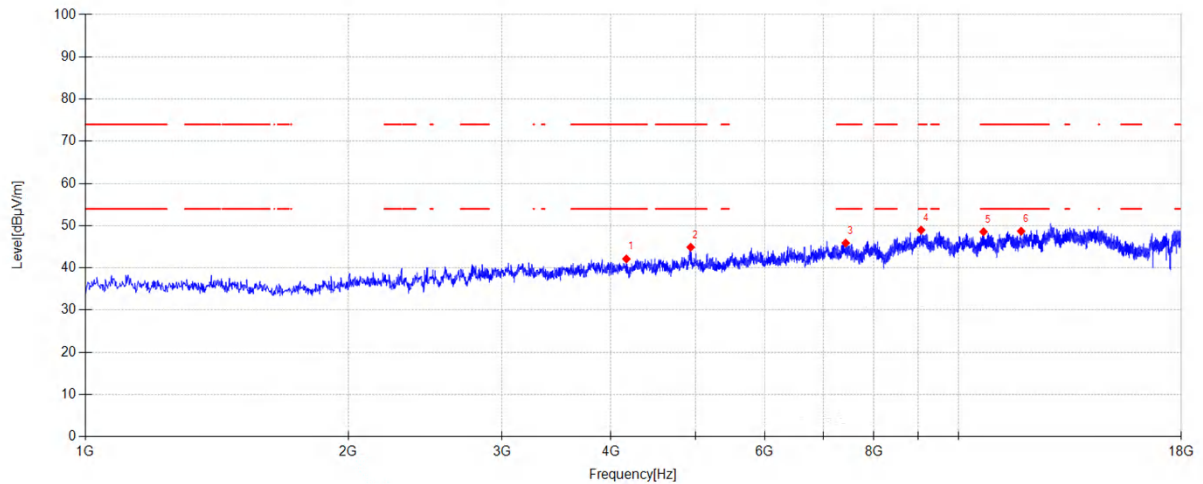


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4165.400	45.83	31.35	4.68	-39.72	42.14	74.00	31.86	PK	Horizontal
2	4935.500	46.38	33.10	5.21	-39.79	44.90	74.00	29.10	PK	Horizontal
3	7427.700	43.34	36.64	5.77	-39.86	45.89	74.00	28.11	PK	Horizontal
4	9061.400	42.16	38.69	6.79	-38.67	48.97	74.00	25.03	PK	Horizontal
5	10683.200	41.57	39.45	7.18	-39.63	48.57	74.00	25.43	PK	Horizontal
6	11798.400	41.97	38.60	7.73	-39.60	48.70	74.00	25.30	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-17 **Tested By:** Li Xiongbin
Test Mode: 11N20 2462MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

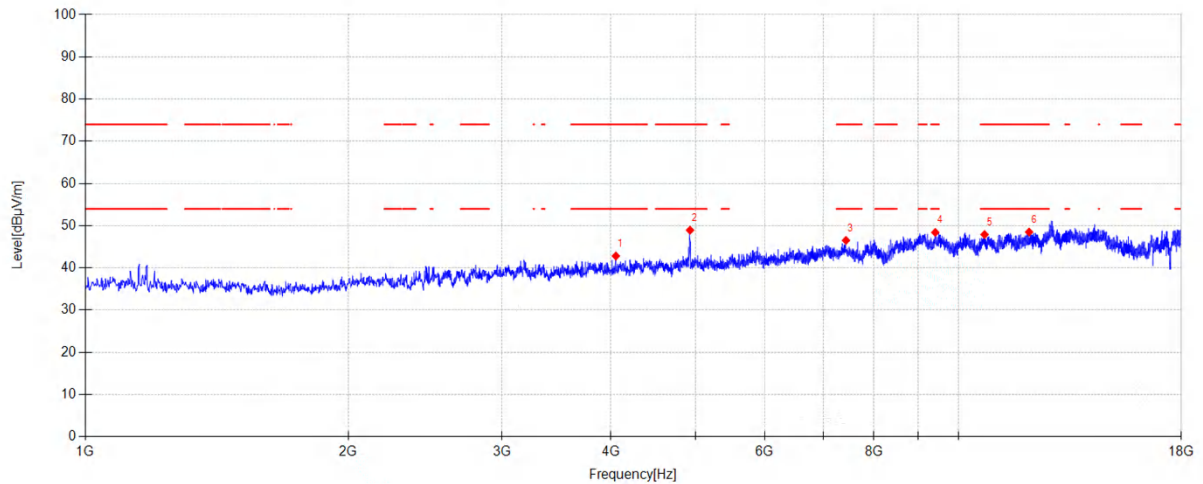

Suspected Data List


N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4051.500	46.73	31.20	4.61	-39.71	42.83	74.00	31.17	PK	Vertical
2	4927.000	50.44	33.10	5.20	-39.79	48.95	74.00	25.05	PK	Vertical
3	7432.800	43.99	36.63	5.77	-39.86	46.53	74.00	27.47	PK	Vertical
4	9406.500	42.08	38.64	6.75	-39.05	48.42	74.00	25.58	PK	Vertical
5	10713.800	40.91	39.43	7.20	-39.63	47.91	74.00	26.09	PK	Vertical
6	12048.300	41.01	39.24	7.81	-39.56	48.50	74.00	25.50	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Appendix A.8: Test Results of Radiated Emissions in Restricted Bands

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11B 2412MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

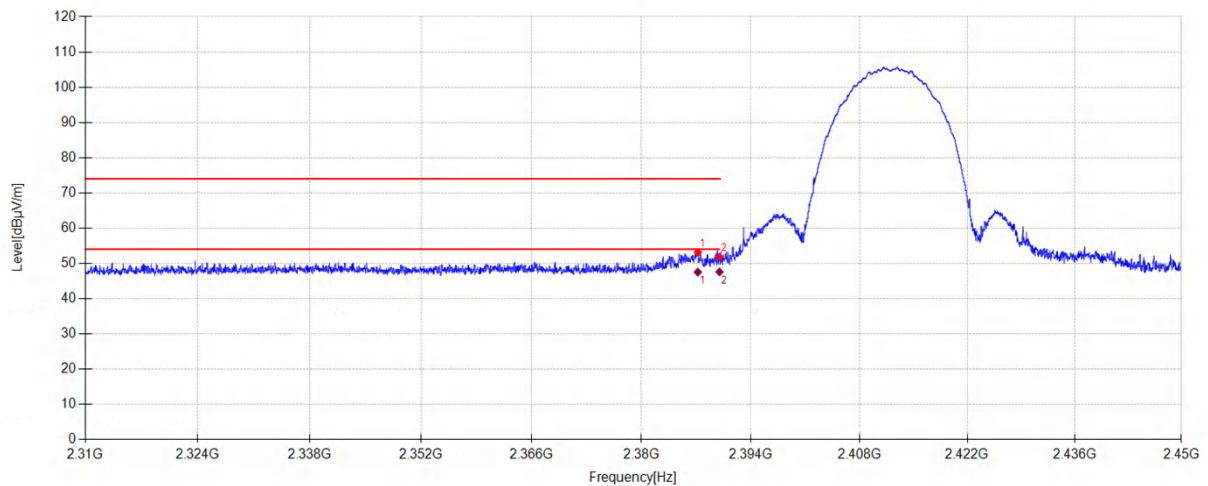

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.224	21.89	27.48	3.77	0.00	53.14	74.00	20.86	PK	Horizontal
2	2390.000	20.58	27.46	3.78	0.00	51.82	74.00	22.18	PK	Horizontal


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.224	16.28	27.48	3.77	47.53	54.00	6.47	AV	Horizontal
2	2390.000	16.35	27.46	3.78	47.59	54.00	6.41	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbin
Test Mode: 11B 2412MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

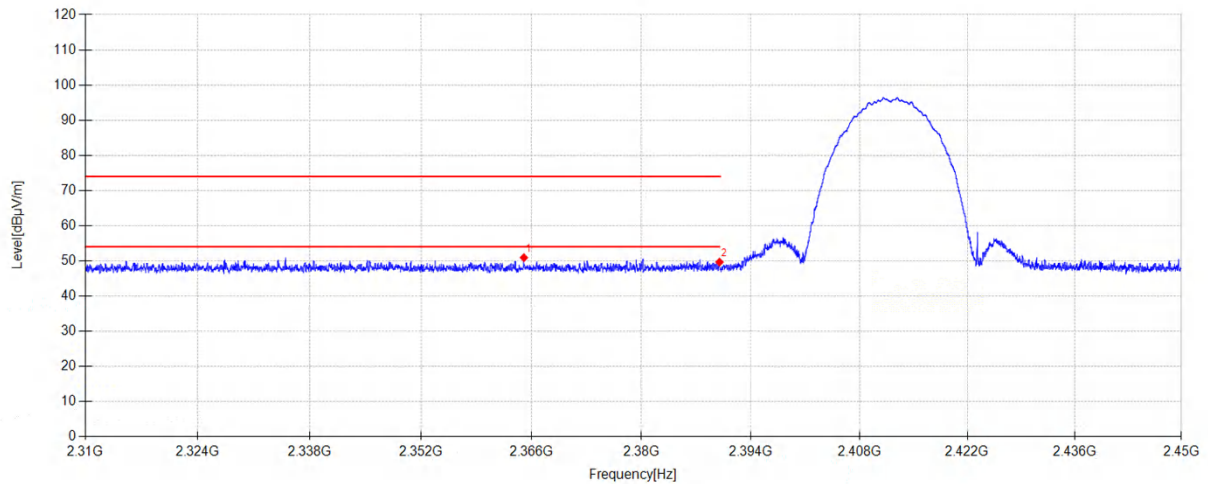


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2365.034	19.57	27.61	3.75	0.00	50.93	74.00	23.07	PK	Vertical
2	2390.000	18.42	27.46	3.78	0.00	49.66	74.00	24.34	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11B 2462MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

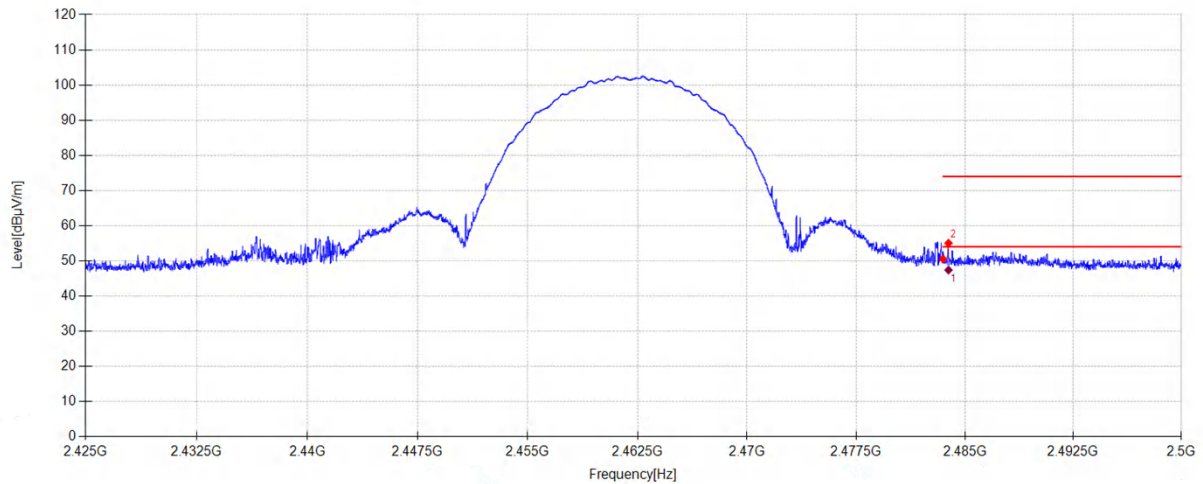

Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.11	27.54	3.88	0.00	50.53	74.00	23.47	PK	Horizontal
2	2483.875	23.60	27.54	3.88	0.00	55.02	74.00	18.98	PK	Horizontal


Final Data List

NO .	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.875	15.98	27.54	3.88	47.40	54.00	6.60	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11B 2462MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

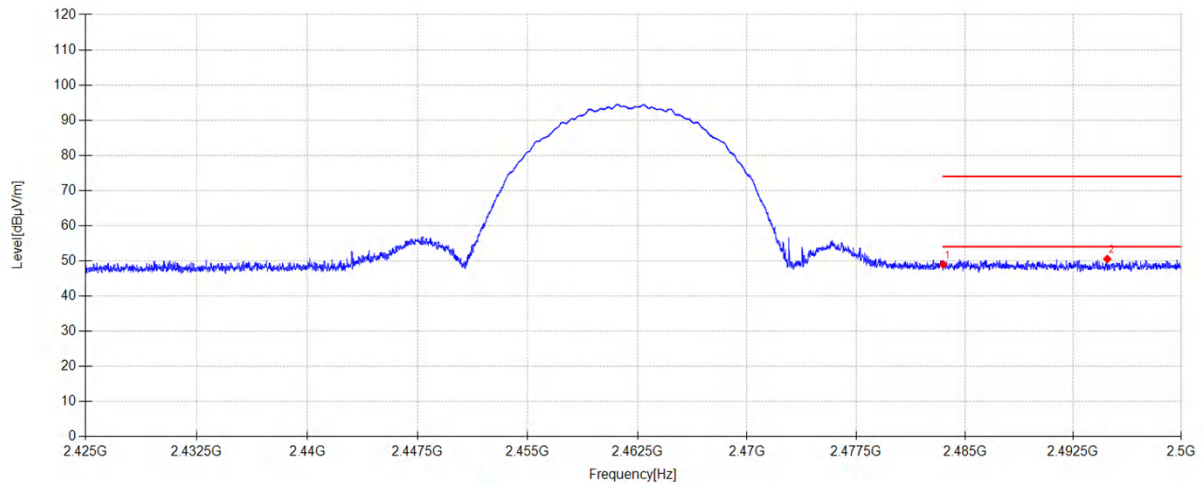


Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.59	27.54	3.88	0.00	49.01	74.00	24.99	PK	Vertical
2	2494.863	18.99	27.65	3.89	0.00	50.53	74.00	23.47	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbin
Test Mode: 11G 2412MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

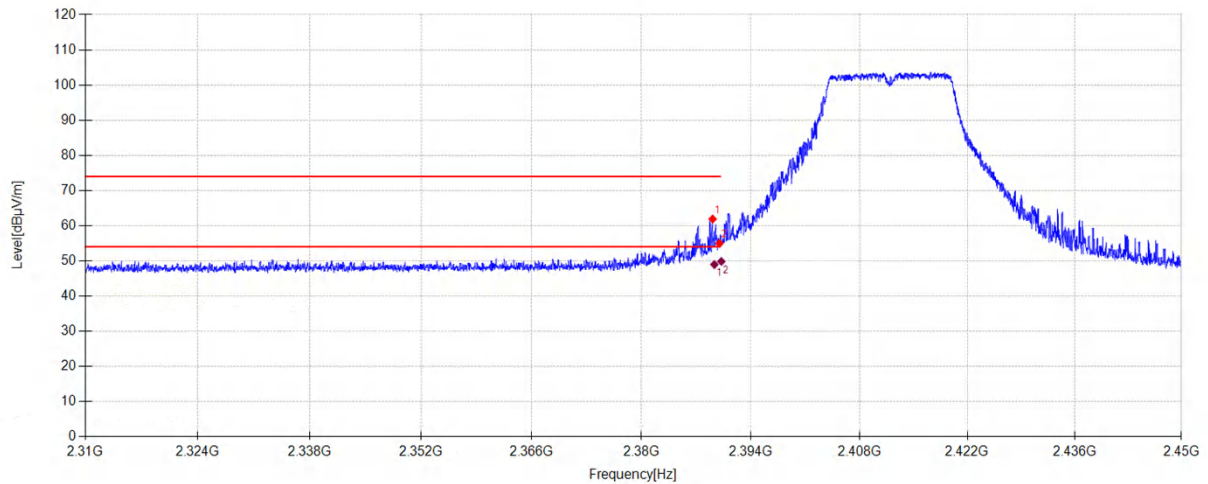

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.114	30.66	27.47	3.77	0.00	61.90	74.00	12.10	PK	Horizontal
2	2390.000	23.74	27.46	3.78	0.00	54.98	74.00	19.02	PK	Horizontal


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.345	17.73	27.47	3.77	48.97	54.00	5.03	AV	Horizontal
2	2390.237	18.60	27.46	3.78	49.84	54.00	4.16	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11G 2412MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

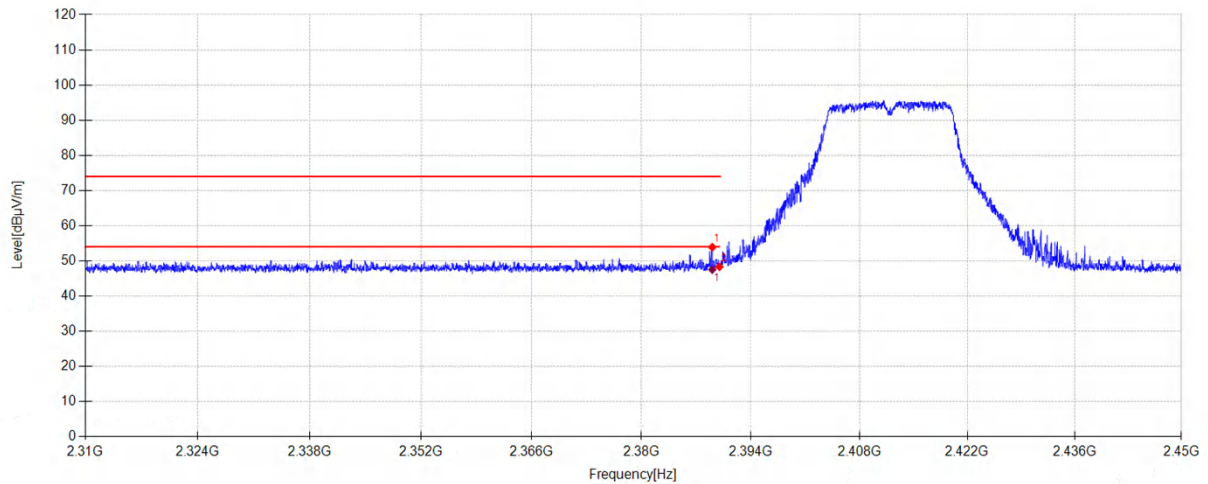

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.072	22.66	27.47	3.77	0.00	53.90	74.00	20.10	PK	Vertical
2	2390.000	17.08	27.46	3.78	0.00	48.32	74.00	25.68	PK	Vertical


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.072	16.29	27.47	3.77	47.53	54.00	6.47	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11G 2462MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

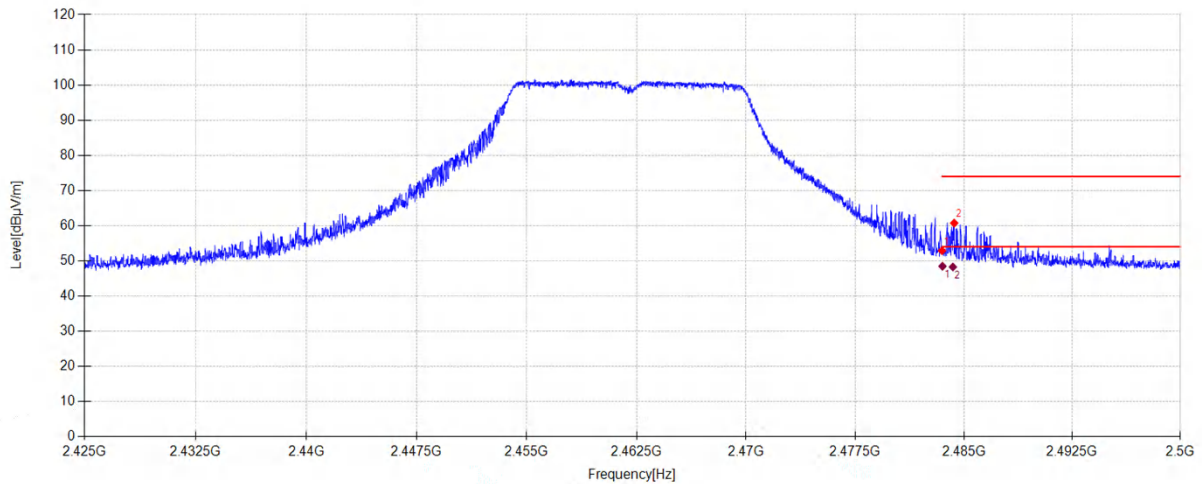

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.49	27.54	3.88	0.00	52.91	74.00	21.09	PK	Horizontal
2	2484.340	29.33	27.54	3.88	0.00	60.75	74.00	13.25	PK	Horizontal


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.528	17.06	27.54	3.88	48.48	54.00	5.52	AV	Horizontal
2	2484.247	16.86	27.54	3.88	48.28	54.00	5.72	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11G 2462MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

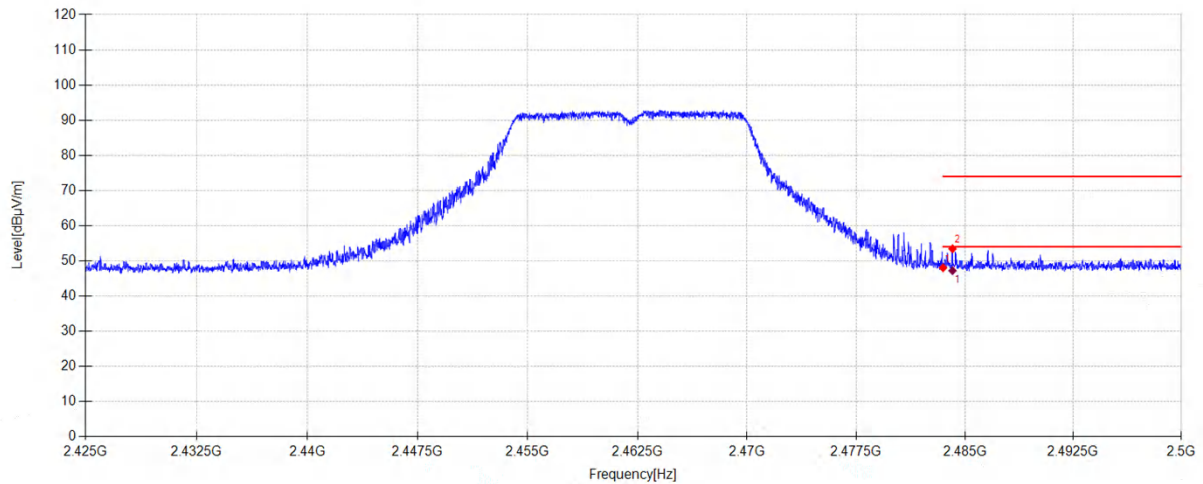

Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	16.62	27.54	3.88	0.00	48.04	74.00	25.96	PK	Vertical
2	2484.153	22.03	27.54	3.88	0.00	53.45	74.00	20.55	PK	Vertical


Final Data List

NO .	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2484.153	15.80	27.54	3.88	47.22	54.00	6.78	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11N20 2462MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

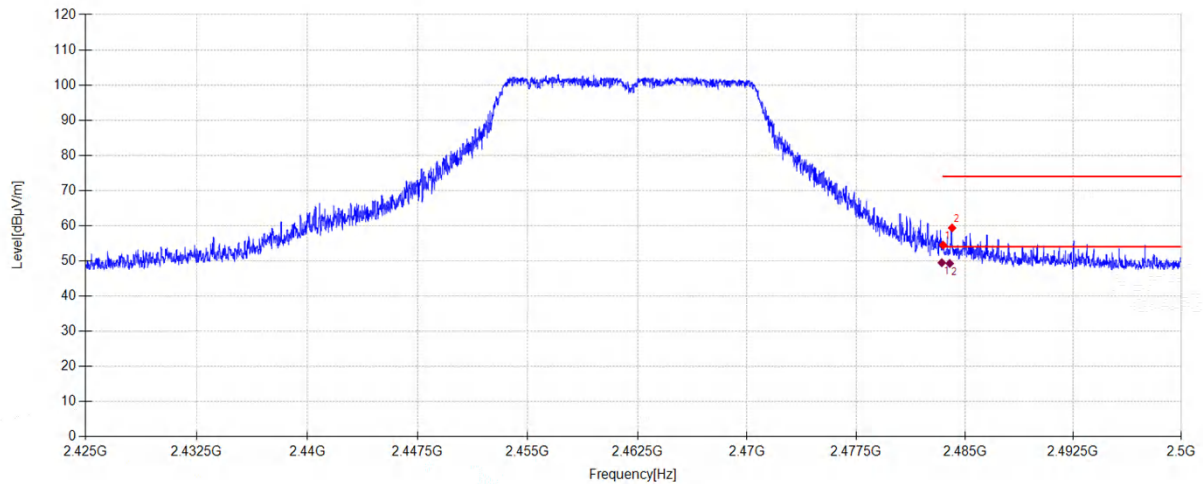

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	23.08	27.54	3.88	0.00	54.50	74.00	19.50	PK	Horizontal
2	2484.123	27.95	27.54	3.88	0.00	59.37	74.00	14.63	PK	Horizontal


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.412	18.07	27.54	3.88	49.49	54.00	4.51	AV	Horizontal
2	2483.960	17.85	27.54	3.88	49.27	54.00	4.73	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11N20 2462MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

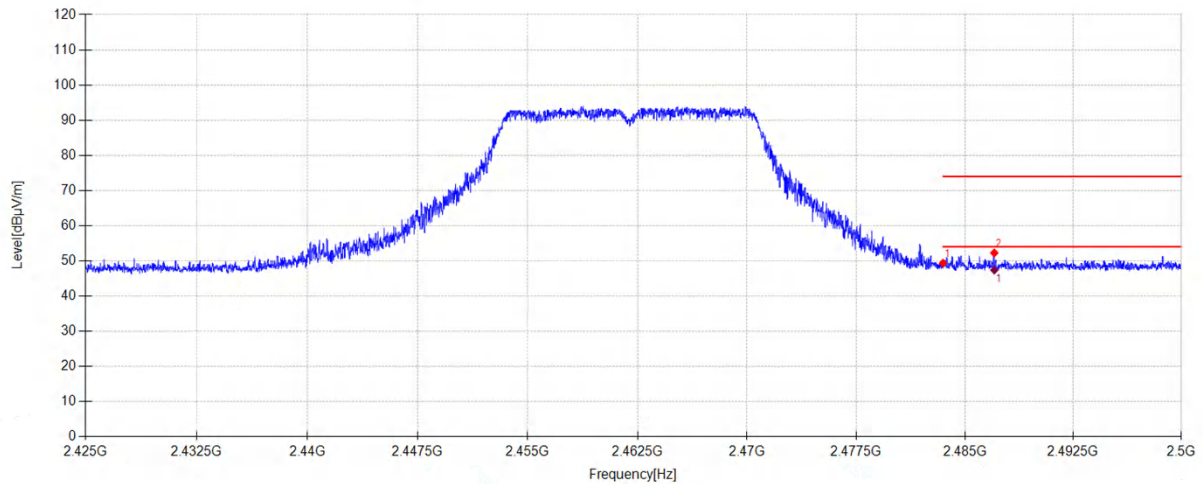

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.95	27.54	3.88	0.00	49.37	74.00	24.63	PK	Vertical
2	2487.040	20.82	27.57	3.88	0.00	52.27	74.00	21.73	PK	Vertical


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2487.040	15.93	27.57	3.88	47.38	54.00	6.62	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbin
Test Mode: 11N20 2412MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

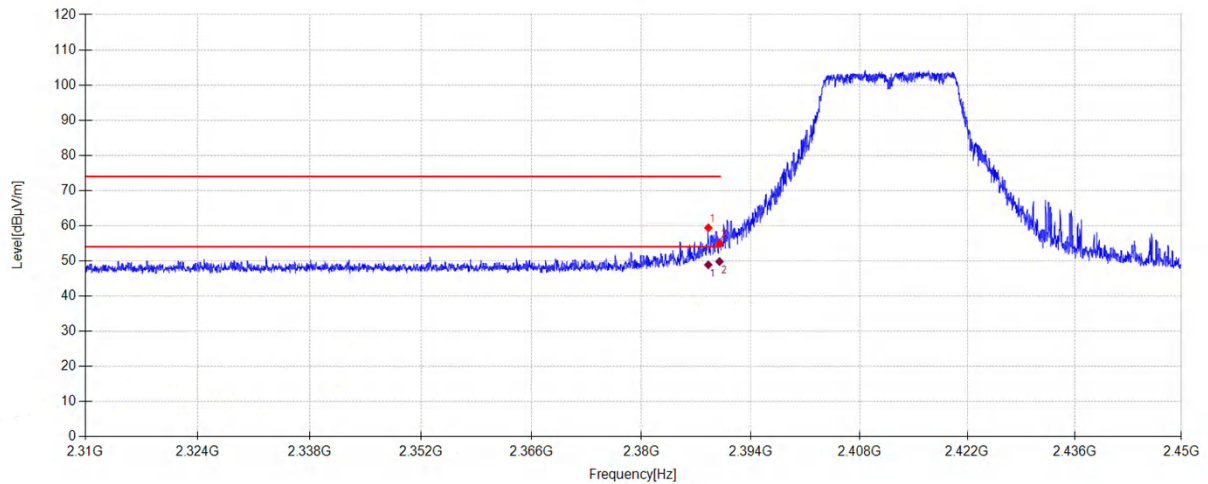

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.568	28.17	27.47	3.77	0.00	59.41	74.00	14.59	PK	Horizontal
2	2390.000	23.74	27.46	3.78	0.00	54.98	74.00	19.02	PK	Horizontal


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.568	17.64	27.47	3.77	48.88	54.00	5.12	AV	Horizontal
2	2390.000	18.58	27.46	3.78	49.82	54.00	4.18	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbin
Test Mode: 11N20 2412MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

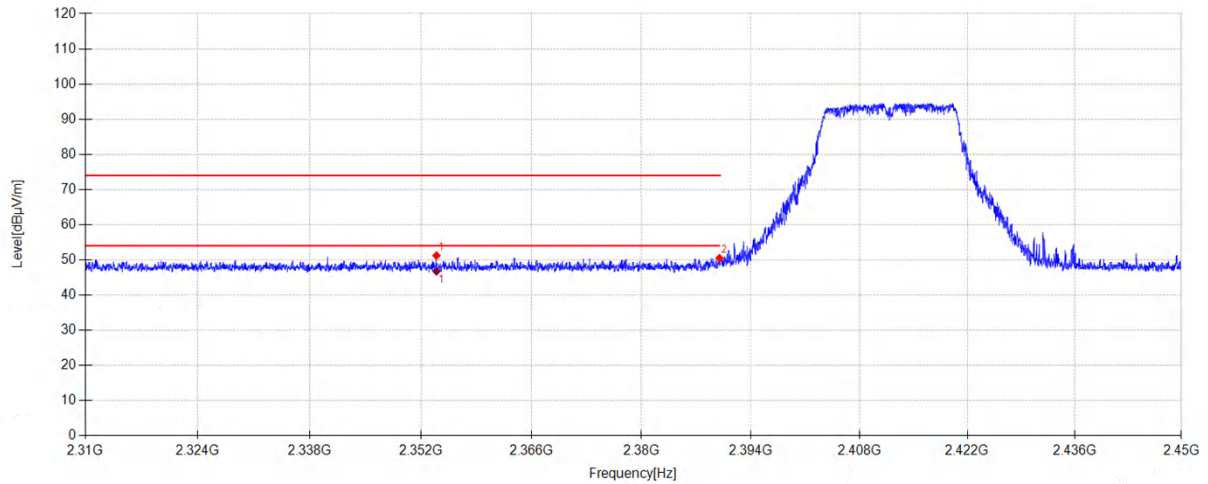


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2353.960	19.81	27.68	3.74	0.00	51.23	74.00	22.77	PK	Vertical
2	2390.000	19.22	27.46	3.78	0.00	50.46	74.00	23.54	PK	Vertical

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2353.960	15.37	27.68	3.74	46.79	54.00	7.21	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbin
Test Mode: 11AX20 2412MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

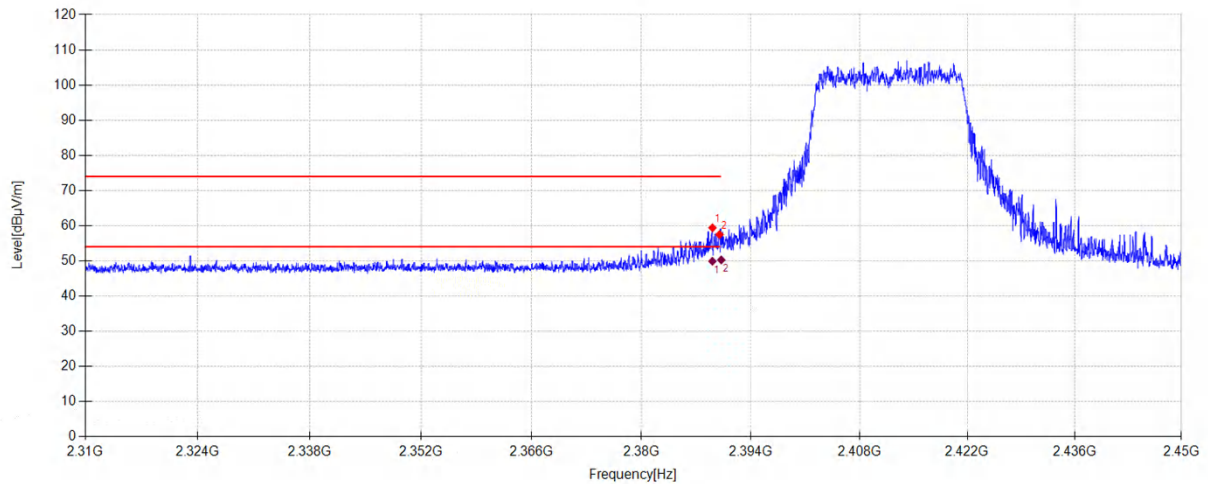

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.100	28.17	27.47	3.77	0.00	59.41	74.00	14.59	PK	Horizontal
2	2390.000	26.24	27.46	3.78	0.00	57.48	74.00	16.52	PK	Horizontal


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.087	18.66	27.47	3.77	49.90	54.00	4.10	AV	Horizontal
2	2390.225	19.04	27.46	3.78	50.28	54.00	3.72	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11AX20 2412MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

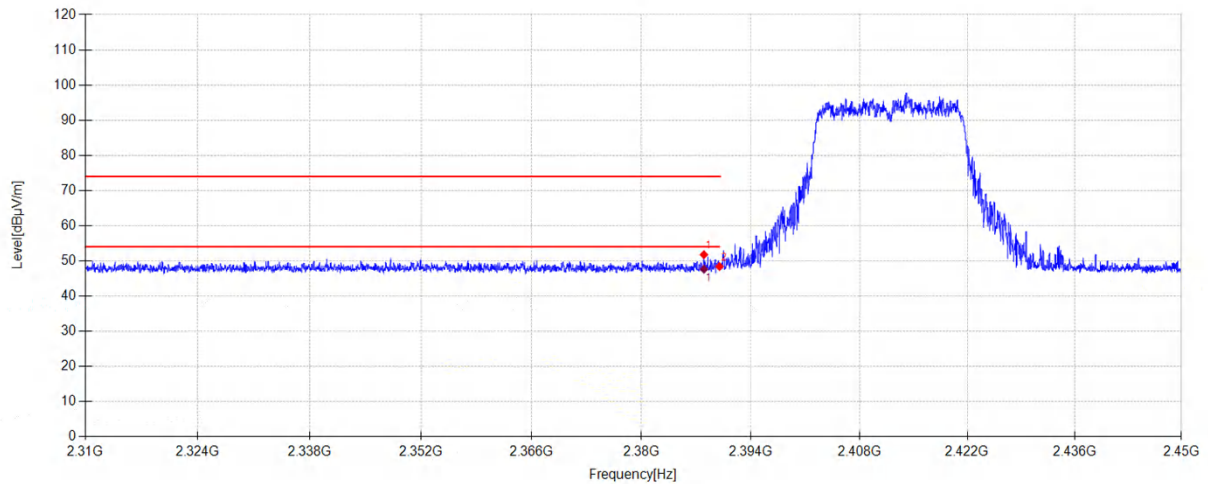

Suspected Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2388.008	20.53	27.47	3.77	0.00	51.77	74.00	22.23	PK	Vertical
2	2390.000	17.17	27.46	3.78	0.00	48.41	74.00	25.59	PK	Vertical


Final Data List

NO .	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2388.008	16.39	27.47	3.77	47.63	54.00	6.37	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11AX20 2462MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

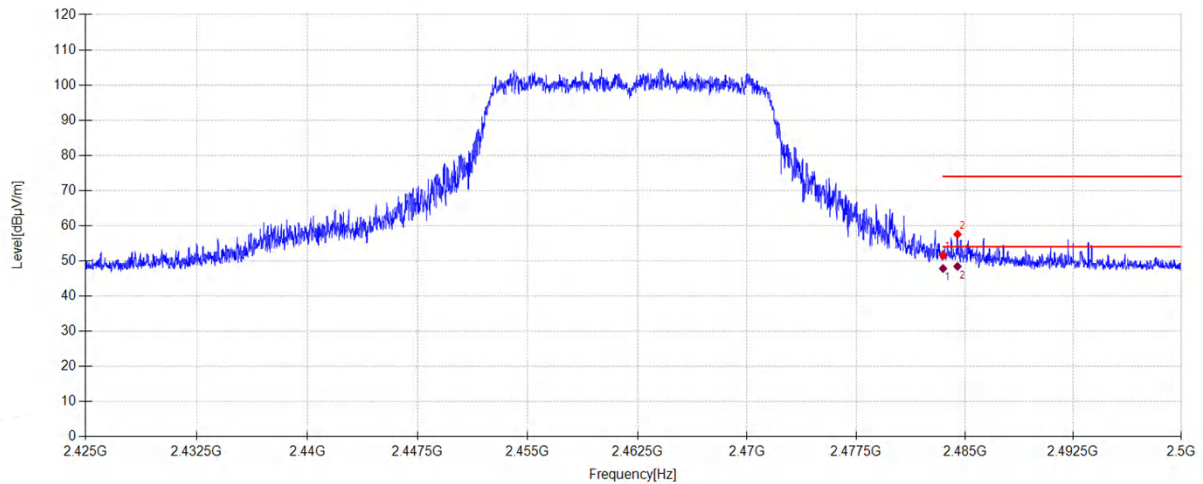

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.15	27.54	3.88	0.00	51.57	74.00	22.43	PK	Horizontal
2	2484.498	26.15	27.54	3.88	0.00	57.57	74.00	16.43	PK	Horizontal


Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	16.42	27.54	3.88	47.84	54.00	6.16	AV	Horizontal
2	2484.498	17.01	27.54	3.88	48.43	54.00	5.57	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date: 2025-12-20 **Tested By:** Li Xiongbín
Test Mode: 11AX20 2462MHz TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:51.4% **Test Site:** DDT 3# Chamber

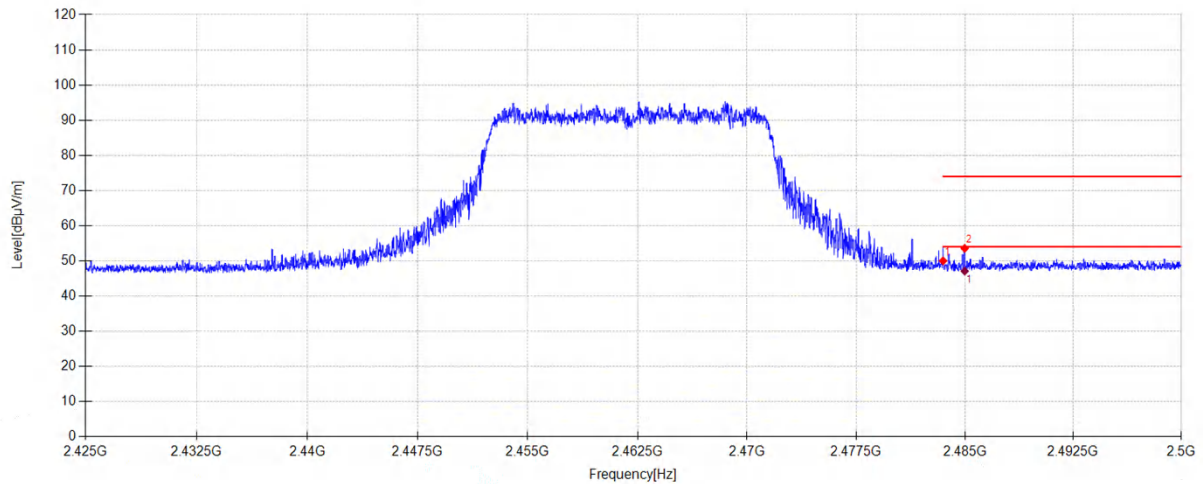

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.60	27.54	3.88	0.00	50.02	74.00	23.98	PK	Vertical
2	2484.993	22.13	27.55	3.88	0.00	53.56	74.00	20.44	PK	Vertical

Final Data List

NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2484.993	15.67	27.55	3.88	47.10	54.00	6.90	AV	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Appendix A.9: Test Results of Conducted Emissions on AC Mains

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25110709-2E\1124 CE.EM6
Test Date : 2025-12-24 Tested By : Yisheng Ling
Power Supply : AC 120V/60Hz Test Mode : 2.4WIFI mode
Condition : TEMP:24.9°C, RH:47.2% LISN : 2025 1# 216/NEUTRAL

Data: 10

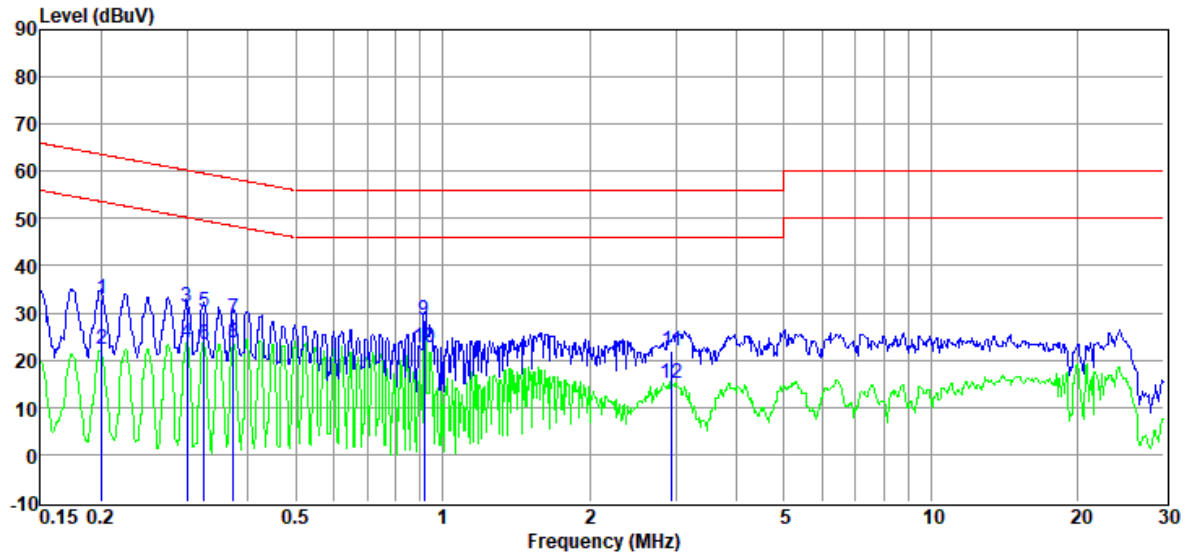


Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV)	(dBuV)	(dB)		
1	0.20	13.18	9.83	0.06	9.89	32.96	63.58	30.62	QP	NEUTRAL
2	0.20	2.41	9.83	0.06	9.89	22.19	53.58	31.39	Average	NEUTRAL
3	0.30	11.47	9.65	0.06	9.89	31.07	60.24	29.17	QP	NEUTRAL
4	0.30	3.96	9.65	0.06	9.89	23.56	50.24	26.68	Average	NEUTRAL
5	0.33	10.56	9.79	0.06	9.89	30.30	59.57	29.27	QP	NEUTRAL
6	0.33	3.58	9.79	0.06	9.89	23.32	49.57	26.25	Average	NEUTRAL
7	0.37	8.97	9.86	0.07	9.89	28.79	58.43	29.64	QP	NEUTRAL
8	0.37	3.70	9.86	0.07	9.89	23.52	48.43	24.91	Average	NEUTRAL
9	0.92	8.44	9.89	0.14	9.90	28.37	56.00	27.63	QP	NEUTRAL
10	0.92	2.62	9.89	0.14	9.90	22.55	46.00	23.45	Average	NEUTRAL
11	2.95	1.94	9.82	0.18	9.88	21.82	56.00	34.18	QP	NEUTRAL
12	2.95	-4.94	9.82	0.18	9.88	14.94	46.00	31.06	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 1# Shield Room	D:\2025 CE report data\Q25110709-2E\1124 CE.EM6
Test Date	: 2025-12-24	Tested By : Yisheng Ling
Power Supply	: AC 120V/60Hz	Test Mode : 2.4WIFI mode
Condition	: TEMP:24.9°C, RH:47.2%	LISN : 2025 1# 216/LINE

Data: 12

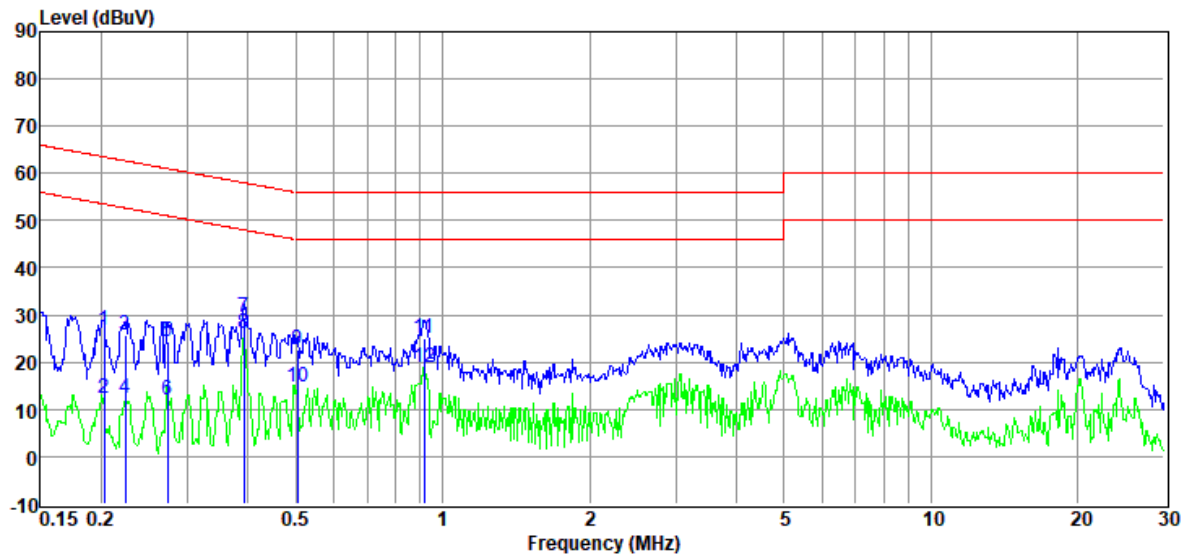

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.20	7.16	9.82	0.06	9.89	26.93	63.49	36.56	QP	LINE
2	0.20	-7.38	9.82	0.06	9.89	12.39	53.49	41.10	Average	LINE
3	0.22	5.90	9.82	0.06	9.89	25.67	62.66	36.99	QP	LINE
4	0.22	-7.32	9.82	0.06	9.89	12.45	52.66	40.21	Average	LINE
5	0.27	4.62	9.76	0.06	9.89	24.33	61.03	36.70	QP	LINE
6	0.27	-7.67	9.76	0.06	9.89	12.04	51.03	38.99	Average	LINE
7	0.39	10.01	9.69	0.08	9.89	29.67	58.03	28.36	QP	LINE
8	0.39	6.49	9.69	0.08	9.89	26.15	48.03	21.88	Average	LINE
9	0.50	3.05	9.78	0.09	9.89	22.81	56.00	33.19	QP	LINE
10	0.50	-5.00	9.78	0.09	9.89	14.76	46.00	31.24	Average	LINE
11	0.92	5.13	9.87	0.14	9.90	25.04	56.00	30.96	QP	LINE
12	0.92	-1.09	9.87	0.14	9.90	18.82	46.00	27.18	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.