


ANTENNA SPECIFICATIONS

Item		Specifications
Antenna	Frequency Range	2400~2483.5MHz
	Polarization	Linear
	Peak Gain	0.91 dBi
	V.S.W.R	<2.0
	Impedance	50Ω
	Return Loss	-10dB
	Connector	Microstrip line connection
	Efficiency	25%
	Type	Onboard: ANT0
	Size	12.5x6.5mm
	Manufacturer	<u>Shenzhen Jingxun Technology Limited Co.,Ltd</u>
	Manufacturer address	3/F,A5 Building Zhiyuan Community No.1001, Xueyuan Road, Nanshan District,Shenzhen City,China
Environmental	Operating Temperature	-40°C~+105°C

ANTENNA PATTERN

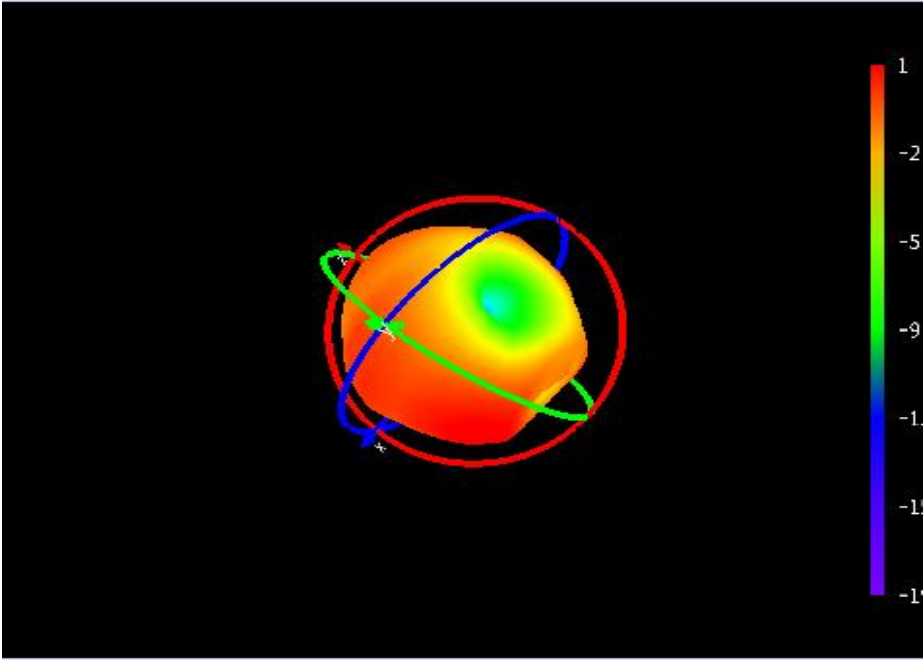


F(MHZ)	dBi
2400	-0.07
2410	-0.25
2420	-0.11
2430	0.04
2440	0.34
2450	0.62
2460	0.74
2470	0.88
2480	0.91

Angle: -132.34
Power: 23.78




SUNYIELD

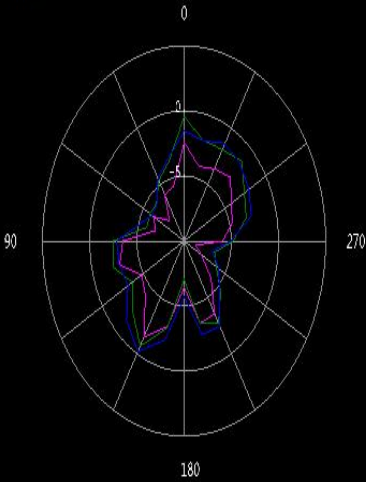

Angle: 91.7
Power: 14.57




SUNYIELD

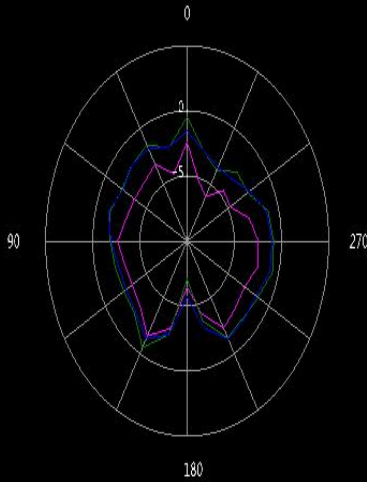

Angle: 70.45
Power: 20.69



SUNYIELD

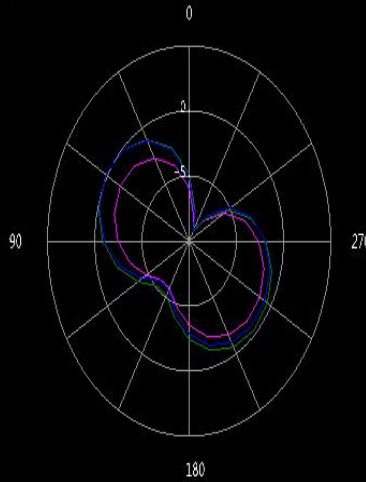

Antenna Picture:

