





## 802.11ax-HE40 Power Spectral Density - Ant 1 / Ant 0 + 1


## Channel 38 (5190MHz)

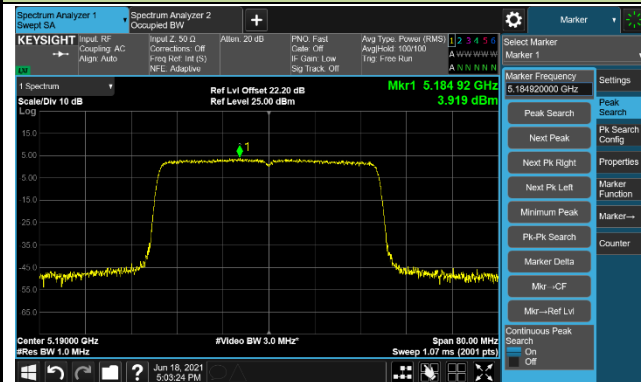


## Channel 46 (5230MHz)

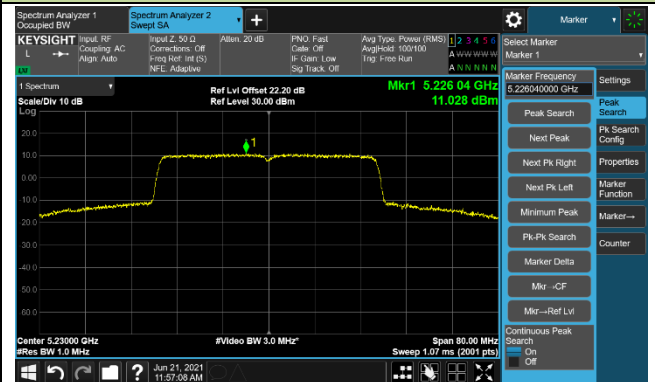


## Channel 54 (5270MHz)

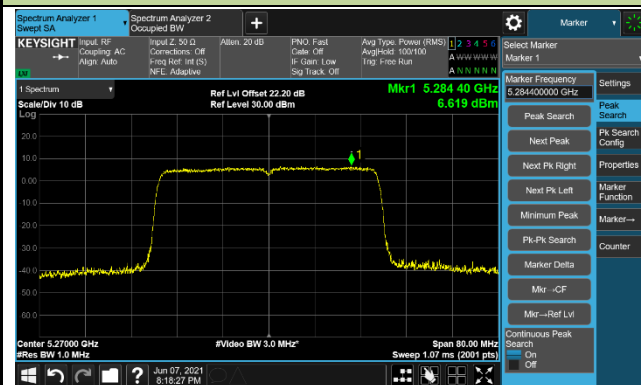


## Channel 62 (5310MHz)

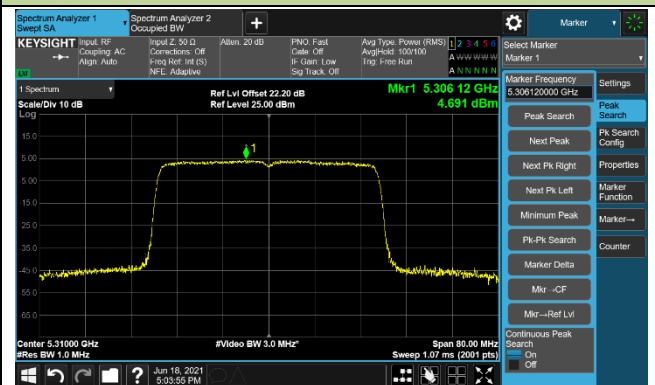


## Channel 102 (5510MHz)

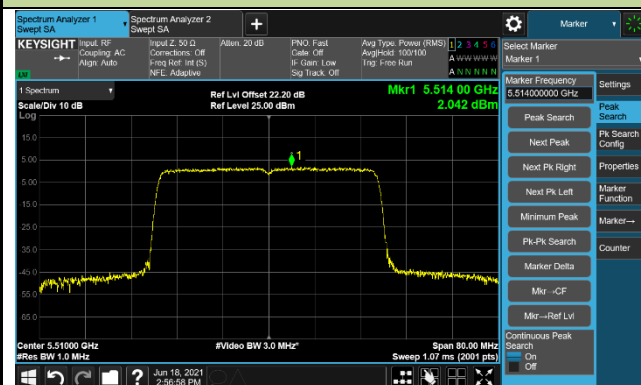


## Channel 110 (5550MHz)

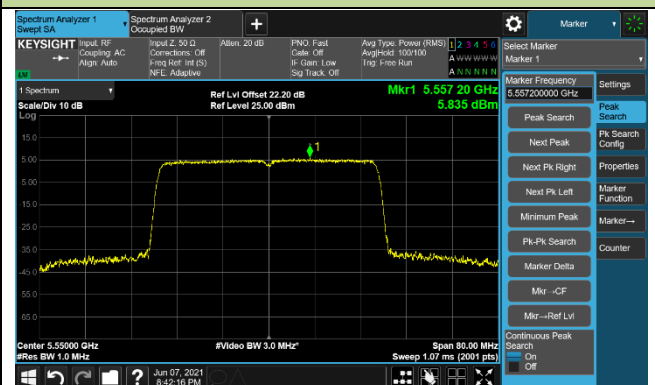

## Channel 134 (5670MHz)

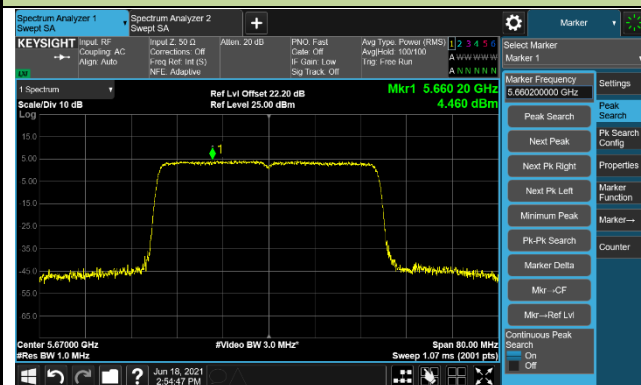


## Channel 142 (5710MHz)

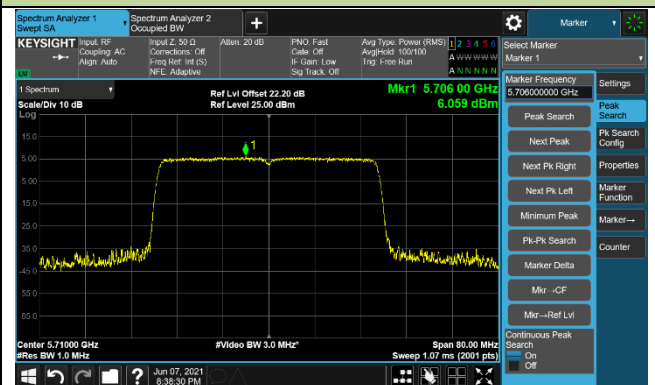




## 802.11ax-HE80 Power Spectral Density - Ant 1 / Ant 0 + 1


## Channel 42 (5210MHz)

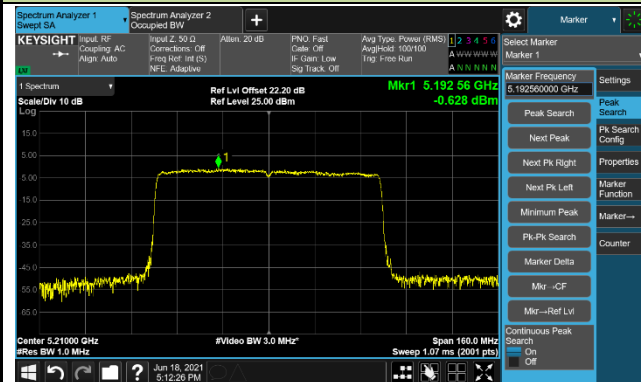


## Channel 58 (5290MHz)

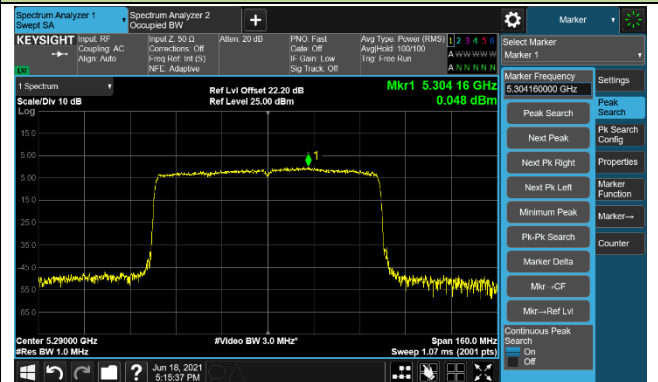


## Channel 106 (5530MHz)

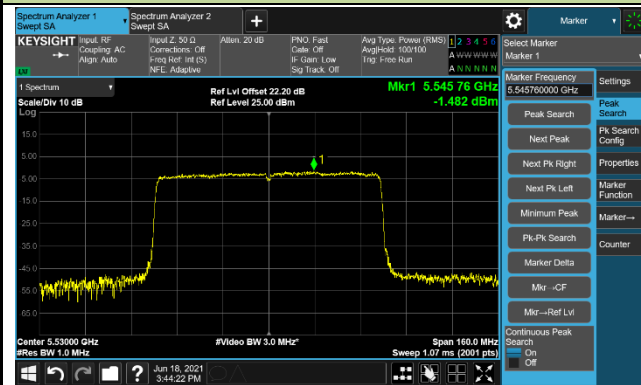


## Channel 122 (5610MHz)

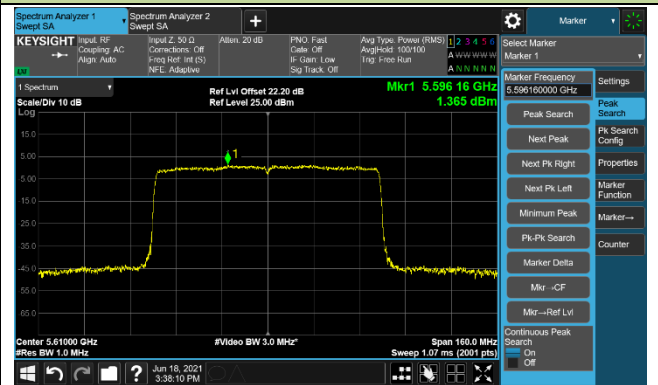

## Channel 138 (5690MHz)

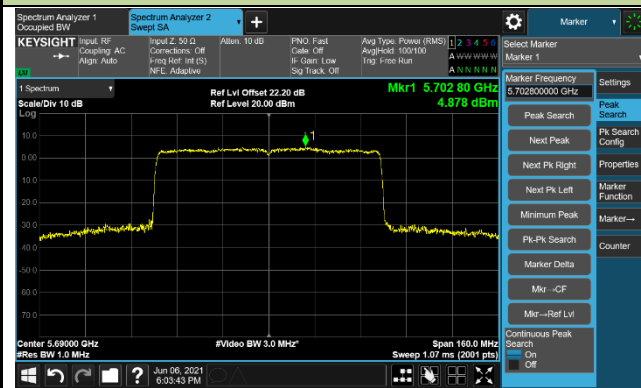


## Channel 155 (5775MHz)

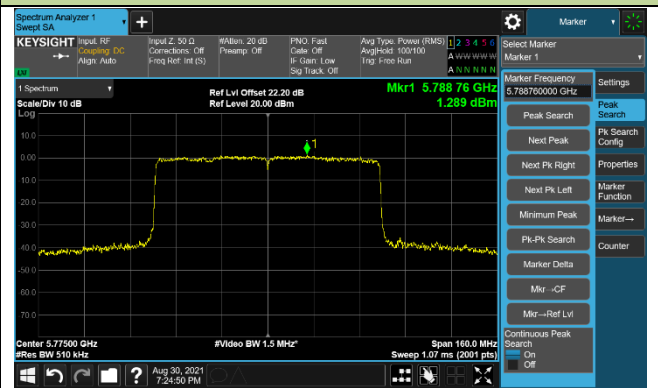


## 802.11ax-HE160 Power Spectral Density - Ant 1 / Ant 0 + 1

## Channel 50 (5250MHz)

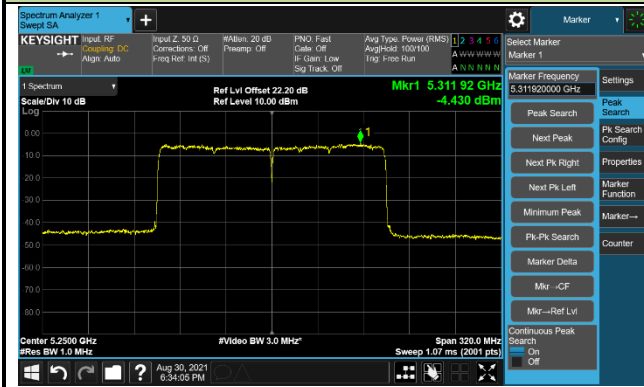

## Channel 114 (5570MHz)

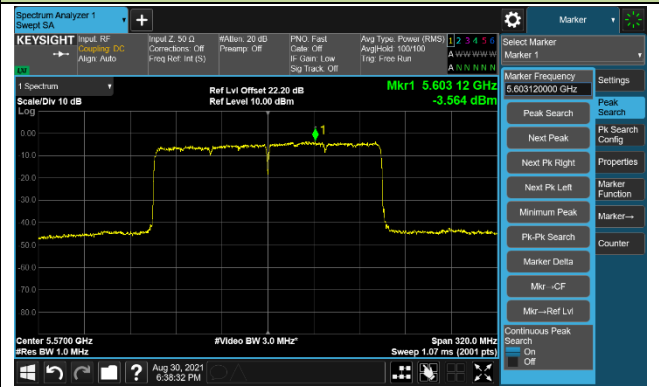

## **7.7. Frequency Stability Measurement**

### **7.7.1. Test Limit**

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### **7.7.2. Test Procedure Used**

#### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

#### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### 7.7.3.Test Setup

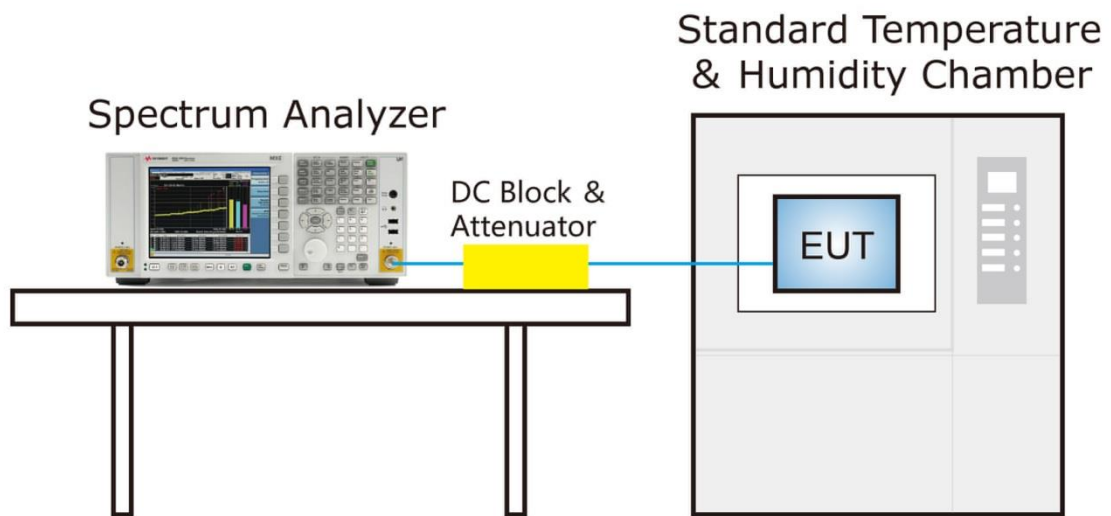

#### 7.7.4.Test Result

|           |                                |               |            |
|-----------|--------------------------------|---------------|------------|
| Product   | AX5400 Tri-Band Wi-Fi 6 Router | Test Engineer | Eric Lin   |
| Test Site | SR2                            | Test Date     | 2021/07/16 |
| Test Mode | 5180MHz (Carrier Mode)         |               |            |

| Voltage (%) | Power (VAC) | Temp (°C)  | Frequency Tolerance (ppm) |           |           |            |
|-------------|-------------|------------|---------------------------|-----------|-----------|------------|
|             |             |            | 0 minutes                 | 2 minutes | 5 minutes | 10 minutes |
| 100%        | 120         | - 30       | -10.96                    | -11.26    | -11.55    | -11.61     |
|             |             | - 20       | -11.08                    | -11.26    | -11.55    | -11.61     |
|             |             | - 10       | -11.10                    | -11.27    | -11.56    | -11.63     |
|             |             | 0          | -11.13                    | -11.28    | -11.56    | -11.63     |
|             |             | + 10       | -11.15                    | -11.32    | -11.57    | -11.63     |
|             |             | + 20 (Ref) | -11.17                    | -11.38    | -11.58    | -11.64     |
|             |             | + 30       | -11.18                    | -11.39    | -11.59    | -11.64     |
|             |             | + 40       | -11.20                    | -11.51    | -11.59    | -11.65     |
|             |             | + 50       | -11.22                    | -11.52    | -11.60    | -11.64     |
| 115%        | 138         | + 20       | -11.23                    | -11.53    | -11.60    | -11.65     |
| 85%         | 102         | + 20       | -11.24                    | -11.53    | -11.61    | -11.66     |

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} \*10<sup>6</sup>.



## 7.8. Radiated Spurious Emission Measurement

### 7.8.1.Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 7.8.2.Test Procedure Used

KDB 789033 D02v02r01- Section G

### 7.8.3.Test Setting

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| >1000 MHz     | 1 MHz         |

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### 7.8.4.Test Setup

##### Below 1GHz Test Setup:

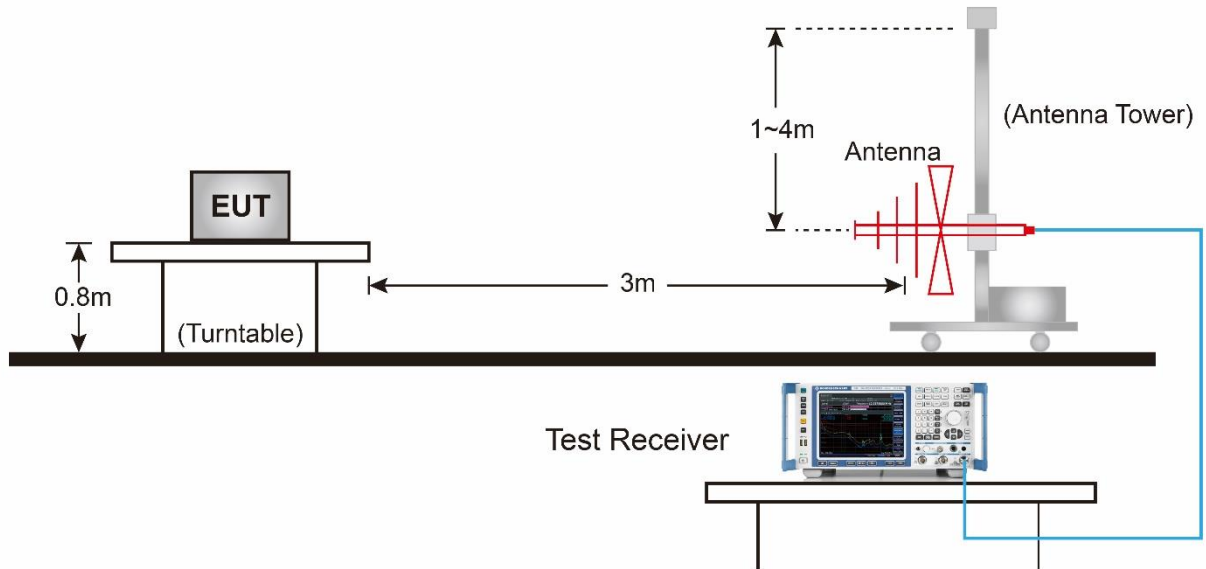


##### Above 1GHz Test Setup:

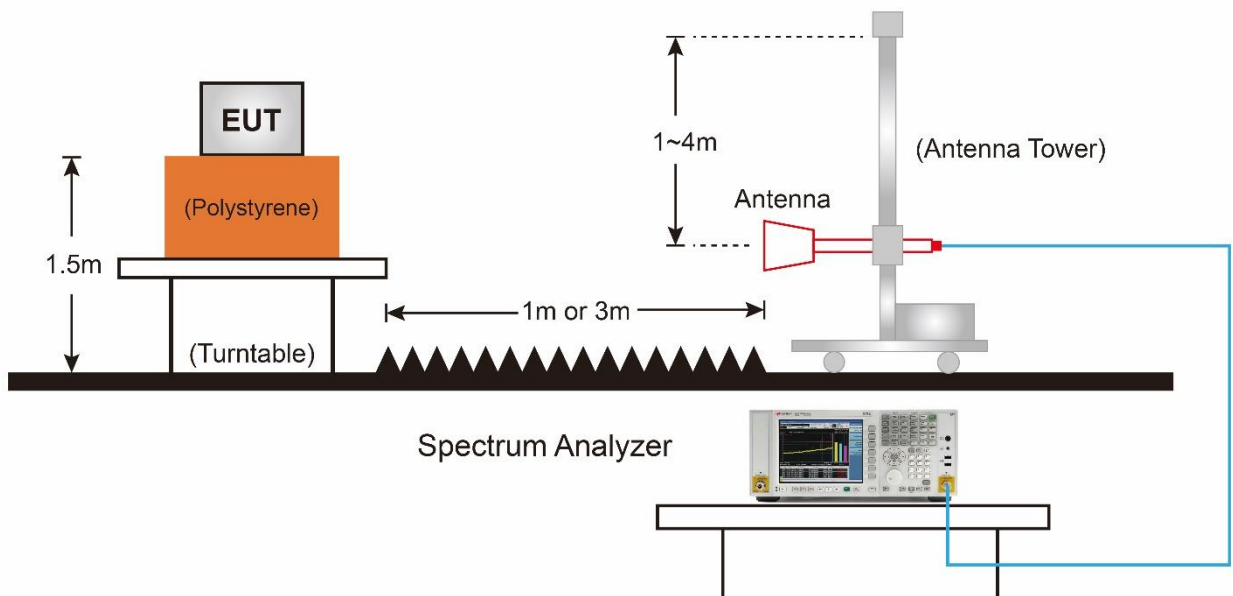

### 7.8.5.Test Result

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5180MHz | Test Voltage         | AC 120V/60Hz |

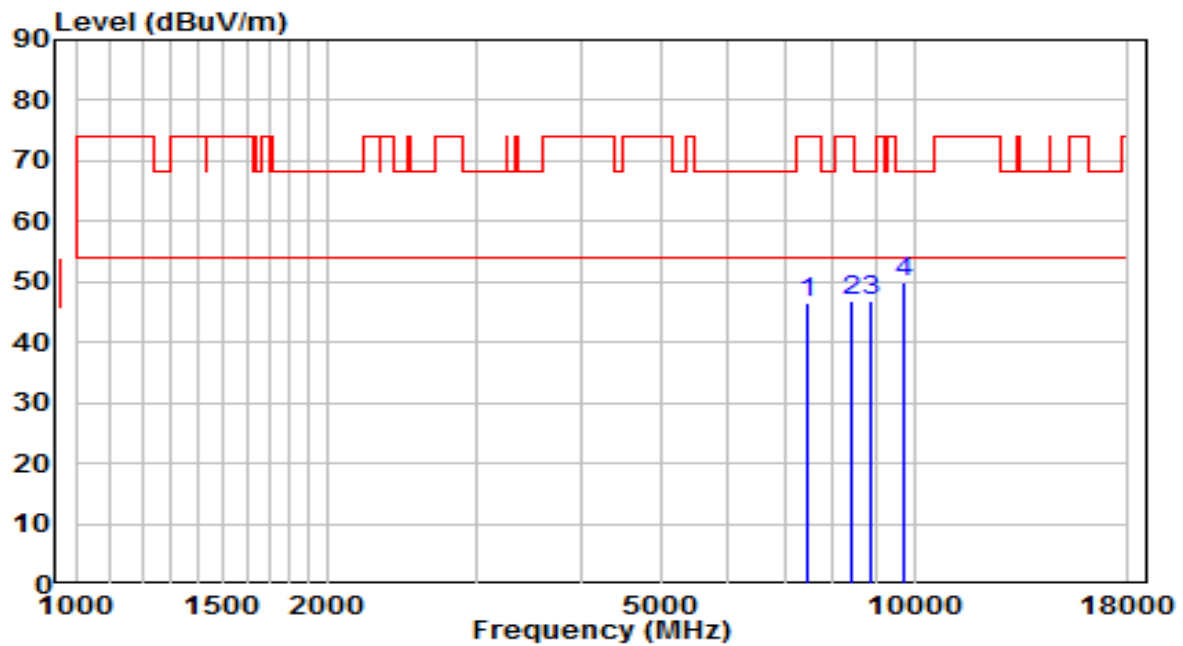


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7451.500        | 33.70          | 12.80    | 46.50                | -27.50      | 74.00          | Peak              |
| 2  | 8403.500        | 33.21          | 13.61    | 46.82                | -27.18      | 74.00          | Peak              |
| 3  | 8854.000        | 32.37          | 14.52    | 46.89                | -21.31      | 68.20          | Peak              |
| 4  | * 9721.000      | 33.80          | 16.09    | 49.89                | -18.31      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5180MHz | Test Voltage         | AC 120V/60Hz |

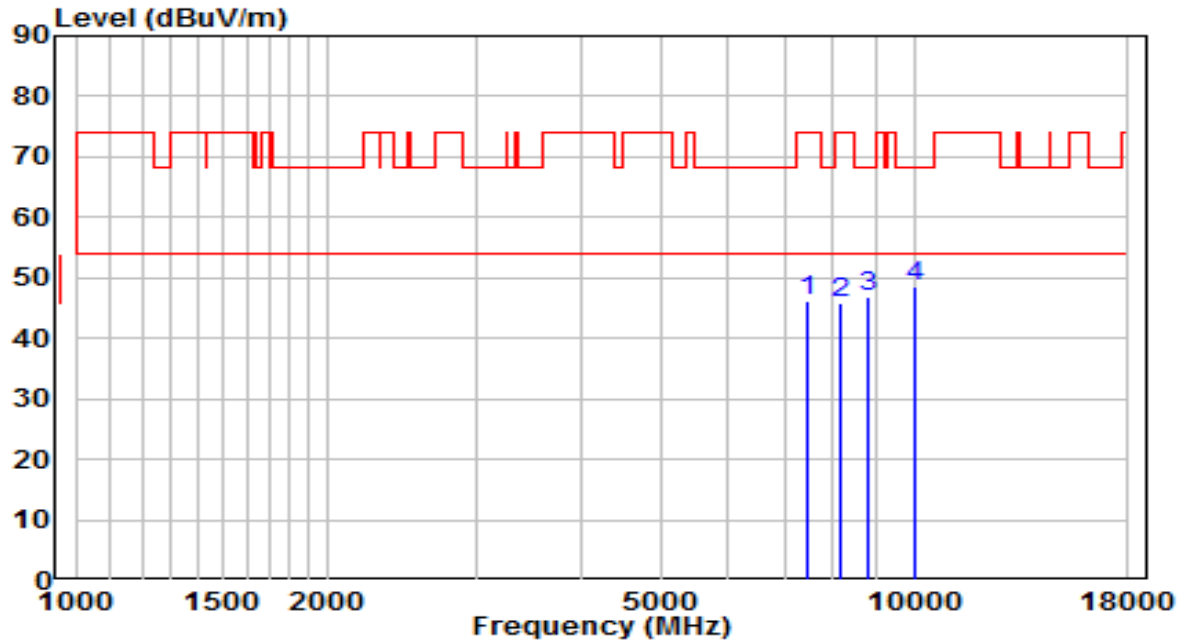


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7468.500        | 33.46          | 12.88    | 46.33                | -27.67      | 74.00          | Peak              |
| 2  | 8191.000        | 32.21          | 13.52    | 45.73                | -28.27      | 74.00          | Peak              |
| 3  | 8820.000        | 32.36          | 14.44    | 46.80                | -21.40      | 68.20          | Peak              |
| 4  | * 10035.500     | 31.90          | 16.70    | 48.60                | -19.60      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5220MHz | Test Voltage         | AC 120V/60Hz |

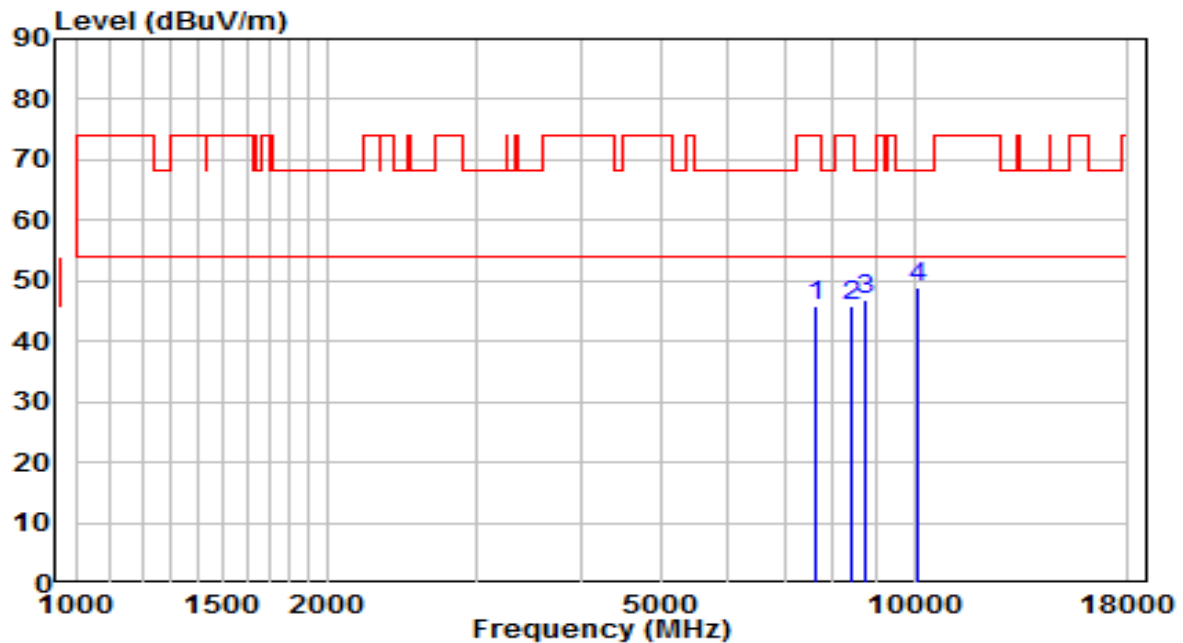


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7604.500        | 32.73          | 13.10    | 45.83                | -28.17      | 74.00          | Peak              |
| 2  | 8412.000        | 32.22          | 13.62    | 45.83                | -28.17      | 74.00          | Peak              |
| 3  | 8760.500        | 32.55          | 14.29    | 46.85                | -21.35      | 68.20          | Peak              |
| 4  | * 10129.000     | 31.80          | 17.08    | 48.88                | -19.32      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5220MHz | Test Voltage         | AC 120V/60Hz |

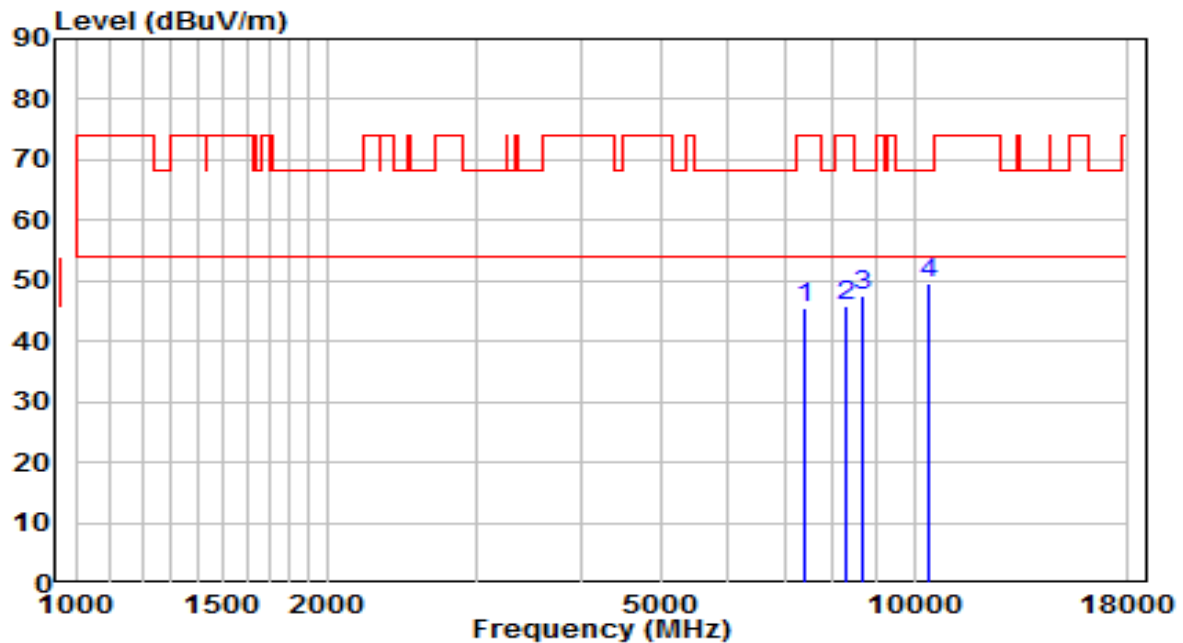


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7409.000        | 32.86          | 12.61    | 45.47                | -28.53      | 74.00          | Peak              |
| 2  | 8293.000        | 32.12          | 13.56    | 45.69                | -28.31      | 74.00          | Peak              |
| 3  | 8709.500        | 33.37          | 14.17    | 47.53                | -20.67      | 68.20          | Peak              |
| 4  | * 10443.500     | 31.33          | 18.34    | 49.68                | -18.52      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5240MHz | Test Voltage         | AC 120V/60Hz |

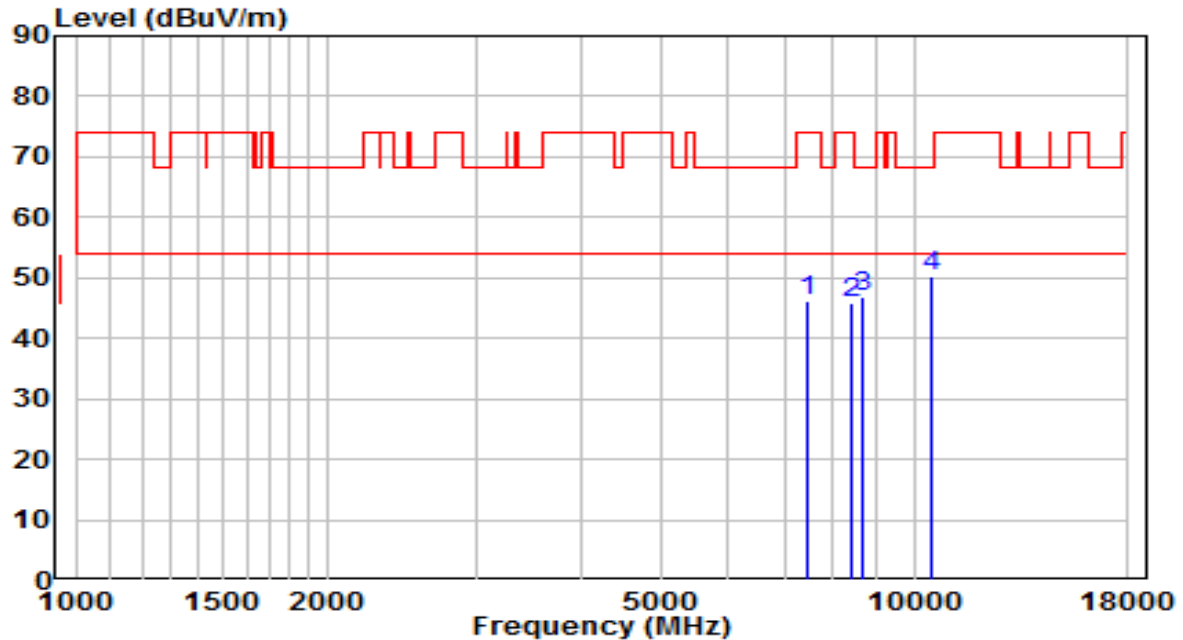


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7460.000        | 33.49          | 12.84    | 46.33                | -27.67      | 74.00          | Peak              |
| 2  | 8429.000        | 32.33          | 13.62    | 45.95                | -28.05      | 74.00          | Peak              |
| 3  | 8684.000        | 32.71          | 14.11    | 46.82                | -21.38      | 68.20          | Peak              |
| 4  | * 10503.000     | 31.53          | 18.57    | 50.11                | -18.09      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5240MHz | Test Voltage         | AC 120V/60Hz |

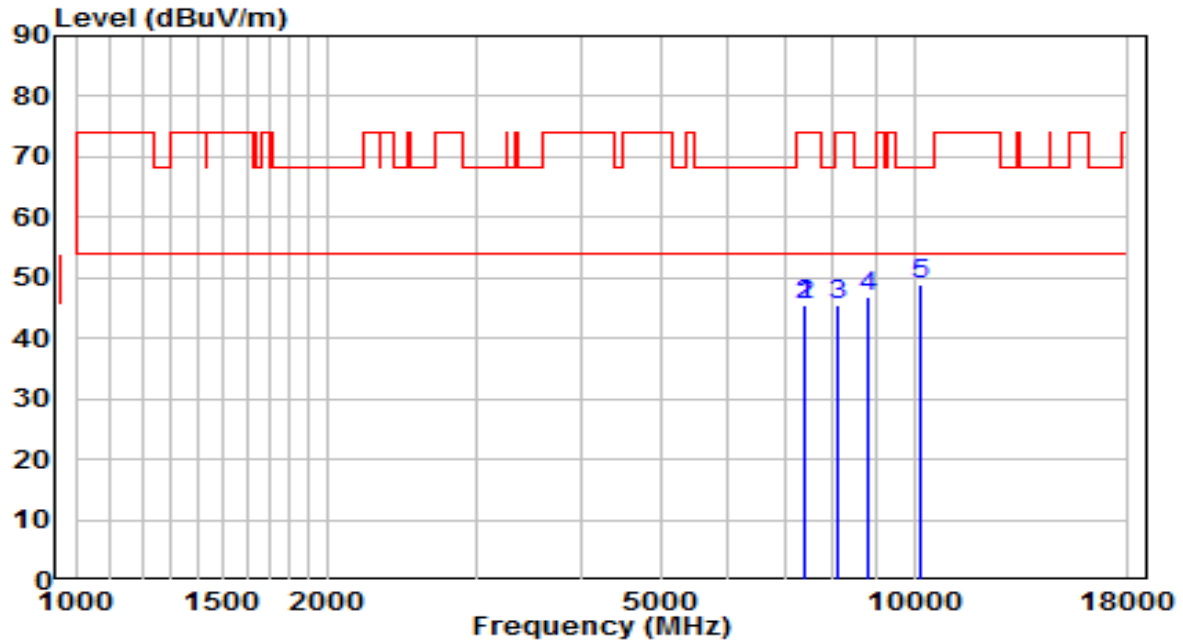


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7409.000        | 32.84          | 12.61    | 45.45                | -28.55      | 74.00          | Peak              |
| 2  | 7409.000        | 32.84          | 12.61    | 45.45                | -28.55      | 74.00          | Peak              |
| 3  | 8106.000        | 32.03          | 13.48    | 45.50                | -28.50      | 74.00          | Peak              |
| 4  | 8820.000        | 32.29          | 14.44    | 46.73                | -21.47      | 68.20          | Peak              |
| 5  | * 10205.500     | 31.56          | 17.39    | 48.95                | -19.25      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5260MHz | Test Voltage         | AC 120V/60Hz |

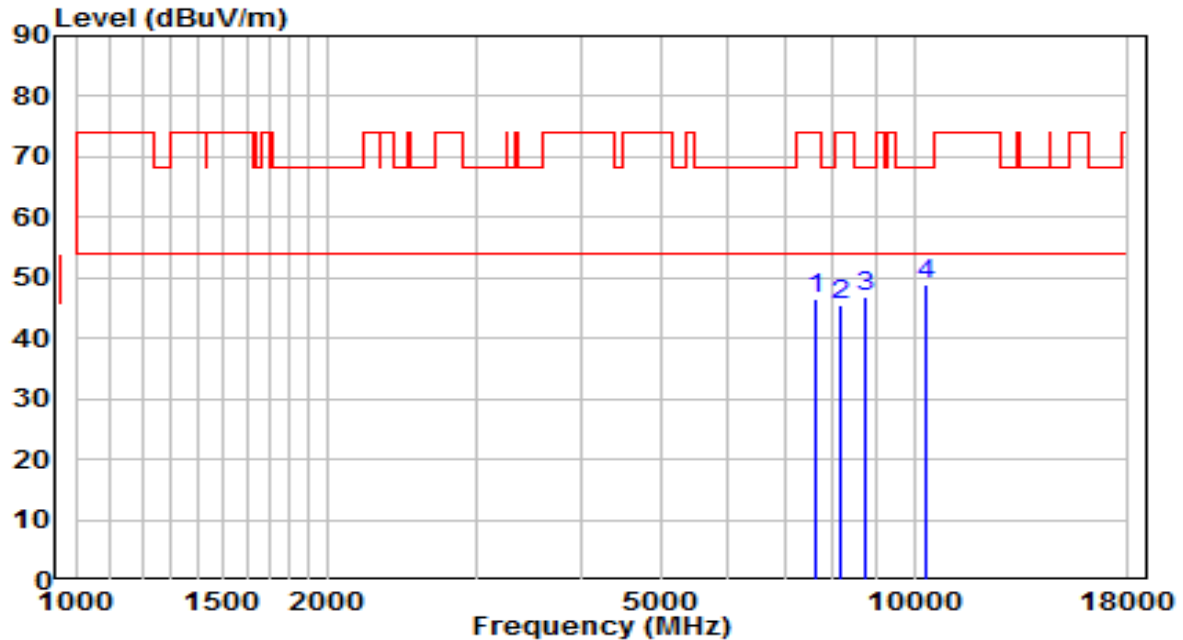


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 33.30          | 13.14    | 46.45                | -27.55      | 74.00          | Peak              |
| 2  | 8174.000        | 31.87          | 13.51    | 45.38                | -28.62      | 74.00          | Peak              |
| 3  | 8760.500        | 32.64          | 14.29    | 46.94                | -21.26      | 68.20          | Peak              |
| 4  | * 10350.000     | 31.04          | 17.97    | 49.01                | -19.19      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5260MHz | Test Voltage         | AC 120V/60Hz |

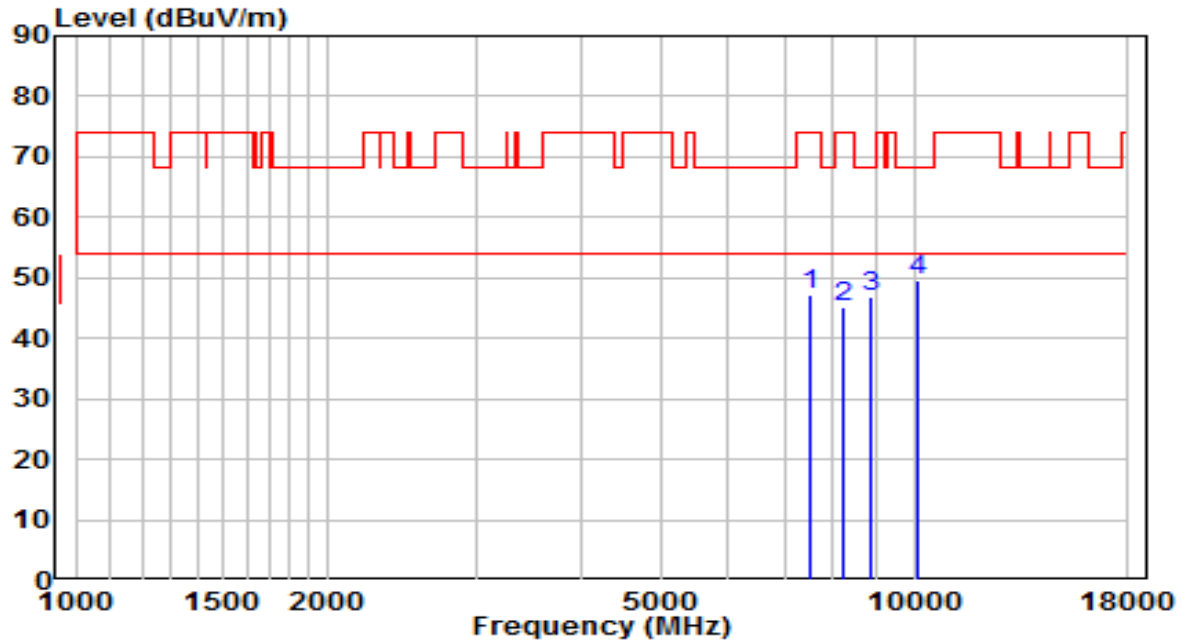


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7511.000        | 34.19          | 13.02    | 47.22                | -26.78      | 74.00          | Peak              |
| 2  | 8250.500        | 31.79          | 13.54    | 45.34                | -28.66      | 74.00          | Peak              |
| 3  | 8854.000        | 32.25          | 14.52    | 46.77                | -21.43      | 68.20          | Peak              |
| 4  | * 10129.000     | 32.59          | 17.08    | 49.67                | -18.53      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5300MHz | Test Voltage         | AC 120V/60Hz |

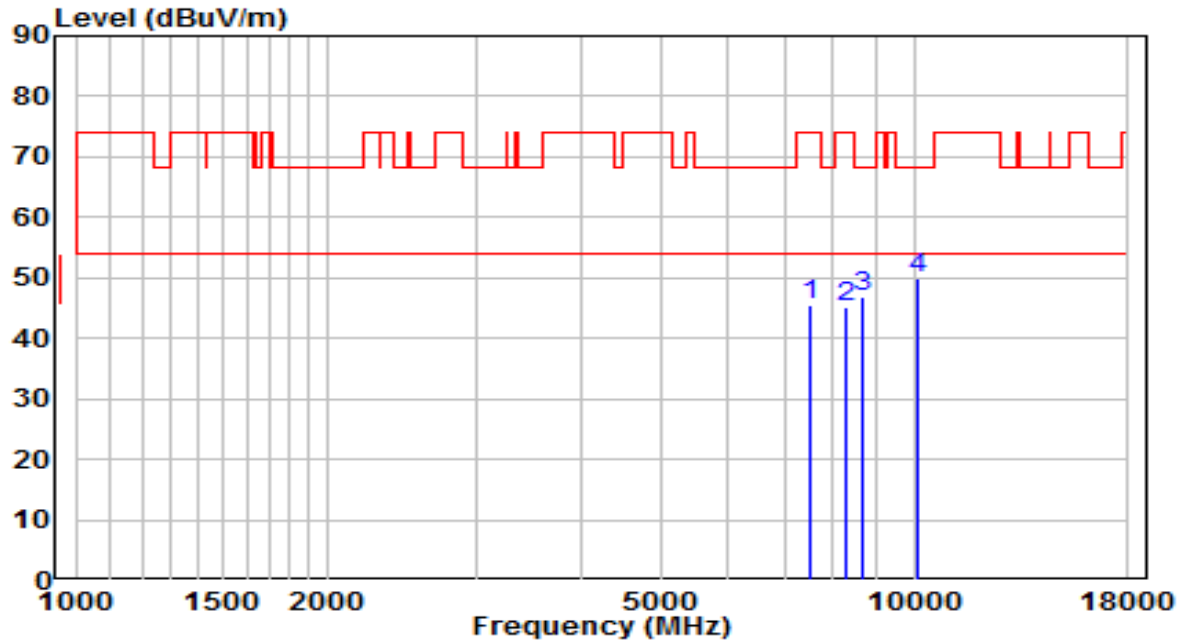


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7494.000        | 32.45          | 12.99    | 45.44                | -28.56      | 74.00          | Peak              |
| 2  | 8267.500        | 31.70          | 13.55    | 45.25                | -28.75      | 74.00          | Peak              |
| 3  | 8709.500        | 32.68          | 14.17    | 46.85                | -21.35      | 68.20          | Peak              |
| 4  | * 10129.000     | 32.74          | 17.08    | 49.81                | -18.39      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5300MHz | Test Voltage         | AC 120V/60Hz |

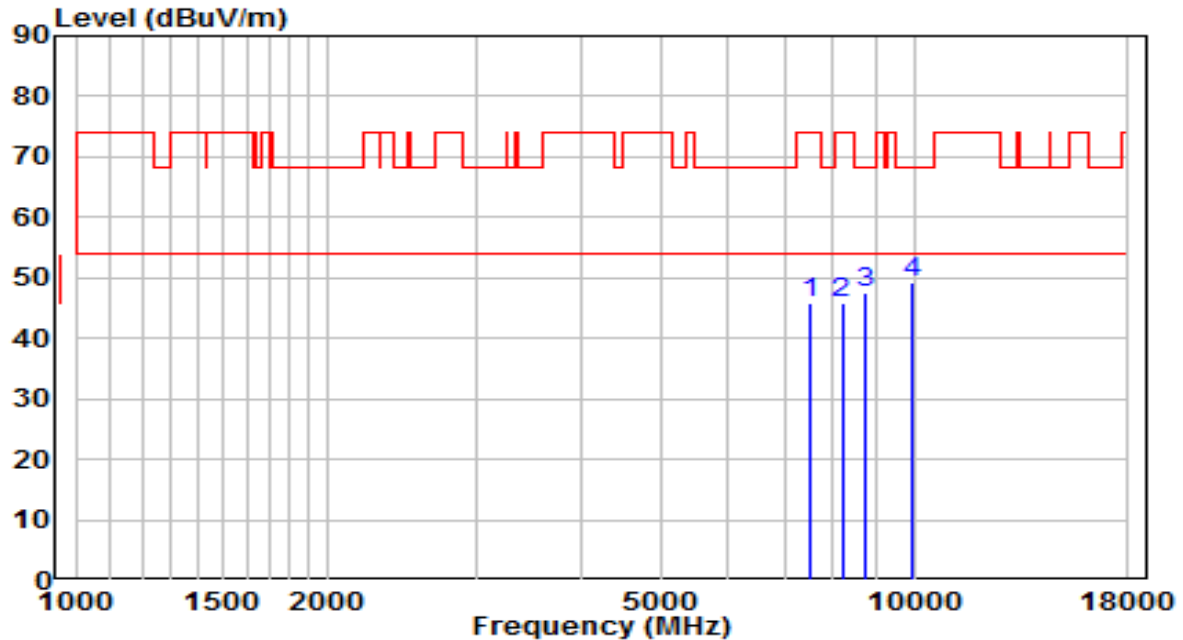


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7511.000        | 32.86          | 13.02    | 45.88                | -28.12      | 74.00          | Peak              |
| 2  | 8199.500        | 32.34          | 13.52    | 45.86                | -28.14      | 74.00          | Peak              |
| 3  | 8726.500        | 33.41          | 14.21    | 47.62                | -20.58      | 68.20          | Peak              |
| 4  | * 9976.000      | 32.78          | 16.52    | 49.30                | -18.90      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5320MHz | Test Voltage         | AC 120V/60Hz |

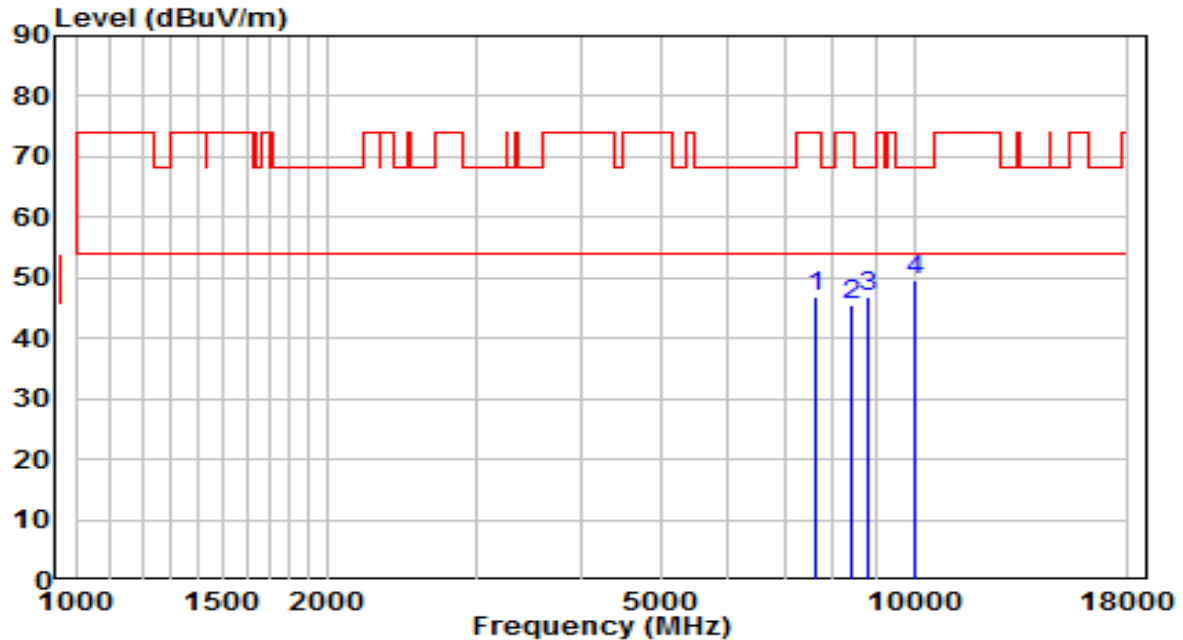


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7647.000        | 33.84          | 13.14    | 46.98                | -27.02      | 74.00          | Peak              |
| 2  | 8412.000        | 31.91          | 13.62    | 45.52                | -28.48      | 74.00          | Peak              |
| 3  | 8820.000        | 32.41          | 14.44    | 46.85                | -21.35      | 68.20          | Peak              |
| 4  | * 10044.000     | 32.69          | 16.74    | 49.43                | -18.77      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5320MHz | Test Voltage         | AC 120V/60Hz |

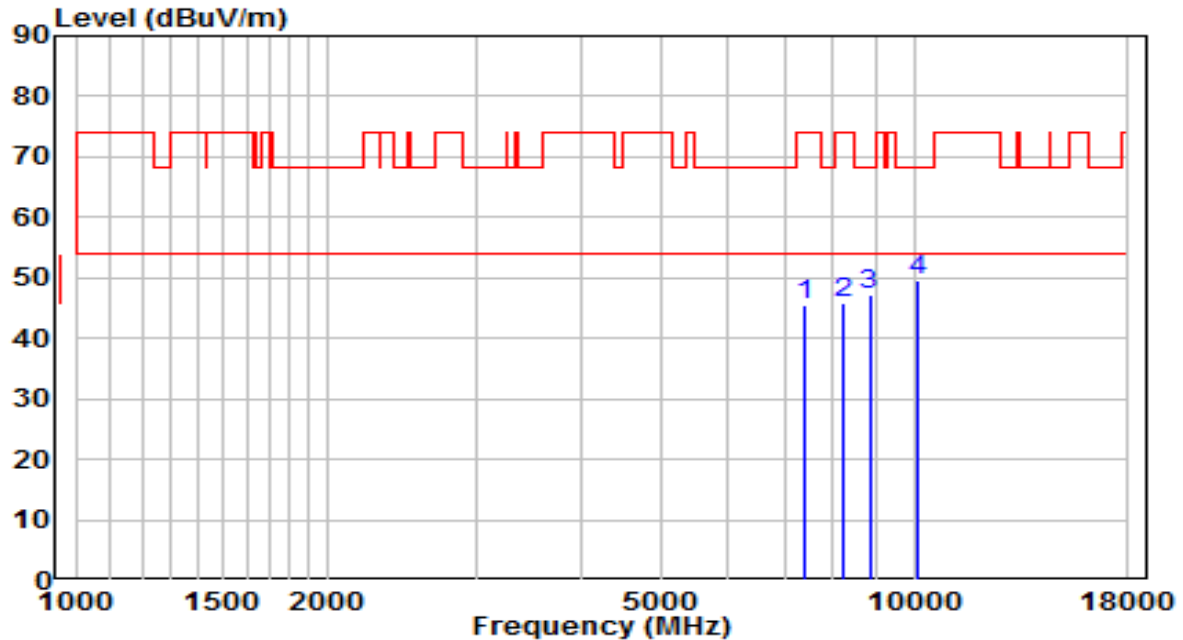


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7400.500        | 32.99          | 12.57    | 45.56                | -28.44      | 74.00          | Peak              |
| 2  | 8250.500        | 32.47          | 13.54    | 46.01                | -27.99      | 74.00          | Peak              |
| 3  | 8845.500        | 32.83          | 14.50    | 47.34                | -20.86      | 68.20          | Peak              |
| 4  | * 10129.000     | 32.62          | 17.08    | 49.70                | -18.50      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5500MHz | Test Voltage         | AC 120V/60Hz |

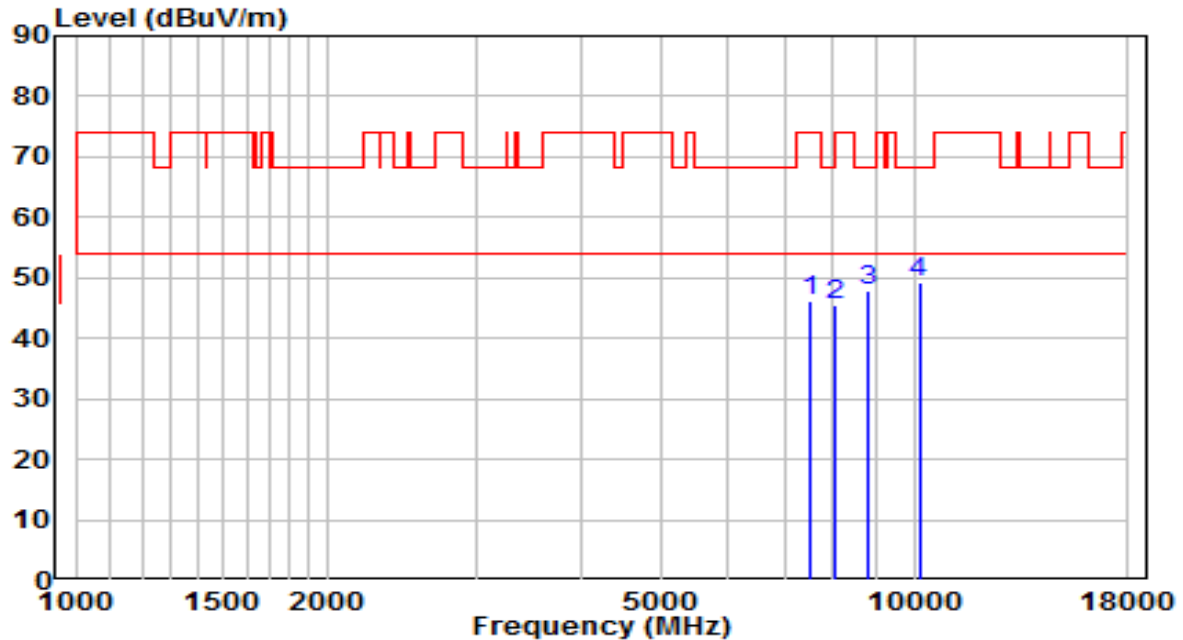


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7494.000        | 33.11          | 12.99    | 46.10                | -27.90      | 74.00          | Peak              |
| 2  | 8046.500        | 32.19          | 13.45    | 45.64                | -28.36      | 74.00          | Peak              |
| 3  | 8820.000        | 33.57          | 14.44    | 48.01                | -20.19      | 68.20          | Peak              |
| 4  | * 10137.500     | 32.12          | 17.11    | 49.24                | -18.96      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5500MHz | Test Voltage         | AC 120V/60Hz |

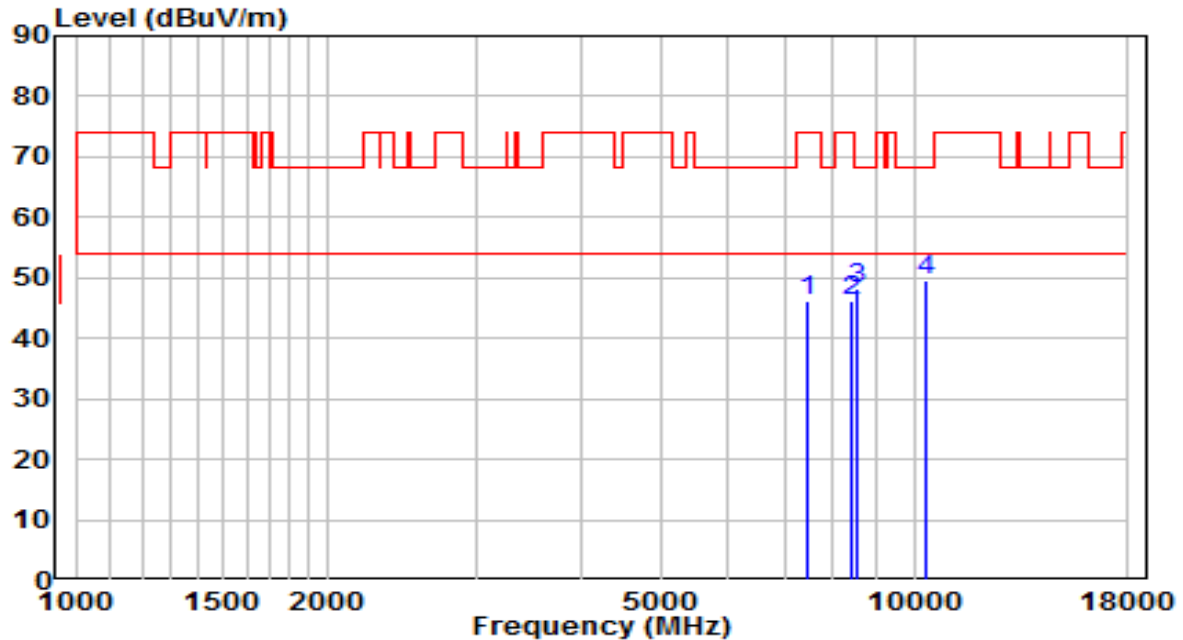


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7468.500        | 33.21          | 12.88    | 46.08                | -27.92      | 74.00          | Peak              |
| 2  | 8412.000        | 32.41          | 13.62    | 46.02                | -27.98      | 74.00          | Peak              |
| 3  | 8573.500        | 34.25          | 13.84    | 48.08                | -20.12      | 68.20          | Peak              |
| 4  | * 10341.500     | 31.70          | 17.93    | 49.63                | -18.57      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5580MHz | Test Voltage         | AC 120V/60Hz |

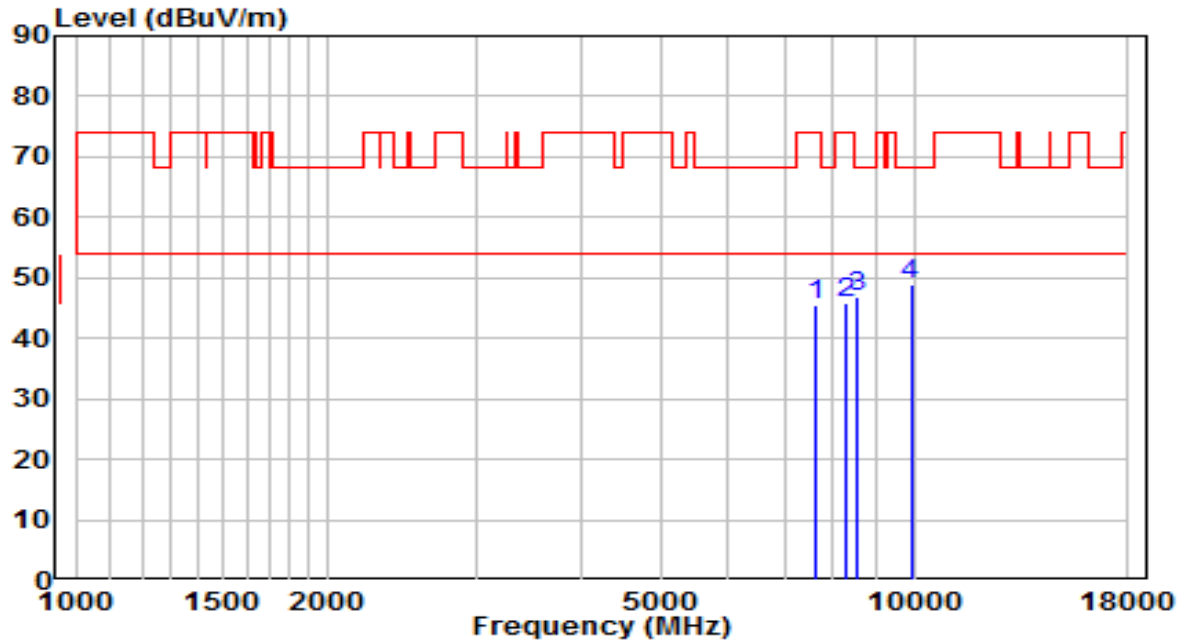


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7647.000        | 32.32          | 13.14    | 45.46                | -28.54      | 74.00          | Peak              |
| 2  | 8267.500        | 32.42          | 13.55    | 45.97                | -28.03      | 74.00          | Peak              |
| 3  | 8548.000        | 33.25          | 13.77    | 47.02                | -21.18      | 68.20          | Peak              |
| 4  | * 9908.000      | 32.67          | 16.41    | 49.07                | -19.13      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5580MHz | Test Voltage         | AC 120V/60Hz |

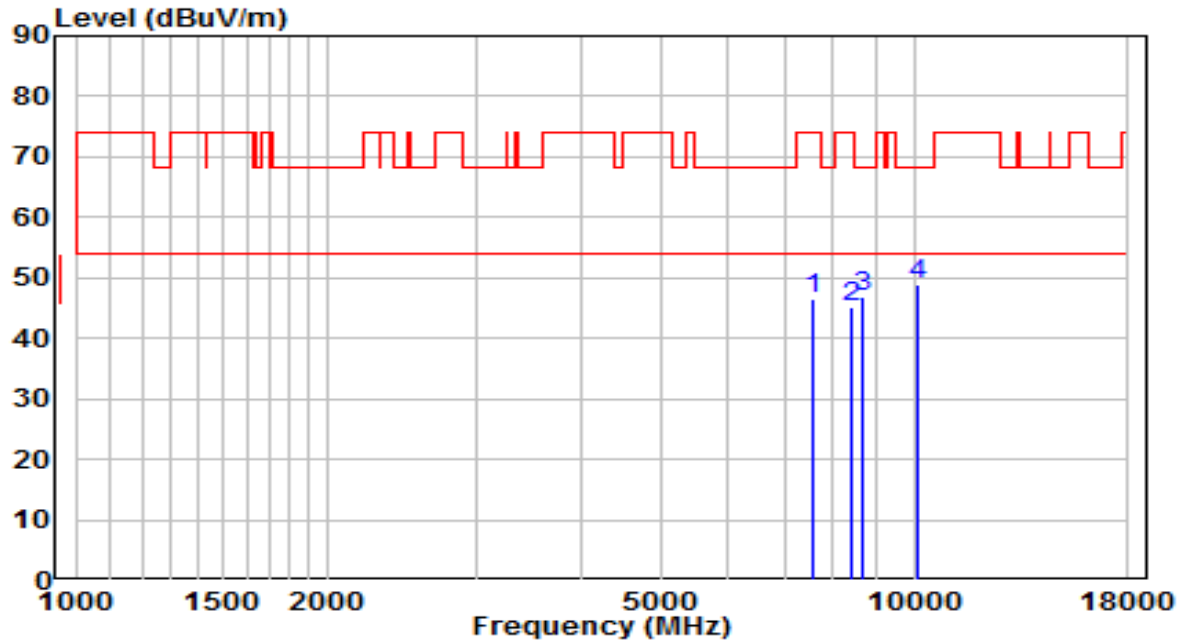


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7562.000        | 33.50          | 13.07    | 46.56                | -27.44      | 74.00          | Peak              |
| 2  | 8429.000        | 31.56          | 13.62    | 45.18                | -28.82      | 74.00          | Peak              |
| 3  | 8701.000        | 32.60          | 14.15    | 46.75                | -21.45      | 68.20          | Peak              |
| 4  | * 10129.000     | 31.78          | 17.08    | 48.86                | -19.34      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5700MHz | Test Voltage         | AC 120V/60Hz |

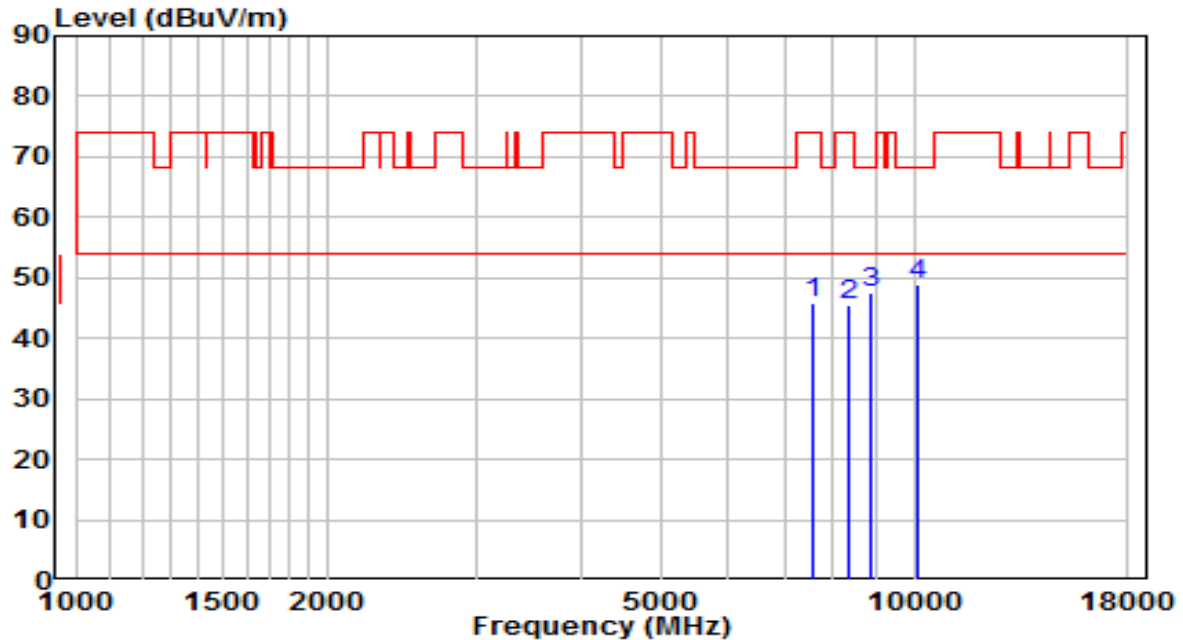


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7562.000        | 32.93          | 13.07    | 45.99                | -28.01      | 74.00          | Peak              |
| 2  | 8386.500        | 32.06          | 13.60    | 45.66                | -28.34      | 74.00          | Peak              |
| 3  | 8862.500        | 32.86          | 14.54    | 47.40                | -20.80      | 68.20          | Peak              |
| 4  | * 10129.000     | 31.66          | 17.08    | 48.74                | -19.46      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5700MHz | Test Voltage         | AC 120V/60Hz |

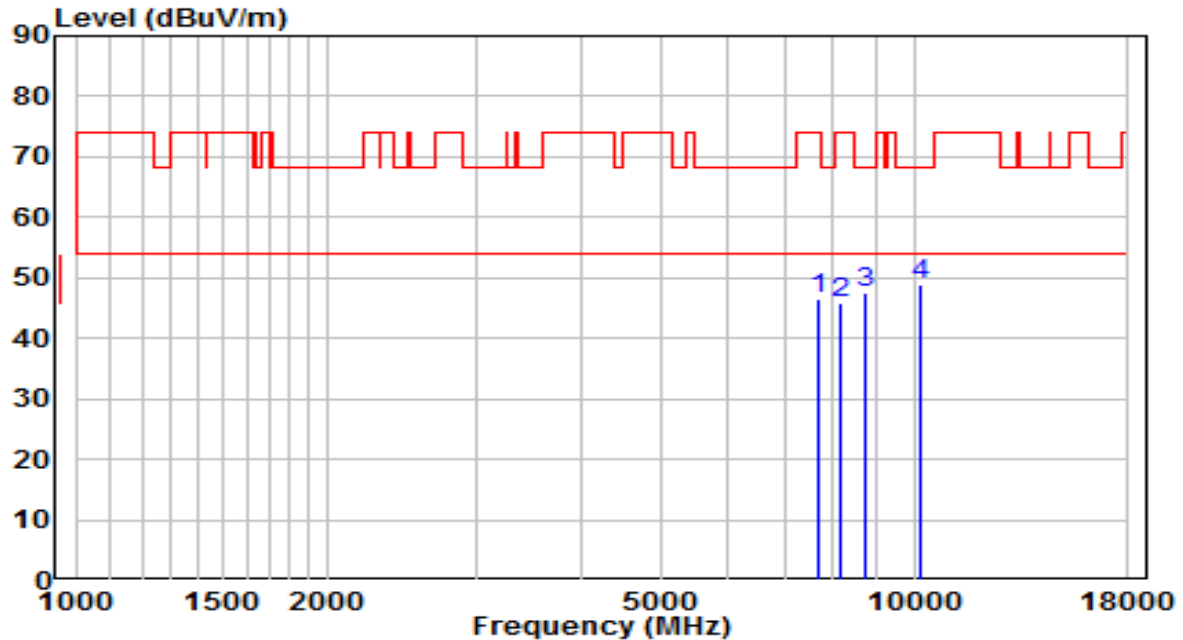


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7681.000        | 33.20          | 13.17    | 46.36                | -27.64      | 74.00          | Peak              |
| 2  | 8140.000        | 32.41          | 13.49    | 45.90                | -28.10      | 74.00          | Peak              |
| 3  | 8752.000        | 33.23          | 14.27    | 47.50                | -20.70      | 68.20          | Peak              |
| 4  | * 10154.500     | 31.86          | 17.18    | 49.04                | -19.16      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5720MHz | Test Voltage         | AC 120V/60Hz |

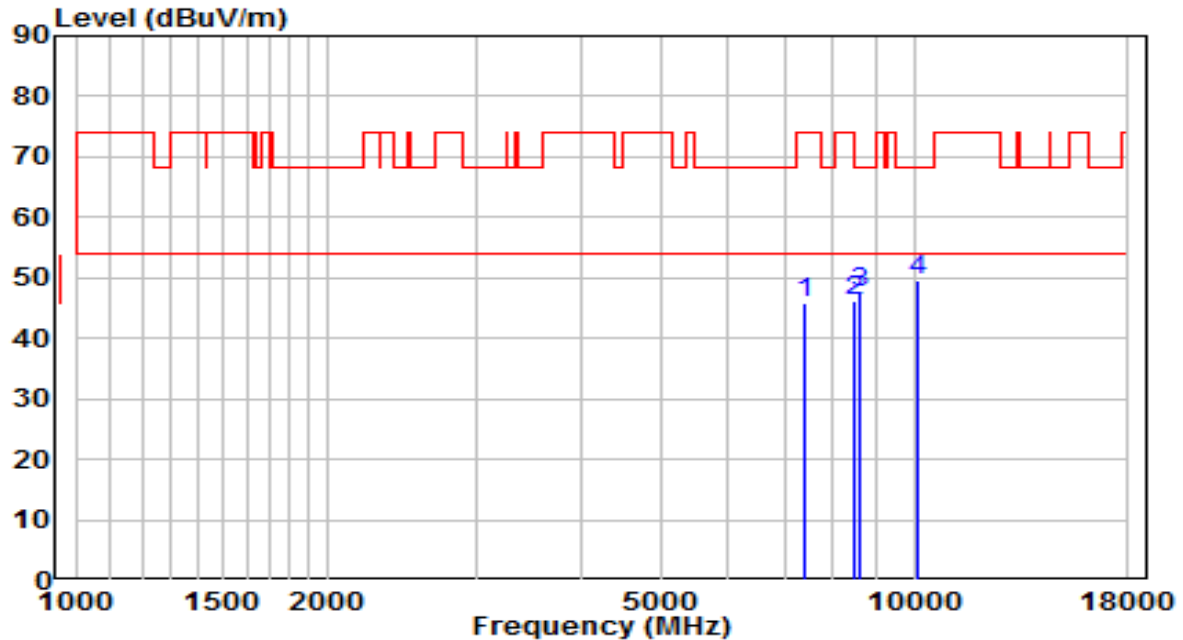


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7409.000        | 33.31          | 12.61    | 45.92                | -28.08      | 74.00          | Peak              |
| 2  | 8471.500        | 32.58          | 13.64    | 46.23                | -27.77      | 74.00          | Peak              |
| 3  | 8624.500        | 33.65          | 13.96    | 47.61                | -20.59      | 68.20          | Peak              |
| 4  | * 10120.500     | 32.48          | 17.04    | 49.53                | -18.67      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5720MHz | Test Voltage         | AC 120V/60Hz |

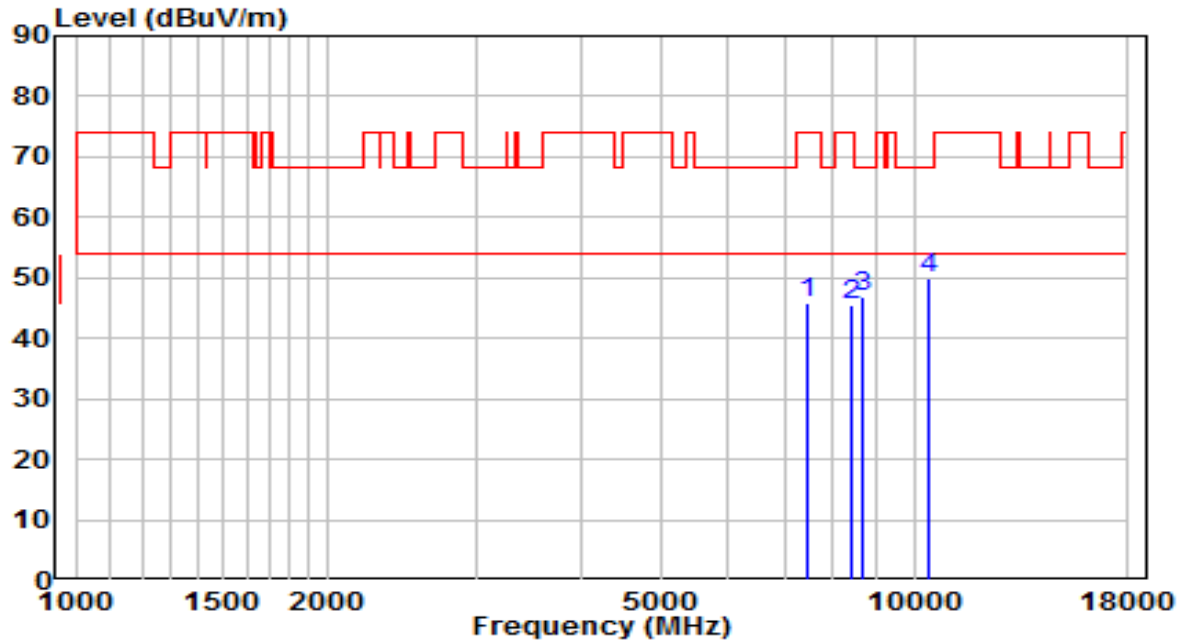


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7460.000        | 33.16          | 12.84    | 46.00                | -28.00      | 74.00          | Peak              |
| 2  | 8437.500        | 31.98          | 13.63    | 45.61                | -28.39      | 74.00          | Peak              |
| 3  | 8709.500        | 32.73          | 14.17    | 46.89                | -21.31      | 68.20          | Peak              |
| 4  | * 10384.000     | 31.66          | 18.10    | 49.76                | -18.44      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5745MHz | Test Voltage         | AC 120V/60Hz |

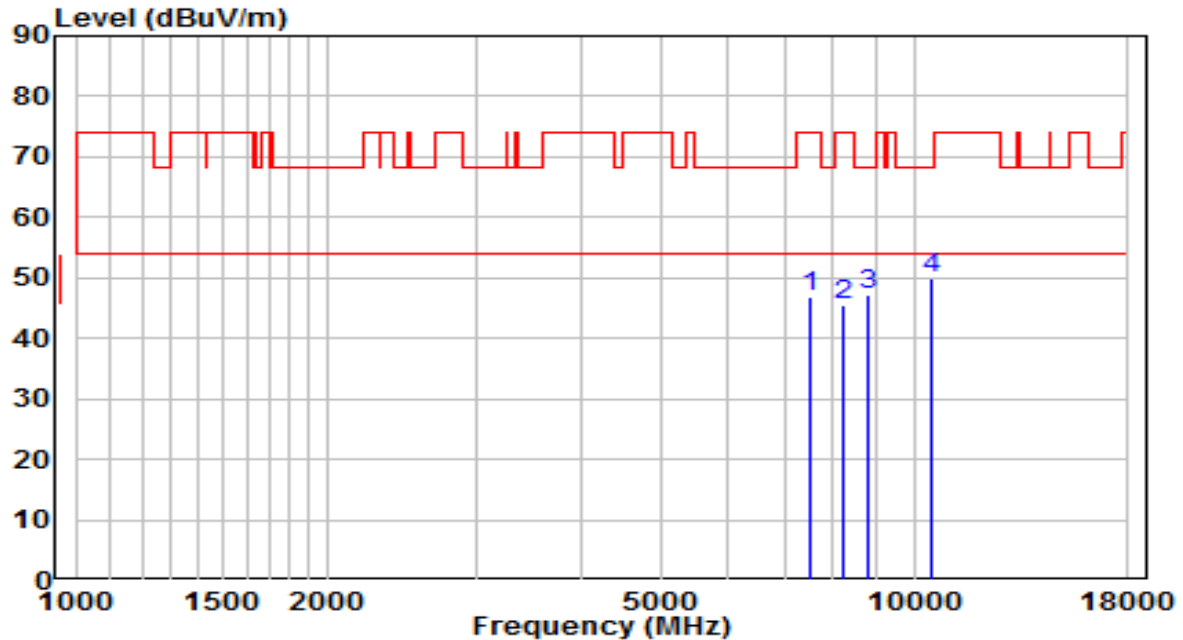


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7502.500        | 33.74          | 13.02    | 46.76                | -27.24      | 74.00          | Peak              |
| 2  | 8250.500        | 31.88          | 13.54    | 45.42                | -28.58      | 74.00          | Peak              |
| 3  | 8786.000        | 32.76          | 14.36    | 47.12                | -21.08      | 68.20          | Peak              |
| 4  | * 10460.500     | 31.57          | 18.41    | 49.98                | -18.22      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5745MHz | Test Voltage         | AC 120V/60Hz |

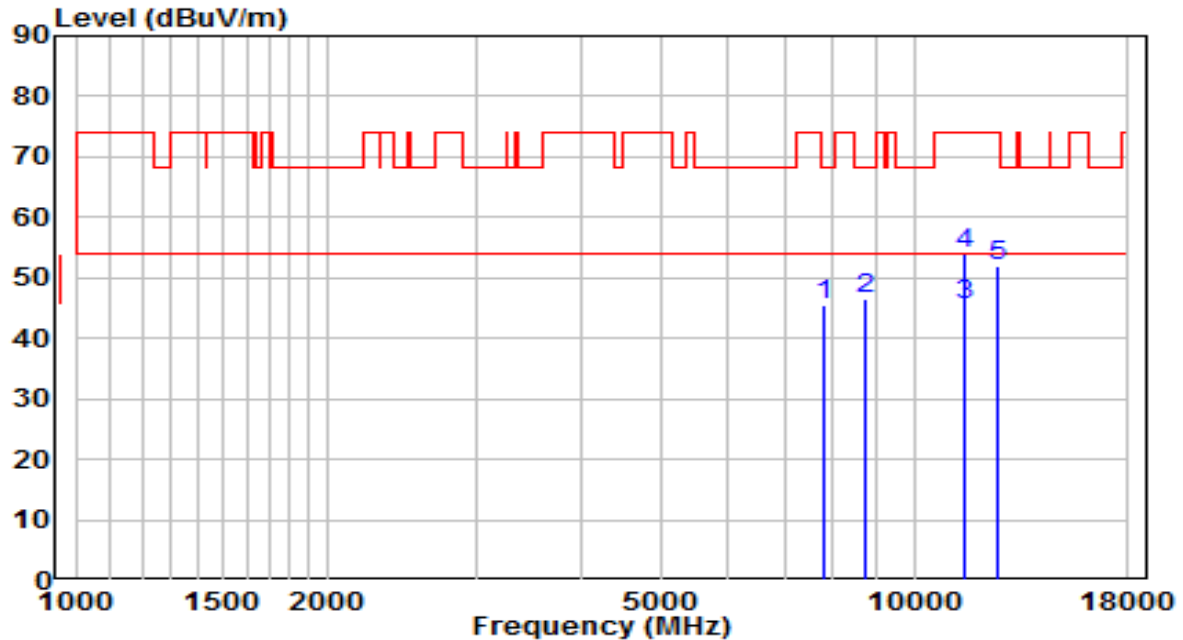


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7834.000        | 32.30          | 13.29    | 45.59                | -22.61      | 68.20          | Peak              |
| 2  | 8743.500        | 32.29          | 14.25    | 46.54                | -21.66      | 68.20          | Peak              |
| 3  | * 11487.830     | 25.64          | 20.03    | 45.67                | -8.33       | 54.00          | Average           |
| 4  | 11489.000       | 33.96          | 20.03    | 53.99                | -20.01      | 74.00          | Peak              |
| 5  | 12611.000       | 33.38          | 18.73    | 52.11                | -21.89      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5785MHz | Test Voltage         | AC 120V/60Hz |

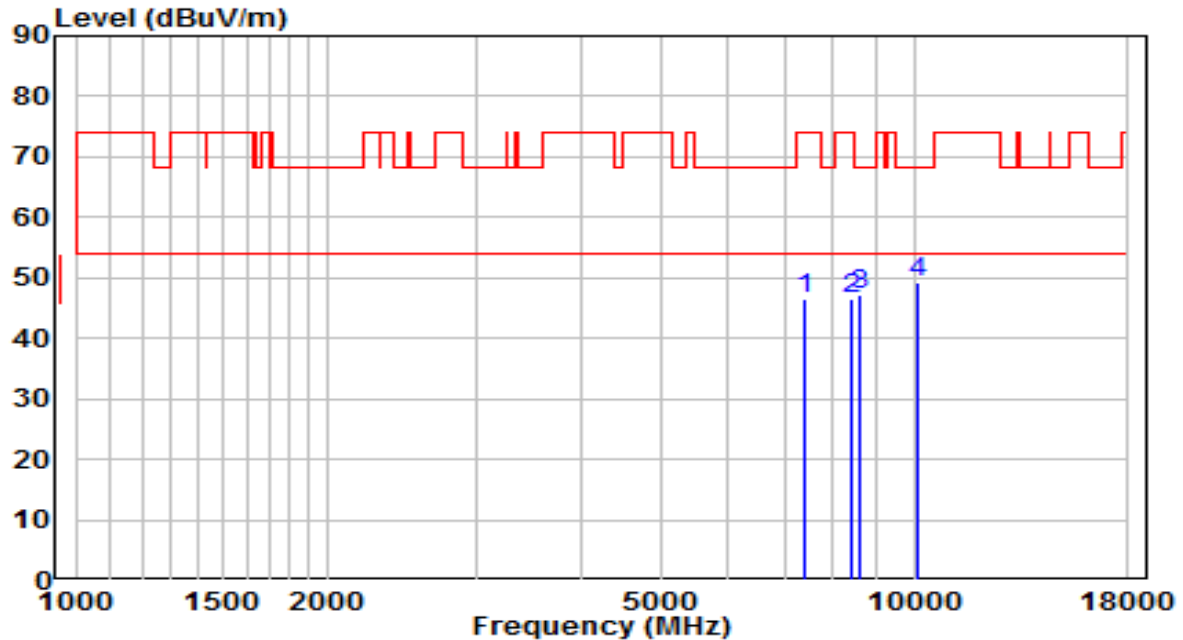


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7392.000        | 34.13          | 12.54    | 46.66                | -27.34      | 74.00          | Peak              |
| 2  | 8403.500        | 32.85          | 13.61    | 46.46                | -27.54      | 74.00          | Peak              |
| 3  | 8599.000        | 33.22          | 13.90    | 47.11                | -21.09      | 68.20          | Peak              |
| 4  | * 10129.000     | 32.03          | 17.08    | 49.11                | -19.09      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5785MHz | Test Voltage         | AC 120V/60Hz |

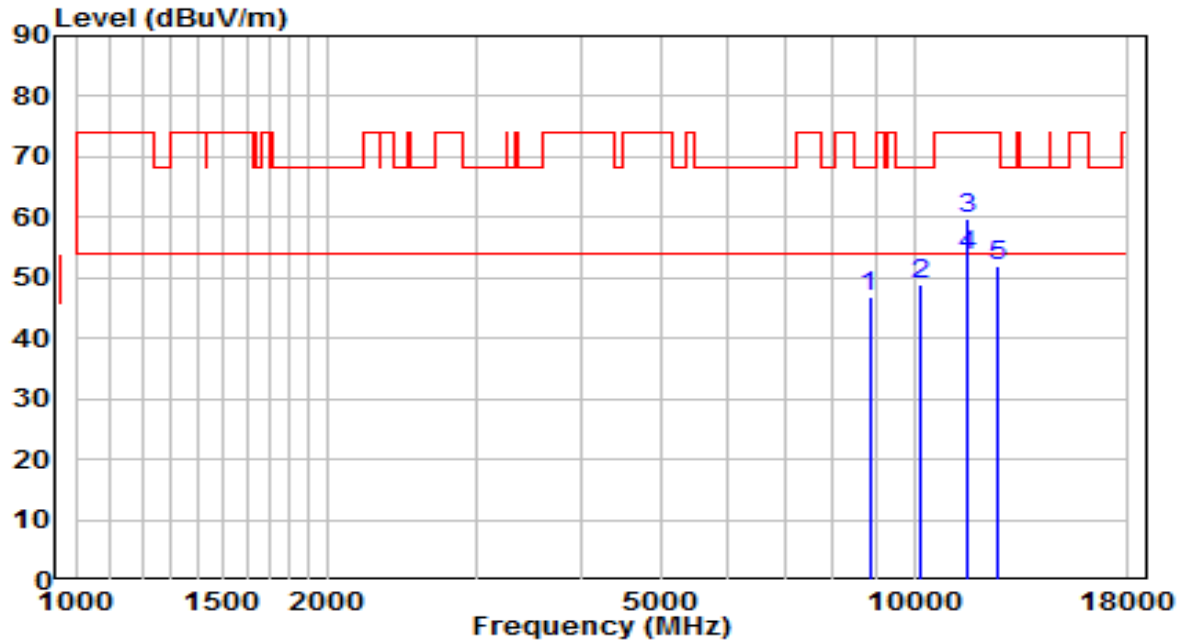


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8845.500        | 32.53          | 14.50    | 47.03                | -21.17      | 68.20          | Peak              |
| 2  | 10154.500       | 31.65          | 17.18    | 48.83                | -19.37      | 68.20          | Peak              |
| 3  | 11565.500       | 40.00          | 19.90    | 59.90                | -14.10      | 74.00          | Peak              |
| 4  | * 11568.000     | 33.63          | 19.90    | 53.53                | -0.47       | 54.00          | Average           |
| 5  | 12577.000       | 33.20          | 18.63    | 51.83                | -22.17      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5825MHz | Test Voltage         | AC 120V/60Hz |

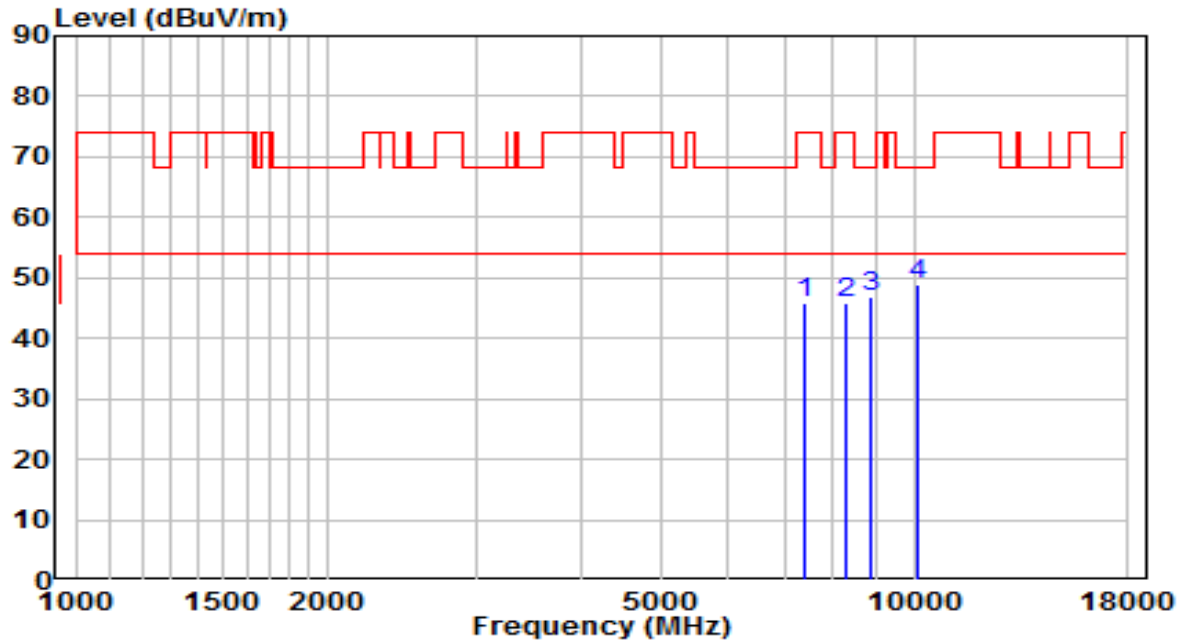


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7417.500        | 33.10          | 12.65    | 45.75                | -28.25      | 74.00          | Peak              |
| 2  | 8267.500        | 32.44          | 13.55    | 45.99                | -28.01      | 74.00          | Peak              |
| 3  | 8854.000        | 32.26          | 14.52    | 46.78                | -21.42      | 68.20          | Peak              |
| 4  | * 10095.000     | 32.01          | 16.94    | 48.95                | -19.25      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5825MHz | Test Voltage         | AC 120V/60Hz |

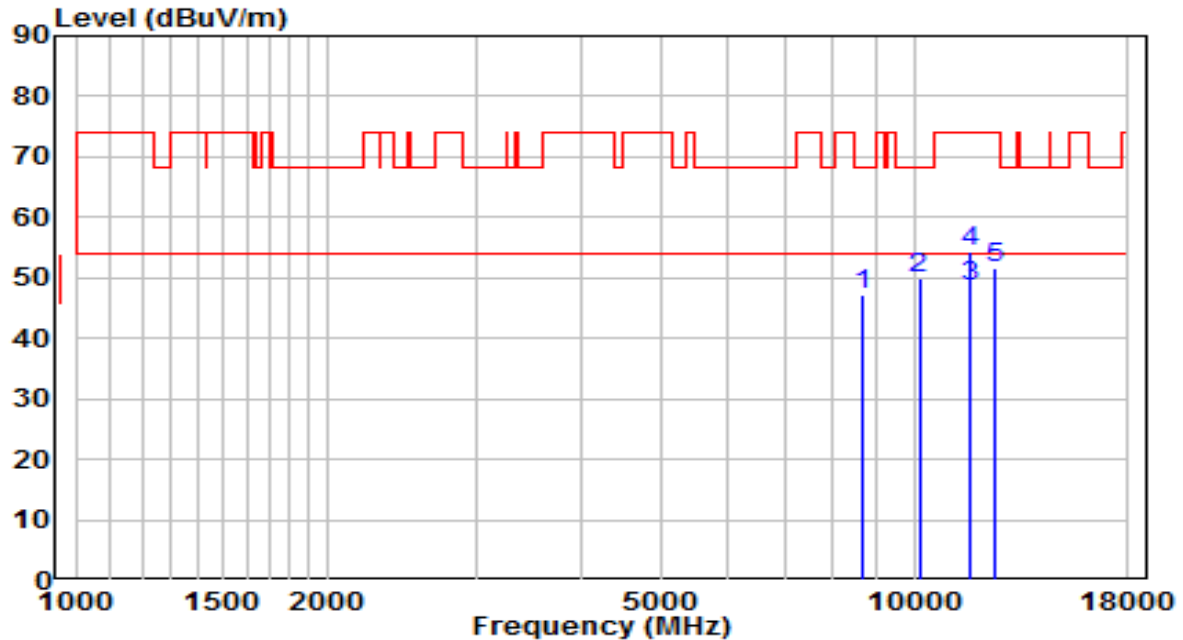


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8684.000        | 33.17          | 14.11    | 47.28                | -20.92      | 68.20          | Peak              |
| 2  | 10137.500       | 32.73          | 17.11    | 49.84                | -18.36      | 68.20          | Peak              |
| 3  | * 11647.540     | 28.76          | 19.72    | 48.48                | -5.52       | 54.00          | Average           |
| 4  | 11650.500       | 34.55          | 19.71    | 54.25                | -19.75      | 74.00          | Peak              |
| 5  | 12458.000       | 33.33          | 18.45    | 51.78                | -22.22      | 74.00          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5180MHz | Test Voltage         | AC 120V/60Hz |

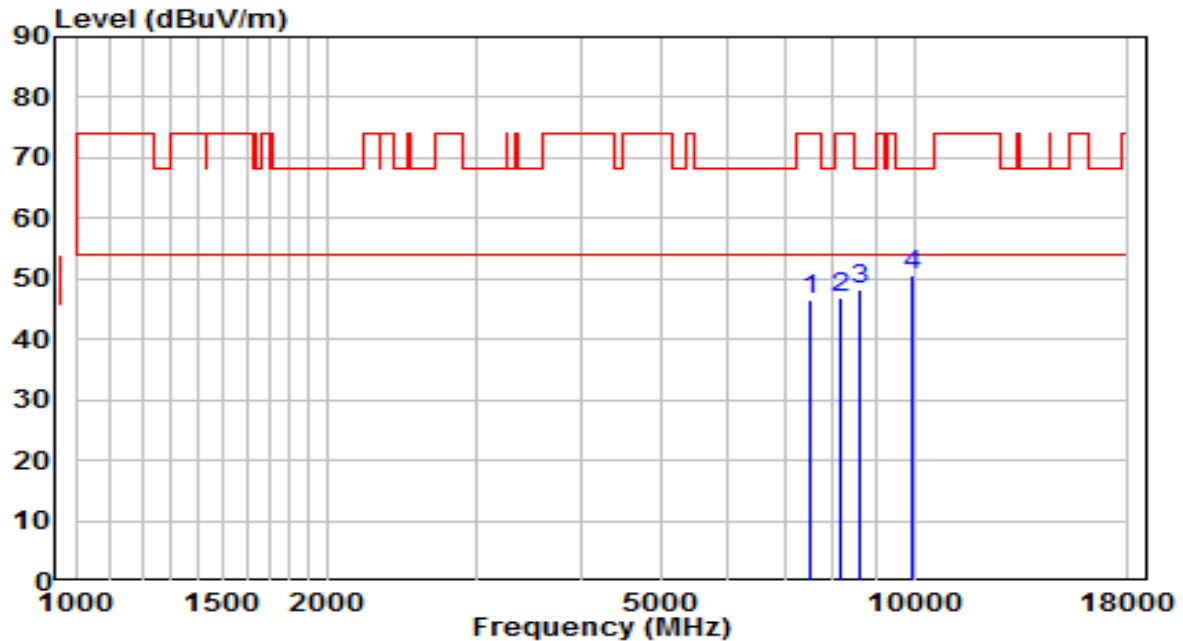


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7528.000        | 33.59          | 13.04    | 46.63                | -27.37      | 74.00          | Peak              |
| 2  | 8174.000        | 33.45          | 13.51    | 46.96                | -27.04      | 74.00          | Peak              |
| 3  | 8641.500        | 34.06          | 14.00    | 48.06                | -20.14      | 68.20          | Peak              |
| 4  | * 9916.500      | 34.10          | 16.42    | 50.52                | -17.68      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5180MHz | Test Voltage         | AC 120V/60Hz |

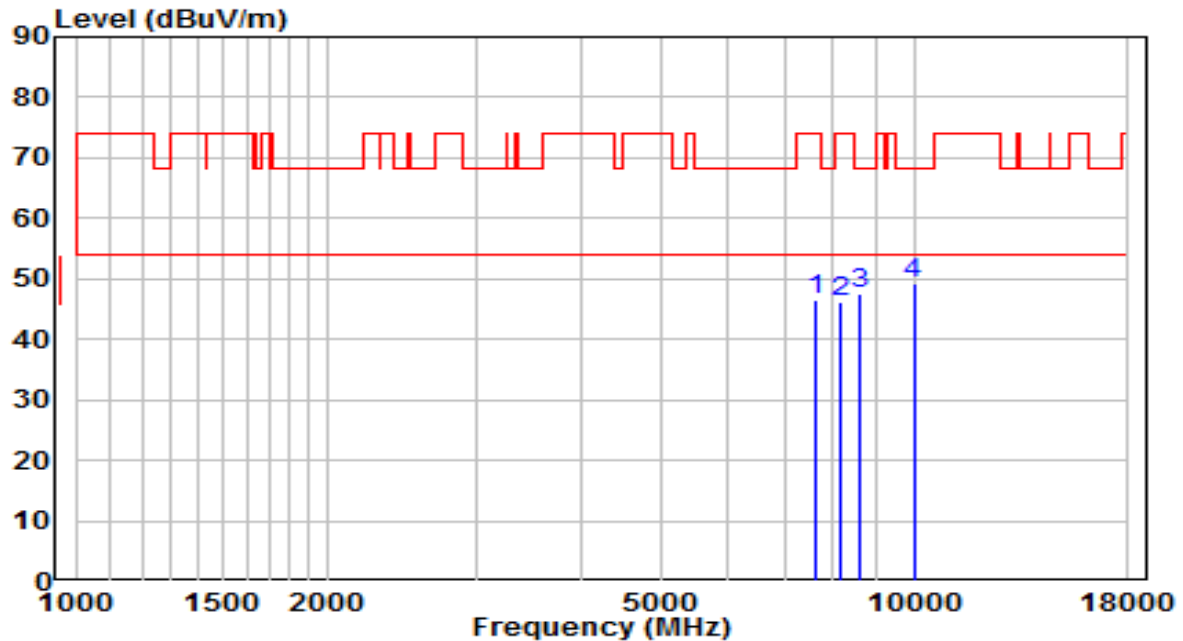


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7613.000        | 33.37          | 13.11    | 46.48                | -27.52      | 74.00          | Peak              |
| 2  | 8174.000        | 32.76          | 13.51    | 46.27                | -27.73      | 74.00          | Peak              |
| 3  | 8633.000        | 33.60          | 13.98    | 47.58                | -20.62      | 68.20          | Peak              |
| 4  | * 9984.500      | 32.82          | 16.53    | 49.36                | -18.84      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5220MHz | Test Voltage         | AC 120V/60Hz |

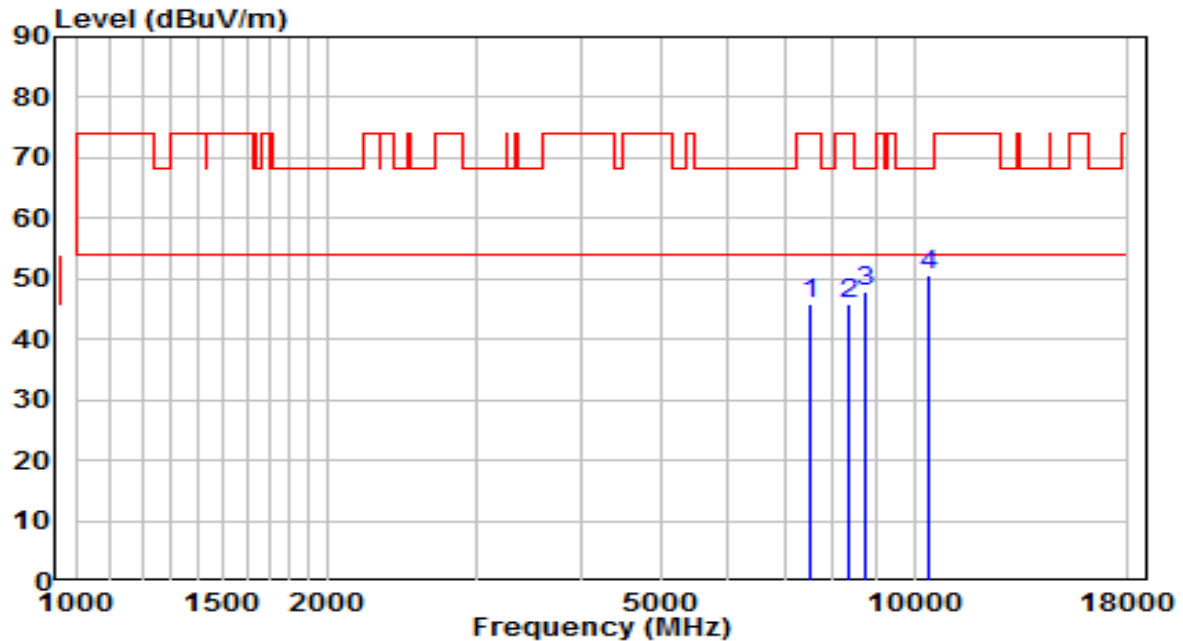


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7536.500        | 32.82          | 13.05    | 45.86                | -28.14      | 74.00          | Peak              |
| 2  | 8344.000        | 32.21          | 13.58    | 45.80                | -28.20      | 74.00          | Peak              |
| 3  | 8760.500        | 33.64          | 14.29    | 47.93                | -20.27      | 68.20          | Peak              |
| 4  | * 10435.000     | 32.28          | 18.31    | 50.59                | -17.61      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5220MHz | Test Voltage         | AC 120V/60Hz |

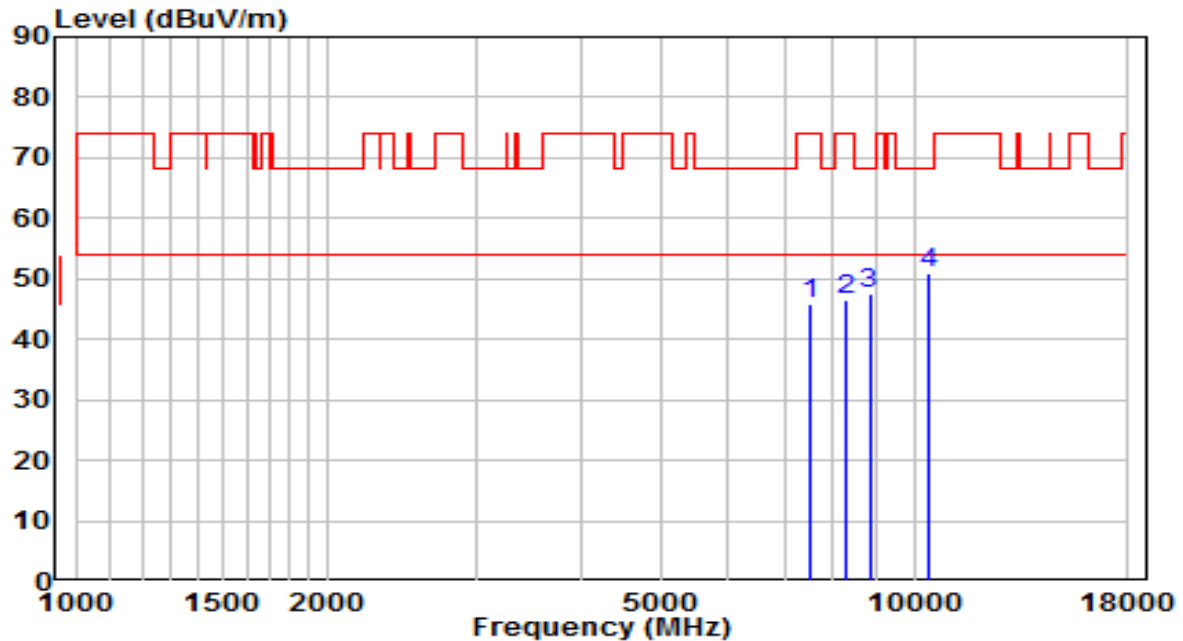


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7511.000        | 32.77          | 13.02    | 45.79                | -28.21      | 74.00          | Peak              |
| 2  | 8310.000        | 32.95          | 13.57    | 46.52                | -27.48      | 74.00          | Peak              |
| 3  | 8845.500        | 32.88          | 14.50    | 47.38                | -20.82      | 68.20          | Peak              |
| 4  | * 10443.500     | 32.64          | 18.34    | 50.99                | -17.21      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5240MHz | Test Voltage         | AC 120V/60Hz |

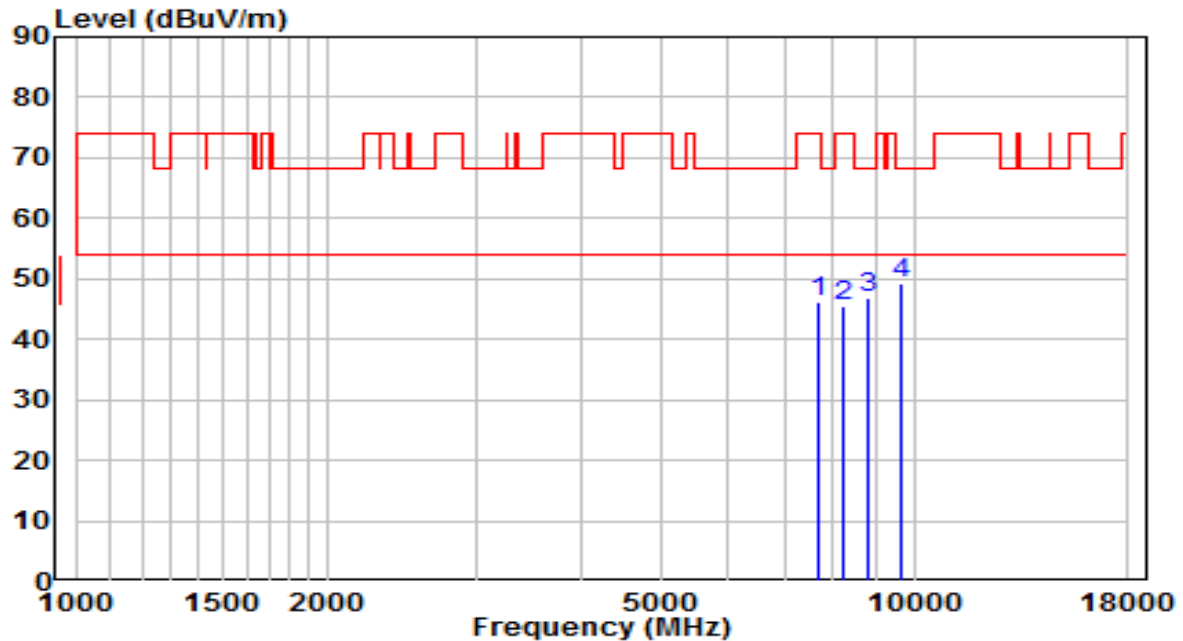


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7706.500        | 33.12          | 13.19    | 46.31                | -27.69      | 74.00          | Peak              |
| 2  | 8259.000        | 32.01          | 13.55    | 45.56                | -28.44      | 74.00          | Peak              |
| 3  | 8803.000        | 32.49          | 14.40    | 46.89                | -21.31      | 68.20          | Peak              |
| 4  | * 9619.000      | 33.25          | 15.92    | 49.17                | -19.03      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5240MHz | Test Voltage         | AC 120V/60Hz |

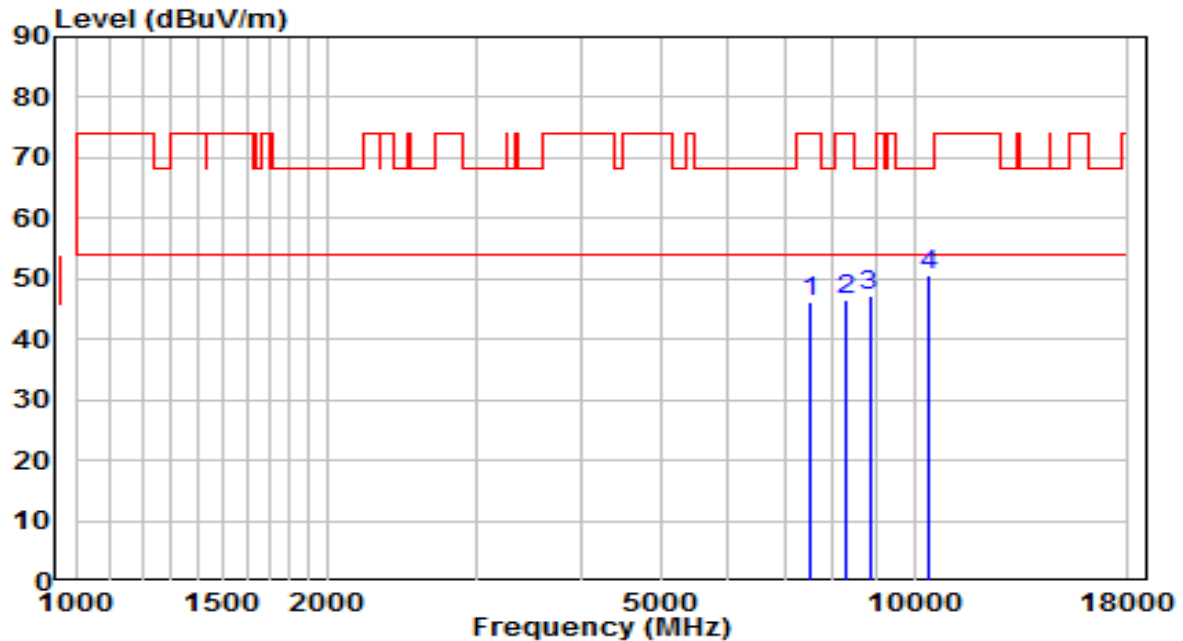


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7528.000        | 33.19          | 13.04    | 46.23                | -27.77      | 74.00          | Peak              |
| 2  | 8267.500        | 32.97          | 13.55    | 46.52                | -27.48      | 74.00          | Peak              |
| 3  | 8845.500        | 32.54          | 14.50    | 47.04                | -21.16      | 68.20          | Peak              |
| 4  | * 10401.000     | 32.29          | 18.17    | 50.46                | -17.74      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5260MHz | Test Voltage         | AC 120V/60Hz |

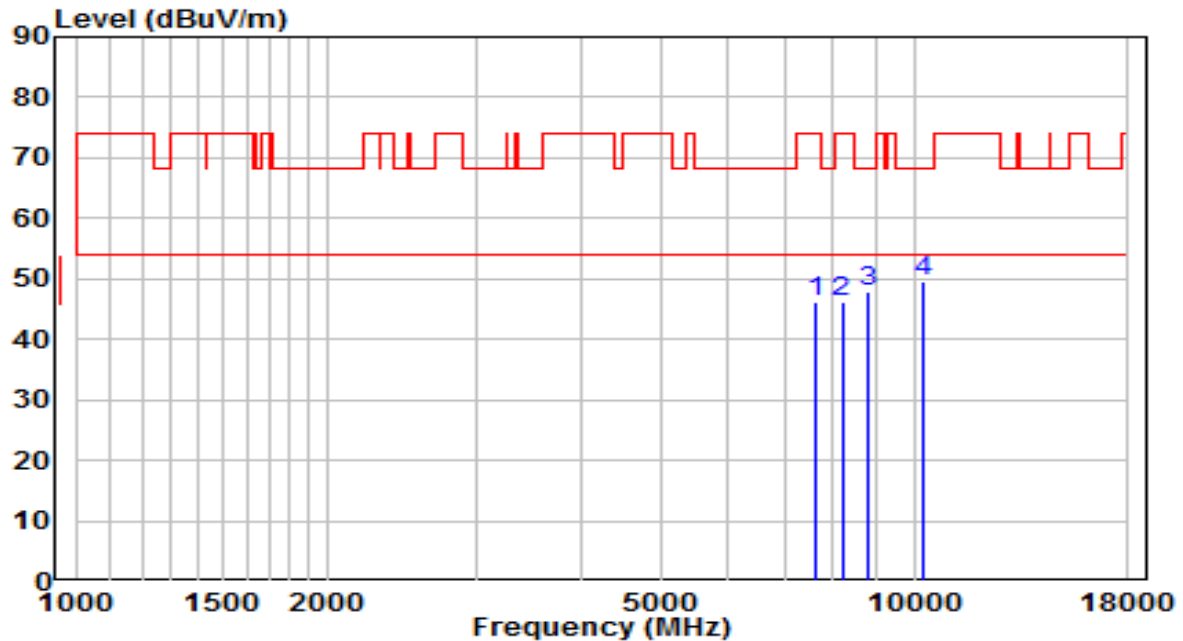


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7630.000        | 32.94          | 13.12    | 46.06                | -27.94      | 74.00          | Peak              |
| 2  | 8199.500        | 32.60          | 13.52    | 46.12                | -27.88      | 74.00          | Peak              |
| 3  | 8786.000        | 33.43          | 14.36    | 47.78                | -20.42      | 68.20          | Peak              |
| 4  | * 10222.500     | 31.97          | 17.45    | 49.43                | -18.77      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5260MHz | Test Voltage         | AC 120V/60Hz |

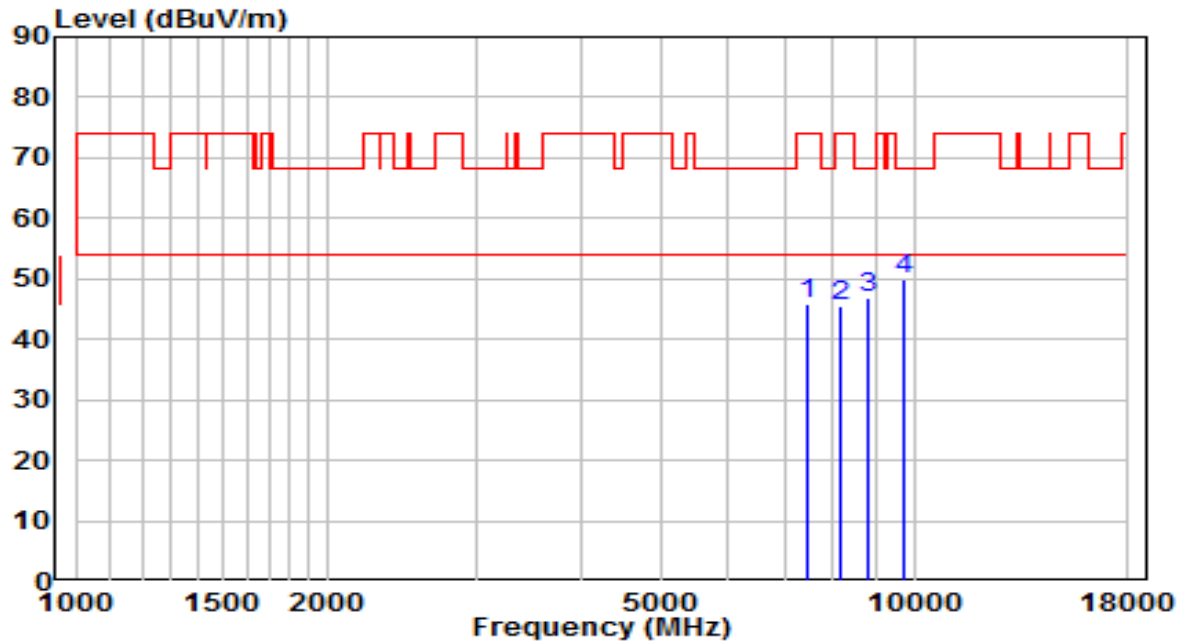


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7477.000        | 33.08          | 12.91    | 45.99                | -28.01      | 74.00          | Peak              |
| 2  | 8165.500        | 32.13          | 13.50    | 45.63                | -28.37      | 74.00          | Peak              |
| 3  | 8837.000        | 32.41          | 14.48    | 46.89                | -21.31      | 68.20          | Peak              |
| 4  | * 9746.500      | 33.87          | 16.13    | 50.00                | -18.20      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5300MHz | Test Voltage         | AC 120V/60Hz |

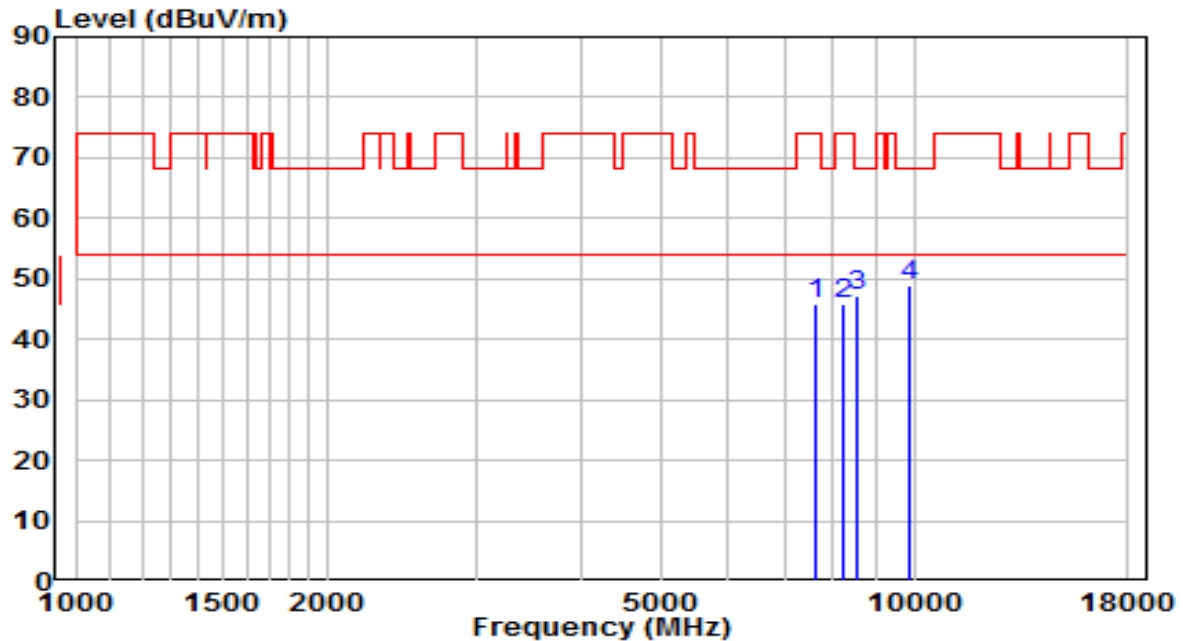


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7630.000        | 32.74          | 13.12    | 45.87                | -28.13      | 74.00          | Peak              |
| 2  | 8242.000        | 32.36          | 13.54    | 45.89                | -28.11      | 74.00          | Peak              |
| 3  | 8556.500        | 33.33          | 13.79    | 47.12                | -21.08      | 68.20          | Peak              |
| 4  | * 9891.000      | 32.53          | 16.38    | 48.91                | -19.29      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5300MHz | Test Voltage         | AC 120V/60Hz |

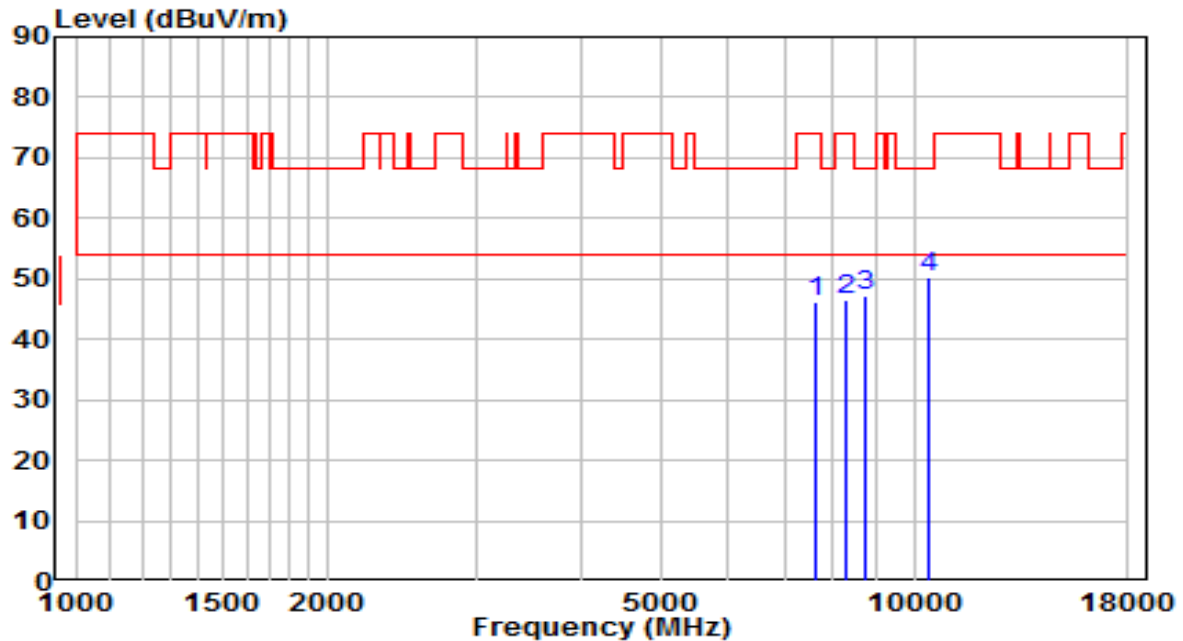


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 33.01          | 13.14    | 46.15                | -27.85      | 74.00          | Peak              |
| 2  | 8301.500        | 32.84          | 13.57    | 46.40                | -27.60      | 74.00          | Peak              |
| 3  | 8752.000        | 32.82          | 14.27    | 47.10                | -21.10      | 68.20          | Peak              |
| 4  | * 10443.500     | 31.76          | 18.34    | 50.10                | -18.10      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5320MHz | Test Voltage         | AC 120V/60Hz |

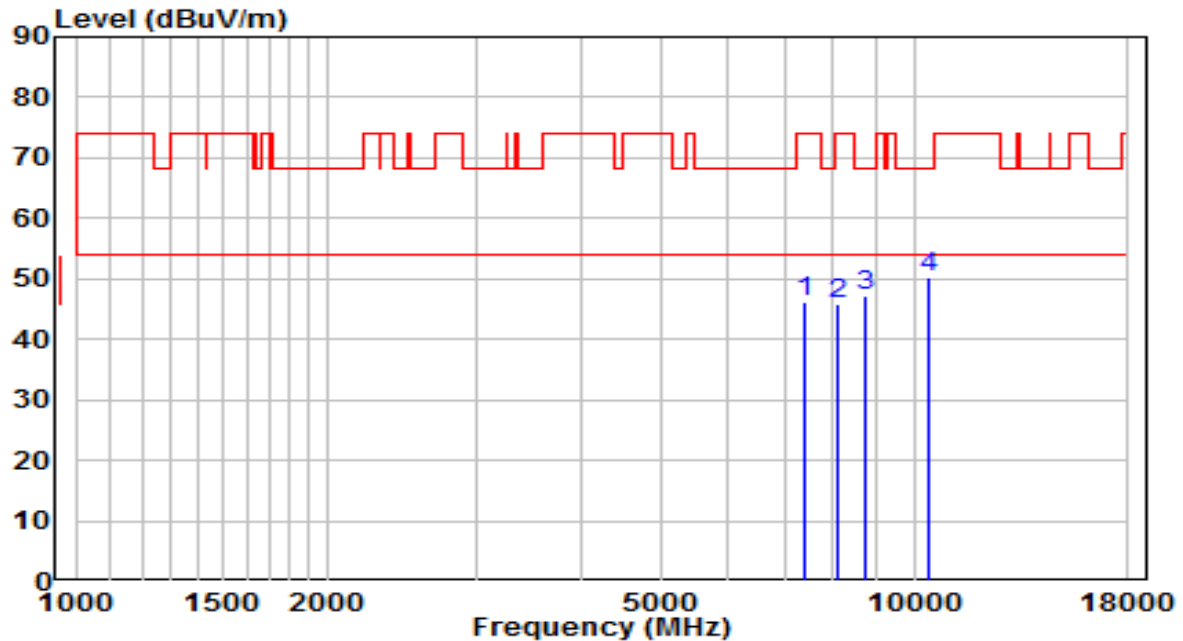


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7426.000        | 33.60          | 12.69    | 46.29                | -27.71      | 74.00          | Peak              |
| 2  | 8123.000        | 32.29          | 13.49    | 45.77                | -28.23      | 74.00          | Peak              |
| 3  | 8726.500        | 32.89          | 14.21    | 47.10                | -21.10      | 68.20          | Peak              |
| 4  | * 10384.000     | 32.00          | 18.10    | 50.10                | -18.10      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5320MHz | Test Voltage         | AC 120V/60Hz |

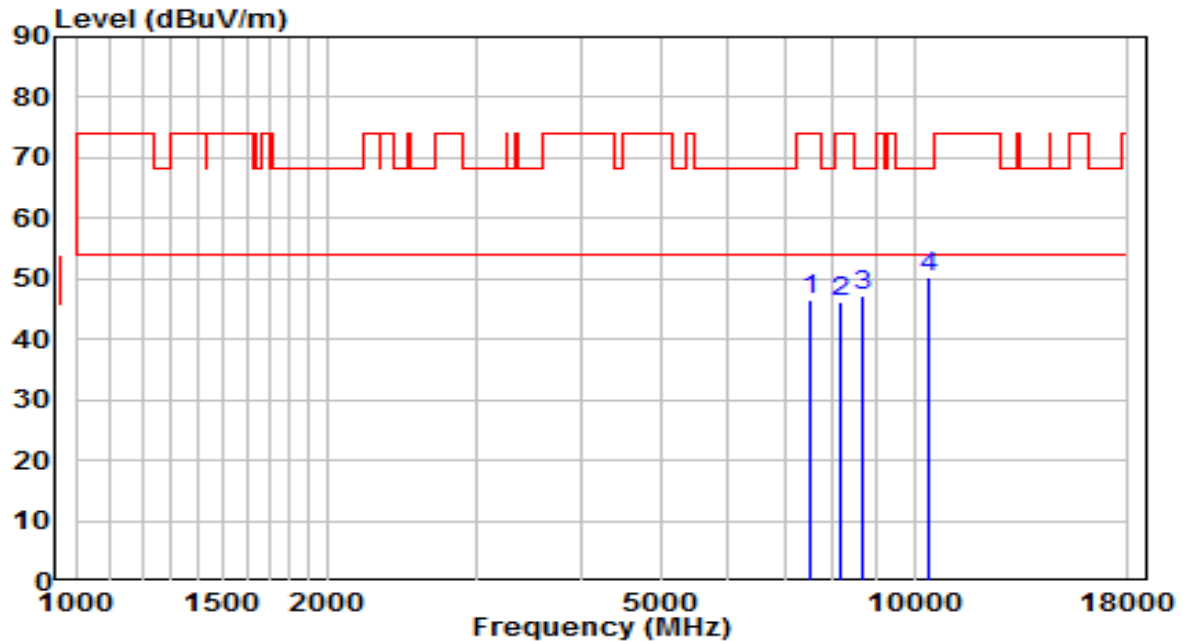


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7519.500        | 33.66          | 13.03    | 46.69                | -27.31      | 74.00          | Peak              |
| 2  | 8157.000        | 32.58          | 13.50    | 46.08                | -27.92      | 74.00          | Peak              |
| 3  | 8701.000        | 33.02          | 14.15    | 47.17                | -21.03      | 68.20          | Peak              |
| 4  | * 10426.500     | 32.15          | 18.27    | 50.42                | -17.78      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5500MHz | Test Voltage         | AC 120V/60Hz |

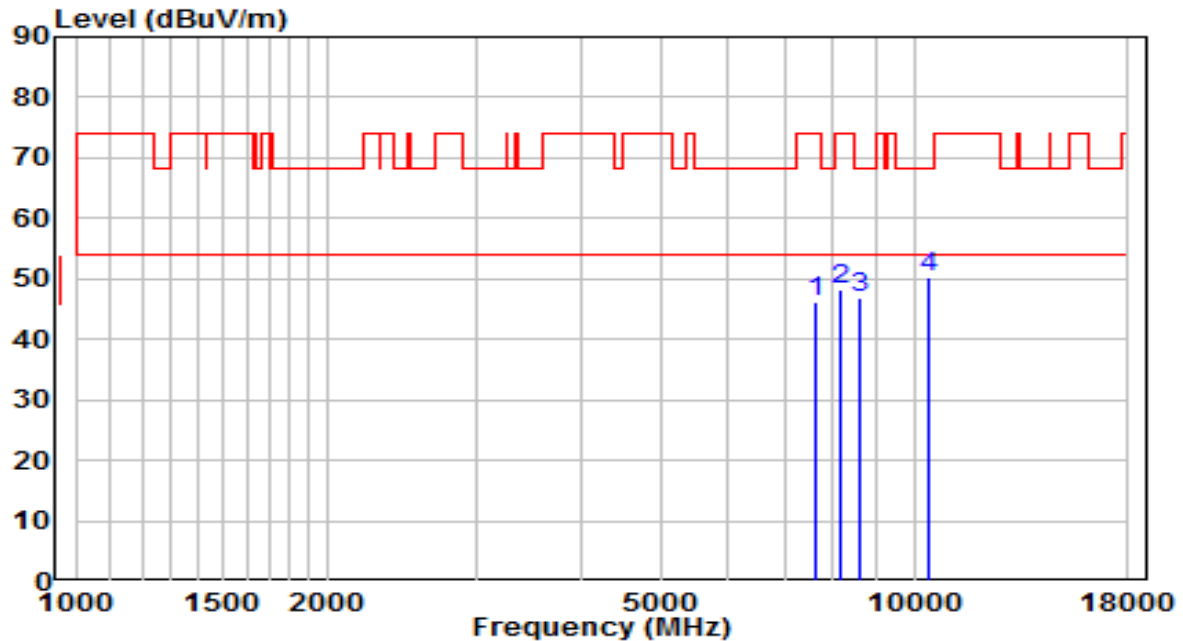


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7638.500        | 33.16          | 13.13    | 46.29                | -27.71      | 74.00          | Peak              |
| 2  | 8174.000        | 34.58          | 13.51    | 48.08                | -25.92      | 74.00          | Peak              |
| 3  | 8599.000        | 32.93          | 13.90    | 46.83                | -21.37      | 68.20          | Peak              |
| 4  | * 10392.500     | 31.99          | 18.14    | 50.13                | -18.07      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5500MHz | Test Voltage         | AC 120V/60Hz |

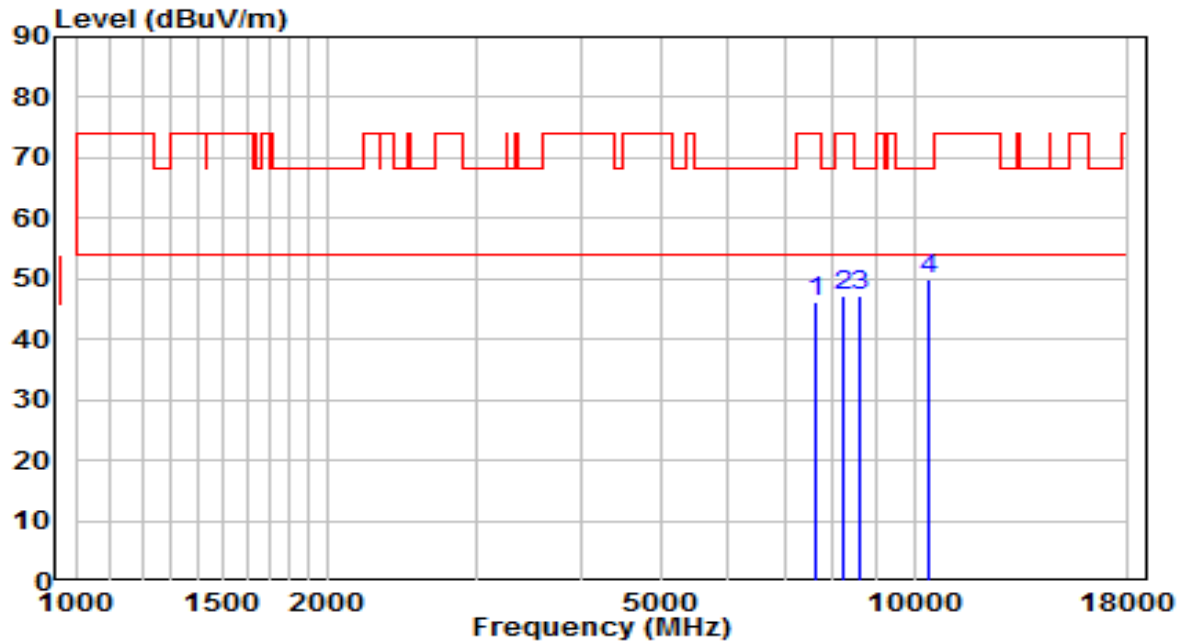


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 33.13          | 13.14    | 46.27                | -27.73      | 74.00          | Peak              |
| 2  | 8259.000        | 33.52          | 13.55    | 47.07                | -26.93      | 74.00          | Peak              |
| 3  | 8641.500        | 33.11          | 14.00    | 47.11                | -21.09      | 68.20          | Peak              |
| 4  | * 10409.500     | 31.59          | 18.21    | 49.80                | -18.40      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5580MHz | Test Voltage         | AC 120V/60Hz |

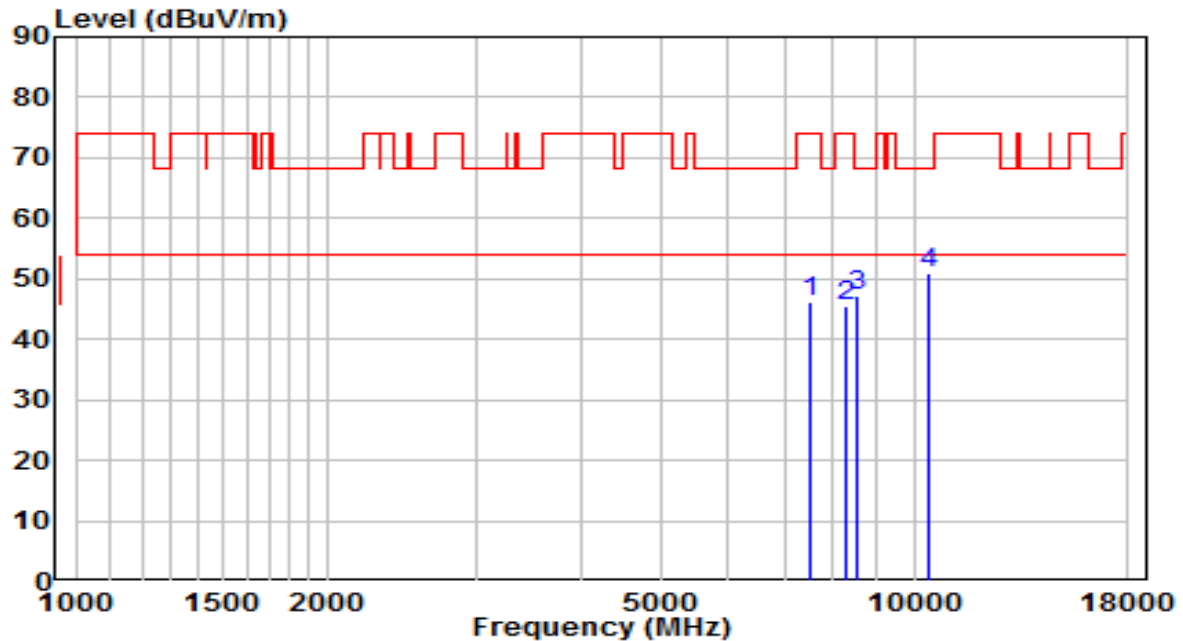


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7536.500        | 33.04          | 13.05    | 46.08                | -27.92      | 74.00          | Peak              |
| 2  | 8276.000        | 32.01          | 13.55    | 45.56                | -28.44      | 74.00          | Peak              |
| 3  | 8548.000        | 33.39          | 13.77    | 47.16                | -21.04      | 68.20          | Peak              |
| 4  | * 10443.500     | 32.45          | 18.34    | 50.80                | -17.40      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5580MHz | Test Voltage         | AC 120V/60Hz |

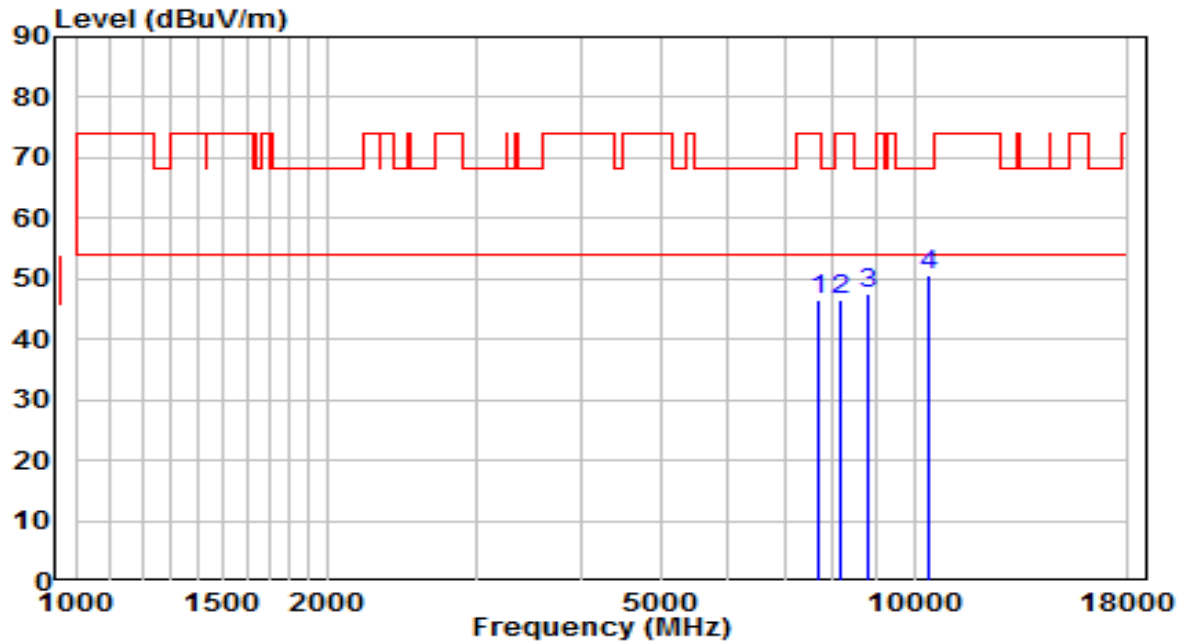


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7672.500        | 33.43          | 13.16    | 46.59                | -27.41      | 74.00          | Peak              |
| 2  | 8174.000        | 32.90          | 13.51    | 46.41                | -27.59      | 74.00          | Peak              |
| 3  | 8837.000        | 33.14          | 14.48    | 47.63                | -20.57      | 68.20          | Peak              |
| 4  | * 10418.000     | 32.30          | 18.24    | 50.54                | -17.66      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5700MHz | Test Voltage         | AC 120V/60Hz |

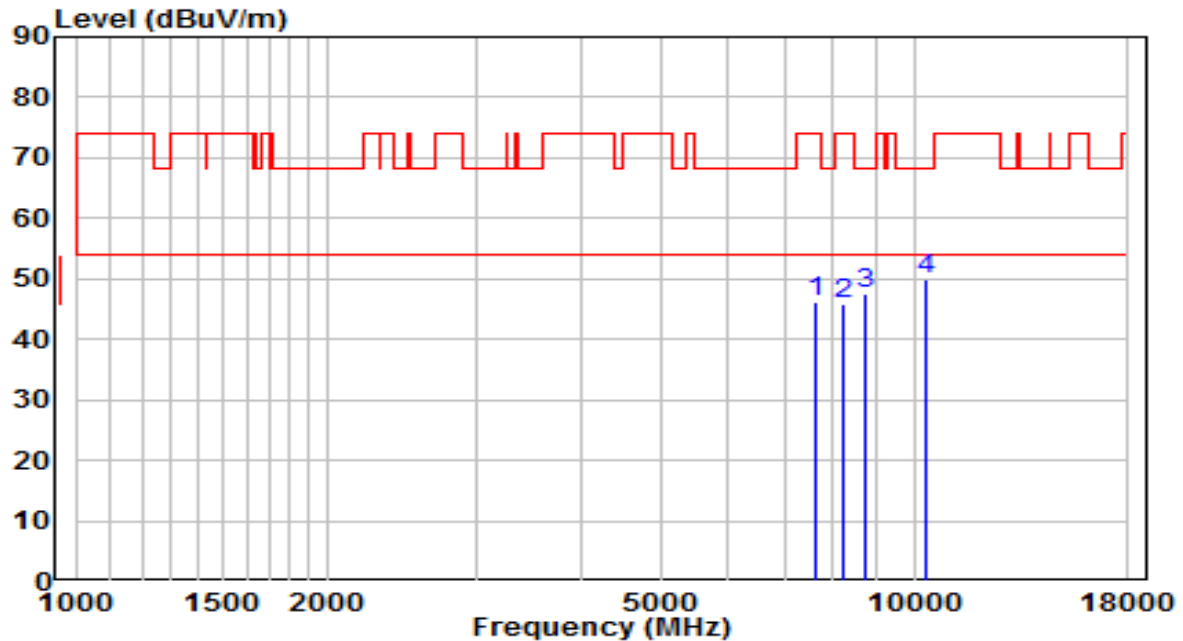


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 32.91          | 13.14    | 46.05                | -27.95      | 74.00          | Peak              |
| 2  | 8259.000        | 32.14          | 13.55    | 45.69                | -28.31      | 74.00          | Peak              |
| 3  | 8760.500        | 33.31          | 14.29    | 47.61                | -20.59      | 68.20          | Peak              |
| 4  | * 10341.500     | 31.95          | 17.93    | 49.88                | -18.32      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5700MHz | Test Voltage         | AC 120V/60Hz |

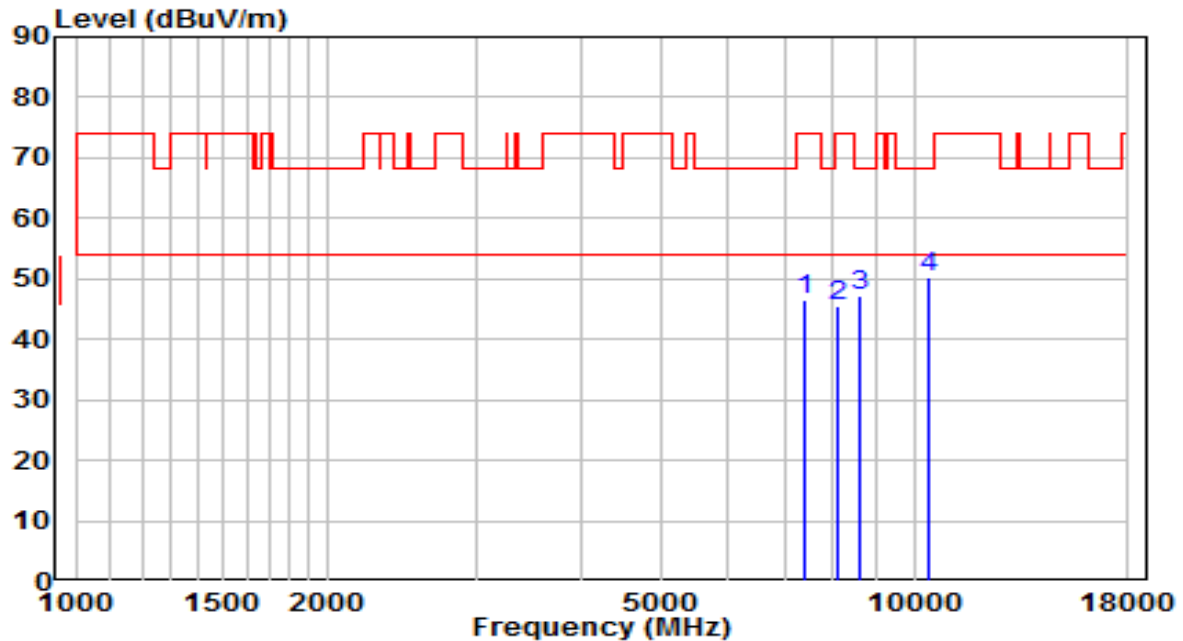


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7409.000        | 33.81          | 12.61    | 46.43                | -27.57      | 74.00          | Peak              |
| 2  | 8097.500        | 32.15          | 13.47    | 45.62                | -28.38      | 74.00          | Peak              |
| 3  | 8616.000        | 33.39          | 13.94    | 47.33                | -20.87      | 68.20          | Peak              |
| 4  | * 10409.500     | 31.90          | 18.21    | 50.11                | -18.09      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5720MHz | Test Voltage         | AC 120V/60Hz |

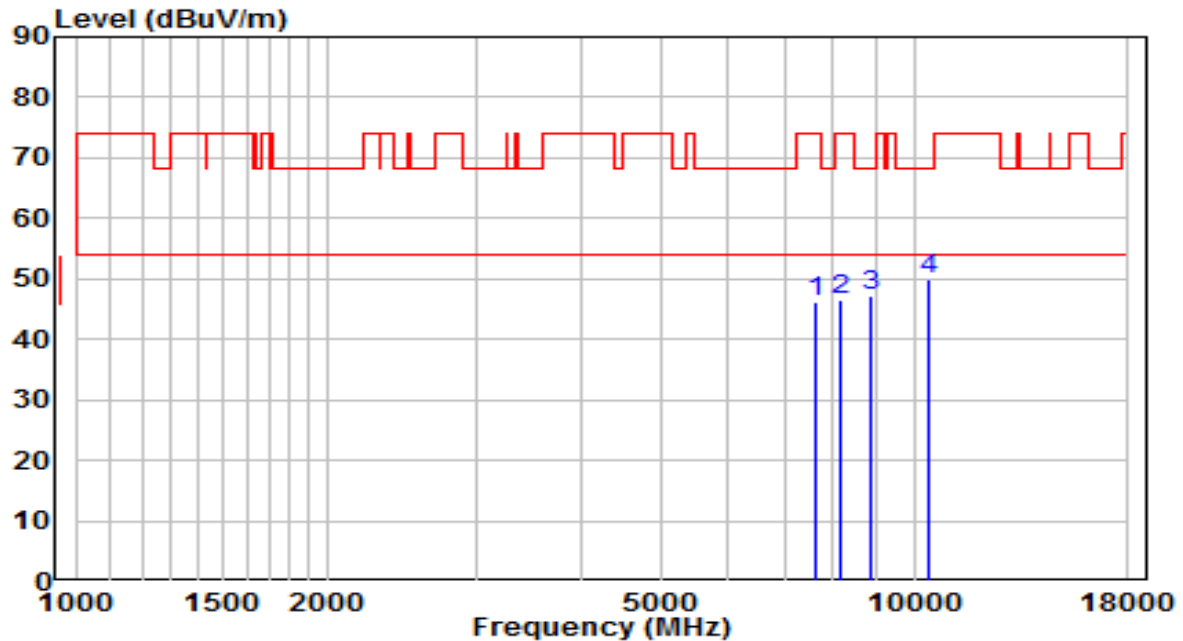


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7638.500        | 33.14          | 13.13    | 46.27                | -27.73      | 74.00          | Peak              |
| 2  | 8182.500        | 33.00          | 13.51    | 46.51                | -27.49      | 74.00          | Peak              |
| 3  | 8888.000        | 32.45          | 14.61    | 47.06                | -21.14      | 68.20          | Peak              |
| 4  | * 10384.000     | 31.74          | 18.10    | 49.84                | -18.36      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5720MHz | Test Voltage         | AC 120V/60Hz |

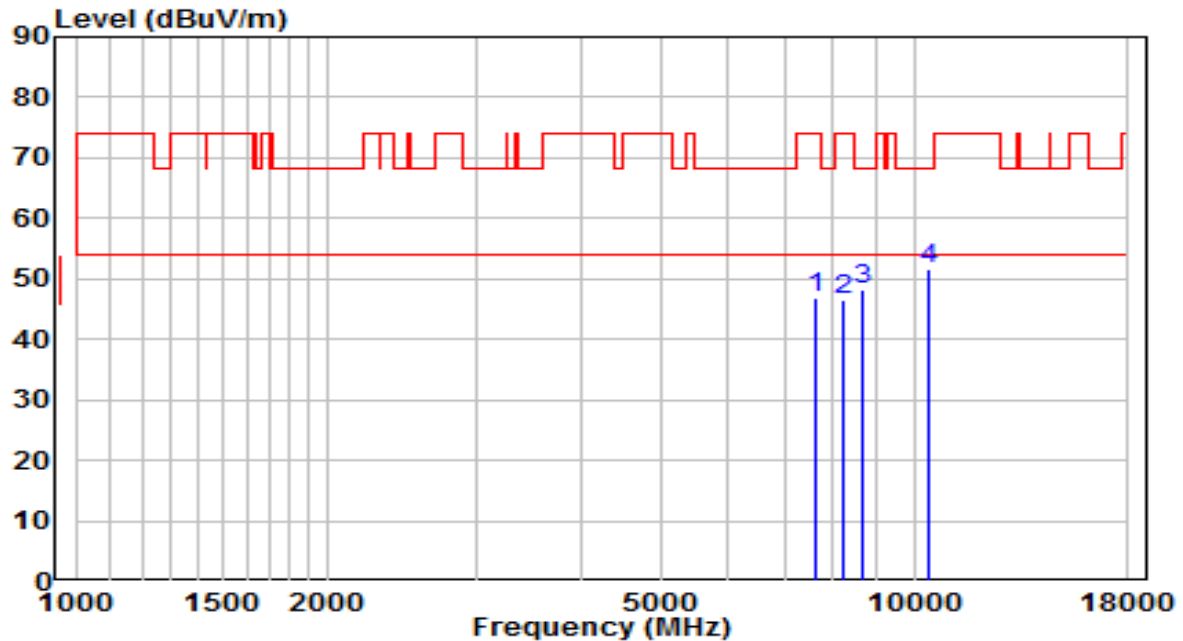


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7647.000        | 33.78          | 13.14    | 46.92                | -27.08      | 74.00          | Peak              |
| 2  | 8208.000        | 33.05          | 13.52    | 46.57                | -27.43      | 74.00          | Peak              |
| 3  | 8701.000        | 34.20          | 14.15    | 48.35                | -19.85      | 68.20          | Peak              |
| 4  | * 10409.500     | 33.45          | 18.21    | 51.66                | -16.54      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5745MHz | Test Voltage         | AC 120V/60Hz |

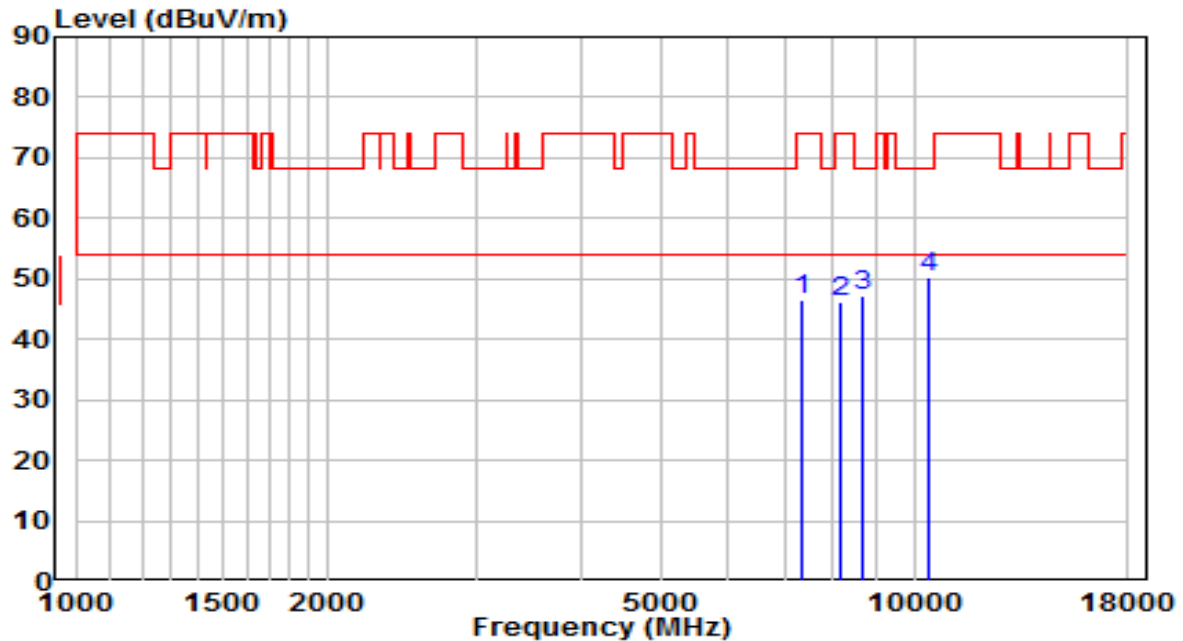


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7358.000        | 34.17          | 12.39    | 46.56                | -27.44      | 74.00          | Peak              |
| 2  | 8182.500        | 32.53          | 13.51    | 46.04                | -27.96      | 74.00          | Peak              |
| 3  | 8701.000        | 33.16          | 14.15    | 47.31                | -20.89      | 68.20          | Peak              |
| 4  | * 10409.500     | 32.17          | 18.21    | 50.38                | -17.82      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5745MHz | Test Voltage         | AC 120V/60Hz |

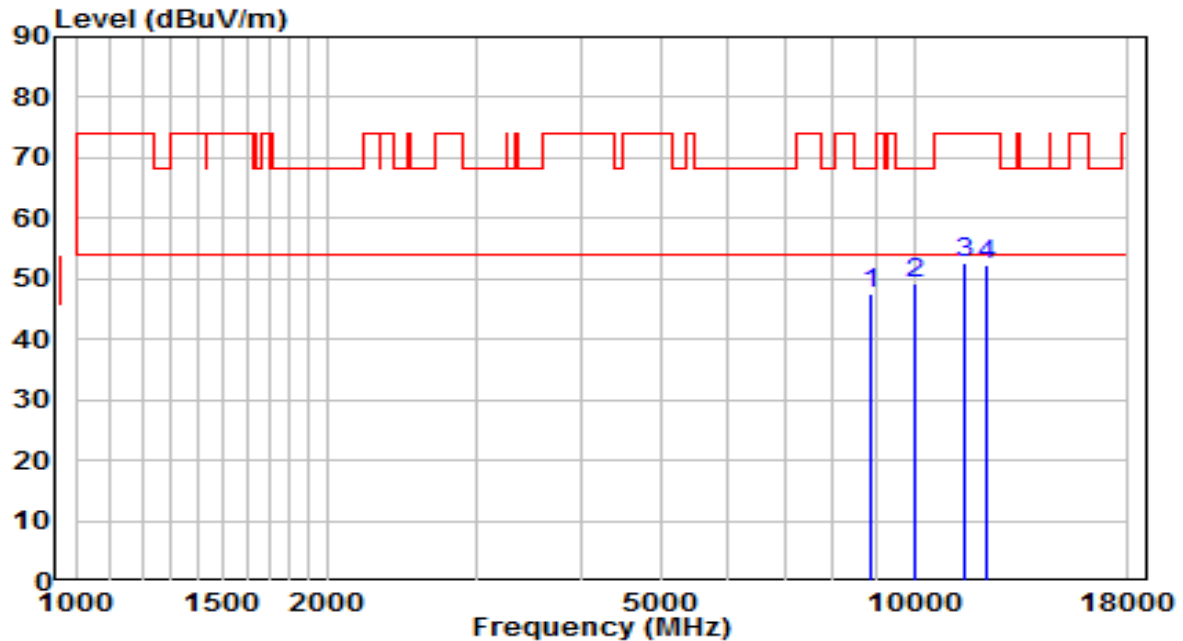


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8854.000        | 33.01          | 14.52    | 47.53                | -20.67      | 68.20          | Peak              |
| 2  | * 10018.500     | 32.68          | 16.63    | 49.32                | -18.88      | 68.20          | Peak              |
| 3  | 11497.500       | 32.67          | 20.05    | 52.72                | -21.28      | 74.00          | Peak              |
| 4  | 12211.500       | 33.51          | 18.70    | 52.21                | -21.79      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5785MHz | Test Voltage         | AC 120V/60Hz |

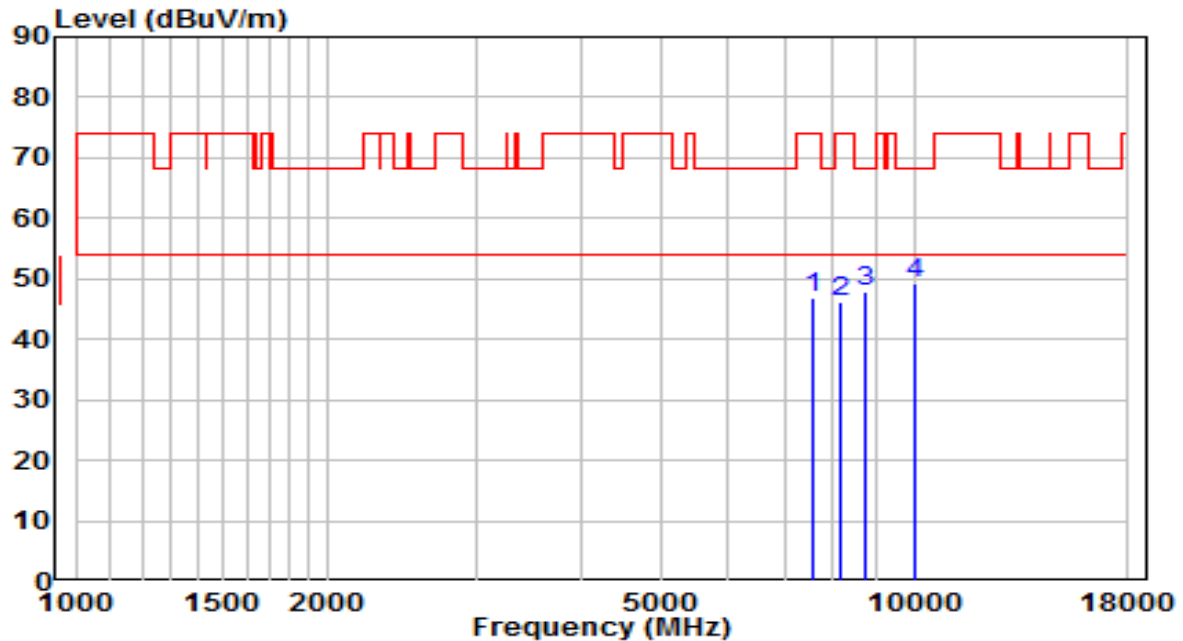


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7579.000        | 33.64          | 13.08    | 46.72                | -27.28      | 74.00          | Peak              |
| 2  | 8165.500        | 32.69          | 13.50    | 46.19                | -27.81      | 74.00          | Peak              |
| 3  | 8769.000        | 33.72          | 14.31    | 48.03                | -20.17      | 68.20          | Peak              |
| 4  | * 10035.500     | 32.70          | 16.70    | 49.41                | -18.79      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5785MHz | Test Voltage         | AC 120V/60Hz |

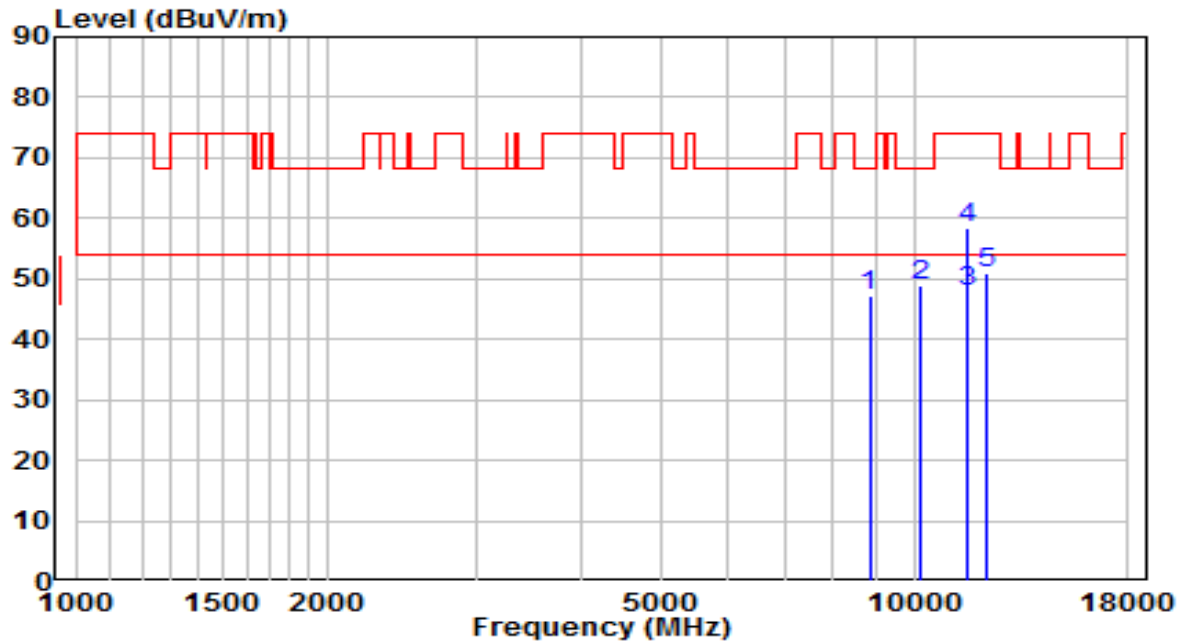


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8845.500        | 32.62          | 14.50    | 47.13                | -21.07      | 68.20          | Peak              |
| 2  | 10188.500       | 31.44          | 17.32    | 48.76                | -19.44      | 68.20          | Peak              |
| 3  | * 11571.410     | 27.88          | 19.89    | 47.77                | -6.23       | 54.00          | Average           |
| 4  | 11574.000       | 38.40          | 19.88    | 58.28                | -15.72      | 74.00          | Peak              |
| 5  | 12211.500       | 32.35          | 18.70    | 51.05                | -22.95      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5825MHz | Test Voltage         | AC 120V/60Hz |

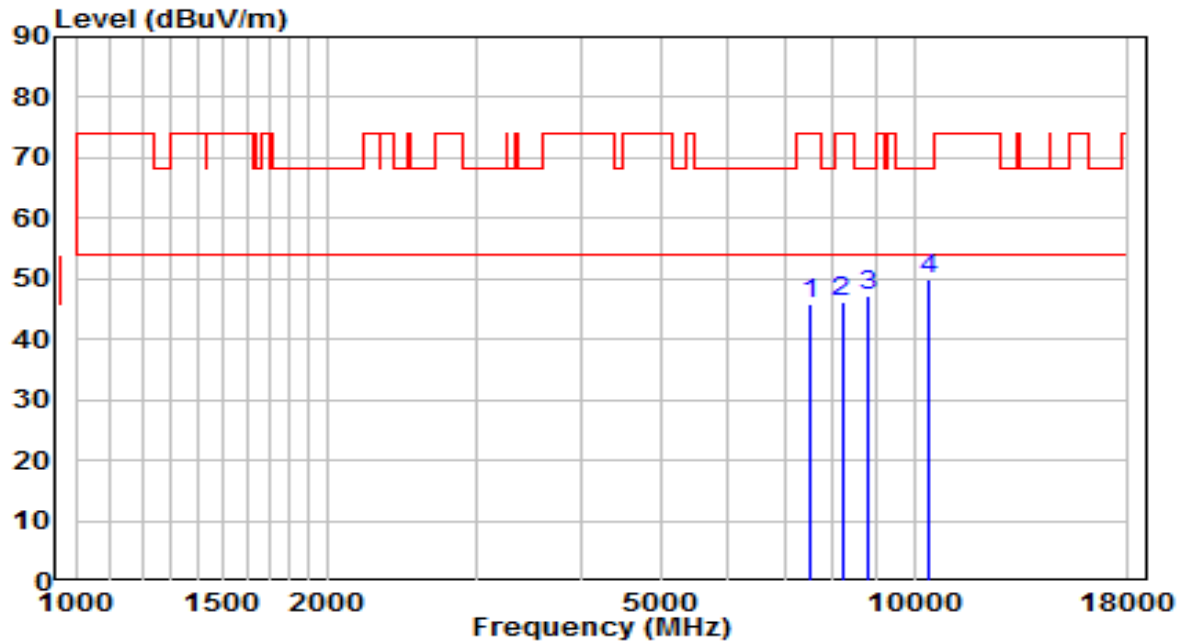


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7502.500        | 32.97          | 13.02    | 45.99                | -28.01      | 74.00          | Peak              |
| 2  | 8199.500        | 32.77          | 13.52    | 46.29                | -27.71      | 74.00          | Peak              |
| 3  | 8820.000        | 32.90          | 14.44    | 47.34                | -20.86      | 68.20          | Peak              |
| 4  | * 10375.500     | 31.72          | 18.07    | 49.79                | -18.41      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5825MHz | Test Voltage         | AC 120V/60Hz |

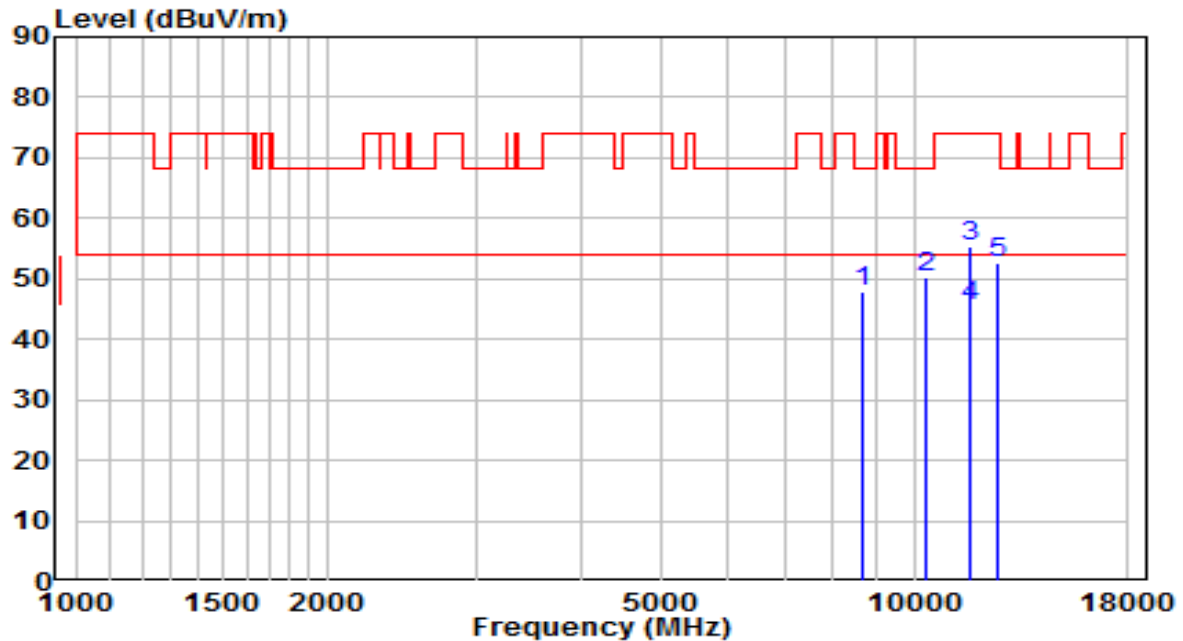


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8675.500        | 33.74          | 14.08    | 47.82                | -20.38      | 68.20          | Peak              |
| 2  | 10350.000       | 32.35          | 17.97    | 50.32                | -17.88      | 68.20          | Peak              |
| 3  | 11642.000       | 35.73          | 19.73    | 55.45                | -18.55      | 74.00          | Peak              |
| 4  | * 11643.850     | 25.90          | 19.72    | 45.62                | -8.38       | 54.00          | Average           |
| 5  | 12619.500       | 33.87          | 18.76    | 52.63                | -21.37      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5190MHz | Test Voltage         | AC 120V/60Hz |

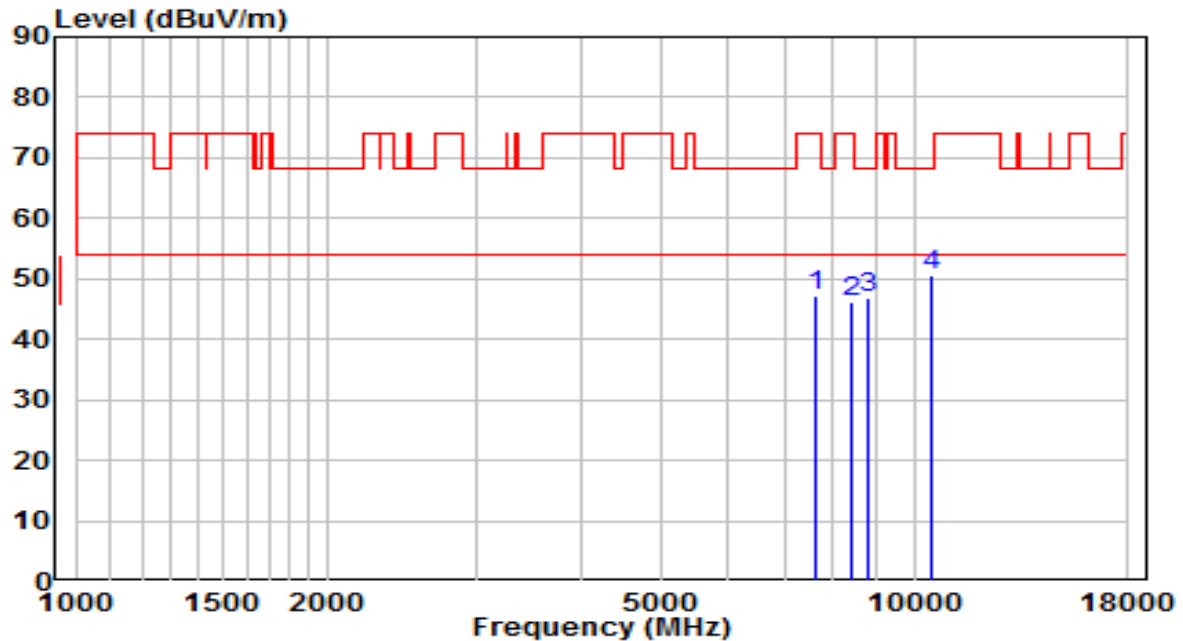


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 34.12          | 13.14    | 47.27                | -26.73      | 74.00          | Peak              |
| 2  | 8429.000        | 32.70          | 13.62    | 46.33                | -27.67      | 74.00          | Peak              |
| 3  | 8786.000        | 32.50          | 14.36    | 46.86                | -21.34      | 68.20          | Peak              |
| 4  | * 10452.000     | 32.24          | 18.38    | 50.62                | -17.58      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5190MHz | Test Voltage         | AC 120V/60Hz |

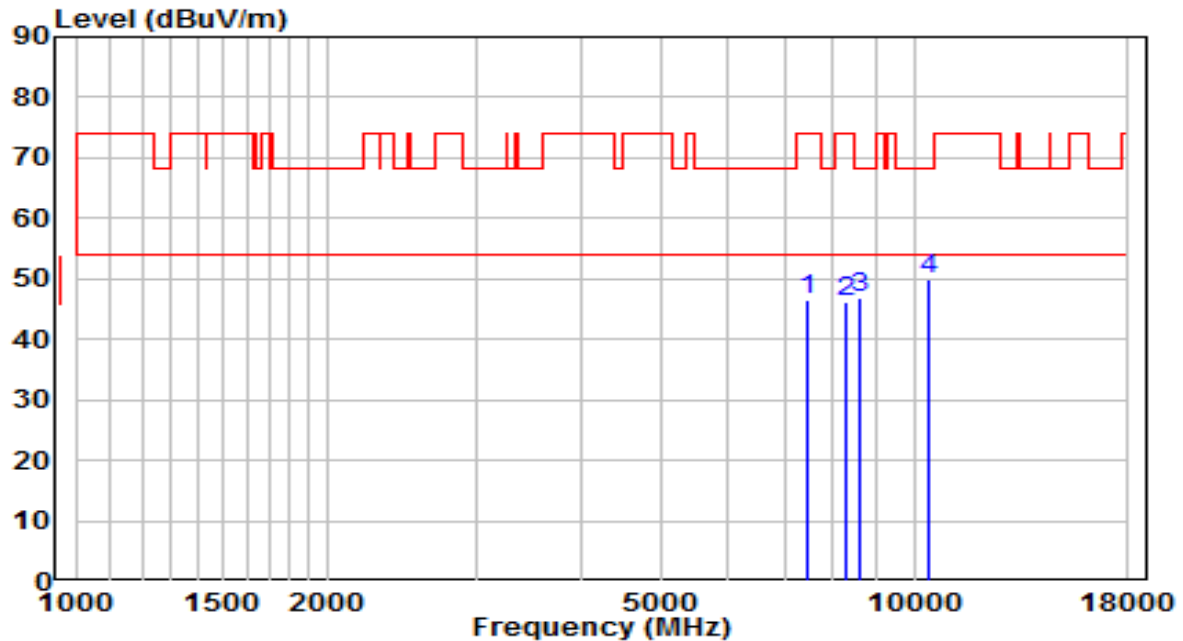


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7460.000        | 33.75          | 12.84    | 46.59                | -27.41      | 74.00          | Peak              |
| 2  | 8293.000        | 32.61          | 13.56    | 46.17                | -27.83      | 74.00          | Peak              |
| 3  | 8599.000        | 33.13          | 13.90    | 47.02                | -21.18      | 68.20          | Peak              |
| 4  | * 10435.000     | 31.76          | 18.31    | 50.07                | -18.13      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5230MHz | Test Voltage         | AC 120V/60Hz |

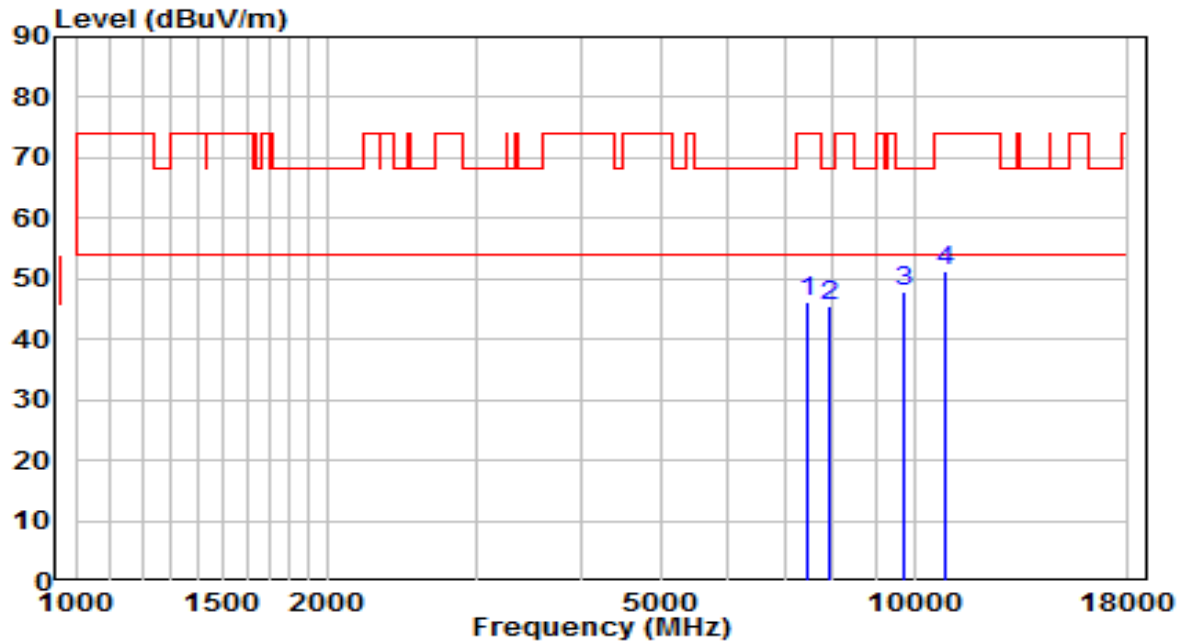


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7477.000        | 33.13          | 12.91    | 46.05                | -27.95      | 74.00          | Peak              |
| 2  | 7919.000        | 32.19          | 13.36    | 45.55                | -22.65      | 68.20          | Peak              |
| 3  | * 9738.000      | 31.81          | 16.12    | 47.93                | -20.27      | 68.20          | Peak              |
| 4  | 10868.500       | 32.20          | 19.09    | 51.30                | -22.70      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5230MHz | Test Voltage         | AC 120V/60Hz |

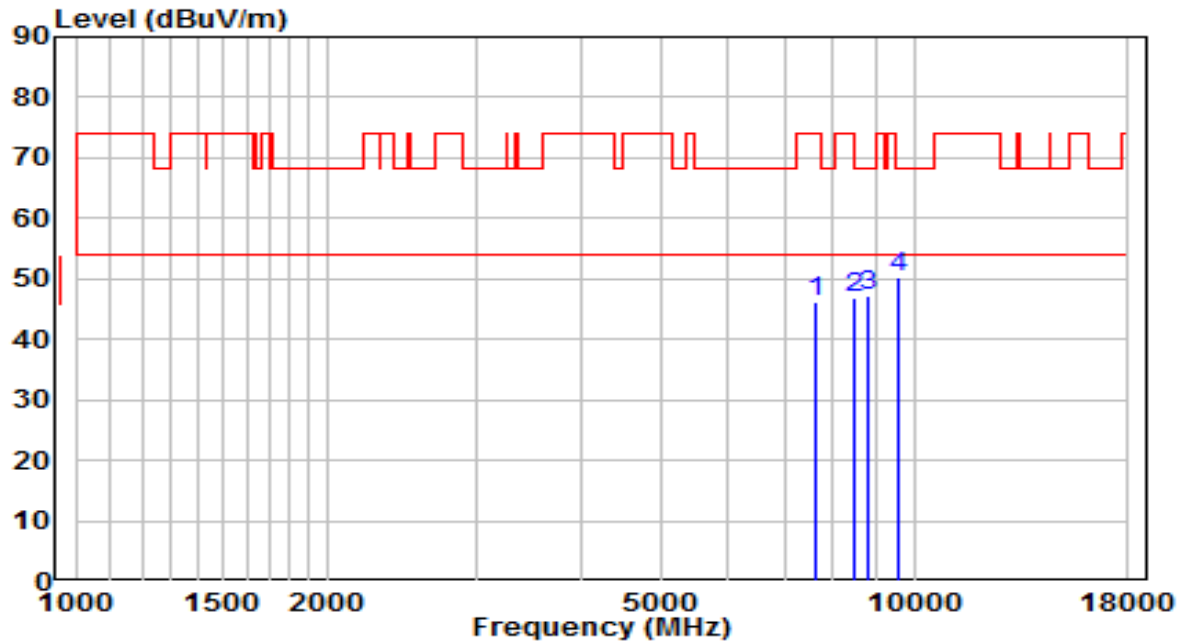


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 32.98          | 13.14    | 46.13                | -27.87      | 74.00          | Peak              |
| 2  | 8463.000        | 33.09          | 13.64    | 46.73                | -27.27      | 74.00          | Peak              |
| 3  | 8811.500        | 32.84          | 14.42    | 47.26                | -20.94      | 68.20          | Peak              |
| 4  | * 9585.000      | 34.38          | 15.86    | 50.24                | -17.96      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5270MHz | Test Voltage         | AC 120V/60Hz |

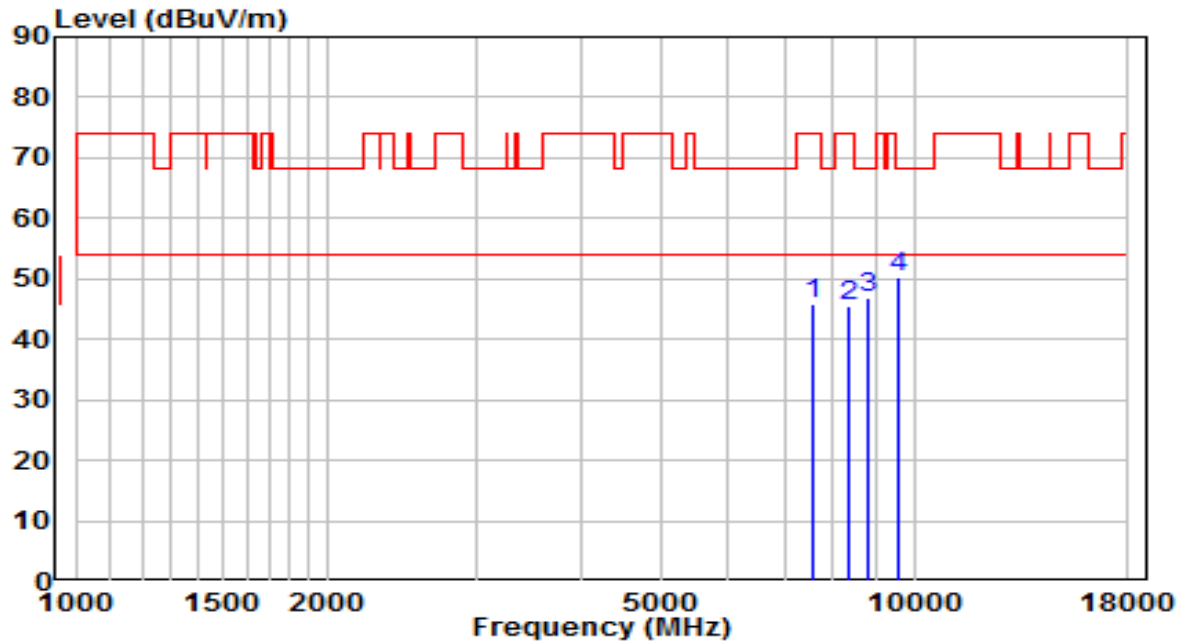


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7570.500        | 32.77          | 13.07    | 45.84                | -28.16      | 74.00          | Peak              |
| 2  | 8335.500        | 31.96          | 13.58    | 45.54                | -28.46      | 74.00          | Peak              |
| 3  | 8828.500        | 32.53          | 14.46    | 46.99                | -21.21      | 68.20          | Peak              |
| 4  | * 9585.000      | 34.55          | 15.86    | 50.41                | -17.79      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5270MHz | Test Voltage         | AC 120V/60Hz |

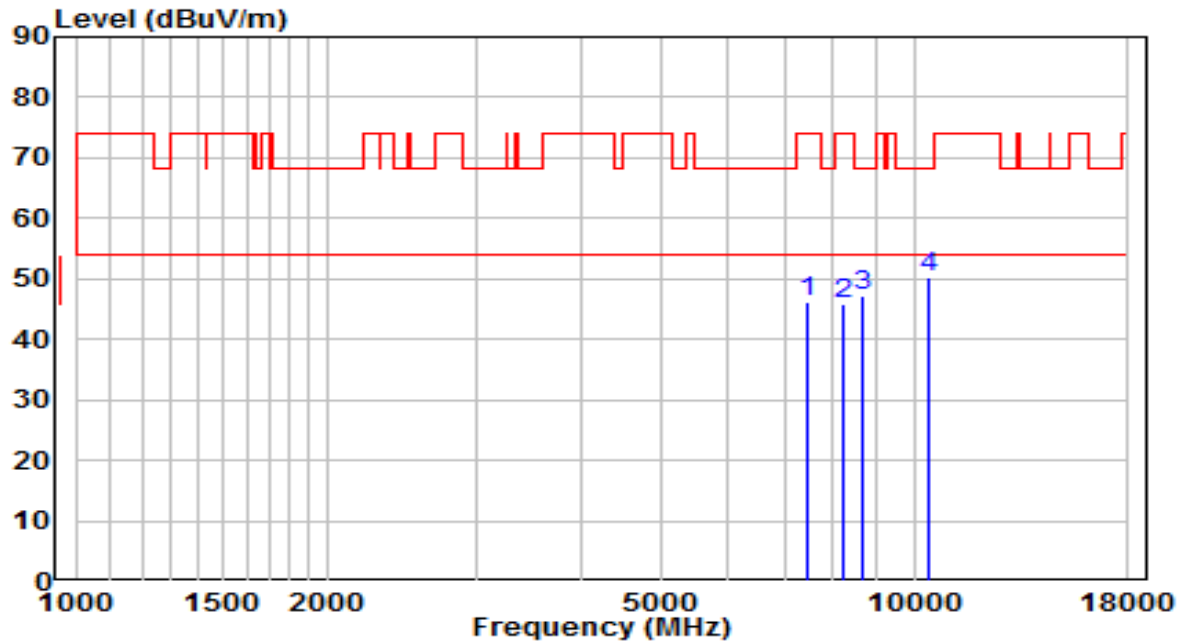


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7468.500        | 33.35          | 12.88    | 46.23                | -27.77      | 74.00          | Peak              |
| 2  | 8233.500        | 32.37          | 13.54    | 45.91                | -28.09      | 74.00          | Peak              |
| 3  | 8684.000        | 33.09          | 14.11    | 47.20                | -21.00      | 68.20          | Peak              |
| 4  | * 10443.500     | 32.05          | 18.34    | 50.39                | -17.81      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5310MHz | Test Voltage         | AC 120V/60Hz |

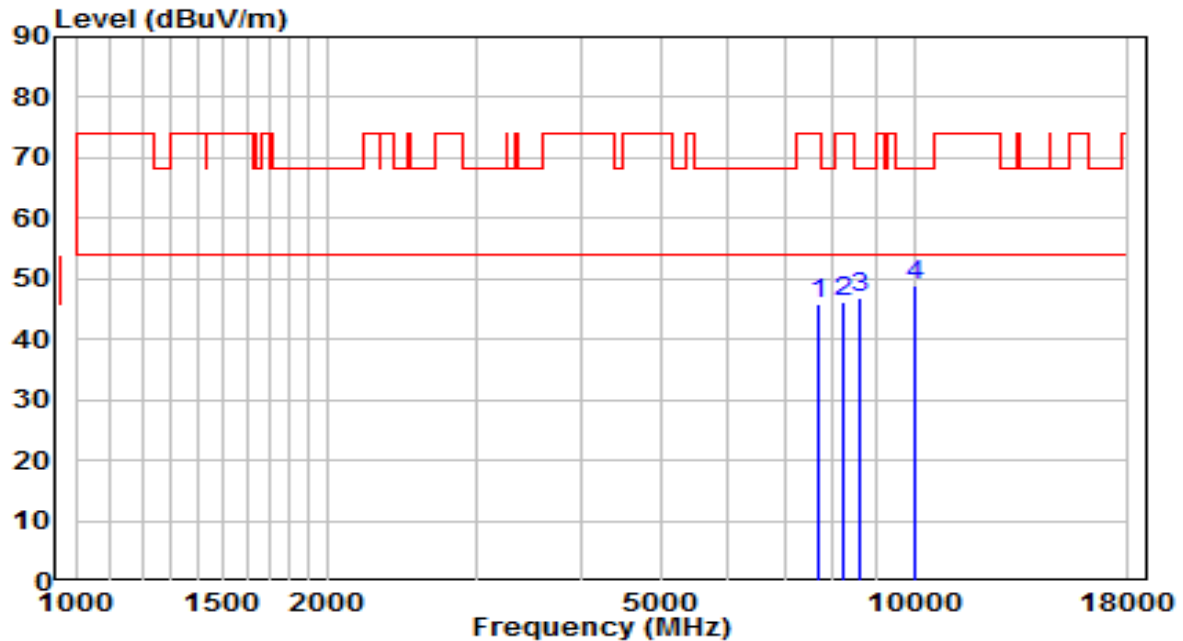


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7664.000        | 32.70          | 13.15    | 45.85                | -28.15      | 74.00          | Peak              |
| 2  | 8242.000        | 32.66          | 13.54    | 46.20                | -27.80      | 74.00          | Peak              |
| 3  | 8599.000        | 33.00          | 13.90    | 46.90                | -21.30      | 68.20          | Peak              |
| 4  | * 10001.500     | 32.37          | 16.57    | 48.94                | -19.26      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5310MHz | Test Voltage         | AC 120V/60Hz |

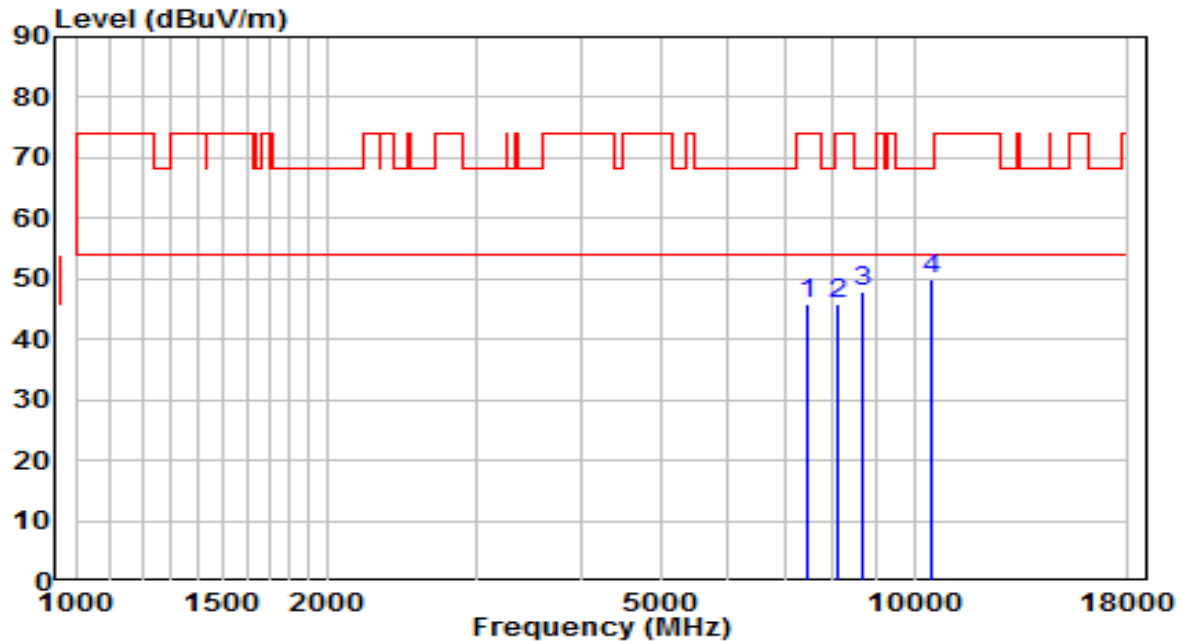


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7485.500        | 32.97          | 12.95    | 45.92                | -28.08      | 74.00          | Peak              |
| 2  | 8123.000        | 32.38          | 13.49    | 45.87                | -28.13      | 74.00          | Peak              |
| 3  | 8675.500        | 33.74          | 14.08    | 47.83                | -20.37      | 68.20          | Peak              |
| 4  | * 10452.000     | 31.65          | 18.38    | 50.02                | -18.18      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5510MHz | Test Voltage         | AC 120V/60Hz |

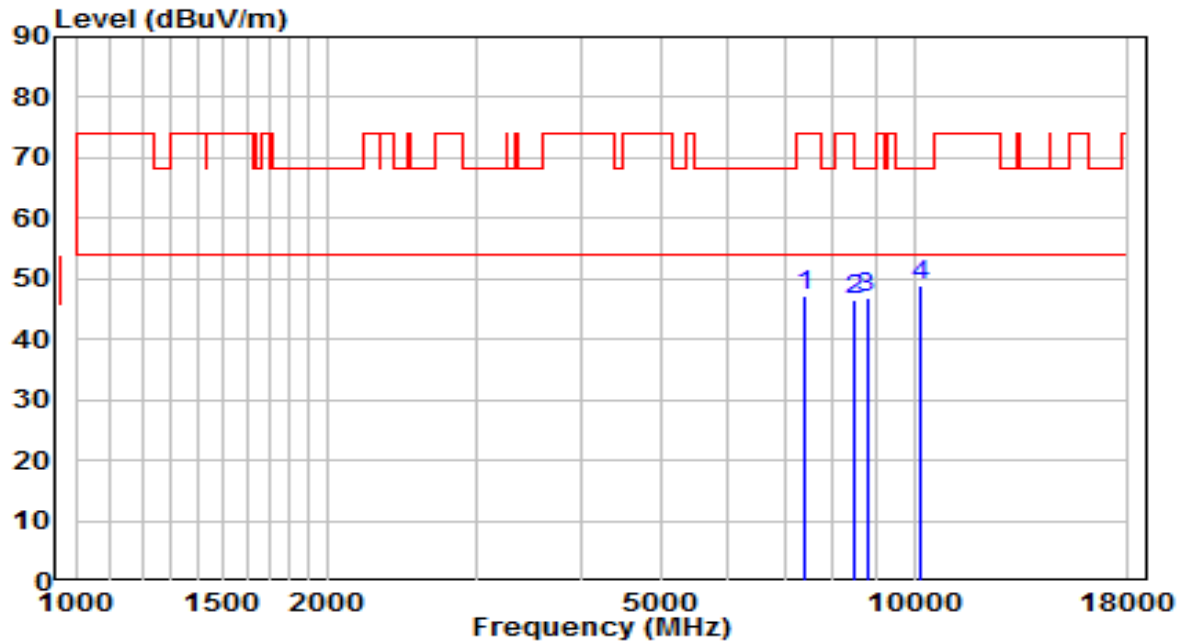


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7417.500        | 34.40          | 12.65    | 47.05                | -26.95      | 74.00          | Peak              |
| 2  | 8480.000        | 33.03          | 13.65    | 46.67                | -27.33      | 74.00          | Peak              |
| 3  | 8777.500        | 32.53          | 14.33    | 46.87                | -21.33      | 68.20          | Peak              |
| 4  | * 10146.000     | 31.73          | 17.15    | 48.88                | -19.32      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5510MHz | Test Voltage         | AC 120V/60Hz |

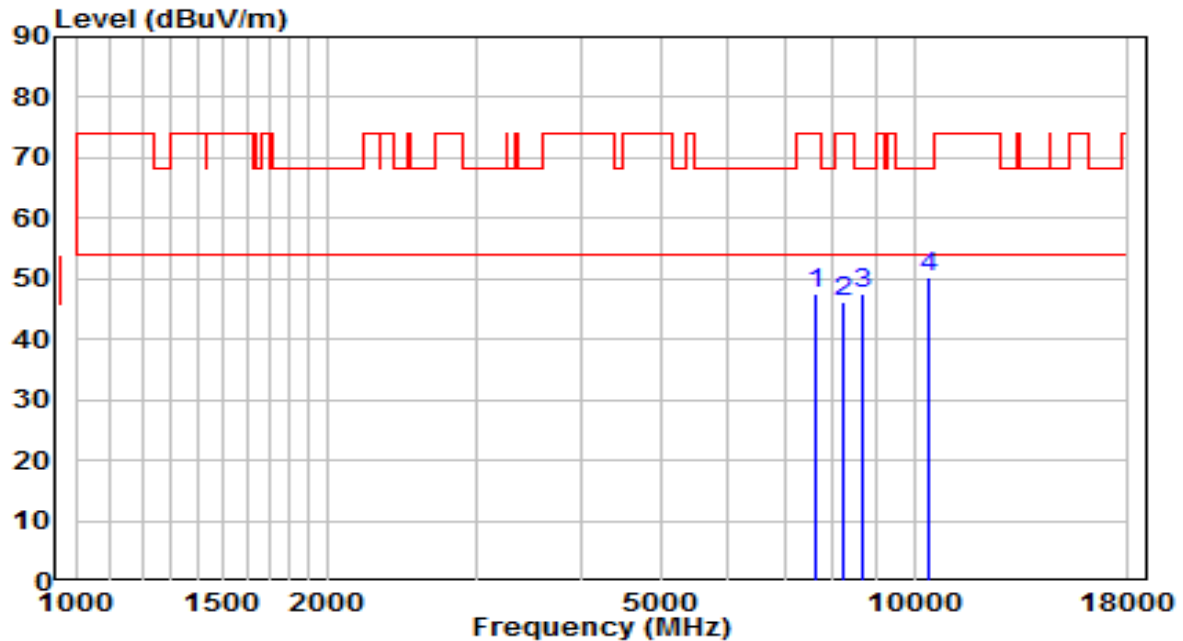


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 34.28          | 13.14    | 47.42                | -26.58      | 74.00          | Peak              |
| 2  | 8242.000        | 32.57          | 13.54    | 46.11                | -27.89      | 74.00          | Peak              |
| 3  | 8675.500        | 33.48          | 14.08    | 47.56                | -20.64      | 68.20          | Peak              |
| 4  | * 10418.000     | 32.09          | 18.24    | 50.33                | -17.87      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5550MHz | Test Voltage         | AC 120V/60Hz |

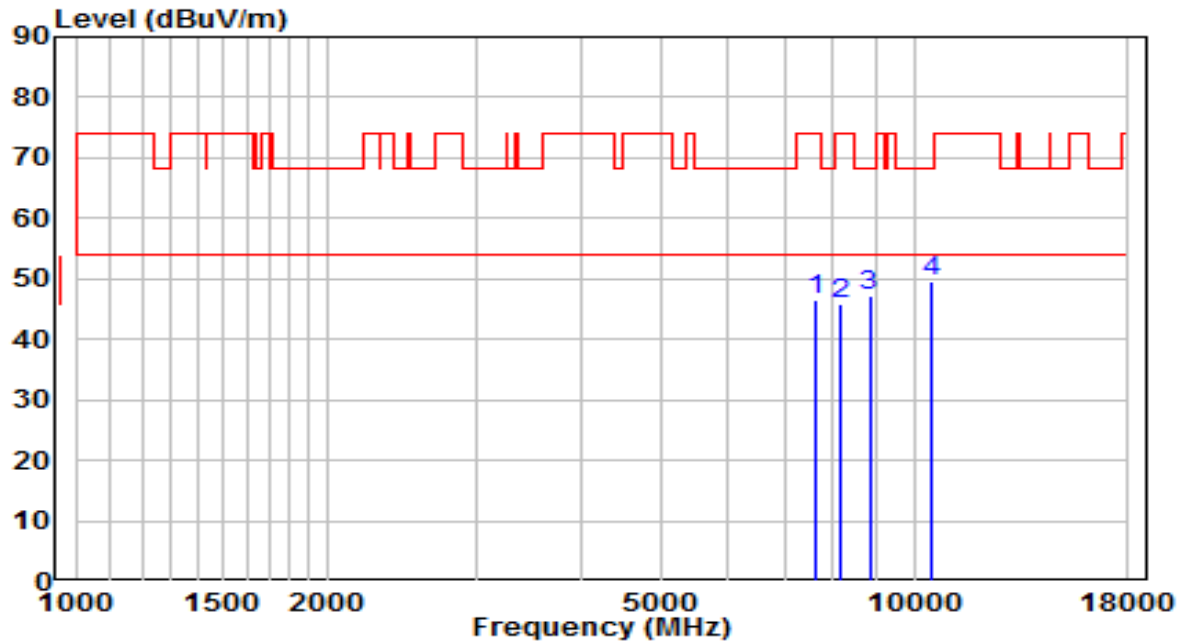


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 33.41          | 13.14    | 46.55                | -27.45      | 74.00          | Peak              |
| 2  | 8174.000        | 32.49          | 13.51    | 46.00                | -28.00      | 74.00          | Peak              |
| 3  | 8845.500        | 32.73          | 14.50    | 47.23                | -20.97      | 68.20          | Peak              |
| 4  | * 10460.500     | 31.07          | 18.41    | 49.49                | -18.71      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5550MHz | Test Voltage         | AC 120V/60Hz |

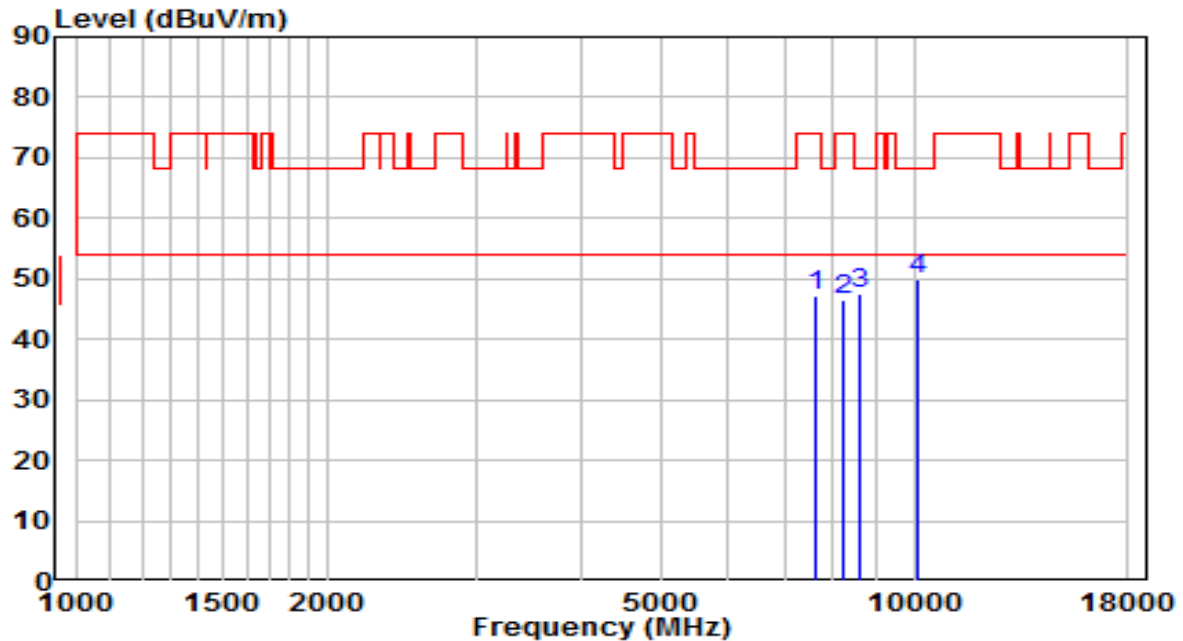


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 34.11          | 13.14    | 47.26                | -26.74      | 74.00          | Peak              |
| 2  | 8250.500        | 33.11          | 13.54    | 46.65                | -27.35      | 74.00          | Peak              |
| 3  | 8633.000        | 33.53          | 13.98    | 47.51                | -20.69      | 68.20          | Peak              |
| 4  | * 10120.500     | 32.83          | 17.04    | 49.87                | -18.33      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5670MHz | Test Voltage         | AC 120V/60Hz |

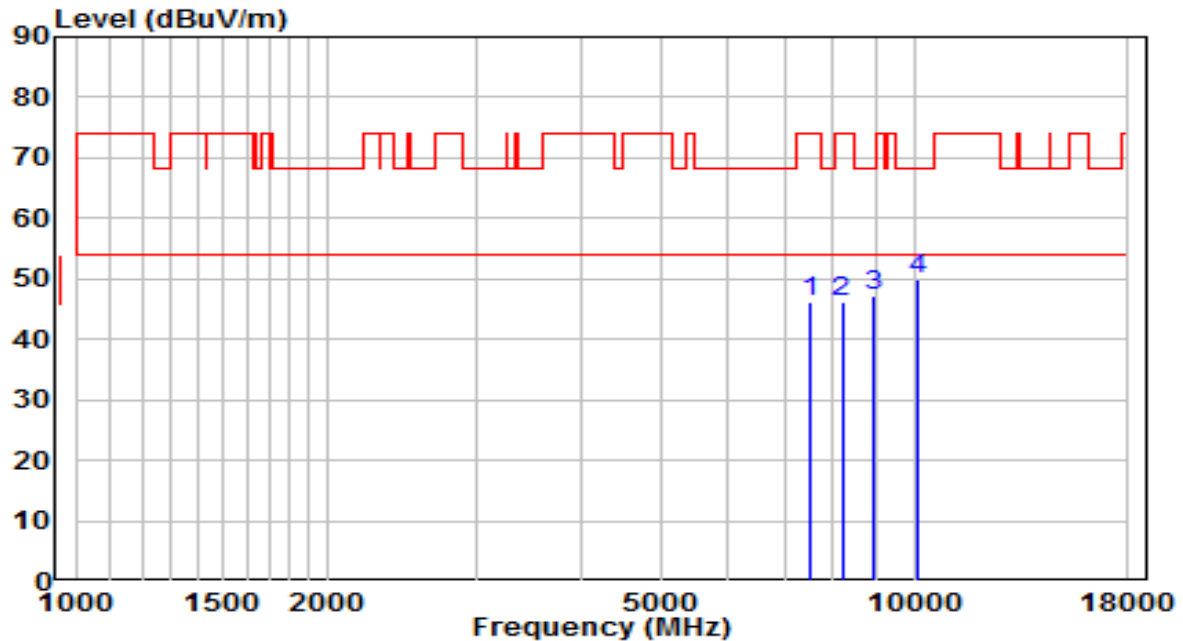


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7519.500        | 33.15          | 13.03    | 46.18                | -27.82      | 74.00          | Peak              |
| 2  | 8199.500        | 32.62          | 13.52    | 46.14                | -27.86      | 74.00          | Peak              |
| 3  | 8956.000        | 32.40          | 14.77    | 47.17                | -21.03      | 68.20          | Peak              |
| 4  | * 10120.500     | 32.88          | 17.04    | 49.92                | -18.28      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5670MHz | Test Voltage         | AC 120V/60Hz |

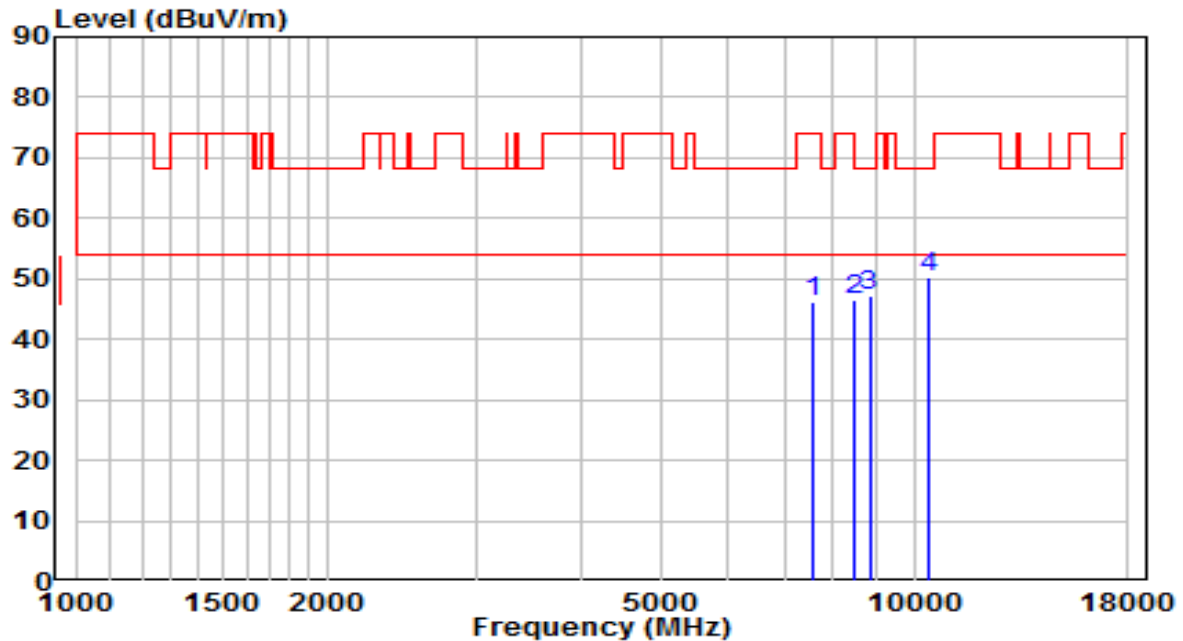


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7553.500        | 33.21          | 13.06    | 46.26                | -27.74      | 74.00          | Peak              |
| 2  | 8463.000        | 32.86          | 13.64    | 46.50                | -27.50      | 74.00          | Peak              |
| 3  | 8845.500        | 32.69          | 14.50    | 47.19                | -21.01      | 68.20          | Peak              |
| 4  | * 10409.500     | 32.14          | 18.21    | 50.34                | -17.86      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5710MHz | Test Voltage         | AC 120V/60Hz |

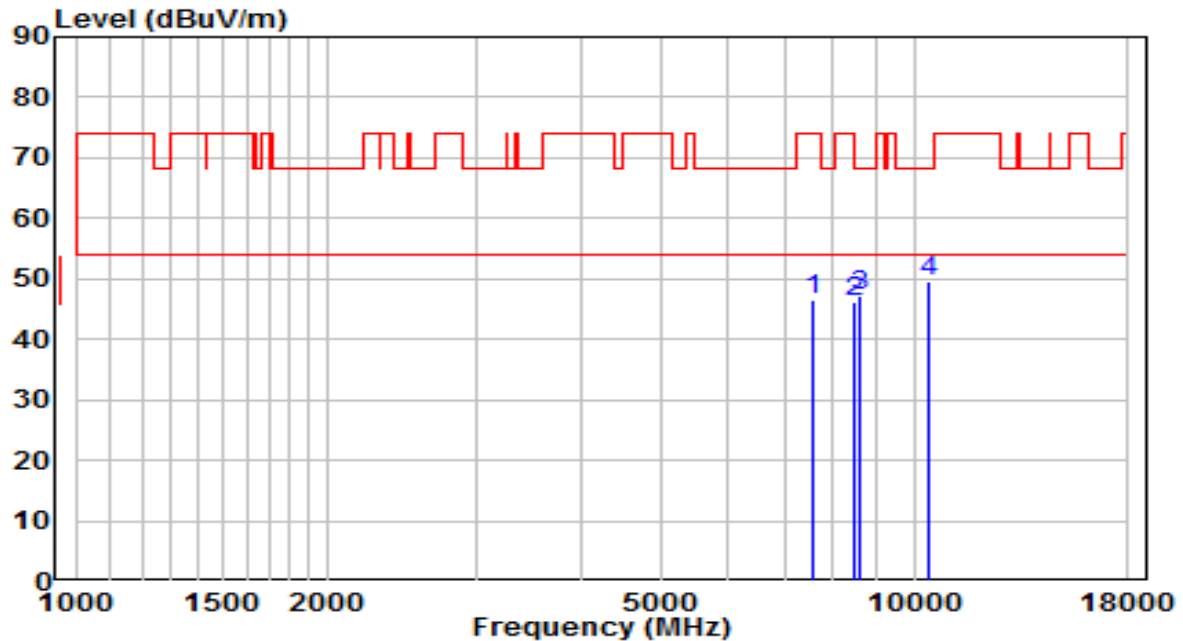


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7579.000        | 33.34          | 13.08    | 46.42                | -27.58      | 74.00          | Peak              |
| 2  | 8463.000        | 32.59          | 13.64    | 46.23                | -27.77      | 74.00          | Peak              |
| 3  | 8607.500        | 33.28          | 13.92    | 47.20                | -21.00      | 68.20          | Peak              |
| 4  | * 10401.000     | 31.52          | 18.17    | 49.69                | -18.51      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5710MHz | Test Voltage         | AC 120V/60Hz |

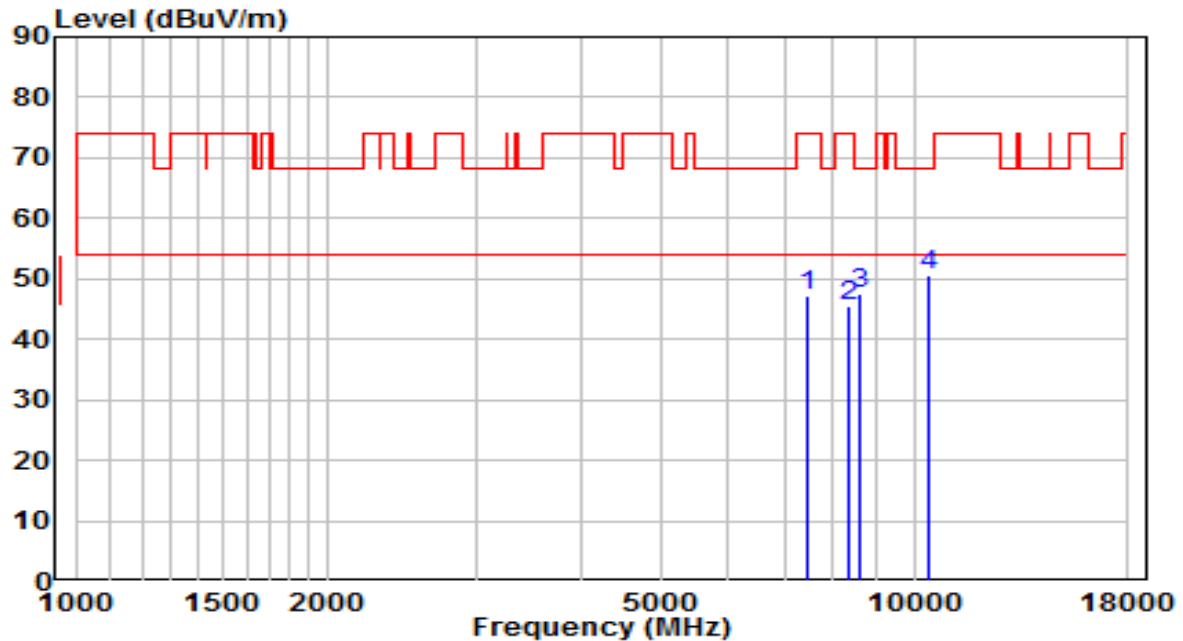


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7485.500        | 34.27          | 12.95    | 47.22                | -26.78      | 74.00          | Peak              |
| 2  | 8369.500        | 32.08          | 13.60    | 45.68                | -28.32      | 74.00          | Peak              |
| 3  | 8607.500        | 33.70          | 13.92    | 47.62                | -20.58      | 68.20          | Peak              |
| 4  | * 10392.500     | 32.57          | 18.14    | 50.71                | -17.49      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5755MHz | Test Voltage         | AC 120V/60Hz |

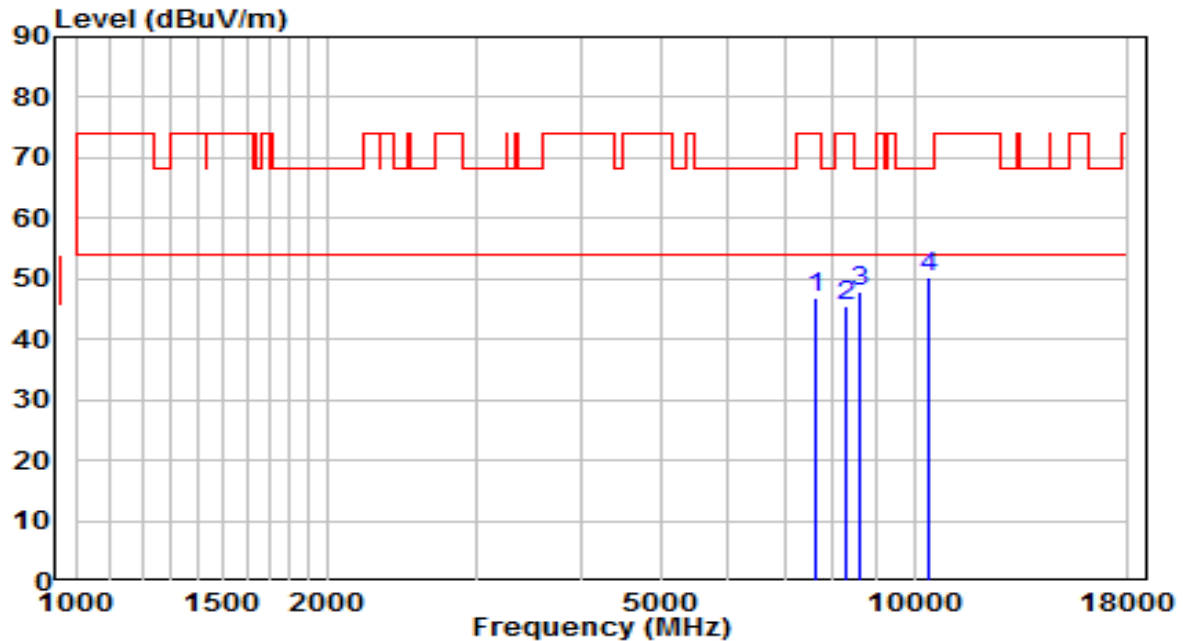


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 33.81          | 13.14    | 46.95                | -27.05      | 74.00          | Peak              |
| 2  | 8276.000        | 31.89          | 13.55    | 45.44                | -28.56      | 74.00          | Peak              |
| 3  | 8641.500        | 33.83          | 14.00    | 47.83                | -20.37      | 68.20          | Peak              |
| 4  | * 10384.000     | 32.16          | 18.10    | 50.27                | -17.93      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5755MHz | Test Voltage         | AC 120V/60Hz |

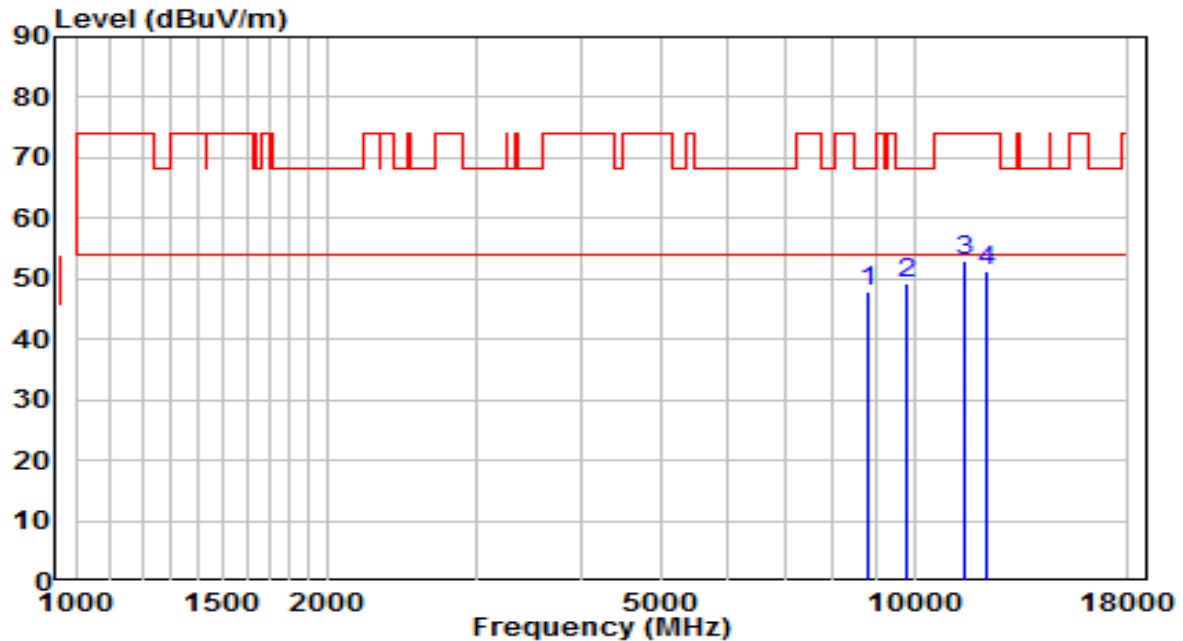


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8828.500        | 33.53          | 14.46    | 47.99                | -20.21      | 68.20          | Peak              |
| 2  | * 9814.500      | 32.84          | 16.25    | 49.08                | -19.12      | 68.20          | Peak              |
| 3  | 11514.500       | 32.86          | 20.02    | 52.88                | -21.12      | 74.00          | Peak              |
| 4  | 12211.500       | 32.61          | 18.70    | 51.32                | -22.68      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5795MHz | Test Voltage         | AC 120V/60Hz |

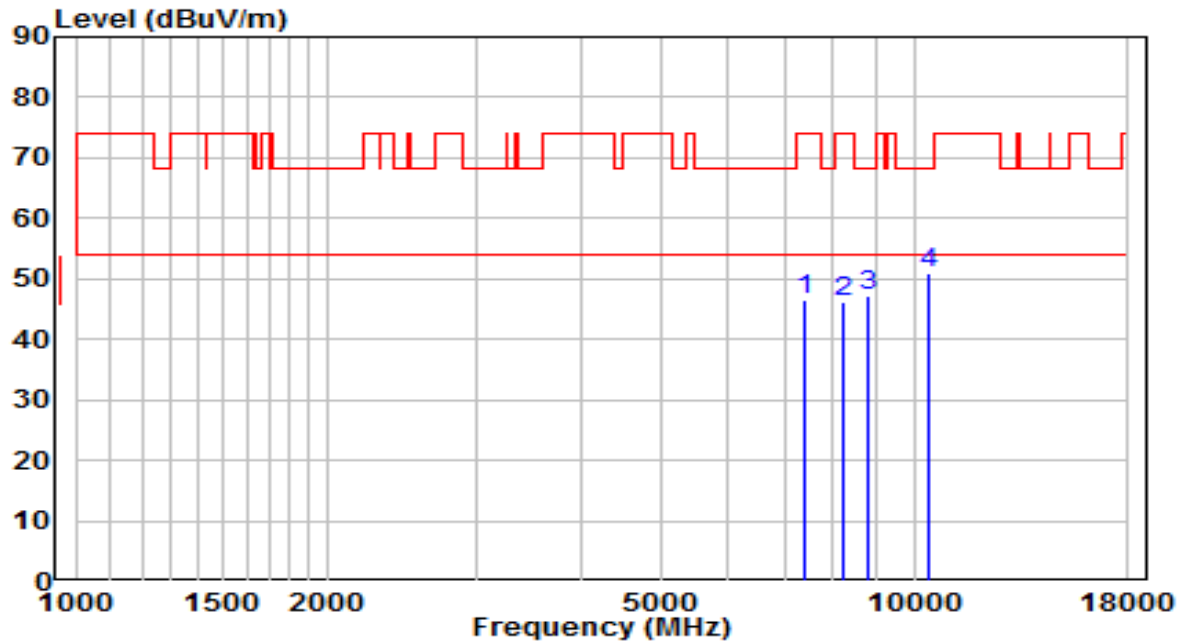


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7409.000        | 33.95          | 12.61    | 46.56                | -27.44      | 74.00          | Peak              |
| 2  | 8216.500        | 32.73          | 13.53    | 46.26                | -27.74      | 74.00          | Peak              |
| 3  | 8786.000        | 32.70          | 14.36    | 47.06                | -21.14      | 68.20          | Peak              |
| 4  | * 10443.500     | 32.58          | 18.34    | 50.93                | -17.27      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5795MHz | Test Voltage         | AC 120V/60Hz |

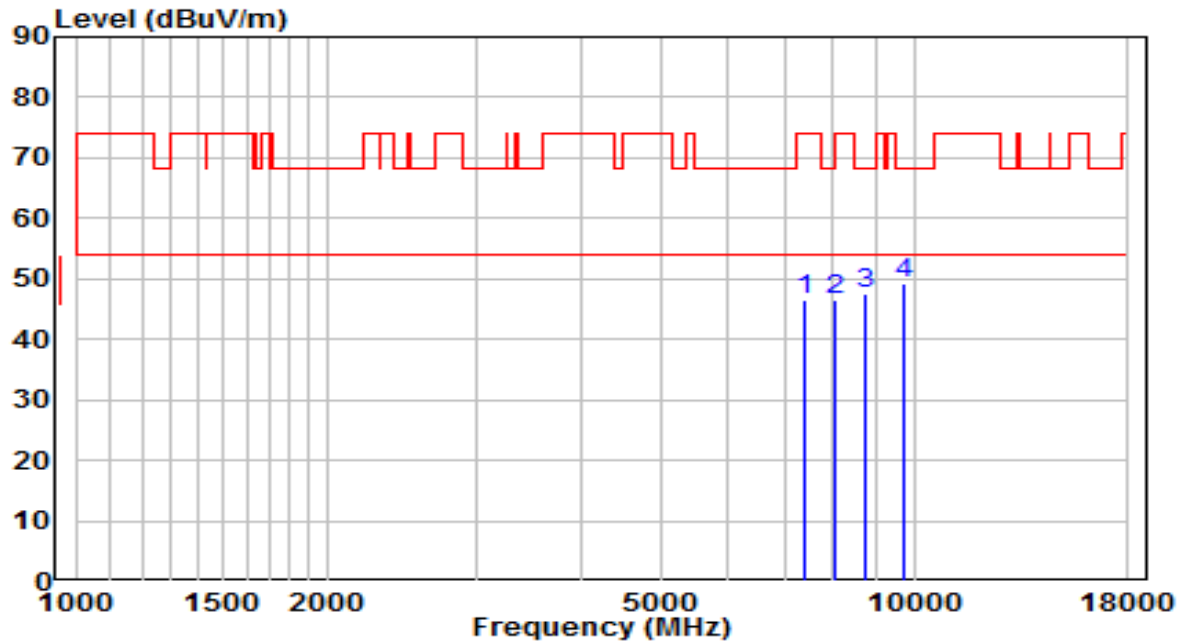


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7409.000        | 34.07          | 12.61    | 46.68                | -27.32      | 74.00          | Peak              |
| 2  | 8046.500        | 32.97          | 13.45    | 46.42                | -27.58      | 74.00          | Peak              |
| 3  | 8726.500        | 33.37          | 14.21    | 47.58                | -20.62      | 68.20          | Peak              |
| 4  | * 9738.000      | 33.07          | 16.12    | 49.19                | -19.01      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5210MHz | Test Voltage         | AC 120V/60Hz |

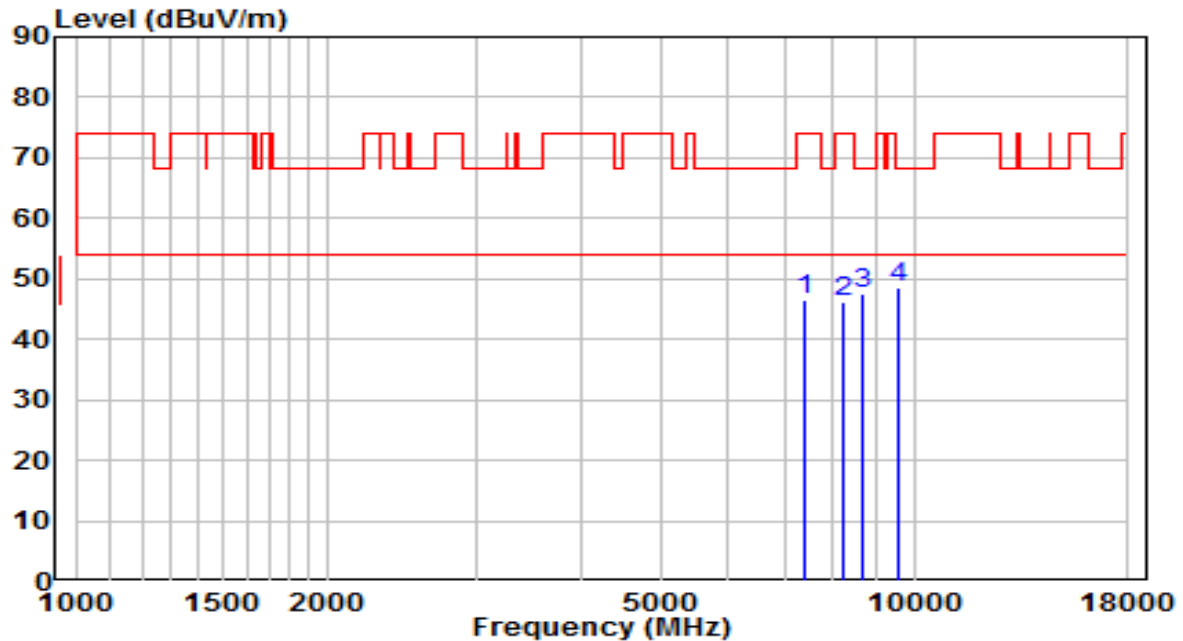


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7426.000        | 33.75          | 12.69    | 46.44                | -27.56      | 74.00          | Peak              |
| 2  | 8259.000        | 32.62          | 13.55    | 46.16                | -27.84      | 74.00          | Peak              |
| 3  | 8684.000        | 33.34          | 14.11    | 47.44                | -20.76      | 68.20          | Peak              |
| 4  | * 9593.500      | 32.70          | 15.88    | 48.57                | -19.63      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5210MHz | Test Voltage         | AC 120V/60Hz |

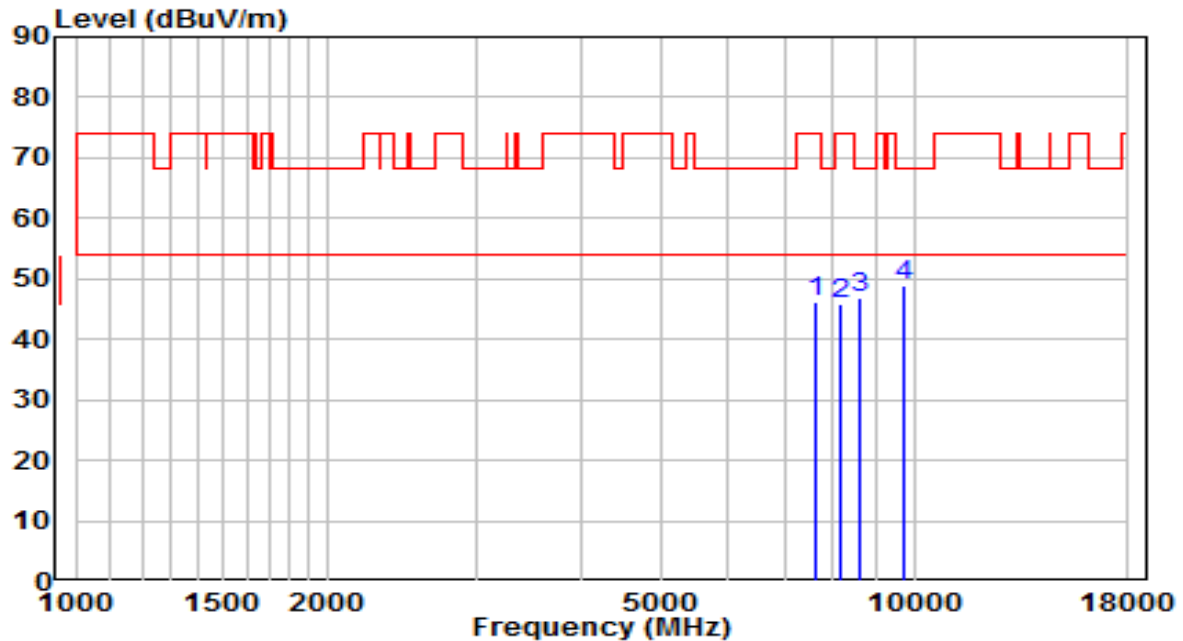


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7638.500        | 33.01          | 13.13    | 46.14                | -27.86      | 74.00          | Peak              |
| 2  | 8157.000        | 32.30          | 13.50    | 45.80                | -28.20      | 74.00          | Peak              |
| 3  | 8616.000        | 32.79          | 13.94    | 46.72                | -21.48      | 68.20          | Peak              |
| 4  | * 9746.500      | 32.82          | 16.13    | 48.95                | -19.25      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5290MHz | Test Voltage         | AC 120V/60Hz |

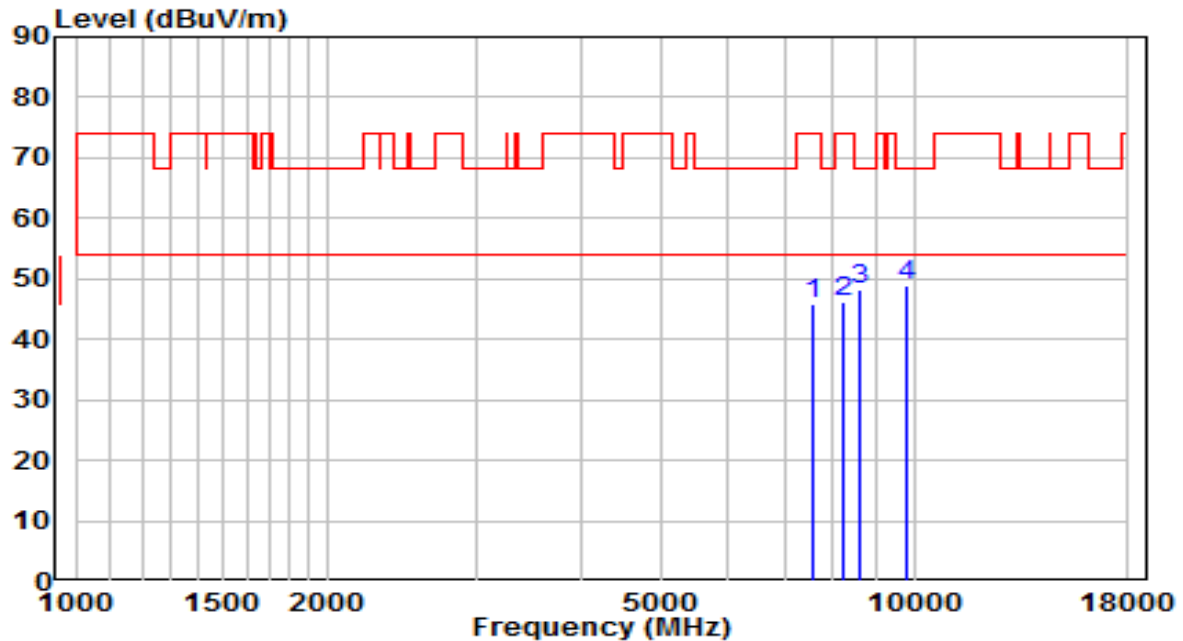


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7596.000        | 32.59          | 13.09    | 45.69                | -28.31      | 74.00          | Peak              |
| 2  | 8250.500        | 32.60          | 13.54    | 46.14                | -27.86      | 74.00          | Peak              |
| 3  | 8633.000        | 34.20          | 13.98    | 48.18                | -20.02      | 68.20          | Peak              |
| 4  | * 9763.500      | 32.86          | 16.16    | 49.02                | -19.18      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5290MHz | Test Voltage         | AC 120V/60Hz |

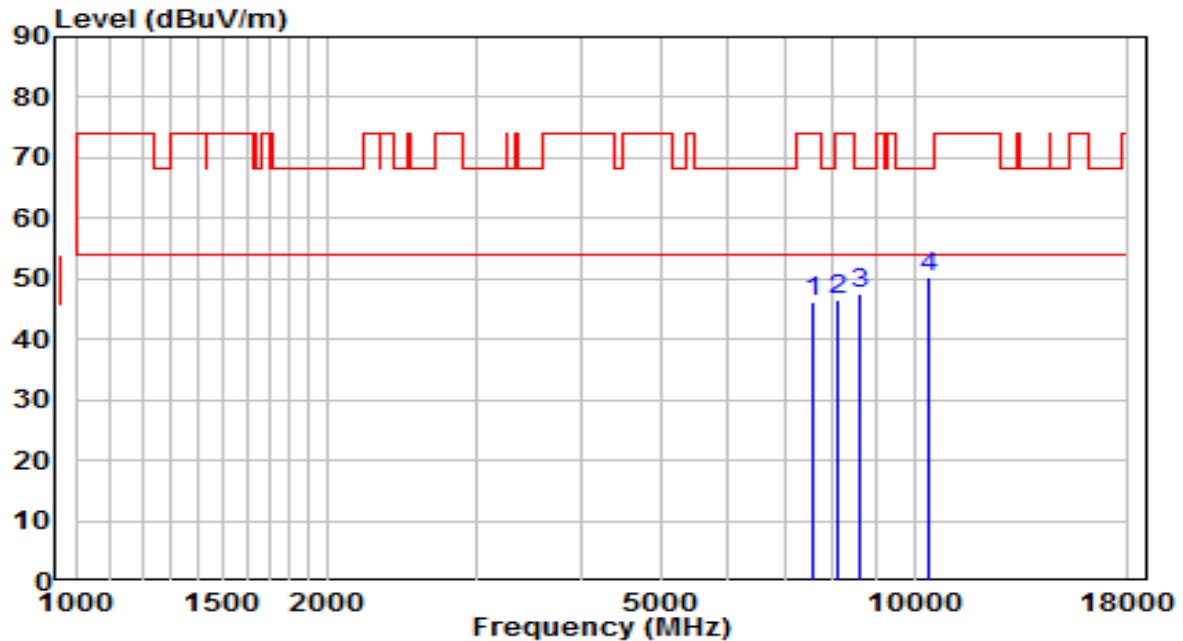


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7596.000        | 33.15          | 13.09    | 46.24                | -27.76      | 74.00          | Peak              |
| 2  | 8123.000        | 32.92          | 13.49    | 46.40                | -27.60      | 74.00          | Peak              |
| 3  | 8607.500        | 33.76          | 13.92    | 47.68                | -20.52      | 68.20          | Peak              |
| 4  | * 10401.000     | 31.92          | 18.17    | 50.10                | -18.10      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5530MHz | Test Voltage         | AC 120V/60Hz |

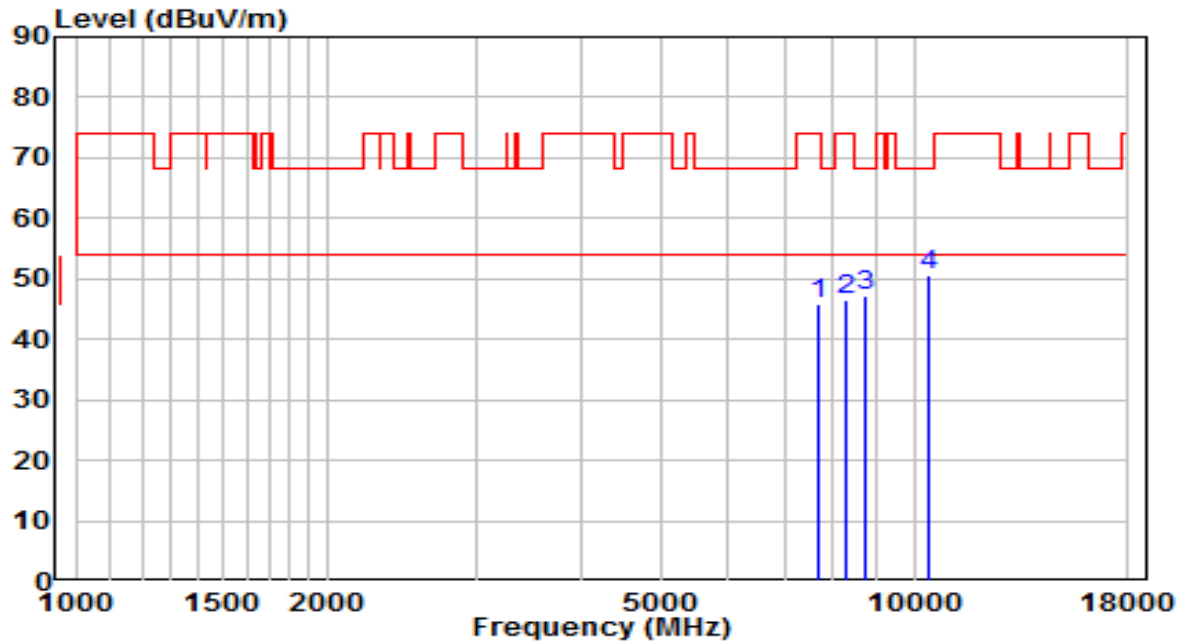


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7681.000        | 32.55          | 13.17    | 45.71                | -28.29      | 74.00          | Peak              |
| 2  | 8267.500        | 32.96          | 13.55    | 46.51                | -27.49      | 74.00          | Peak              |
| 3  | 8769.000        | 32.95          | 14.31    | 47.26                | -20.94      | 68.20          | Peak              |
| 4  | * 10418.000     | 32.45          | 18.24    | 50.69                | -17.51      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5530MHz | Test Voltage         | AC 120V/60Hz |

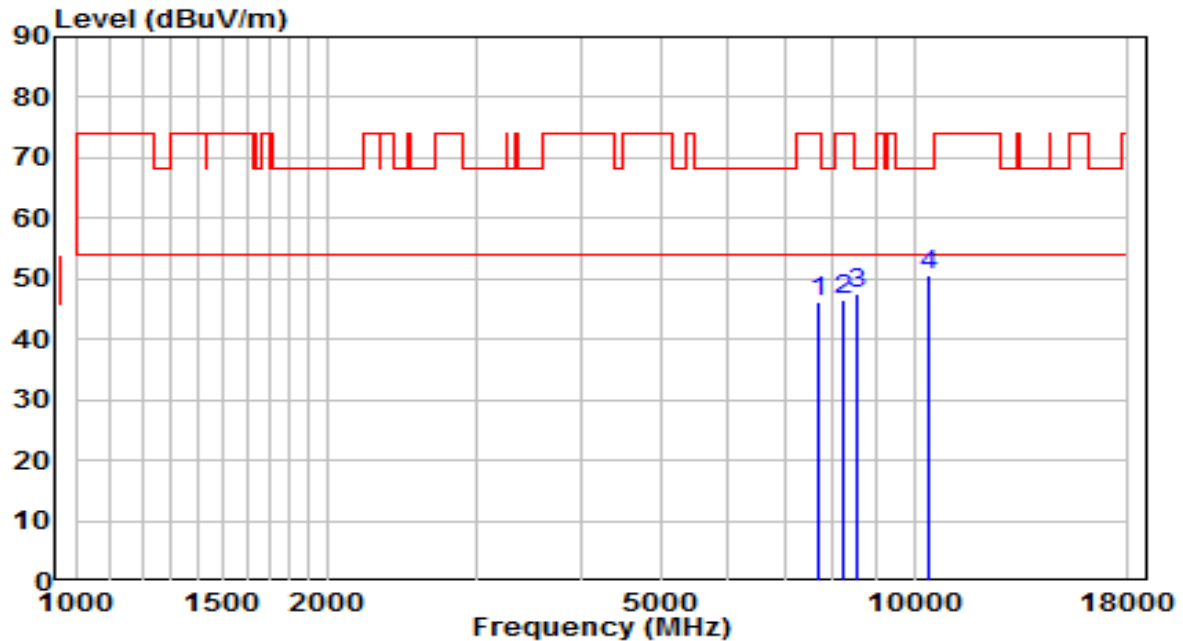


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7681.000        | 32.99          | 13.17    | 46.16                | -27.84      | 74.00          | Peak              |
| 2  | 8259.000        | 32.86          | 13.55    | 46.40                | -27.60      | 74.00          | Peak              |
| 3  | 8556.500        | 33.59          | 13.79    | 47.38                | -20.82      | 68.20          | Peak              |
| 4  | * 10426.500     | 32.31          | 18.27    | 50.58                | -17.62      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5610MHz | Test Voltage         | AC 120V/60Hz |

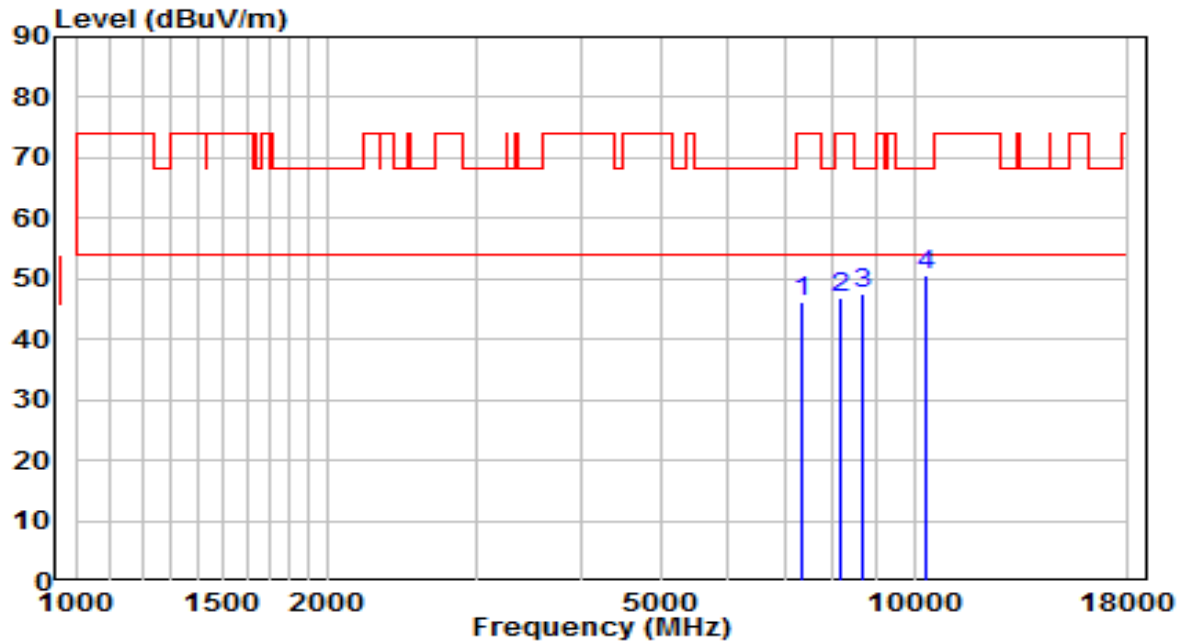


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7349.500        | 33.81          | 12.35    | 46.16                | -27.84      | 74.00          | Peak              |
| 2  | 8140.000        | 33.51          | 13.49    | 47.00                | -27.00      | 74.00          | Peak              |
| 3  | 8684.000        | 33.30          | 14.11    | 47.40                | -20.80      | 68.20          | Peak              |
| 4  | * 10350.000     | 32.67          | 17.97    | 50.64                | -17.56      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5610MHz | Test Voltage         | AC 120V/60Hz |

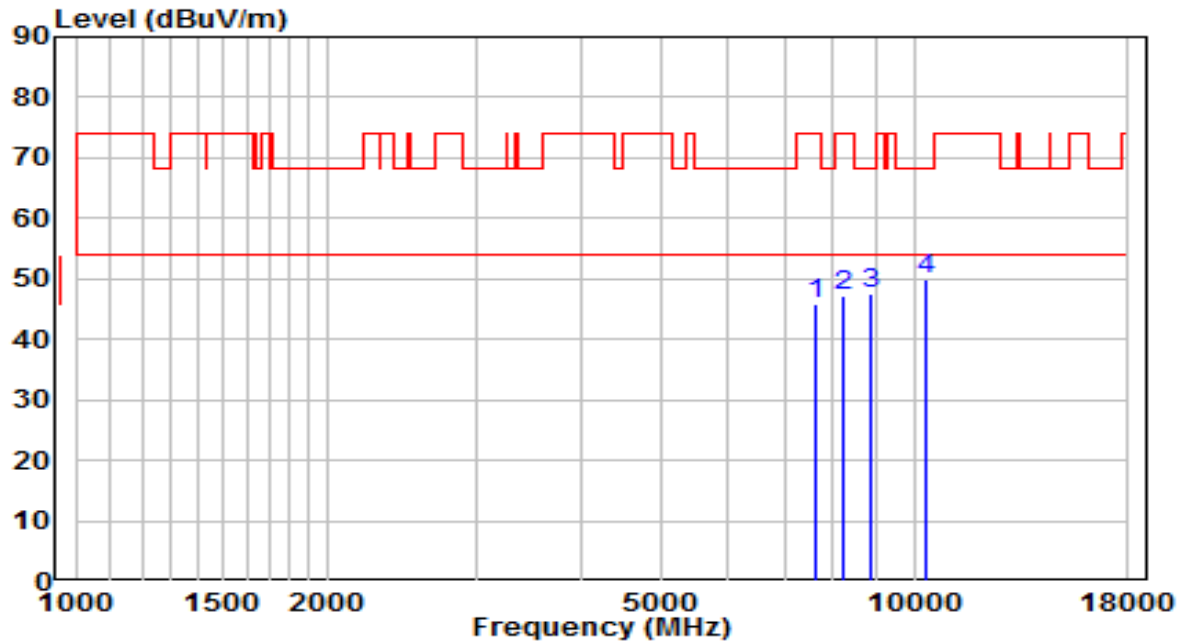


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 32.84          | 13.14    | 45.98                | -28.02      | 74.00          | Peak              |
| 2  | 8242.000        | 33.56          | 13.54    | 47.09                | -26.91      | 74.00          | Peak              |
| 3  | 8879.500        | 33.04          | 14.58    | 47.62                | -20.58      | 68.20          | Peak              |
| 4  | * 10358.500     | 31.86          | 18.00    | 49.86                | -18.34      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5690MHz | Test Voltage         | AC 120V/60Hz |

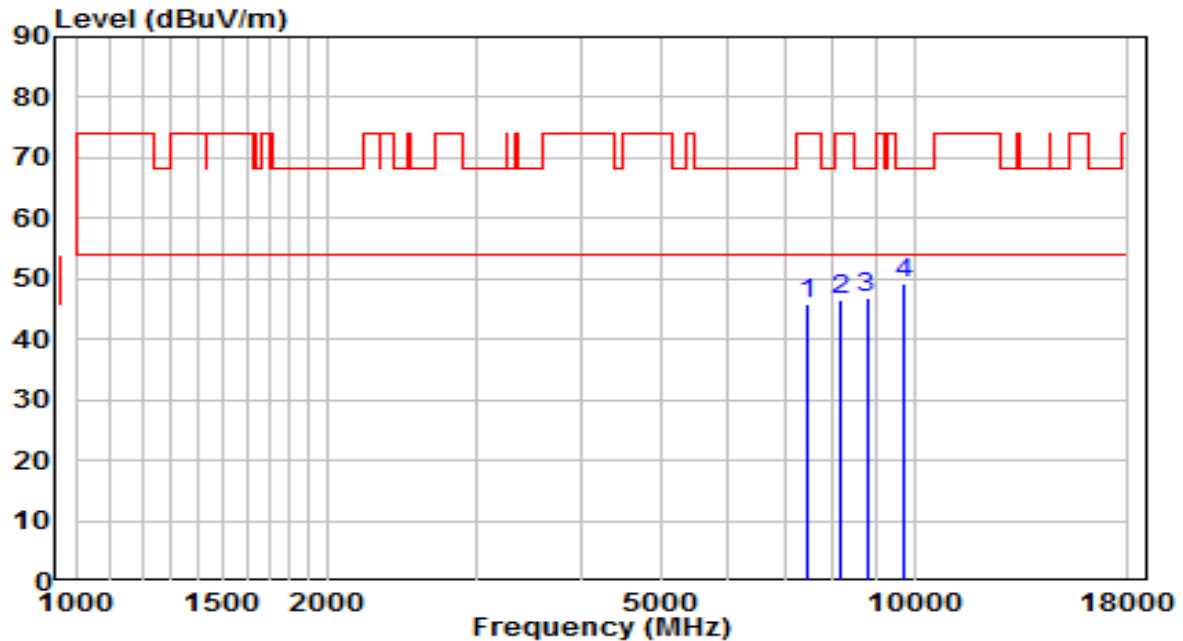


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7468.500        | 33.12          | 12.88    | 45.99                | -28.01      | 74.00          | Peak              |
| 2  | 8165.500        | 33.18          | 13.50    | 46.69                | -27.31      | 74.00          | Peak              |
| 3  | 8777.500        | 32.67          | 14.33    | 47.00                | -21.20      | 68.20          | Peak              |
| 4  | * 9755.000      | 33.05          | 16.15    | 49.20                | -19.00      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5690MHz | Test Voltage         | AC 120V/60Hz |

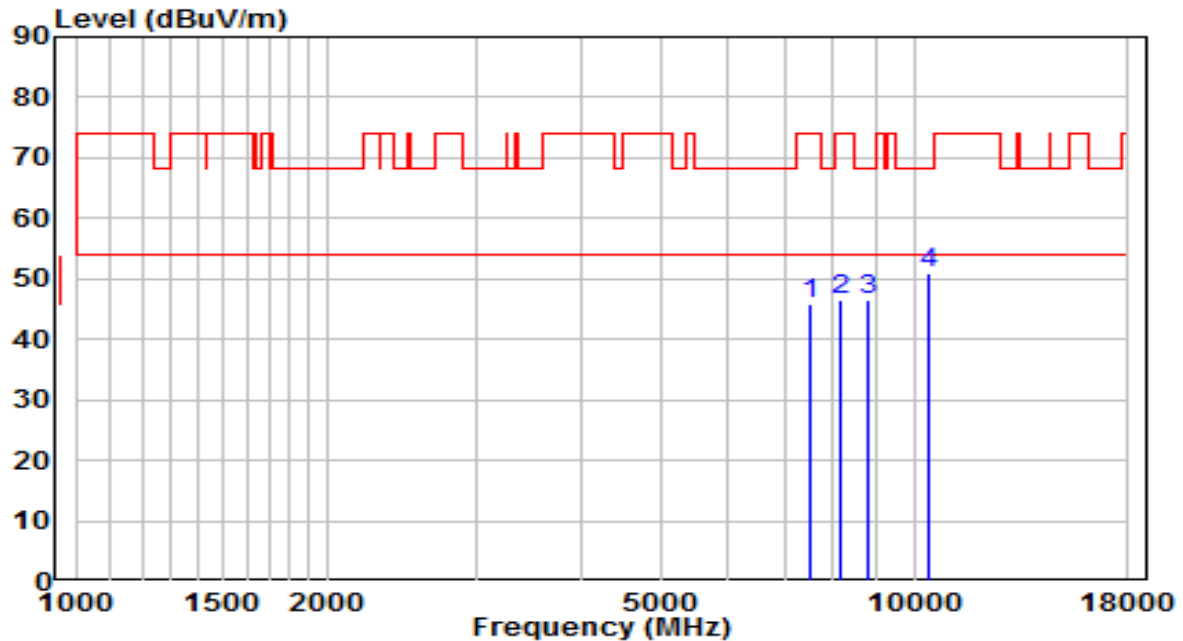


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7502.500        | 32.97          | 13.02    | 45.98                | -28.02      | 74.00          | Peak              |
| 2  | 8182.500        | 32.99          | 13.51    | 46.50                | -27.50      | 74.00          | Peak              |
| 3  | 8794.500        | 32.30          | 14.38    | 46.68                | -21.52      | 68.20          | Peak              |
| 4  | * 10409.500     | 32.72          | 18.21    | 50.93                | -17.27      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5775MHz | Test Voltage         | AC 120V/60Hz |

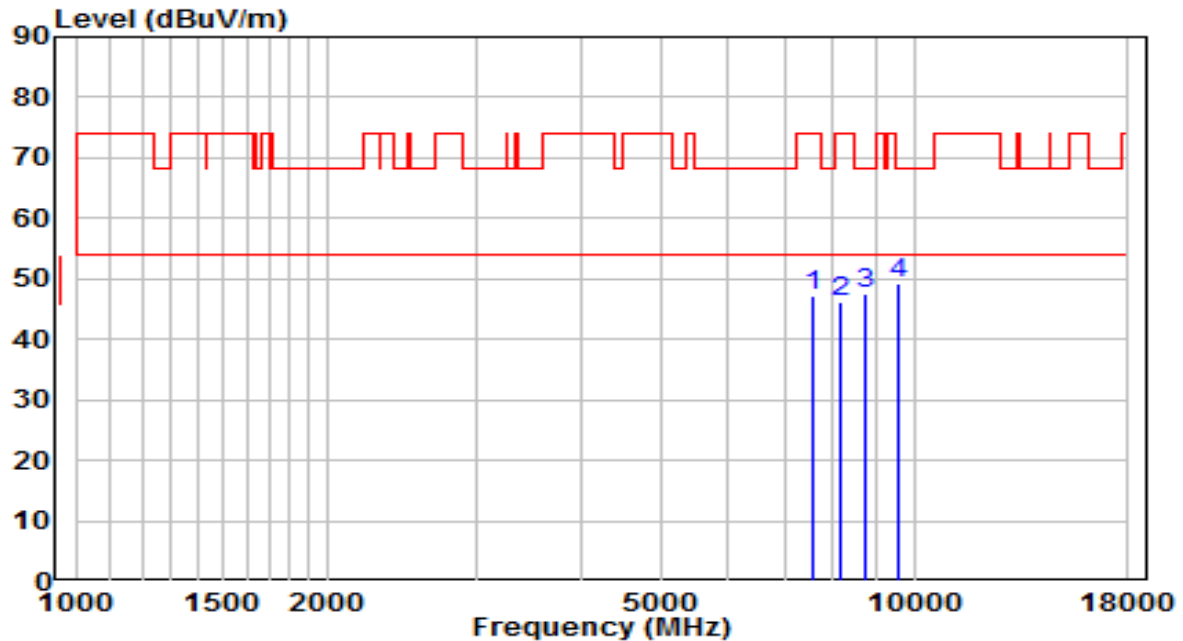


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7579.000        | 34.11          | 13.08    | 47.19                | -26.81      | 74.00          | Peak              |
| 2  | 8148.500        | 32.81          | 13.50    | 46.31                | -27.69      | 74.00          | Peak              |
| 3  | 8752.000        | 33.29          | 14.27    | 47.56                | -20.64      | 68.20          | Peak              |
| 4  | * 9610.500      | 33.44          | 15.91    | 49.35                | -18.85      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5775MHz | Test Voltage         | AC 120V/60Hz |

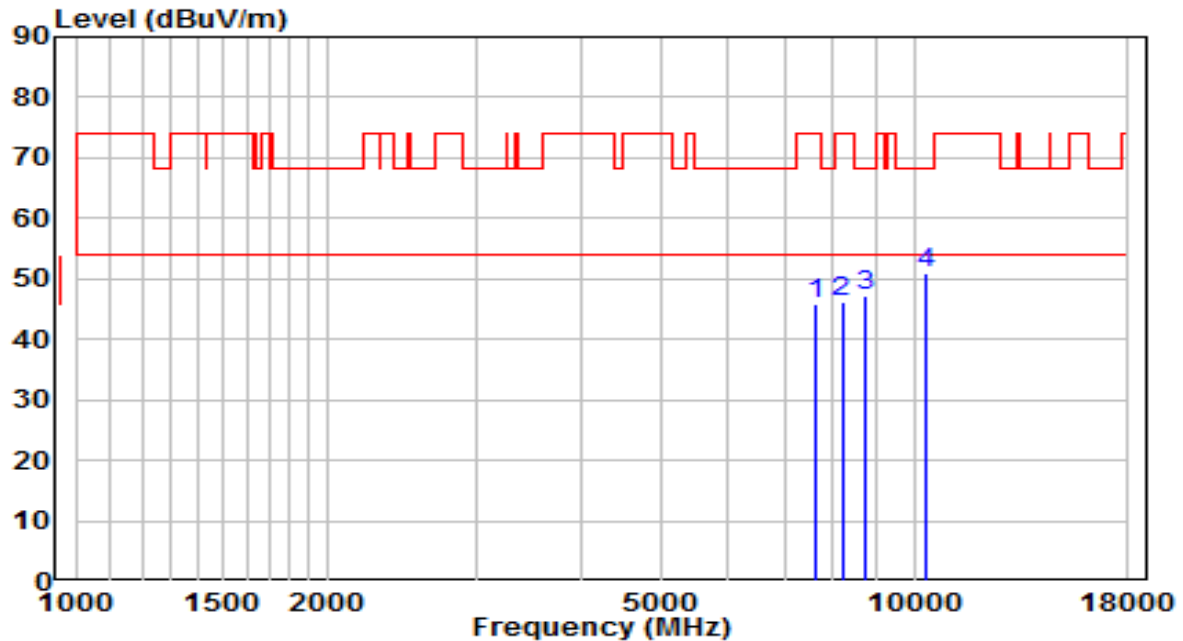


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7630.000        | 32.81          | 13.12    | 45.94                | -28.06      | 74.00          | Peak              |
| 2  | 8199.500        | 32.72          | 13.52    | 46.24                | -27.76      | 74.00          | Peak              |
| 3  | 8769.000        | 32.86          | 14.31    | 47.18                | -21.02      | 68.20          | Peak              |
| 4  | * 10358.500     | 32.91          | 18.00    | 50.91                | -17.29      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5250MHz | Test Voltage         | AC 120V/60Hz |

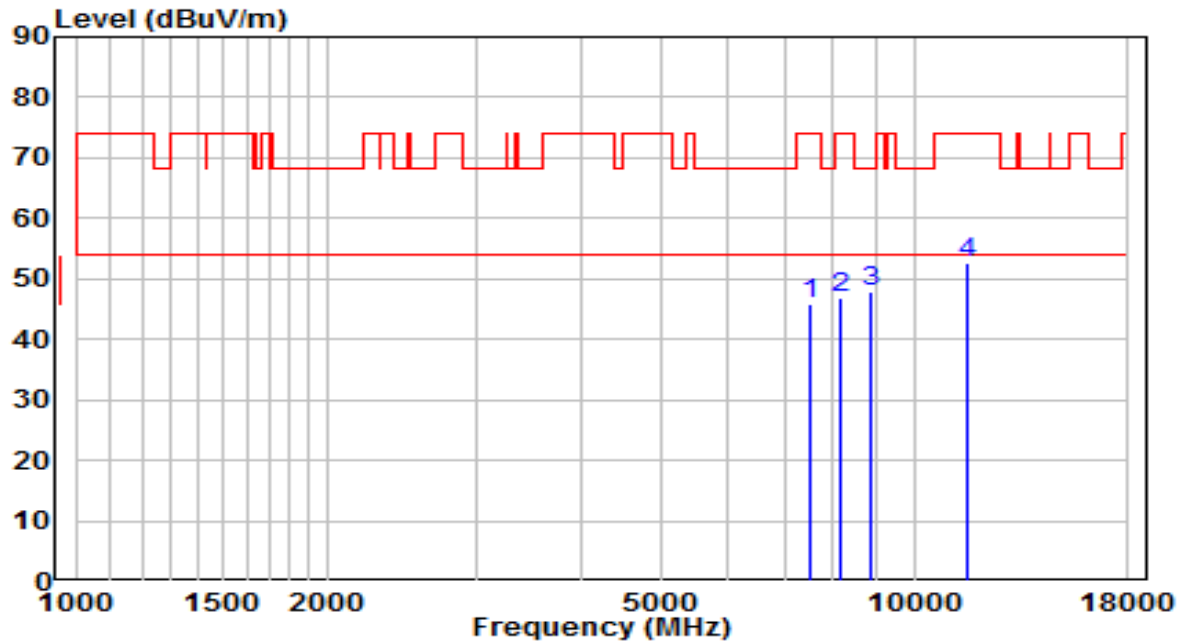


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7502.500        | 32.96          | 13.02    | 45.97                | -28.03      | 74.00          | Peak              |
| 2  | 8174.000        | 33.53          | 13.51    | 47.03                | -26.97      | 74.00          | Peak              |
| 3  | * 8854.000      | 33.45          | 14.52    | 47.97                | -20.23      | 68.20          | Peak              |
| 4  | 11582.500       | 32.86          | 19.86    | 52.72                | -21.28      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                       | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5250MHz | Test Voltage         | AC 120V/60Hz |

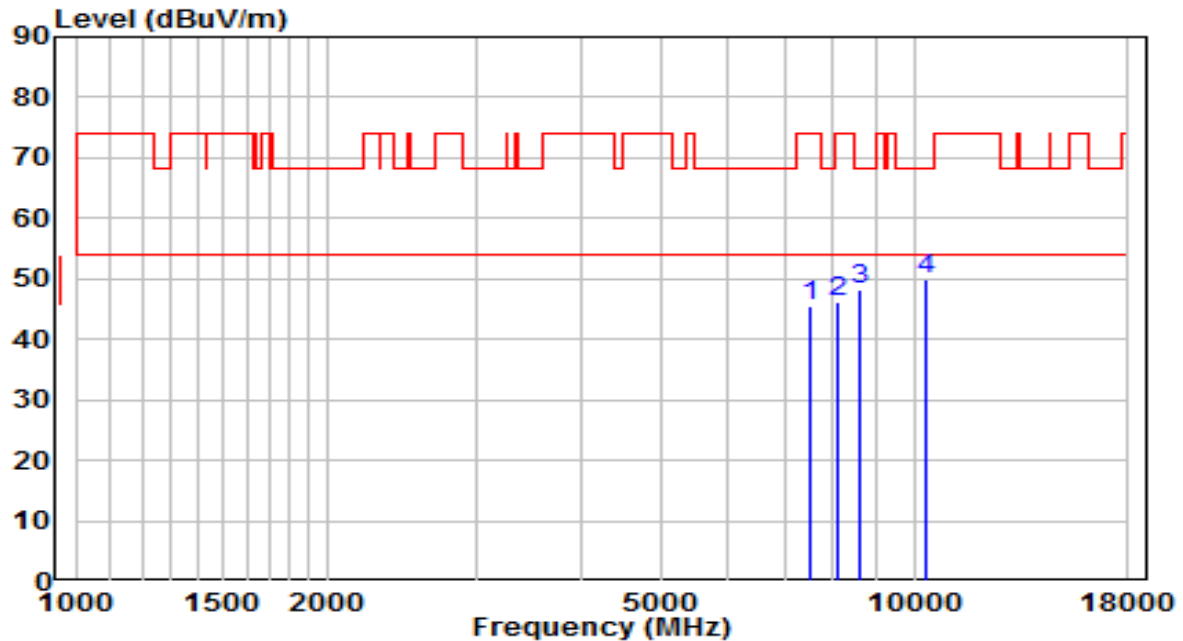


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7494.000        | 32.67          | 12.99    | 45.66                | -28.34      | 74.00          | Peak              |
| 2  | 8114.500        | 32.80          | 13.48    | 46.28                | -27.72      | 74.00          | Peak              |
| 3  | 8599.000        | 34.23          | 13.90    | 48.13                | -20.07      | 68.20          | Peak              |
| 4  | * 10367.000     | 31.82          | 18.04    | 49.85                | -18.35      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5570MHz | Test Voltage         | AC 120V/60Hz |

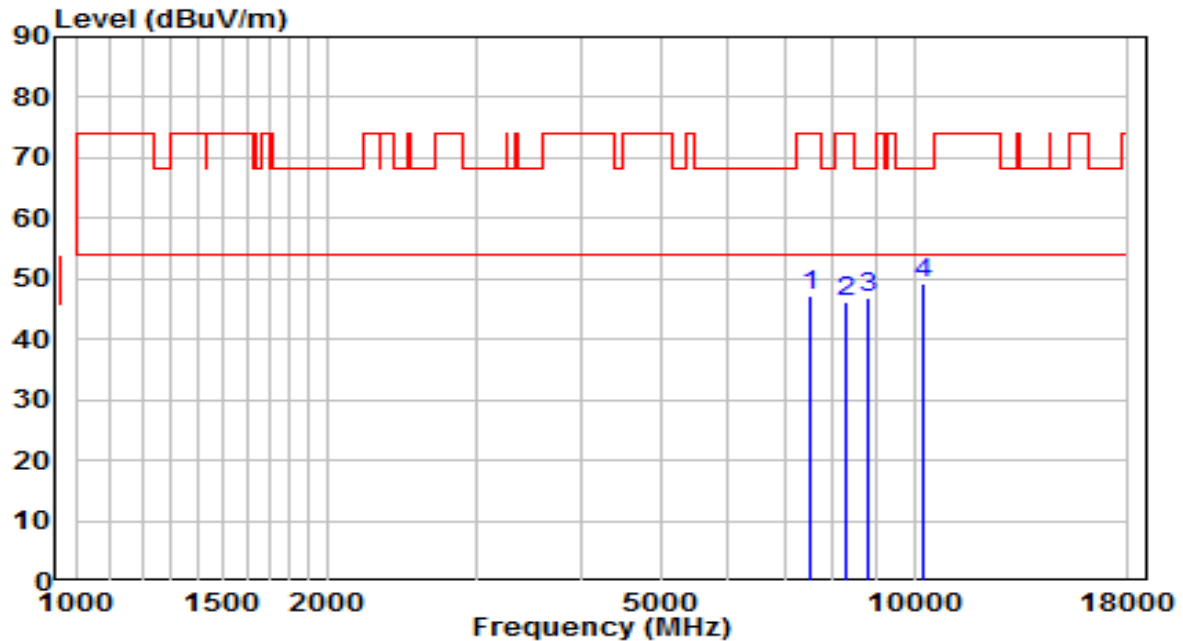


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7536.500        | 34.19          | 13.05    | 47.24                | -26.76      | 74.00          | Peak              |
| 2  | 8267.500        | 32.60          | 13.55    | 46.15                | -27.85      | 74.00          | Peak              |
| 3  | 8820.000        | 32.49          | 14.44    | 46.93                | -21.27      | 68.20          | Peak              |
| 4  | * 10256.500     | 31.62          | 17.59    | 49.21                | -18.99      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                       | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5570MHz | Test Voltage         | AC 120V/60Hz |

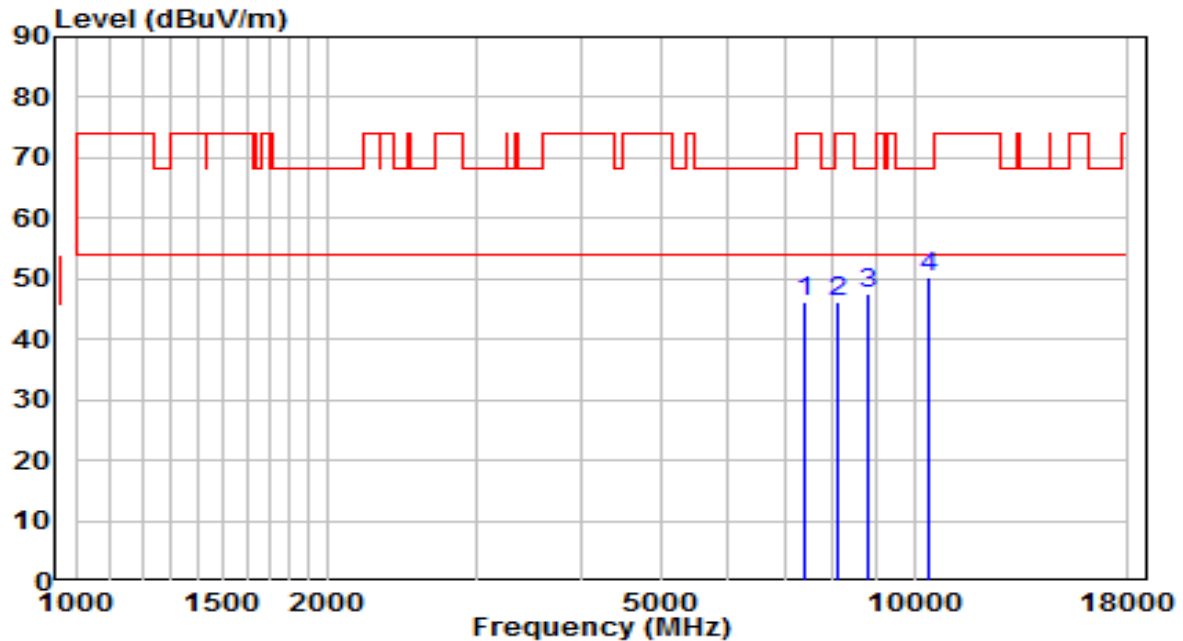


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7417.500        | 33.56          | 12.65    | 46.21                | -27.79      | 74.00          | Peak              |
| 2  | 8131.500        | 32.73          | 13.49    | 46.22                | -27.78      | 74.00          | Peak              |
| 3  | 8837.000        | 33.00          | 14.48    | 47.49                | -20.71      | 68.20          | Peak              |
| 4  | * 10392.500     | 32.25          | 18.14    | 50.39                | -17.81      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5180MHz | Test Voltage         | AC 120V/60Hz |

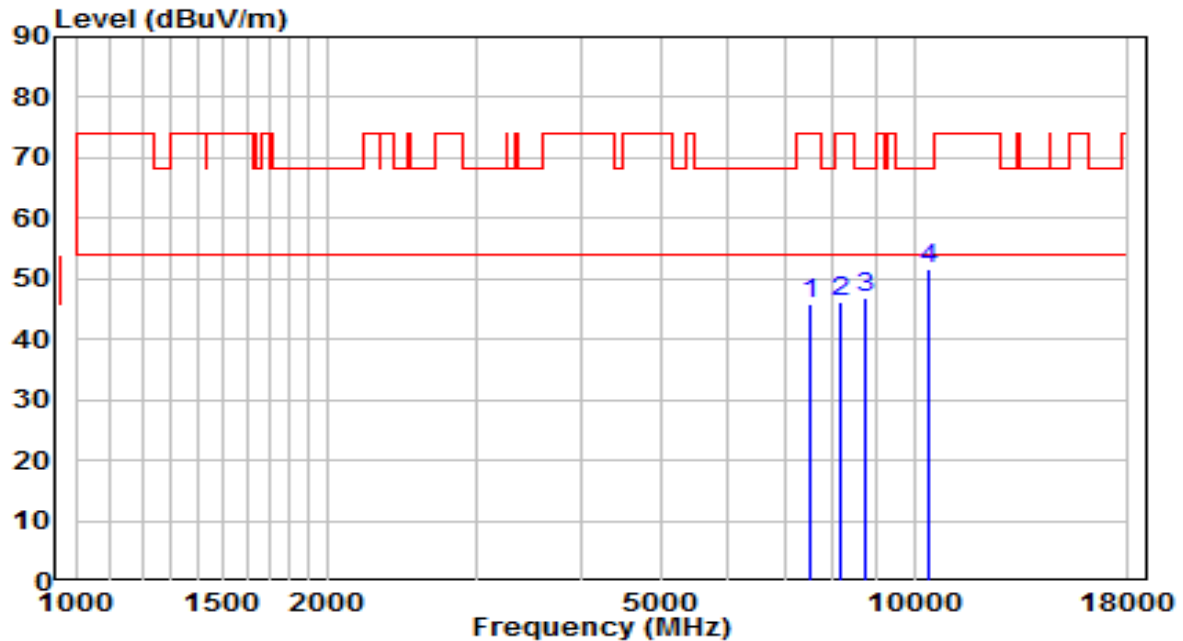


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7494.000        | 32.92          | 12.99    | 45.90                | -28.10      | 74.00          | Peak              |
| 2  | 8165.500        | 32.71          | 13.50    | 46.22                | -27.78      | 74.00          | Peak              |
| 3  | 8743.500        | 32.57          | 14.25    | 46.82                | -21.38      | 68.20          | Peak              |
| 4  | * 10435.000     | 33.18          | 18.31    | 51.49                | -16.71      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5180MHz | Test Voltage         | AC 120V/60Hz |

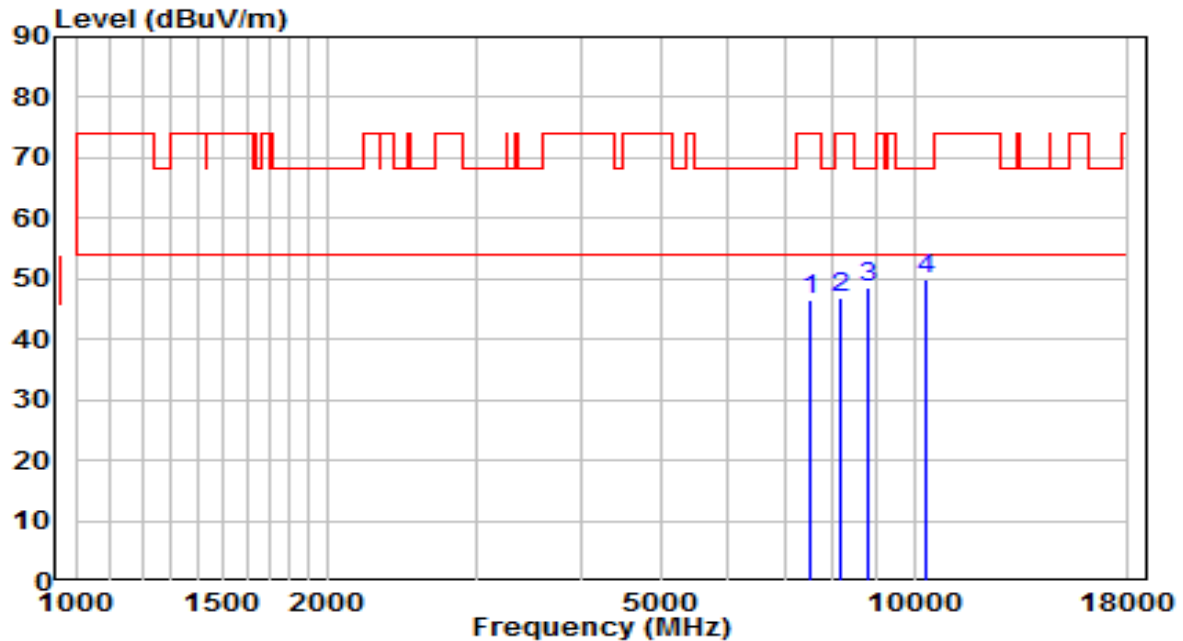


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7494.000        | 33.69          | 12.99    | 46.67                | -27.33      | 74.00          | Peak              |
| 2  | 8157.000        | 33.47          | 13.50    | 46.97                | -27.03      | 74.00          | Peak              |
| 3  | 8794.500        | 34.24          | 14.38    | 48.62                | -19.58      | 68.20          | Peak              |
| 4  | * 10358.500     | 31.92          | 18.00    | 49.92                | -18.28      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5220MHz | Test Voltage         | AC 120V/60Hz |

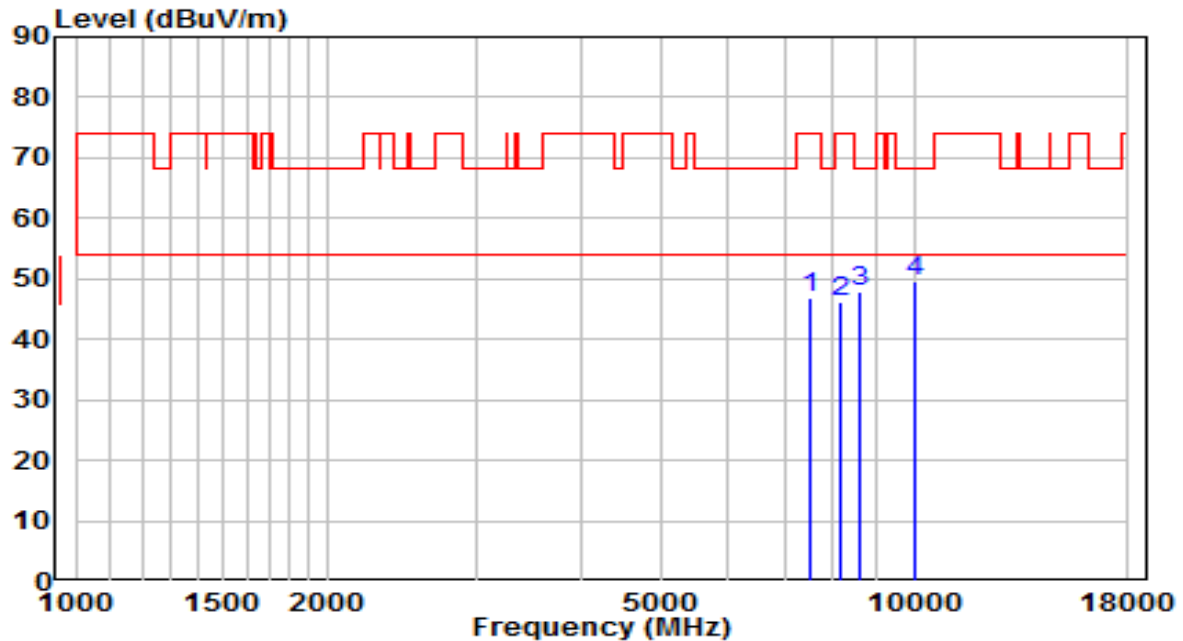


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7528.000        | 33.85          | 13.04    | 46.89                | -27.11      | 74.00          | Peak              |
| 2  | 8174.000        | 32.79          | 13.51    | 46.30                | -27.70      | 74.00          | Peak              |
| 3  | 8616.000        | 34.11          | 13.94    | 48.05                | -20.15      | 68.20          | Peak              |
| 4  | * 10001.500     | 33.12          | 16.57    | 49.68                | -18.52      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5220MHz | Test Voltage         | AC 120V/60Hz |

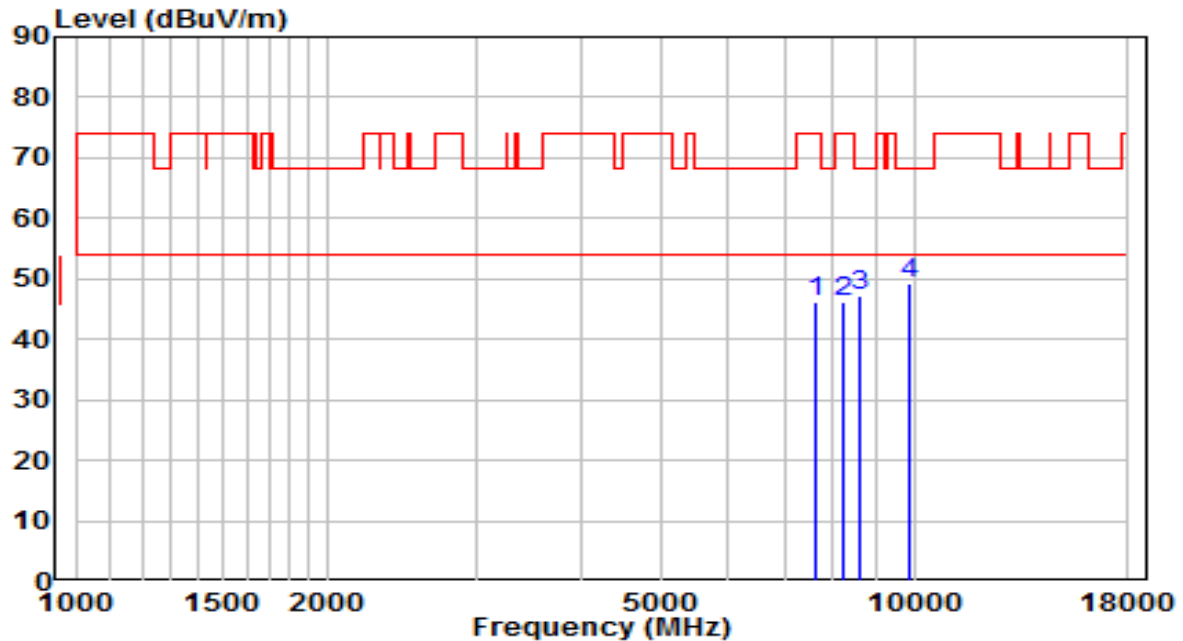


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 33.14          | 13.14    | 46.29                | -27.71      | 74.00          | Peak              |
| 2  | 8233.500        | 32.63          | 13.54    | 46.16                | -27.84      | 74.00          | Peak              |
| 3  | 8607.500        | 33.36          | 13.92    | 47.28                | -20.92      | 68.20          | Peak              |
| 4  | * 9882.500      | 33.05          | 16.36    | 49.41                | -18.79      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5240MHz | Test Voltage         | AC 120V/60Hz |

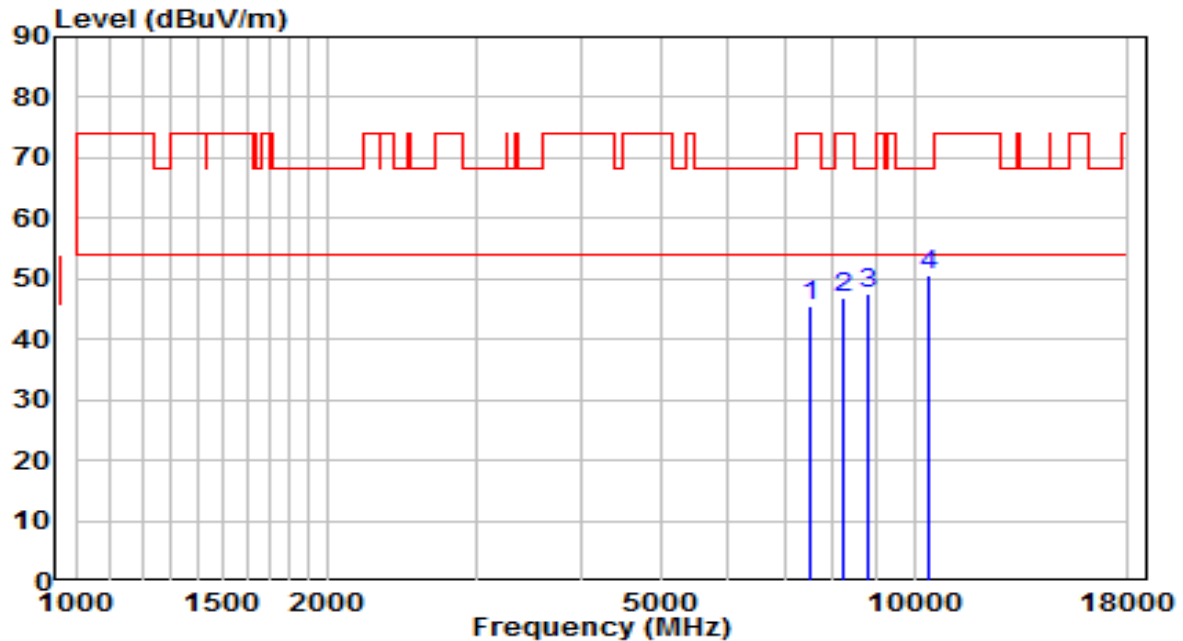


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7528.000        | 32.63          | 13.04    | 45.67                | -28.33      | 74.00          | Peak              |
| 2  | 8242.000        | 33.37          | 13.54    | 46.91                | -27.09      | 74.00          | Peak              |
| 3  | 8803.000        | 33.03          | 14.40    | 47.43                | -20.77      | 68.20          | Peak              |
| 4  | * 10409.500     | 32.51          | 18.21    | 50.71                | -17.49      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5240MHz | Test Voltage         | AC 120V/60Hz |

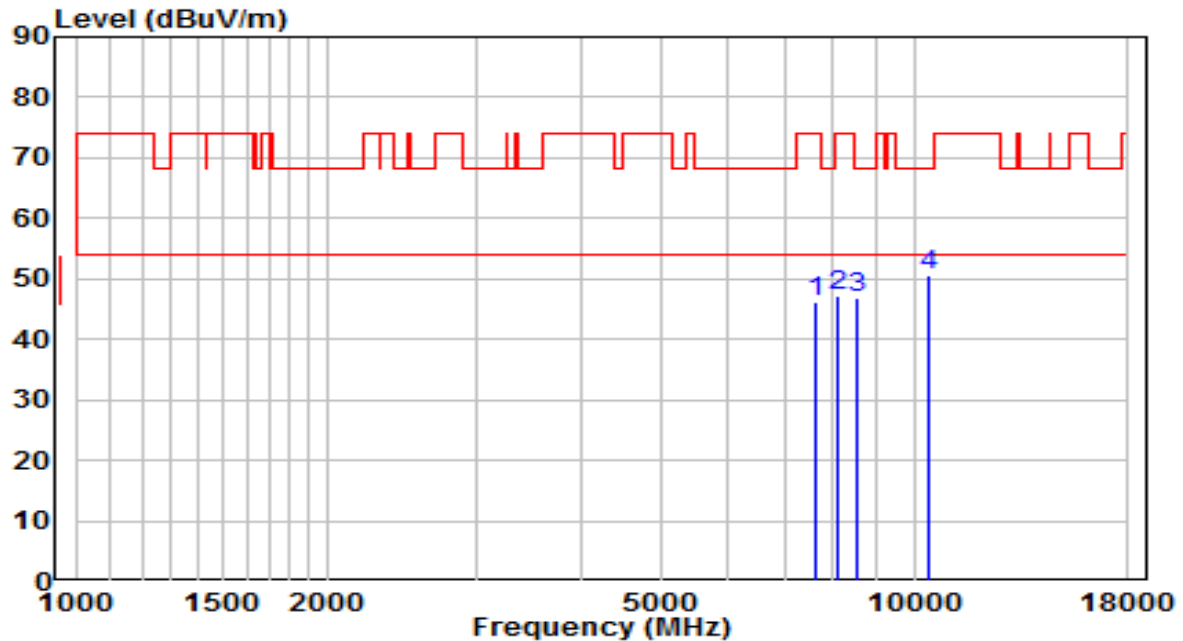


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7647.000        | 33.10          | 13.14    | 46.24                | -27.76      | 74.00          | Peak              |
| 2  | 8114.500        | 33.57          | 13.48    | 47.06                | -26.94      | 74.00          | Peak              |
| 3  | 8548.000        | 33.26          | 13.77    | 47.04                | -21.16      | 68.20          | Peak              |
| 4  | * 10384.000     | 32.40          | 18.10    | 50.50                | -17.70      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5260MHz | Test Voltage         | AC 120V/60Hz |

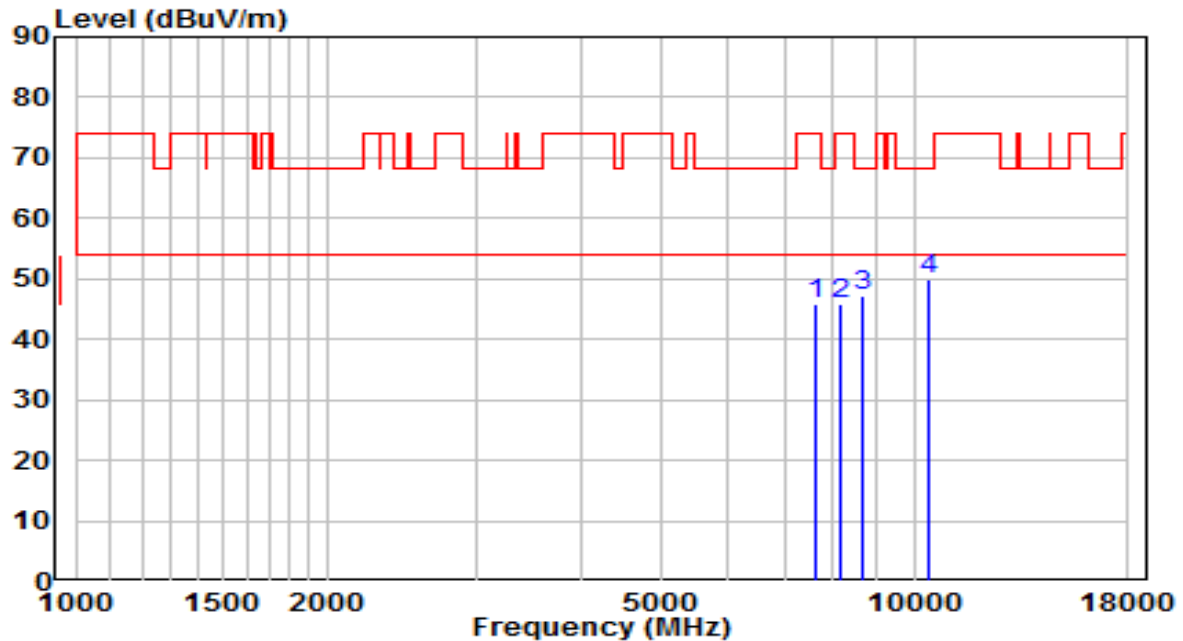


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7638.500        | 32.87          | 13.13    | 46.00                | -28.00      | 74.00          | Peak              |
| 2  | 8174.000        | 32.48          | 13.51    | 45.99                | -28.01      | 74.00          | Peak              |
| 3  | 8709.500        | 33.10          | 14.17    | 47.27                | -20.93      | 68.20          | Peak              |
| 4  | * 10443.500     | 31.57          | 18.34    | 49.92                | -18.28      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5260MHz | Test Voltage         | AC 120V/60Hz |

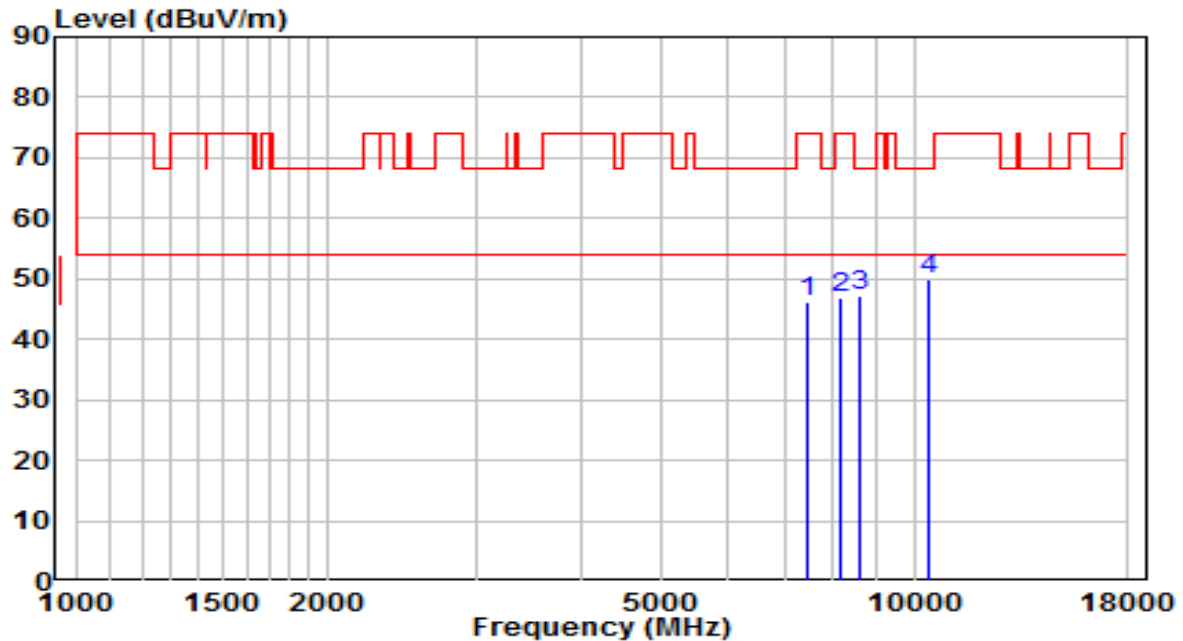


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7477.000        | 33.16          | 12.91    | 46.07                | -27.93      | 74.00          | Peak              |
| 2  | 8174.000        | 33.49          | 13.51    | 46.99                | -27.01      | 74.00          | Peak              |
| 3  | 8633.000        | 33.26          | 13.98    | 47.24                | -20.96      | 68.20          | Peak              |
| 4  | * 10384.000     | 31.96          | 18.10    | 50.06                | -18.14      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5300MHz | Test Voltage         | AC 120V/60Hz |

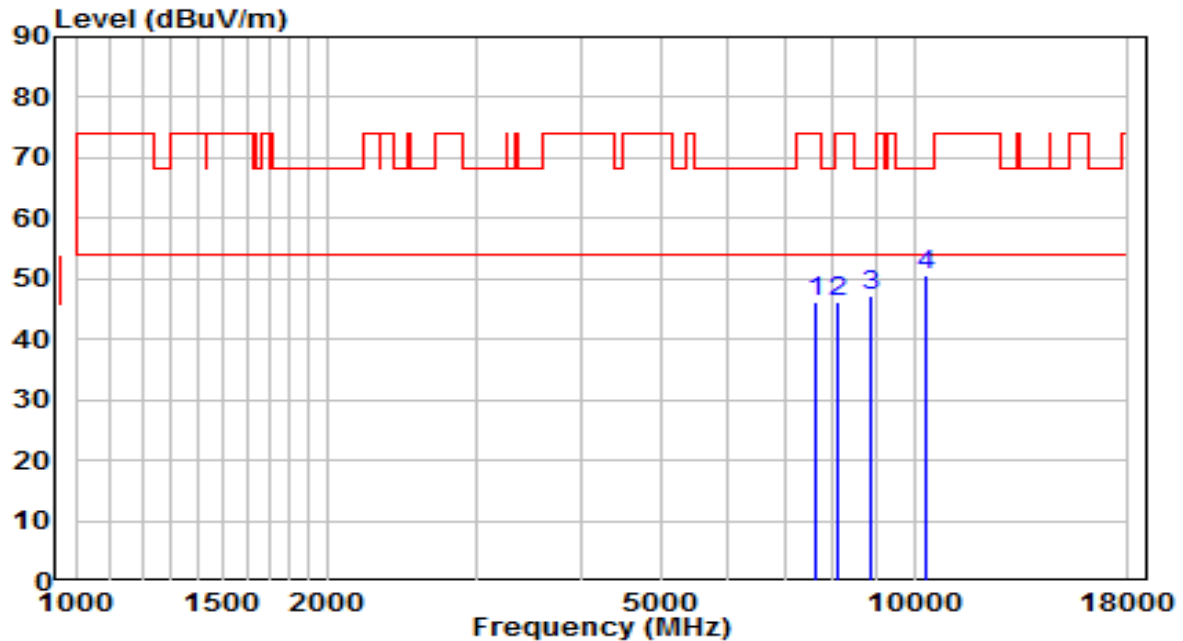


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7630.000        | 32.90          | 13.12    | 46.02                | -27.98      | 74.00          | Peak              |
| 2  | 8106.000        | 32.84          | 13.48    | 46.32                | -27.68      | 74.00          | Peak              |
| 3  | 8854.000        | 32.81          | 14.52    | 47.33                | -20.87      | 68.20          | Peak              |
| 4  | * 10299.000     | 32.72          | 17.76    | 50.48                | -17.72      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5300MHz | Test Voltage         | AC 120V/60Hz |

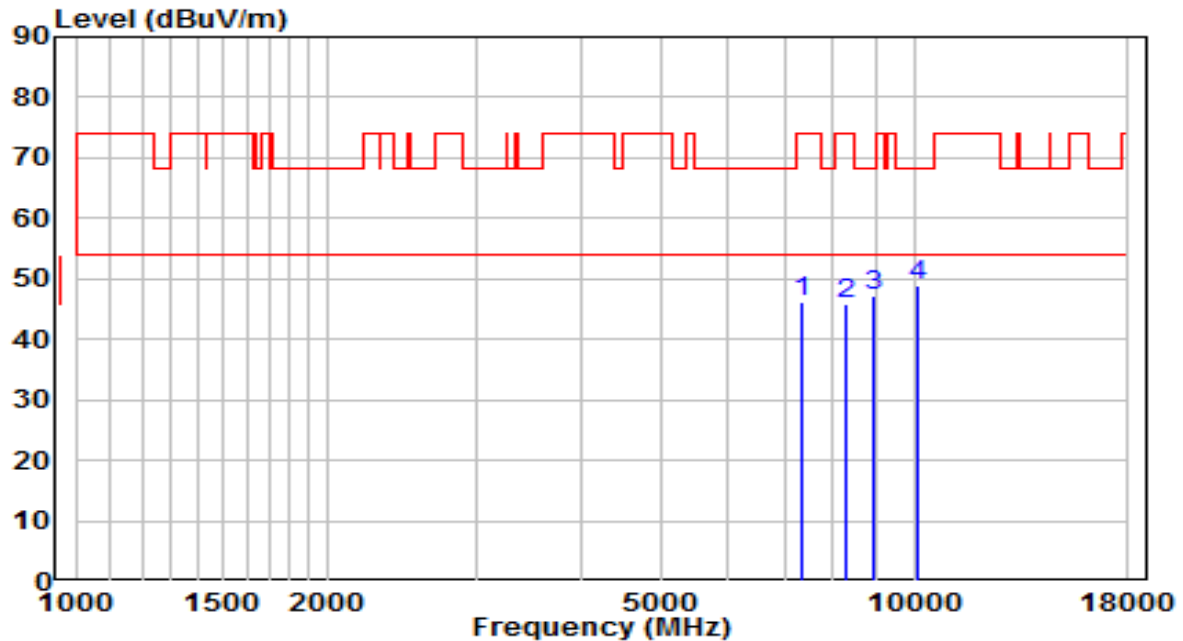


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7366.500        | 33.92          | 12.42    | 46.34                | -27.66      | 74.00          | Peak              |
| 2  | 8310.000        | 32.26          | 13.57    | 45.83                | -28.17      | 74.00          | Peak              |
| 3  | 8930.500        | 32.65          | 14.71    | 47.36                | -20.84      | 68.20          | Peak              |
| 4  | * 10120.500     | 31.80          | 17.04    | 48.85                | -19.35      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5320MHz | Test Voltage         | AC 120V/60Hz |

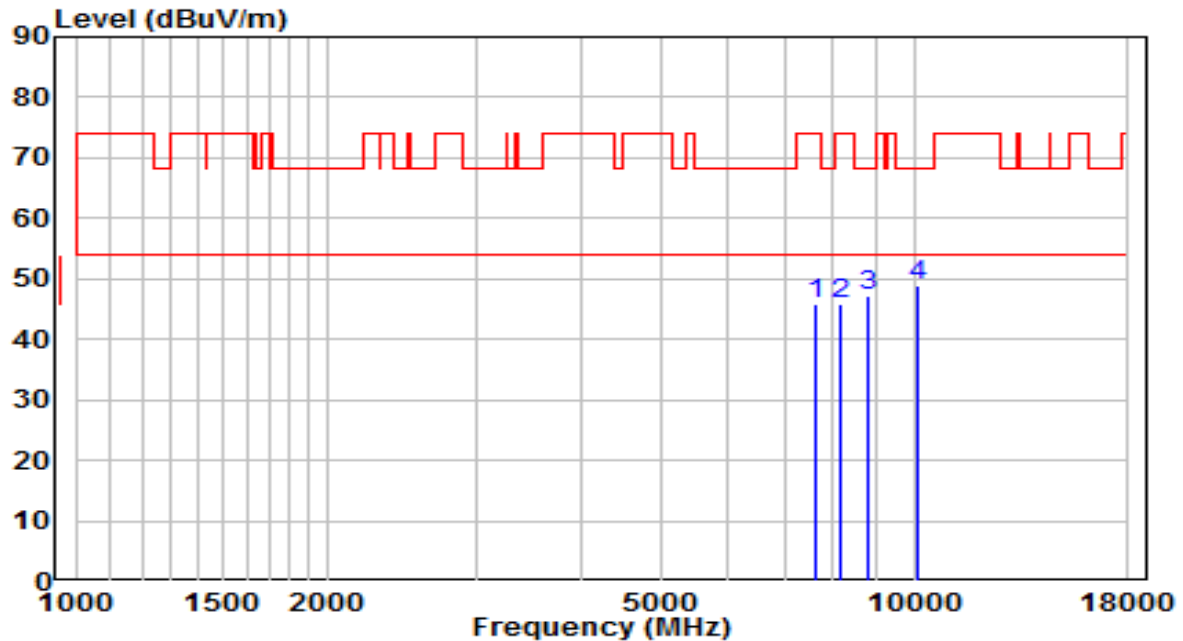


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7630.000        | 32.75          | 13.12    | 45.87                | -28.13      | 74.00          | Peak              |
| 2  | 8174.000        | 32.49          | 13.51    | 45.99                | -28.01      | 74.00          | Peak              |
| 3  | 8786.000        | 33.01          | 14.36    | 47.36                | -20.84      | 68.20          | Peak              |
| 4  | * 10095.000     | 32.06          | 16.94    | 49.01                | -19.19      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5320MHz | Test Voltage         | AC 120V/60Hz |

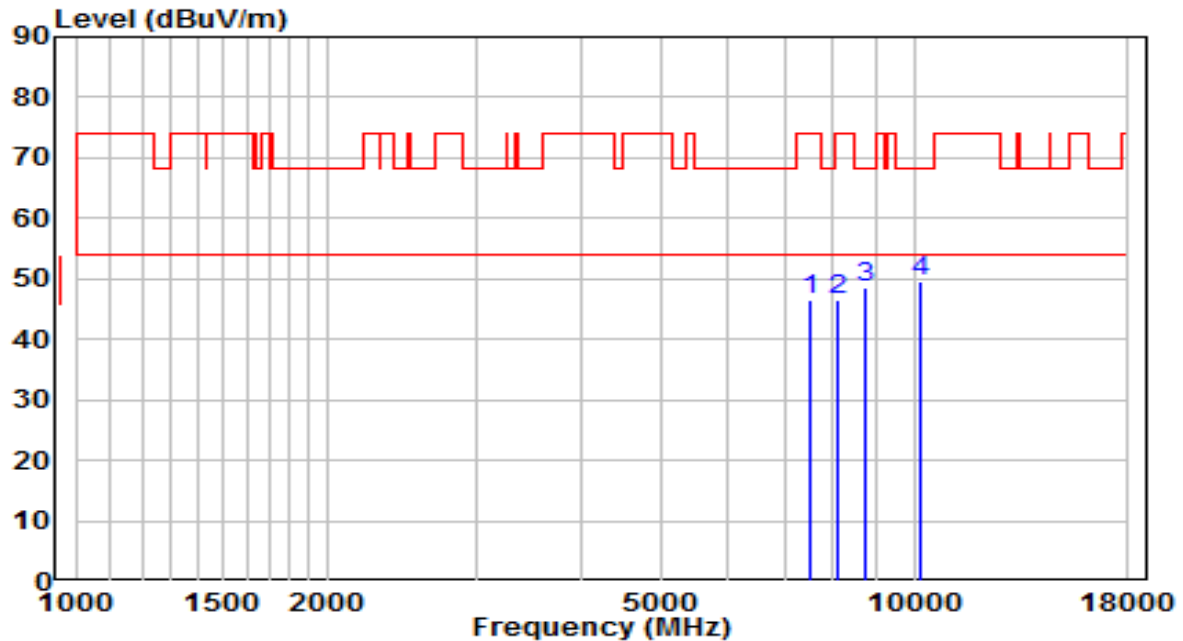


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7536.500        | 33.54          | 13.05    | 46.59                | -27.41      | 74.00          | Peak              |
| 2  | 8097.500        | 33.10          | 13.47    | 46.58                | -27.42      | 74.00          | Peak              |
| 3  | 8760.500        | 34.30          | 14.29    | 48.59                | -19.61      | 68.20          | Peak              |
| 4  | * 10205.500     | 32.31          | 17.39    | 49.69                | -18.51      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5500MHz | Test Voltage         | AC 120V/60Hz |

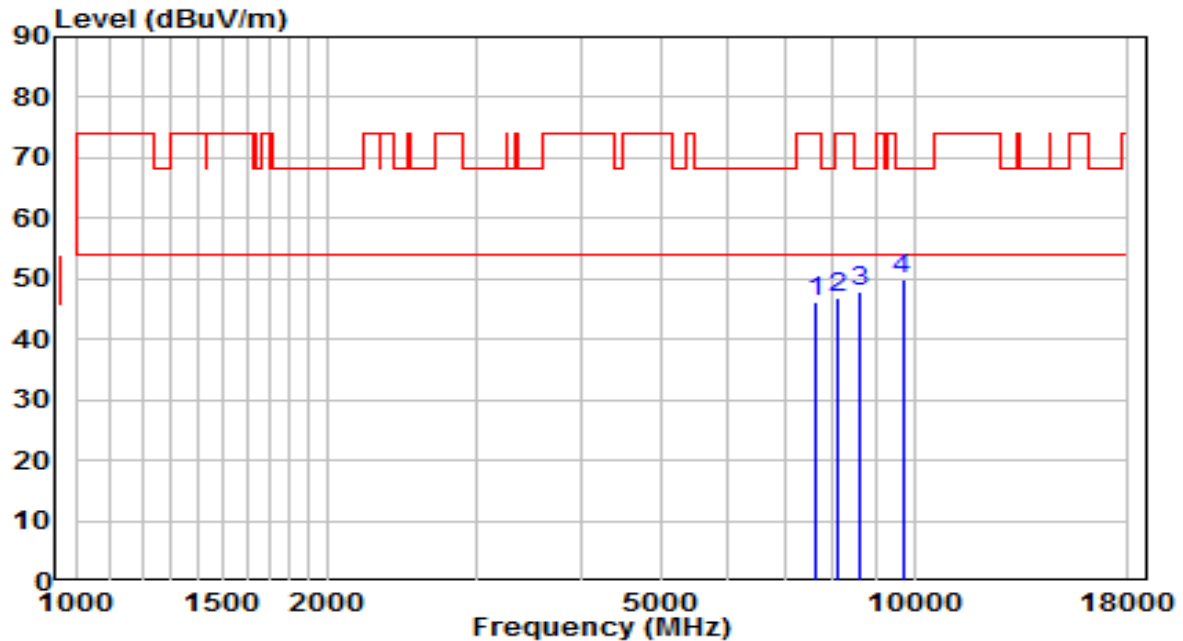


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7621.500        | 33.00          | 13.12    | 46.11                | -27.89      | 74.00          | Peak              |
| 2  | 8097.500        | 33.31          | 13.47    | 46.78                | -27.22      | 74.00          | Peak              |
| 3  | 8624.500        | 33.79          | 13.96    | 47.75                | -20.45      | 68.20          | Peak              |
| 4  | * 9687.000      | 33.85          | 16.03    | 49.88                | -18.32      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5500MHz | Test Voltage         | AC 120V/60Hz |

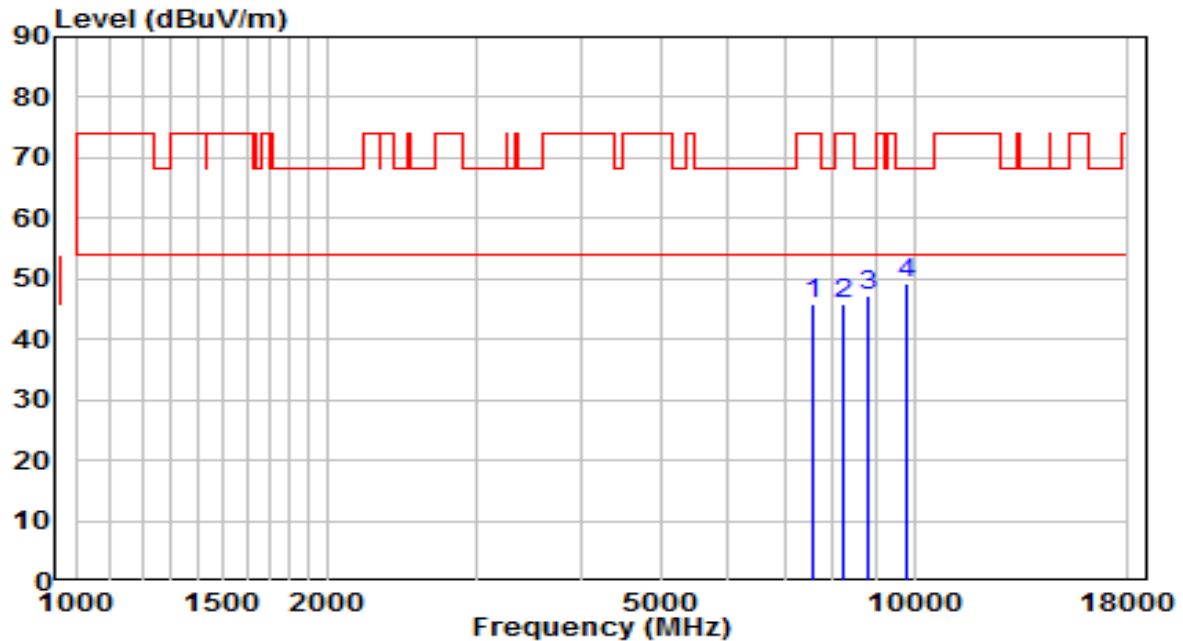


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7579.000        | 32.84          | 13.08    | 45.92                | -28.08      | 74.00          | Peak              |
| 2  | 8233.500        | 32.31          | 13.54    | 45.85                | -28.15      | 74.00          | Peak              |
| 3  | 8794.500        | 32.80          | 14.38    | 47.18                | -21.02      | 68.20          | Peak              |
| 4  | * 9831.500      | 32.88          | 16.28    | 49.16                | -19.04      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5580MHz | Test Voltage         | AC 120V/60Hz |

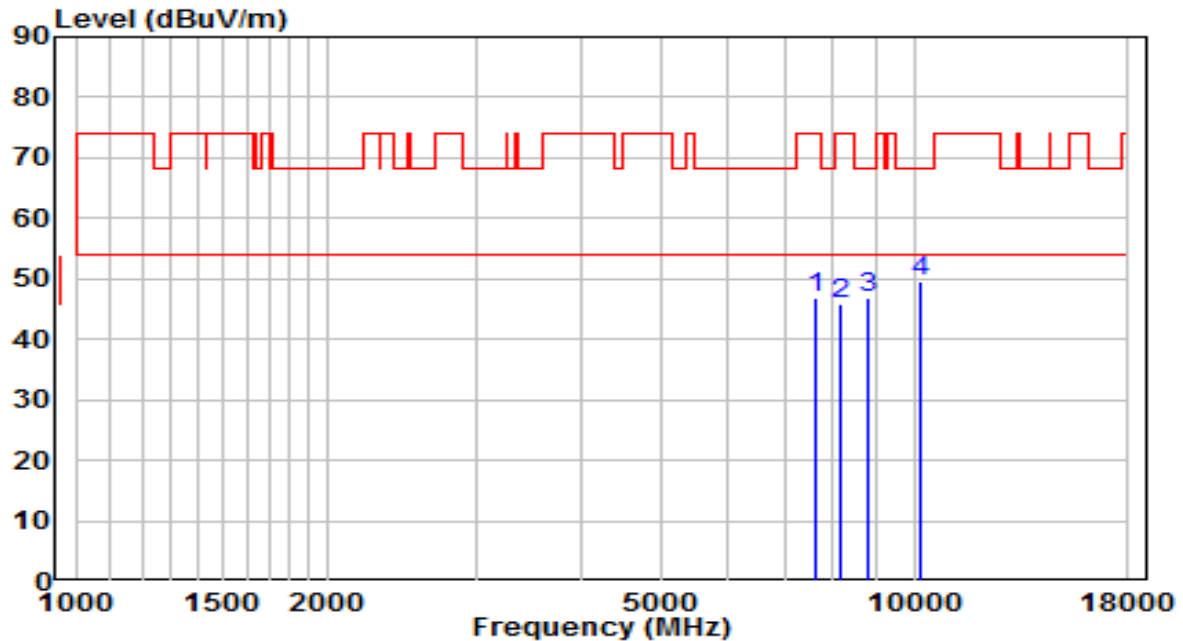


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7621.500        | 33.74          | 13.12    | 46.85                | -27.15      | 74.00          | Peak              |
| 2  | 8191.000        | 32.42          | 13.52    | 45.93                | -28.07      | 74.00          | Peak              |
| 3  | 8837.000        | 32.54          | 14.48    | 47.02                | -21.18      | 68.20          | Peak              |
| 4  | * 10146.000     | 32.34          | 17.15    | 49.49                | -18.71      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5580MHz | Test Voltage         | AC 120V/60Hz |

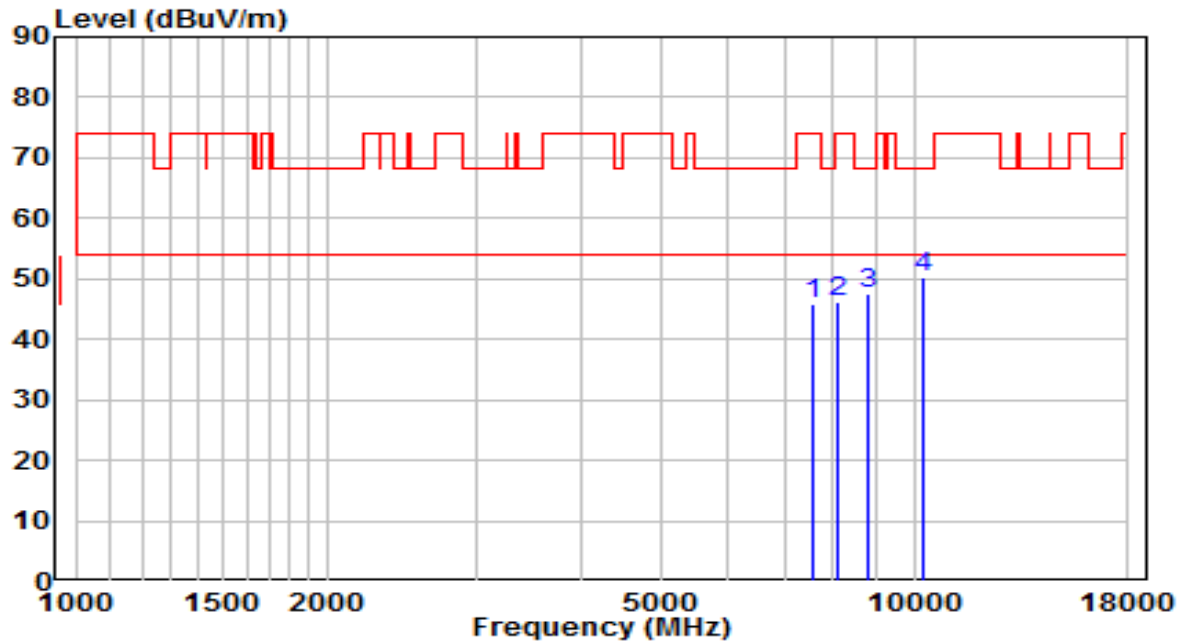


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7553.500        | 32.70          | 13.06    | 45.76                | -28.24      | 74.00          | Peak              |
| 2  | 8131.500        | 32.78          | 13.49    | 46.27                | -27.73      | 74.00          | Peak              |
| 3  | 8794.500        | 33.06          | 14.38    | 47.43                | -20.77      | 68.20          | Peak              |
| 4  | * 10265.000     | 32.59          | 17.63    | 50.22                | -17.98      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5700MHz | Test Voltage         | AC 120V/60Hz |

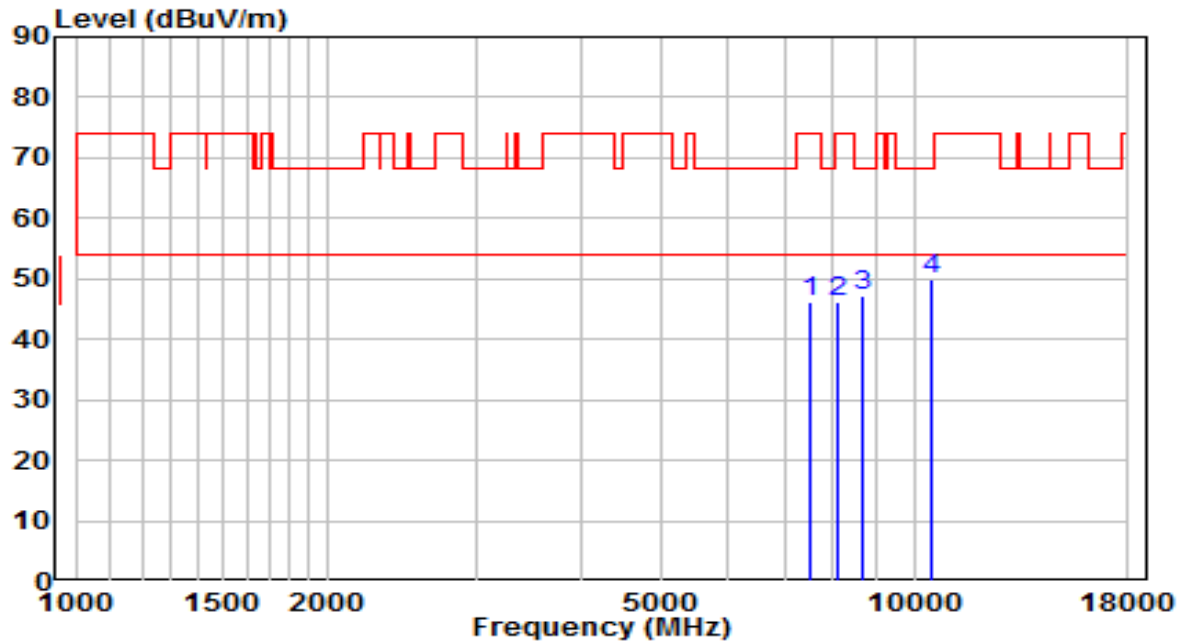


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7502.500        | 33.08          | 13.02    | 46.10                | -27.90      | 74.00          | Peak              |
| 2  | 8106.000        | 32.81          | 13.48    | 46.28                | -27.72      | 74.00          | Peak              |
| 3  | 8650.000        | 33.17          | 14.02    | 47.19                | -21.01      | 68.20          | Peak              |
| 4  | * 10511.500     | 31.46          | 18.59    | 50.04                | -18.16      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5700MHz | Test Voltage         | AC 120V/60Hz |

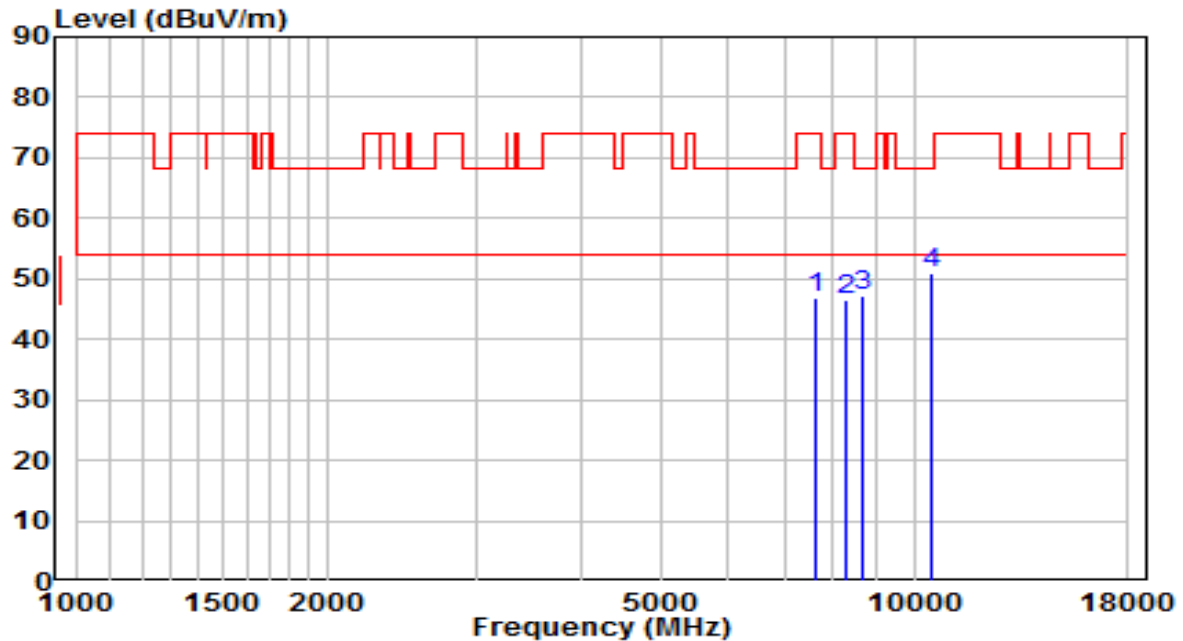


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 33.71          | 13.14    | 46.86                | -27.14      | 74.00          | Peak              |
| 2  | 8284.500        | 33.08          | 13.56    | 46.63                | -27.37      | 74.00          | Peak              |
| 3  | 8650.000        | 33.04          | 14.02    | 47.06                | -21.14      | 68.20          | Peak              |
| 4  | * 10520.000     | 32.32          | 18.60    | 50.91                | -17.29      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5720MHz | Test Voltage         | AC 120V/60Hz |

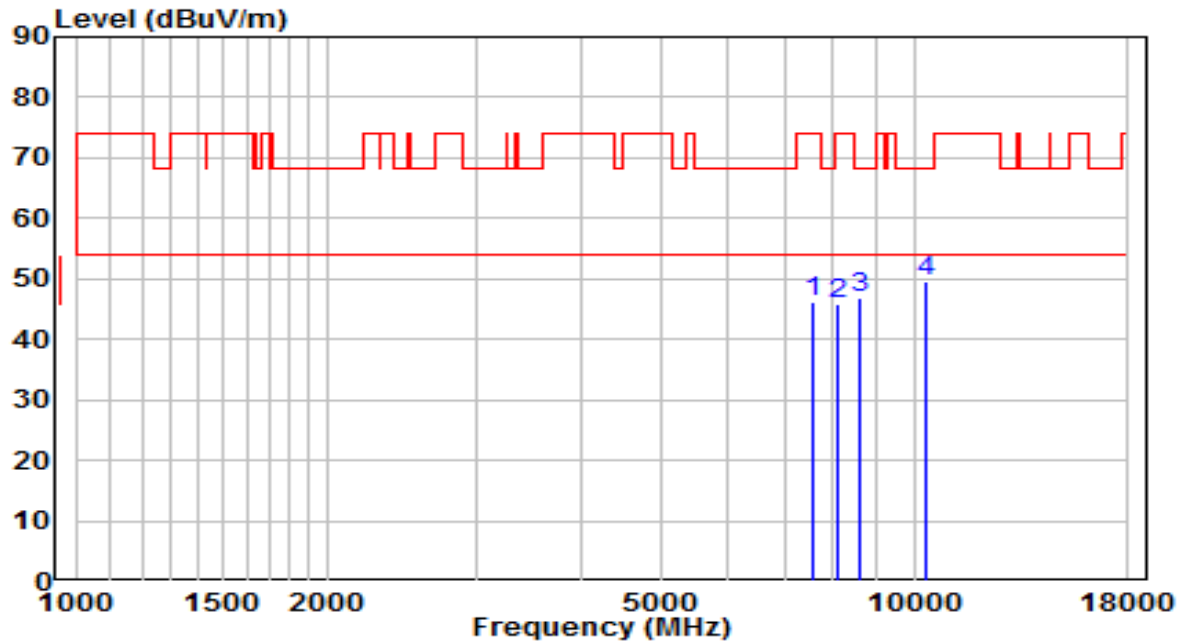


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7579.000        | 32.99          | 13.08    | 46.07                | -27.93      | 74.00          | Peak              |
| 2  | 8106.000        | 32.53          | 13.48    | 46.01                | -27.99      | 74.00          | Peak              |
| 3  | 8590.500        | 33.12          | 13.88    | 47.00                | -21.20      | 68.20          | Peak              |
| 4  | * 10316.000     | 31.66          | 17.83    | 49.49                | -18.71      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5720MHz | Test Voltage         | AC 120V/60Hz |

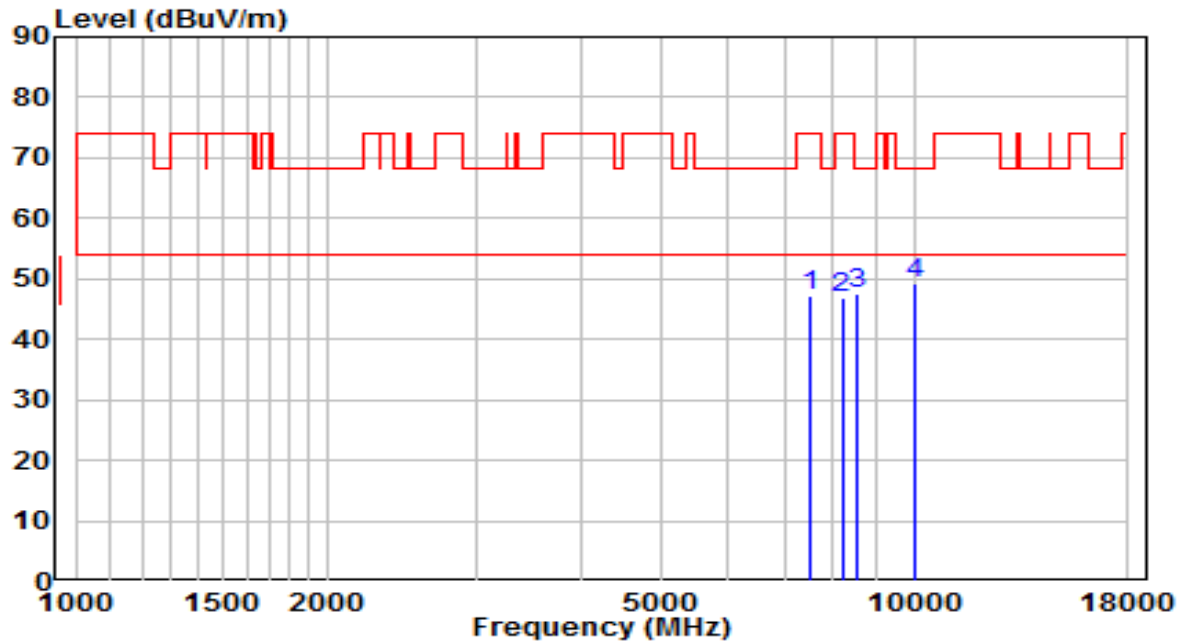


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7511.000        | 34.32          | 13.02    | 47.34                | -26.66      | 74.00          | Peak              |
| 2  | 8199.500        | 33.37          | 13.52    | 46.89                | -27.11      | 74.00          | Peak              |
| 3  | 8548.000        | 33.66          | 13.77    | 47.43                | -20.77      | 68.20          | Peak              |
| 4  | * 10052.500     | 32.48          | 16.77    | 49.25                | -18.95      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5745MHz | Test Voltage         | AC 120V/60Hz |

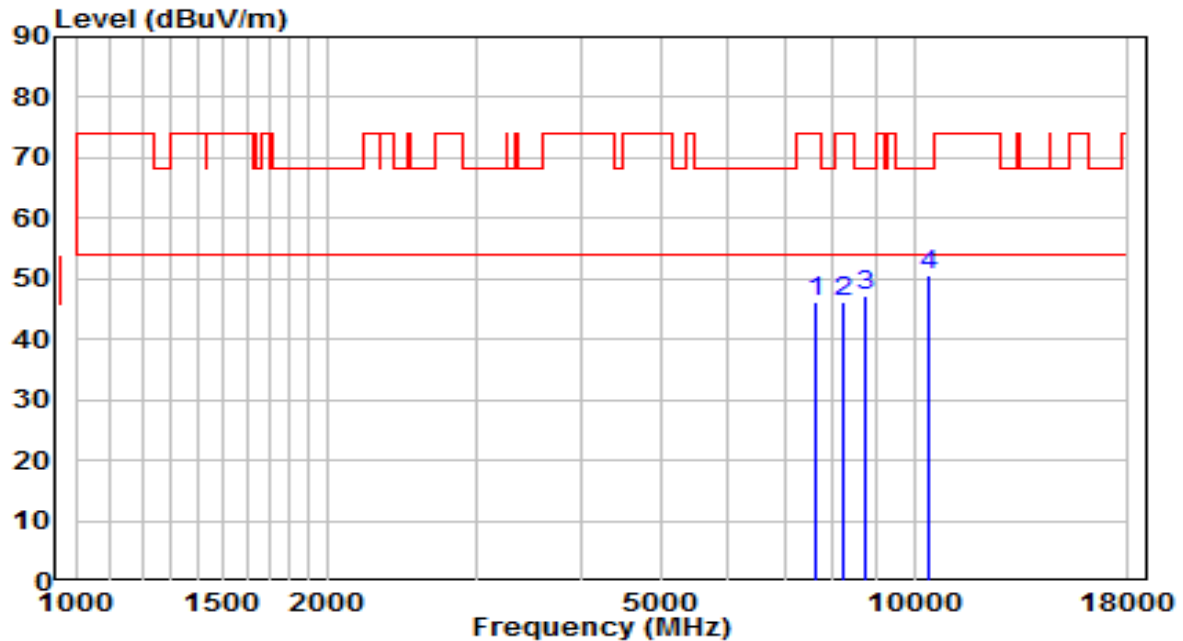


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7630.000        | 33.17          | 13.12    | 46.29                | -27.71      | 74.00          | Peak              |
| 2  | 8225.000        | 32.81          | 13.53    | 46.34                | -27.66      | 74.00          | Peak              |
| 3  | 8743.500        | 33.06          | 14.25    | 47.31                | -20.89      | 68.20          | Peak              |
| 4  | * 10392.500     | 32.30          | 18.14    | 50.44                | -17.76      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5745MHz | Test Voltage         | AC 120V/60Hz |

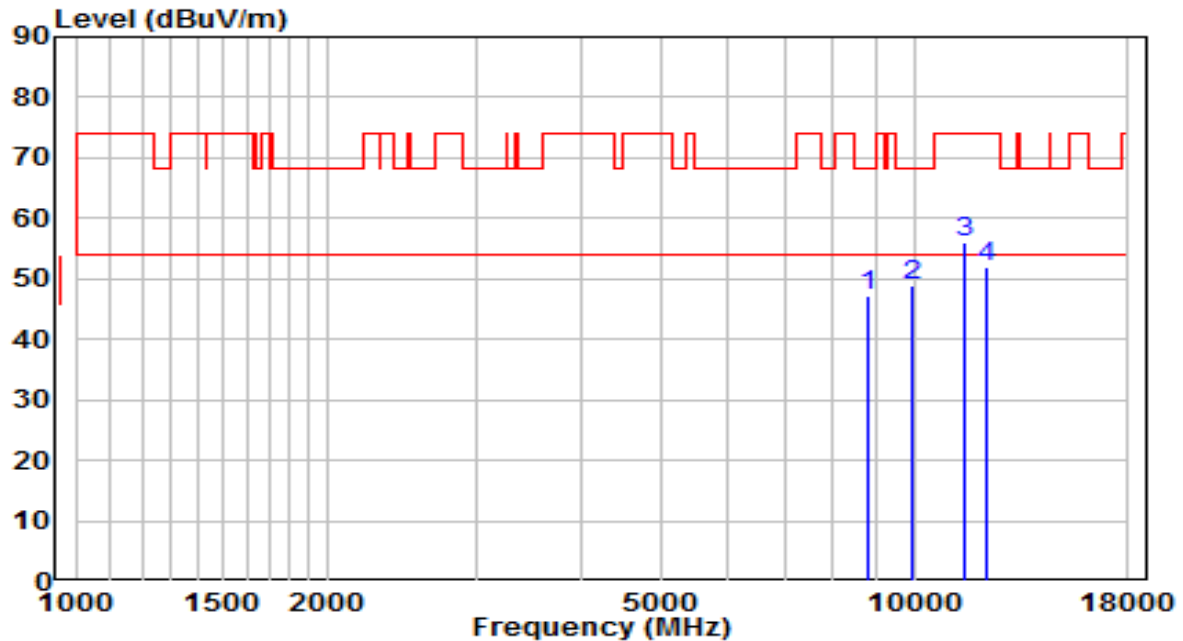


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8837.000        | 32.78          | 14.48    | 47.26                | -20.94      | 68.20          | Peak              |
| 2  | 9950.500        | 32.53          | 16.48    | 49.00                | -19.20      | 68.20          | Peak              |
| 3  | * 11497.500     | 36.09          | 20.05    | 56.14                | -17.86      | 74.00          | Peak              |
| 4  | 12228.500       | 33.17          | 18.68    | 51.85                | -22.15      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5785MHz | Test Voltage         | AC 120V/60Hz |

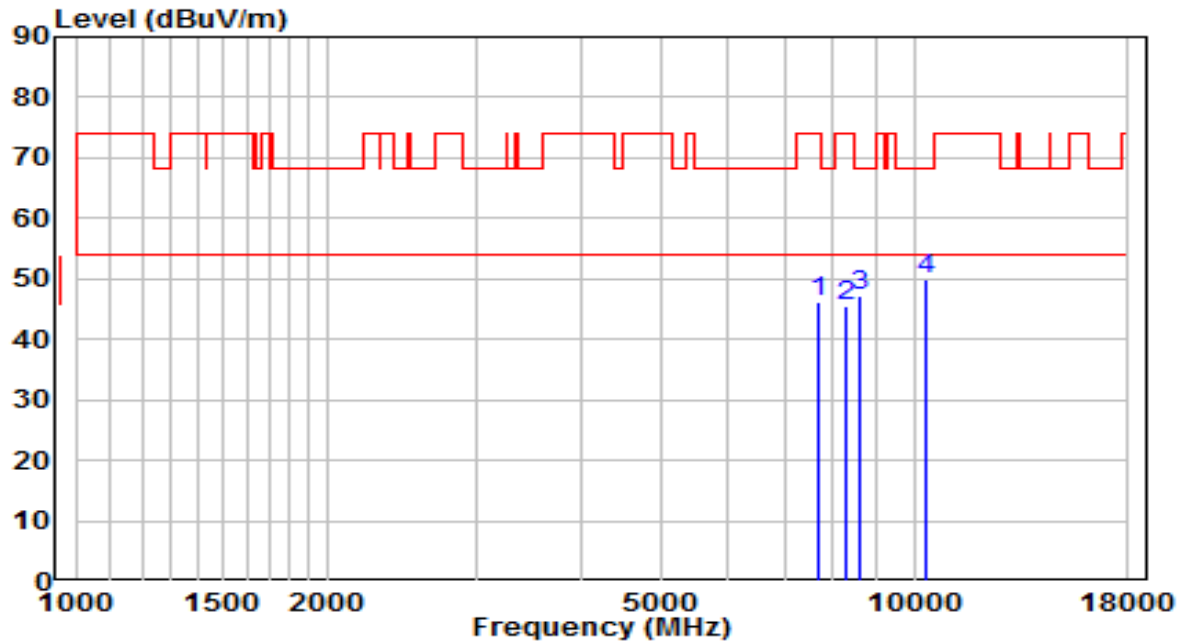


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7689.500        | 32.89          | 13.17    | 46.07                | -27.93      | 74.00          | Peak              |
| 2  | 8267.500        | 32.09          | 13.55    | 45.64                | -28.36      | 74.00          | Peak              |
| 3  | 8641.500        | 33.14          | 14.00    | 47.14                | -21.06      | 68.20          | Peak              |
| 4  | * 10367.000     | 31.96          | 18.04    | 50.00                | -18.20      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5785MHz | Test Voltage         | AC 120V/60Hz |

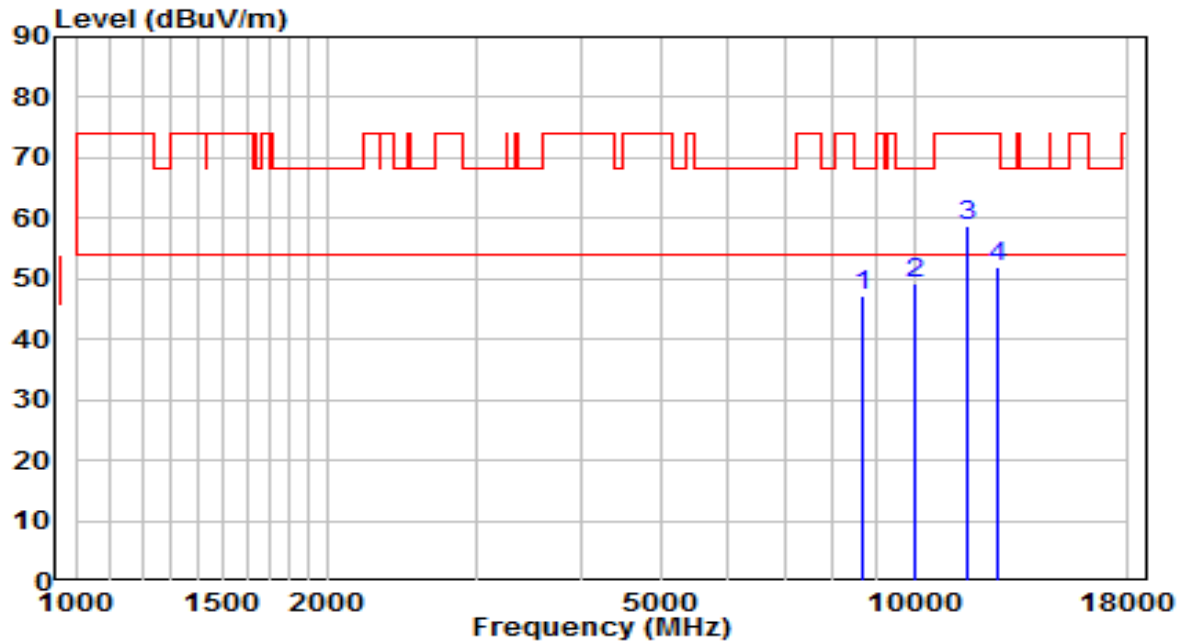


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8709.500        | 33.21          | 14.17    | 47.38                | -20.82      | 68.20          | Peak              |
| 2  | 10035.500       | 32.41          | 16.70    | 49.12                | -19.08      | 68.20          | Peak              |
| 3  | * 11565.500     | 38.88          | 19.90    | 58.79                | -15.21      | 74.00          | Peak              |
| 4  | 12602.500       | 33.12          | 18.71    | 51.83                | -22.17      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5825MHz | Test Voltage         | AC 120V/60Hz |

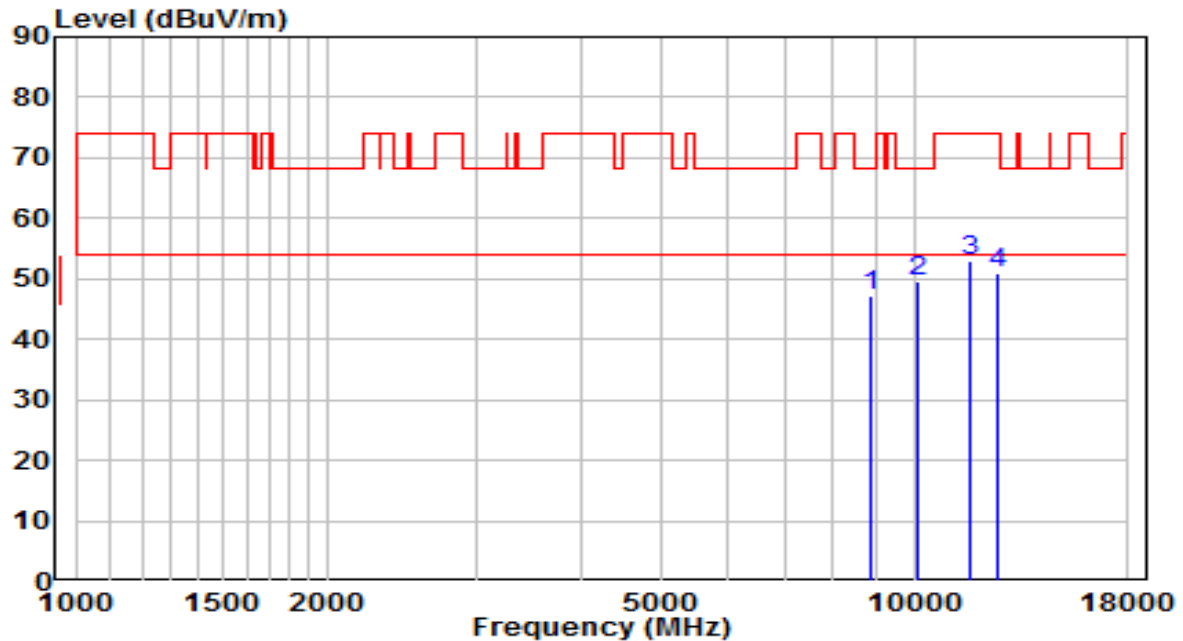


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8854.000        | 32.58          | 14.52    | 47.10                | -21.10      | 68.20          | Peak              |
| 2  | * 10120.500     | 32.49          | 17.04    | 49.54                | -18.66      | 68.20          | Peak              |
| 3  | 11642.000       | 33.24          | 19.73    | 52.97                | -21.03      | 74.00          | Peak              |
| 4  | 12543.000       | 32.55          | 18.53    | 51.08                | -22.92      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5825MHz | Test Voltage         | AC 120V/60Hz |

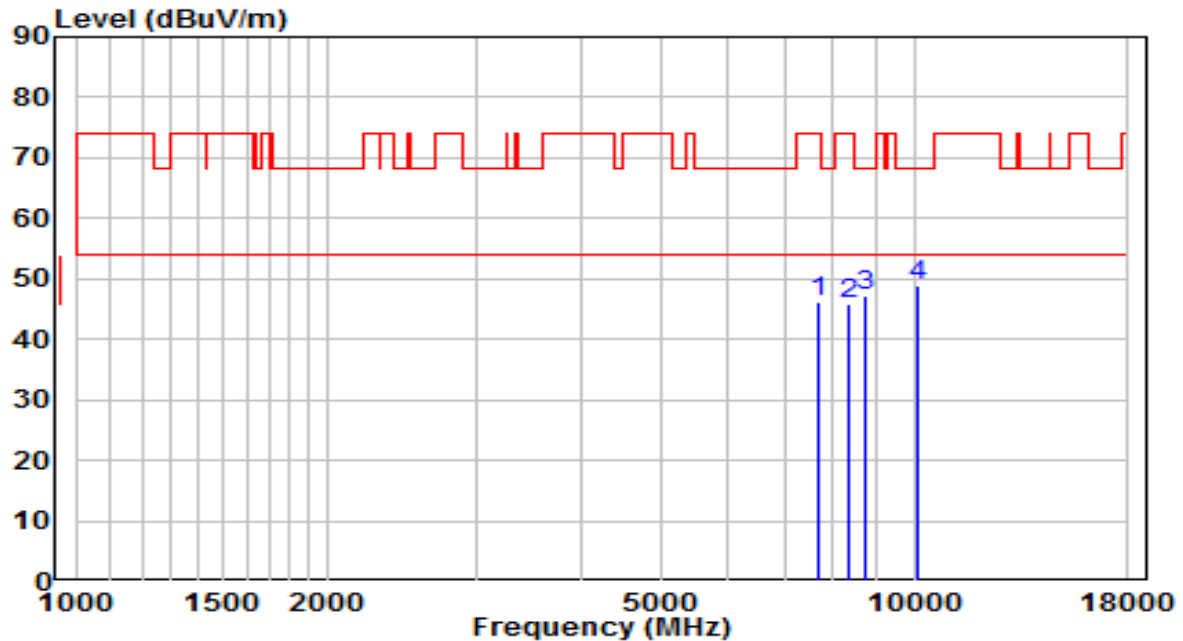


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7664.000        | 33.17          | 13.15    | 46.32                | -27.68      | 74.00          | Peak              |
| 2  | 8335.500        | 32.16          | 13.58    | 45.74                | -28.26      | 74.00          | Peak              |
| 3  | 8769.000        | 32.79          | 14.31    | 47.10                | -21.10      | 68.20          | Peak              |
| 4  | * 10103.500     | 31.98          | 16.98    | 48.95                | -19.25      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5190MHz | Test Voltage         | AC 120V/60Hz |

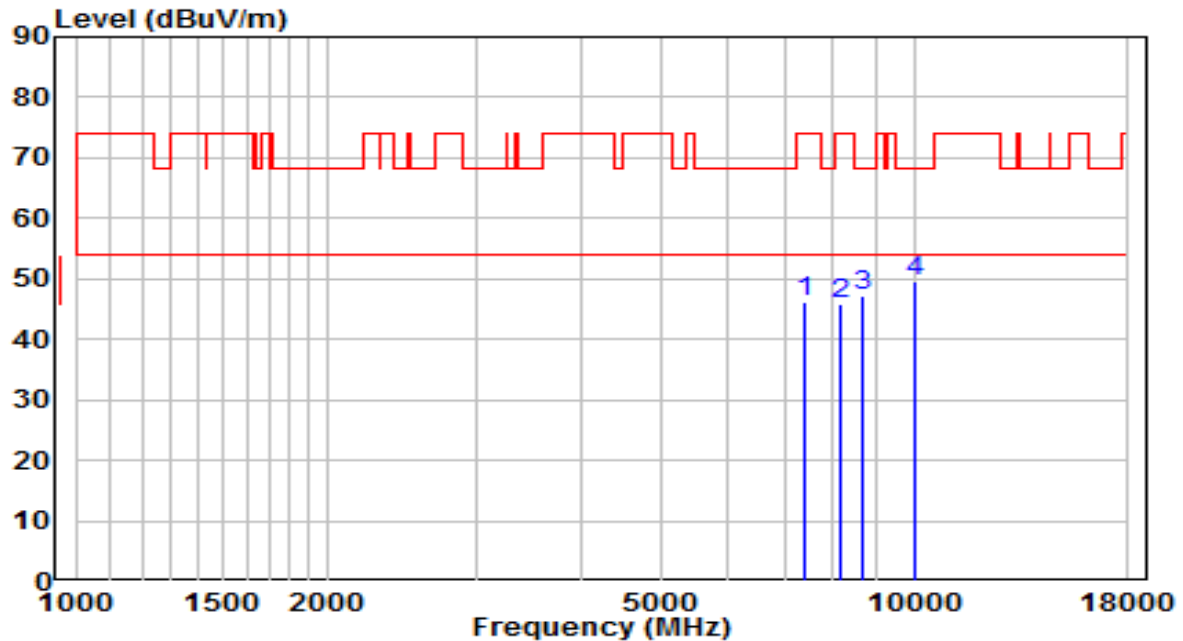


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7426.000        | 33.54          | 12.69    | 46.23                | -27.77      | 74.00          | Peak              |
| 2  | 8174.000        | 32.43          | 13.51    | 45.94                | -28.06      | 74.00          | Peak              |
| 3  | 8692.500        | 33.25          | 14.13    | 47.37                | -20.83      | 68.20          | Peak              |
| 4  | * 10044.000     | 32.74          | 16.74    | 49.47                | -18.73      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5190MHz | Test Voltage         | AC 120V/60Hz |

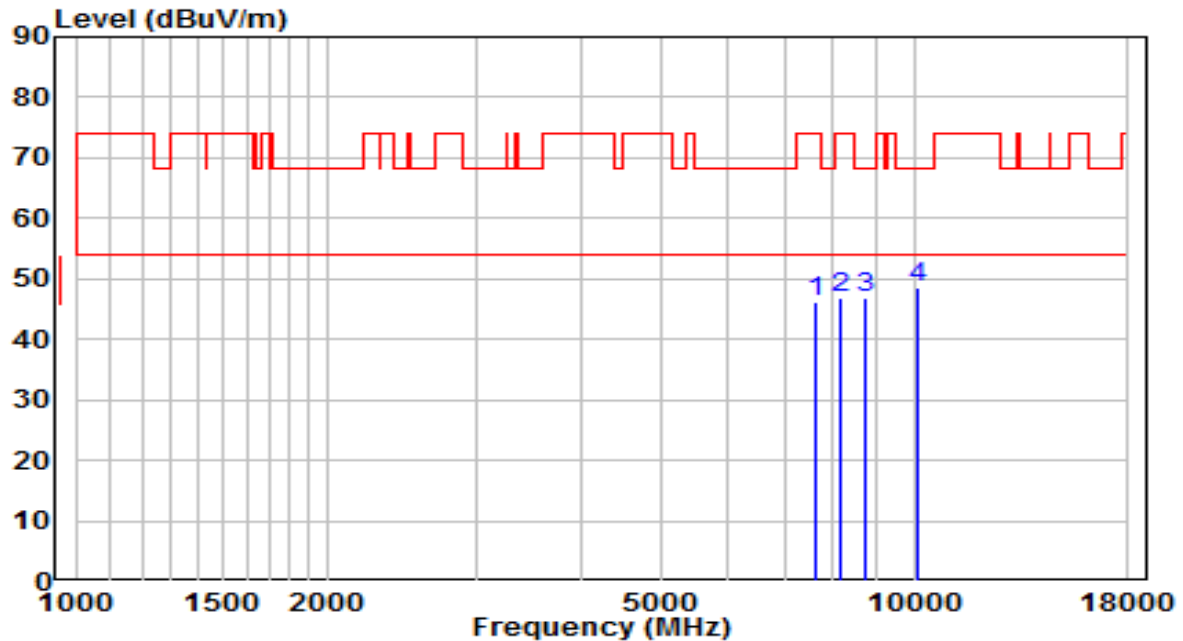


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7604.500        | 33.15          | 13.10    | 46.25                | -27.75      | 74.00          | Peak              |
| 2  | 8165.500        | 33.36          | 13.50    | 46.86                | -27.14      | 74.00          | Peak              |
| 3  | 8769.000        | 32.53          | 14.31    | 46.84                | -21.36      | 68.20          | Peak              |
| 4  | * 10086.500     | 31.81          | 16.91    | 48.72                | -19.48      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5230MHz | Test Voltage         | AC 120V/60Hz |

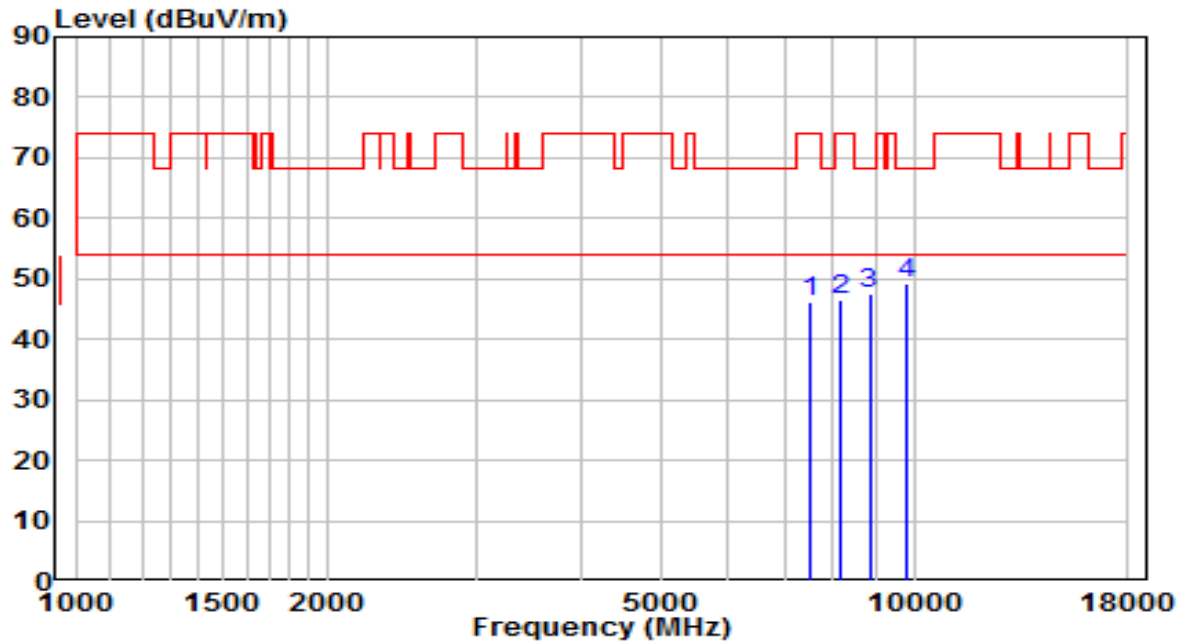


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7494.000        | 33.11          | 12.99    | 46.10                | -27.90      | 74.00          | Peak              |
| 2  | 8182.500        | 32.87          | 13.51    | 46.38                | -27.62      | 74.00          | Peak              |
| 3  | 8845.500        | 33.03          | 14.50    | 47.54                | -20.66      | 68.20          | Peak              |
| 4  | * 9806.000      | 33.06          | 16.23    | 49.29                | -18.91      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5230MHz | Test Voltage         | AC 120V/60Hz |

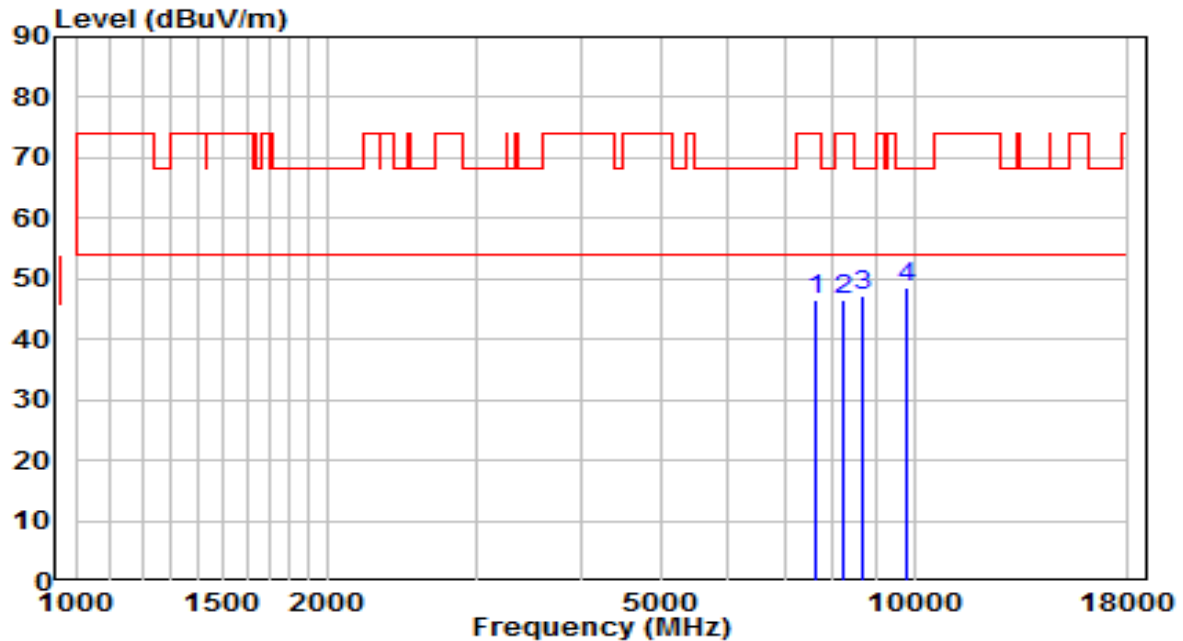


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7655.500        | 33.46          | 13.14    | 46.60                | -27.40      | 74.00          | Peak              |
| 2  | 8250.500        | 33.06          | 13.54    | 46.60                | -27.40      | 74.00          | Peak              |
| 3  | 8692.500        | 32.92          | 14.13    | 47.05                | -21.15      | 68.20          | Peak              |
| 4  | * 9797.500      | 32.40          | 16.22    | 48.62                | -19.58      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5270MHz | Test Voltage         | AC 120V/60Hz |

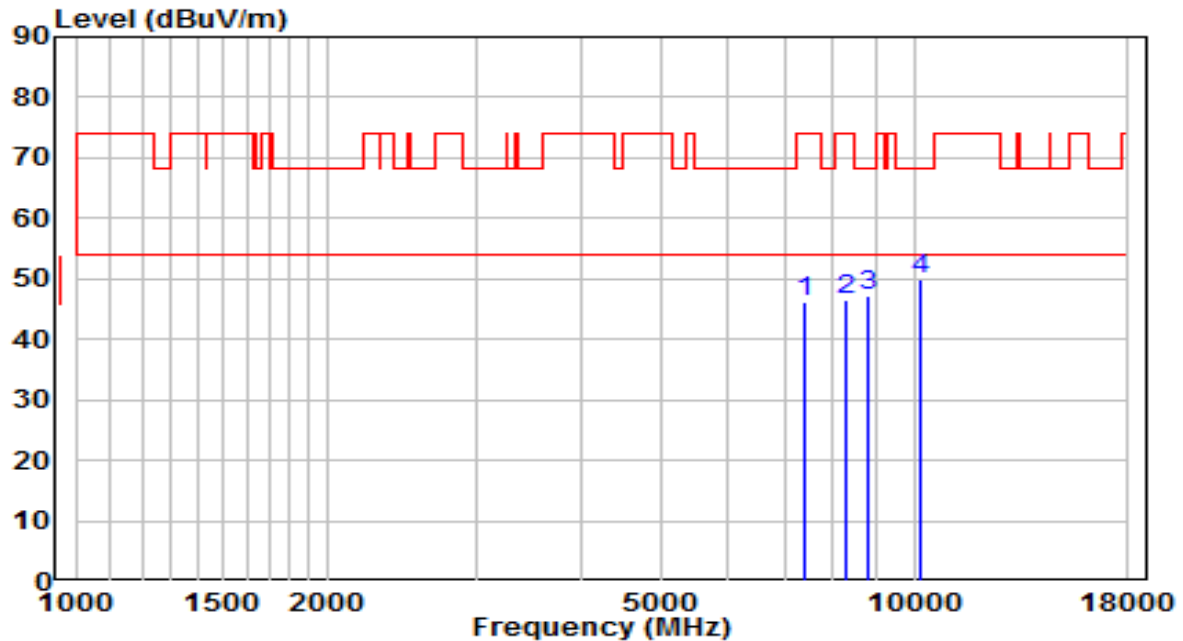


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7417.500        | 33.40          | 12.65    | 46.05                | -27.95      | 74.00          | Peak              |
| 2  | 8267.500        | 32.86          | 13.55    | 46.41                | -27.59      | 74.00          | Peak              |
| 3  | 8811.500        | 32.80          | 14.42    | 47.22                | -20.98      | 68.20          | Peak              |
| 4  | * 10146.000     | 32.65          | 17.15    | 49.79                | -18.41      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5270MHz | Test Voltage         | AC 120V/60Hz |

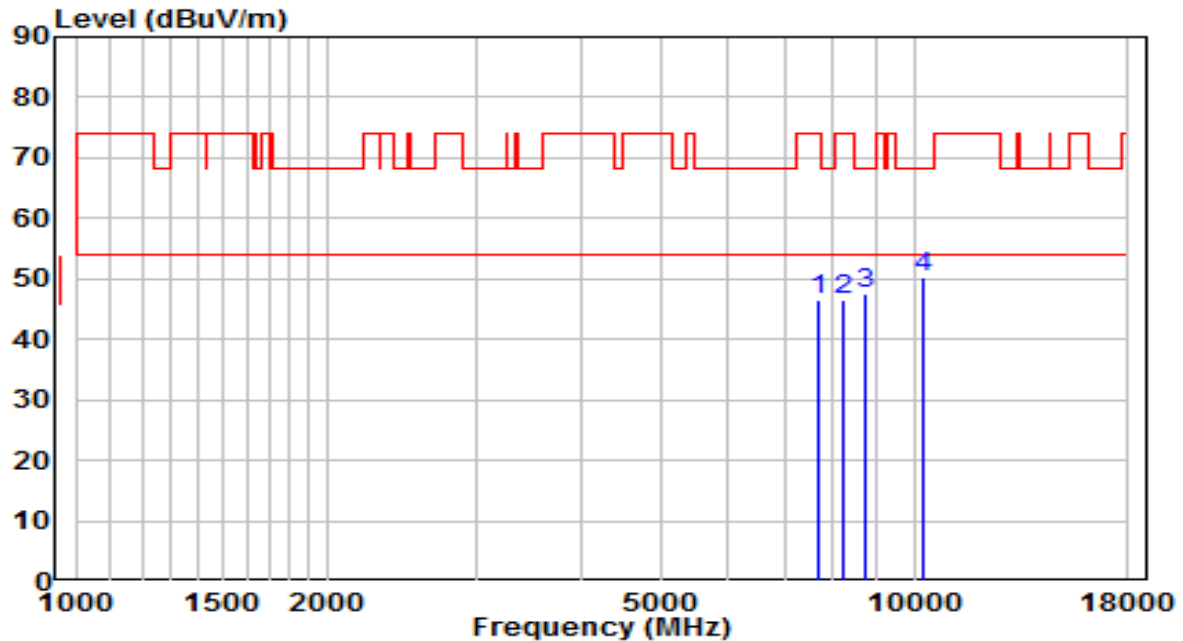


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7664.000        | 33.21          | 13.15    | 46.36                | -27.64      | 74.00          | Peak              |
| 2  | 8216.500        | 32.89          | 13.53    | 46.41                | -27.59      | 74.00          | Peak              |
| 3  | 8769.000        | 33.23          | 14.31    | 47.54                | -20.66      | 68.20          | Peak              |
| 4  | * 10265.000     | 32.48          | 17.63    | 50.11                | -18.09      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5310MHz | Test Voltage         | AC 120V/60Hz |

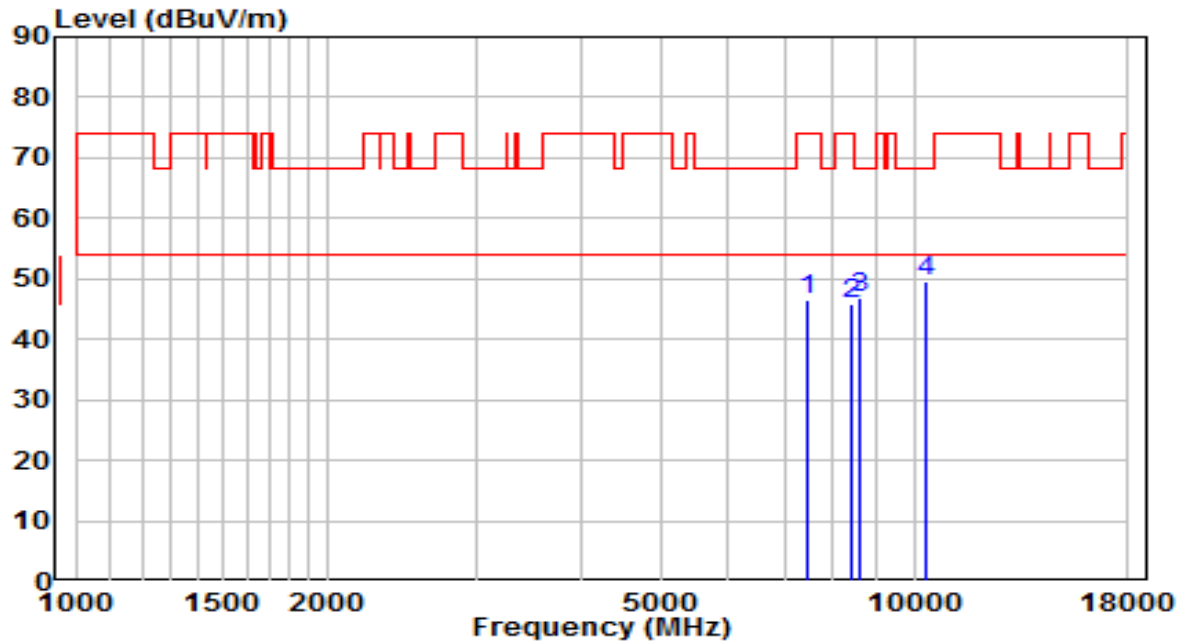


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7477.000        | 33.61          | 12.91    | 46.52                | -27.48      | 74.00          | Peak              |
| 2  | 8403.500        | 32.28          | 13.61    | 45.89                | -28.11      | 74.00          | Peak              |
| 3  | 8616.000        | 33.01          | 13.94    | 46.95                | -21.25      | 68.20          | Peak              |
| 4  | * 10316.000     | 31.66          | 17.83    | 49.49                | -18.71      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5310MHz | Test Voltage         | AC 120V/60Hz |

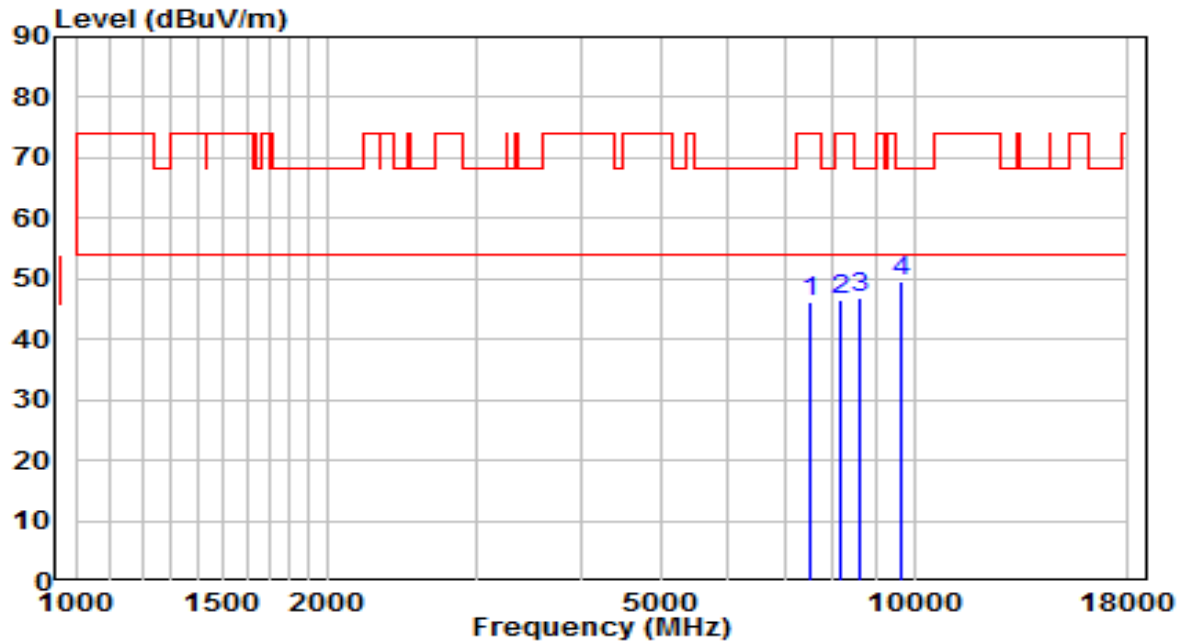


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7502.500        | 33.30          | 13.02    | 46.31                | -27.69      | 74.00          | Peak              |
| 2  | 8191.000        | 32.98          | 13.52    | 46.49                | -27.51      | 74.00          | Peak              |
| 3  | 8607.500        | 33.09          | 13.92    | 47.01                | -21.19      | 68.20          | Peak              |
| 4  | * 9678.500      | 33.46          | 16.02    | 49.48                | -18.72      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5510MHz | Test Voltage         | AC 120V/60Hz |

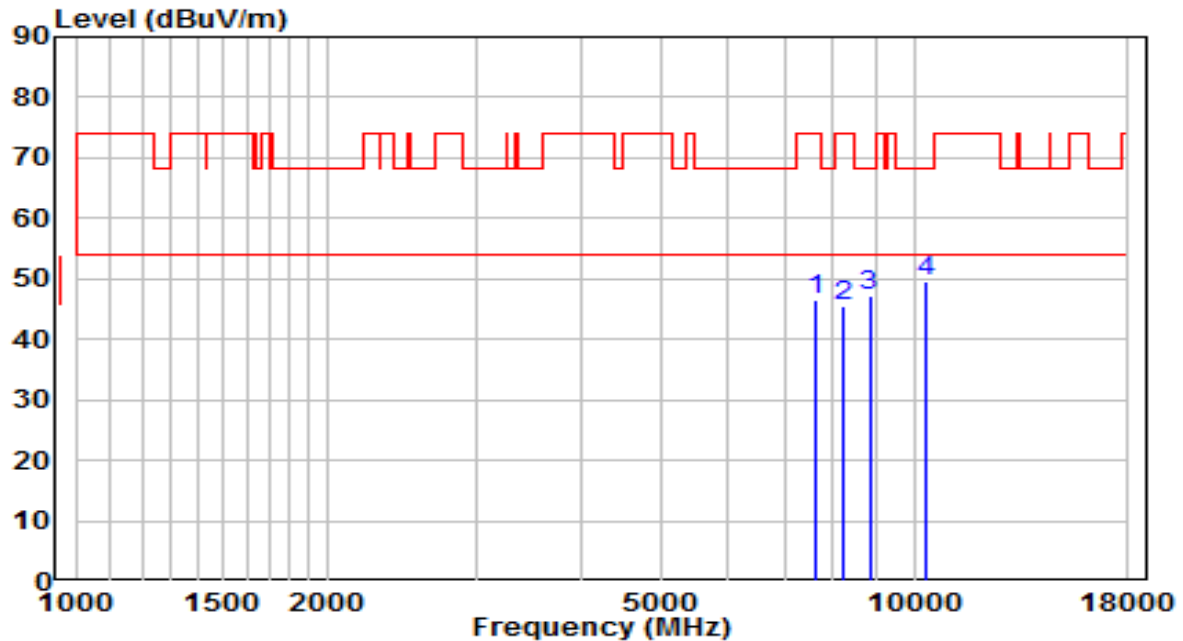


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7638.500        | 33.28          | 13.13    | 46.41                | -27.59      | 74.00          | Peak              |
| 2  | 8242.000        | 32.13          | 13.54    | 45.67                | -28.33      | 74.00          | Peak              |
| 3  | 8845.500        | 32.81          | 14.50    | 47.31                | -20.89      | 68.20          | Peak              |
| 4  | * 10341.500     | 31.54          | 17.93    | 49.47                | -18.73      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5510MHz | Test Voltage         | AC 120V/60Hz |

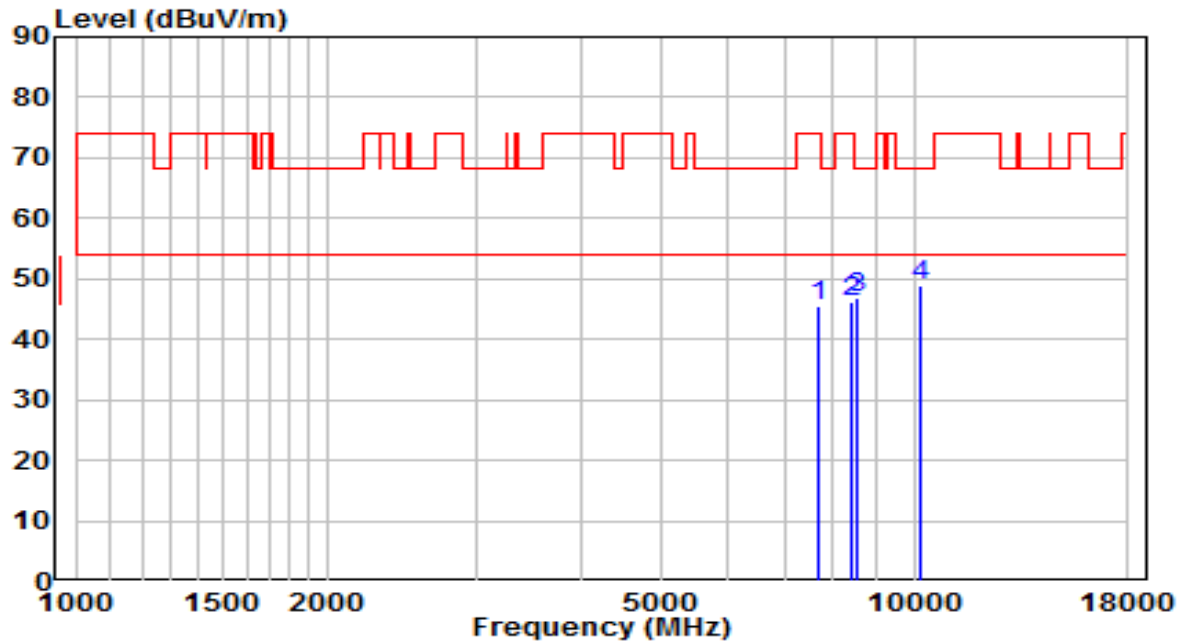


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7681.000        | 32.43          | 13.17    | 45.59                | -28.41      | 74.00          | Peak              |
| 2  | 8412.000        | 32.53          | 13.62    | 46.15                | -27.85      | 74.00          | Peak              |
| 3  | 8539.500        | 33.13          | 13.75    | 46.88                | -21.32      | 68.20          | Peak              |
| 4  | * 10163.000     | 31.70          | 17.22    | 48.92                | -19.28      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5550MHz | Test Voltage         | AC 120V/60Hz |

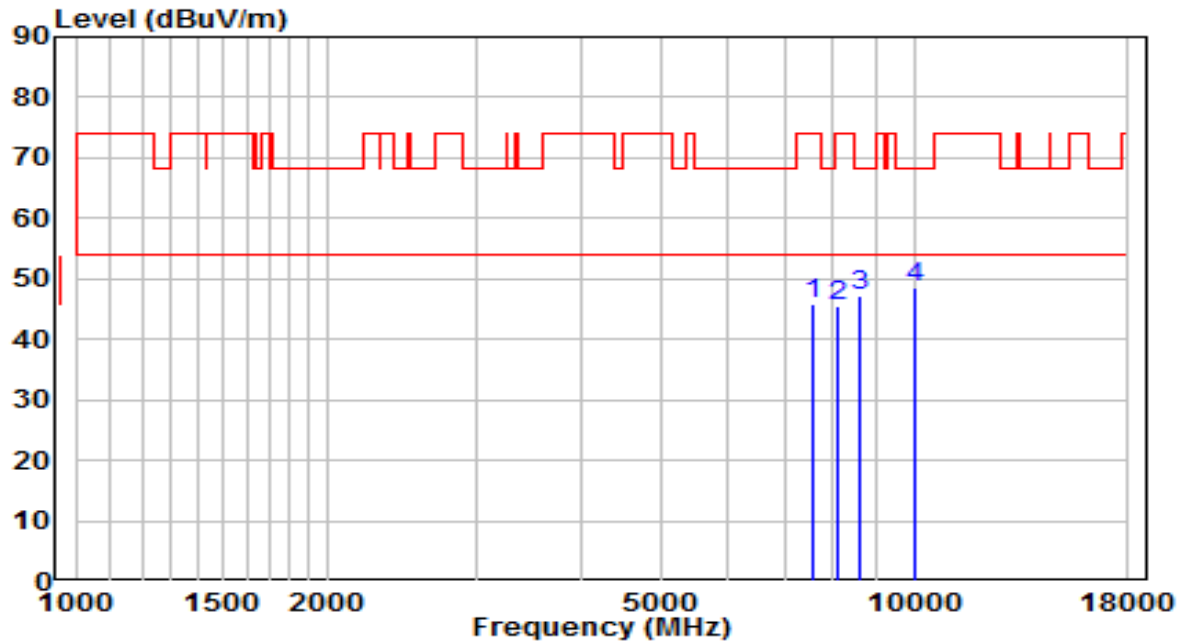


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7596.000        | 32.80          | 13.09    | 45.90                | -28.10      | 74.00          | Peak              |
| 2  | 8089.000        | 32.12          | 13.47    | 45.59                | -28.41      | 74.00          | Peak              |
| 3  | 8616.000        | 33.13          | 13.94    | 47.07                | -21.13      | 68.20          | Peak              |
| 4  | * 10027.000     | 31.95          | 16.67    | 48.62                | -19.58      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5550MHz | Test Voltage         | AC 120V/60Hz |

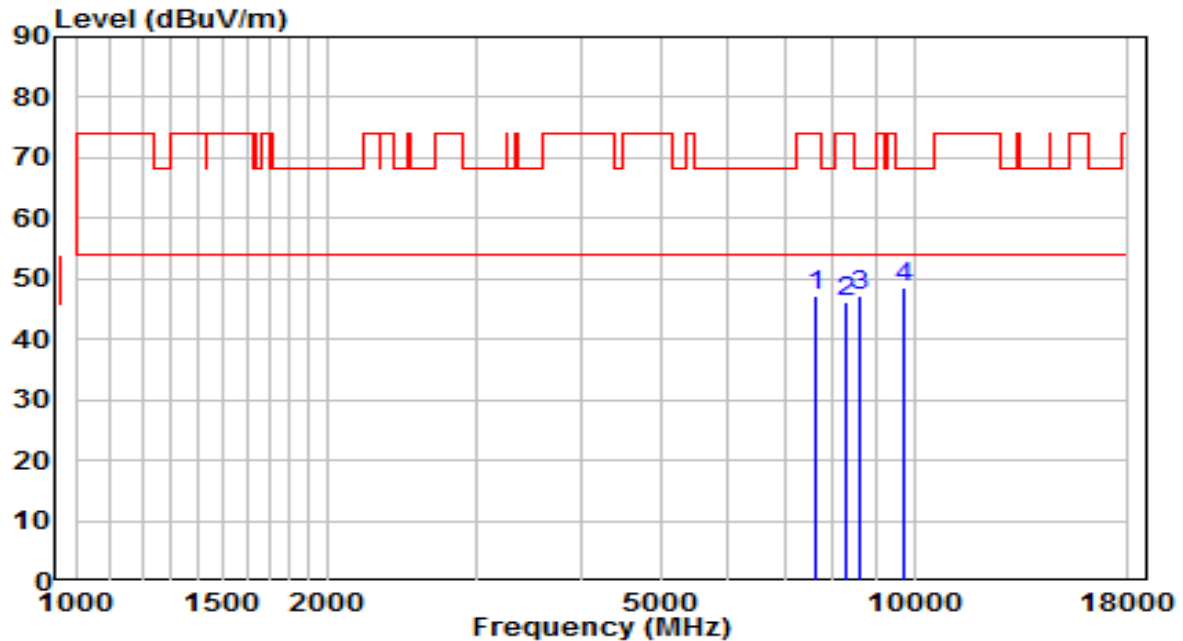


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7613.000        | 34.07          | 13.11    | 47.18                | -26.82      | 74.00          | Peak              |
| 2  | 8276.000        | 32.74          | 13.55    | 46.29                | -27.71      | 74.00          | Peak              |
| 3  | 8616.000        | 33.25          | 13.94    | 47.19                | -21.01      | 68.20          | Peak              |
| 4  | * 9755.000      | 32.57          | 16.15    | 48.72                | -19.48      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5670MHz | Test Voltage         | AC 120V/60Hz |

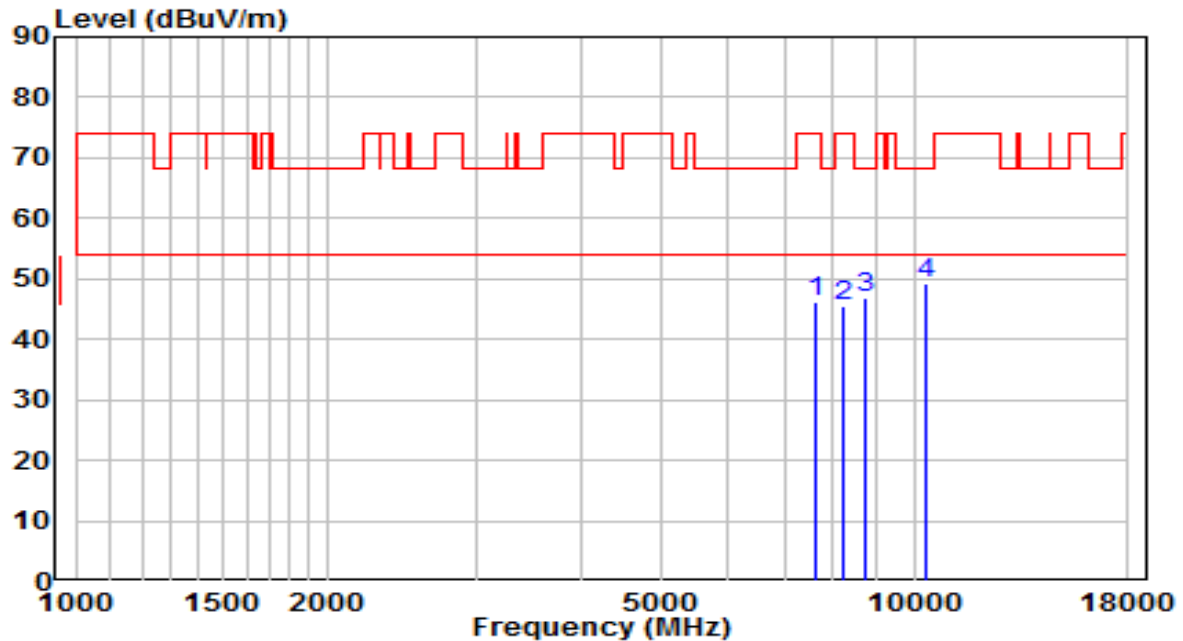


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7613.000        | 33.25          | 13.11    | 46.35                | -27.65      | 74.00          | Peak              |
| 2  | 8242.000        | 32.09          | 13.54    | 45.62                | -28.38      | 74.00          | Peak              |
| 3  | 8760.500        | 32.51          | 14.29    | 46.81                | -21.39      | 68.20          | Peak              |
| 4  | * 10358.500     | 31.36          | 18.00    | 49.36                | -18.84      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5670MHz | Test Voltage         | AC 120V/60Hz |

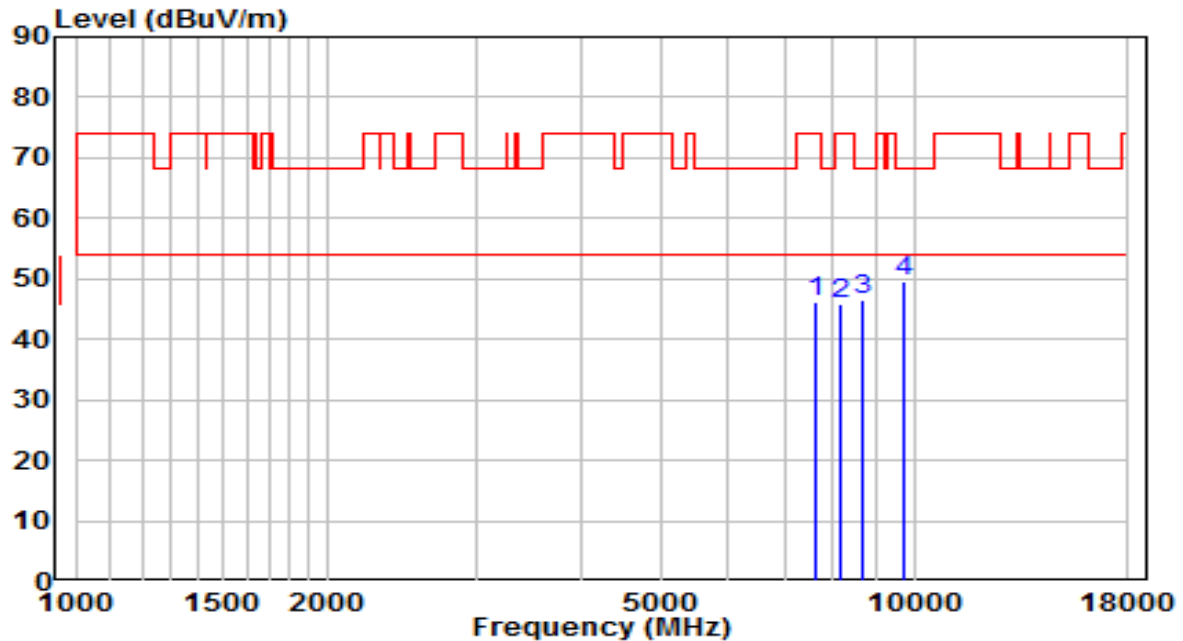


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7613.000        | 33.15          | 13.11    | 46.26                | -27.74      | 74.00          | Peak              |
| 2  | 8191.000        | 32.30          | 13.52    | 45.82                | -28.18      | 74.00          | Peak              |
| 3  | 8692.500        | 32.45          | 14.13    | 46.58                | -21.62      | 68.20          | Peak              |
| 4  | * 9738.000      | 33.34          | 16.12    | 49.46                | -18.74      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5710MHz | Test Voltage         | AC 120V/60Hz |

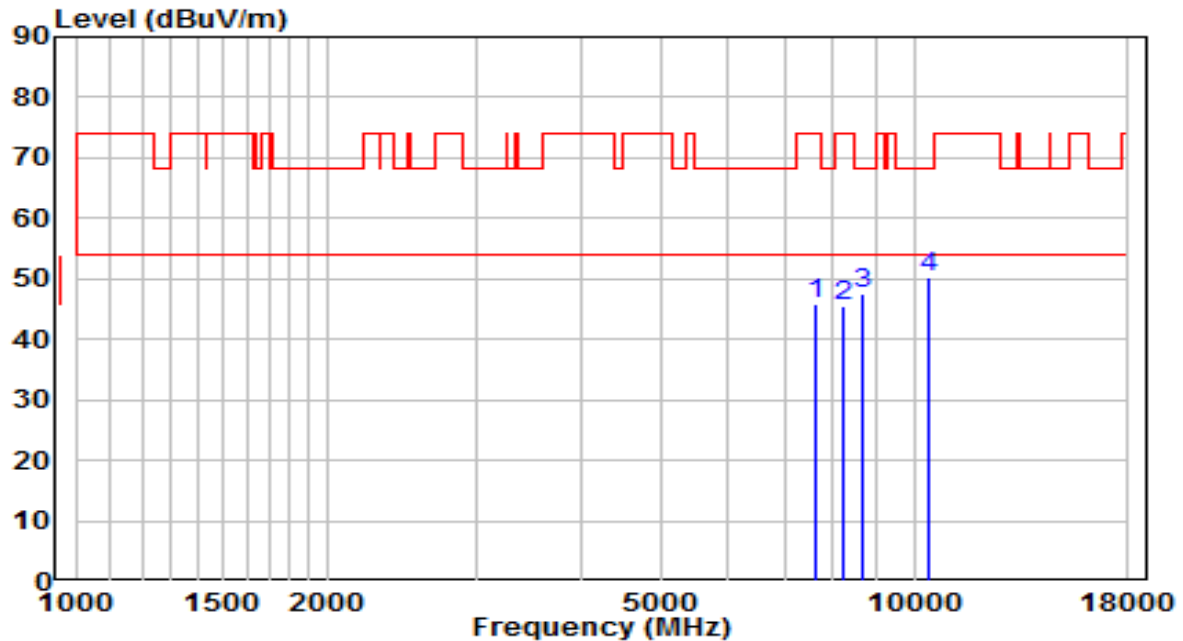


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7638.500        | 32.74          | 13.13    | 45.87                | -28.13      | 74.00          | Peak              |
| 2  | 8233.500        | 32.01          | 13.54    | 45.55                | -28.45      | 74.00          | Peak              |
| 3  | 8684.000        | 33.46          | 14.11    | 47.56                | -20.64      | 68.20          | Peak              |
| 4  | * 10418.000     | 32.06          | 18.24    | 50.30                | -17.90      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5710MHz | Test Voltage         | AC 120V/60Hz |

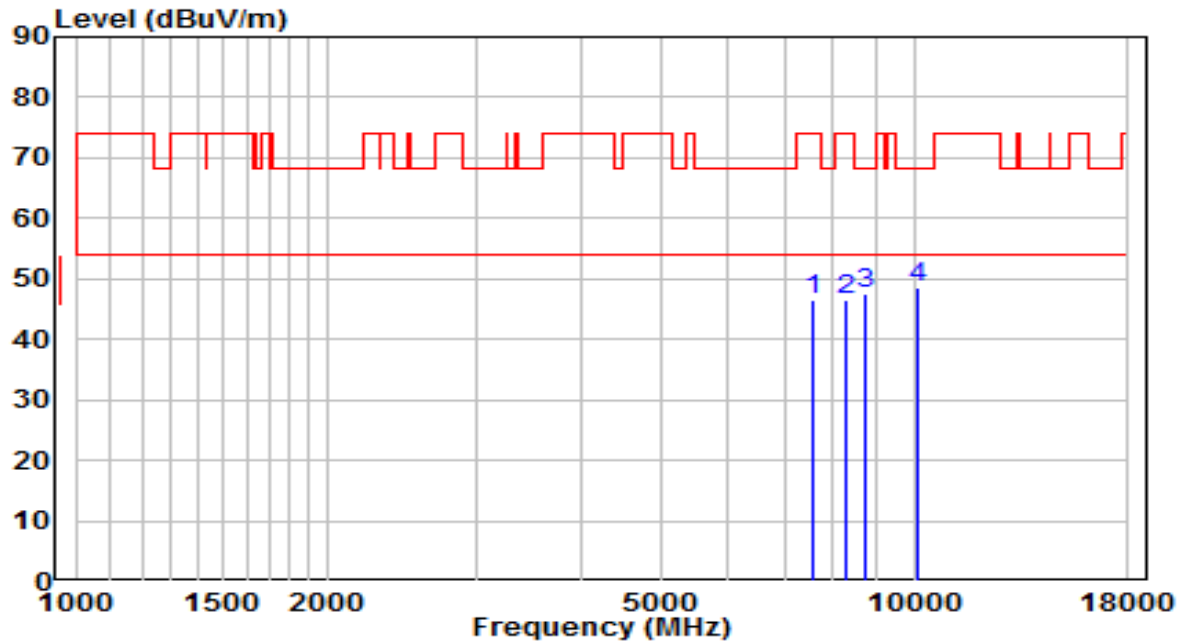


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7579.000        | 33.54          | 13.08    | 46.62                | -27.38      | 74.00          | Peak              |
| 2  | 8267.500        | 32.95          | 13.55    | 46.50                | -27.50      | 74.00          | Peak              |
| 3  | 8769.000        | 33.20          | 14.31    | 47.51                | -20.69      | 68.20          | Peak              |
| 4  | * 10129.000     | 31.57          | 17.08    | 48.65                | -19.55      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5755MHz | Test Voltage         | AC 120V/60Hz |

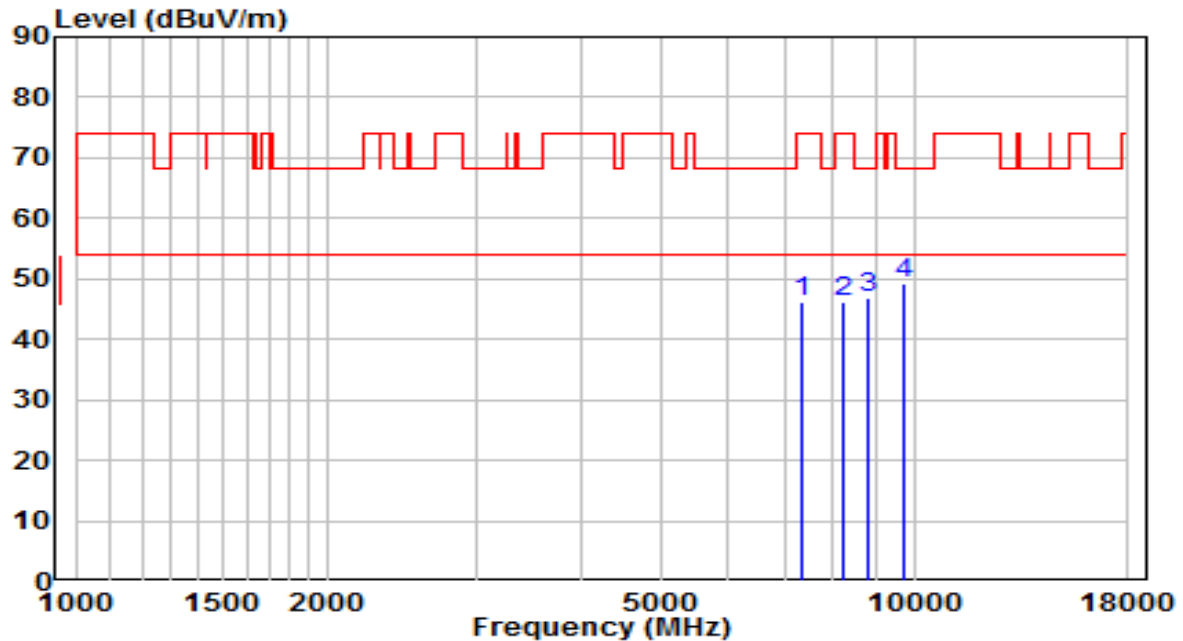


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7349.500        | 33.98          | 12.35    | 46.33                | -27.67      | 74.00          | Peak              |
| 2  | 8208.000        | 32.83          | 13.52    | 46.35                | -27.65      | 74.00          | Peak              |
| 3  | 8828.500        | 32.53          | 14.46    | 46.99                | -21.21      | 68.20          | Peak              |
| 4  | * 9746.500      | 33.10          | 16.13    | 49.23                | -18.97      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5755MHz | Test Voltage         | AC 120V/60Hz |

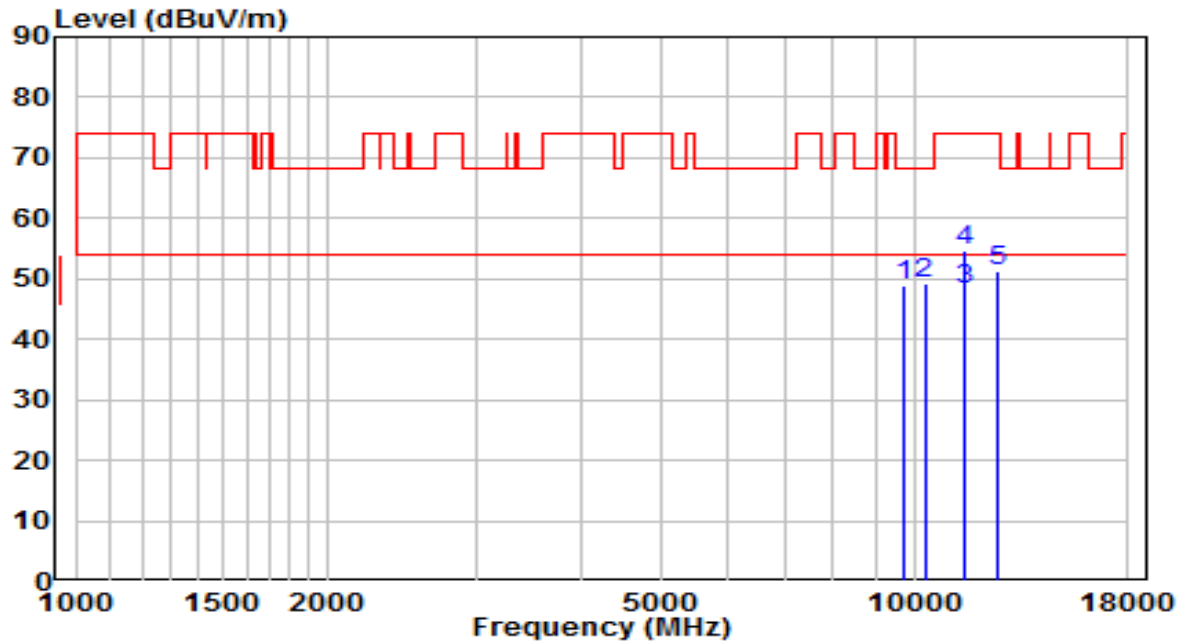


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 9755.000        | 32.80          | 16.15    | 48.95                | -19.25      | 68.20          | Peak              |
| 2  | 10290.500       | 31.49          | 17.73    | 49.22                | -18.98      | 68.20          | Peak              |
| 3  | * 11511.570     | 28.24          | 20.02    | 48.26                | -5.74       | 54.00          | Average           |
| 4  | 11514.500       | 34.70          | 20.02    | 54.72                | -19.28      | 74.00          | Peak              |
| 5  | 12611.000       | 32.57          | 18.73    | 51.30                | -22.70      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5795MHz | Test Voltage         | AC 120V/60Hz |

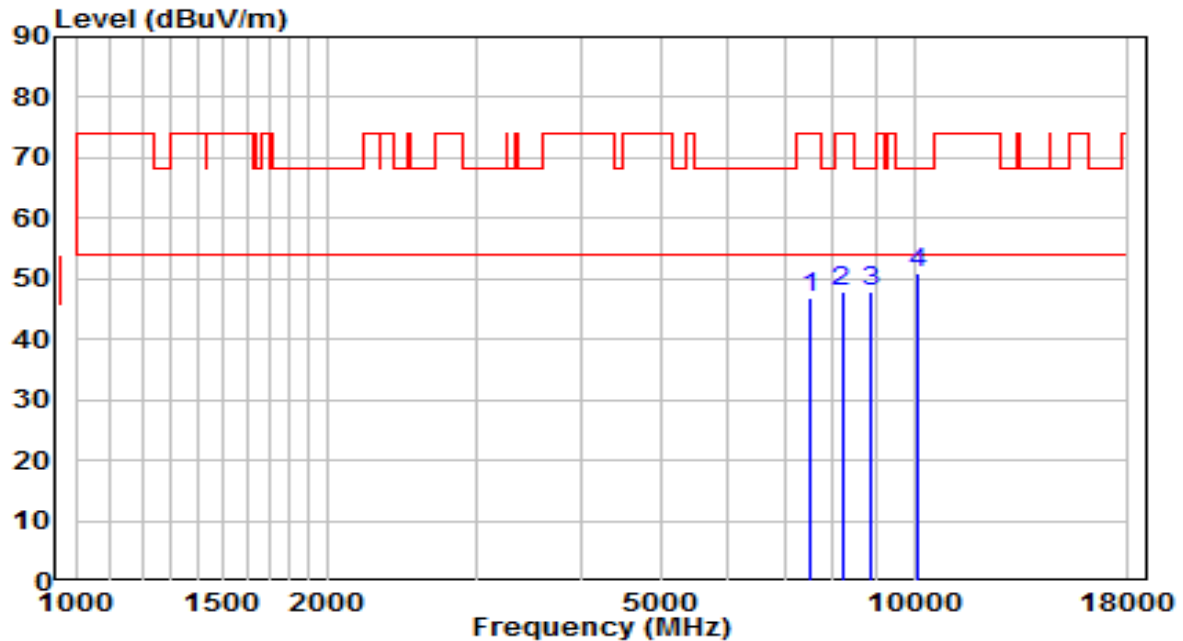


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7511.000        | 33.96          | 13.02    | 46.98                | -27.02      | 74.00          | Peak              |
| 2  | 8199.500        | 34.41          | 13.52    | 47.93                | -26.07      | 74.00          | Peak              |
| 3  | 8888.000        | 33.34          | 14.61    | 47.94                | -20.26      | 68.20          | Peak              |
| 4  | * 10120.500     | 33.82          | 17.04    | 50.86                | -17.34      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5795MHz | Test Voltage         | AC 120V/60Hz |

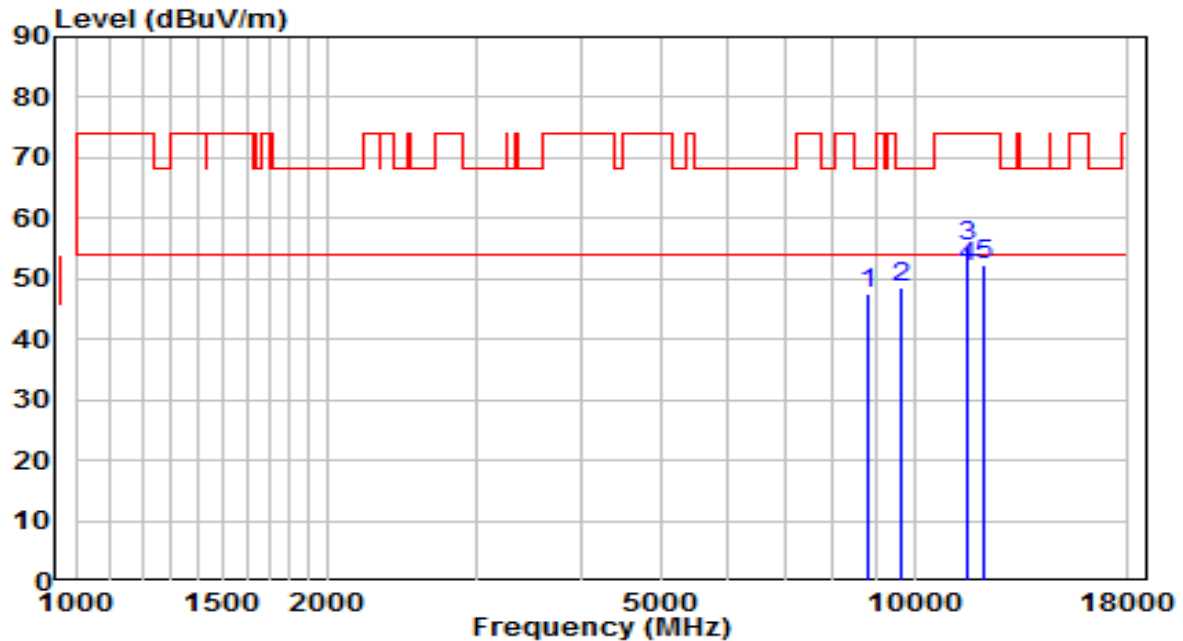


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8837.000        | 33.09          | 14.48    | 47.57                | -20.63      | 68.20          | Peak              |
| 2  | 9644.500        | 32.54          | 15.96    | 48.50                | -19.70      | 68.20          | Peak              |
| 3  | 11582.500       | 35.46          | 19.86    | 55.32                | -18.68      | 74.00          | Peak              |
| 4  | * 11588.850     | 32.03          | 19.85    | 51.88                | -2.12       | 54.00          | Average           |
| 5  | 12152.000       | 33.62          | 18.76    | 52.38                | -21.62      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5210MHz | Test Voltage         | AC 120V/60Hz |

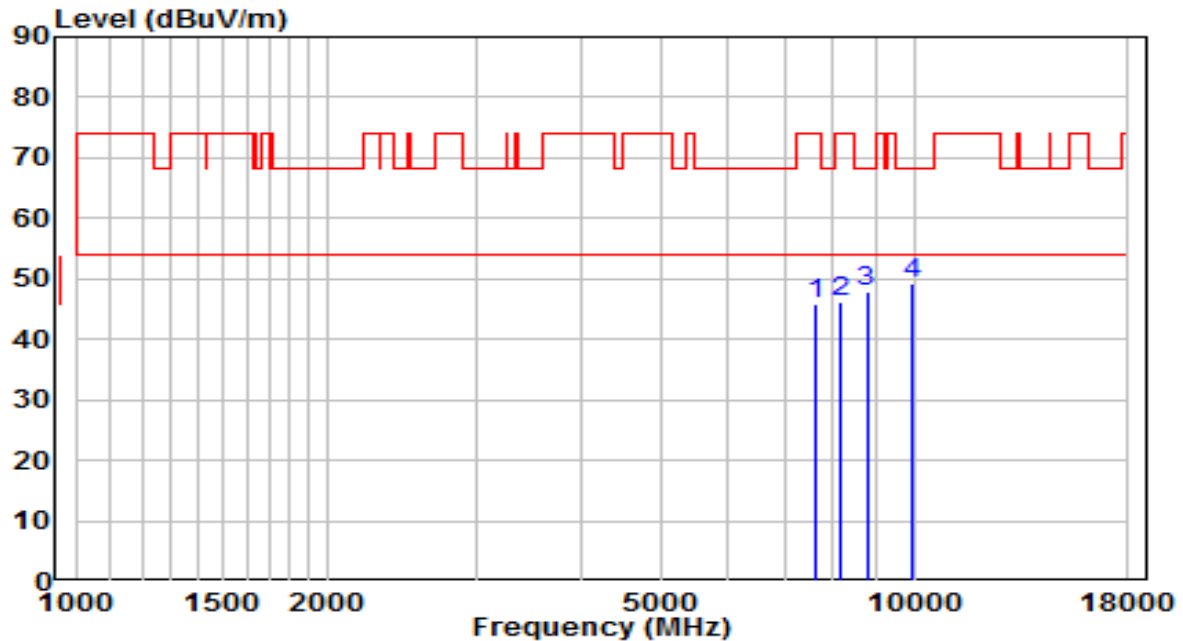


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7647.000        | 32.82          | 13.14    | 45.95                | -28.05      | 74.00          | Peak              |
| 2  | 8191.000        | 32.83          | 13.52    | 46.35                | -27.65      | 74.00          | Peak              |
| 3  | 8777.500        | 33.42          | 14.33    | 47.76                | -20.44      | 68.20          | Peak              |
| 4  | * 9976.000      | 32.84          | 16.52    | 49.36                | -18.84      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5210MHz | Test Voltage         | AC 120V/60Hz |

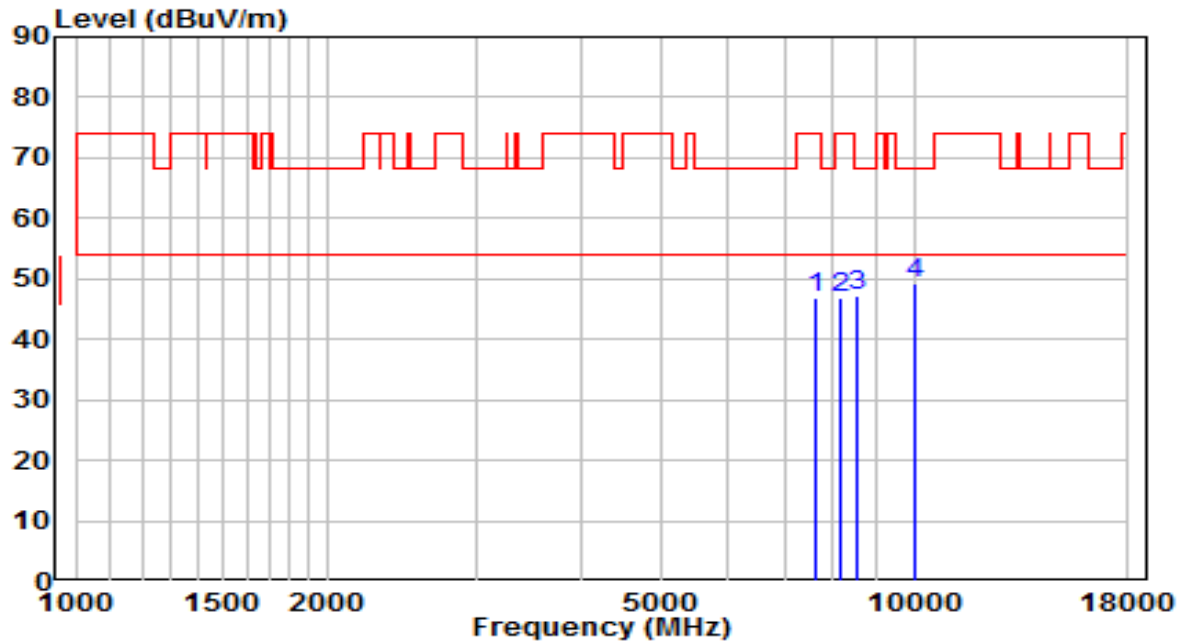


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7621.500        | 33.87          | 13.12    | 46.99                | -27.01      | 74.00          | Peak              |
| 2  | 8157.000        | 33.23          | 13.50    | 46.73                | -27.27      | 74.00          | Peak              |
| 3  | 8573.500        | 33.51          | 13.84    | 47.34                | -20.86      | 68.20          | Peak              |
| 4  | * 10044.000     | 32.41          | 16.74    | 49.15                | -19.05      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5290MHz | Test Voltage         | AC 120V/60Hz |

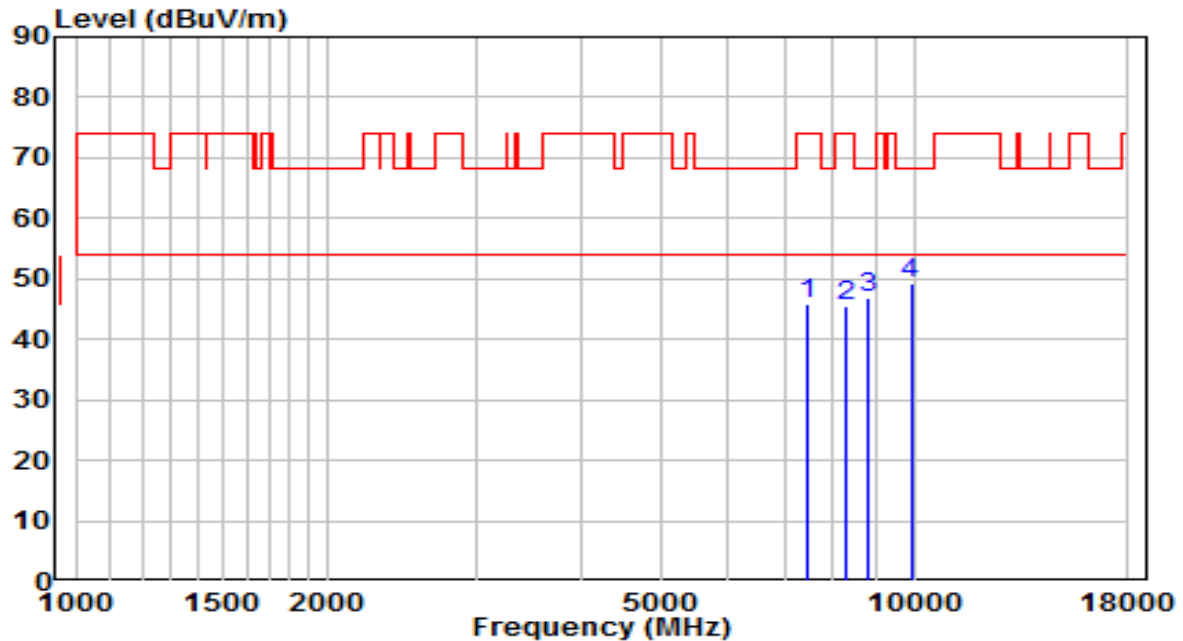


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7443.000        | 33.12          | 12.76    | 45.89                | -28.11      | 74.00          | Peak              |
| 2  | 8318.500        | 32.02          | 13.57    | 45.59                | -28.41      | 74.00          | Peak              |
| 3  | 8837.000        | 32.42          | 14.48    | 46.91                | -21.29      | 68.20          | Peak              |
| 4  | * 9908.000      | 32.97          | 16.41    | 49.37                | -18.83      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5290MHz | Test Voltage         | AC 120V/60Hz |

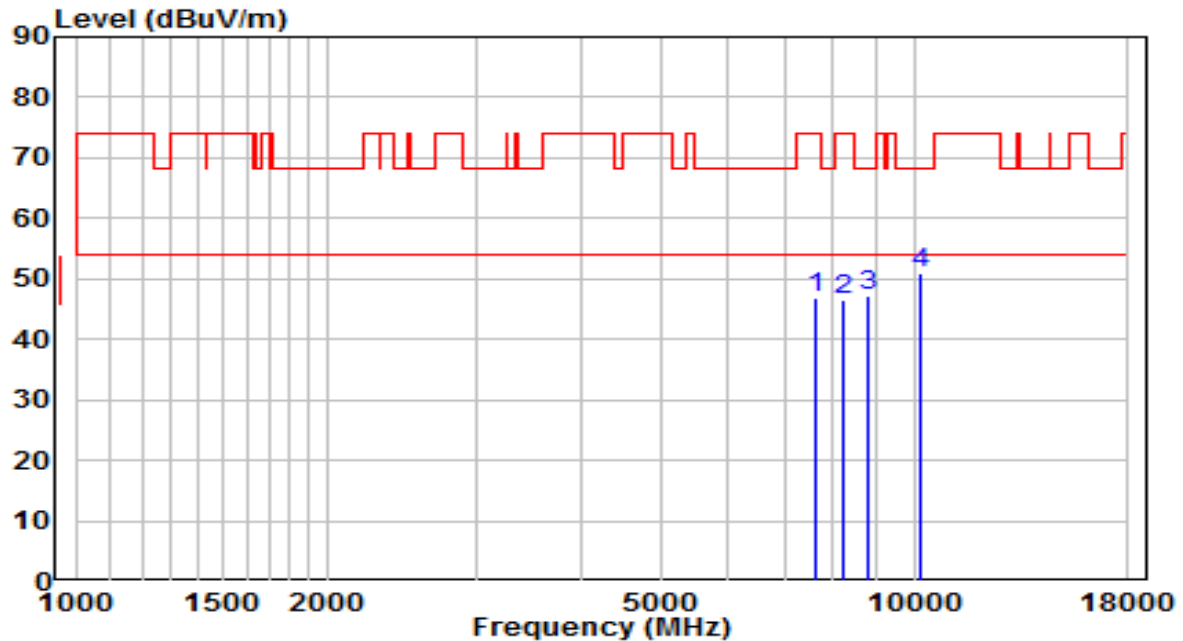


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7630.000        | 33.75          | 13.12    | 46.87                | -27.13      | 74.00          | Peak              |
| 2  | 8242.000        | 32.98          | 13.54    | 46.52                | -27.48      | 74.00          | Peak              |
| 3  | 8837.000        | 32.86          | 14.48    | 47.34                | -20.86      | 68.20          | Peak              |
| 4  | * 10197.000     | 33.57          | 17.35    | 50.93                | -17.27      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5530MHz | Test Voltage         | AC 120V/60Hz |

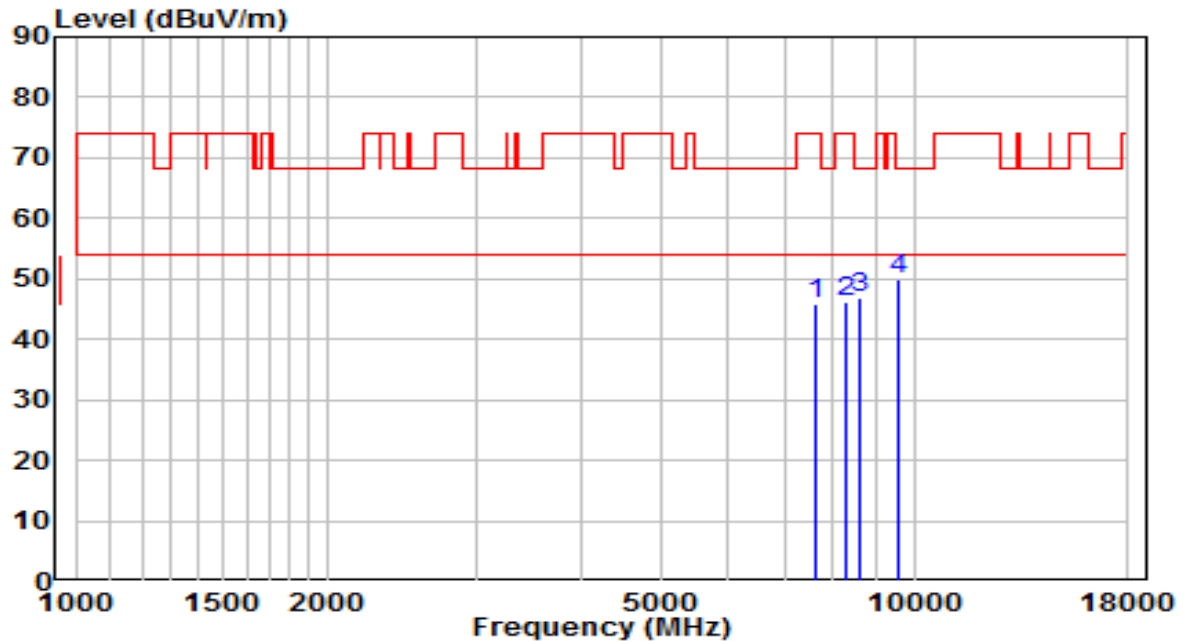


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7638.500        | 32.88          | 13.13    | 46.01                | -27.99      | 74.00          | Peak              |
| 2  | 8267.500        | 32.47          | 13.55    | 46.02                | -27.98      | 74.00          | Peak              |
| 3  | 8641.500        | 32.91          | 14.00    | 46.91                | -21.29      | 68.20          | Peak              |
| 4  | * 9576.500      | 34.21          | 15.85    | 50.06                | -18.14      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5530MHz | Test Voltage         | AC 120V/60Hz |

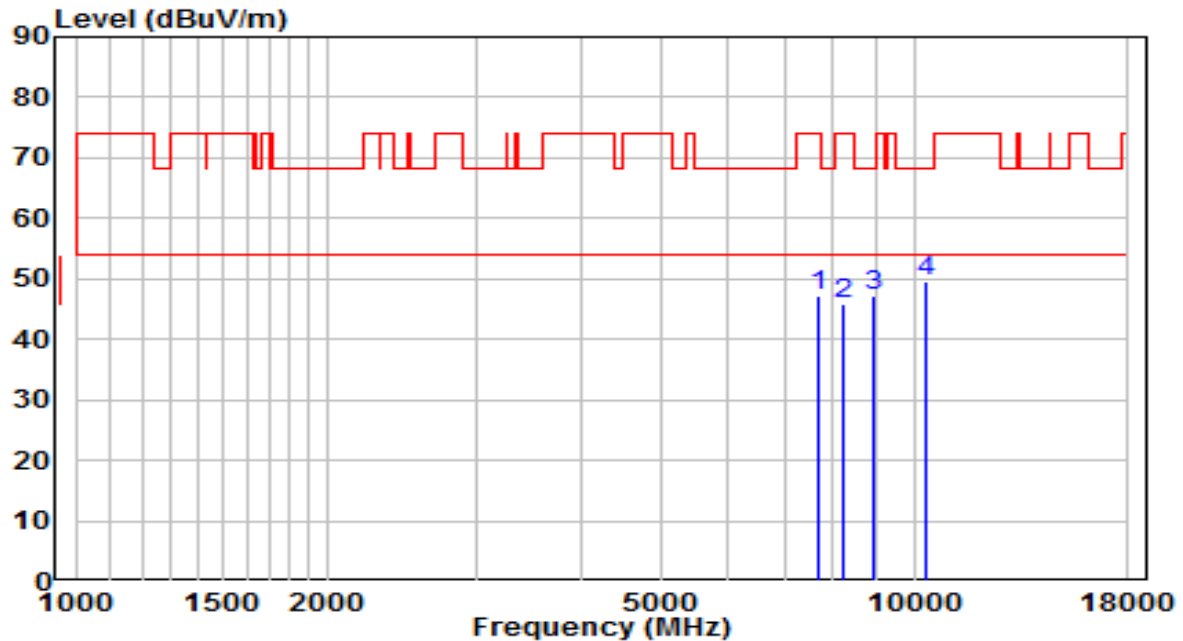


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7672.500        | 34.20          | 13.16    | 47.36                | -26.64      | 74.00          | Peak              |
| 2  | 8250.500        | 32.27          | 13.54    | 45.81                | -28.19      | 74.00          | Peak              |
| 3  | 8913.500        | 32.70          | 14.67    | 47.37                | -20.83      | 68.20          | Peak              |
| 4  | * 10307.500     | 31.91          | 17.80    | 49.71                | -18.49      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5610MHz | Test Voltage         | AC 120V/60Hz |

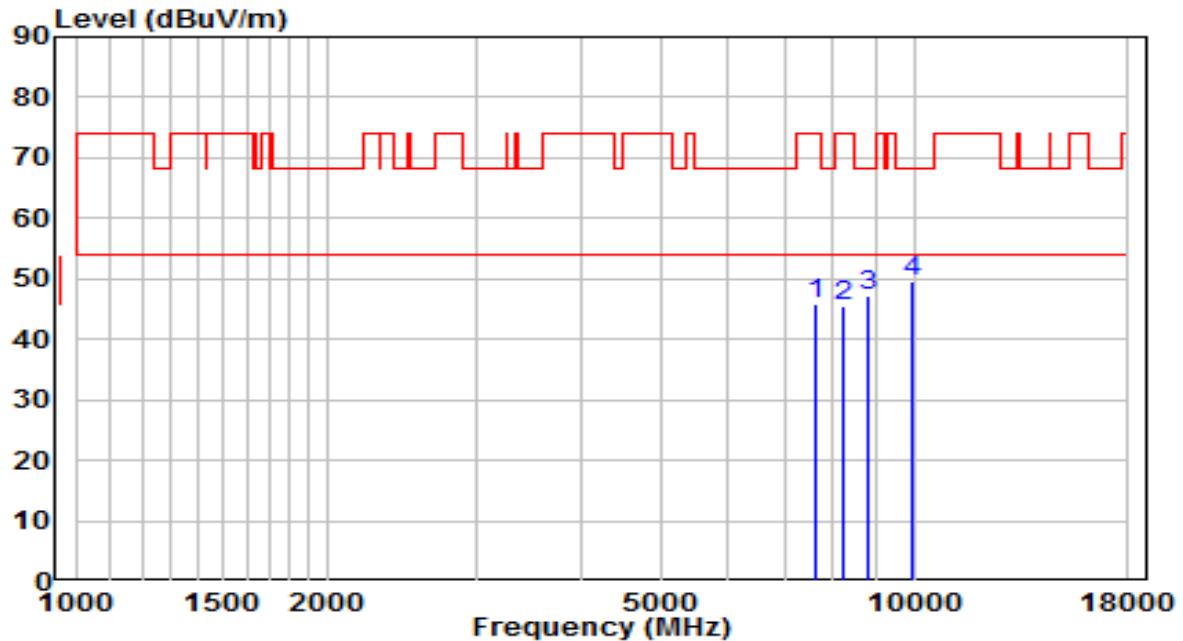


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7638.500        | 32.86          | 13.13    | 45.99                | -28.01      | 74.00          | Peak              |
| 2  | 8250.500        | 32.02          | 13.54    | 45.57                | -28.43      | 74.00          | Peak              |
| 3  | 8828.500        | 32.82          | 14.46    | 47.28                | -20.92      | 68.20          | Peak              |
| 4  | * 9967.500      | 33.00          | 16.51    | 49.51                | -18.69      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5610MHz | Test Voltage         | AC 120V/60Hz |

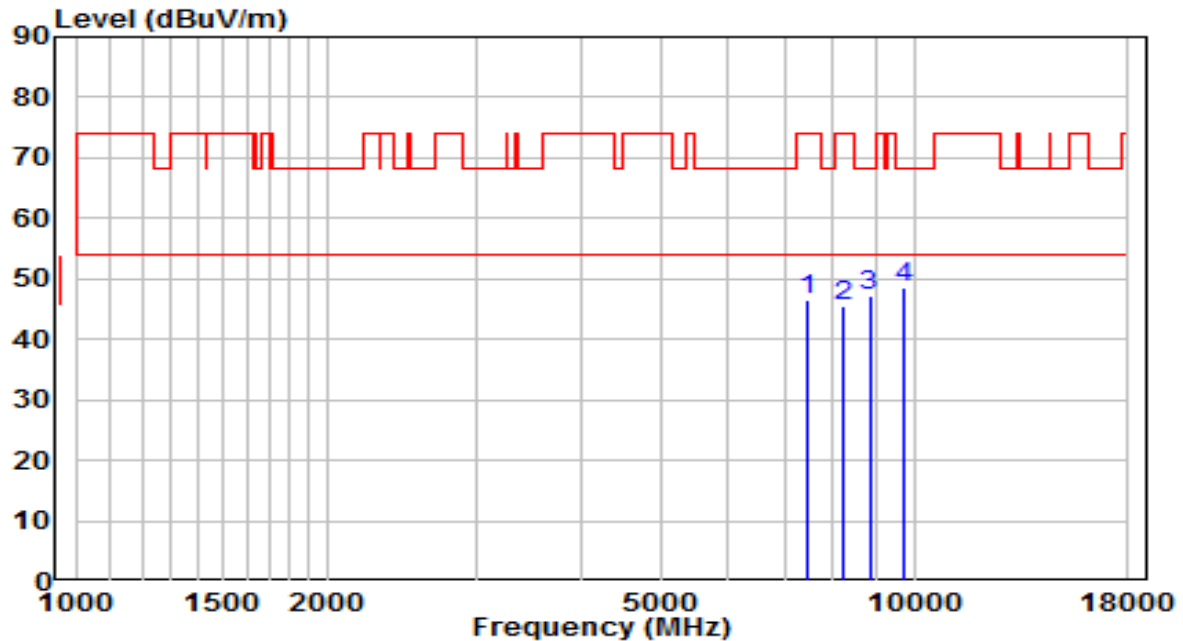


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7434.500        | 33.65          | 12.72    | 46.37                | -27.63      | 74.00          | Peak              |
| 2  | 8259.000        | 32.00          | 13.55    | 45.55                | -28.45      | 74.00          | Peak              |
| 3  | 8845.500        | 32.62          | 14.50    | 47.12                | -21.08      | 68.20          | Peak              |
| 4  | * 9704.000      | 32.58          | 16.06    | 48.64                | -19.56      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                 |                      |              |
|-----------|-------------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                  | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                      | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel<br>5690MHz | Test Voltage         | AC 120V/60Hz |

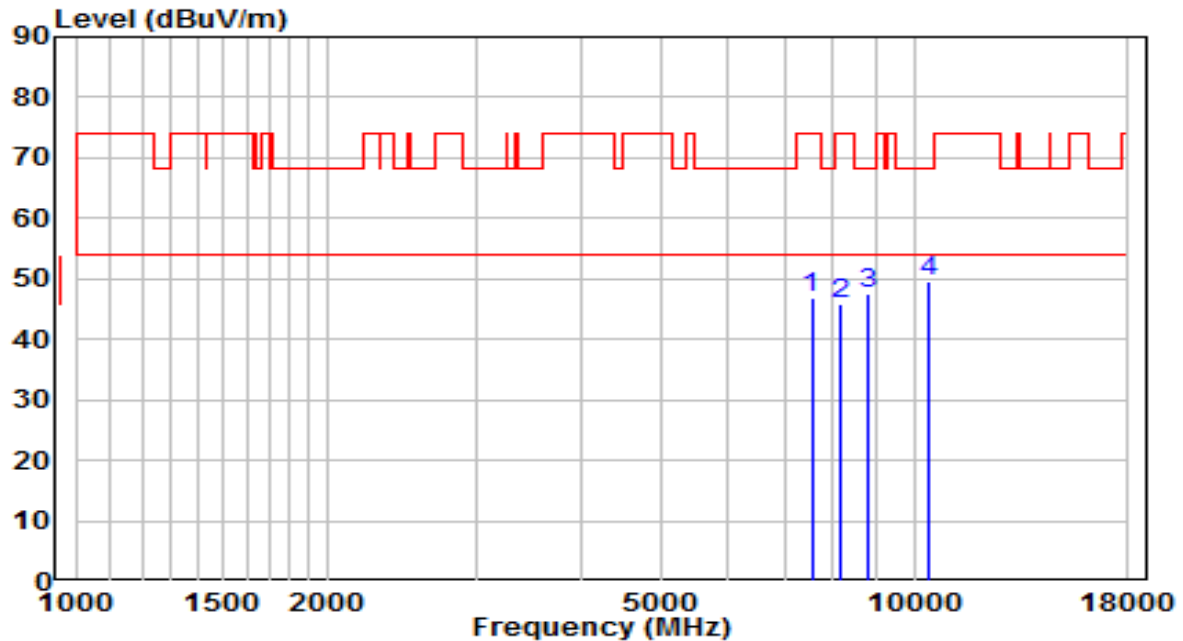


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7545.000        | 33.75          | 13.05    | 46.80                | -27.20      | 74.00          | Peak              |
| 2  | 8165.500        | 32.31          | 13.50    | 45.81                | -28.19      | 74.00          | Peak              |
| 3  | 8803.000        | 33.02          | 14.40    | 47.41                | -20.79      | 68.20          | Peak              |
| 4  | * 10418.000     | 31.32          | 18.24    | 49.56                | -18.64      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5690MHz | Test Voltage         | AC 120V/60Hz |

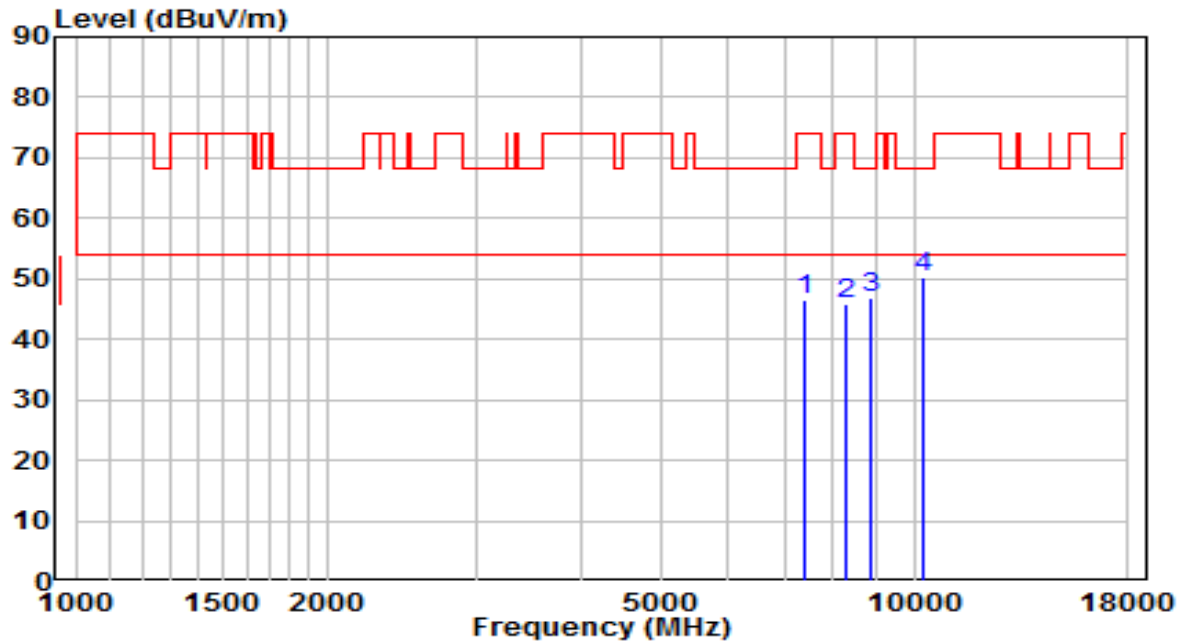


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7417.500        | 33.71          | 12.65    | 46.36                | -27.64      | 74.00          | Peak              |
| 2  | 8284.500        | 32.42          | 13.56    | 45.97                | -28.03      | 74.00          | Peak              |
| 3  | 8862.500        | 32.45          | 14.54    | 46.99                | -21.21      | 68.20          | Peak              |
| 4  | * 10265.000     | 32.78          | 17.63    | 50.40                | -17.80      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5775MHz | Test Voltage         | AC 120V/60Hz |

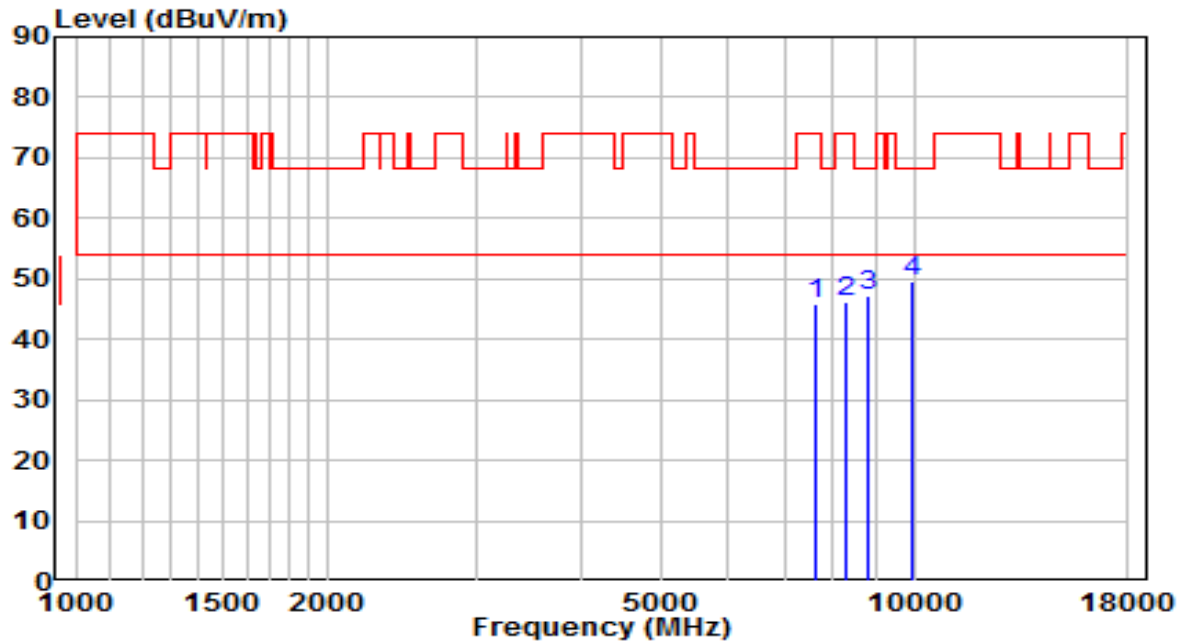


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7638.500        | 32.56          | 13.13    | 45.69                | -28.31      | 74.00          | Peak              |
| 2  | 8267.500        | 32.62          | 13.55    | 46.17                | -27.83      | 74.00          | Peak              |
| 3  | 8820.000        | 32.87          | 14.44    | 47.31                | -20.89      | 68.20          | Peak              |
| 4  | * 9976.000      | 33.01          | 16.52    | 49.53                | -18.67      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5775MHz | Test Voltage         | AC 120V/60Hz |

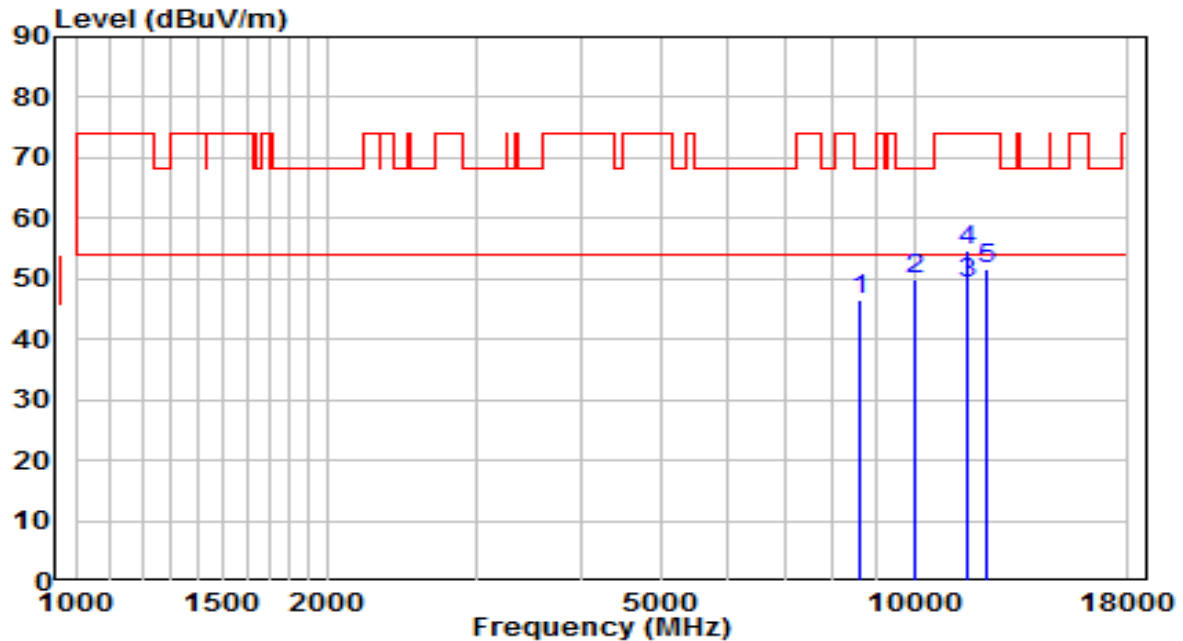


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 8624.500        | 32.68          | 13.96    | 46.64                | -21.56      | 68.20          | Peak              |
| 2  | 10035.500       | 33.39          | 16.70    | 50.09                | -18.11      | 68.20          | Peak              |
| 3  | * 11560.540     | 29.37          | 19.91    | 49.28                | -4.72       | 54.00          | Average           |
| 4  | 11565.500       | 34.83          | 19.90    | 54.73                | -19.27      | 74.00          | Peak              |
| 5  | 12186.000       | 32.75          | 18.73    | 51.48                | -22.52      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 5250MHz | Test Voltage         | AC 120V/60Hz |

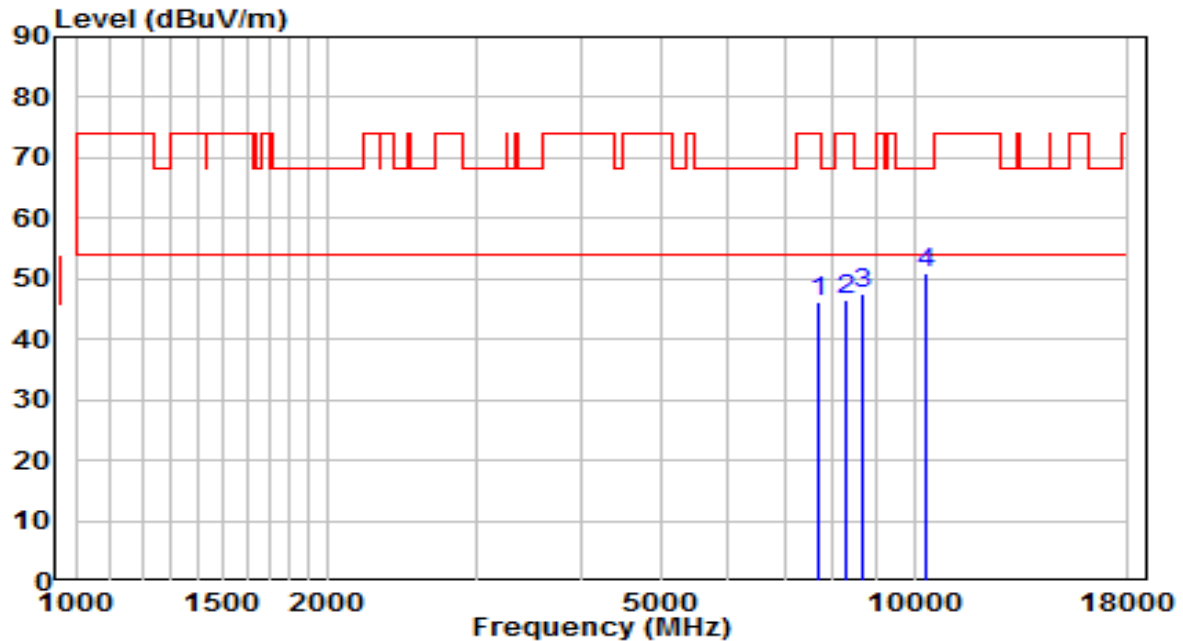


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7672.500        | 32.88          | 13.16    | 46.04                | -27.96      | 74.00          | Peak              |
| 2  | 8318.500        | 32.80          | 13.57    | 46.37                | -27.63      | 74.00          | Peak              |
| 3  | 8675.500        | 33.60          | 14.08    | 47.69                | -20.51      | 68.20          | Peak              |
| 4  | * 10367.000     | 32.83          | 18.04    | 50.86                | -17.34      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 5250MHz | Test Voltage         | AC 120V/60Hz |

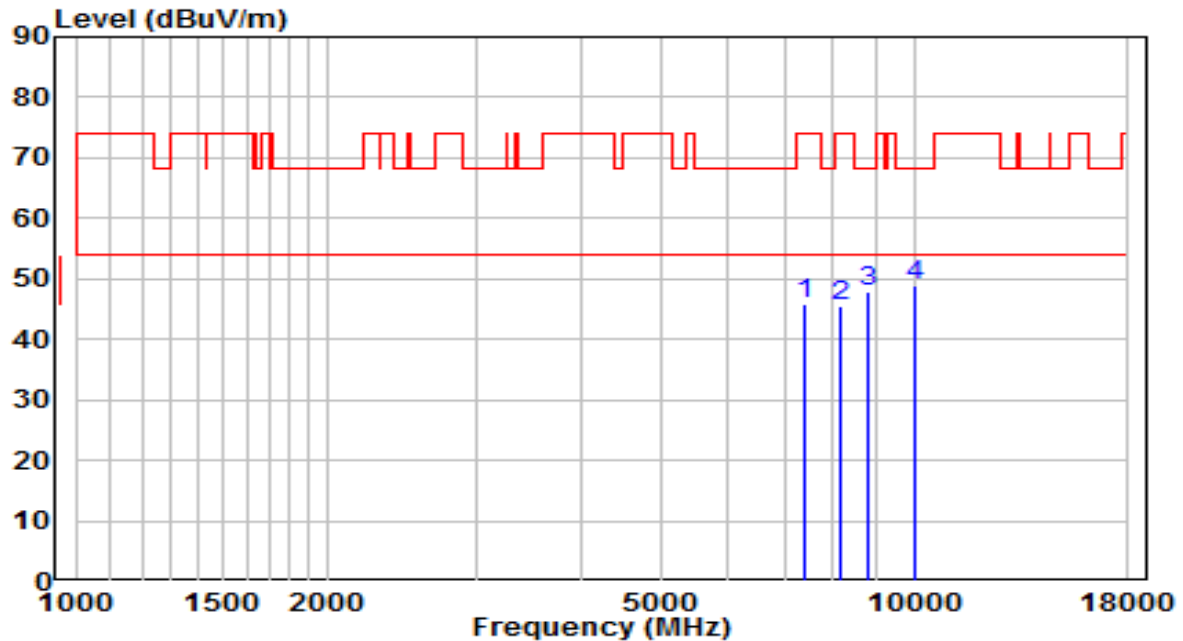


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7392.000        | 33.32          | 12.54    | 45.86                | -28.14      | 74.00          | Peak              |
| 2  | 8182.500        | 31.90          | 13.51    | 45.42                | -28.58      | 74.00          | Peak              |
| 3  | 8820.000        | 33.53          | 14.44    | 47.97                | -20.23      | 68.20          | Peak              |
| 4  | * 10035.500     | 32.30          | 16.70    | 49.00                | -19.20      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 5570MHz | Test Voltage         | AC 120V/60Hz |

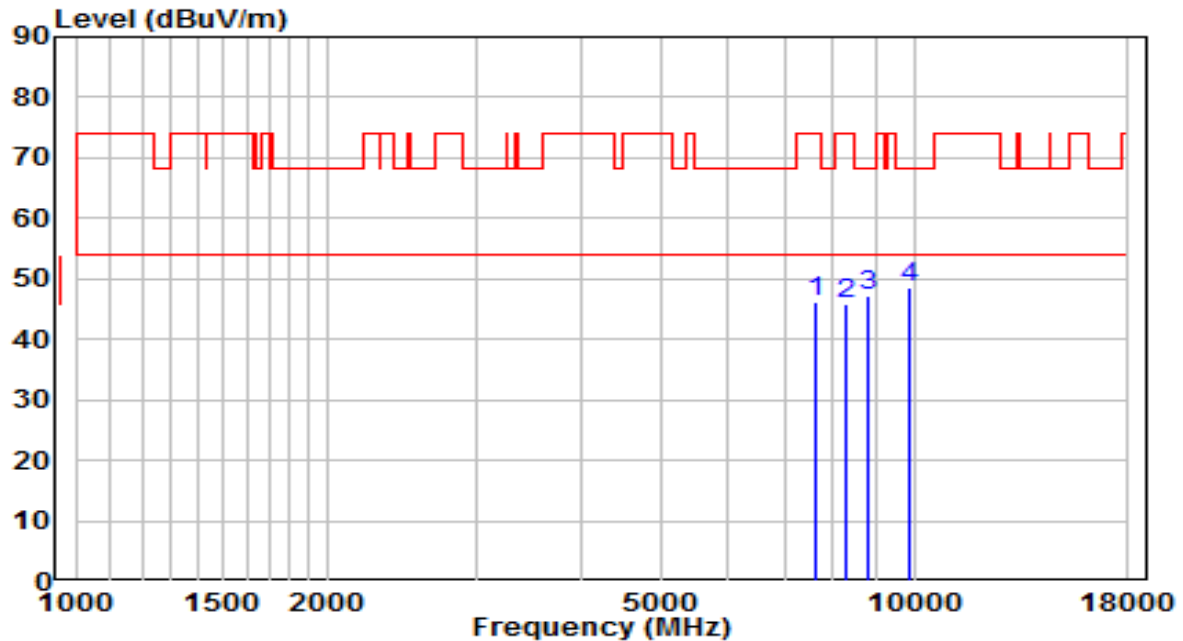


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7630.000        | 32.99          | 13.12    | 46.11                | -27.89      | 74.00          | Peak              |
| 2  | 8284.500        | 32.30          | 13.56    | 45.86                | -28.14      | 74.00          | Peak              |
| 3  | 8794.500        | 32.78          | 14.38    | 47.16                | -21.04      | 68.20          | Peak              |
| 4  | * 9899.500      | 32.18          | 16.39    | 48.57                | -19.63      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/37%   |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 5570MHz | Test Voltage         | AC 120V/60Hz |

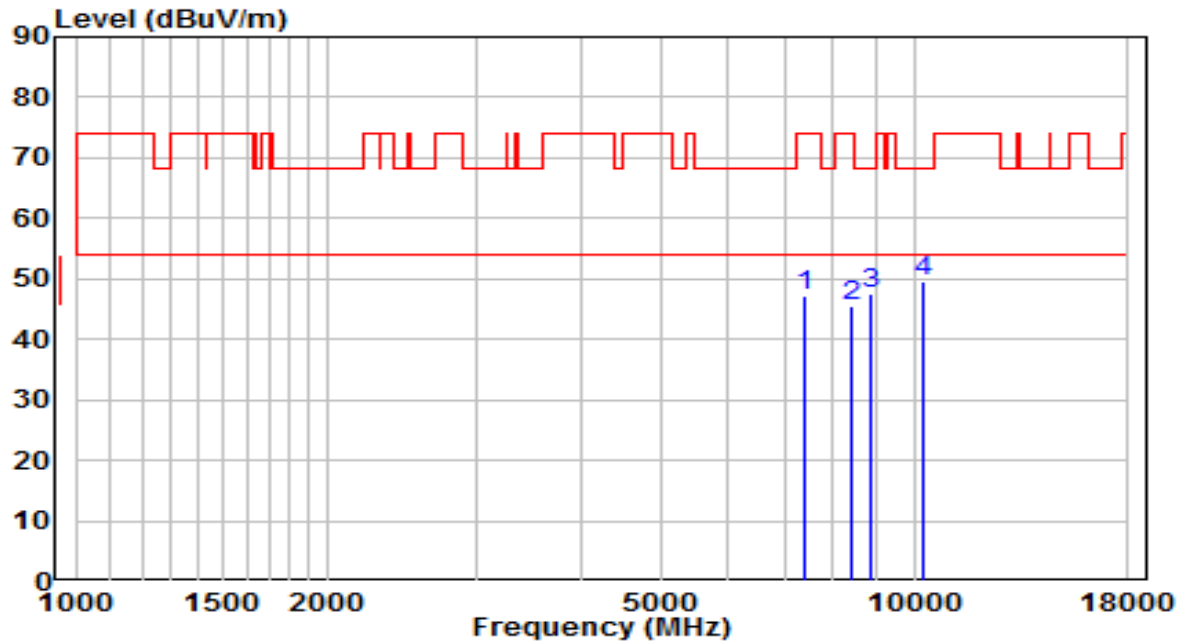


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 7426.000        | 34.61          | 12.69    | 47.30                | -26.70      | 74.00          | Peak              |
| 2  | 8437.500        | 31.86          | 13.63    | 45.49                | -28.51      | 74.00          | Peak              |
| 3  | 8862.500        | 32.94          | 14.54    | 47.49                | -20.71      | 68.20          | Peak              |
| 4  | * 10248.000     | 31.92          | 17.56    | 49.47                | -18.73      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

### The Worst Case of Radiated Emission below 1GHz:

|           |                                        |                      |             |
|-----------|----------------------------------------|----------------------|-------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15  |
| Factor    | VULB 9162                              | Temp. / Humidity     | 25.2°C /40% |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay   |
| Test Mode | Transmit by 802.11a at channel 5785MHz | Test Voltage         | 120V/60Hz   |

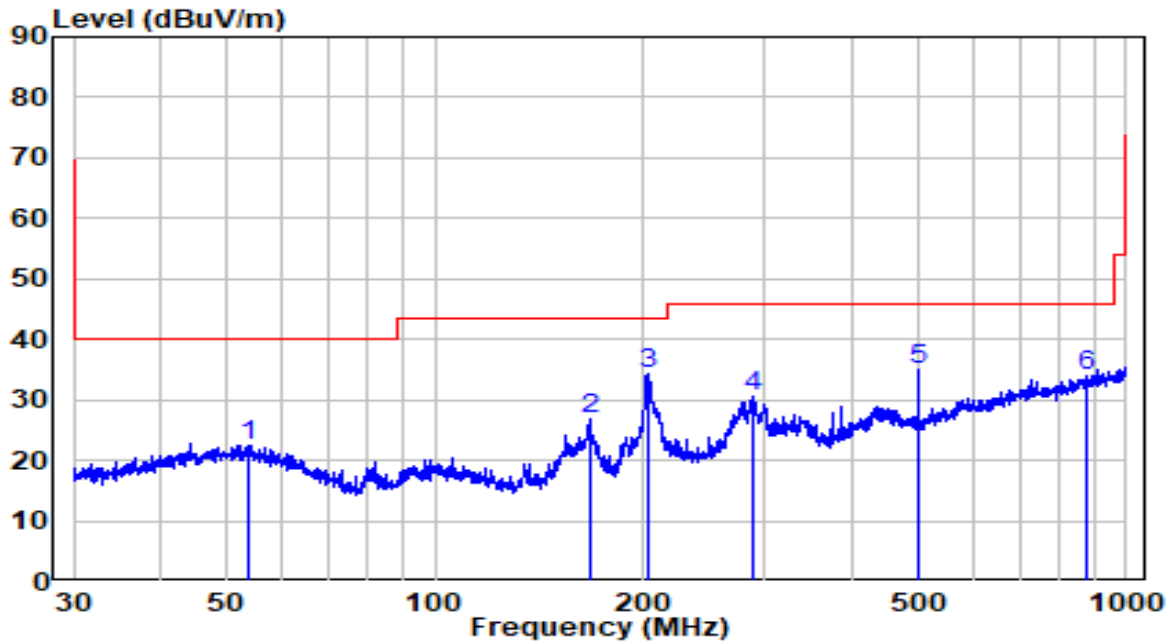


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 53.787          | 1.13           | 21.35    | 22.48                | -17.52      | 40.00          | Peak              |
| 2  | 167.237         | 10.22          | 16.56    | 26.78                | -16.72      | 43.50          | Peak              |
| 3  | * 203.880       | 15.16          | 19.07    | 34.23                | -9.27       | 43.50          | Peak              |
| 4  | 287.486         | 9.36           | 21.21    | 30.57                | -15.43      | 46.00          | Peak              |
| 5  | 500.301         | 8.81           | 26.22    | 35.03                | -10.97      | 46.00          | Peak              |
| 6  | 876.783         | 2.38           | 31.64    | 34.02                | -11.98      | 46.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |             |
|-----------|----------------------------------------|----------------------|-------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15  |
| Factor    | VULB 9162                              | Temp. / Humidity     | 25.2°C /40% |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay   |
| Test Mode | Transmit by 802.11a at channel 5785MHz | Test Voltage         | 120V/60Hz   |

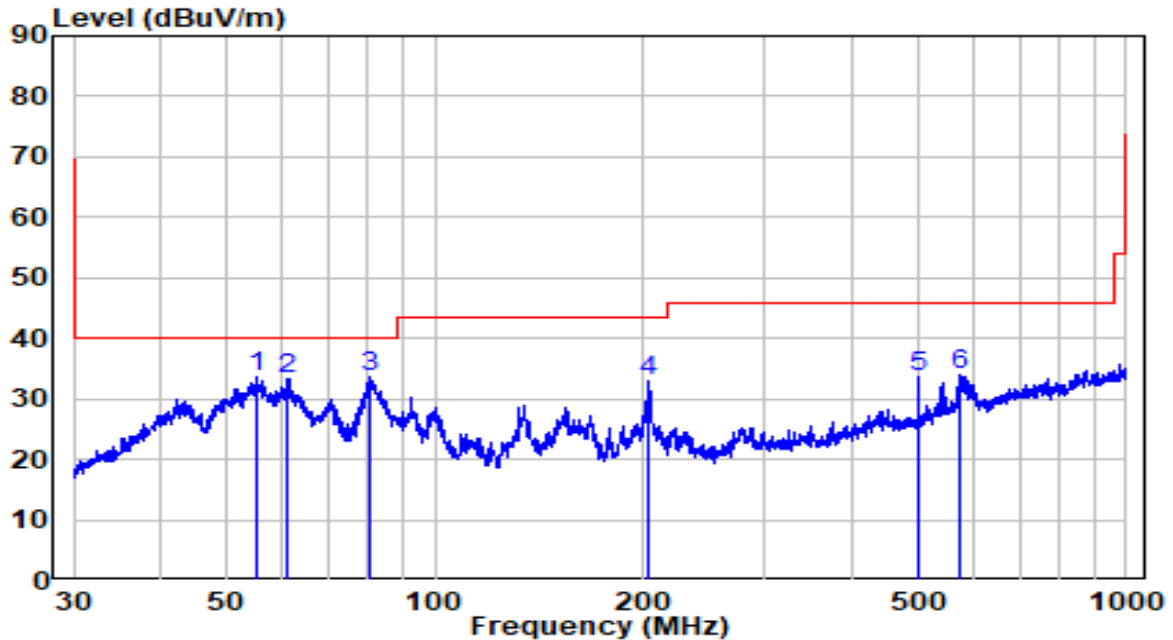

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 55.124          | 12.44          | 21.11    | 33.55                | -6.45       | 40.00          | Peak              |
| 2  | 61.239          | 13.40          | 19.81    | 33.21                | -6.79       | 40.00          | Peak              |
| 3  | * 80.362        | 19.25          | 14.44    | 33.69                | -6.31       | 40.00          | Peak              |
| 4  | 203.523         | 13.78          | 19.09    | 32.87                | -10.63      | 43.50          | Peak              |
| 5  | 500.301         | 7.25           | 26.22    | 33.47                | -12.53      | 46.00          | Peak              |
| 6  | 573.619         | 6.74           | 27.28    | 34.02                | -11.98      | 46.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.9. Radiated Restricted Band Edge Measurement

### 7.9.1. Test Limit

#### **For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz) | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|--------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42-16.423       | 399.9 - 410        | 4.5-5.15           |
| <sup>1</sup> 0.495 - 0.505 | 16.69475-16.69525  | 608 - 614          | 5.35-5.46          |
| 2.1735-2.1905              | 16.80425-16.80475  | 960 - 1240         | 7.25-7.75          |
| 4.125-4.128                | 25.5 -25.67        | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725-4.17775            | 37.5-38.25         | 1435-1626.5        | 9.0-9.2            |
| 4.20725-4.20775            | 73-74.6            | 1645.5-1646.5      | 9.3-9.5            |
| 6.215-6.218                | 74.8-75.2          | 1660 - 1710        | 10.6-12.7          |
| 6.26775-6.26825            | 108-121.94         | 1718.8-1722.2      | 13.25-13.4         |
| 6.31175-6.31225            | 123 - 138          | 2200 - 2300        | 14.47-14.5         |
| 8.291-8.294                | 149.9-150.05       | 2310 - 2390        | 15.35-16.2         |
| 8.362-8.366                | 156.52475-156.525  | 2483.5 - 2500      | 17.7-21.4          |
| 8.37625-8.38675            | 156.7-156.9        | 2690 - 2900        | 22.01-23.12        |
| 8.41425-8.41475            | 162.0125-167.17    | 3260 - 3267        | 23.6-24.0          |
| 12.29-12.293               | 167.72-173.2       | 3332 - 3339        | 31.2-31.8          |
| 12.51975-12.52025          | 240 - 285          | 3345.8 - 3358      | 36.43-36.5         |
| 12.57675-12.57725          | 322-335.4          | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36-13.41                | --                 | --                 | --                 |

#### **For 15.407(b) requirement:**

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 7.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

### **7.9.3.Test Setting**


#### **Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### **Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBWIf the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set  $VBW \leq RBW/100$  (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is  $< 98\%$ , set  $VBW \geq 1/T$ .
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.

#### 7.9.4.Test Setup

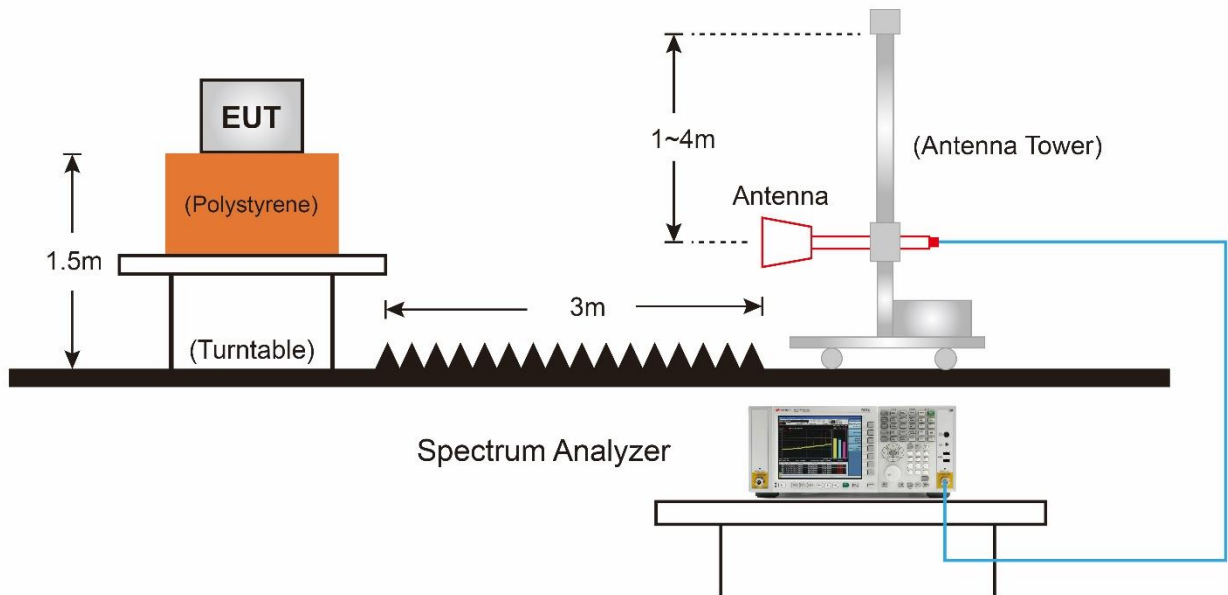

### 7.9.5.Test Result

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

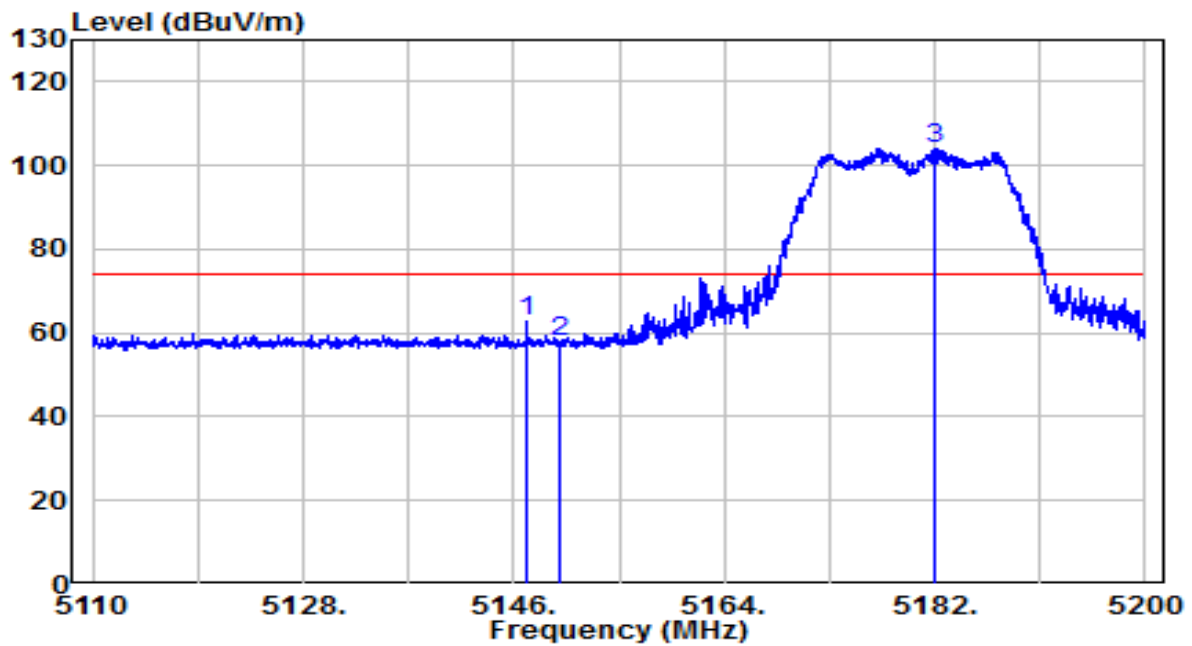


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5147.170        | 42.70          | 20.19    | 62.89                | -11.11      | 74.00          | Peak              |
| 2  | 5150.000        | 37.78          | 20.20    | 57.97                | -16.03      | 74.00          | Peak              |
| 3  | * 5182.045      | 83.83          | 20.25    | 104.08               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

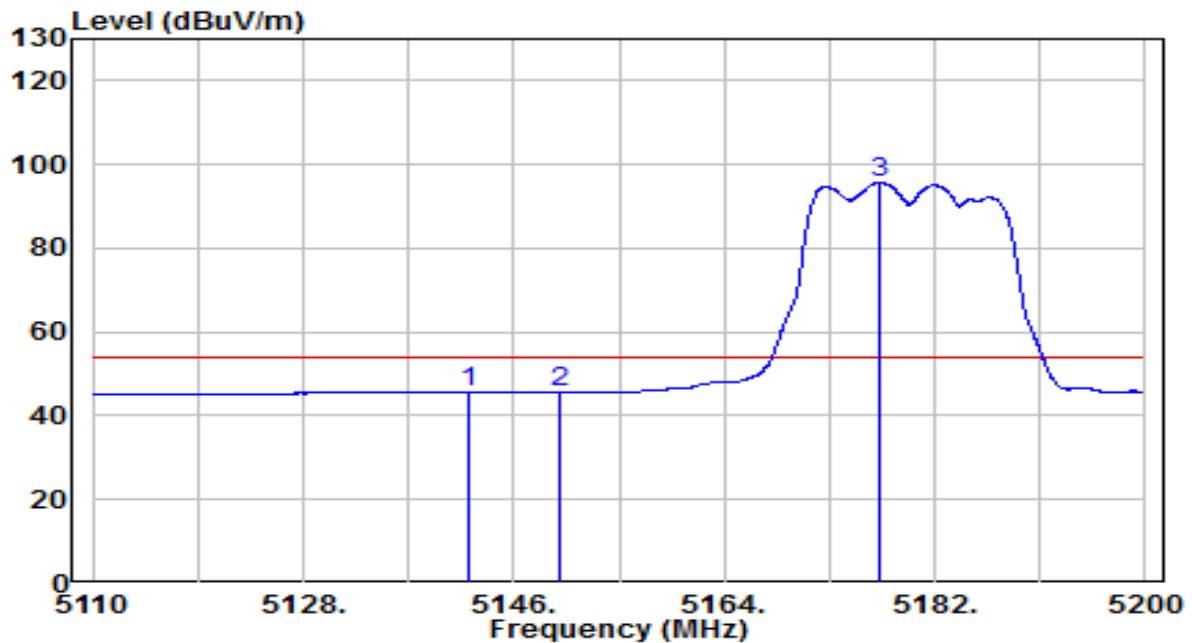


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5142.220        | 25.34          | 20.18    | 45.53                | -8.47       | 54.00          | Average           |
| 2  | 5150.000        | 25.20          | 20.20    | 45.40                | -8.60       | 54.00          | Average           |
| 3  | * 5177.185      | 75.52          | 20.24    | 95.76                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

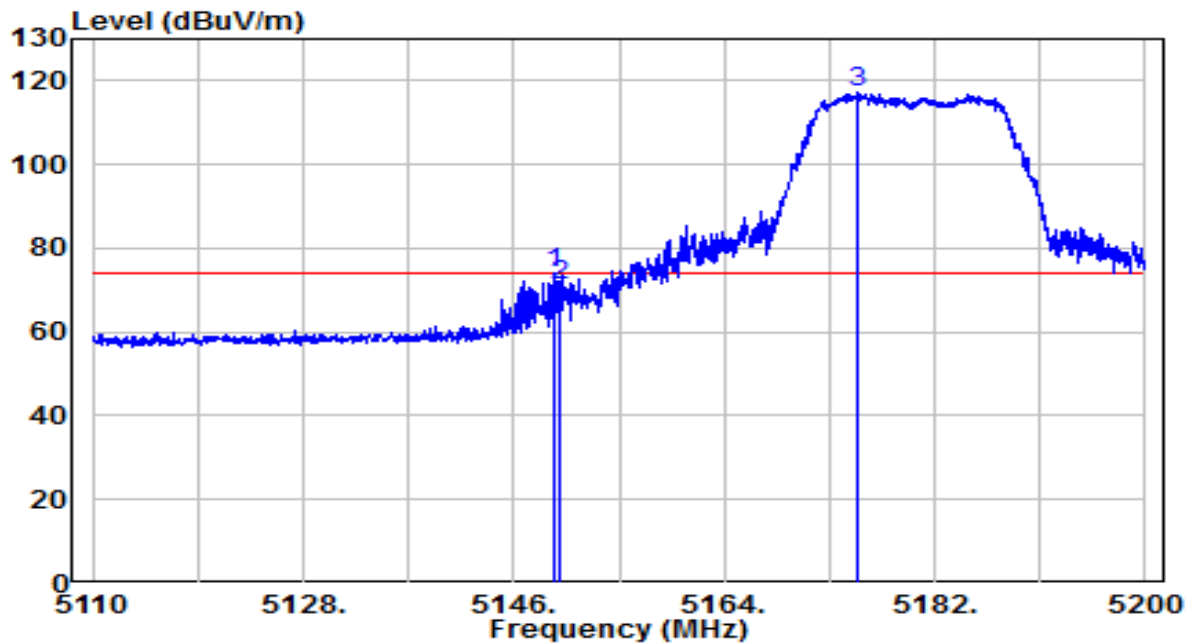


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5149.420        | 53.76          | 20.20    | 73.95                | -0.05       | 74.00          | Peak              |
| 2  | 5150.005        | 50.89          | 20.20    | 71.09                | -2.91       | 74.00          | Peak              |
| 3  | * 5175.475      | 97.01          | 20.24    | 117.25               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

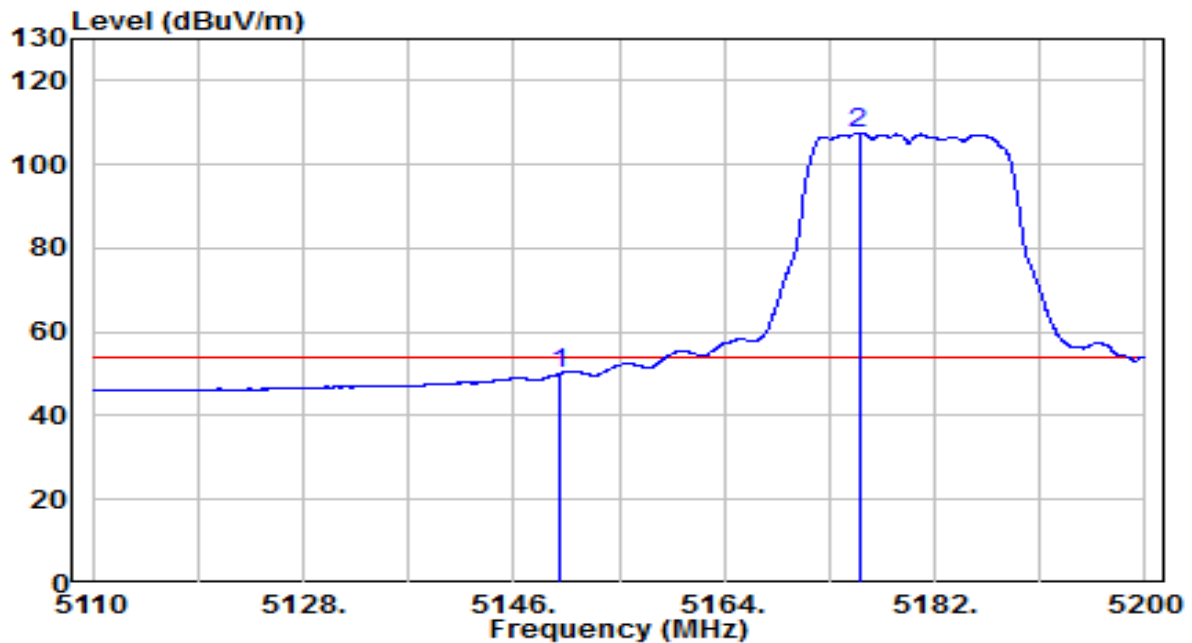


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  |   | 5150.005        | 29.83          | 20.20    | 50.03                | -3.97       | 54.00          | Average           |
| 2  | * | 5175.520        | 87.32          | 20.24    | 107.56               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

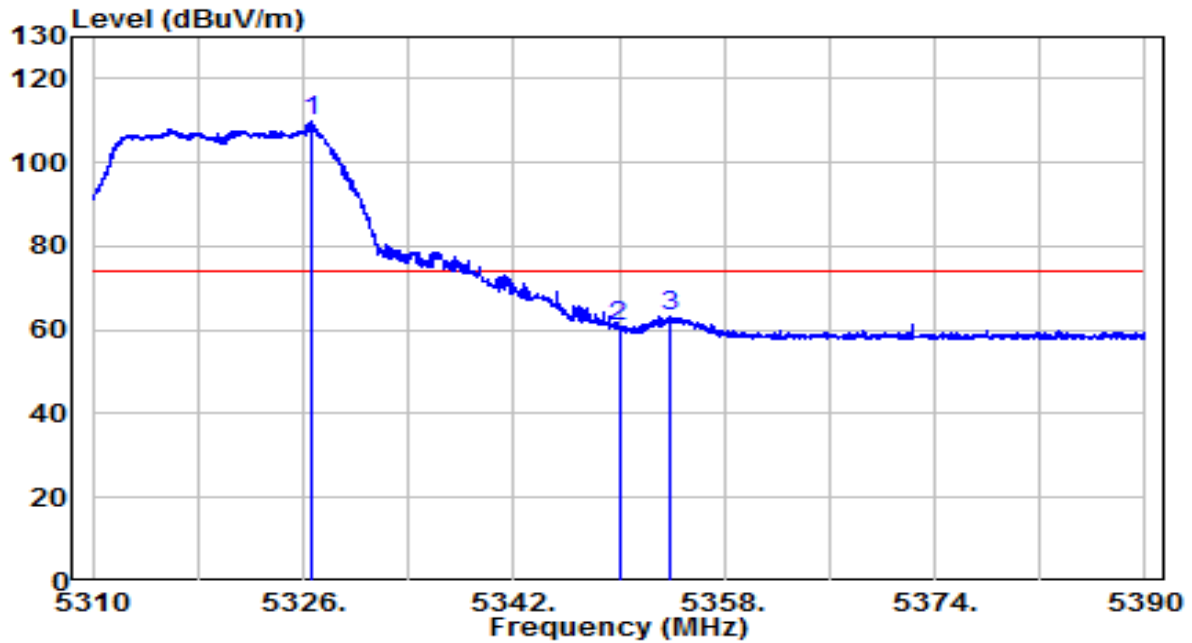


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5326.640        | 89.20          | 20.49    | 109.68               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 40.34          | 20.52    | 60.87                | -13.13      | 74.00          | Peak              |
| 3  |   | 5353.840        | 42.66          | 20.53    | 63.19                | -10.81      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

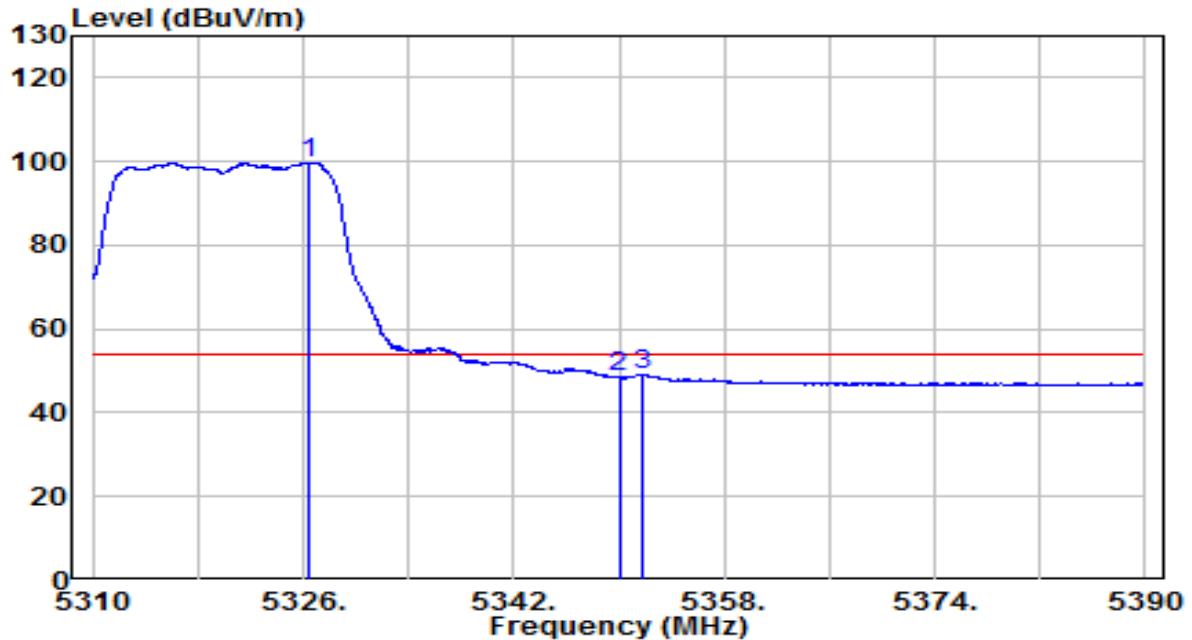


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5326.360        | 79.33          | 20.49    | 99.82                | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 28.10          | 20.52    | 48.62                | -5.38       | 54.00          | Average           |
| 3  |   | 5351.760        | 28.60          | 20.53    | 49.12                | -4.88       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

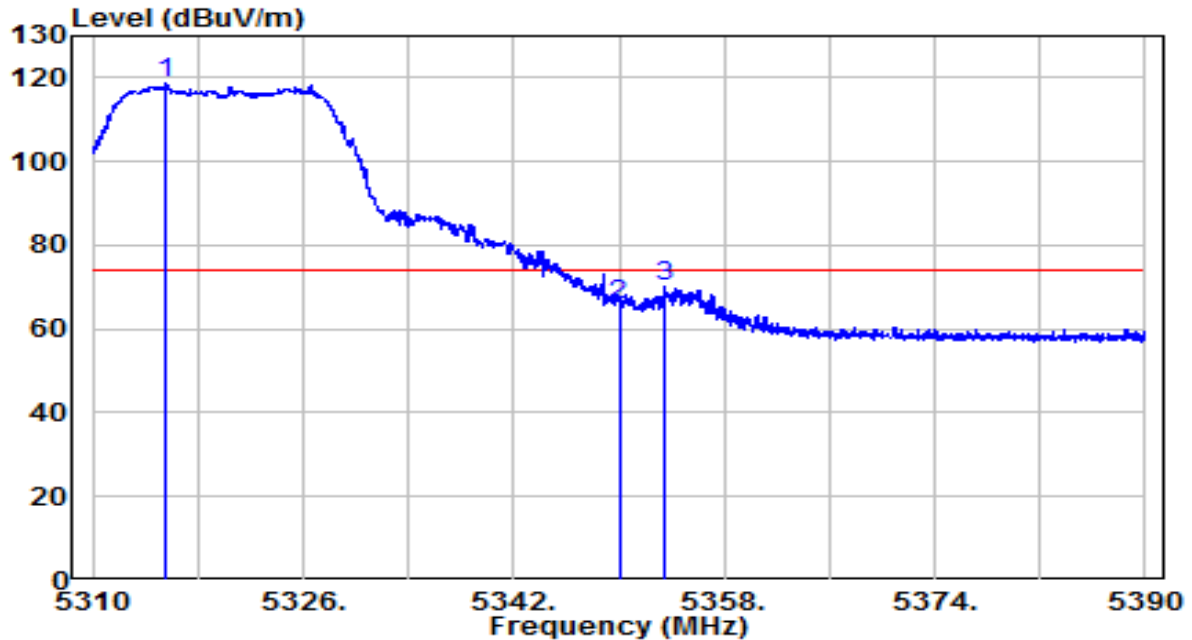


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5315.600        | 98.08          | 20.47    | 118.55               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 45.29          | 20.52    | 65.81                | -8.19       | 74.00          | Peak              |
| 3  |   | 5353.560        | 49.53          | 20.53    | 70.06                | -3.94       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

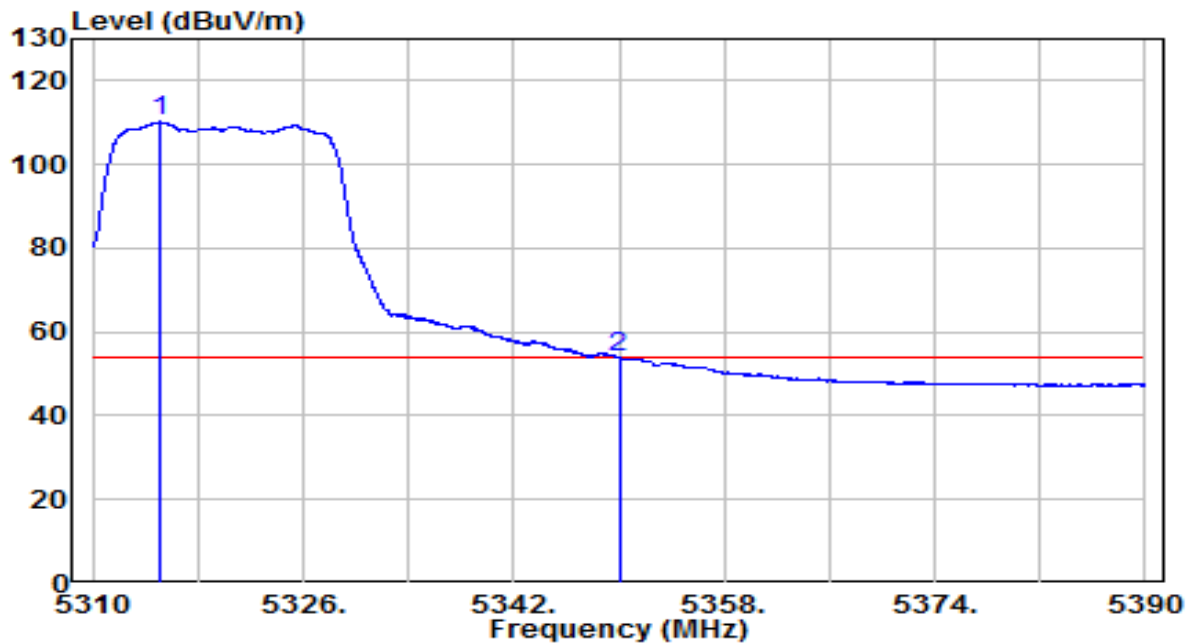


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5315.040        | 89.69          | 20.47    | 110.16               | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 33.30          | 20.52    | 53.82                | -0.18       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

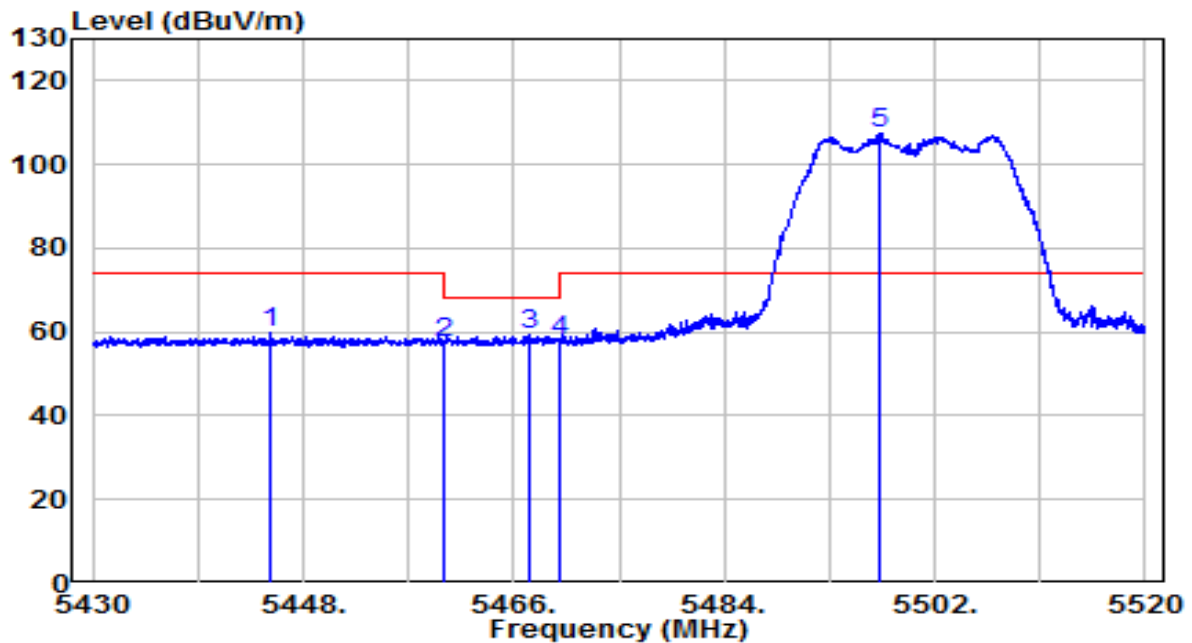


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5445.120        | 38.99          | 20.68    | 59.67                | -14.33      | 74.00          | Peak              |
| 2  | 5460.000        | 36.91          | 20.70    | 57.62                | -10.58      | 68.20          | Peak              |
| 3  | 5467.350        | 38.60          | 20.72    | 59.32                | -8.88       | 68.20          | Peak              |
| 4  | 5470.000        | 37.00          | 20.72    | 57.72                | -10.48      | 68.20          | Peak              |
| 5  | * 5497.365      | 86.66          | 20.77    | 107.42               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

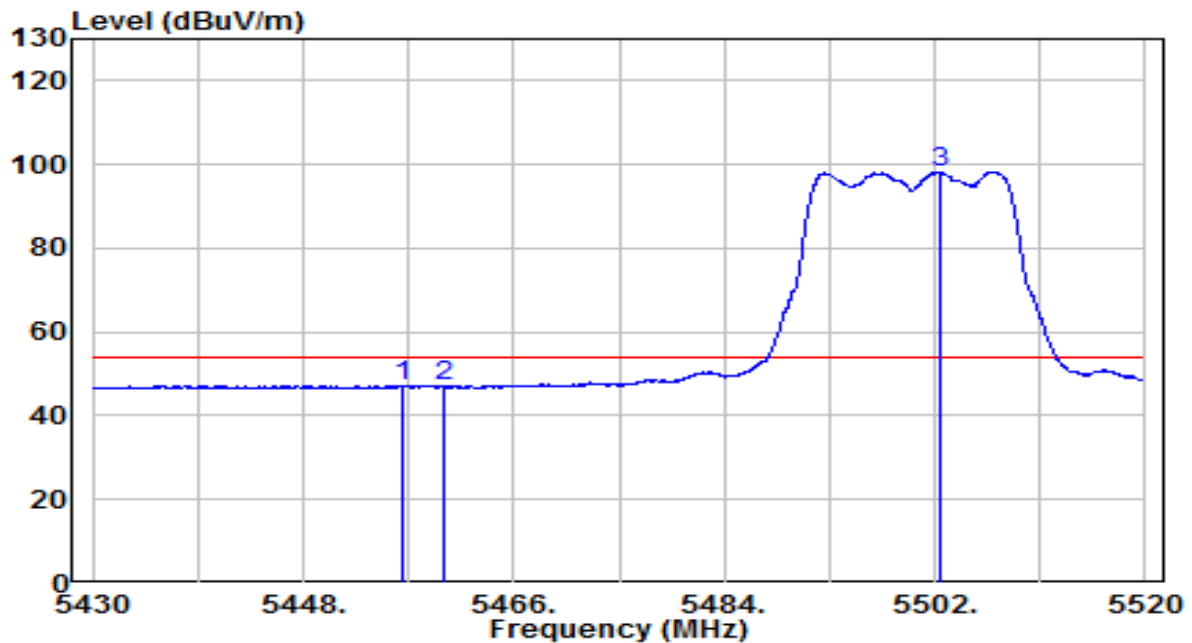


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5456.505        | 26.50          | 20.70    | 47.20                | -6.80       | 54.00          | Average           |
| 2  | 5460.015        | 26.26          | 20.70    | 46.96                | -7.04       | 54.00          | Average           |
| 3  | * 5502.405      | 77.49          | 20.78    | 98.27                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

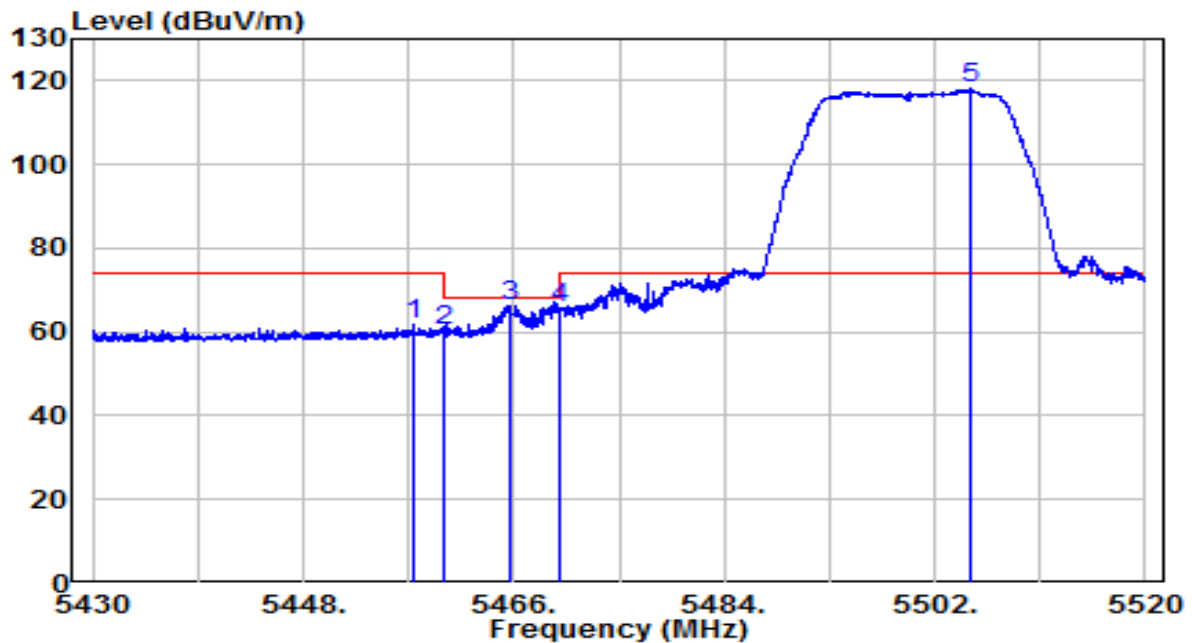


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5457.450        | 41.12          | 20.70    | 61.82                | -12.18      | 74.00          | Peak              |
| 2  | 5460.000        | 39.59          | 20.70    | 60.30                | -7.90       | 68.20          | Peak              |
| 3  | 5465.595        | 45.38          | 20.71    | 66.10                | -2.10       | 68.20          | Peak              |
| 4  | 5470.000        | 44.83          | 20.72    | 65.55                | -2.65       | 68.20          | Peak              |
| 5  | * 5504.970      | 97.30          | 20.79    | 118.09               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

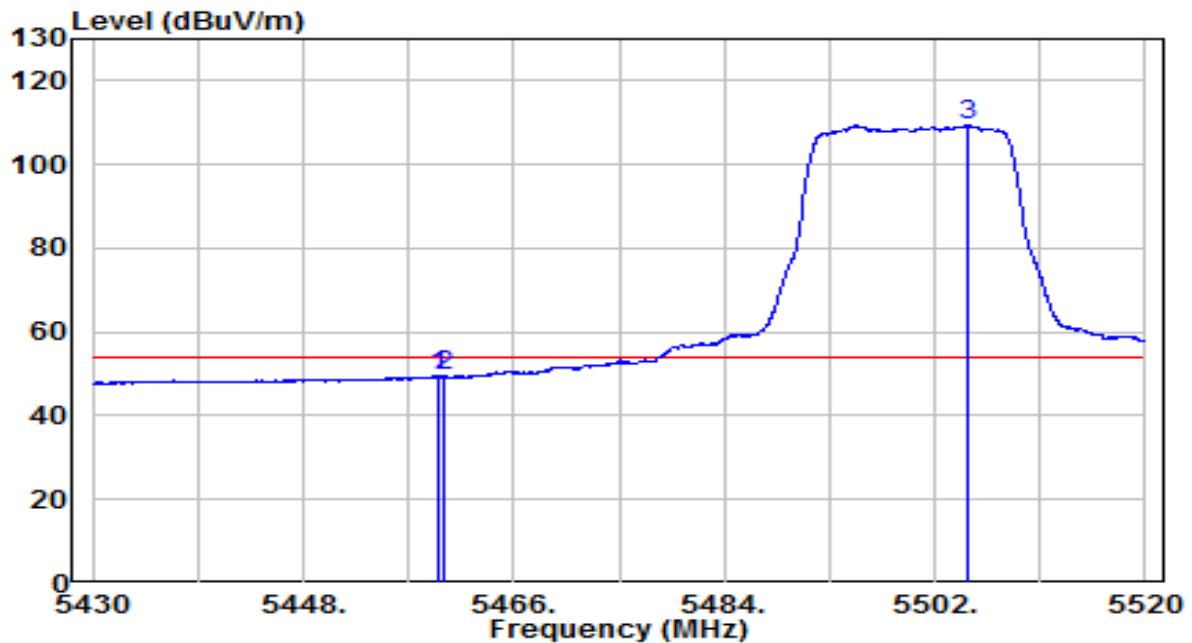


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.655        | 28.79          | 20.70    | 49.50                | -4.50       | 54.00          | Average           |
| 2  | 5460.015        | 28.60          | 20.70    | 49.30                | -4.70       | 54.00          | Average           |
| 3  | * 5504.835      | 88.51          | 20.79    | 109.30               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5700MHz | Test Voltage         | 120V/60Hz  |

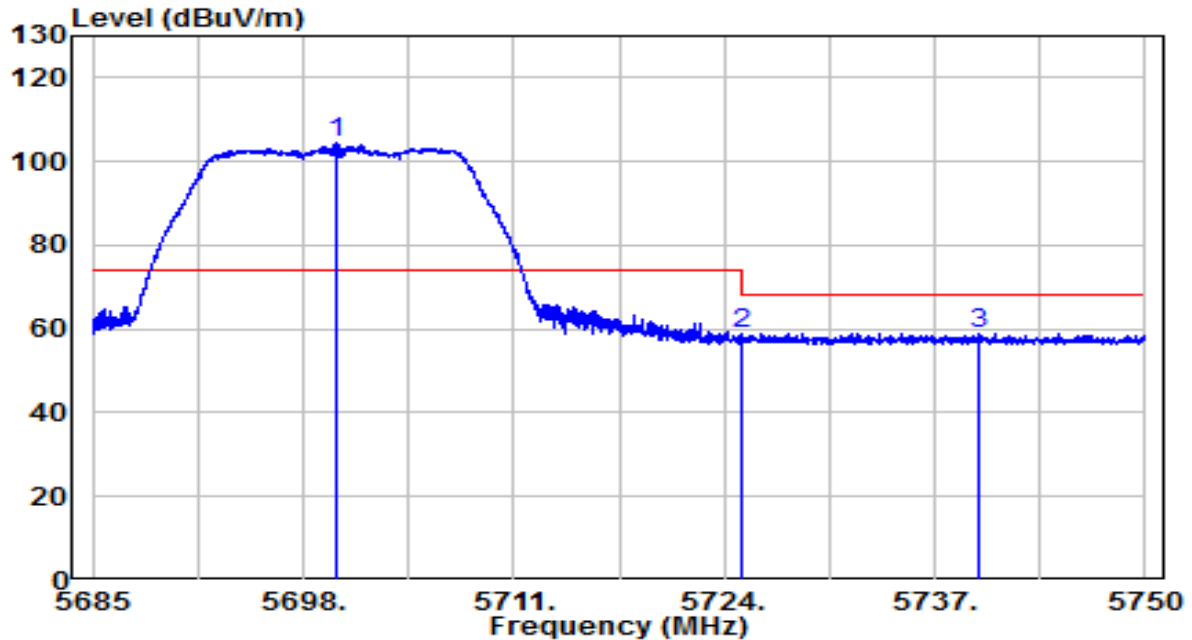


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5700.015        | 82.75          | 21.50    | 104.25               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 37.08          | 21.59    | 58.67                | -9.53       | 68.20          | Peak              |
| 3  |   | 5739.665        | 37.40          | 21.64    | 59.04                | -9.16       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5700MHz | Test Voltage         | 120V/60Hz  |

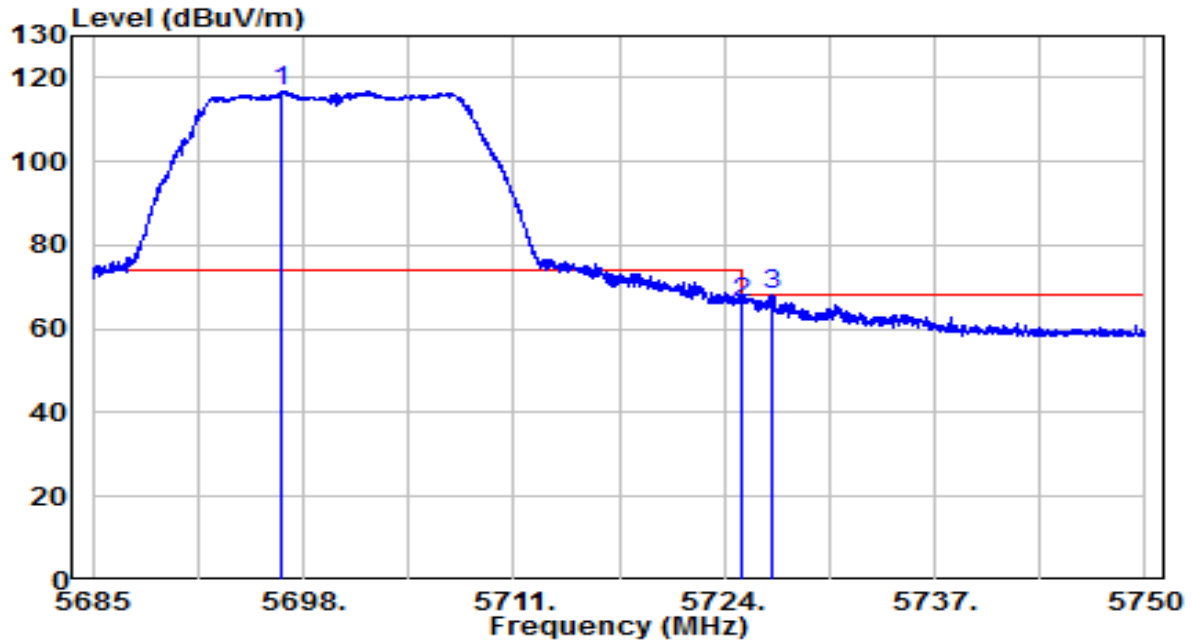


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5696.667        | 95.25          | 21.49    | 116.74               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 44.53          | 21.59    | 66.12                | -2.08       | 68.20          | Peak              |
| 3  |   | 5726.893        | 46.43          | 21.60    | 68.03                | -0.17       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5745MHz | Test Voltage         | 120V/60Hz  |

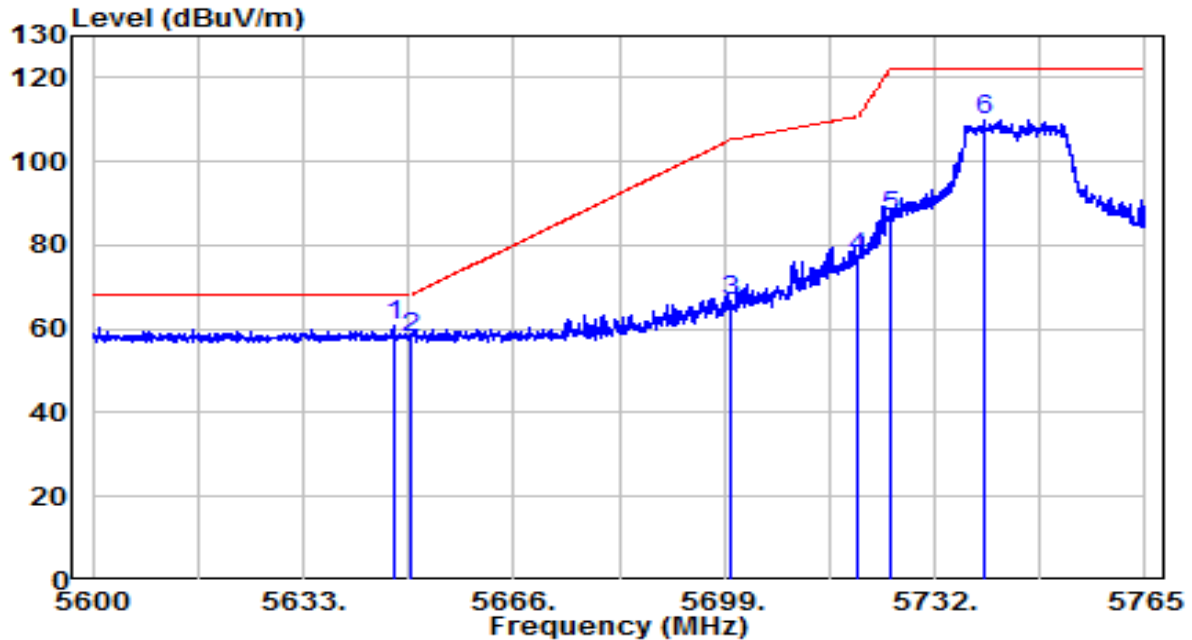


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5647.107        | 39.41          | 21.31    | 60.72                | -7.48       | 68.20          | Peak              |
| 2  |   | 5650.000        | 36.72          | 21.32    | 58.03                | -10.17      | 68.20          | Peak              |
| 3  |   | 5700.000        | 45.32          | 21.50    | 66.82                | -38.38      | 105.20         | Peak              |
| 4  |   | 5720.000        | 55.44          | 21.57    | 77.01                | -33.79      | 110.80         | Peak              |
| 5  |   | 5725.000        | 65.08          | 21.59    | 86.67                | -35.53      | 122.20         | Peak              |
| 6  |   | 5739.755        | 88.44          | 21.64    | 110.08               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5745MHz | Test Voltage         | 120V/60Hz  |

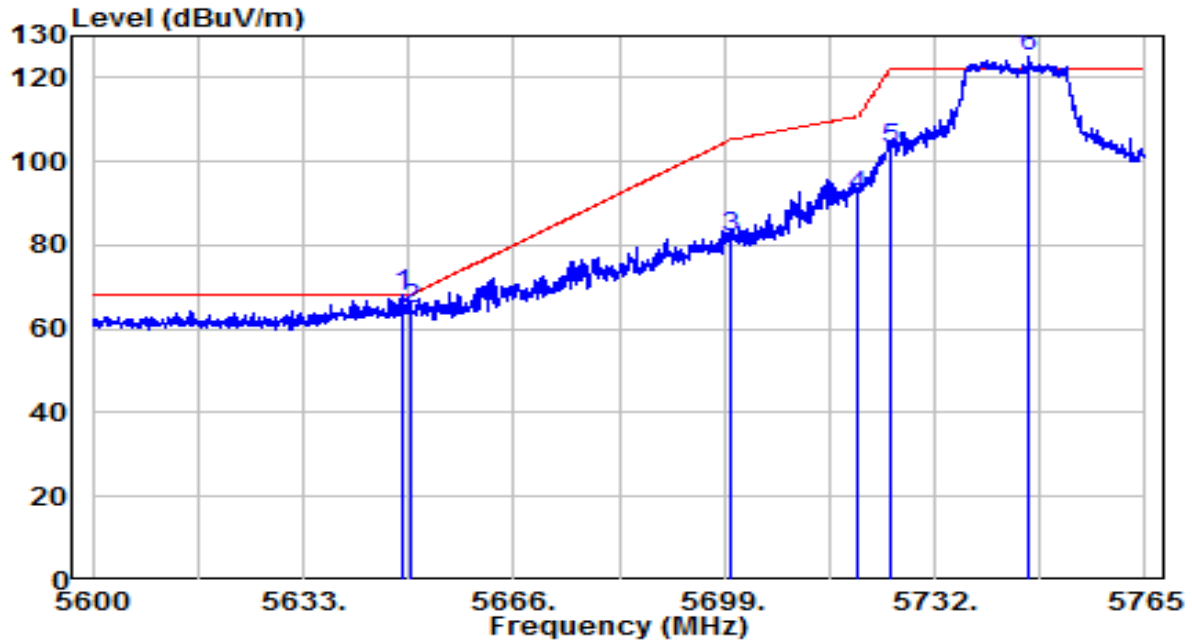


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5648.675        | 46.72          | 21.31    | 68.03                | -0.17       | 68.20          | Peak              |
| 2  | 5650.000        | 43.28          | 21.32    | 64.59                | -3.61       | 68.20          | Peak              |
| 3  | 5700.000        | 60.29          | 21.50    | 81.79                | -23.41      | 105.20         | Peak              |
| 4  | 5720.000        | 69.95          | 21.57    | 91.52                | -19.28      | 110.80         | Peak              |
| 5  | 5725.000        | 81.58          | 21.59    | 103.17               | -19.03      | 122.20         | Peak              |
| 6  | * 5746.768      | 103.23         | 21.67    | 124.90               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5825MHz | Test Voltage         | 120V/60Hz  |

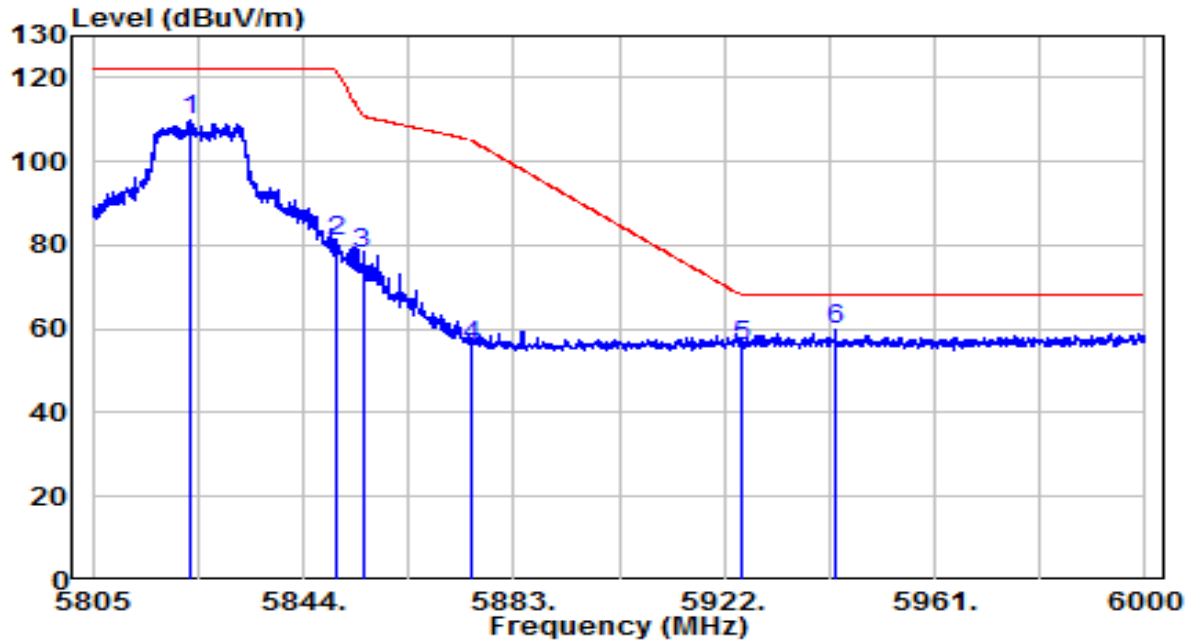


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5822.842        | 87.73          | 21.95    | 109.67               | N/A         | N/A            | Peak              |
| 2  | 5850.000        | 58.92          | 22.04    | 80.96                | -41.24      | 122.20         | Peak              |
| 3  | 5855.000        | 56.05          | 22.06    | 78.11                | -32.69      | 110.80         | Peak              |
| 4  | 5875.000        | 34.00          | 22.14    | 56.13                | -49.07      | 105.20         | Peak              |
| 5  | 5925.000        | 33.59          | 22.32    | 55.91                | -12.29      | 68.20          | Peak              |
| 6  | * 5942.475      | 37.35          | 22.38    | 59.73                | -8.47       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |            |
|-----------|----------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router         | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11a at Channel 5825MHz | Test Voltage         | 120V/60Hz  |

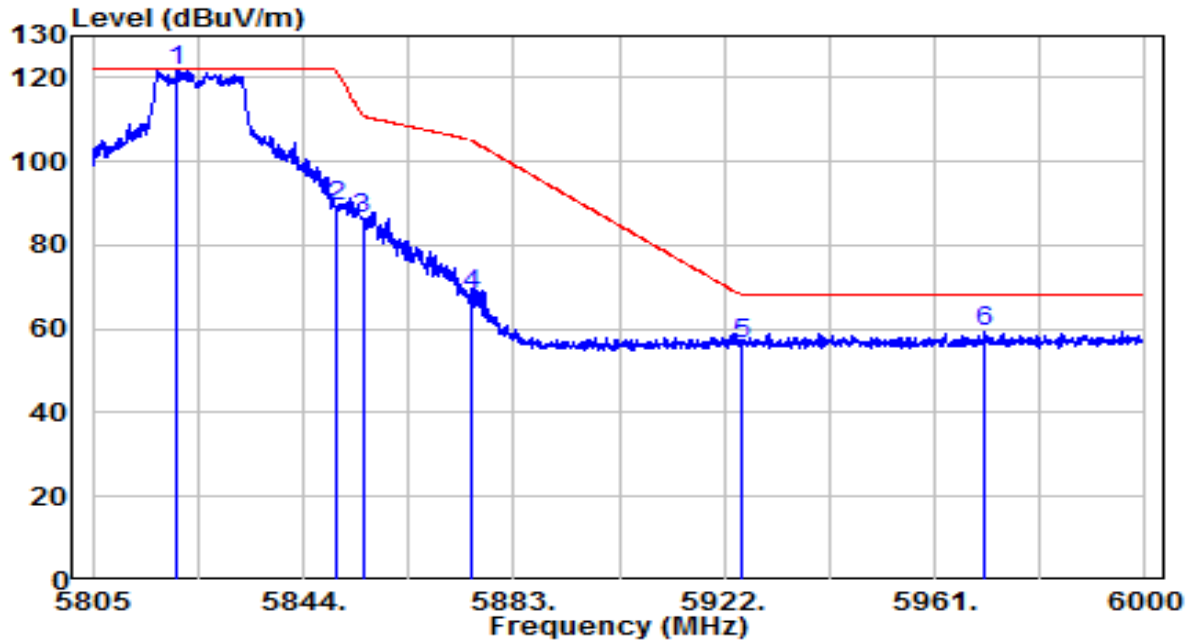


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5820.697        | 99.83          | 21.94    | 121.77               | N/A         | N/A            | Peak              |
| 2  |   | 5850.045        | 67.39          | 22.04    | 89.44                | -32.66      | 122.10         | Peak              |
| 3  |   | 5855.000        | 64.47          | 22.06    | 86.53                | -24.27      | 110.80         | Peak              |
| 4  |   | 5875.000        | 45.92          | 22.14    | 68.05                | -37.15      | 105.20         | Peak              |
| 5  |   | 5925.000        | 34.03          | 22.32    | 56.35                | -11.85      | 68.20          | Peak              |
| 6  |   | 5970.360        | 37.12          | 22.48    | 59.60                | -8.60       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

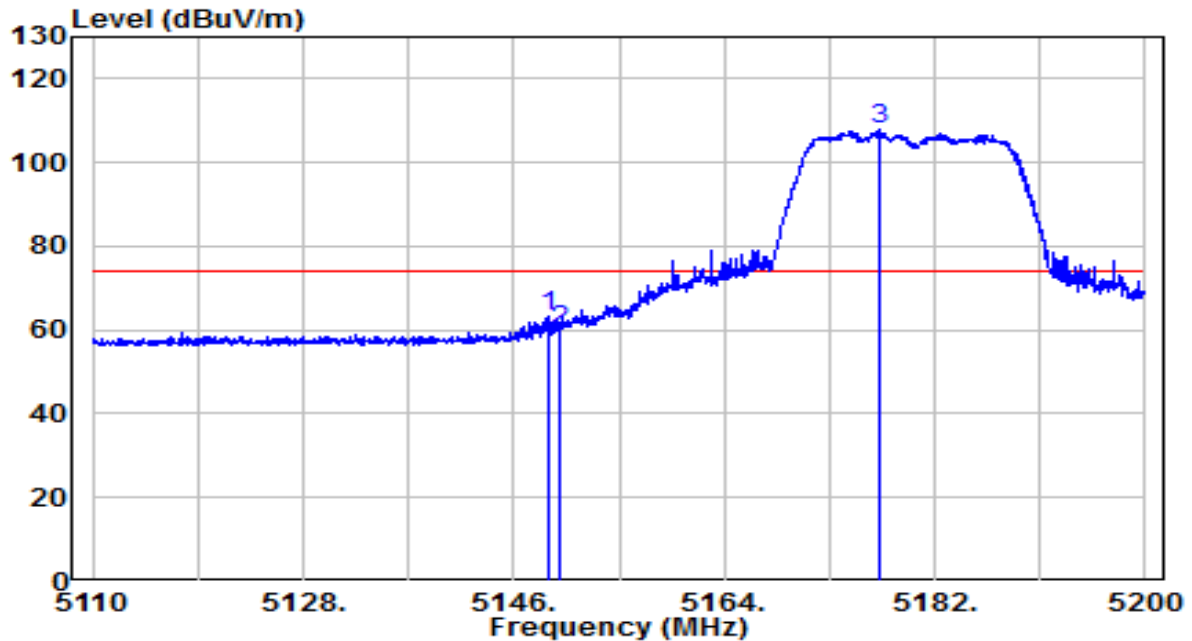


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5149.105        | 42.87          | 20.19    | 63.06                | -10.94      | 74.00          | Peak              |
| 2  | 5150.000        | 39.84          | 20.20    | 60.03                | -13.97      | 74.00          | Peak              |
| 3  | * 5177.365      | 87.68          | 20.24    | 107.92               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

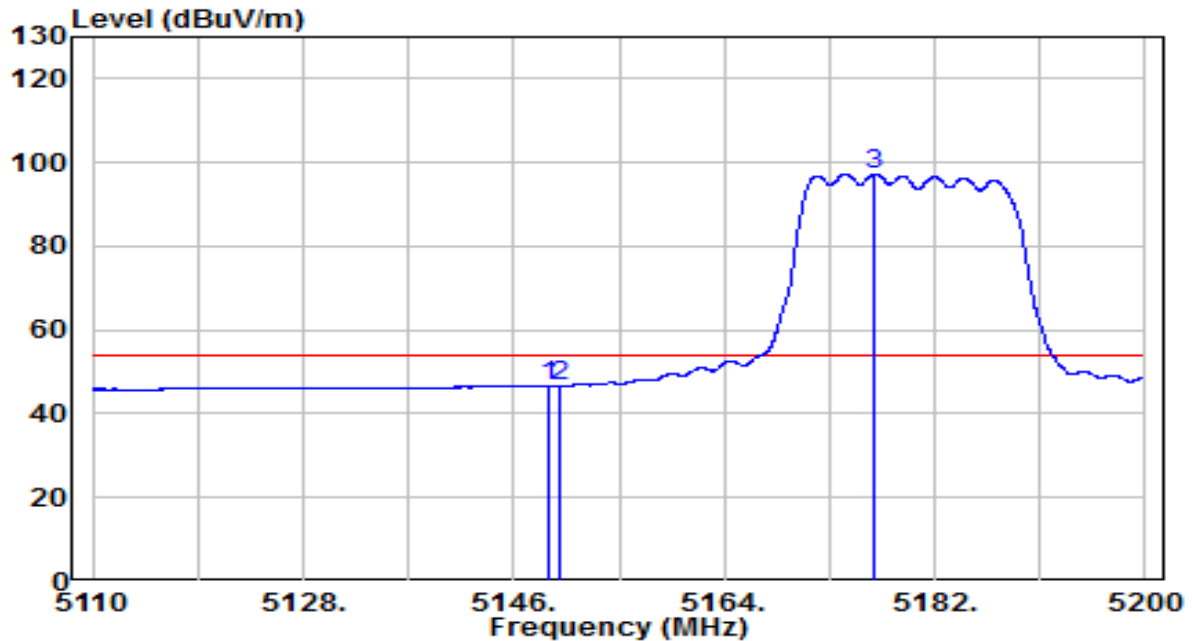


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5148.970        | 26.57          | 20.19    | 46.76                | -7.24       | 54.00          | Average           |
| 2  | 5150.000        | 26.44          | 20.20    | 46.64                | -7.36       | 54.00          | Average           |
| 3  | * 5176.915      | 77.03          | 20.24    | 97.27                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

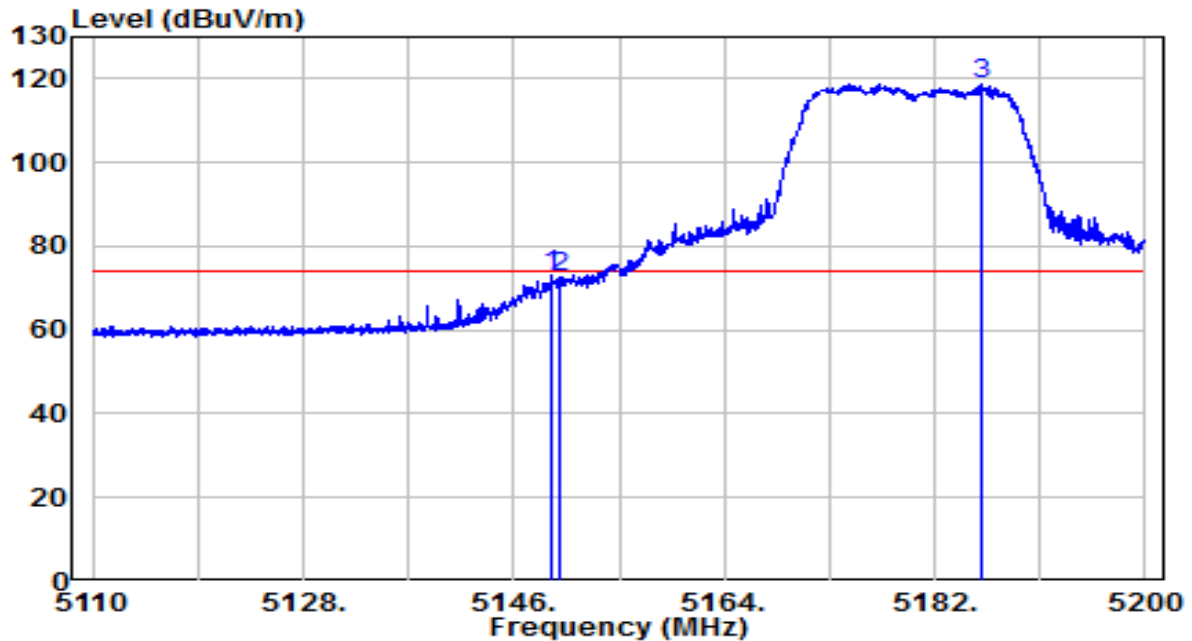


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5149.240        | 52.84          | 20.19    | 73.04                | -0.96       | 74.00          | Peak              |
| 2  | 5150.000        | 52.30          | 20.20    | 72.49                | -1.51       | 74.00          | Peak              |
| 3  | * 5186.050      | 98.63          | 20.26    | 118.88               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

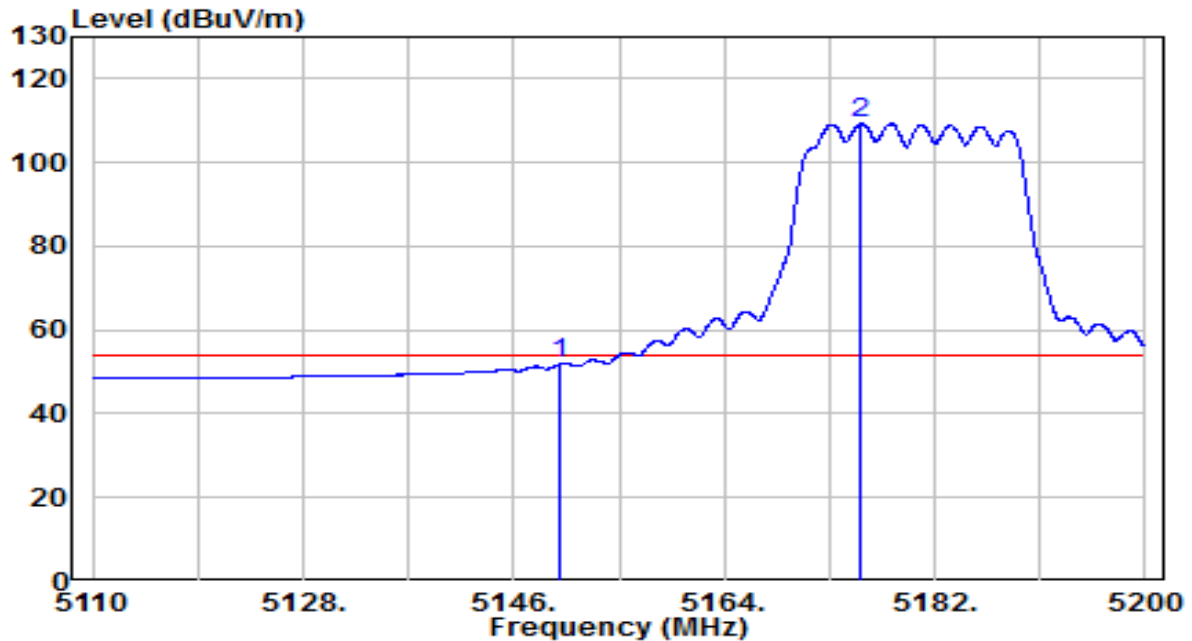


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5150.005        | 31.61          | 20.20    | 51.81                | -2.19       | 54.00          | Average           |
| 2  | * 5175.745      | 89.00          | 20.24    | 109.24               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

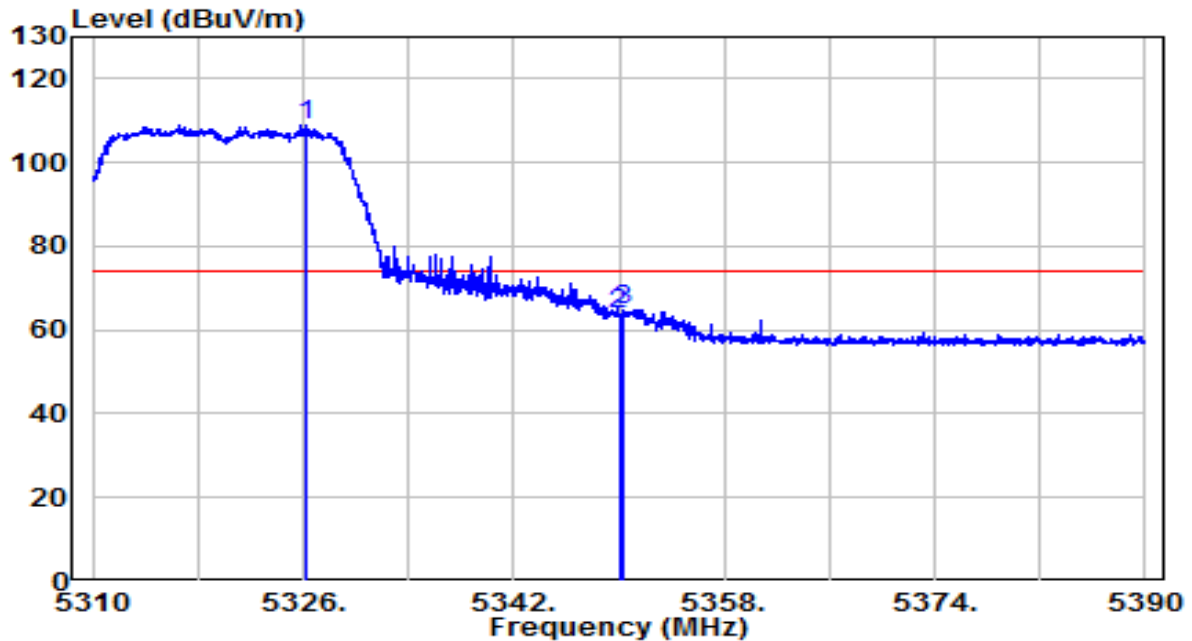


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5326.120        | 88.50          | 20.48    | 108.99               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 43.26          | 20.52    | 63.78                | -10.22      | 74.00          | Peak              |
| 3  |   | 5350.320        | 44.35          | 20.52    | 64.87                | -9.13       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

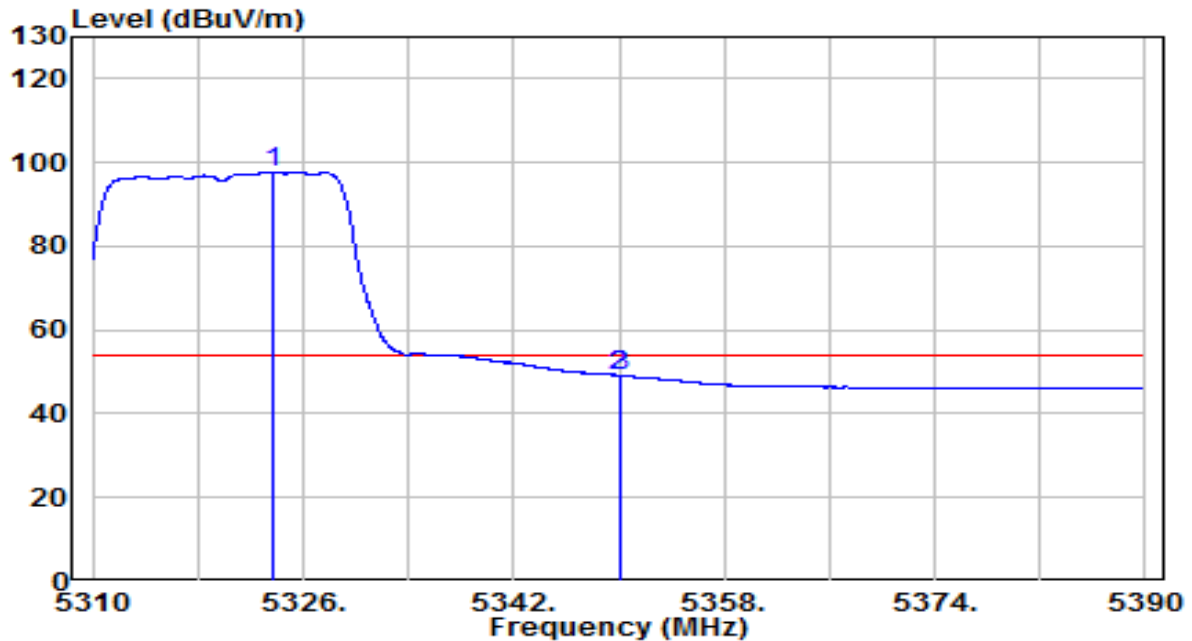


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5323.720        | 77.15          | 20.48    | 97.63                | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 28.69          | 20.52    | 49.22                | -4.78       | 54.00          | Average           |
| 3  |   | 5350.080        | 28.73          | 20.52    | 49.25                | -4.75       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

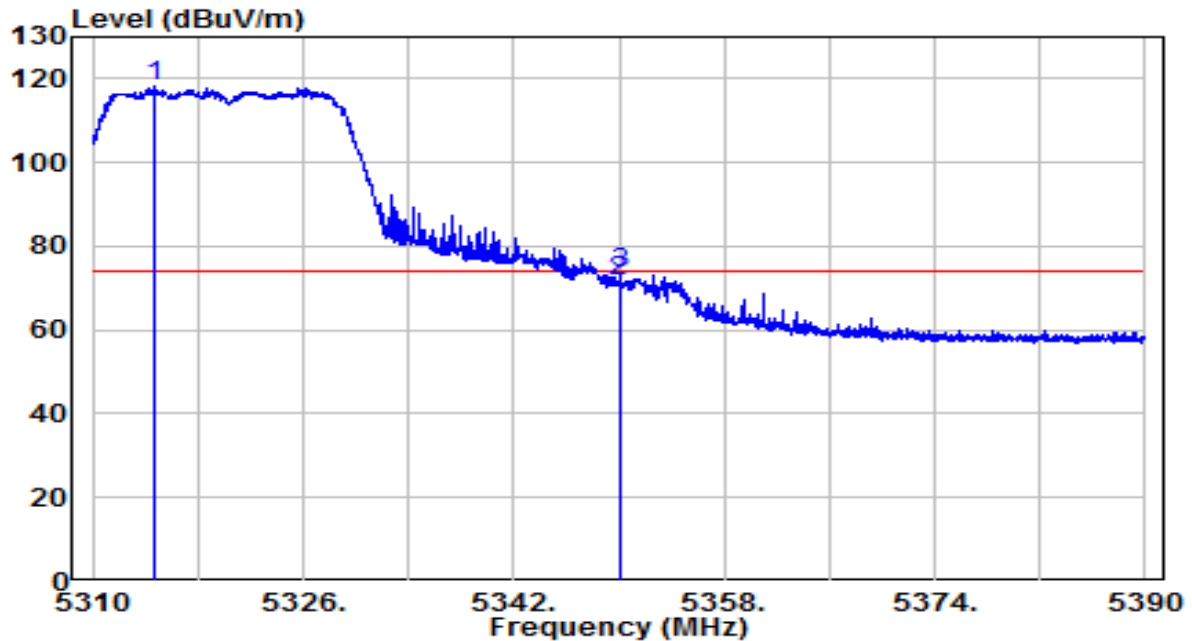


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5314.640        | 97.64          | 20.47    | 118.11               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 51.23          | 20.52    | 71.75                | -2.25       | 74.00          | Peak              |
| 3  |   | 5350.160        | 52.82          | 20.52    | 73.34                | -0.66       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

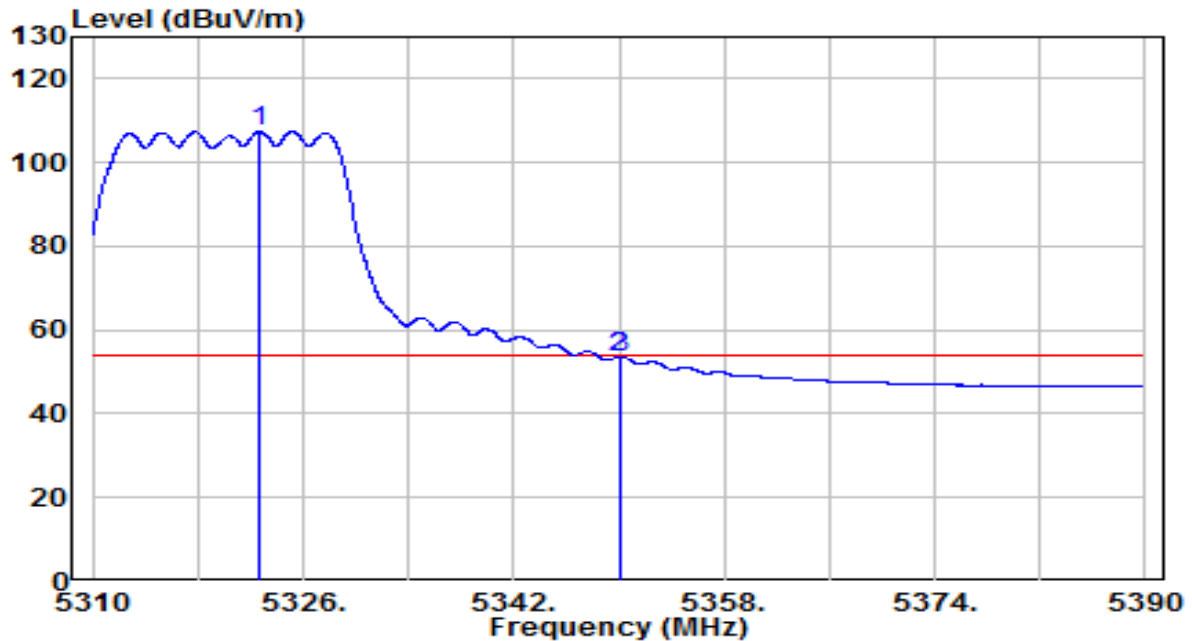


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5322.720        | 86.88          | 20.48    | 107.36               | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 33.13          | 20.52    | 53.66                | -0.34       | 54.00          | Average           |
| 3  |   | 5350.200        | 33.18          | 20.52    | 53.70                | -0.30       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

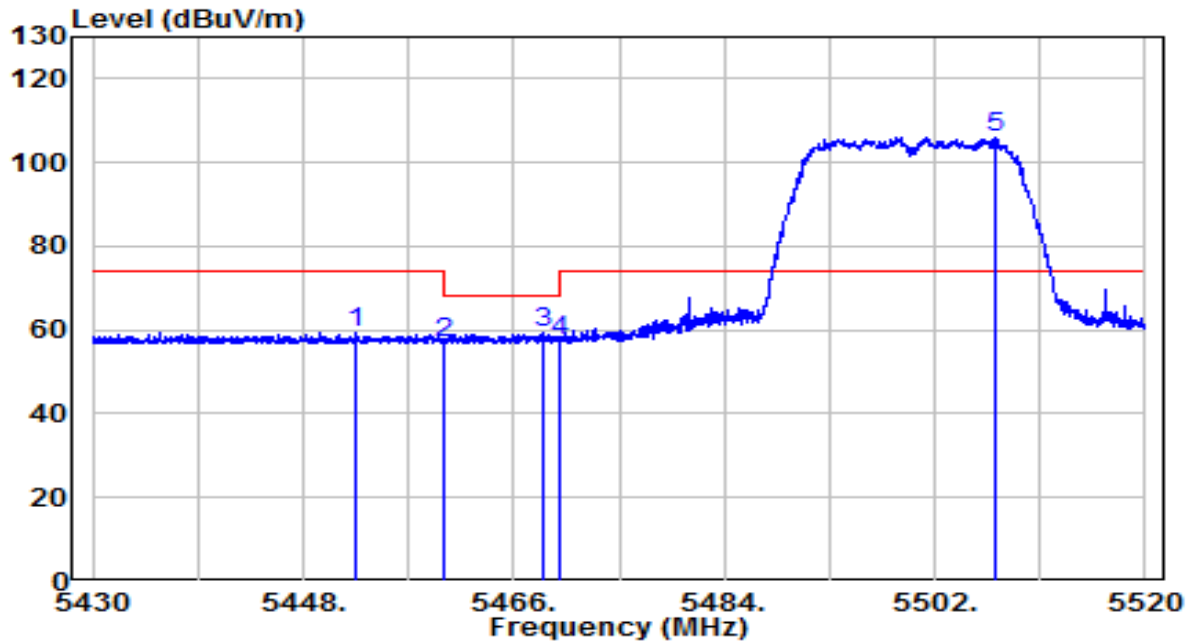


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5452.590        | 38.65          | 20.69    | 59.34                | -14.66      | 74.00          | Peak              |
| 2  | 5460.015        | 36.39          | 20.70    | 57.10                | -11.10      | 68.20          | Peak              |
| 3  | 5468.610        | 38.59          | 20.72    | 59.31                | -8.89       | 68.20          | Peak              |
| 4  | 5470.000        | 36.65          | 20.72    | 57.37                | -10.83      | 68.20          | Peak              |
| 5  | * 5507.130      | 85.28          | 20.80    | 106.07               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

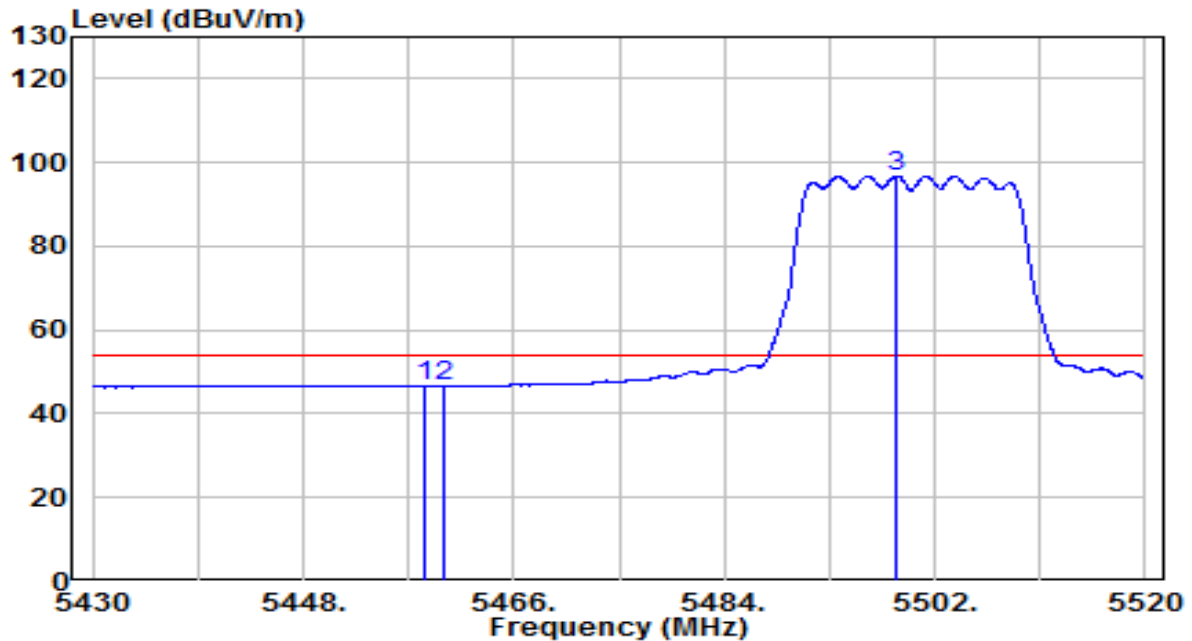


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5458.350        | 25.96          | 20.70    | 46.66                | -7.34       | 54.00          | Average           |
| 2  | 5460.015        | 25.92          | 20.70    | 46.62                | -7.38       | 54.00          | Average           |
| 3  | * 5498.715      | 76.00          | 20.77    | 96.77                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

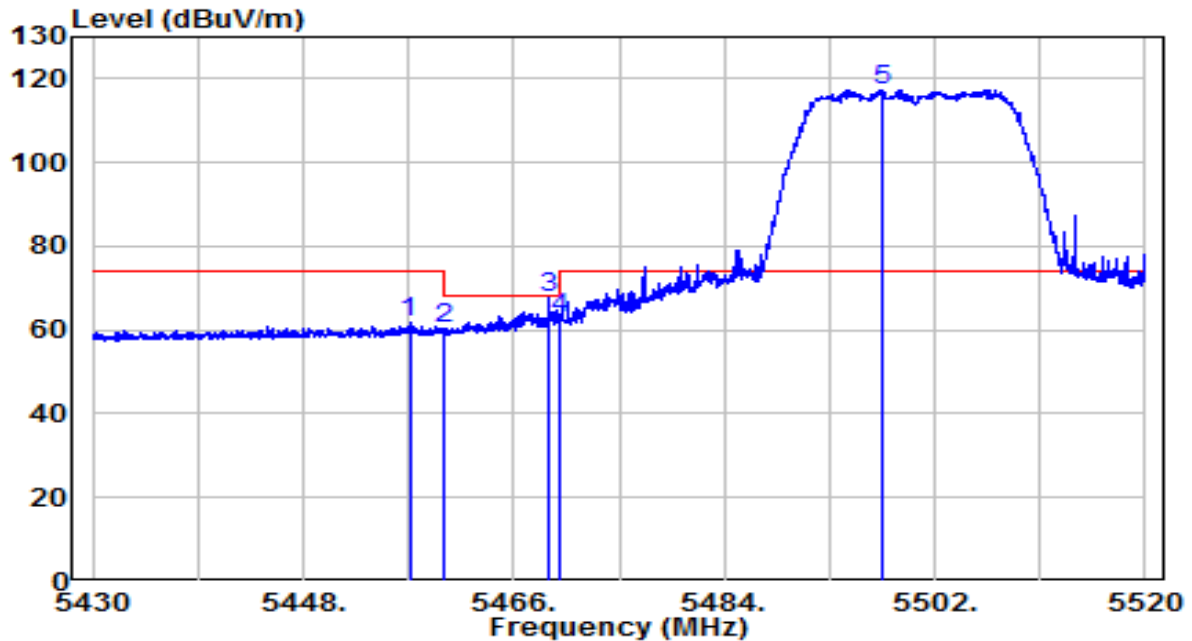


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5457.090        | 40.97          | 20.70    | 61.67                | -12.33      | 74.00          | Peak              |
| 2  | 5460.000        | 39.75          | 20.70    | 60.45                | -7.75       | 68.20          | Peak              |
| 3  | 5469.060        | 46.96          | 20.72    | 67.68                | -0.52       | 68.20          | Peak              |
| 4  | 5470.000        | 41.85          | 20.72    | 62.57                | -5.63       | 68.20          | Peak              |
| 5  | * 5497.410      | 96.70          | 20.77    | 117.47               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

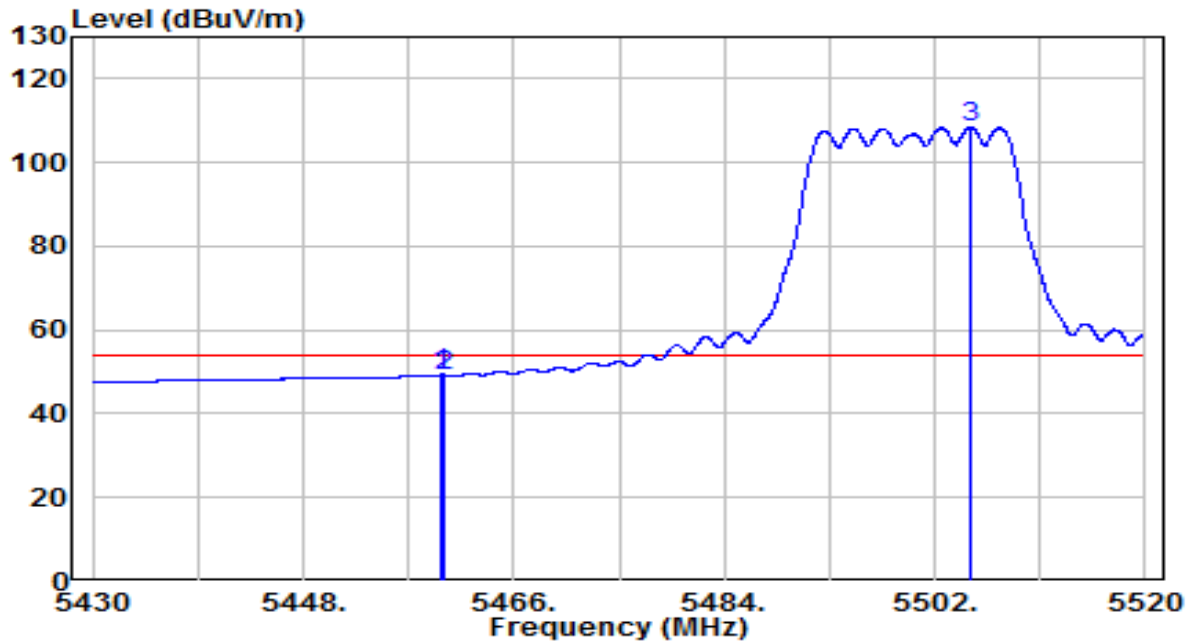


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.880        | 28.61          | 20.70    | 49.31                | -4.69       | 54.00          | Average           |
| 2  | 5460.000        | 28.55          | 20.70    | 49.25                | -4.75       | 54.00          | Average           |
| 3  | * 5505.015      | 87.68          | 20.79    | 108.47               | N/A         | N/A            | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5700MHz | Test Voltage         | 120V/60Hz  |

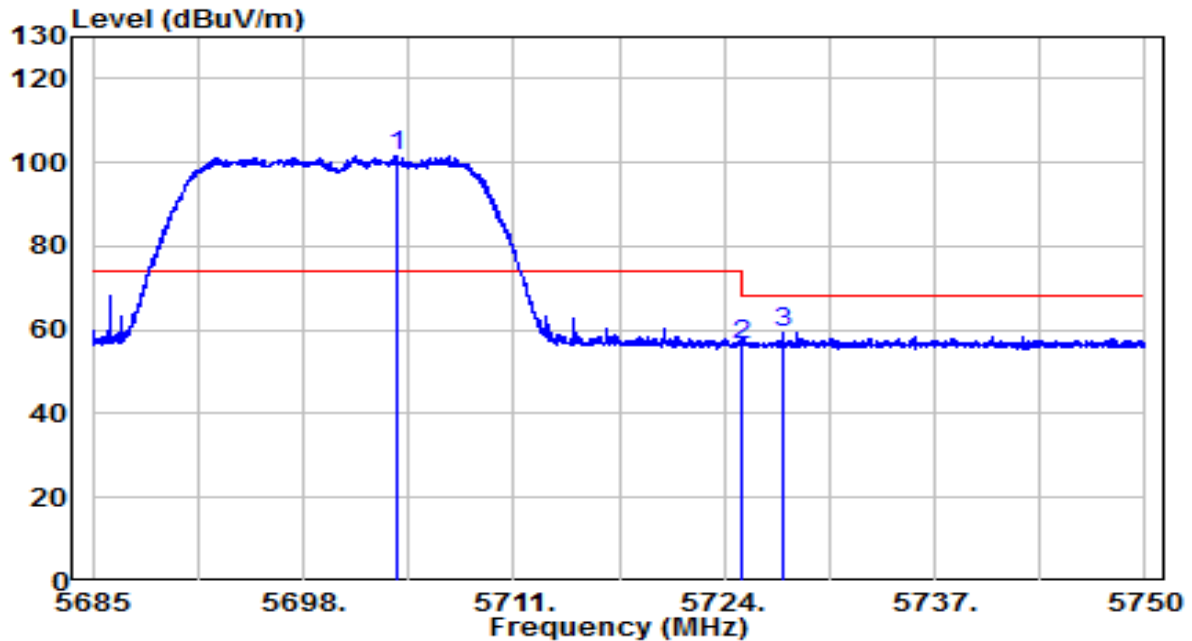


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5703.817        | 80.08          | 21.51    | 101.60               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 34.95          | 21.59    | 56.54                | -11.66      | 68.20          | Peak              |
| 3  |   | 5727.672        | 37.62          | 21.60    | 59.22                | -8.98       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5700MHz | Test Voltage         | 120V/60Hz  |

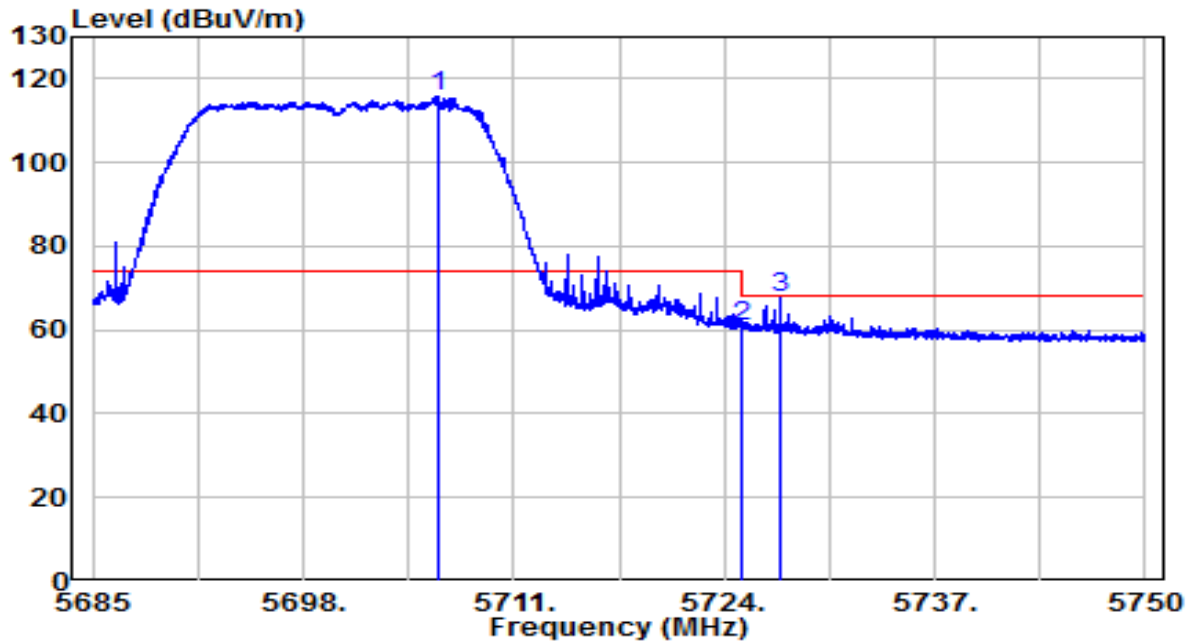


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5706.288        | 94.40          | 21.52    | 115.93               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 39.15          | 21.59    | 60.74                | -7.46       | 68.20          | Peak              |
| 3  |   | 5727.478        | 46.12          | 21.60    | 67.72                | -0.48       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5745MHz | Test Voltage         | 120V/60Hz  |

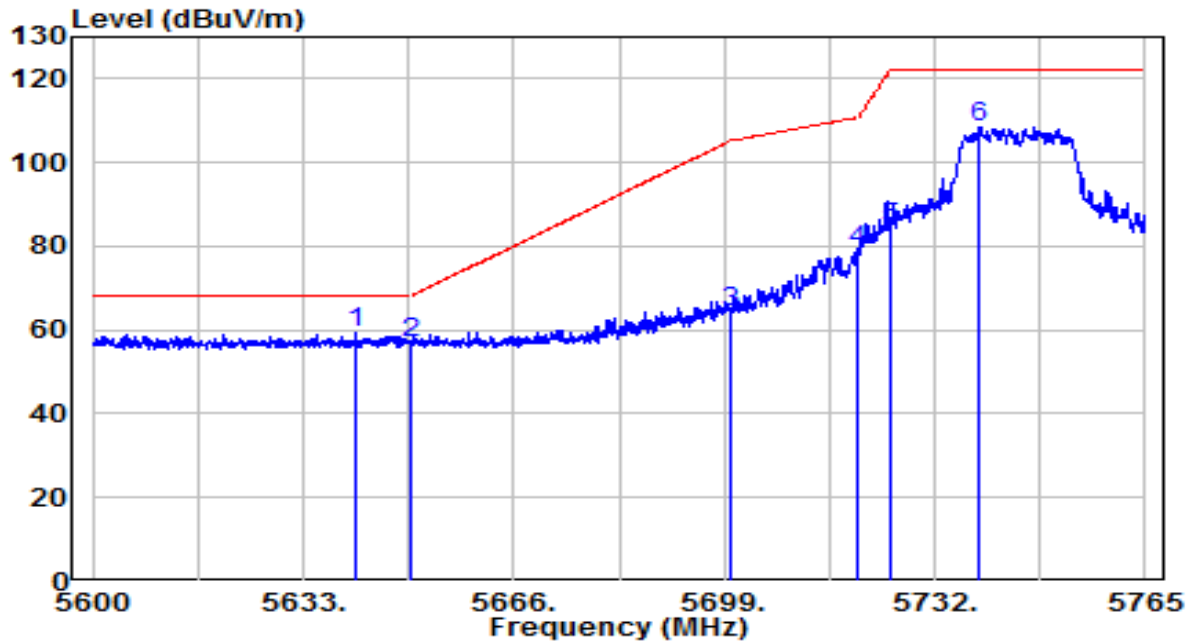


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5641.333        | 38.17          | 21.28    | 59.46                | -8.74       | 68.20          | Peak              |
| 2  |   | 5649.995        | 35.61          | 21.32    | 56.92                | -11.28      | 68.20          | Peak              |
| 3  |   | 5700.000        | 42.98          | 21.50    | 64.47                | -40.73      | 105.20         | Peak              |
| 4  |   | 5720.000        | 57.28          | 21.57    | 78.85                | -31.95      | 110.80         | Peak              |
| 5  |   | 5725.000        | 63.01          | 21.59    | 84.60                | -37.60      | 122.20         | Peak              |
| 6  |   | 5738.848        | 86.95          | 21.64    | 108.59               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5745MHz | Test Voltage         | 120V/60Hz  |

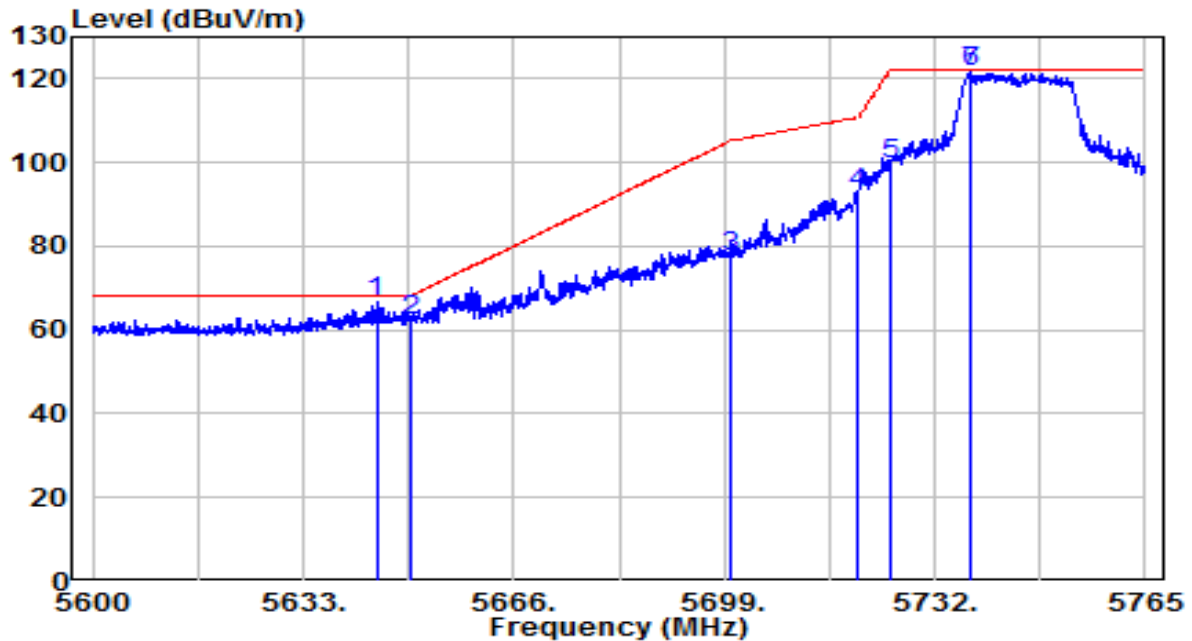


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5644.467        | 45.52          | 21.30    | 66.81                | -1.39       | 68.20          | Peak              |
| 2  | 5649.995        | 41.05          | 21.32    | 62.36                | -5.84       | 68.20          | Peak              |
| 3  | 5700.000        | 56.24          | 21.50    | 77.73                | -27.47      | 105.20         | Peak              |
| 4  | 5720.000        | 71.03          | 21.57    | 92.61                | -18.20      | 110.80         | Peak              |
| 5  | 5725.000        | 77.91          | 21.59    | 99.50                | -22.70      | 122.20         | Peak              |
| 6  | * 5737.692      | 99.78          | 21.64    | 121.42               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5825MHz | Test Voltage         | 120V/60Hz  |

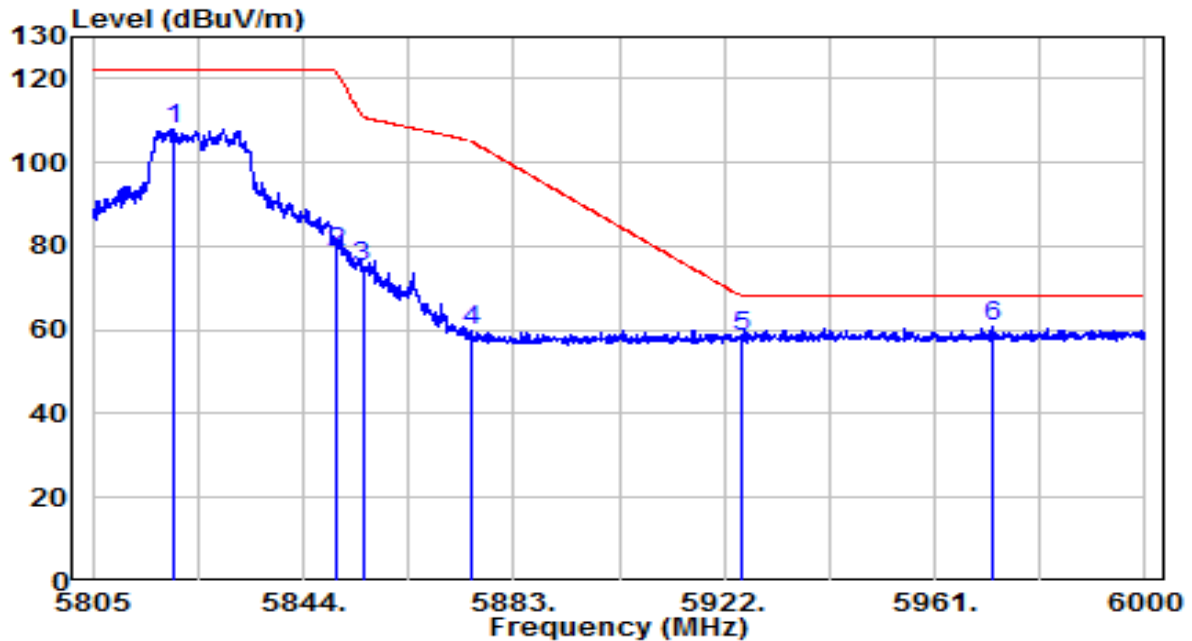


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5819.917        | 85.94          | 21.93    | 107.88               | N/A         | N/A            | Peak              |
| 2  | 5850.045        | 56.63          | 22.04    | 78.67                | -43.43      | 122.10         | Peak              |
| 3  | 5855.000        | 52.99          | 22.06    | 75.05                | -35.75      | 110.80         | Peak              |
| 4  | 5875.000        | 37.63          | 22.14    | 59.76                | -45.44      | 105.20         | Peak              |
| 5  | 5925.000        | 35.93          | 22.32    | 58.25                | -9.95       | 68.20          | Peak              |
| 6  | * 5971.530      | 38.13          | 22.49    | 60.62                | -7.58       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT20 at Channel 5825MHz | Test Voltage         | 120V/60Hz  |

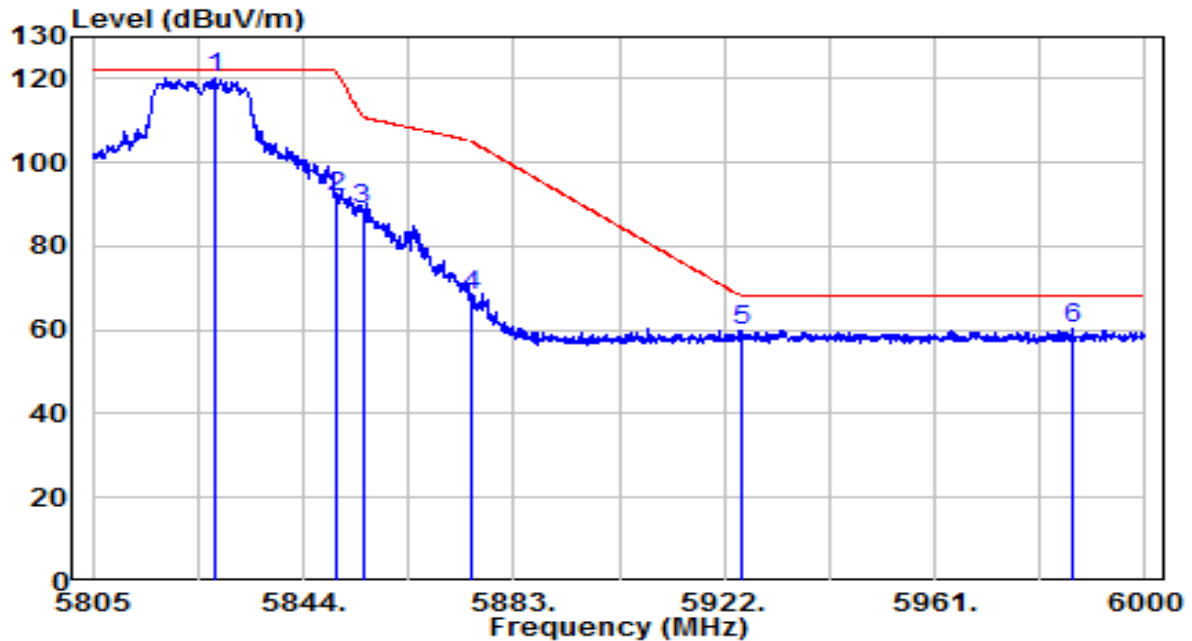


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5827.522        | 98.17          | 21.96    | 120.13               | N/A         | N/A            | Peak              |
| 2  |   | 5850.045        | 69.66          | 22.04    | 91.70                | -30.40      | 122.10         | Peak              |
| 3  |   | 5855.000        | 66.89          | 22.06    | 88.95                | -21.85      | 110.80         | Peak              |
| 4  |   | 5875.000        | 46.29          | 22.14    | 68.42                | -36.78      | 105.20         | Peak              |
| 5  |   | 5925.000        | 37.41          | 22.32    | 59.72                | -8.48       | 68.20          | Peak              |
| 6  |   | 5986.643        | 37.57          | 22.54    | 60.11                | -8.09       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5190MHz | Test Voltage         | 120V/60Hz  |

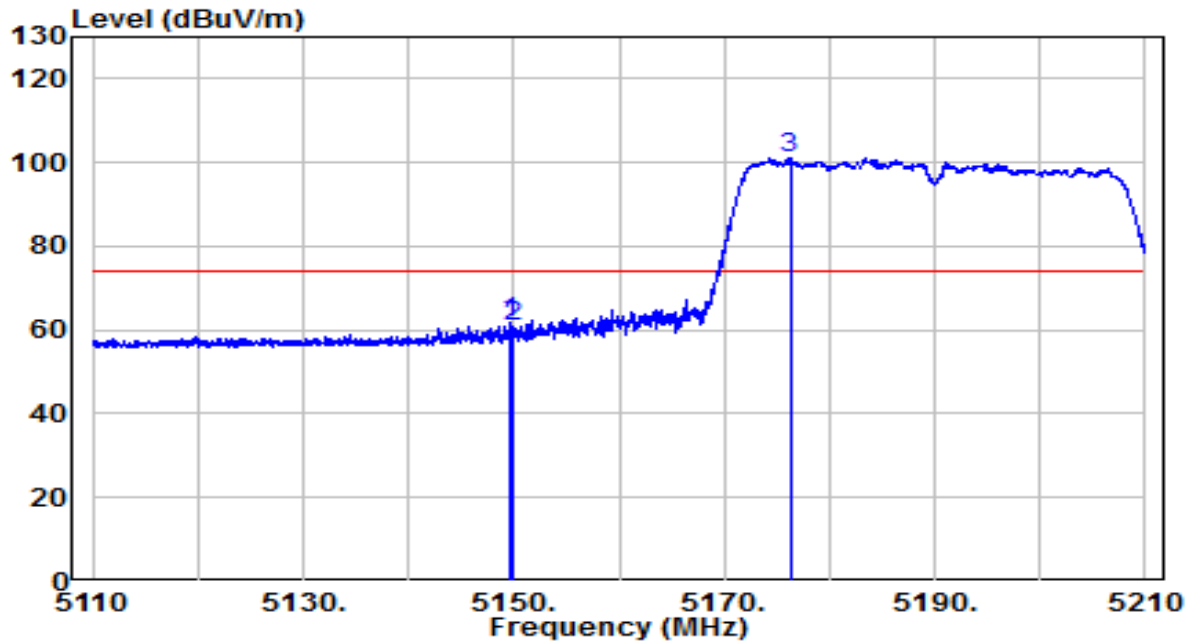


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5149.700        | 41.76          | 20.20    | 61.95                | -12.05      | 74.00          | Peak              |
| 2  | 5150.000        | 40.58          | 20.20    | 60.77                | -13.23      | 74.00          | Peak              |
| 3  | * 5176.250      | 80.98          | 20.24    | 101.22               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5190MHz | Test Voltage         | 120V/60Hz  |

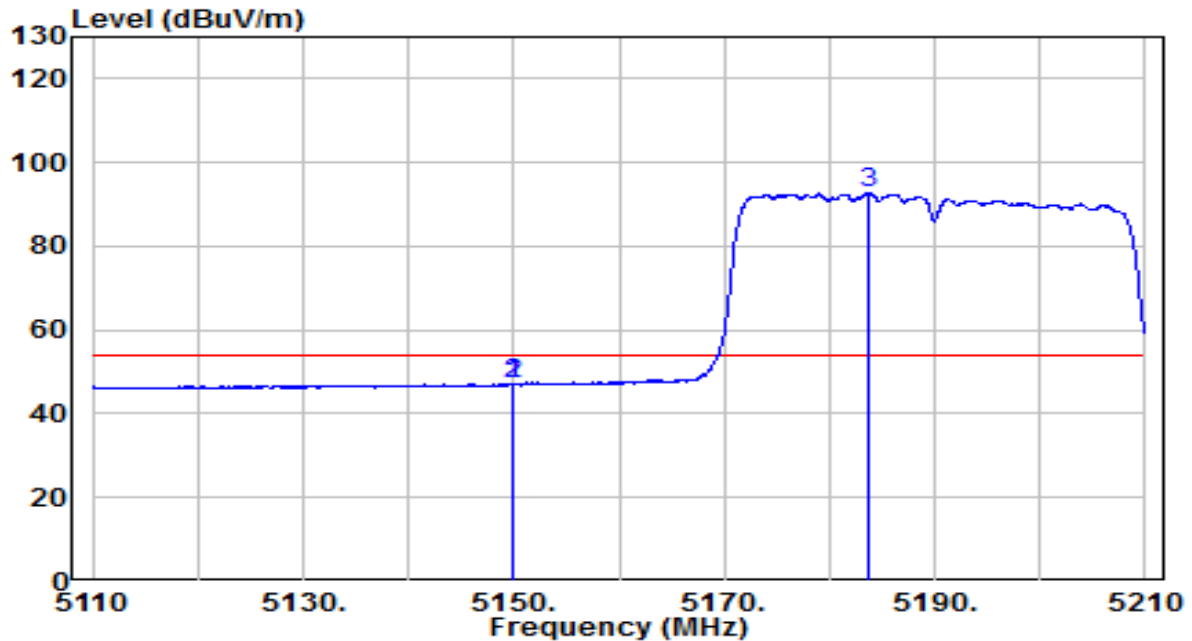


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5149.800        | 26.92          | 20.20    | 47.11                | -6.89       | 54.00          | Average           |
| 2  | 5150.000        | 26.78          | 20.20    | 46.98                | -7.02       | 54.00          | Average           |
| 3  | * 5183.700      | 72.42          | 20.25    | 92.67                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5190MHz | Test Voltage         | 120V/60Hz  |

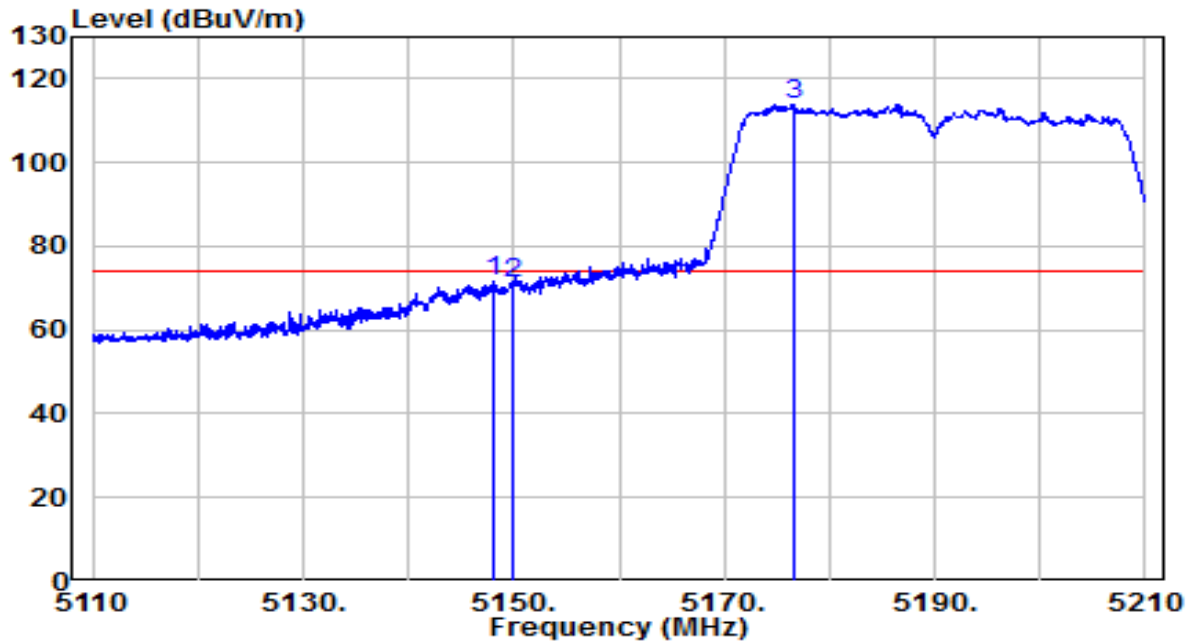


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5148.050        | 51.25          | 20.19    | 71.45                | -2.55       | 74.00          | Peak              |
| 2  | 5150.000        | 51.10          | 20.20    | 71.29                | -2.71       | 74.00          | Peak              |
| 3  | * 5176.600      | 93.65          | 20.24    | 113.89               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5190MHz | Test Voltage         | 120V/60Hz  |

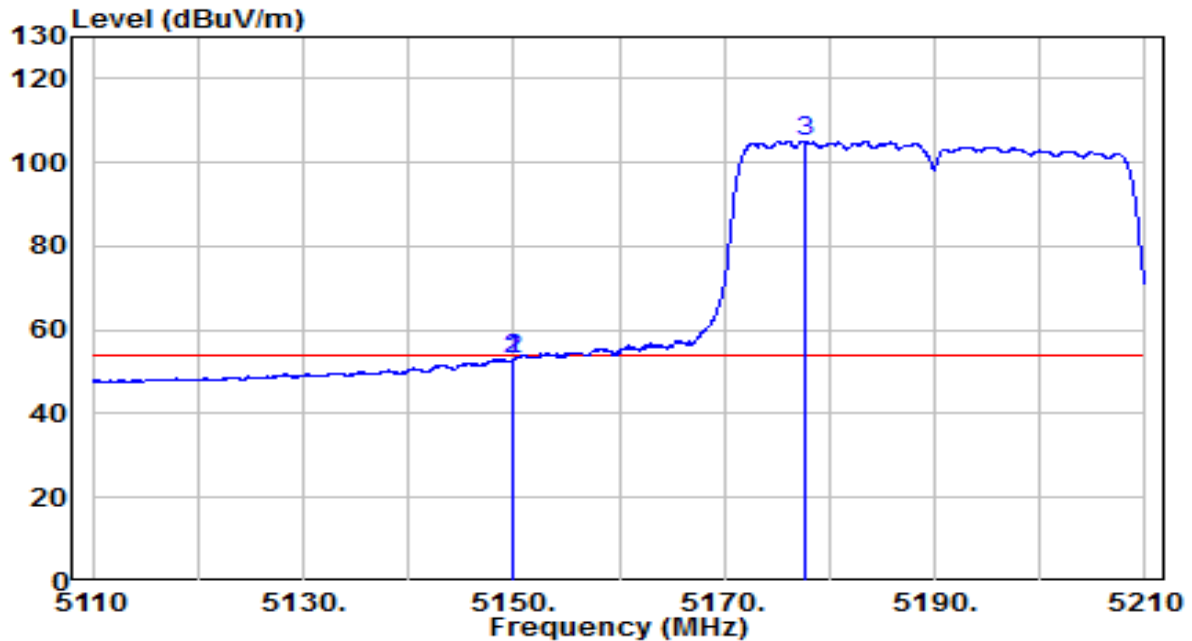


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5149.950        | 32.82          | 20.20    | 53.02                | -0.98       | 54.00          | Average           |
| 2  | 5150.000        | 32.81          | 20.20    | 53.00                | -1.00       | 54.00          | Average           |
| 3  | * 5177.600      | 84.97          | 20.24    | 105.21               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5310MHz | Test Voltage         | 120V/60Hz  |

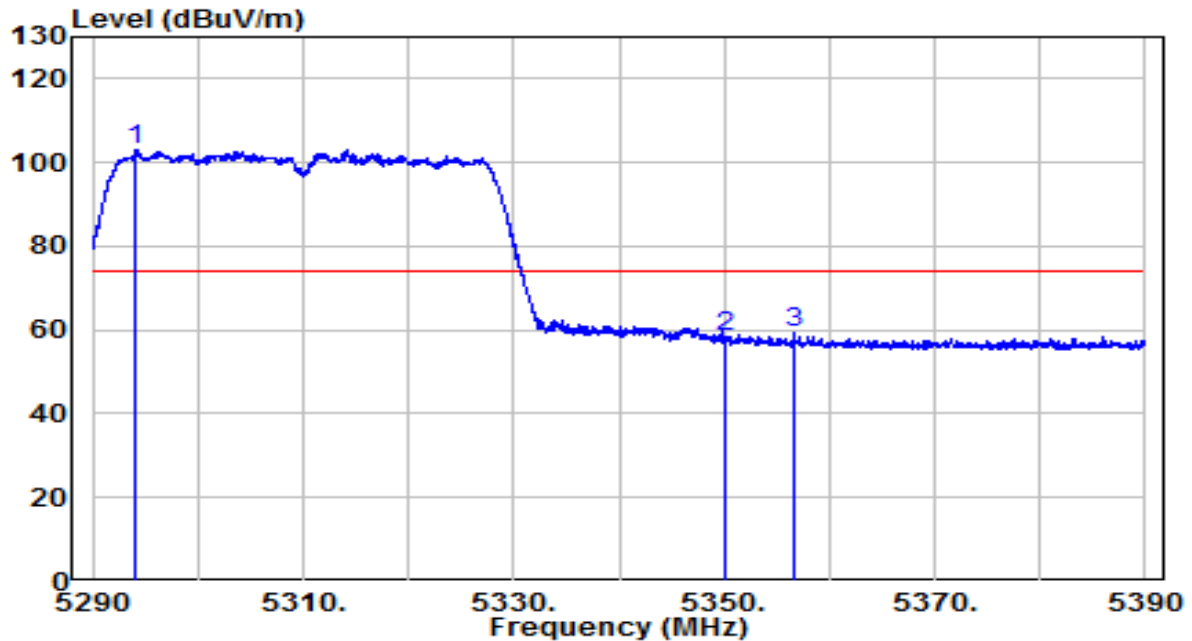


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5294.150        | 82.60          | 20.43    | 103.03               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 37.82          | 20.52    | 58.34                | -15.66      | 74.00          | Peak              |
| 3  |   | 5356.650        | 38.92          | 20.53    | 59.45                | -14.55      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5310MHz | Test Voltage         | 120V/60Hz  |

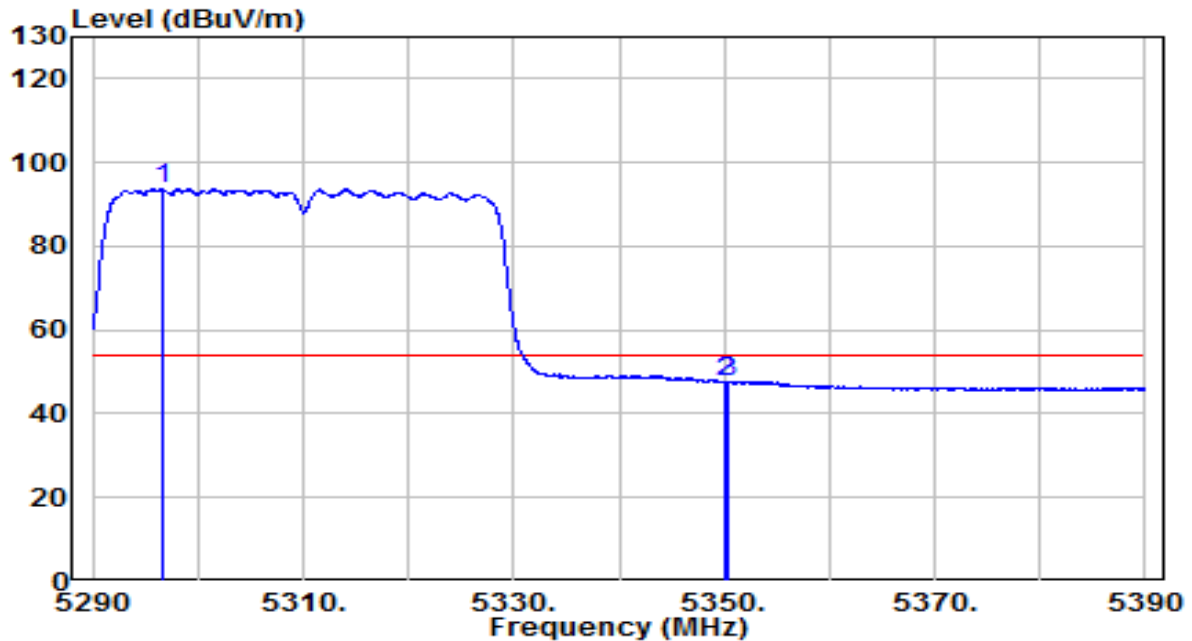


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5296.550        | 73.20          | 20.44    | 93.64                | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 27.08          | 20.52    | 47.60                | -6.40       | 54.00          | Average           |
| 3  |   | 5350.350        | 27.14          | 20.52    | 47.66                | -6.34       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5310MHz | Test Voltage         | 120V/60Hz  |

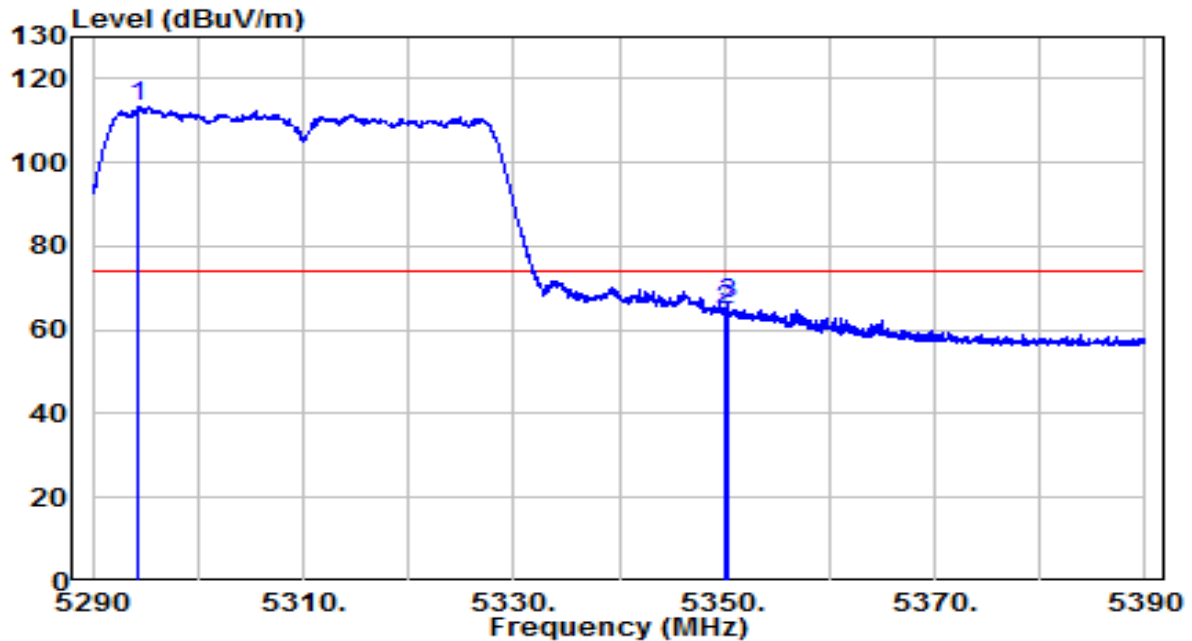


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5294.400        | 93.02          | 20.43    | 113.45               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 44.16          | 20.52    | 64.68                | -9.32       | 74.00          | Peak              |
| 3  |   | 5350.300        | 45.67          | 20.52    | 66.20                | -7.80       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5310MHz | Test Voltage         | 120V/60Hz  |

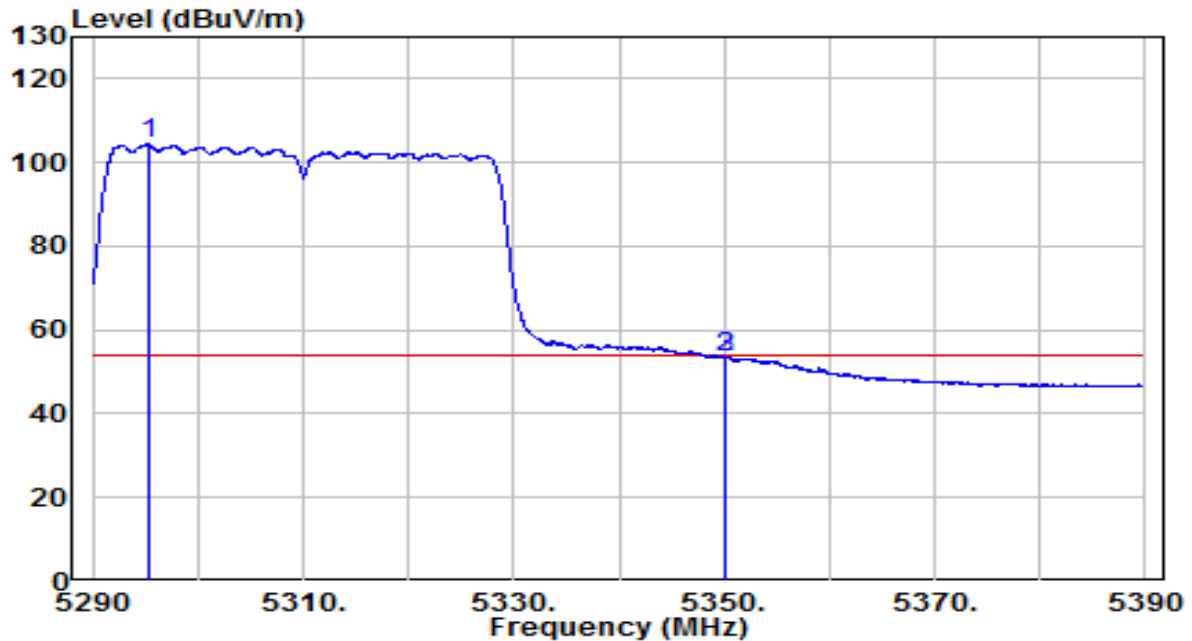


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5295.300        | 83.95          | 20.43    | 104.38               | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 33.07          | 20.52    | 53.59                | -0.41       | 54.00          | Average           |
| 3  |   | 5350.050        | 33.10          | 20.52    | 53.62                | -0.38       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5510MHz | Test Voltage         | 120V/60Hz  |

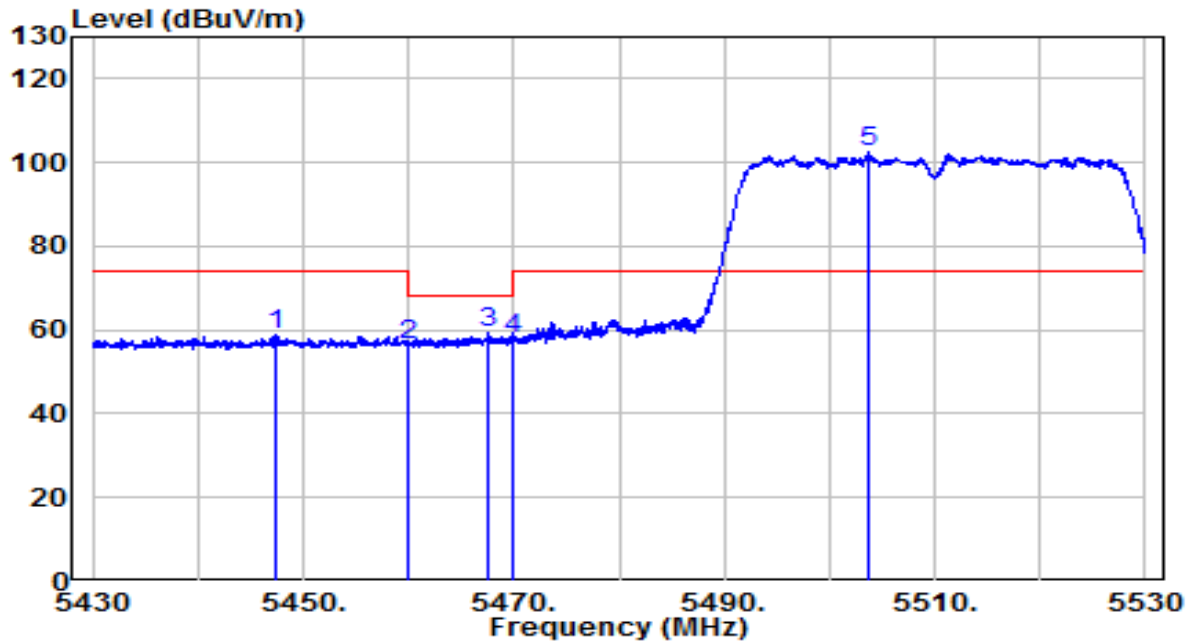


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5447.500        | 38.07          | 20.68    | 58.75                | -15.25      | 74.00          | Peak              |
| 2  | 5460.000        | 35.77          | 20.70    | 56.47                | -11.73      | 68.20          | Peak              |
| 3  | 5467.650        | 38.56          | 20.72    | 59.28                | -8.92       | 68.20          | Peak              |
| 4  | 5470.000        | 37.04          | 20.72    | 57.76                | -10.44      | 68.20          | Peak              |
| 5  | * 5503.650      | 81.59          | 20.78    | 102.37               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5510MHz | Test Voltage         | 120V/60Hz  |

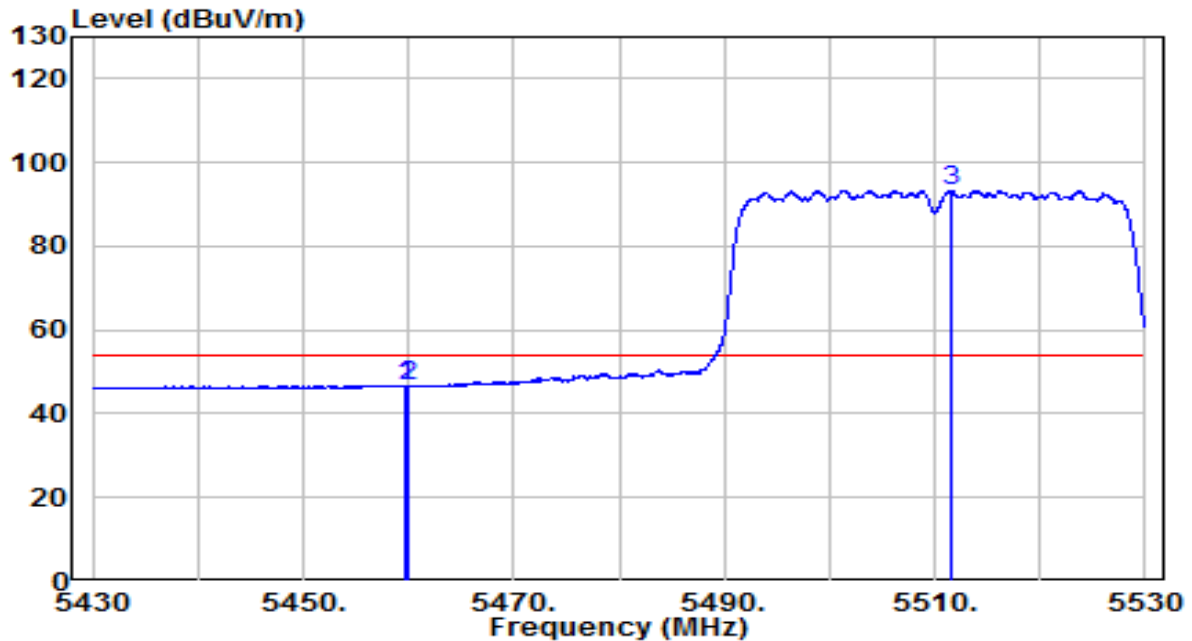


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.800        | 26.05          | 20.70    | 46.75                | -7.25       | 54.00          | Average           |
| 2  | 5460.000        | 25.86          | 20.70    | 46.56                | -7.44       | 54.00          | Average           |
| 3  | * 5511.500      | 72.45          | 20.81    | 93.26                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5510MHz | Test Voltage         | 120V/60Hz  |

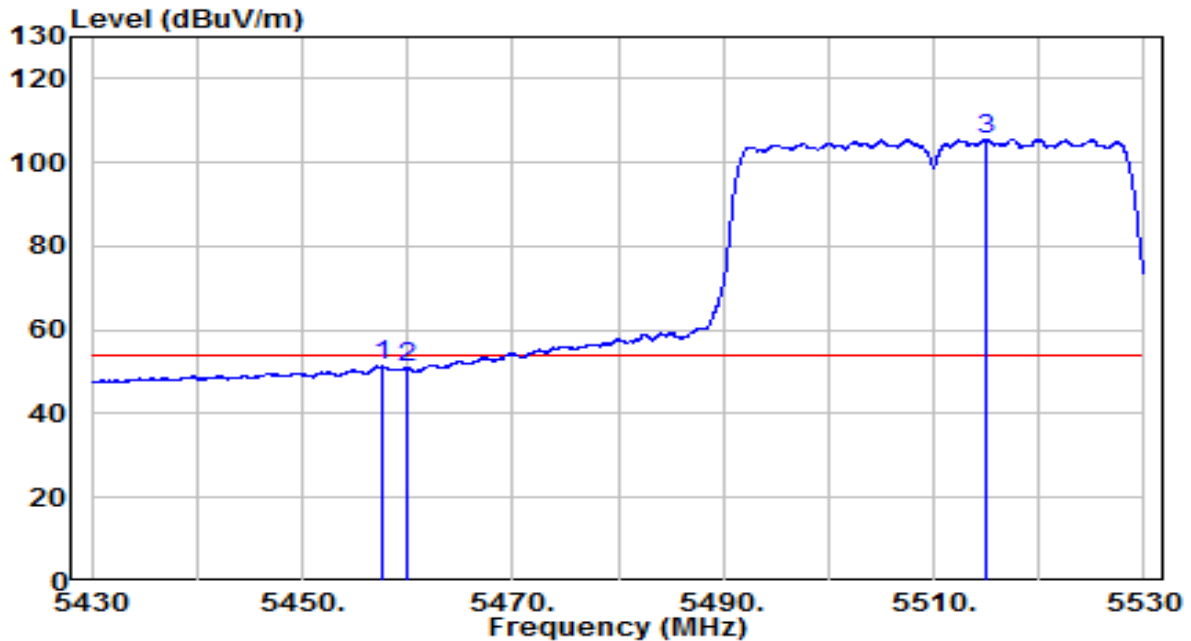


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5457.550        | 30.75          | 20.70    | 51.45                | -2.55       | 54.00          | Average           |
| 2  | 5460.000        | 30.30          | 20.70    | 51.00                | -3.00       | 54.00          | Average           |
| 3  | * 5514.950      | 84.75          | 20.82    | 105.57               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5510MHz | Test Voltage         | 120V/60Hz  |

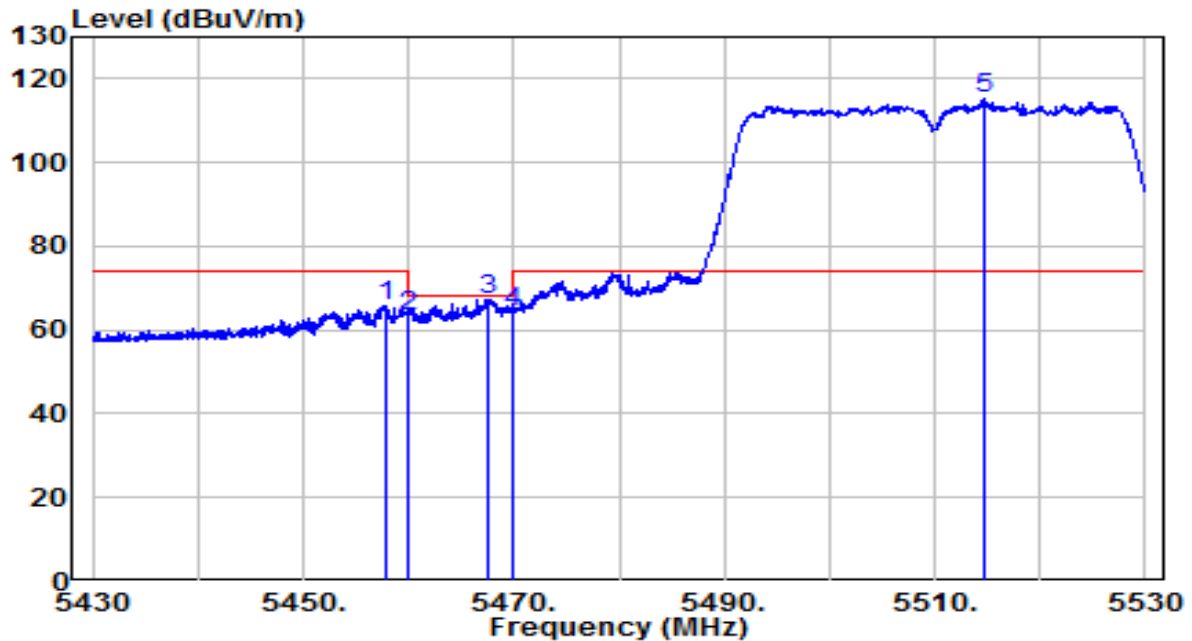


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5457.750        | 44.99          | 20.70    | 65.69                | -8.31       | 74.00          | Peak              |
| 2  | 5460.000        | 42.81          | 20.70    | 63.51                | -4.69       | 68.20          | Peak              |
| 3  | 5467.650        | 46.69          | 20.72    | 67.40                | -0.80       | 68.20          | Peak              |
| 4  | 5470.000        | 43.77          | 20.72    | 64.49                | -3.71       | 68.20          | Peak              |
| 5  | * 5514.650      | 94.25          | 20.82    | 115.07               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5670MHz | Test Voltage         | 120V/60Hz  |

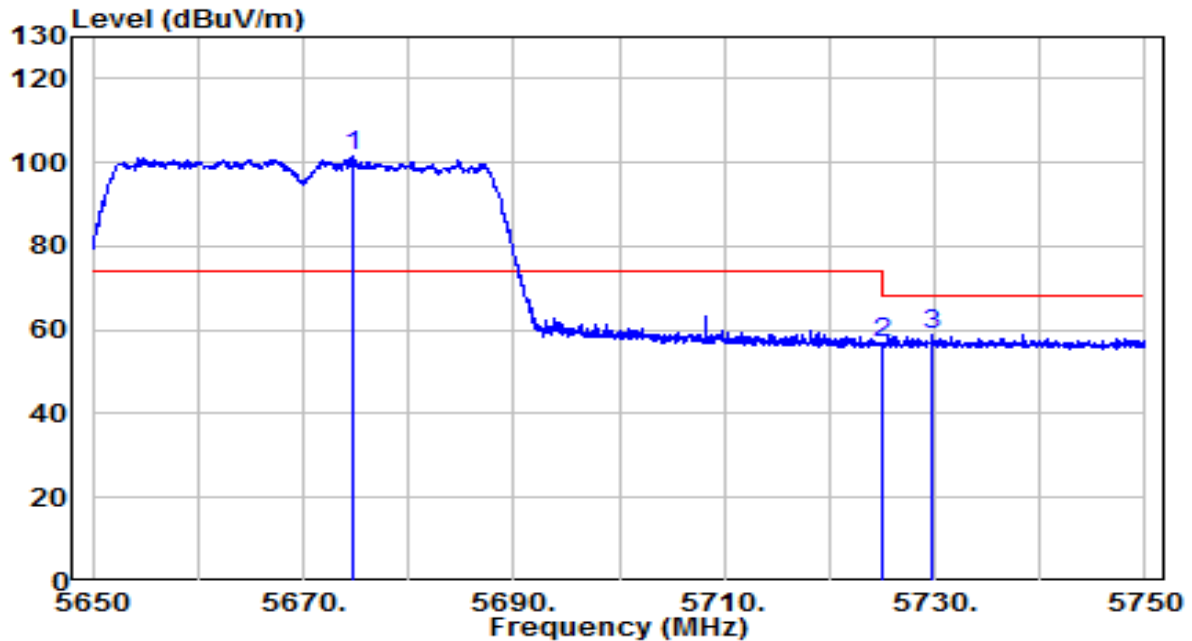


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5674.700        | 80.05          | 21.41    | 101.46               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 35.15          | 21.59    | 56.74                | -11.46      | 68.20          | Peak              |
| 3  |   | 5729.850        | 37.16          | 21.61    | 58.76                | -9.44       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5670MHz | Test Voltage         | 120V/60Hz  |

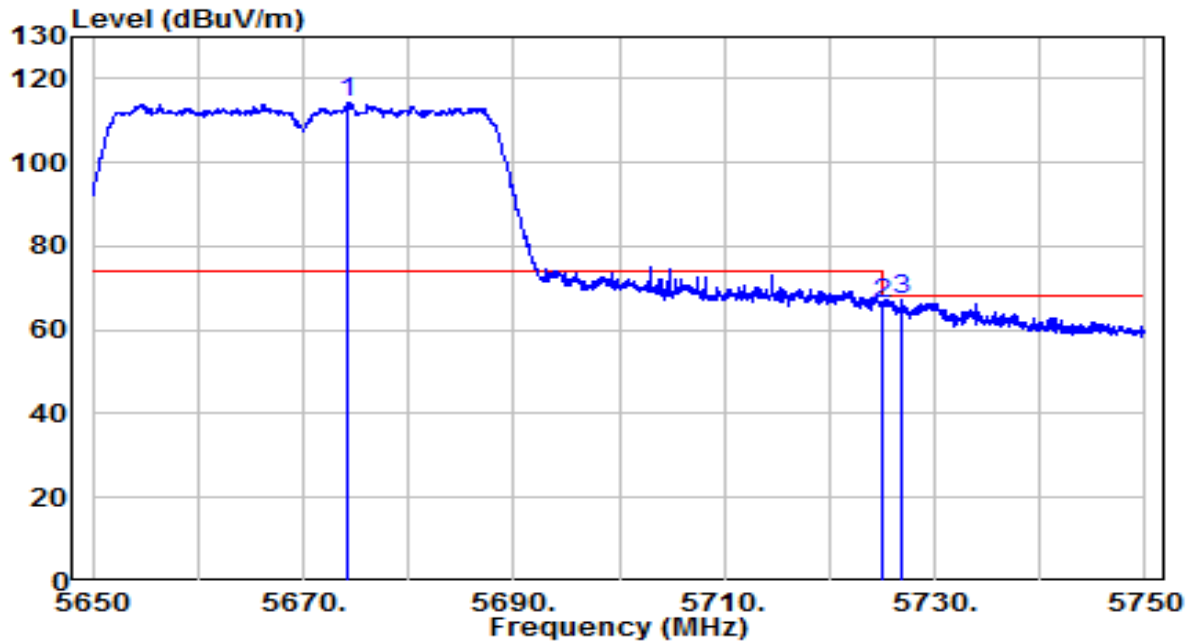


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5674.300        | 92.75          | 21.40    | 114.15               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 44.67          | 21.59    | 66.26                | -1.94       | 68.20          | Peak              |
| 3  |   | 5726.900        | 45.57          | 21.60    | 67.17                | -1.03       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5755MHz | Test Voltage         | 120V/60Hz  |

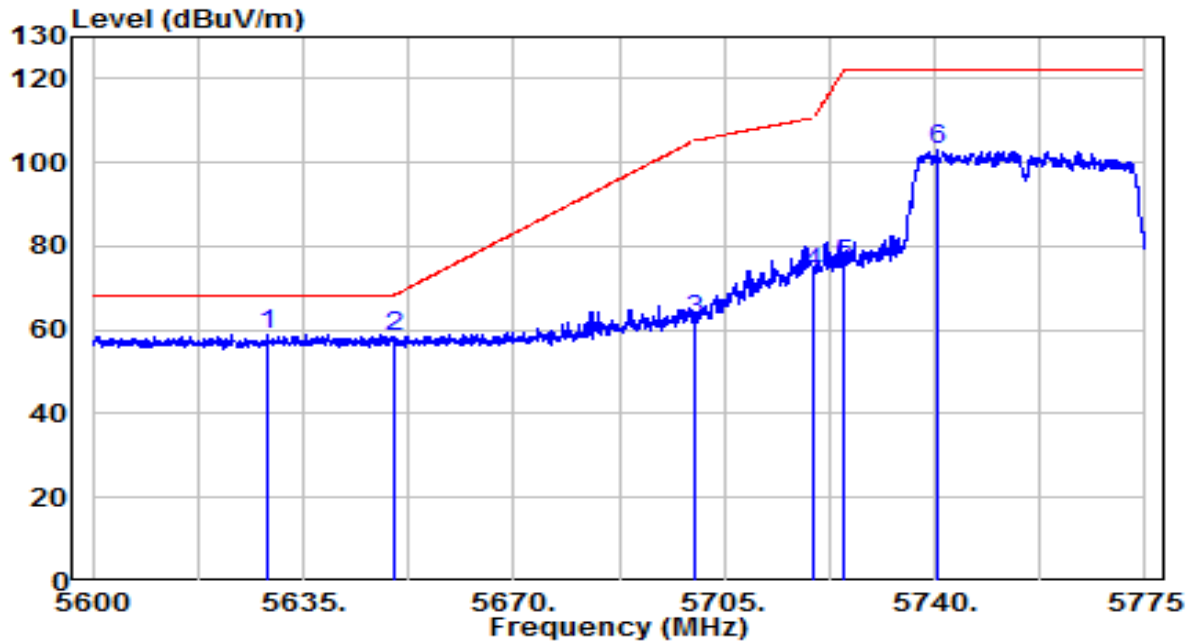


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5628.962        | 37.76          | 21.24    | 59.00                | -9.20       | 68.20          | Peak              |
| 2  |   | 5649.962        | 37.01          | 21.32    | 58.33                | -9.87       | 68.20          | Peak              |
| 3  |   | 5700.000        | 40.67          | 21.50    | 62.17                | -43.03      | 105.20         | Peak              |
| 4  |   | 5720.000        | 52.03          | 21.57    | 73.60                | -37.20      | 110.80         | Peak              |
| 5  |   | 5725.000        | 53.87          | 21.59    | 75.46                | -46.74      | 122.20         | Peak              |
| 6  |   | 5740.263        | 81.18          | 21.64    | 102.82               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5755MHz | Test Voltage         | 120V/60Hz  |

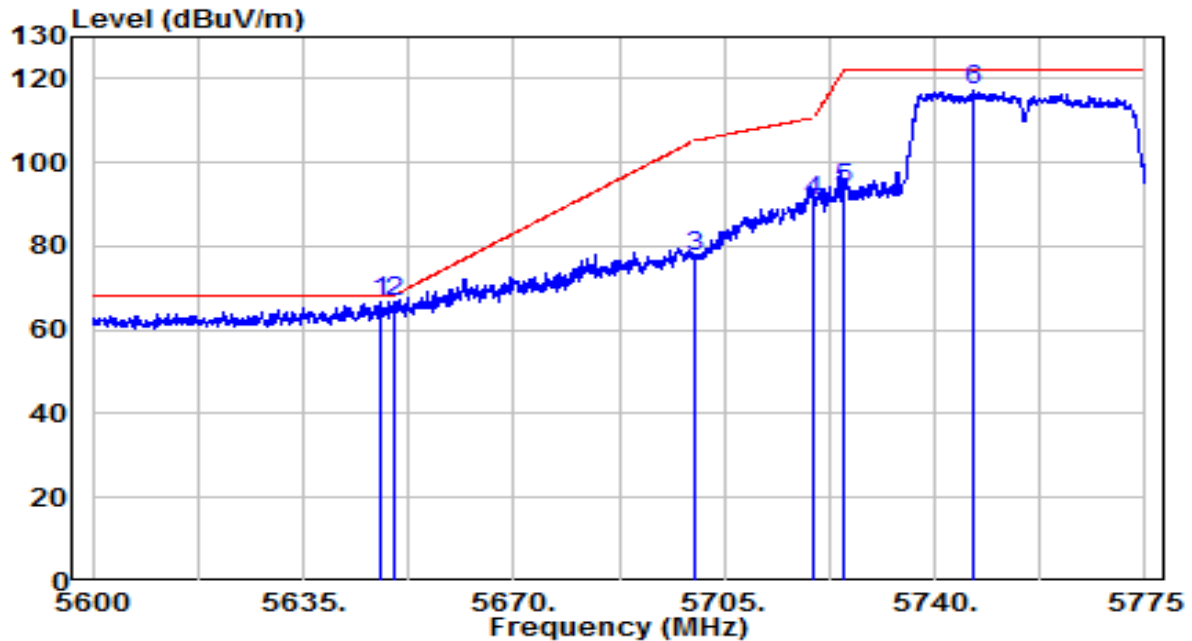


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5647.688        | 45.56          | 21.31    | 66.87                | -1.33       | 68.20          | Peak              |
| 2  |   | 5649.962        | 45.50          | 21.32    | 66.82                | -1.38       | 68.20          | Peak              |
| 3  |   | 5700.000        | 55.81          | 21.50    | 77.31                | -27.89      | 105.20         | Peak              |
| 4  |   | 5720.000        | 69.35          | 21.57    | 90.92                | -19.88      | 110.80         | Peak              |
| 5  |   | 5725.000        | 72.30          | 21.59    | 93.89                | -28.31      | 122.20         | Peak              |
| 6  |   | 5746.563        | 95.39          | 21.67    | 117.06               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5795MHz | Test Voltage         | 120V/60Hz  |

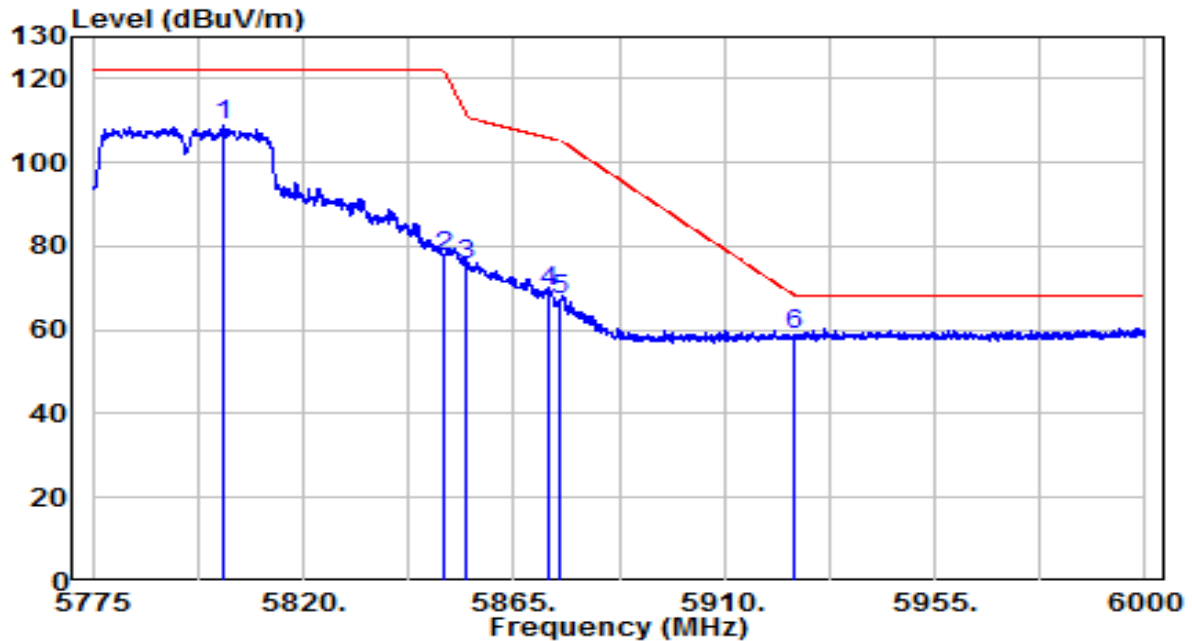


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5802.788        | 86.85          | 21.87    | 108.72               | N/A         | N/A            | Peak              |
| 2  | 5850.000        | 55.24          | 22.04    | 77.29                | -44.91      | 122.20         | Peak              |
| 3  | 5855.000        | 53.71          | 22.06    | 75.77                | -35.03      | 110.80         | Peak              |
| 4  | 5872.763        | 47.24          | 22.13    | 69.37                | -36.45      | 105.83         | Peak              |
| 5  | 5875.000        | 45.10          | 22.14    | 67.23                | -37.97      | 105.20         | Peak              |
| 6  | * 5925.000      | 36.39          | 22.32    | 58.71                | -9.49       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT40 at Channel 5795MHz | Test Voltage         | 120V/60Hz  |

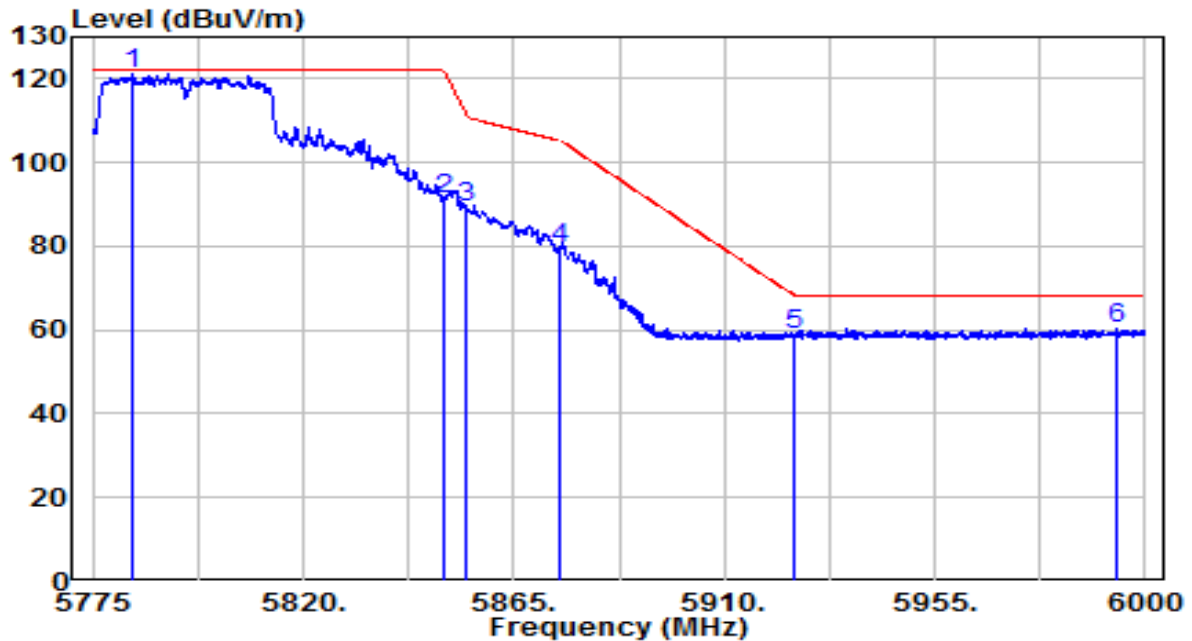


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5783.550        | 99.37          | 21.80    | 121.17               | N/A         | N/A            | Peak              |
| 2  |   | 5850.000        | 69.15          | 22.04    | 91.19                | -31.01      | 122.20         | Peak              |
| 3  |   | 5855.000        | 67.28          | 22.06    | 89.35                | -21.45      | 110.80         | Peak              |
| 4  |   | 5875.000        | 57.52          | 22.14    | 79.66                | -25.54      | 105.20         | Peak              |
| 5  |   | 5925.000        | 36.70          | 22.32    | 59.02                | -9.18       | 68.20          | Peak              |
| 6  |   | 5994.038        | 38.00          | 22.57    | 60.57                | -7.63       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5210MHz | Test Voltage         | 120V/60Hz  |

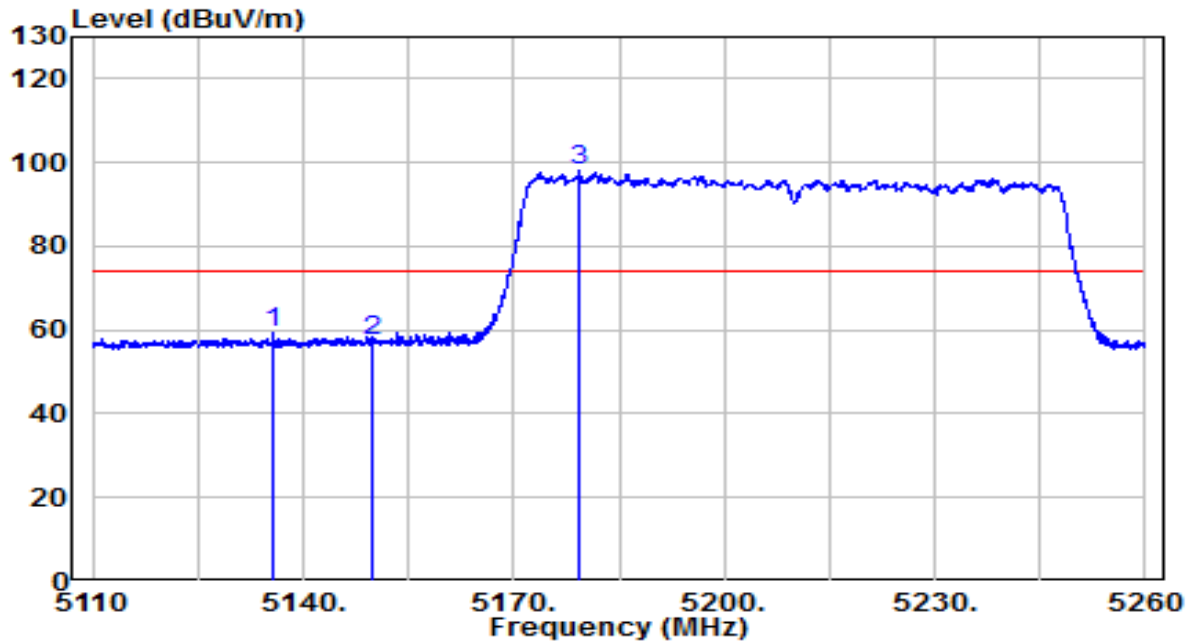


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5135.800        | 39.19          | 20.17    | 59.36                | -14.64      | 74.00          | Peak              |
| 2  | 5150.000        | 36.98          | 20.20    | 57.17                | -16.83      | 74.00          | Peak              |
| 3  | * 5179.375      | 77.97          | 20.24    | 98.22                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5210MHz | Test Voltage         | 120V/60Hz  |

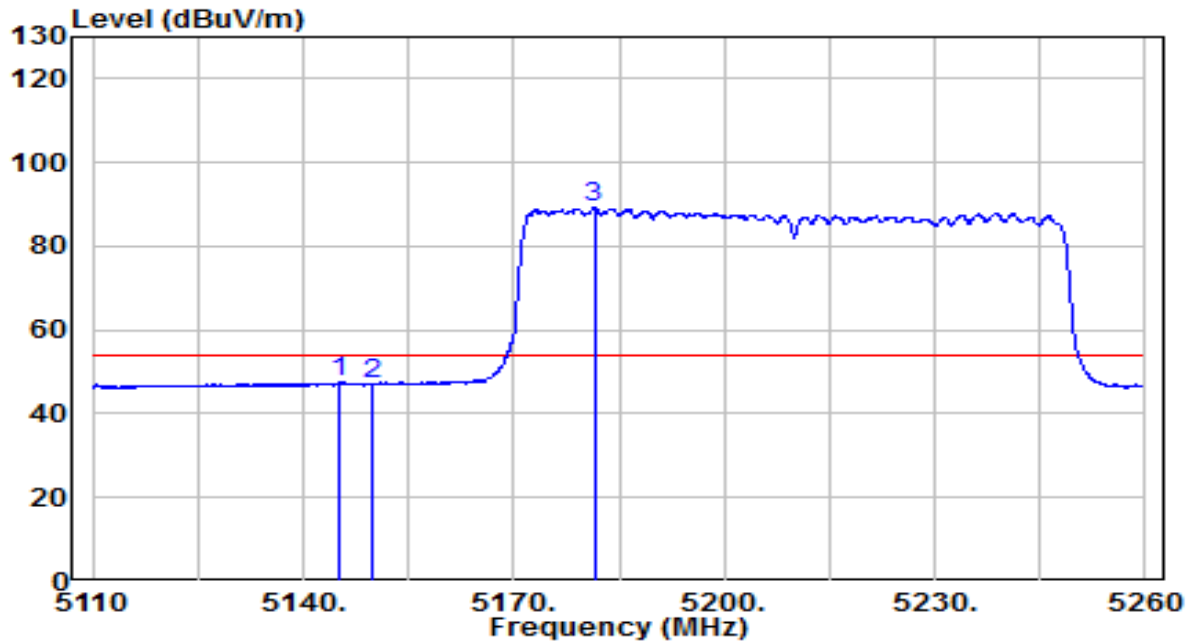


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5145.175        | 27.22          | 20.19    | 47.40                | -6.60       | 54.00          | Average           |
| 2  | 5150.000        | 27.13          | 20.20    | 47.33                | -6.67       | 54.00          | Average           |
| 3  | * 5181.475      | 69.08          | 20.25    | 89.32                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5210MHz | Test Voltage         | 120V/60Hz  |

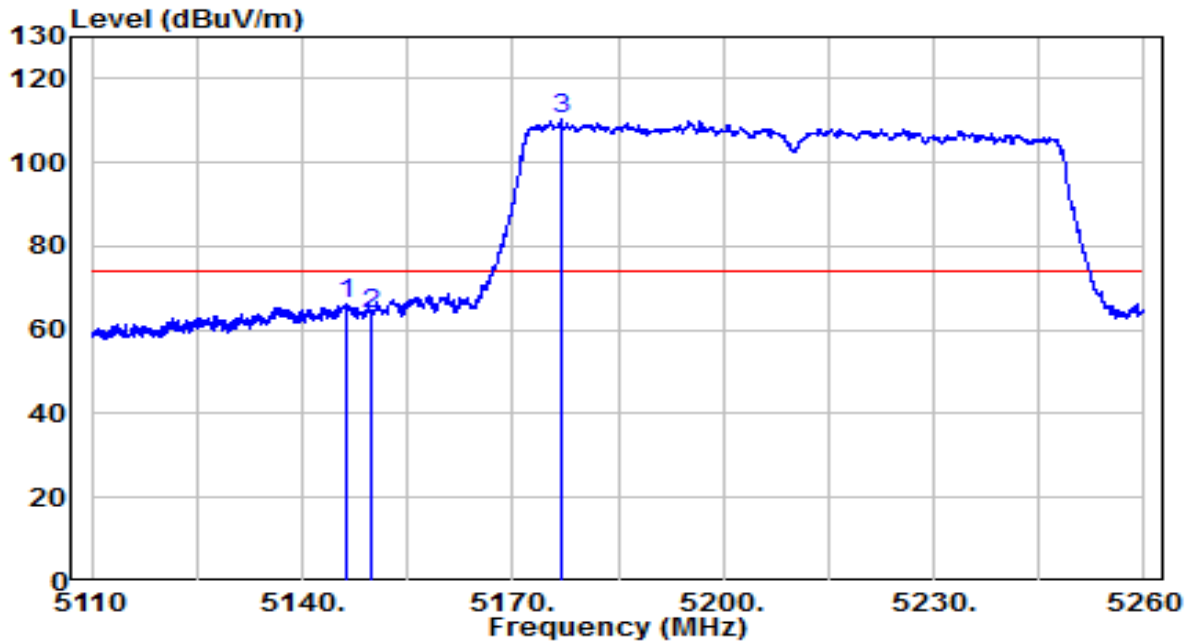


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5146.300        | 46.24          | 20.19    | 66.43                | -7.57       | 74.00          | Peak              |
| 2  | 5150.000        | 43.67          | 20.20    | 63.87                | -10.13      | 74.00          | Peak              |
| 3  | * 5176.825      | 90.01          | 20.24    | 110.25               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5210MHz | Test Voltage         | 120V/60Hz  |

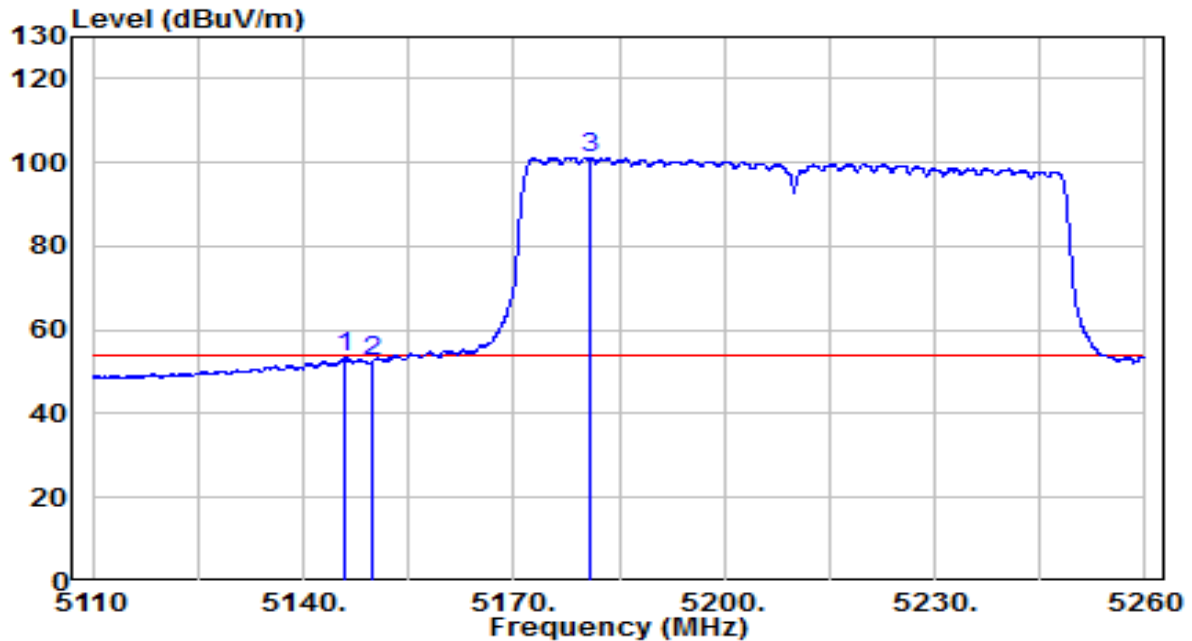


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5145.925        | 33.31          | 20.19    | 53.50                | -0.50       | 54.00          | Average           |
| 2  | 5150.000        | 32.43          | 20.20    | 52.63                | -1.37       | 54.00          | Average           |
| 3  | * 5181.025      | 80.99          | 20.25    | 101.24               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5290MHz | Test Voltage         | 120V/60Hz  |

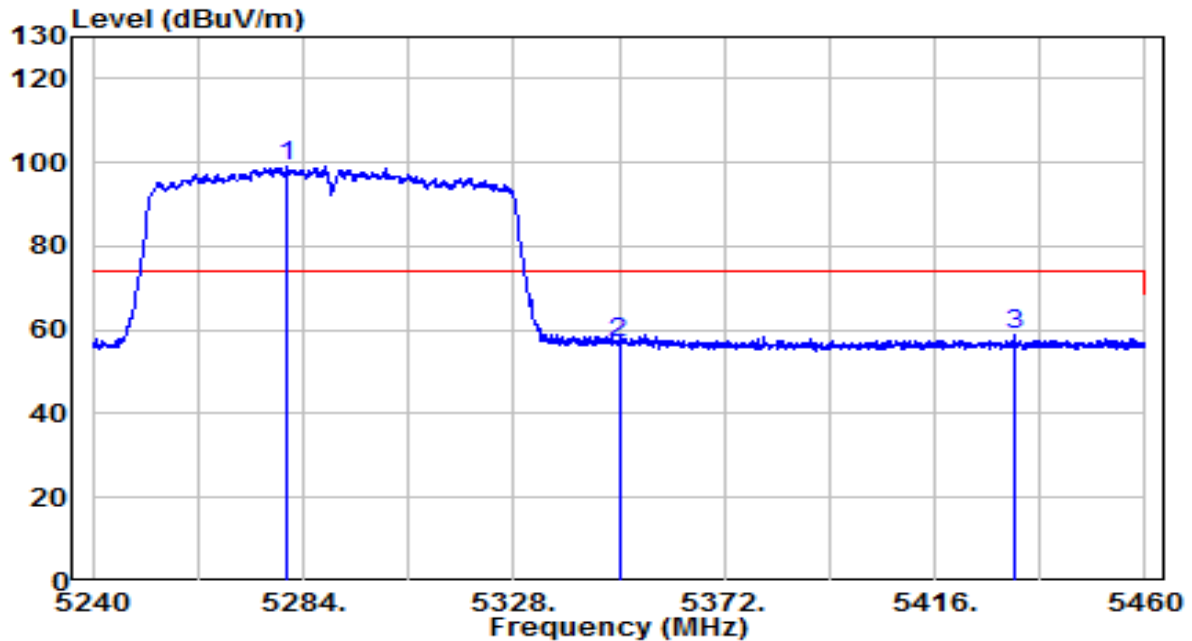


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5280.480        | 78.71          | 20.41    | 99.12                | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 36.27          | 20.52    | 56.80                | -17.20      | 74.00          | Peak              |
| 3  |   | 5432.500        | 38.03          | 20.66    | 58.68                | -15.32      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5290MHz | Test Voltage         | 120V/60Hz  |

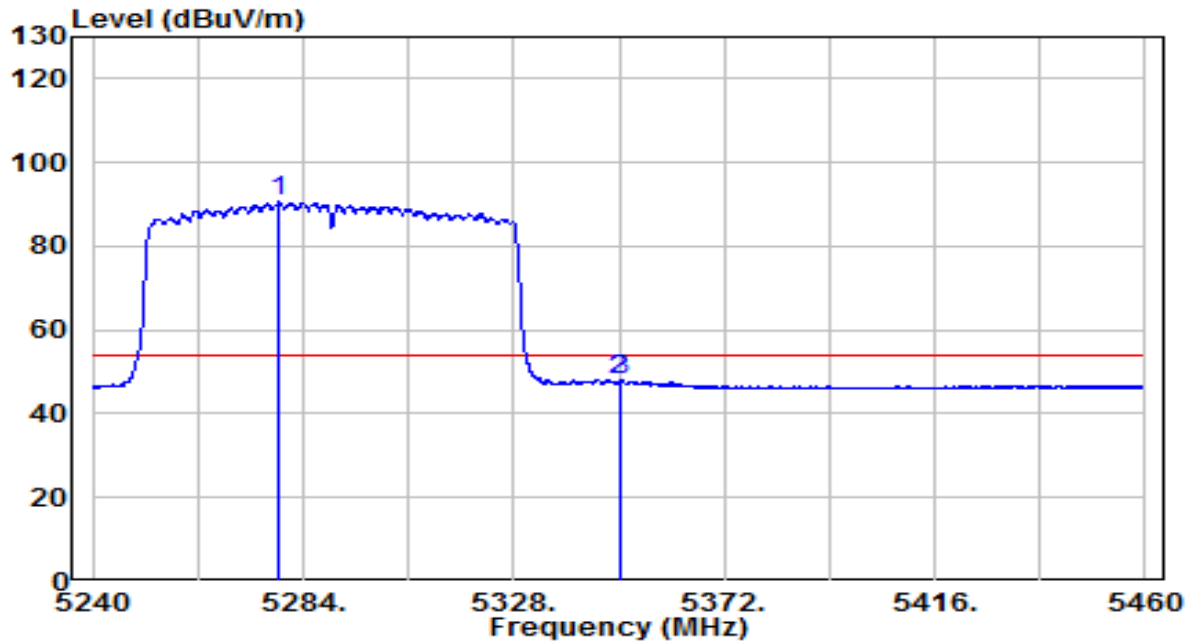


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5278.830        | 70.21          | 20.41    | 90.62                | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 27.62          | 20.52    | 48.15                | -5.85       | 54.00          | Average           |
| 3  |   | 5350.220        | 27.68          | 20.52    | 48.20                | -5.80       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5290MHz | Test Voltage         | 120V/60Hz  |

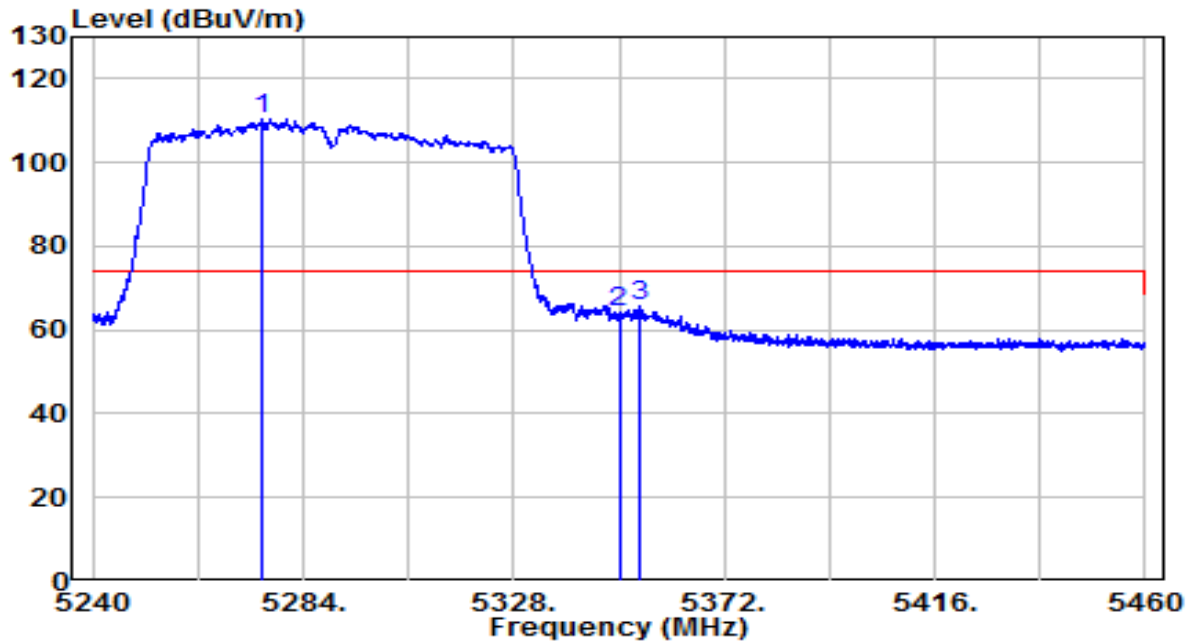


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5275.310        | 89.92          | 20.40    | 110.33               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 43.51          | 20.52    | 64.03                | -9.97       | 74.00          | Peak              |
| 3  |   | 5354.400        | 45.04          | 20.53    | 65.57                | -8.43       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5290MHz | Test Voltage         | 120V/60Hz  |

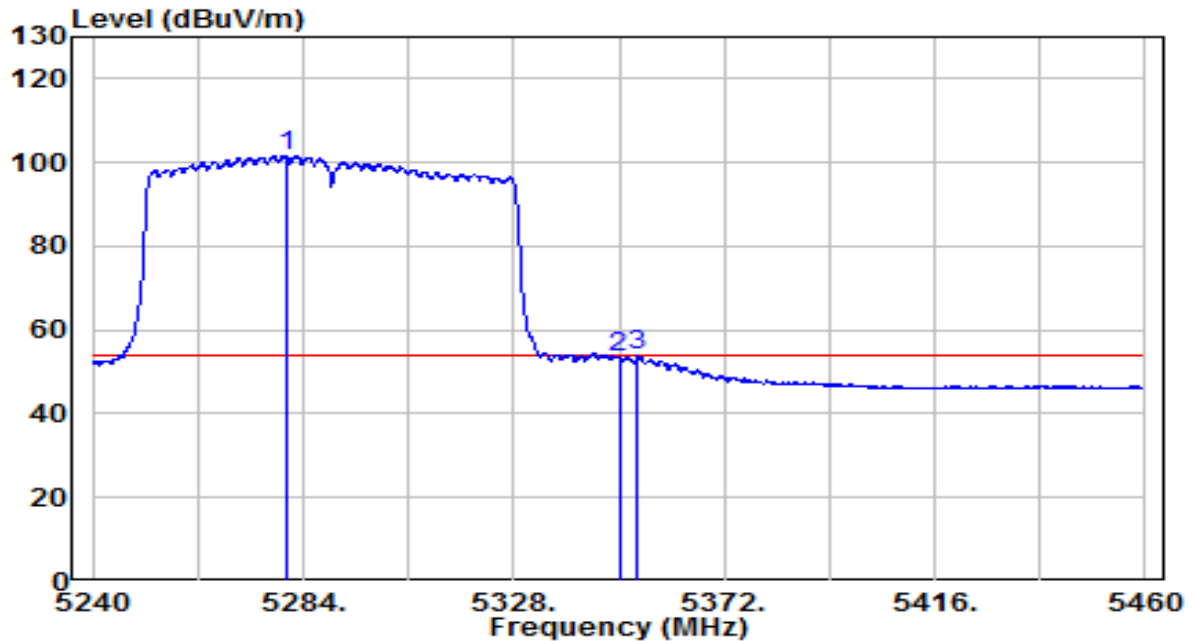


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5280.480        | 81.14          | 20.41    | 101.55               | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 32.95          | 20.52    | 53.47                | -0.53       | 54.00          | Average           |
| 3  |   | 5353.960        | 33.29          | 20.53    | 53.82                | -0.18       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5530MHz | Test Voltage         | 120V/60Hz  |

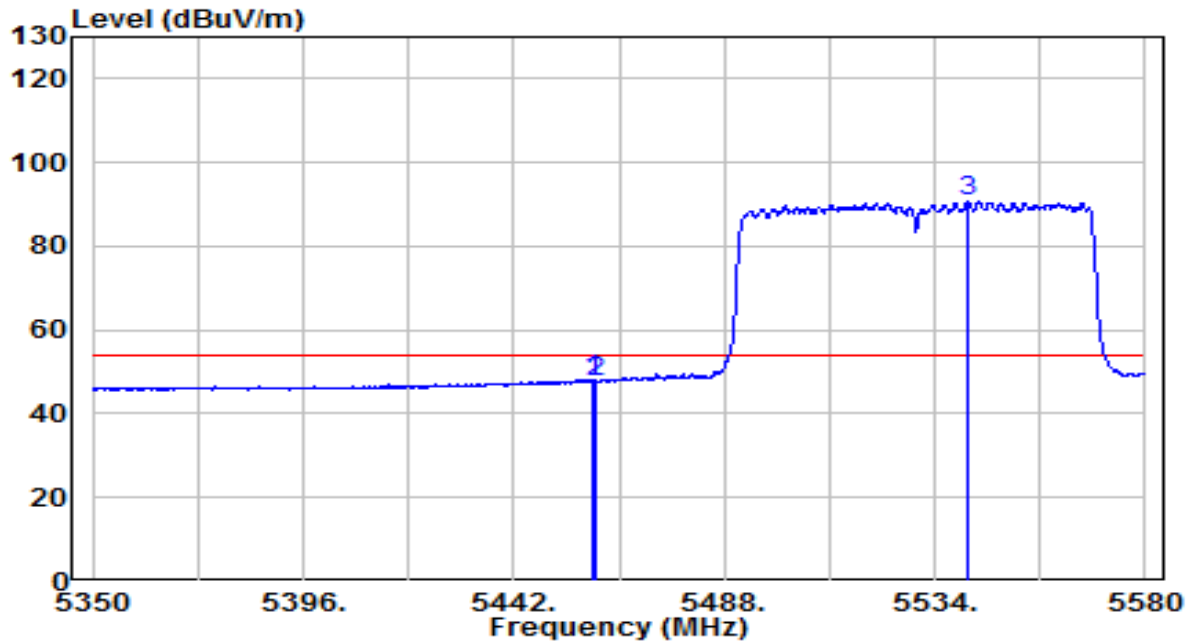


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.135        | 27.49          | 20.70    | 48.20                | -5.80       | 54.00          | Average           |
| 2  | 5460.055        | 26.88          | 20.70    | 47.58                | -6.42       | 54.00          | Average           |
| 3  | * 5541.130      | 69.77          | 20.92    | 90.69                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5530MHz | Test Voltage         | 120V/60Hz  |

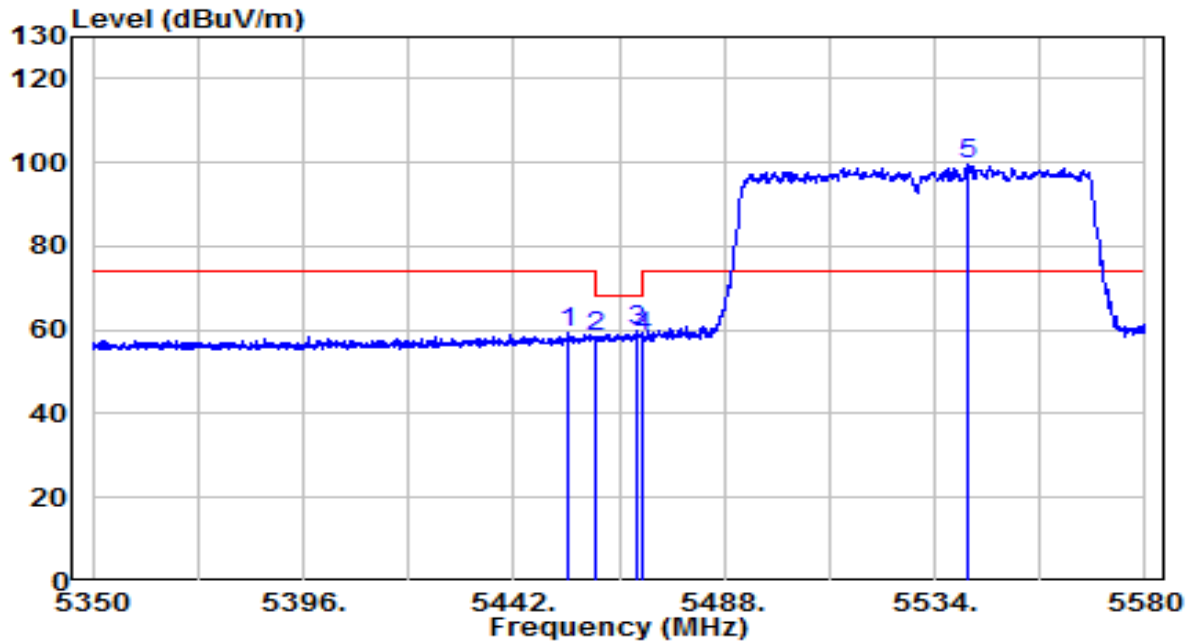


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5454.075        | 38.84          | 20.69    | 59.53                | -14.47      | 74.00          | Peak              |
| 2  | 5460.000        | 37.83          | 20.70    | 58.54                | -9.66       | 68.20          | Peak              |
| 3  | 5469.140        | 39.09          | 20.72    | 59.81                | -8.39       | 68.20          | Peak              |
| 4  | 5470.000        | 37.60          | 20.72    | 58.32                | -9.88       | 68.20          | Peak              |
| 5  | * 5541.245      | 78.75          | 20.92    | 99.67                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5530MHz | Test Voltage         | 120V/60Hz  |

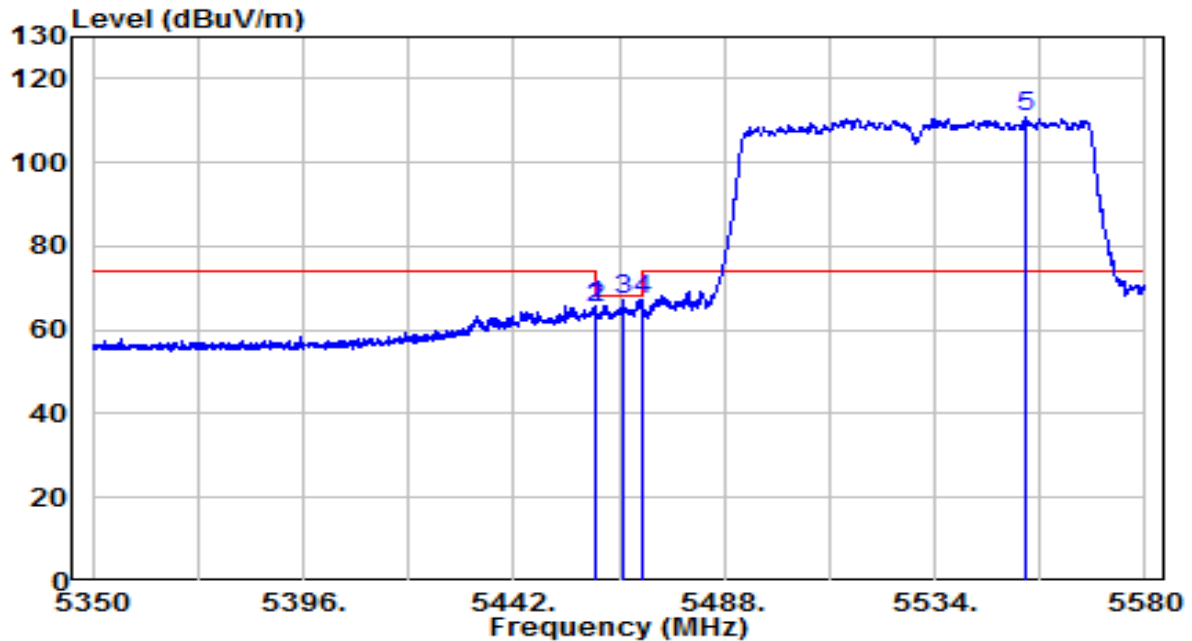


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.710        | 45.05          | 20.70    | 65.76                | -8.24       | 74.00          | Peak              |
| 2  | 5460.000        | 44.35          | 20.70    | 65.06                | -3.14       | 68.20          | Peak              |
| 3  | 5466.035        | 46.53          | 20.71    | 67.25                | -0.95       | 68.20          | Peak              |
| 4  | 5470.000        | 46.60          | 20.72    | 67.32                | -0.88       | 68.20          | Peak              |
| 5  | * 5553.895      | 89.84          | 20.97    | 110.80               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5530MHz | Test Voltage         | 120V/60Hz  |

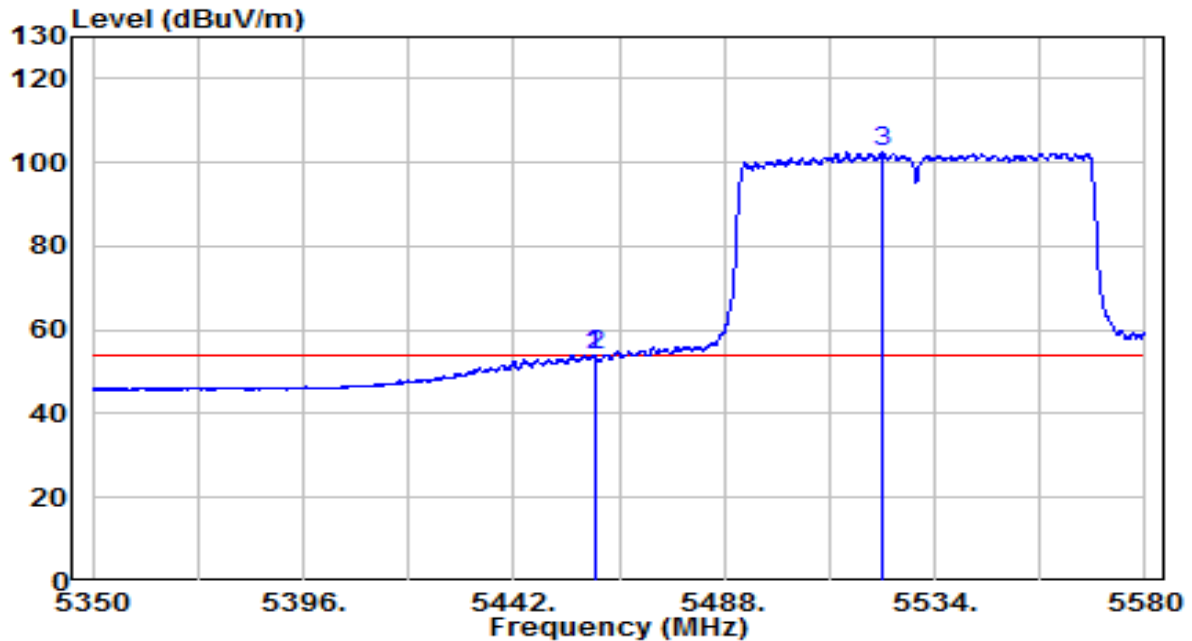


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.595        | 33.46          | 20.70    | 54.17                | 0.17        | 54.00          | Average           |
| 2  | 5460.000        | 33.11          | 20.70    | 53.81                | -0.19       | 54.00          | Average           |
| 3  | * 5522.500      | 81.68          | 20.85    | 102.53               | N/A         | N/A            | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5610MHz | Test Voltage         | 120V/60Hz  |

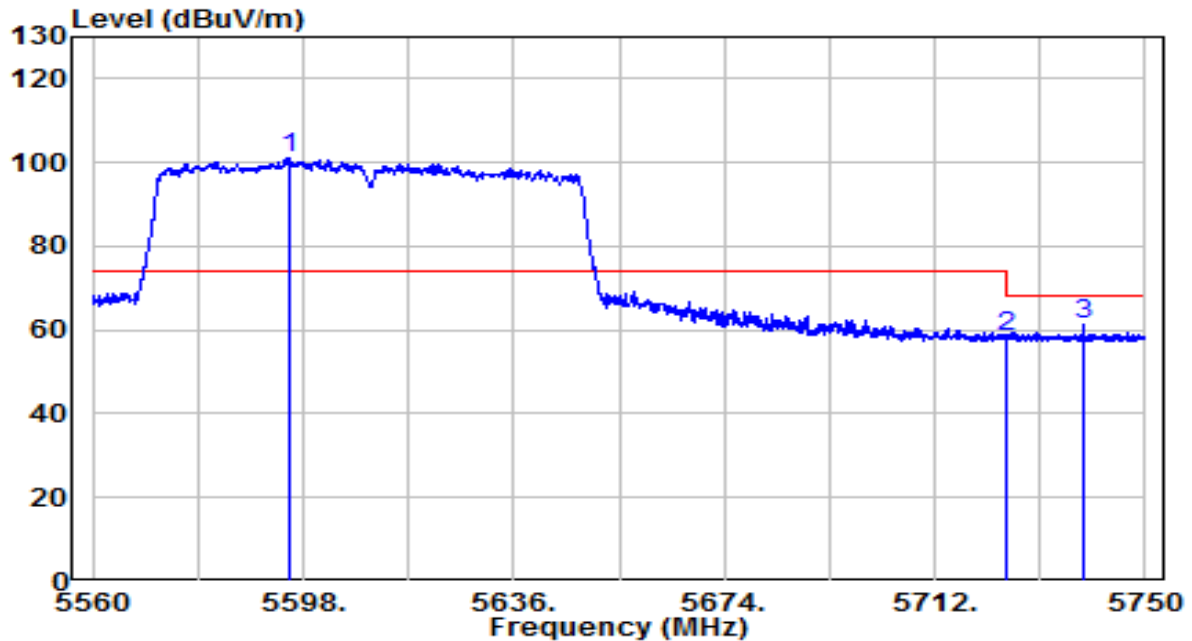


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5595.340        | 79.93          | 21.12    | 101.05               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 36.98          | 21.59    | 58.56                | -9.64       | 68.20          | Peak              |
| 3  |   | 5738.980        | 39.49          | 21.64    | 61.13                | -7.07       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5610MHz | Test Voltage         | 120V/60Hz  |

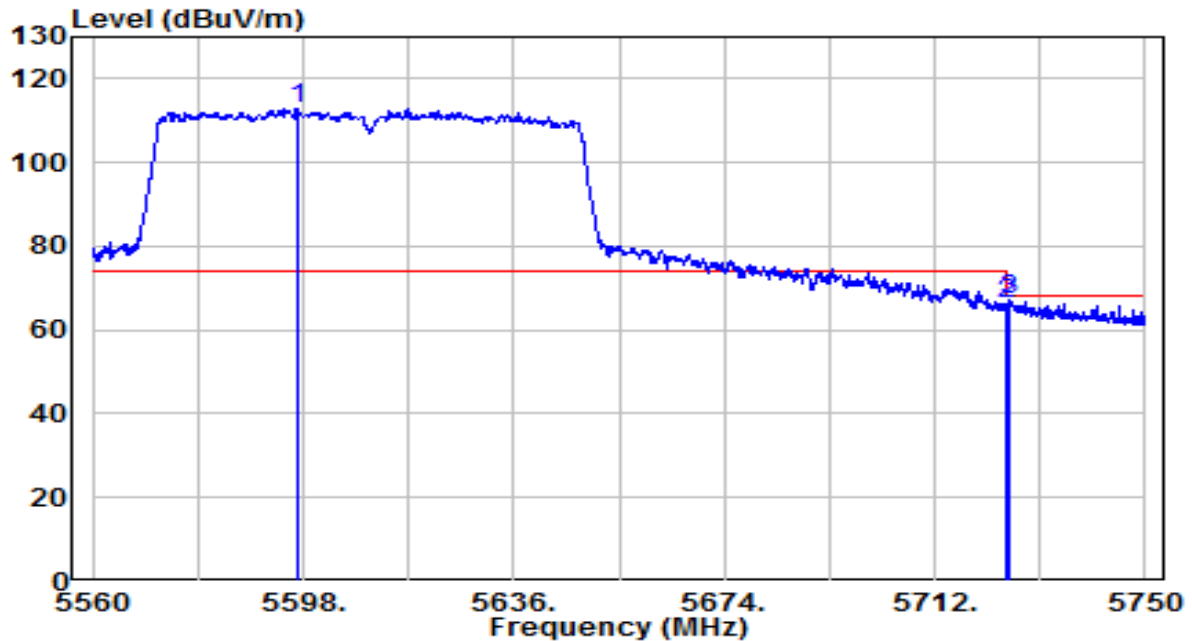


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5597.050        | 91.56          | 21.12    | 112.69               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 44.61          | 21.59    | 66.20                | -2.00       | 68.20          | Peak              |
| 3  |   | 5725.205        | 45.84          | 21.59    | 67.43                | -0.77       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5775MHz | Test Voltage         | 120V/60Hz  |

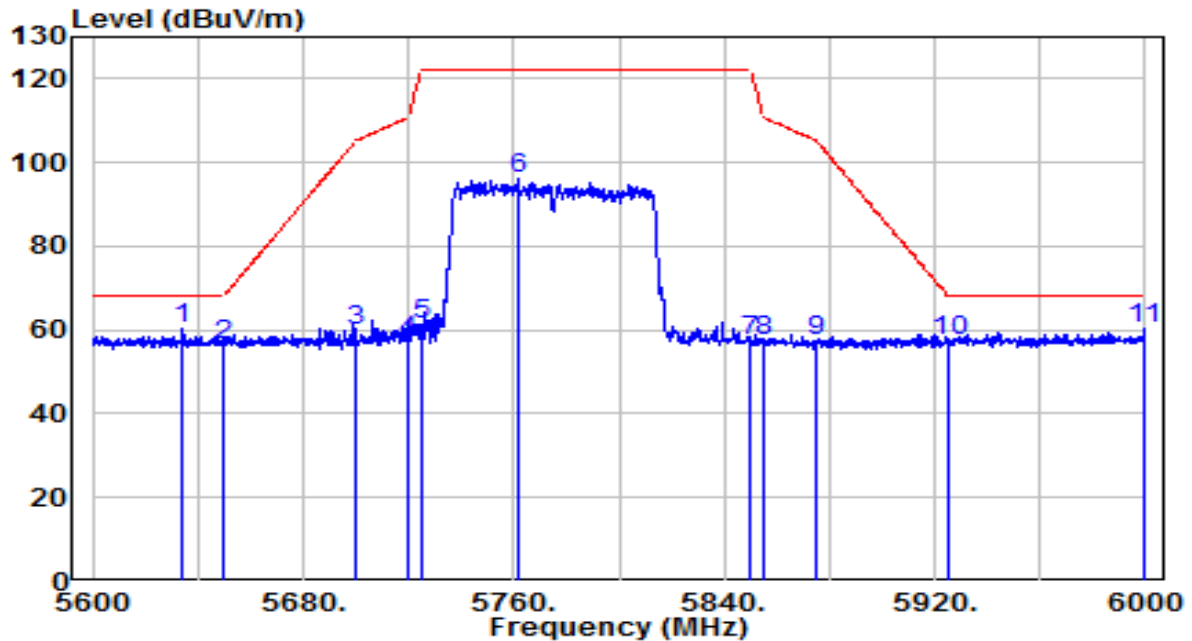

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5634.400        | 39.08          | 21.26    | 60.34                | -7.86       | 68.20          | Peak              |
| 2  |   | 5650.000        | 35.21          | 21.32    | 56.52                | -11.68      | 68.20          | Peak              |
| 3  |   | 5700.000        | 38.53          | 21.50    | 60.02                | -45.18      | 105.20         | Peak              |
| 4  |   | 5720.000        | 36.02          | 21.57    | 57.59                | -53.21      | 110.80         | Peak              |
| 5  |   | 5725.000        | 39.85          | 21.59    | 61.44                | -60.76      | 122.20         | Peak              |
| 6  |   | 5761.600        | 74.35          | 21.72    | 96.07                | N/A         | N/A            | Peak              |
| 7  |   | 5850.000        | 35.48          | 22.04    | 57.52                | -64.68      | 122.20         | Peak              |
| 8  |   | 5855.000        | 35.16          | 22.06    | 57.22                | -53.58      | 110.80         | Peak              |
| 9  |   | 5875.000        | 35.06          | 22.14    | 57.20                | -48.00      | 105.20         | Peak              |
| 10 |   | 5925.000        | 35.05          | 22.32    | 57.36                | -10.84      | 68.20          | Peak              |
| 11 |   | 5999.600        | 37.69          | 22.59    | 60.28                | -7.92       | 68.20          | Peak              |


Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).

3.  $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$ .

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT80 at Channel 5775MHz | Test Voltage         | 120V/60Hz  |

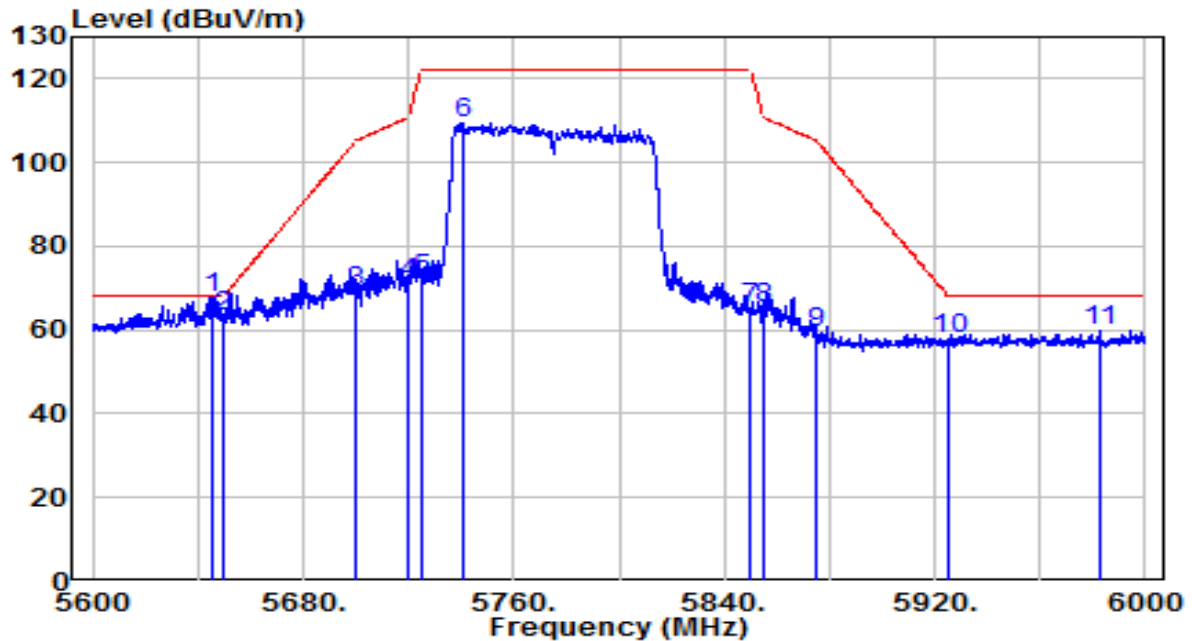

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5645.600        | 46.54          | 21.30    | 67.84                | -0.36       | 68.20          | Peak              |
| 2  |   | 5650.000        | 42.04          | 21.32    | 63.36                | -4.84       | 68.20          | Peak              |
| 3  |   | 5700.000        | 47.58          | 21.50    | 69.08                | -36.12      | 105.20         | Peak              |
| 4  |   | 5720.000        | 49.40          | 21.57    | 70.97                | -39.83      | 110.80         | Peak              |
| 5  |   | 5725.000        | 50.38          | 21.59    | 71.97                | -50.23      | 122.20         | Peak              |
| 6  |   | 5740.800        | 87.88          | 21.65    | 109.53               | N/A         | N/A            | Peak              |
| 7  |   | 5850.000        | 43.04          | 22.04    | 65.08                | -57.12      | 122.20         | Peak              |
| 8  |   | 5855.000        | 43.28          | 22.06    | 65.34                | -45.46      | 110.80         | Peak              |
| 9  |   | 5875.000        | 37.05          | 22.14    | 59.18                | -46.02      | 105.20         | Peak              |
| 10 |   | 5925.000        | 35.48          | 22.32    | 57.80                | -10.40      | 68.20          | Peak              |
| 11 |   | 5982.800        | 37.29          | 22.53    | 59.82                | -8.38       | 68.20          | Peak              |


Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).

3.  $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$ .

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |            |
|-----------|------------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5250MHz | Test Voltage         | 120V/60Hz  |

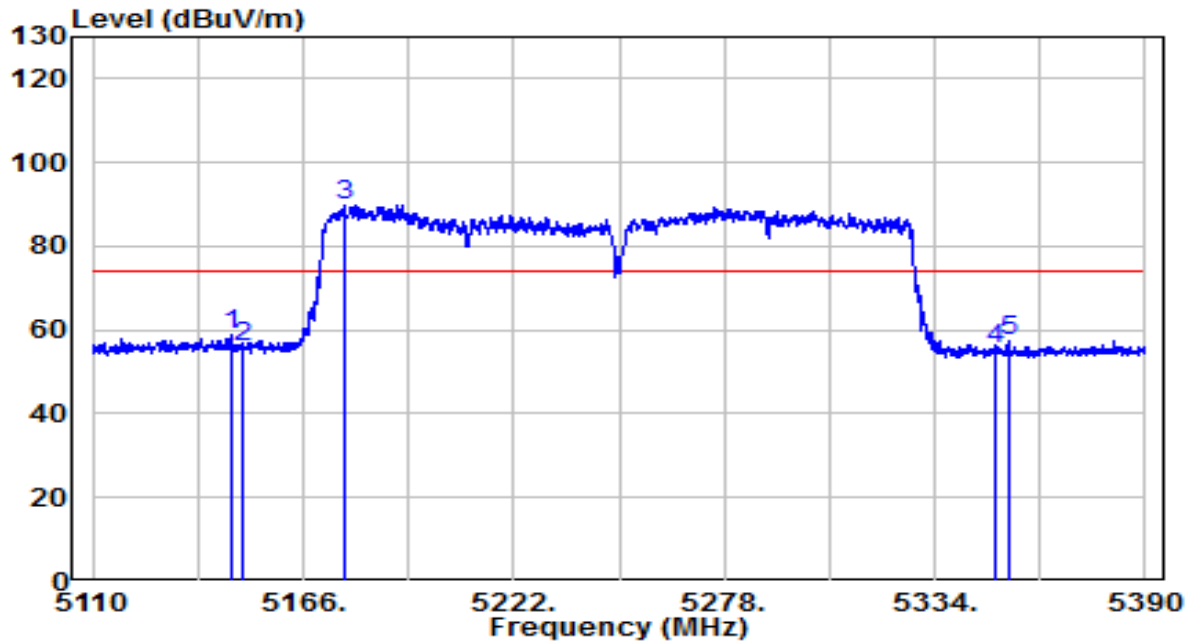


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5147.100        | 38.72          | 20.19    | 58.91                | -15.09      | 74.00          | Peak              |
| 2  | 5150.040        | 35.71          | 20.20    | 55.90                | -18.10      | 74.00          | Peak              |
| 3  | * 5176.920      | 69.62          | 20.24    | 89.86                | N/A         | N/A            | Peak              |
| 4  | 5350.000        | 35.07          | 20.52    | 55.59                | -18.41      | 74.00          | Peak              |
| 5  | 5353.740        | 36.88          | 20.53    | 57.41                | -16.59      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                                |                      |            |
|-----------|------------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5250MHz | Test Voltage         | 120V/60Hz  |

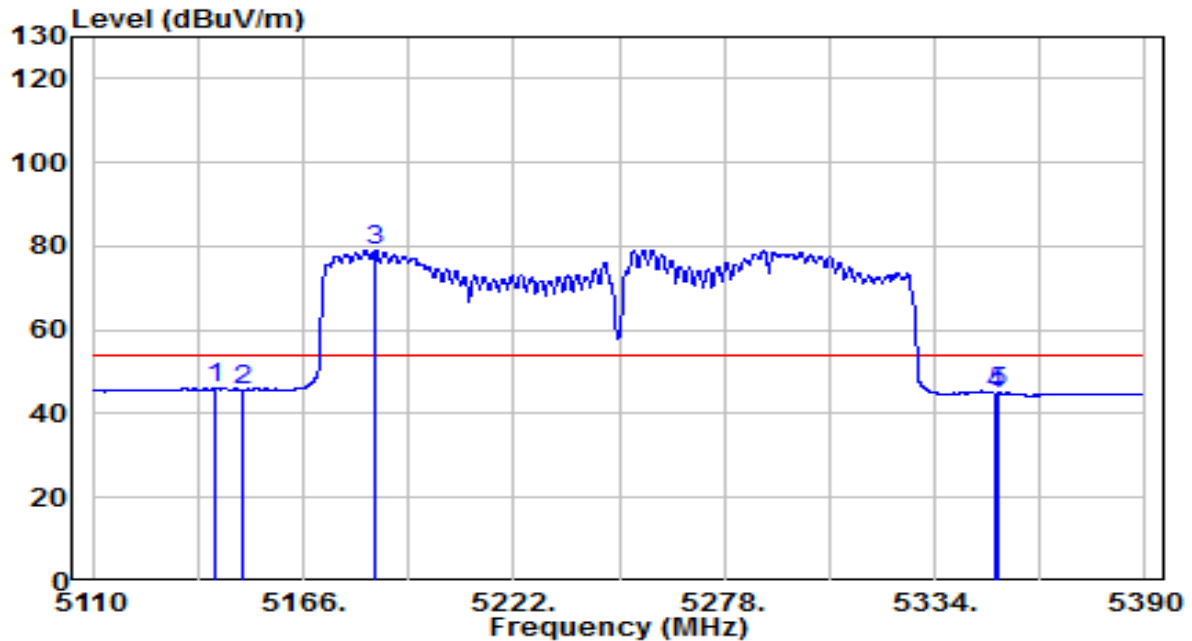


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5142.620        | 25.84          | 20.18    | 46.02                | -7.98       | 54.00          | Average           |
| 2  | 5150.000        | 25.56          | 20.20    | 45.76                | -8.24       | 54.00          | Average           |
| 3  | * 5185.040      | 58.90          | 20.25    | 79.15                | N/A         | N/A            | Average           |
| 4  | 5350.000        | 24.26          | 20.52    | 44.78                | -9.22       | 54.00          | Average           |
| 5  | 5351.220        | 24.56          | 20.53    | 45.08                | -8.92       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |            |
|-----------|------------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Vertical                                       | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5250MHz | Test Voltage         | 120V/60Hz  |

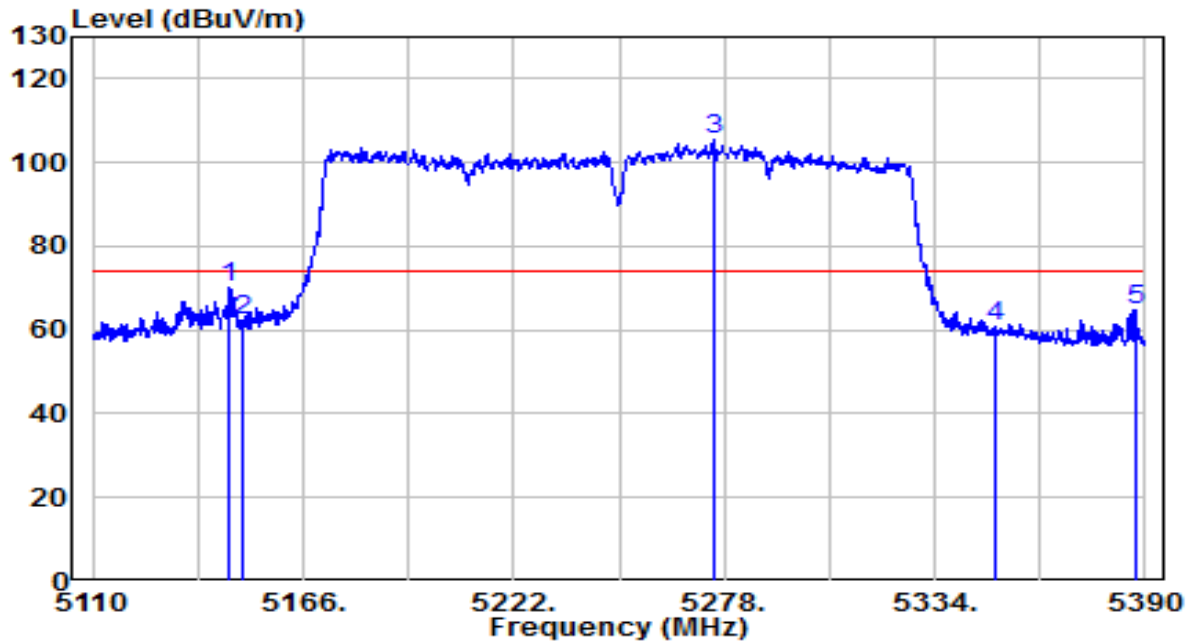


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5146.260        | 49.82          | 20.19    | 70.01                | -3.99       | 74.00          | Peak              |
| 2  | 5150.000        | 42.33          | 20.20    | 62.52                | -11.48      | 74.00          | Peak              |
| 3  | * 5275.200      | 85.26          | 20.40    | 105.66               | N/A         | N/A            | Peak              |
| 4  | 5350.000        | 40.51          | 20.52    | 61.03                | -12.97      | 74.00          | Peak              |
| 5  | 5387.480        | 44.14          | 20.59    | 64.73                | -9.27       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |            |
|-----------|------------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Vertical                                       | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5250MHz | Test Voltage         | 120V/60Hz  |

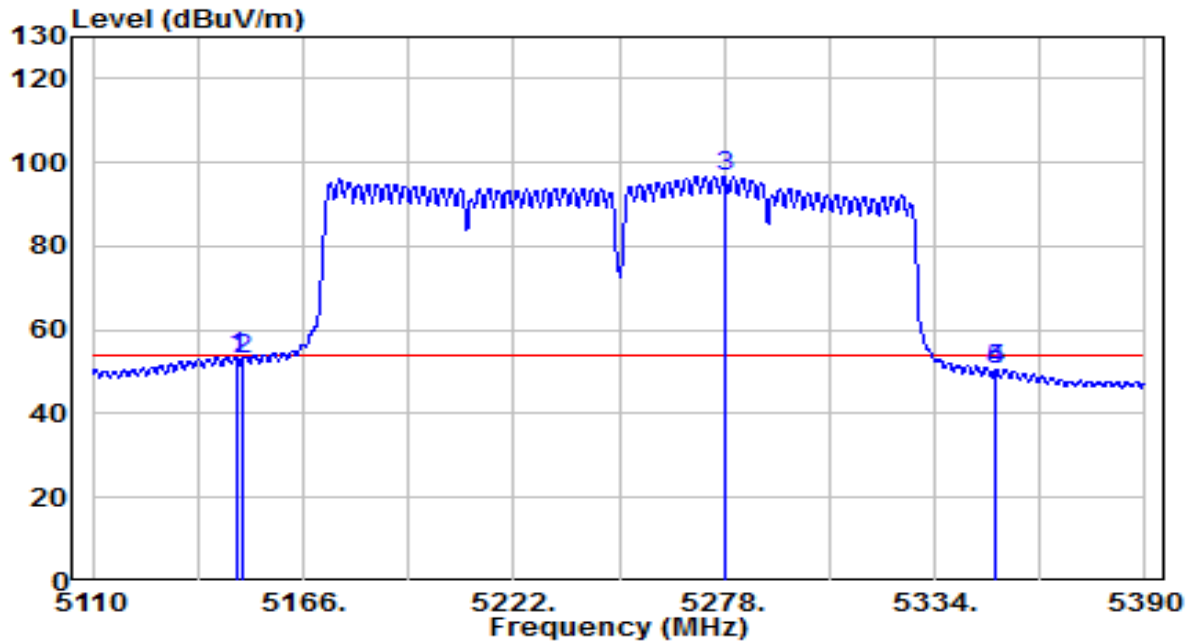


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5148.080        | 33.39          | 20.19    | 53.59                | -0.41       | 54.00          | Peak              |
| 2  | 5150.000        | 32.82          | 20.20    | 53.02                | -0.98       | 54.00          | Peak              |
| 3  | * 5278.000      | 76.27          | 20.41    | 96.67                | N/A         | N/A            | Peak              |
| 4  | 5350.000        | 29.83          | 20.52    | 50.35                | -3.65       | 54.00          | Peak              |
| 5  | 5350.240        | 29.99          | 20.52    | 50.51                | -3.49       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |            |
|-----------|------------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5570MHz | Test Voltage         | 120V/60Hz  |

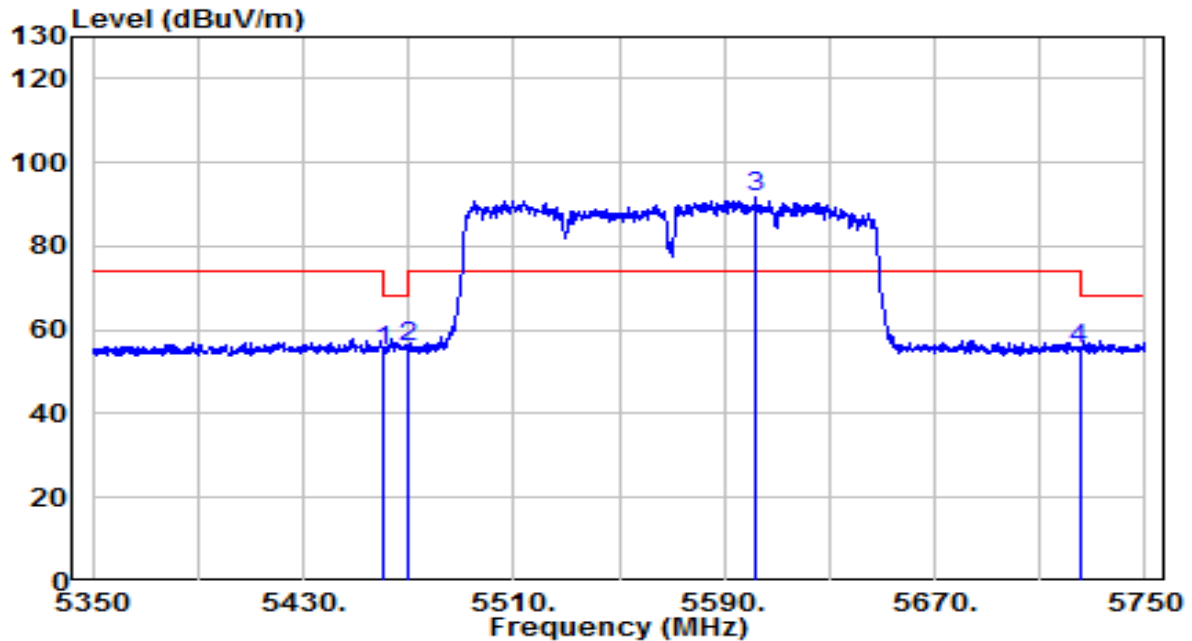


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5460.000        | 34.39          | 20.70    | 55.09                | -13.11      | 68.20          | Peak              |
| 2  | 5470.000        | 35.04          | 20.72    | 55.76                | -12.44      | 68.20          | Peak              |
| 3  | * 5602.200      | 70.62          | 21.14    | 91.77                | N/A         | N/A            | Peak              |
| 4  | 5725.000        | 33.74          | 21.59    | 55.33                | -12.87      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |            |
|-----------|------------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5570MHz | Test Voltage         | 120V/60Hz  |

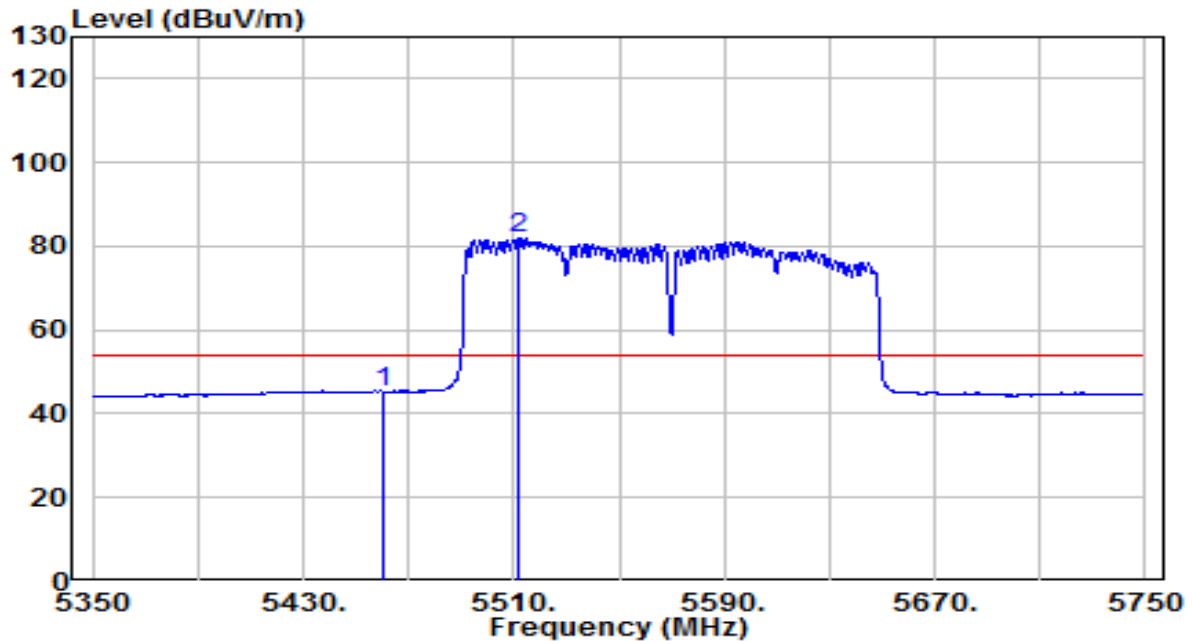


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5460.000        | 24.67          | 20.70    | 45.37                | -8.63       | 54.00          | Average           |
| 2  | * 5512.200      | 61.31          | 20.81    | 82.12                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |            |
|-----------|------------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Vertical                                       | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5570MHz | Test Voltage         | 120V/60Hz  |

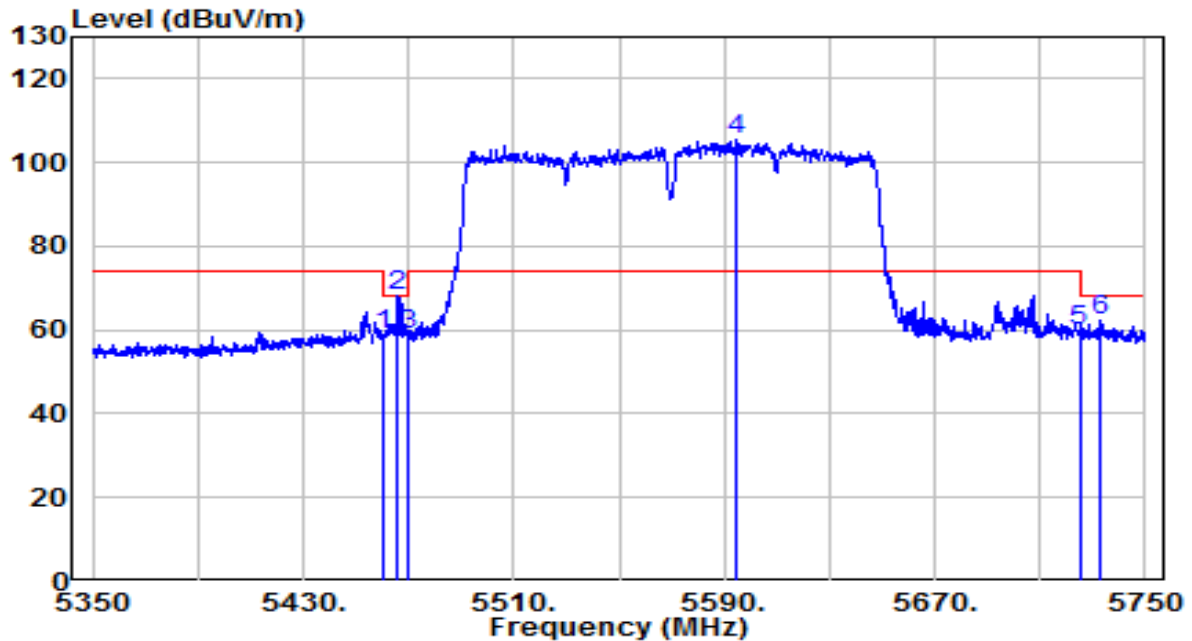


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5460.000        | 38.12          | 20.70    | 58.83                | -9.37       | 68.20          | Peak              |
| 2  | 5466.000        | 47.29          | 20.71    | 68.00                | -0.20       | 68.20          | Peak              |
| 3  | 5470.000        | 37.95          | 20.72    | 58.67                | -9.53       | 68.20          | Peak              |
| 4  | * 5594.600      | 84.35          | 21.11    | 105.46               | N/A         | N/A            | Peak              |
| 5  | 5725.000        | 38.44          | 21.59    | 60.03                | -8.17       | 68.20          | Peak              |
| 6  | 5733.200        | 40.82          | 21.62    | 62.44                | -5.76       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |            |
|-----------|------------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                 | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                     | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Vertical                                       | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ac-VHT160 at Channel 5570MHz | Test Voltage         | 120V/60Hz  |

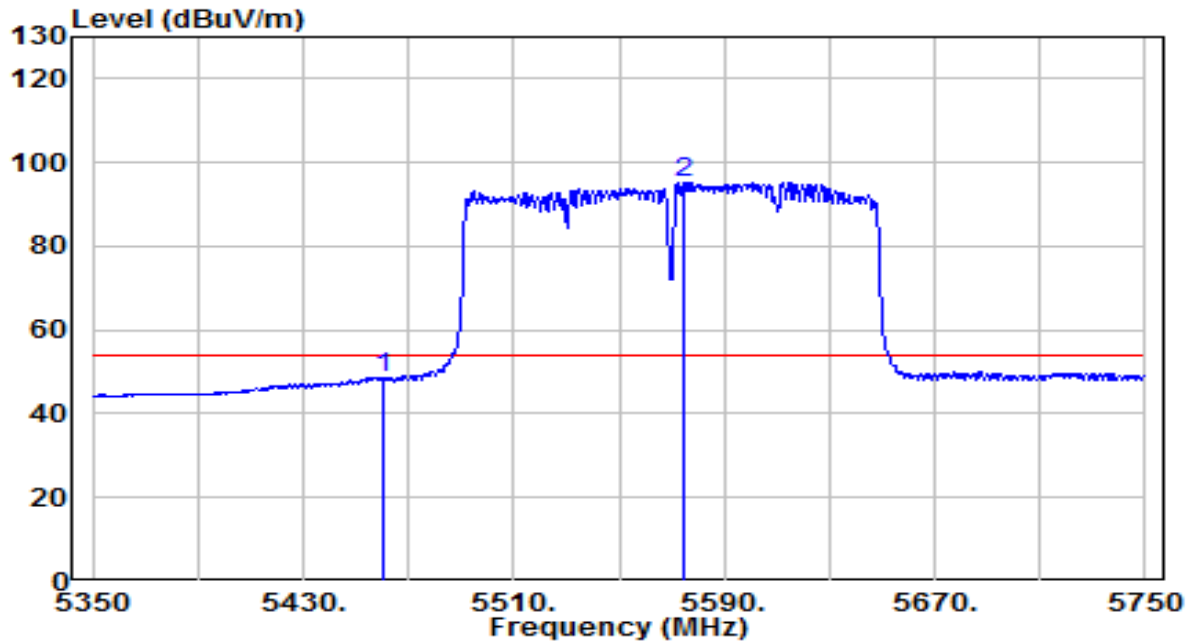


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5460.000        | 27.83          | 20.70    | 48.53                | -5.47       | 54.00          | Average           |
| 2  | * 5574.800      | 74.30          | 21.04    | 95.34                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

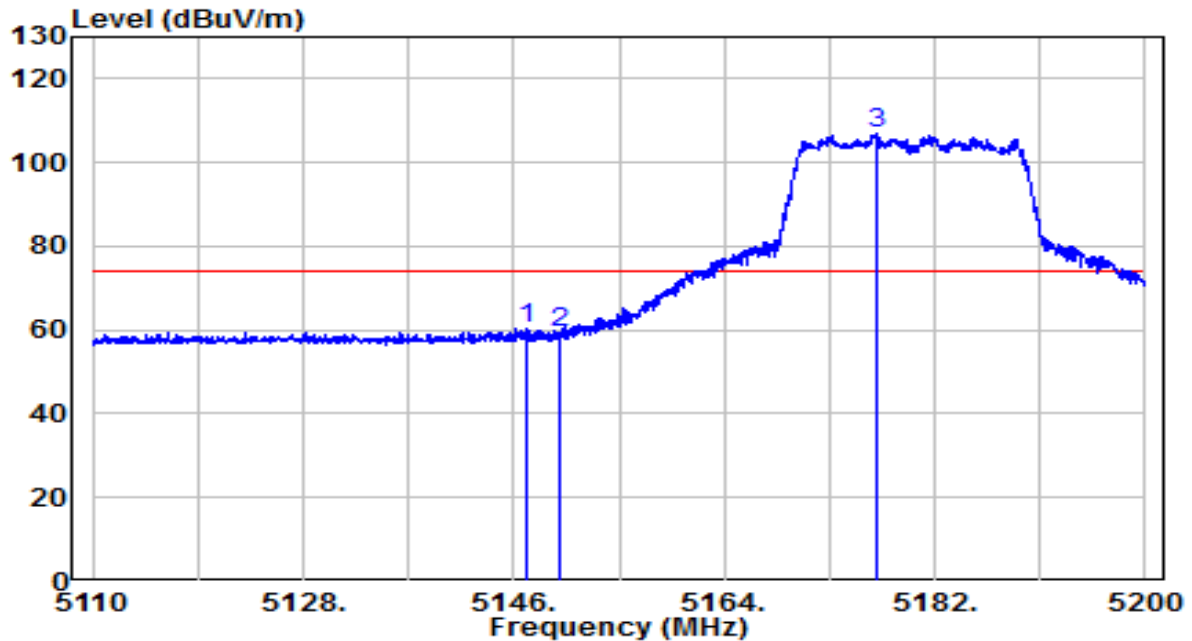


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5147.170        | 40.19          | 20.19    | 60.38                | -13.62      | 74.00          | Peak              |
| 2  | 5150.000        | 38.97          | 20.20    | 59.16                | -14.84      | 74.00          | Peak              |
| 3  | * 5177.005      | 86.57          | 20.24    | 106.81               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

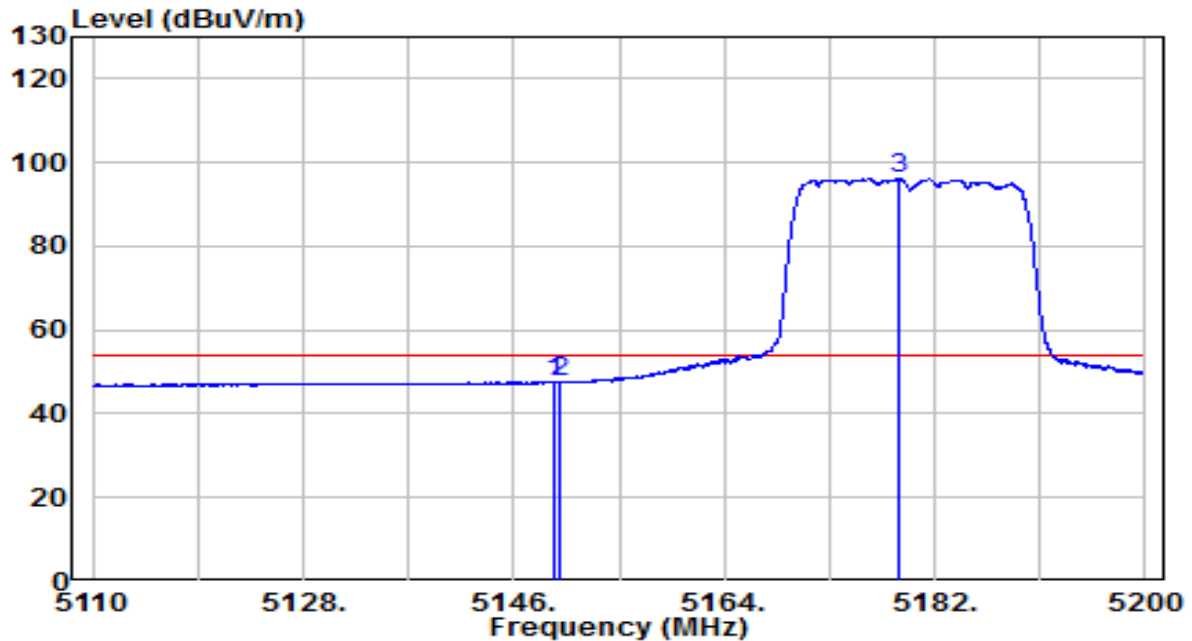


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5149.375        | 27.50          | 20.19    | 47.70                | -6.30       | 54.00          | Average           |
| 2  | 5150.000        | 27.20          | 20.20    | 47.40                | -6.60       | 54.00          | Average           |
| 3  | * 5178.895      | 75.92          | 20.24    | 96.16                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

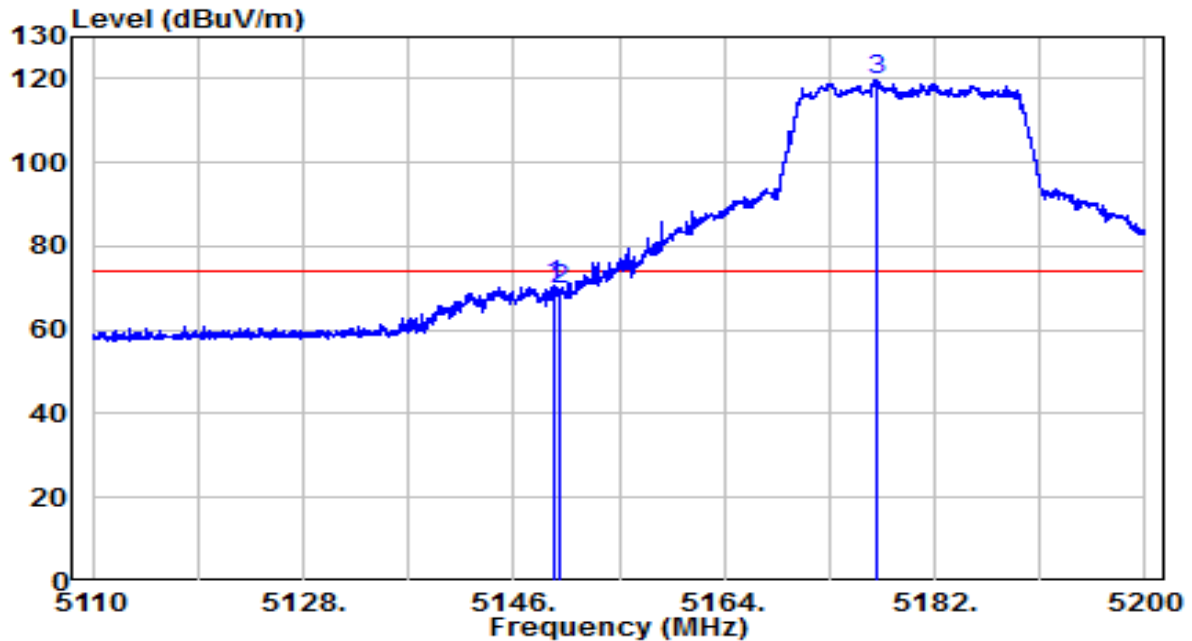


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5149.375        | 50.69          | 20.19    | 70.88                | -3.12       | 74.00          | Peak              |
| 2  | 5150.000        | 49.41          | 20.20    | 69.61                | -4.39       | 74.00          | Peak              |
| 3  | * 5177.095      | 99.57          | 20.24    | 119.81               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5180MHz | Test Voltage         | 120V/60Hz  |

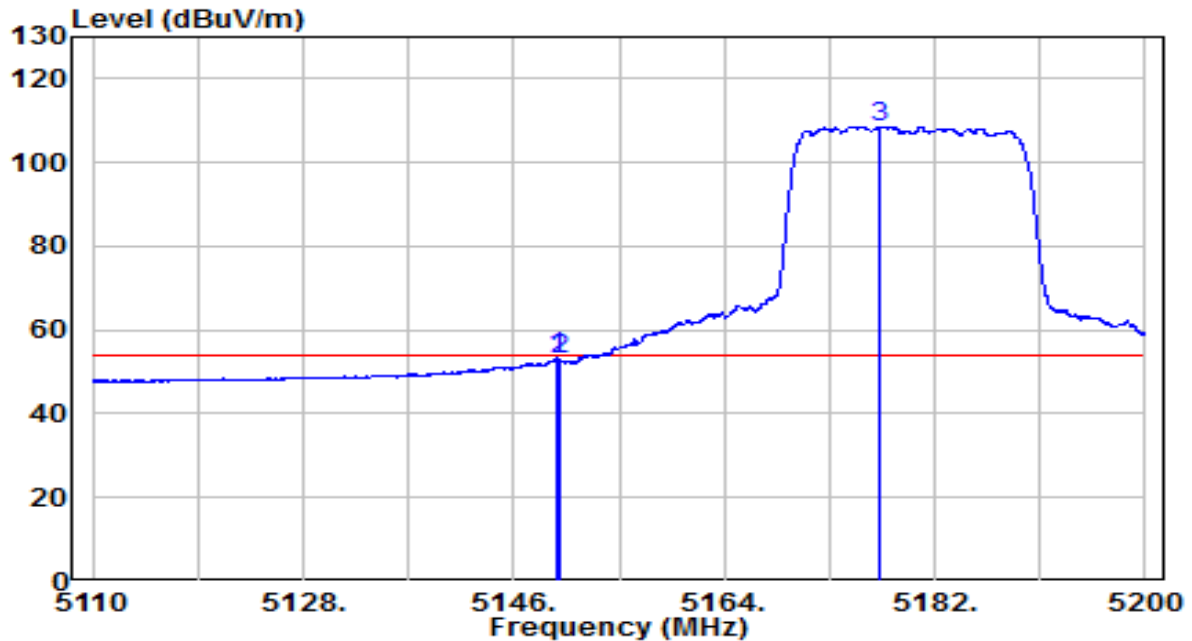


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5149.735        | 33.10          | 20.20    | 53.30                | -0.70       | 54.00          | Average           |
| 2  | 5150.000        | 32.62          | 20.20    | 52.82                | -1.18       | 54.00          | Average           |
| 3  | * 5177.320      | 88.37          | 20.24    | 108.61               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

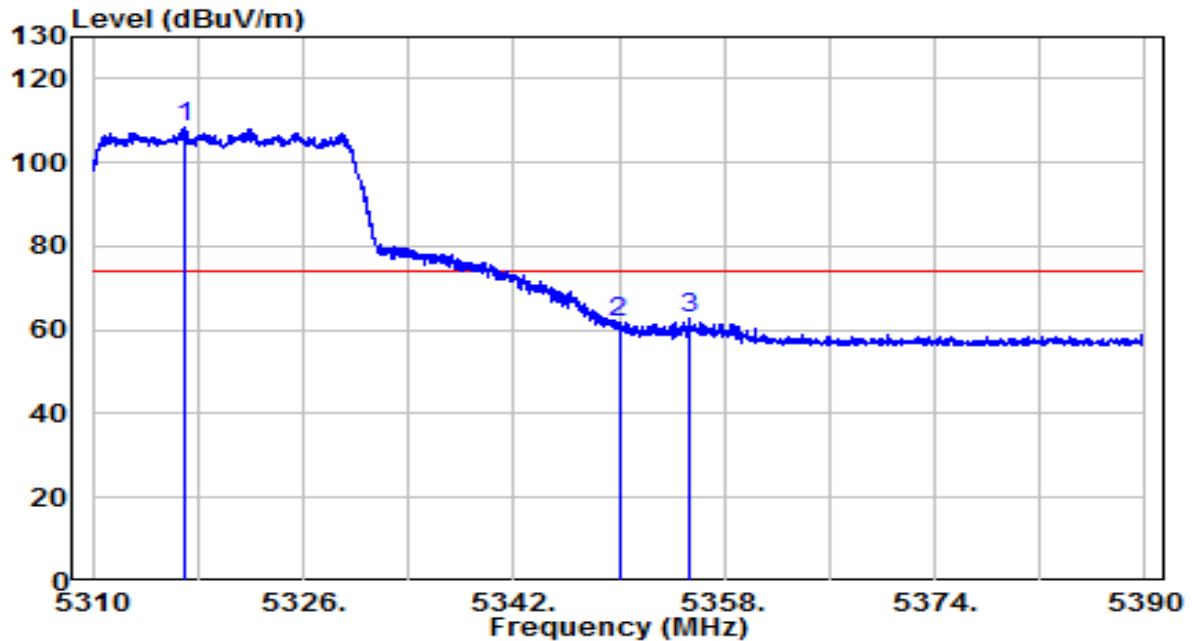


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5316.960        | 87.92          | 20.47    | 108.39               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 41.06          | 20.52    | 61.58                | -12.42      | 74.00          | Peak              |
| 3  |   | 5355.280        | 42.23          | 20.53    | 62.76                | -11.24      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

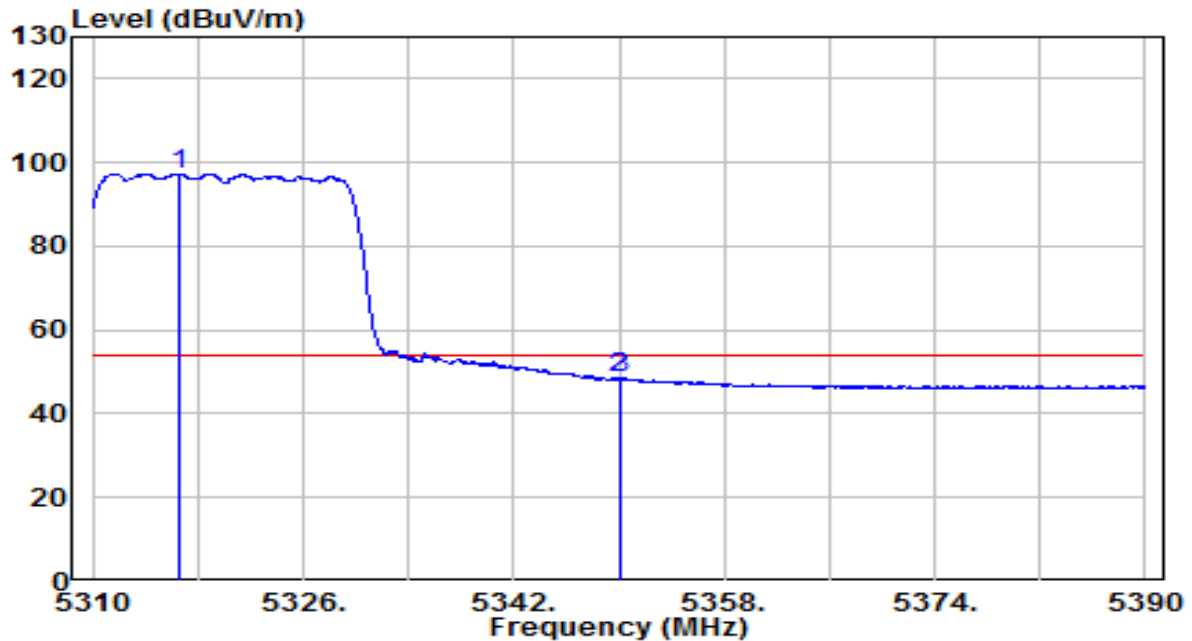


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5316.600        | 76.87          | 20.47    | 97.34                | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 27.87          | 20.52    | 48.40                | -5.60       | 54.00          | Average           |
| 3  |   | 5350.040        | 27.95          | 20.52    | 48.47                | -5.53       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

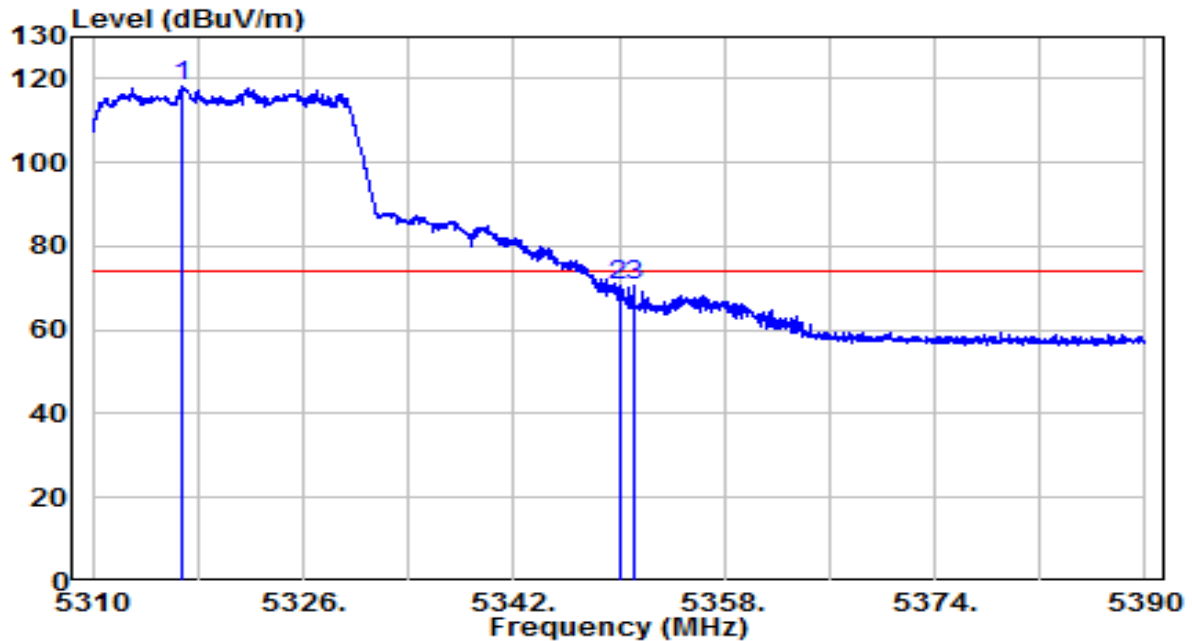


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5316.840        | 97.78          | 20.47    | 118.25               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 50.01          | 20.52    | 70.54                | -3.46       | 74.00          | Peak              |
| 3  |   | 5351.120        | 50.33          | 20.53    | 70.86                | -3.14       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5320MHz | Test Voltage         | 120V/60Hz  |

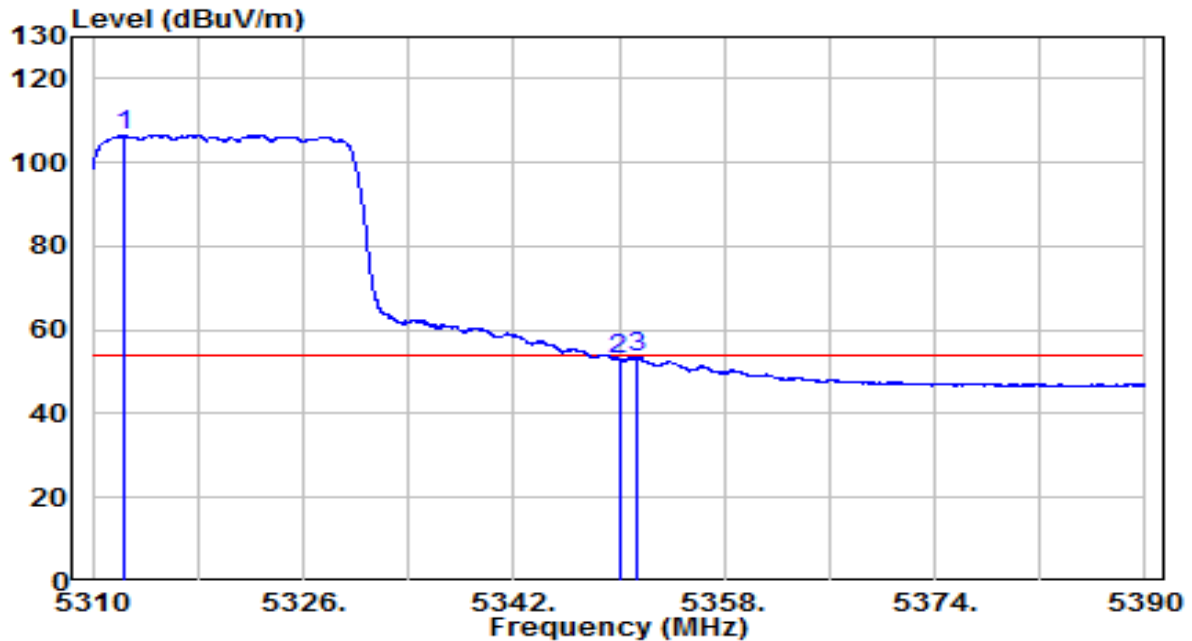


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5312.440        | 86.04          | 20.46    | 106.50               | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 32.67          | 20.52    | 53.20                | -0.80       | 54.00          | Average           |
| 3  |   | 5351.280        | 33.12          | 20.53    | 53.65                | -0.35       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

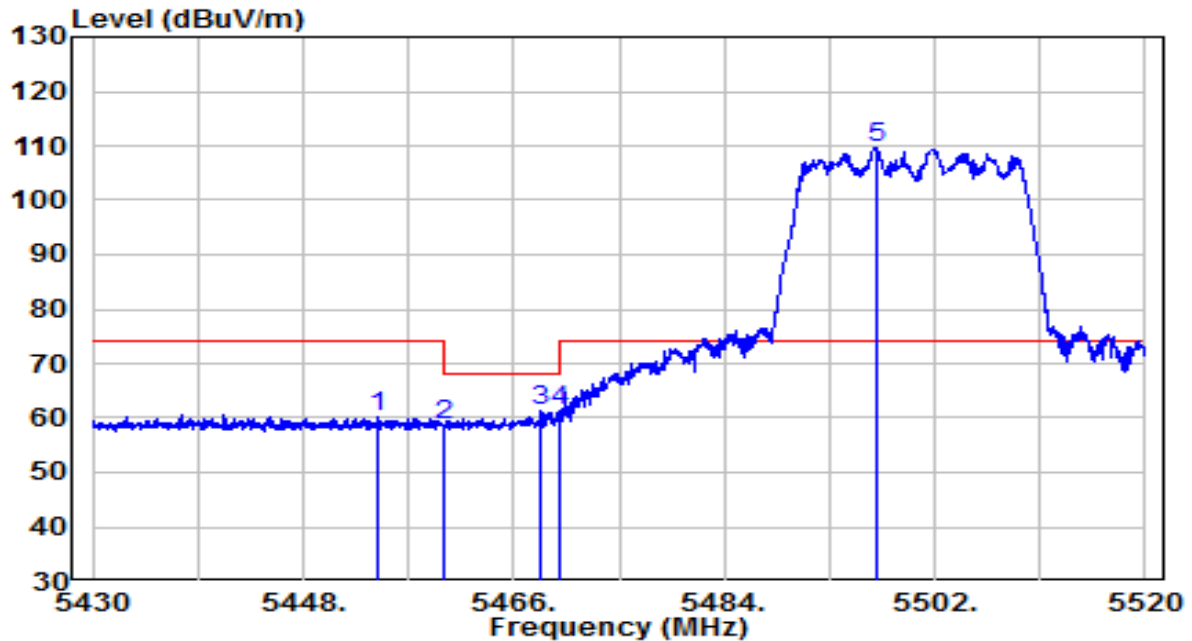


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5454.390        | 39.49          | 20.70    | 60.18                | -13.82      | 74.00          | Peak              |
| 2  | 5460.000        | 37.96          | 20.70    | 58.67                | -9.53       | 68.20          | Peak              |
| 3  | 5468.295        | 40.48          | 20.72    | 61.20                | -7.00       | 68.20          | Peak              |
| 4  | 5470.000        | 40.65          | 20.72    | 61.37                | -6.83       | 68.20          | Peak              |
| 5  | * 5496.960      | 88.81          | 20.77    | 109.57               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

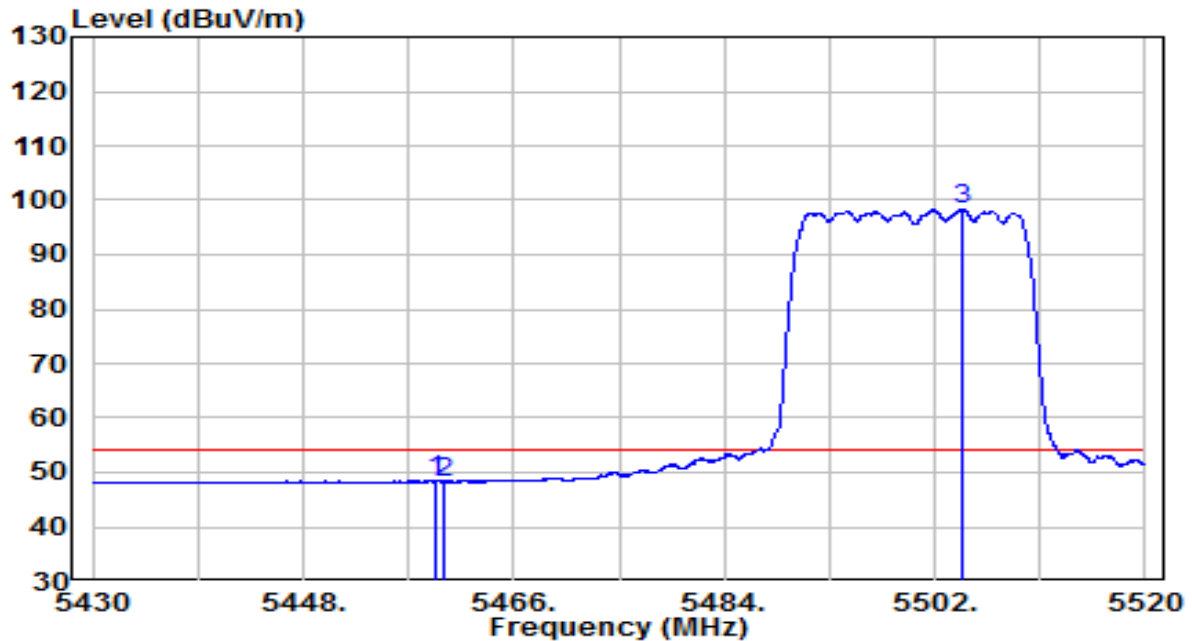


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.430        | 27.73          | 20.70    | 48.44                | -5.56       | 54.00          | Average           |
| 2  | 5460.000        | 27.56          | 20.70    | 48.26                | -5.74       | 54.00          | Average           |
| 3  | * 5504.250      | 77.44          | 20.79    | 98.22                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

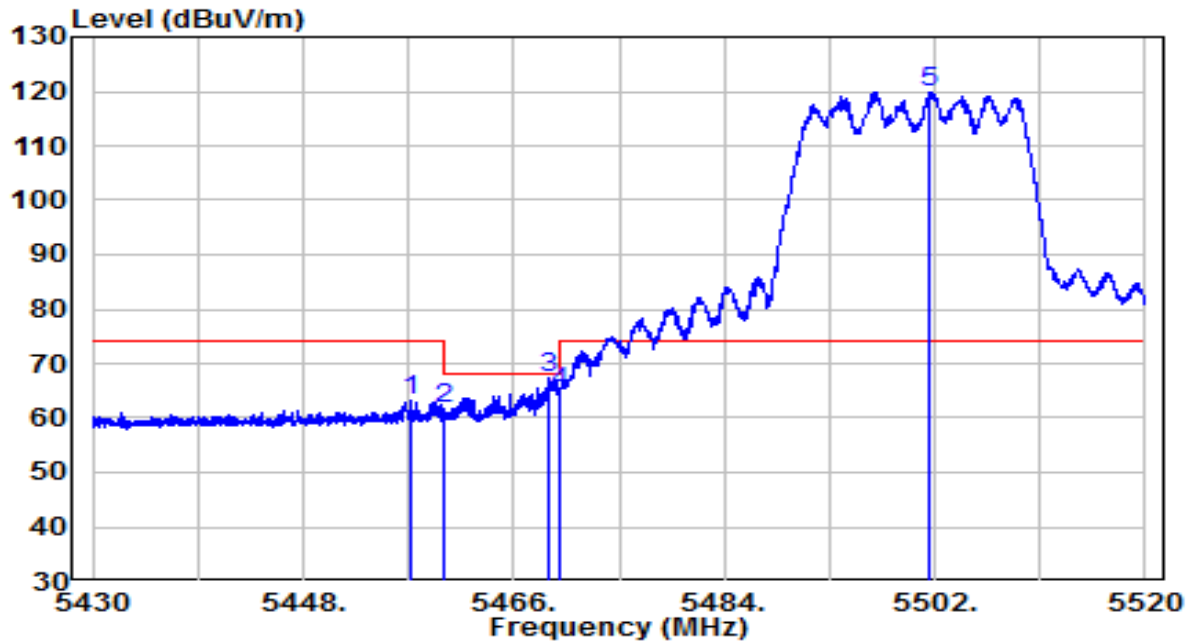


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5457.270        | 42.41          | 20.70    | 63.11                | -10.89      | 74.00          | Peak              |
| 2  | 5460.000        | 41.15          | 20.70    | 61.85                | -6.35       | 68.20          | Peak              |
| 3  | 5468.925        | 46.47          | 20.72    | 67.19                | -1.01       | 68.20          | Peak              |
| 4  | 5470.000        | 43.88          | 20.72    | 64.60                | -3.60       | 68.20          | Peak              |
| 5  | * 5501.640      | 99.16          | 20.78    | 119.94               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5500MHz | Test Voltage         | 120V/60Hz  |

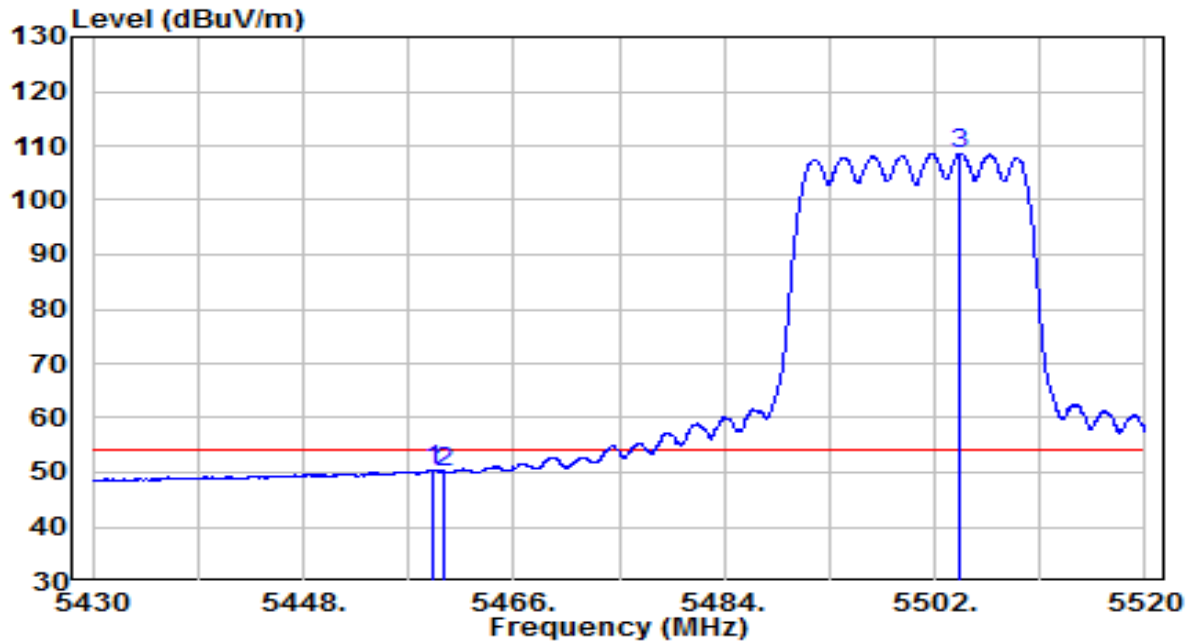


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.070        | 29.76          | 20.70    | 50.46                | -3.54       | 54.00          | Average           |
| 2  | 5460.000        | 29.37          | 20.70    | 50.07                | -3.93       | 54.00          | Average           |
| 3  | * 5504.205      | 87.70          | 20.79    | 108.49               | N/A         | N/A            | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5700MHz | Test Voltage         | 120V/60Hz  |

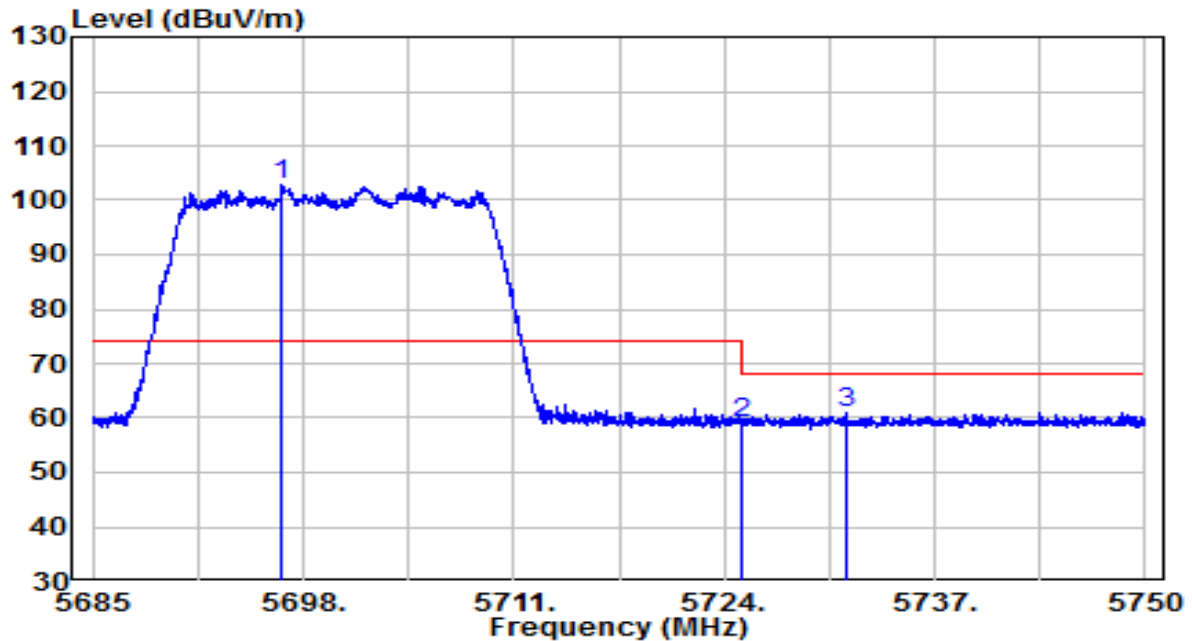


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5696.667        | 81.21          | 21.49    | 102.70               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 37.49          | 21.59    | 59.08                | -9.12       | 68.20          | Peak              |
| 3  |   | 5731.540        | 39.19          | 21.61    | 60.80                | -7.40       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5700MHz | Test Voltage         | 120V/60Hz  |

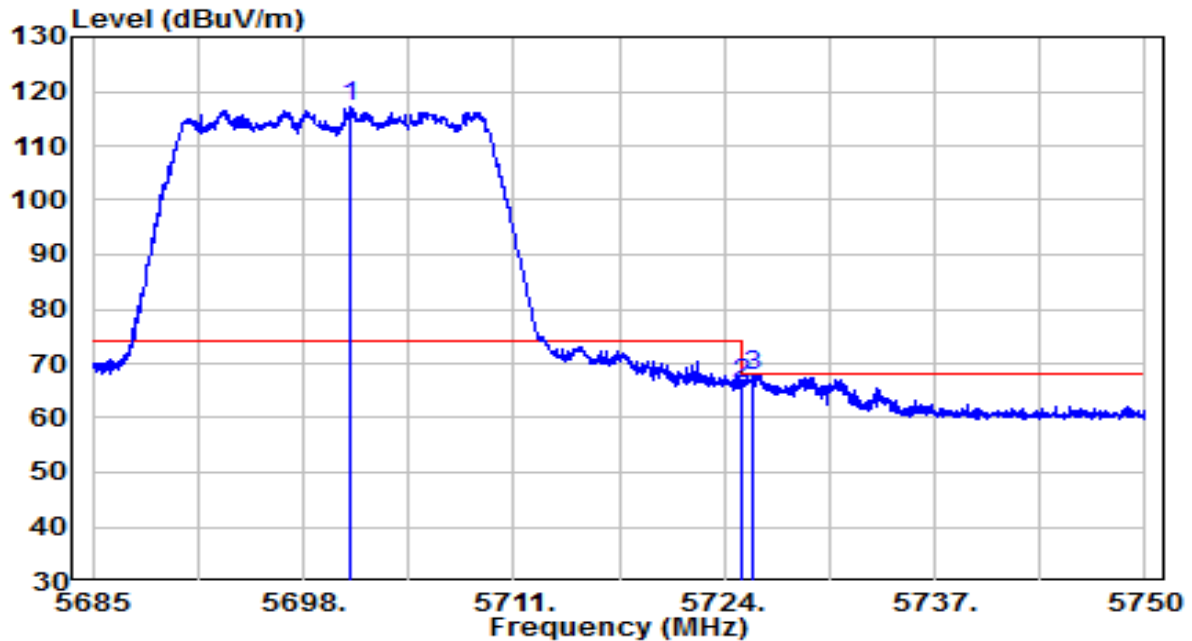


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5700.893        | 95.74          | 21.50    | 117.24               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 44.51          | 21.59    | 66.10                | -2.10       | 68.20          | Peak              |
| 3  |   | 5725.723        | 46.23          | 21.59    | 67.82                | -0.38       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5745MHz | Test Voltage         | 120V/60Hz  |

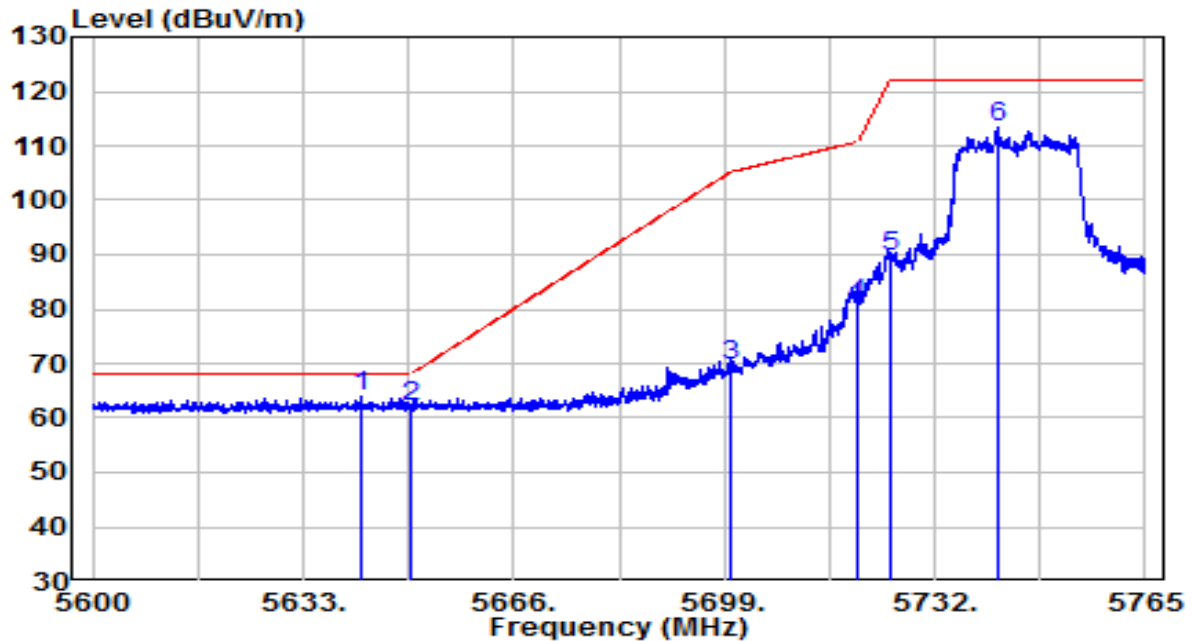


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5641.993        | 42.63          | 21.29    | 63.91                | -4.29       | 68.20          | Peak              |
| 2  |   | 5650.000        | 40.64          | 21.32    | 61.96                | -6.24       | 68.20          | Peak              |
| 3  |   | 5700.000        | 48.23          | 21.50    | 69.72                | -35.48      | 105.20         | Peak              |
| 4  |   | 5720.000        | 59.51          | 21.57    | 81.08                | -29.72      | 110.80         | Peak              |
| 5  |   | 5725.000        | 68.00          | 21.59    | 89.59                | -32.61      | 122.20         | Peak              |
| 6  |   | 5741.817        | 91.87          | 21.65    | 113.52               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5745MHz | Test Voltage         | 120V/60Hz  |

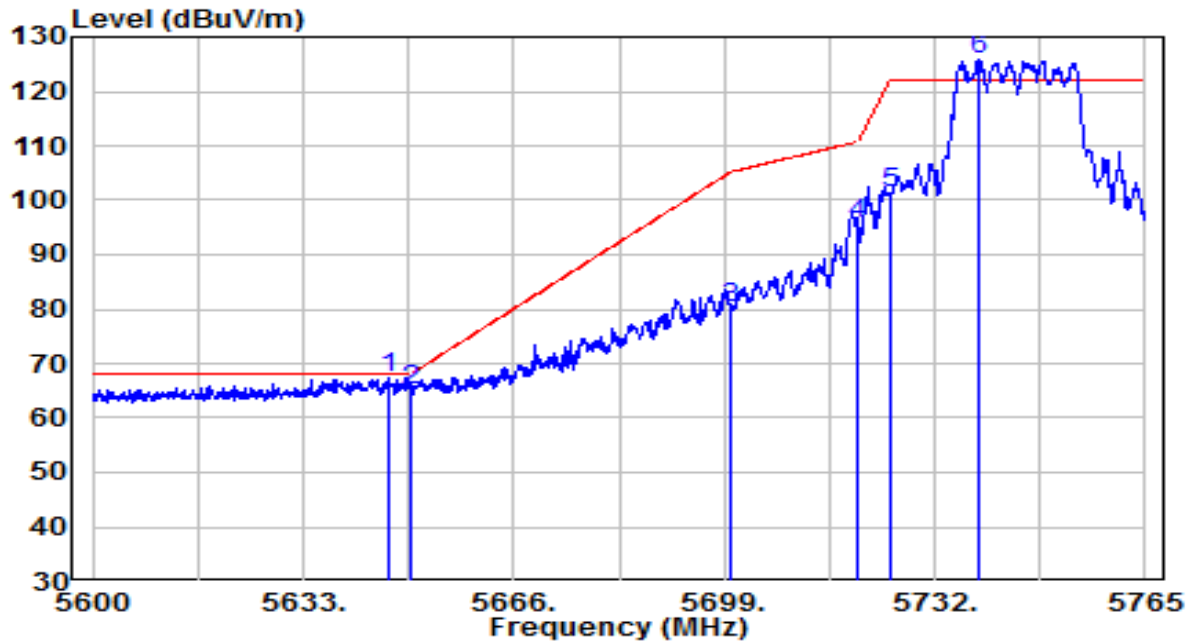


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5646.283        | 46.22          | 21.30    | 67.53                | -0.67       | 68.20          | Peak              |
| 2  | 5650.000        | 43.91          | 21.32    | 65.22                | -2.98       | 68.20          | Peak              |
| 3  | 5700.000        | 58.81          | 21.50    | 80.31                | -24.89      | 105.20         | Peak              |
| 4  | 5720.000        | 74.06          | 21.57    | 95.63                | -15.17      | 110.80         | Peak              |
| 5  | 5725.000        | 79.78          | 21.59    | 101.37               | -20.83      | 122.20         | Peak              |
| 6  | * 5739.095      | 104.25         | 21.64    | 125.89               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5825MHz | Test Voltage         | 120V/60Hz  |

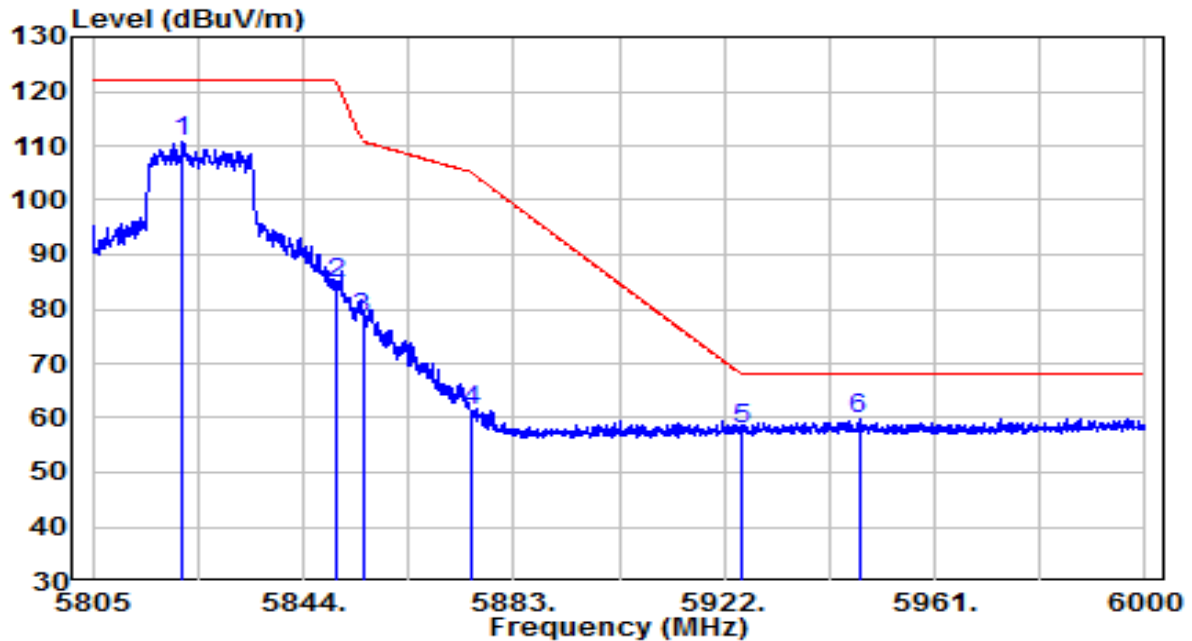


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5821.672        | 88.66          | 21.94    | 110.61               | N/A         | N/A            | Peak              |
| 2  | 5850.000        | 62.51          | 22.04    | 84.55                | -37.65      | 122.20         | Peak              |
| 3  | 5855.000        | 56.39          | 22.06    | 78.45                | -32.35      | 110.80         | Peak              |
| 4  | 5875.000        | 39.22          | 22.14    | 61.36                | -43.84      | 105.20         | Peak              |
| 5  | 5925.000        | 35.43          | 22.32    | 57.74                | -10.46      | 68.20          | Peak              |
| 6  | * 5946.960      | 37.26          | 22.40    | 59.66                | -8.54       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5825MHz | Test Voltage         | 120V/60Hz  |

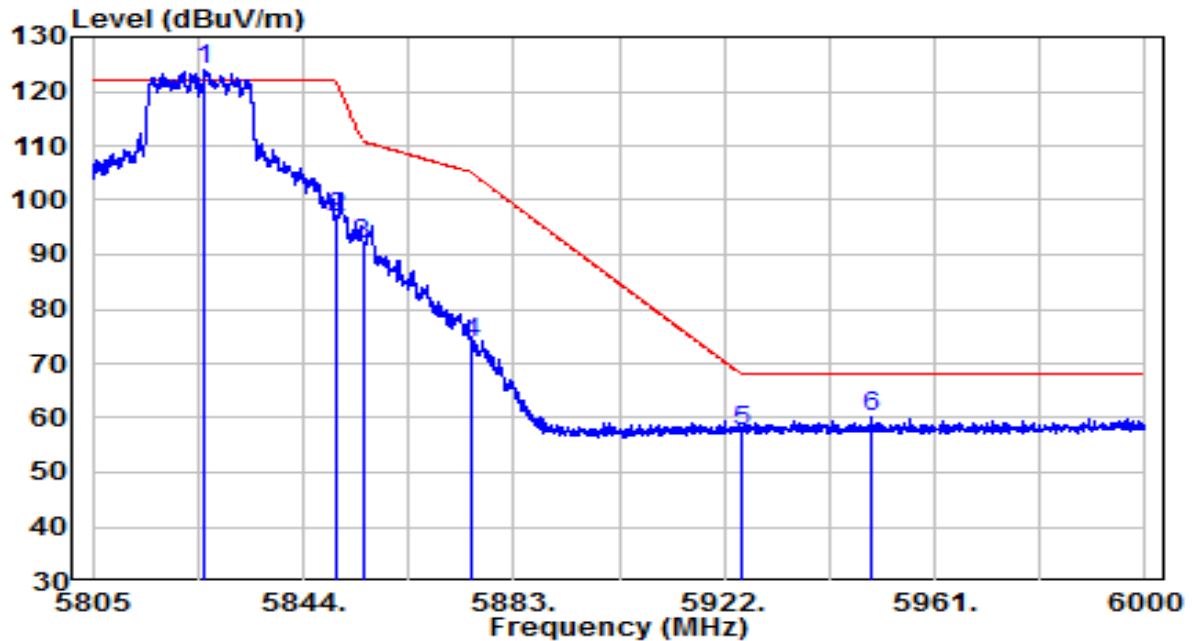


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5825.865        | 101.94         | 21.96    | 123.89               | N/A         | N/A            | Peak              |
| 2  |   | 5850.000        | 74.68          | 22.04    | 96.73                | -25.47      | 122.20         | Peak              |
| 3  |   | 5855.000        | 69.82          | 22.06    | 91.88                | -18.92      | 110.80         | Peak              |
| 4  |   | 5875.000        | 51.80          | 22.14    | 73.94                | -31.26      | 105.20         | Peak              |
| 5  |   | 5925.000        | 35.17          | 22.32    | 57.49                | -10.71      | 68.20          | Peak              |
| 6  |   | 5949.105        | 37.73          | 22.40    | 60.14                | -8.06       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5190MHz | Test Voltage         | 120V/60Hz  |

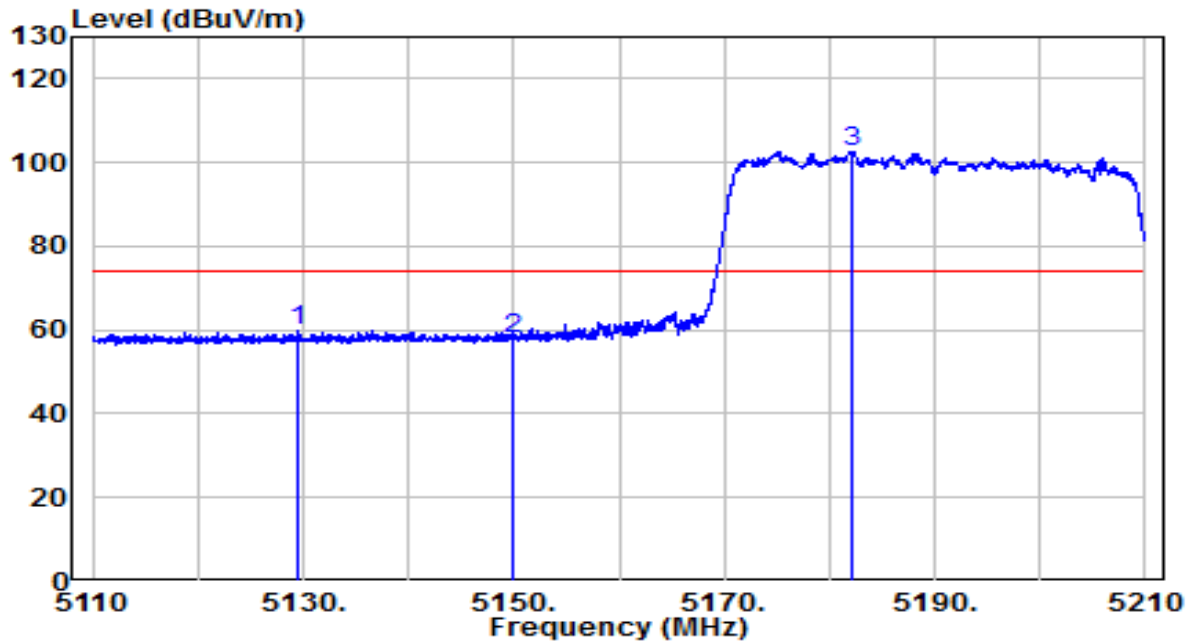


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5129.600        | 39.81          | 20.16    | 59.97                | -14.03      | 74.00          | Peak              |
| 2  | 5150.000        | 37.87          | 20.20    | 58.06                | -15.94      | 74.00          | Peak              |
| 3  | * 5182.050      | 82.35          | 20.25    | 102.59               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5190MHz | Test Voltage         | 120V/60Hz  |

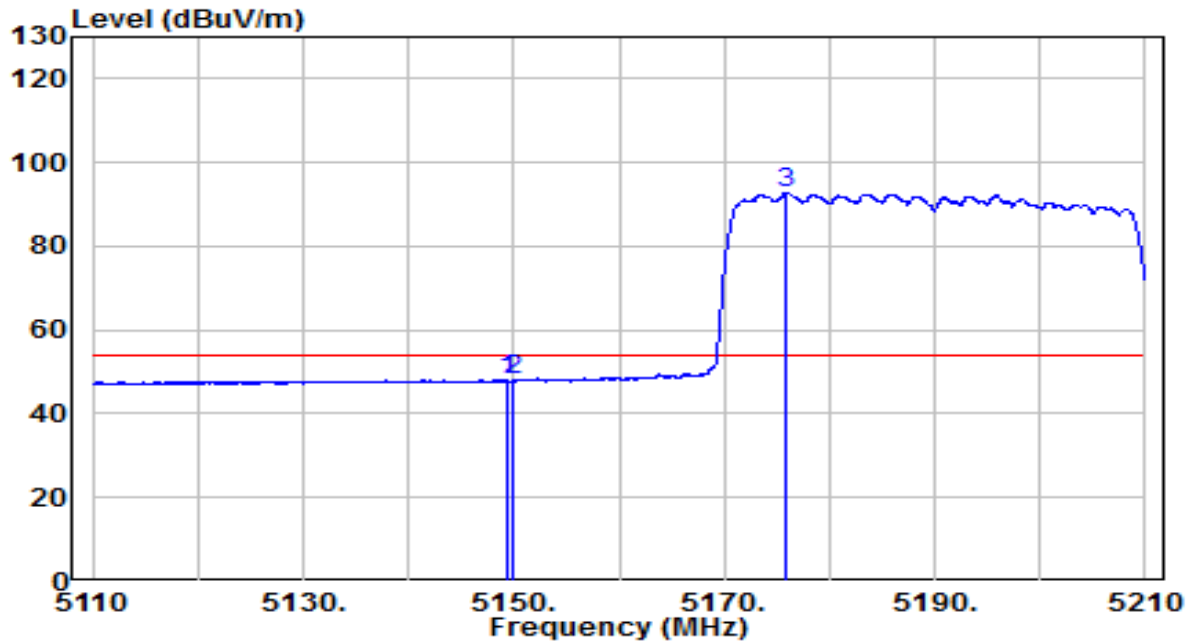


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5149.300        | 27.82          | 20.19    | 48.01                | -5.99       | 54.00          | Average           |
| 2  | 5150.000        | 27.74          | 20.20    | 47.93                | -6.07       | 54.00          | Average           |
| 3  | * 5175.900      | 72.50          | 20.24    | 92.74                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5190MHz | Test Voltage         | 120V/60Hz  |

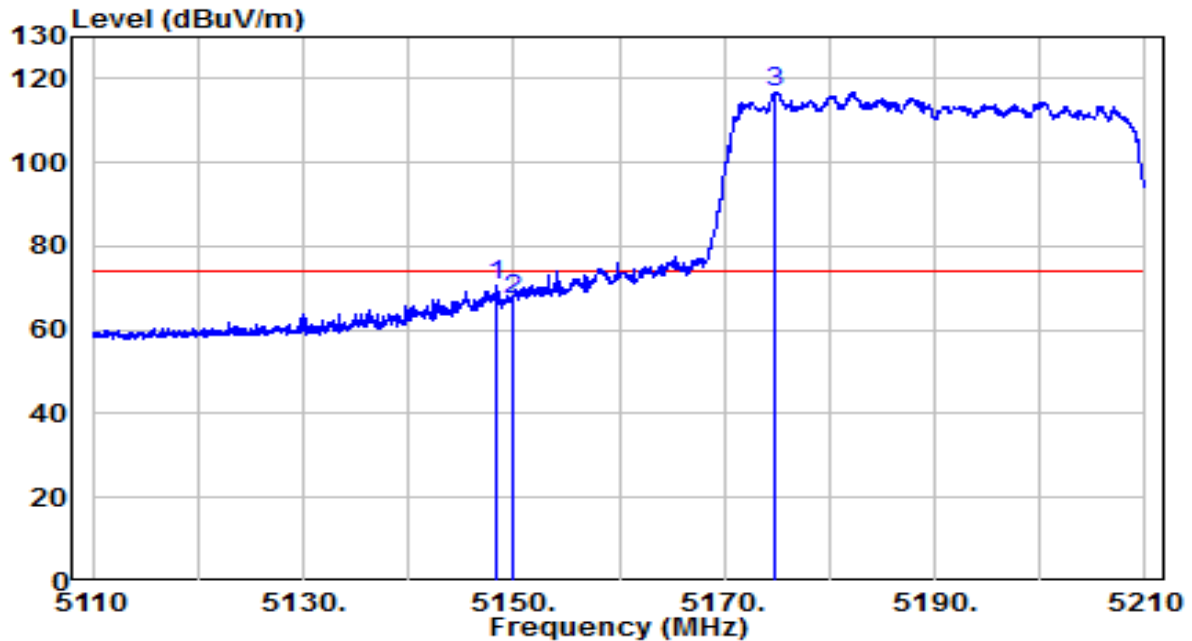


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5148.350        | 50.22          | 20.19    | 70.41                | -3.59       | 74.00          | Peak              |
| 2  | 5150.000        | 46.97          | 20.20    | 67.17                | -6.83       | 74.00          | Peak              |
| 3  | * 5174.900      | 96.60          | 20.24    | 116.84               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5190MHz | Test Voltage         | 120V/60Hz  |

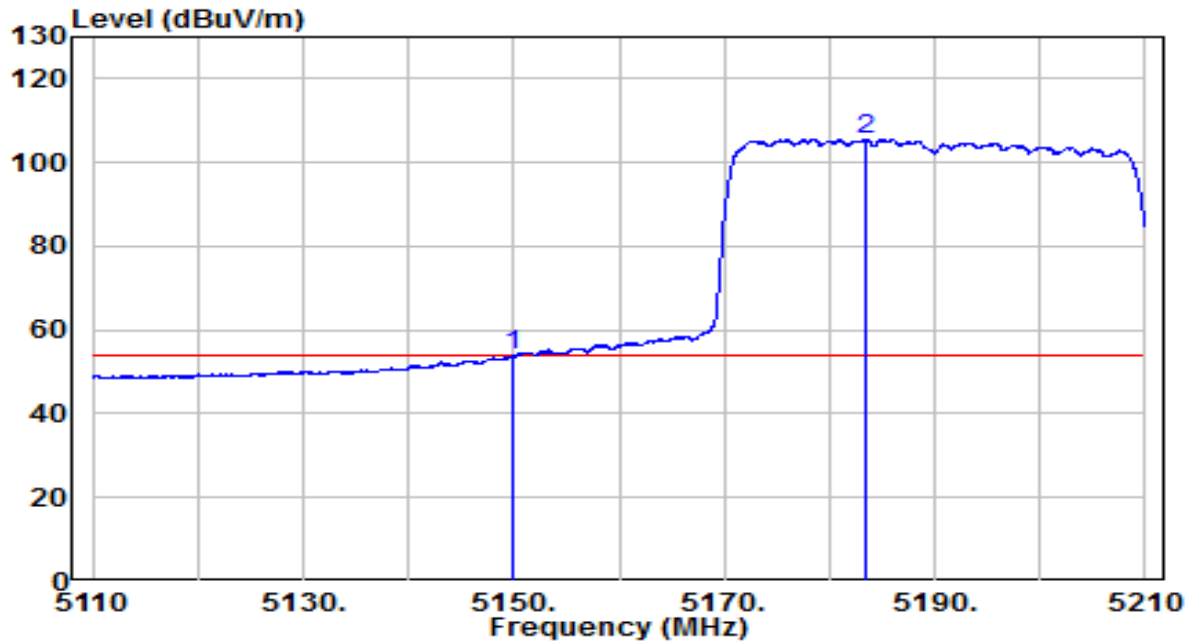


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5150.000        | 33.59          | 20.20    | 53.79                | -0.21       | 54.00          | Average           |
| 2  | * 5183.450      | 85.27          | 20.25    | 105.52               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5310MHz | Test Voltage         | 120V/60Hz  |

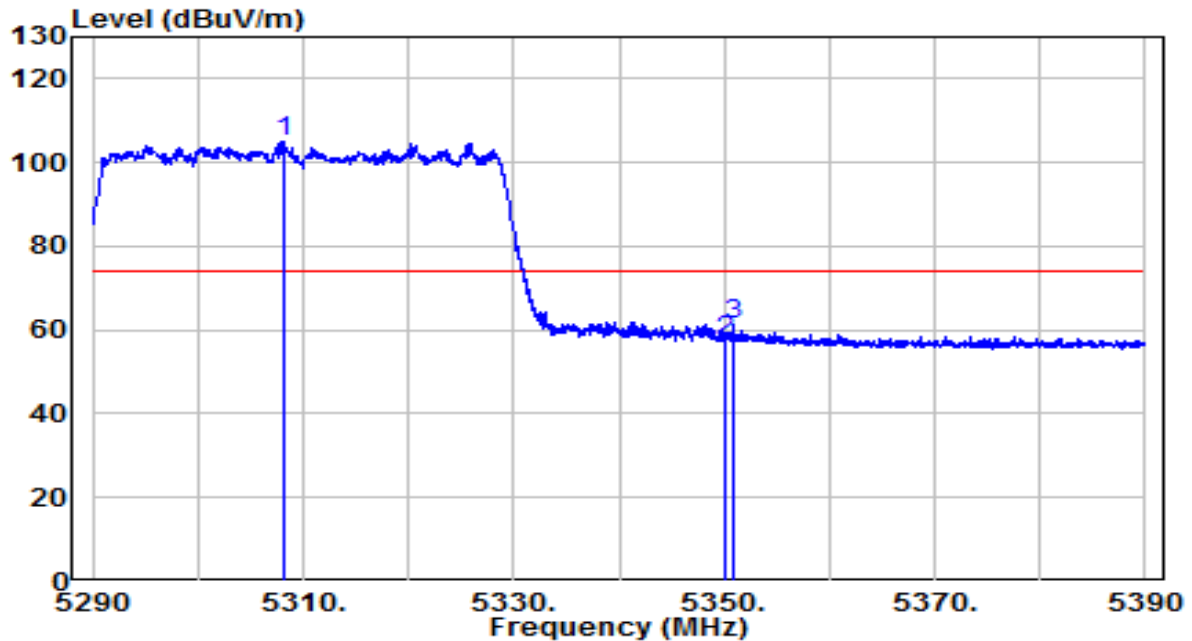


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5308.150        | 84.65          | 20.46    | 105.10               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 37.04          | 20.52    | 57.57                | -16.43      | 74.00          | Peak              |
| 3  |   | 5350.900        | 40.73          | 20.53    | 61.26                | -12.74      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5310MHz | Test Voltage         | 120V/60Hz  |

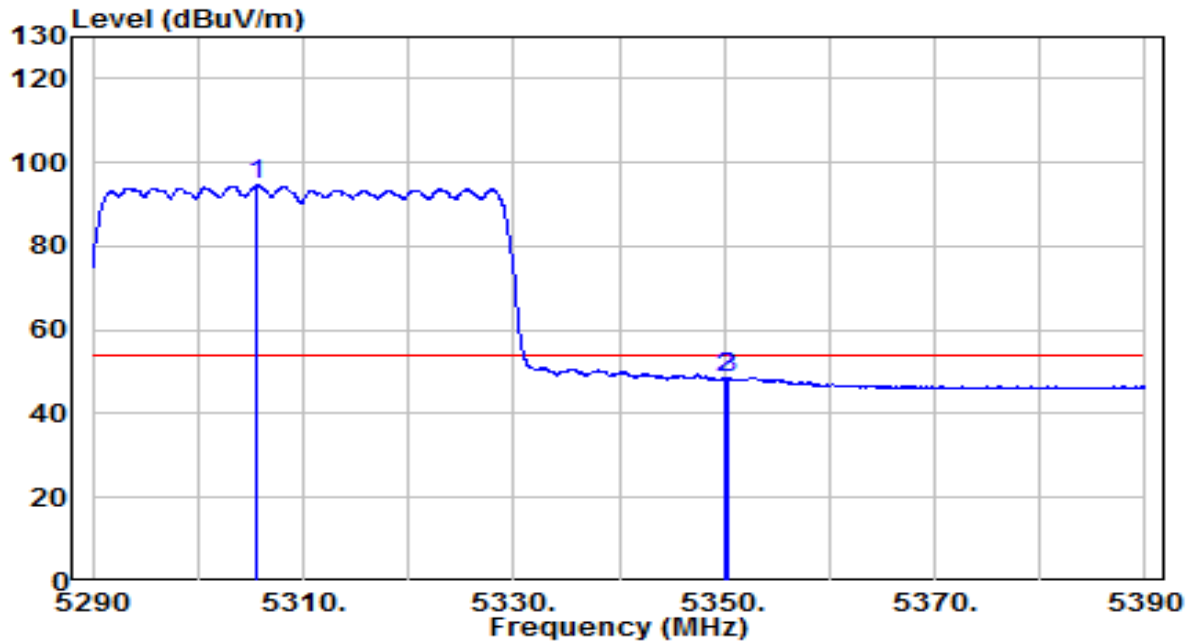


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5305.650        | 74.08          | 20.45    | 94.53                | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 28.01          | 20.52    | 48.53                | -5.47       | 54.00          | Average           |
| 3  |   | 5350.450        | 28.05          | 20.52    | 48.58                | -5.42       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5310MHz | Test Voltage         | 120V/60Hz  |

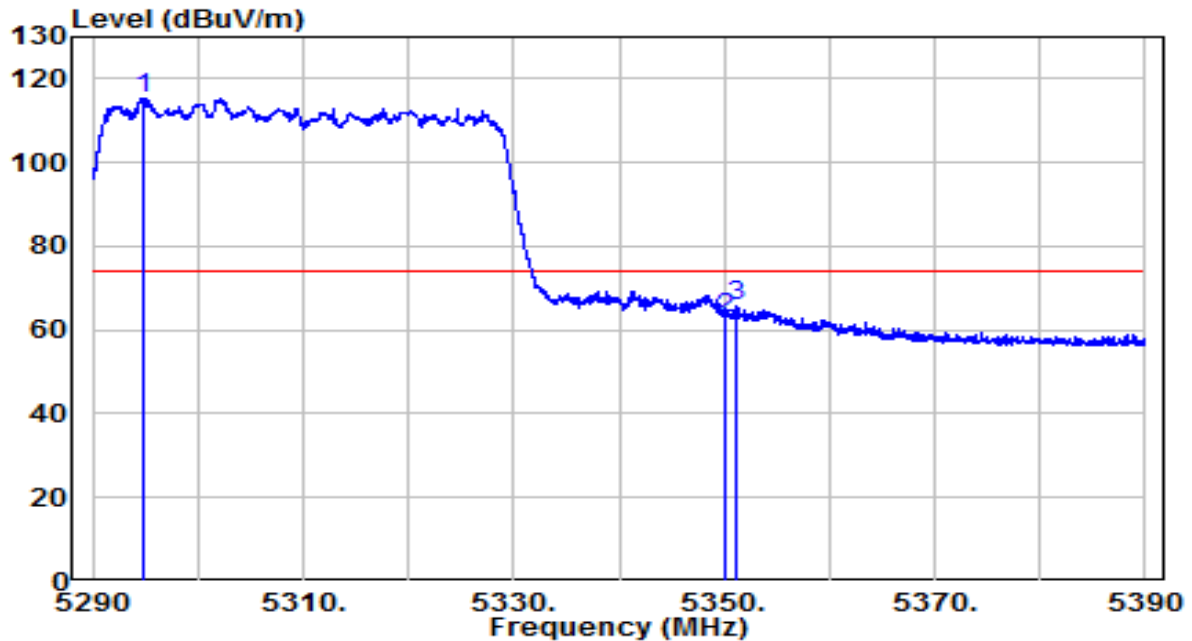


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5294.900        | 94.79          | 20.43    | 115.22               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 42.27          | 20.52    | 62.80                | -11.20      | 74.00          | Peak              |
| 3  |   | 5351.100        | 45.30          | 20.53    | 65.83                | -8.17       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5310MHz | Test Voltage         | 120V/60Hz  |

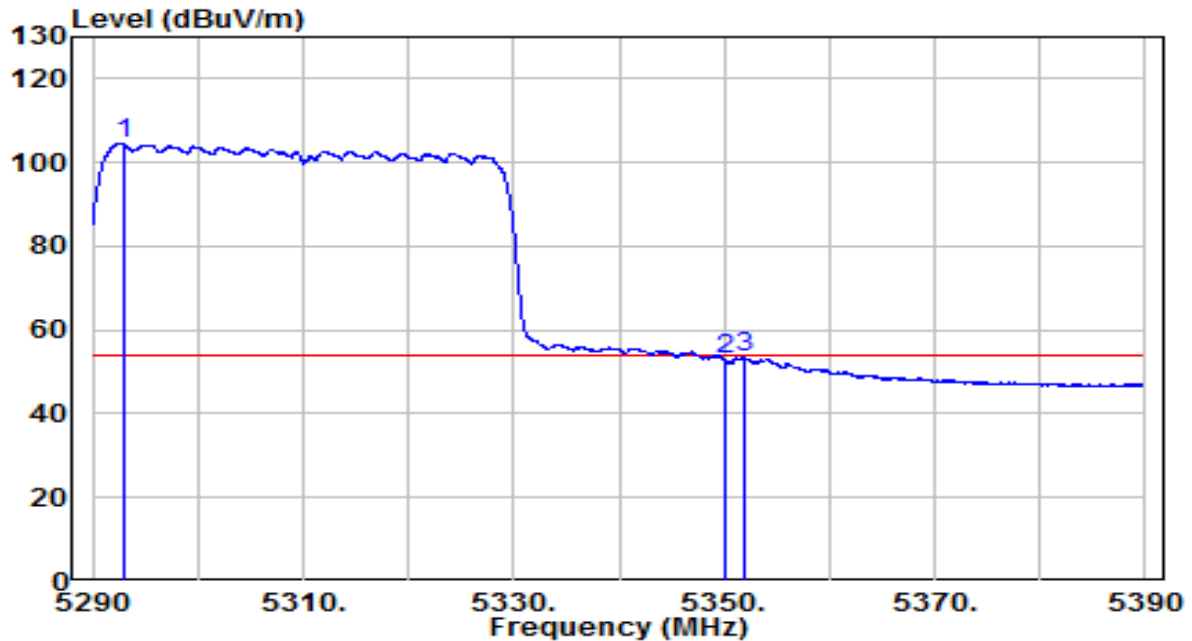


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5292.950        | 83.97          | 20.43    | 104.40               | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 32.24          | 20.52    | 52.77                | -1.23       | 54.00          | Average           |
| 3  |   | 5351.800        | 32.89          | 20.53    | 53.41                | -0.59       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5510MHz | Test Voltage         | 120V/60Hz  |

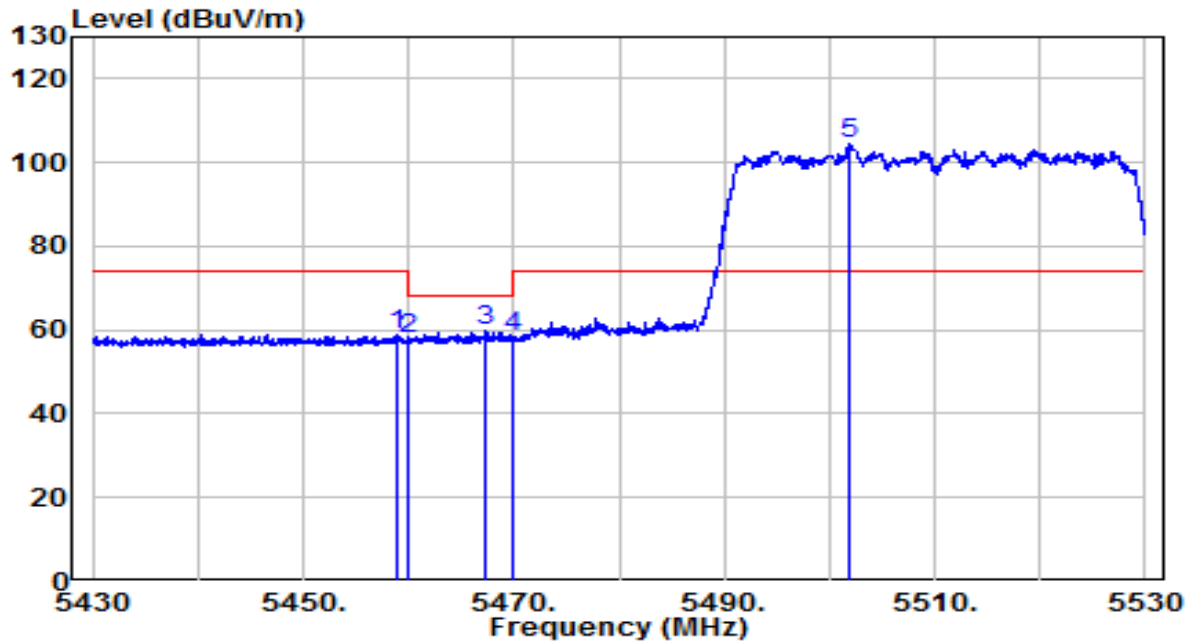


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.000        | 38.27          | 20.70    | 58.98                | -15.02      | 74.00          | Peak              |
| 2  | 5460.000        | 37.25          | 20.70    | 57.96                | -10.24      | 68.20          | Peak              |
| 3  | 5467.250        | 38.89          | 20.72    | 59.61                | -8.59       | 68.20          | Peak              |
| 4  | 5470.000        | 37.44          | 20.72    | 58.16                | -10.04      | 68.20          | Peak              |
| 5  | * 5501.950      | 83.89          | 20.78    | 104.67               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5510MHz | Test Voltage         | 120V/60Hz  |

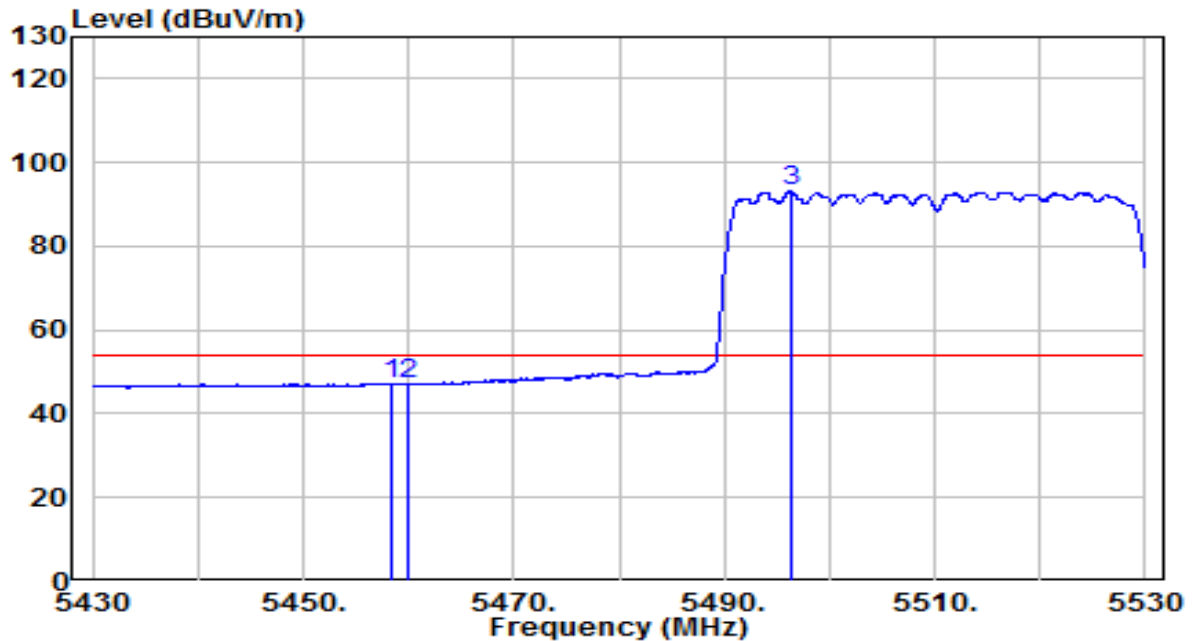


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5458.450        | 26.56          | 20.70    | 47.26                | -6.74       | 54.00          | Average           |
| 2  | 5460.000        | 26.37          | 20.70    | 47.08                | -6.92       | 54.00          | Average           |
| 3  | * 5496.300      | 72.30          | 20.76    | 93.07                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5510MHz | Test Voltage         | 120V/60Hz  |

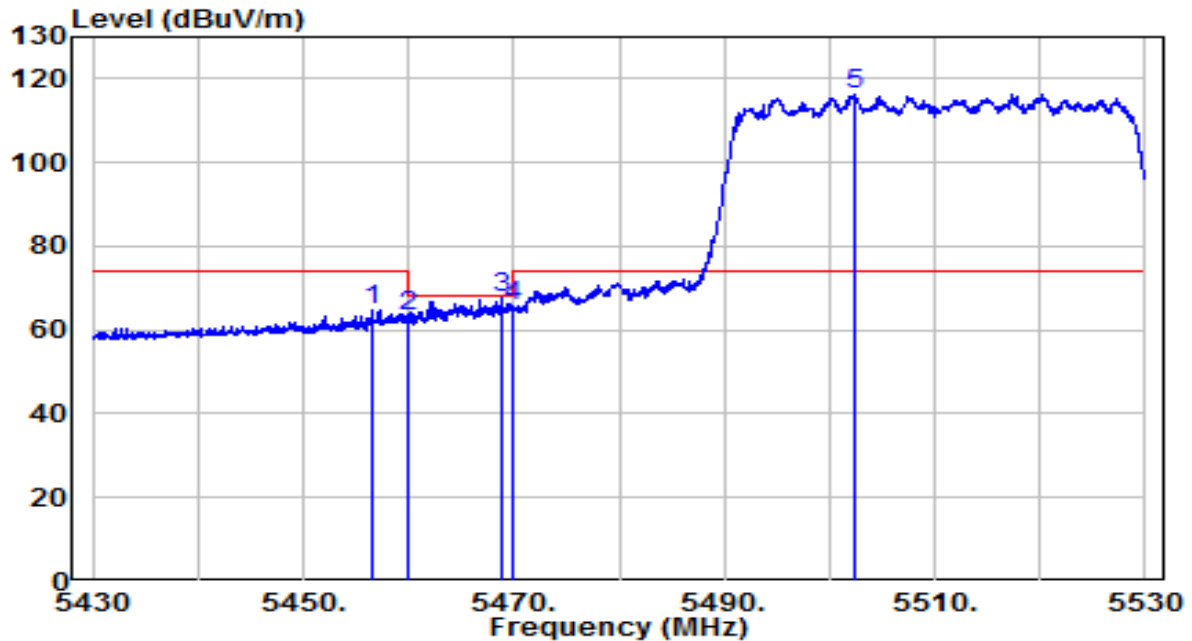


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5456.550        | 44.29          | 20.70    | 64.99                | -9.01       | 74.00          | Peak              |
| 2  | 5460.000        | 42.62          | 20.70    | 63.33                | -4.87       | 68.20          | Peak              |
| 3  | 5468.750        | 47.18          | 20.72    | 67.90                | -0.30       | 68.20          | Peak              |
| 4  | 5470.000        | 45.00          | 20.72    | 65.72                | -2.48       | 68.20          | Peak              |
| 5  | * 5502.350      | 95.53          | 20.78    | 116.31               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5510MHz | Test Voltage         | 120V/60Hz  |

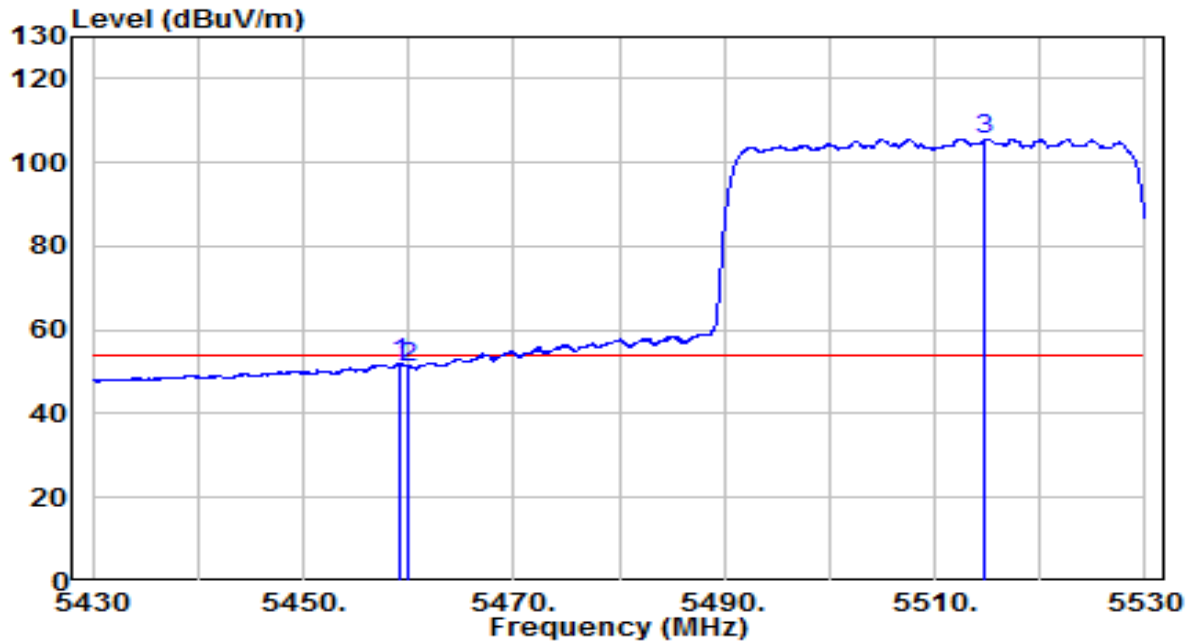


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.100        | 31.33          | 20.70    | 52.04                | -1.96       | 54.00          | Average           |
| 2  | 5460.000        | 30.56          | 20.70    | 51.26                | -2.74       | 54.00          | Average           |
| 3  | * 5514.800      | 84.83          | 20.82    | 105.66               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5670MHz | Test Voltage         | 120V/60Hz  |

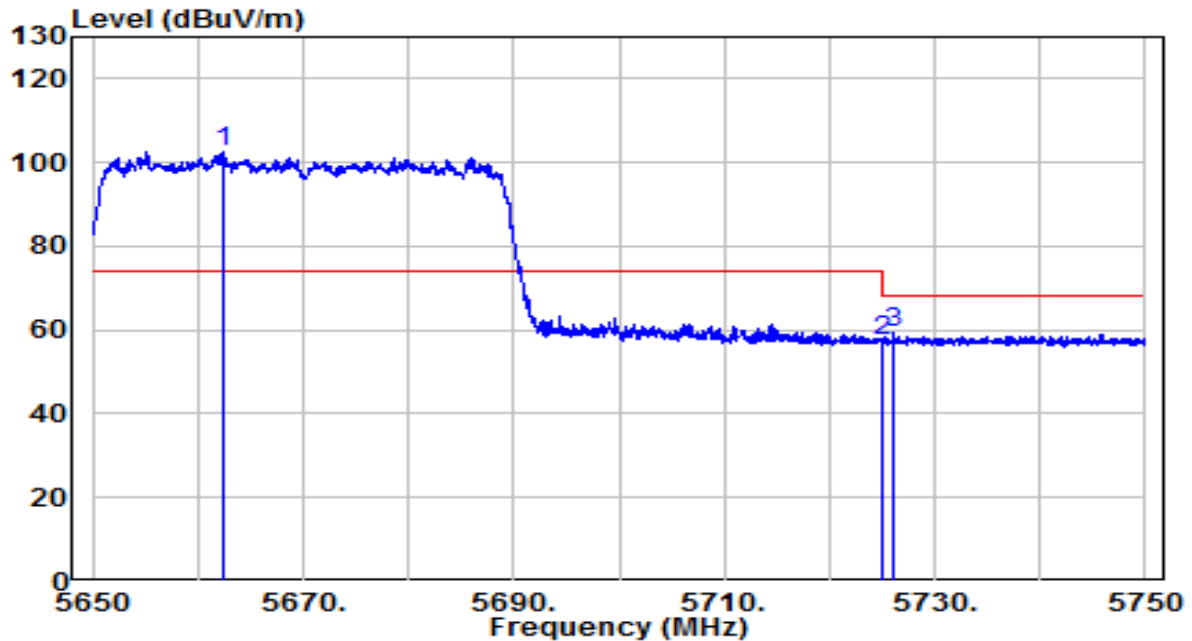


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5662.300        | 81.28          | 21.36    | 102.64               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 35.57          | 21.59    | 57.15                | -11.05      | 68.20          | Peak              |
| 3  |   | 5726.100        | 37.66          | 21.59    | 59.26                | -8.94       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5670MHz | Test Voltage         | 120V/60Hz  |

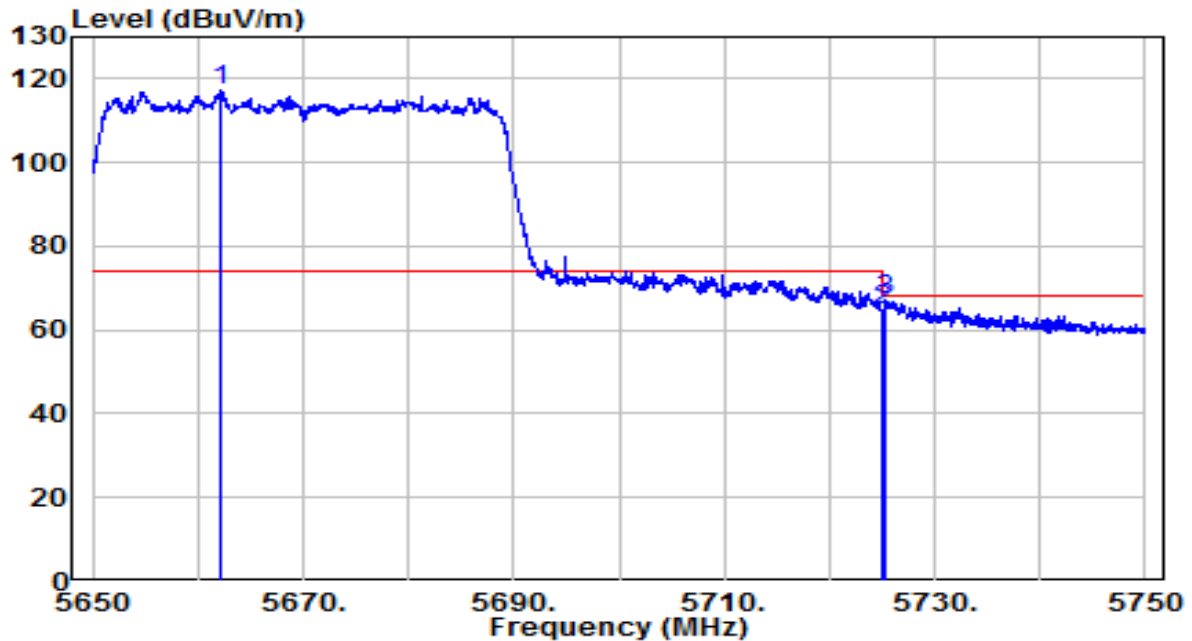


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5662.150        | 95.79          | 21.36    | 117.15               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 43.39          | 21.59    | 64.98                | -3.22       | 68.20          | Peak              |
| 3  |   | 5725.200        | 45.70          | 21.59    | 67.29                | -0.91       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5755MHz | Test Voltage         | 120V/60Hz  |

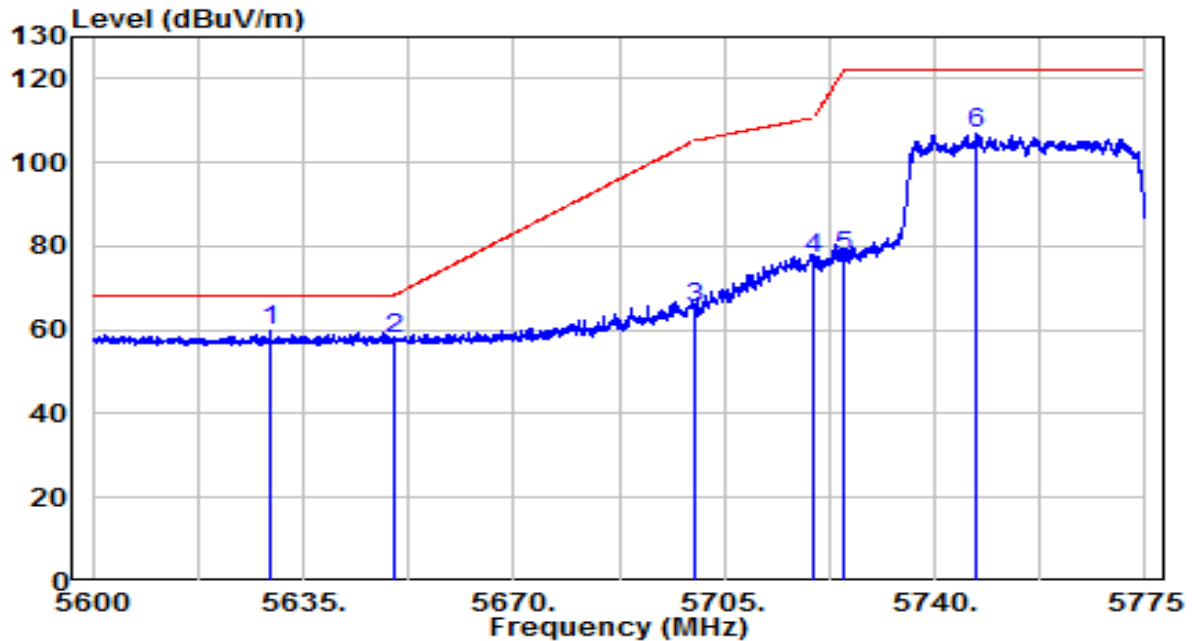


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5629.575        | 38.47          | 21.24    | 59.71                | -8.49       | 68.20          | Peak              |
| 2  |   | 5650.000        | 36.37          | 21.32    | 57.68                | -10.52      | 68.20          | Peak              |
| 3  |   | 5700.000        | 43.72          | 21.50    | 65.22                | -39.98      | 105.20         | Peak              |
| 4  |   | 5720.000        | 55.27          | 21.57    | 76.84                | -33.96      | 110.80         | Peak              |
| 5  |   | 5725.000        | 55.99          | 21.59    | 77.58                | -44.62      | 122.20         | Peak              |
| 6  |   | 5746.913        | 85.46          | 21.67    | 107.13               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5755MHz | Test Voltage         | 120V/60Hz  |

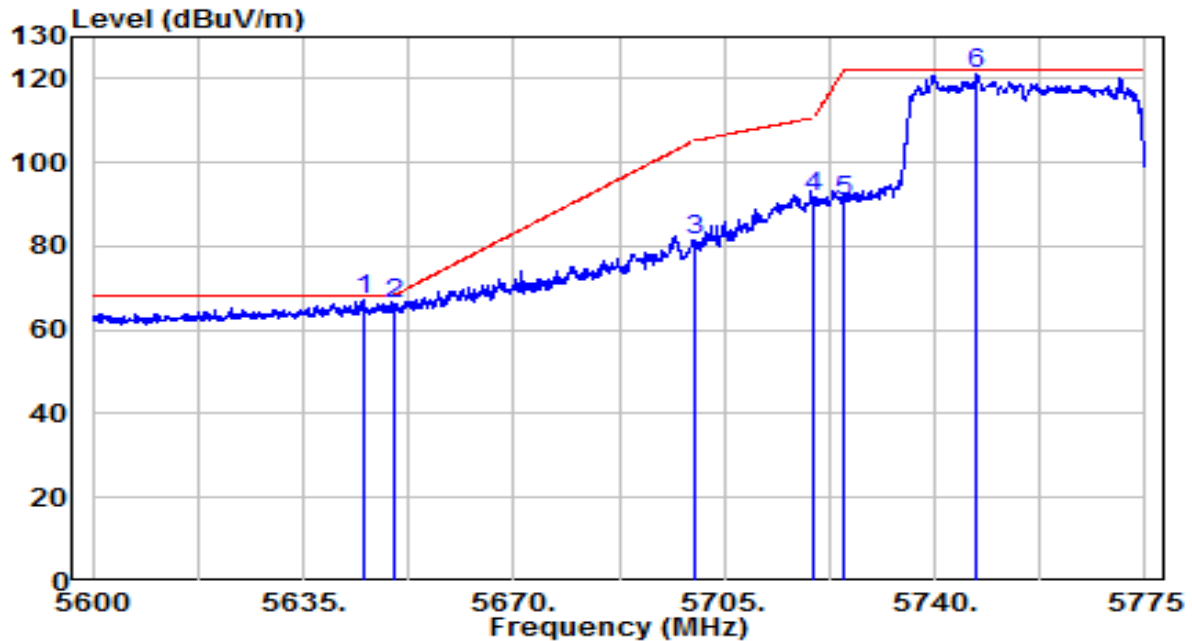


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5645.063        | 46.12          | 21.30    | 67.42                | -0.78       | 68.20          | Peak              |
| 2  |   | 5649.962        | 44.86          | 21.32    | 66.17                | -2.03       | 68.20          | Peak              |
| 3  |   | 5700.000        | 59.71          | 21.50    | 81.21                | -23.99      | 105.20         | Peak              |
| 4  |   | 5720.000        | 70.16          | 21.57    | 91.73                | -19.07      | 110.80         | Peak              |
| 5  |   | 5725.000        | 69.24          | 21.59    | 90.83                | -31.37      | 122.20         | Peak              |
| 6  |   | 5747.087        | 99.32          | 21.67    | 120.99               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5795MHz | Test Voltage         | 120V/60Hz  |

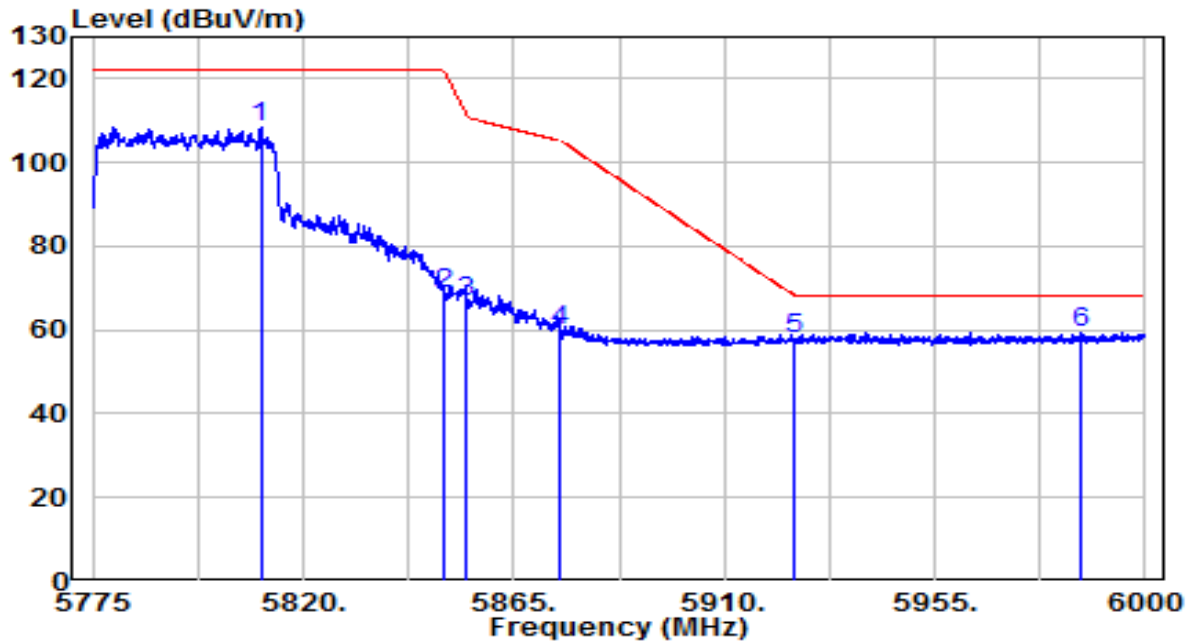


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5810.888        | 86.51          | 21.90    | 108.41               | N/A         | N/A            | Peak              |
| 2  | 5850.000        | 46.40          | 22.04    | 68.45                | -53.75      | 122.20         | Peak              |
| 3  | 5855.000        | 44.81          | 22.06    | 66.88                | -43.92      | 110.80         | Peak              |
| 4  | 5875.000        | 37.88          | 22.14    | 60.01                | -45.19      | 105.20         | Peak              |
| 5  | 5925.000        | 35.51          | 22.32    | 57.82                | -10.38      | 68.20          | Peak              |
| 6  | * 5986.388      | 37.00          | 22.54    | 59.54                | -8.66       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5795MHz | Test Voltage         | 120V/60Hz  |

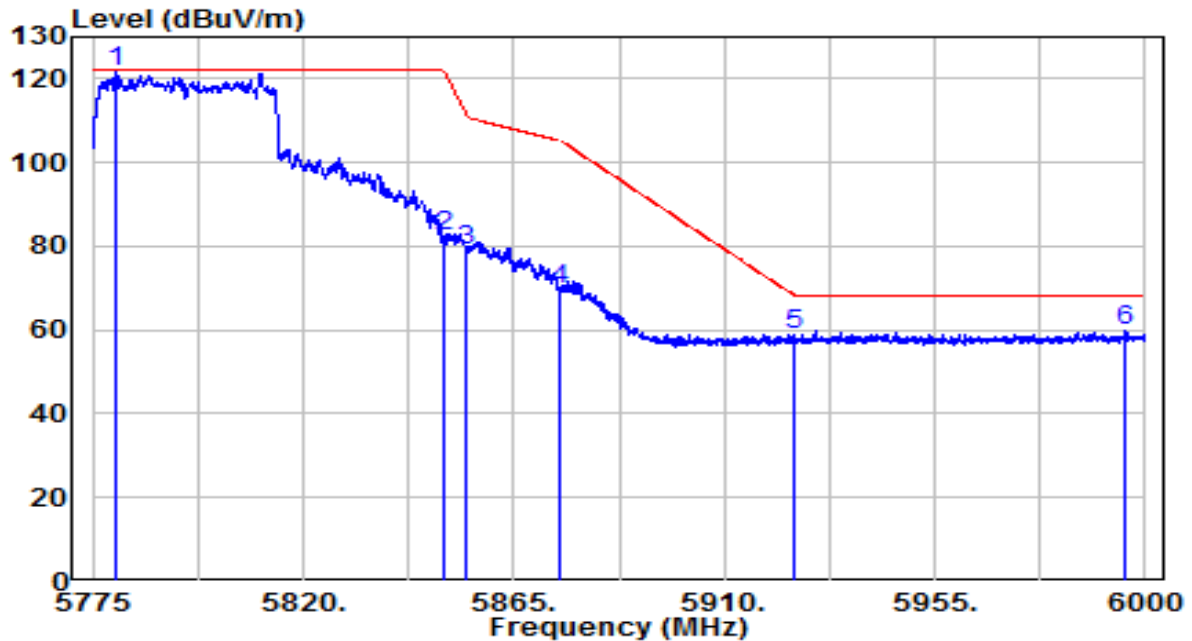


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5780.063        | 99.66          | 21.79    | 121.45               | N/A         | N/A            | Peak              |
| 2  |   | 5850.000        | 60.26          | 22.04    | 82.30                | -39.90      | 122.20         | Peak              |
| 3  |   | 5855.000        | 56.82          | 22.06    | 78.88                | -31.92      | 110.80         | Peak              |
| 4  |   | 5875.000        | 47.45          | 22.14    | 69.59                | -35.61      | 105.20         | Peak              |
| 5  |   | 5925.000        | 36.53          | 22.32    | 58.84                | -9.36       | 68.20          | Peak              |
| 6  |   | 5995.950        | 37.27          | 22.58    | 59.85                | -8.35       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5210MHz | Test Voltage         | 120V/60Hz  |

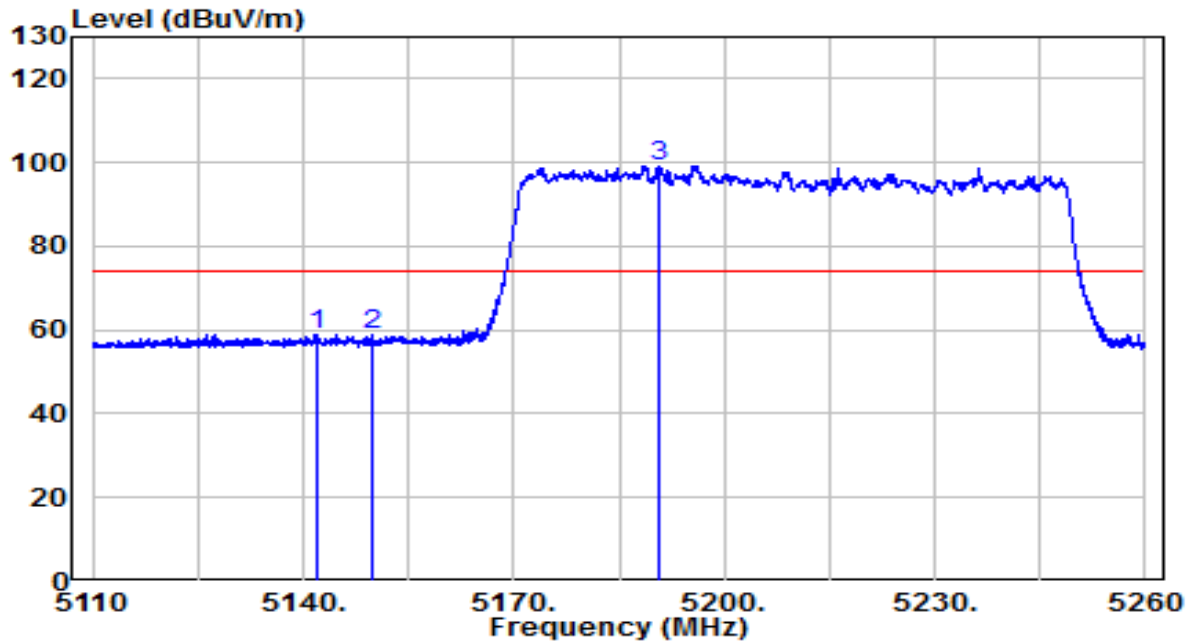


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5141.950        | 38.80          | 20.18    | 58.98                | -15.02      | 74.00          | Peak              |
| 2  | 5150.000        | 38.65          | 20.20    | 58.85                | -15.15      | 74.00          | Peak              |
| 3  | * 5190.775      | 79.03          | 20.26    | 99.29                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5210MHz | Test Voltage         | 120V/60Hz  |

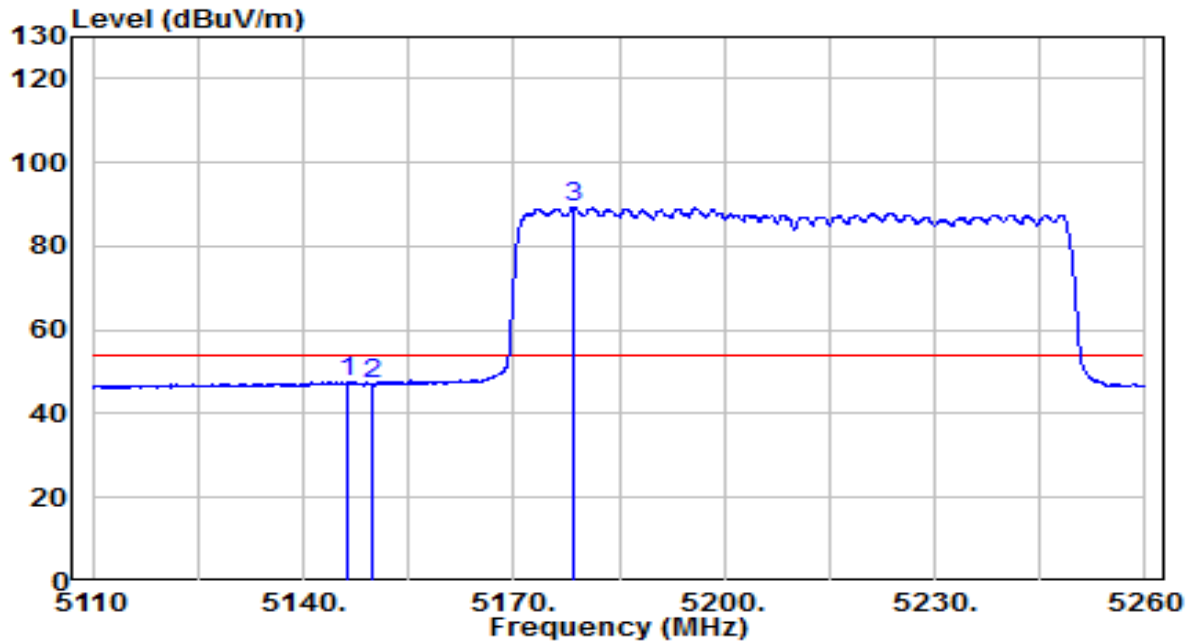


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5146.225        | 27.34          | 20.19    | 47.53                | -6.47       | 54.00          | Average           |
| 2  | 5150.000        | 26.71          | 20.20    | 46.91                | -7.09       | 54.00          | Average           |
| 3  | * 5178.475      | 69.15          | 20.24    | 89.39                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5210MHz | Test Voltage         | 120V/60Hz  |

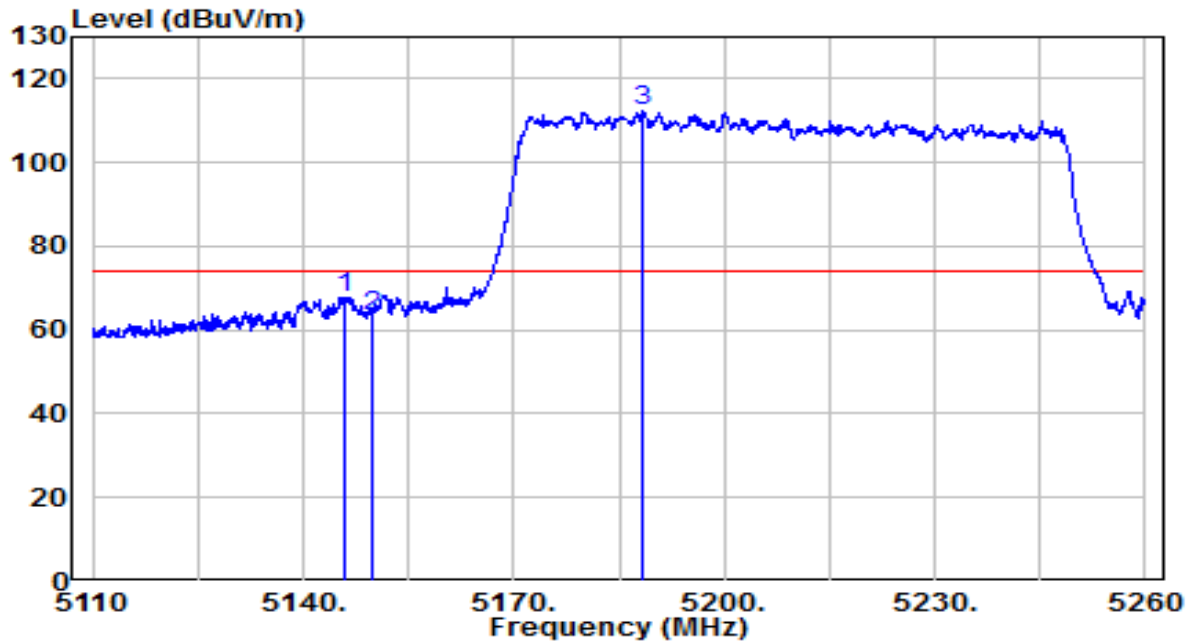


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5145.925        | 47.73          | 20.19    | 67.92                | -6.08       | 74.00          | Peak              |
| 2  | 5150.000        | 43.27          | 20.20    | 63.47                | -10.53      | 74.00          | Peak              |
| 3  | * 5188.525      | 91.97          | 20.26    | 112.23               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5210MHz | Test Voltage         | 120V/60Hz  |

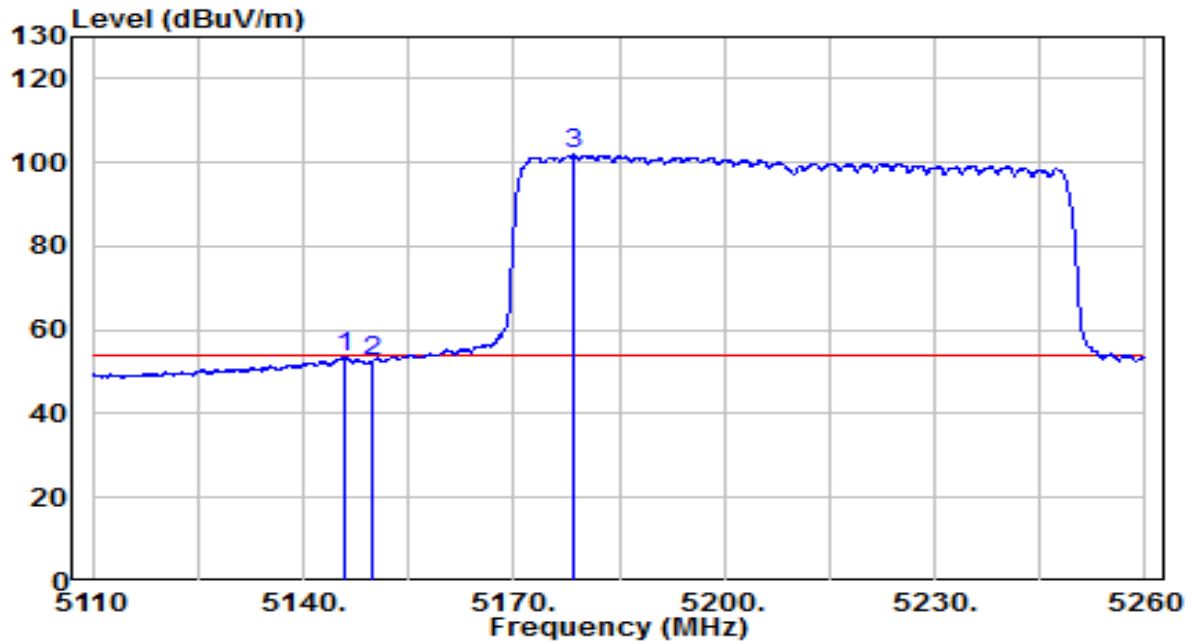


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5145.850        | 33.38          | 20.19    | 53.57                | -0.43       | 54.00          | Average           |
| 2  | 5150.000        | 32.47          | 20.20    | 52.66                | -1.34       | 54.00          | Average           |
| 3  | * 5178.400      | 81.60          | 20.24    | 101.85               | N/A         | N/A            | Average           |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5290MHz | Test Voltage         | 120V/60Hz  |

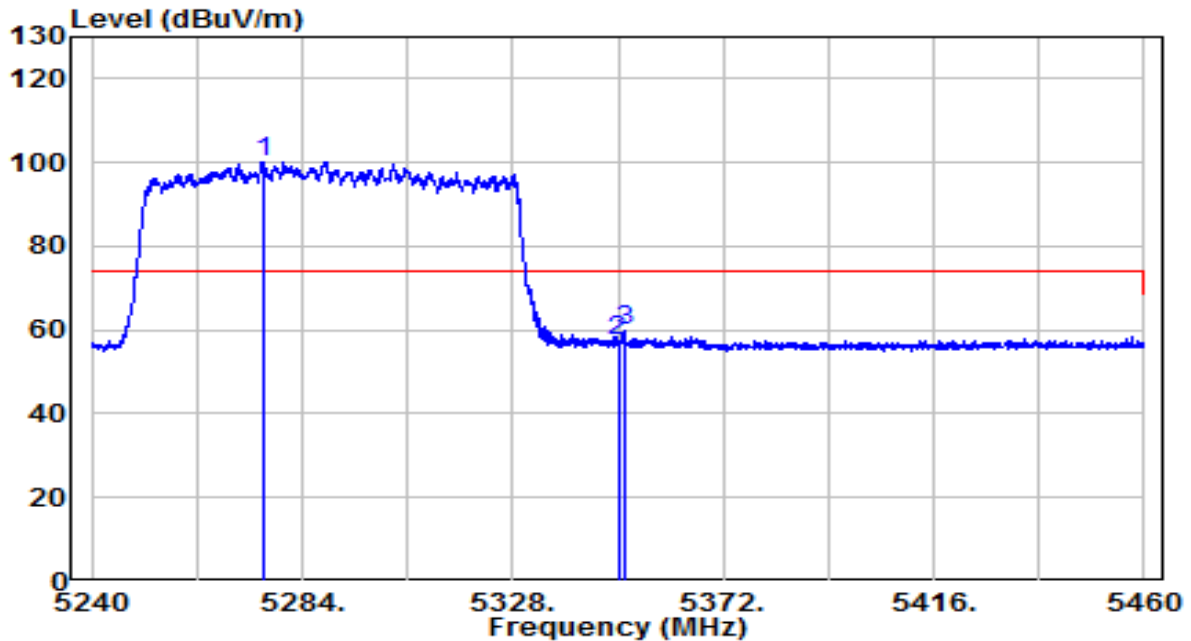


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5275.750        | 79.88          | 20.40    | 100.29               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 37.01          | 20.52    | 57.54                | -16.46      | 74.00          | Peak              |
| 3  |   | 5351.210        | 39.39          | 20.53    | 59.92                | -14.08      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5290MHz | Test Voltage         | 120V/60Hz  |

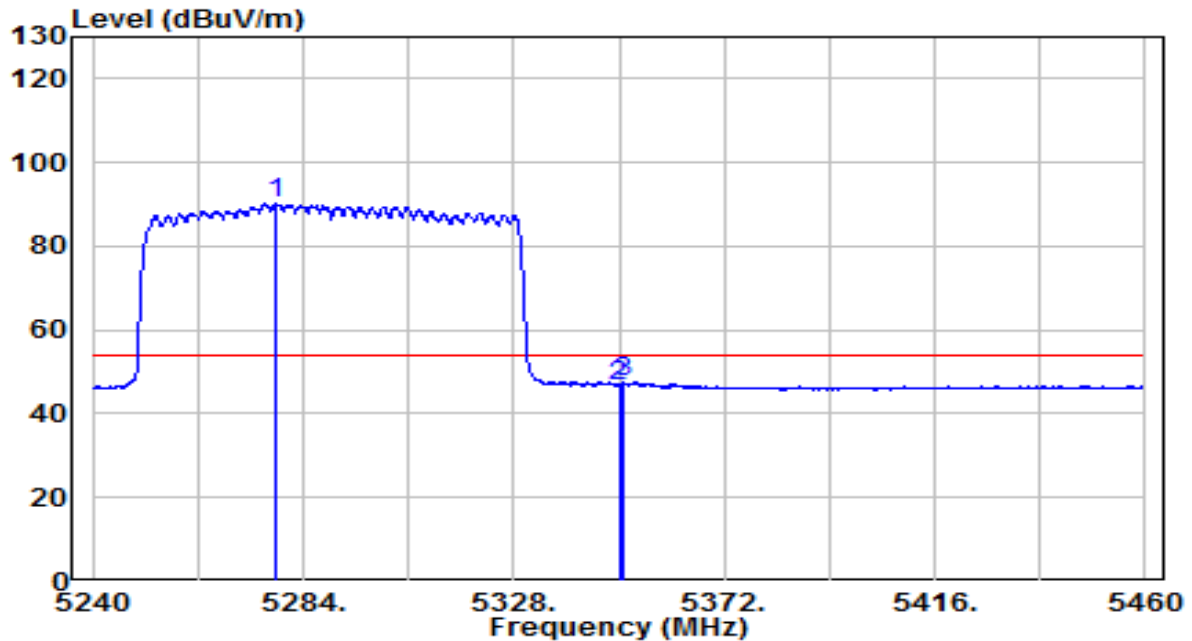


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5278.170        | 69.86          | 20.41    | 90.27                | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 26.22          | 20.52    | 46.74                | -7.26       | 54.00          | Average           |
| 3  |   | 5351.100        | 27.13          | 20.53    | 47.66                | -6.34       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5290MHz | Test Voltage         | 120V/60Hz  |

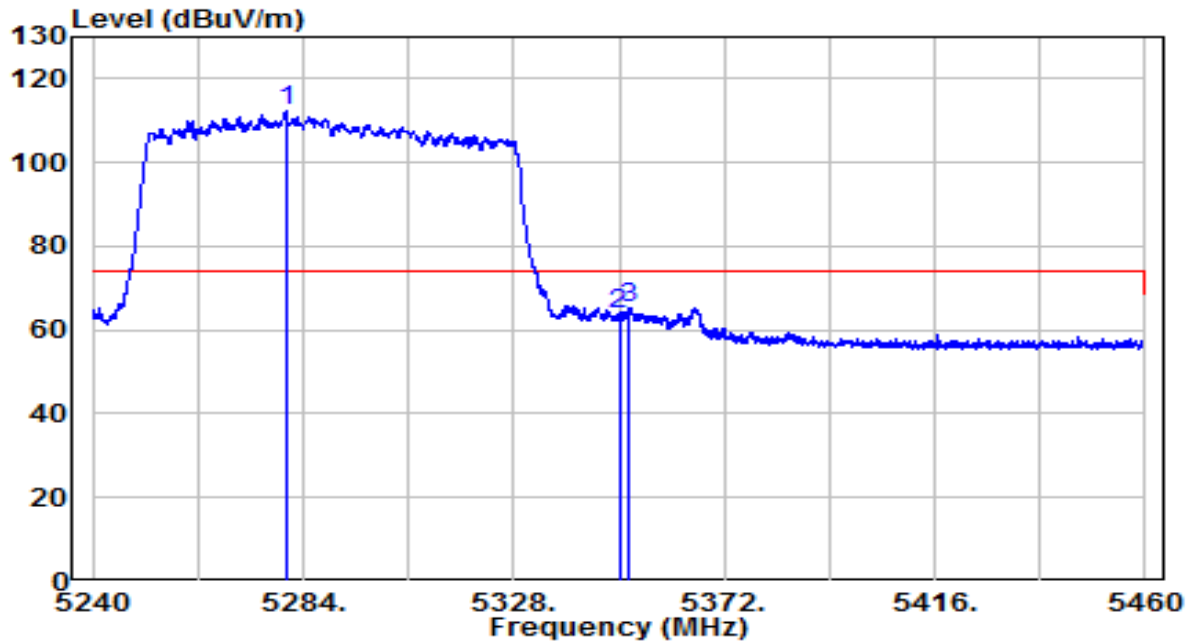


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5280.370        | 91.85          | 20.41    | 112.26               | N/A         | N/A            | Peak              |
| 2  |   | 5350.000        | 43.02          | 20.52    | 63.54                | -10.46      | 74.00          | Peak              |
| 3  |   | 5352.090        | 44.86          | 20.53    | 65.39                | -8.61       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5290MHz | Test Voltage         | 120V/60Hz  |

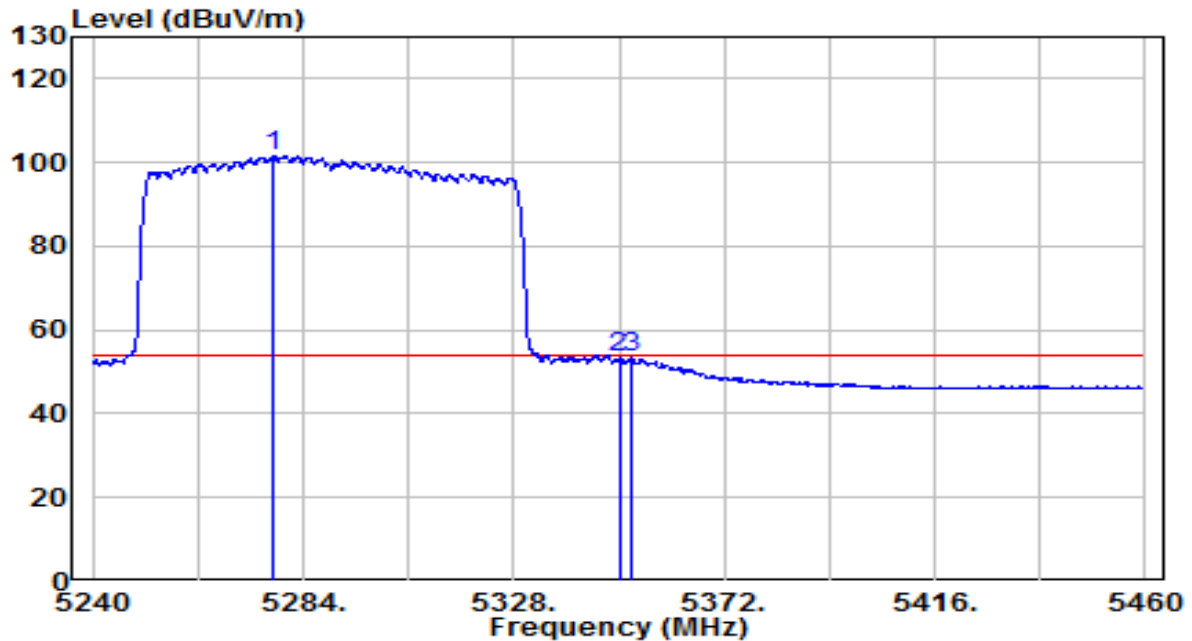


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5277.840        | 81.18          | 20.41    | 101.59               | N/A         | N/A            | Average           |
| 2  |   | 5350.000        | 32.72          | 20.52    | 53.25                | -0.75       | 54.00          | Average           |
| 3  |   | 5352.530        | 33.01          | 20.53    | 53.54                | -0.46       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5530MHz | Test Voltage         | 120V/60Hz  |

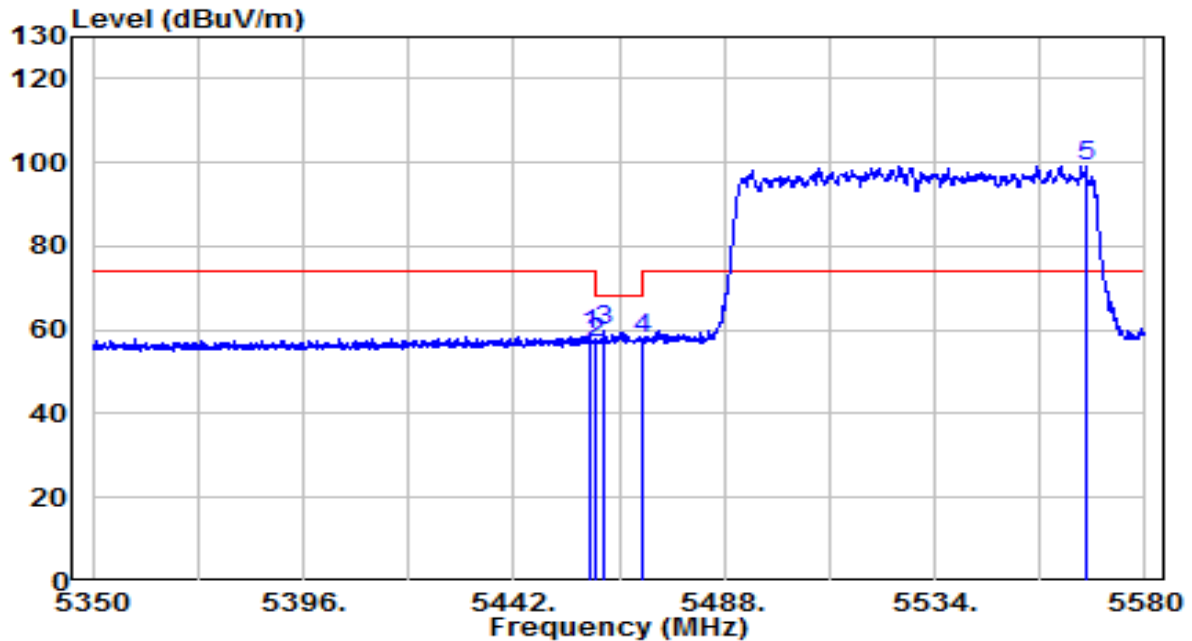


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5458.790        | 38.34          | 20.70    | 59.04                | -14.96      | 74.00          | Peak              |
| 2  | 5460.000        | 36.16          | 20.70    | 56.86                | -11.34      | 68.20          | Peak              |
| 3  | 5461.895        | 38.96          | 20.71    | 59.66                | -8.54       | 68.20          | Peak              |
| 4  | 5470.000        | 37.09          | 20.72    | 57.81                | -10.39      | 68.20          | Peak              |
| 5  | * 5567.005      | 78.29          | 21.01    | 99.30                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5530MHz | Test Voltage         | 120V/60Hz  |

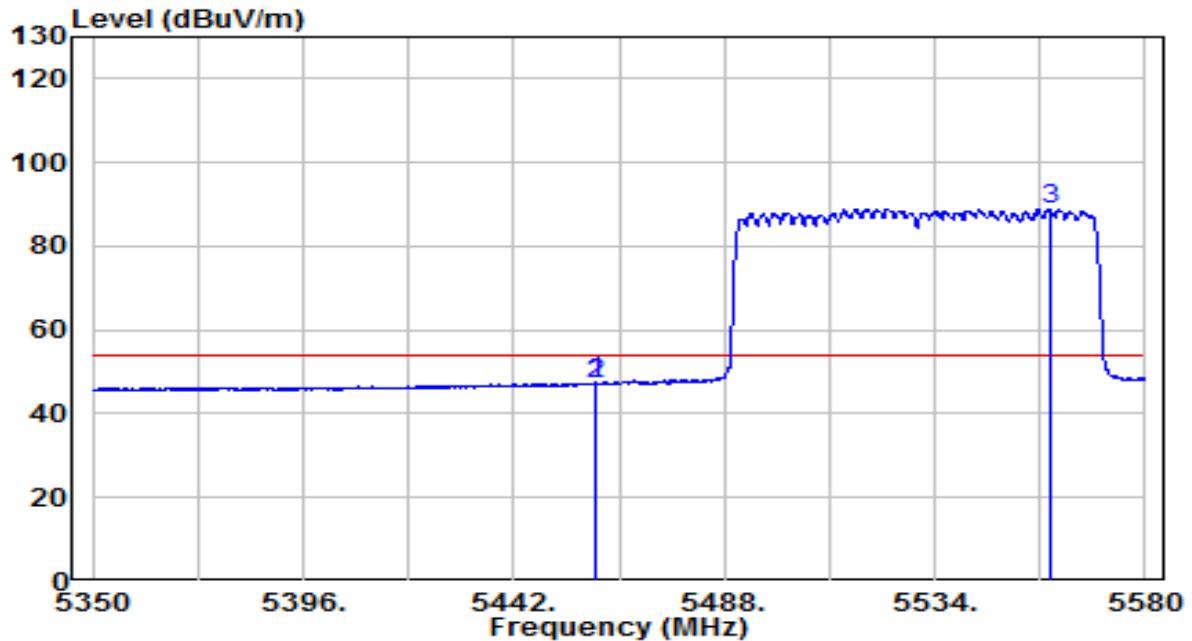


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.710        | 26.74          | 20.70    | 47.44                | -6.56       | 54.00          | Average           |
| 2  | 5460.055        | 26.32          | 20.70    | 47.03                | -6.97       | 54.00          | Average           |
| 3  | * 5559.185      | 67.84          | 20.99    | 88.82                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5530MHz | Test Voltage         | 120V/60Hz  |

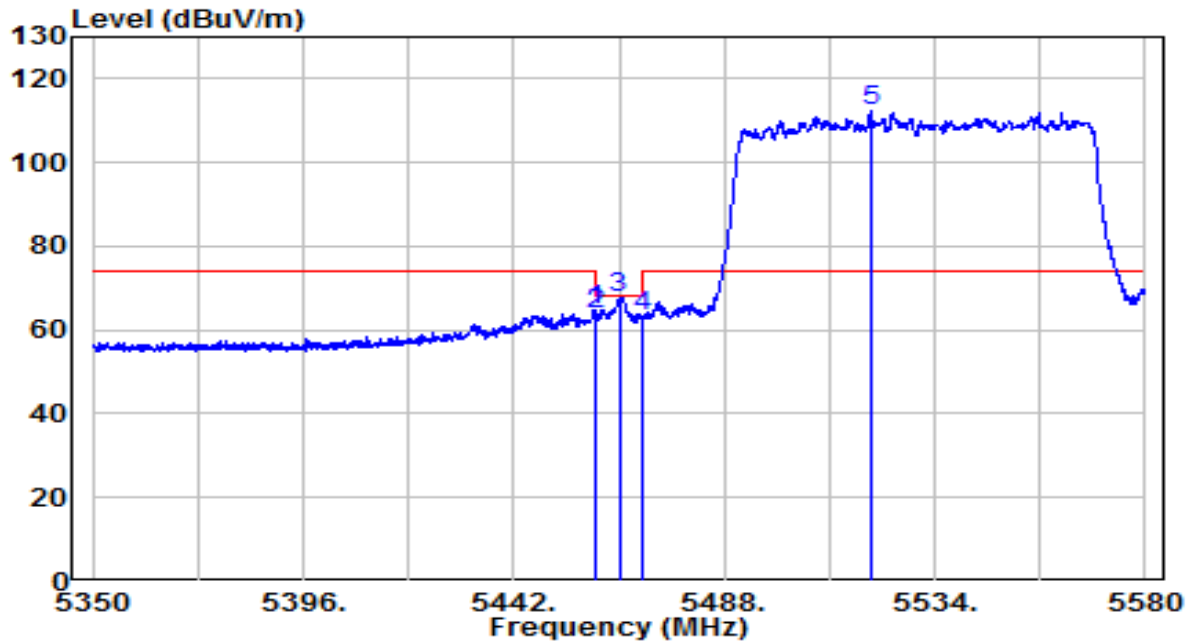


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5459.940        | 44.02          | 20.70    | 64.72                | -9.28       | 74.00          | Peak              |
| 2  | 5460.000        | 42.96          | 20.70    | 63.66                | -4.54       | 68.20          | Peak              |
| 3  | 5465.000        | 47.18          | 20.71    | 67.89                | -0.31       | 68.20          | Peak              |
| 4  | 5470.000        | 42.79          | 20.72    | 63.51                | -4.69       | 68.20          | Peak              |
| 5  | * 5520.085      | 91.32          | 20.84    | 112.16               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5530MHz | Test Voltage         | 120V/60Hz  |

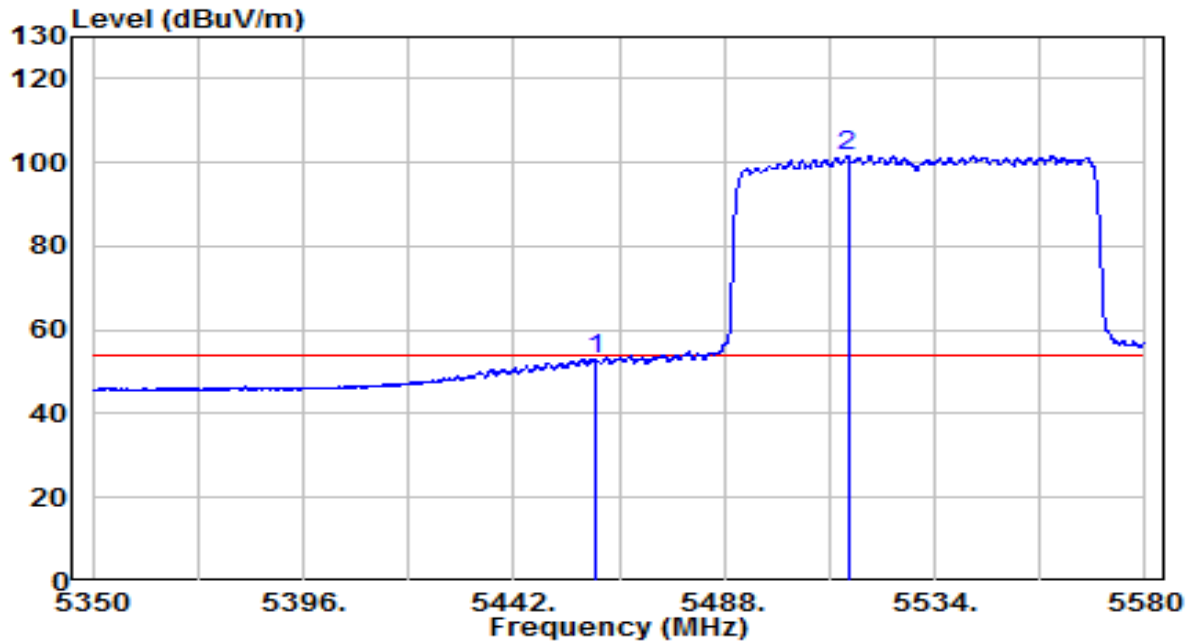


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5460.000        | 32.14          | 20.70    | 52.84                | -1.16       | 54.00          | Average           |
| 2  | * 5515.025      | 80.85          | 20.82    | 101.67               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5610MHz | Test Voltage         | 120V/60Hz  |

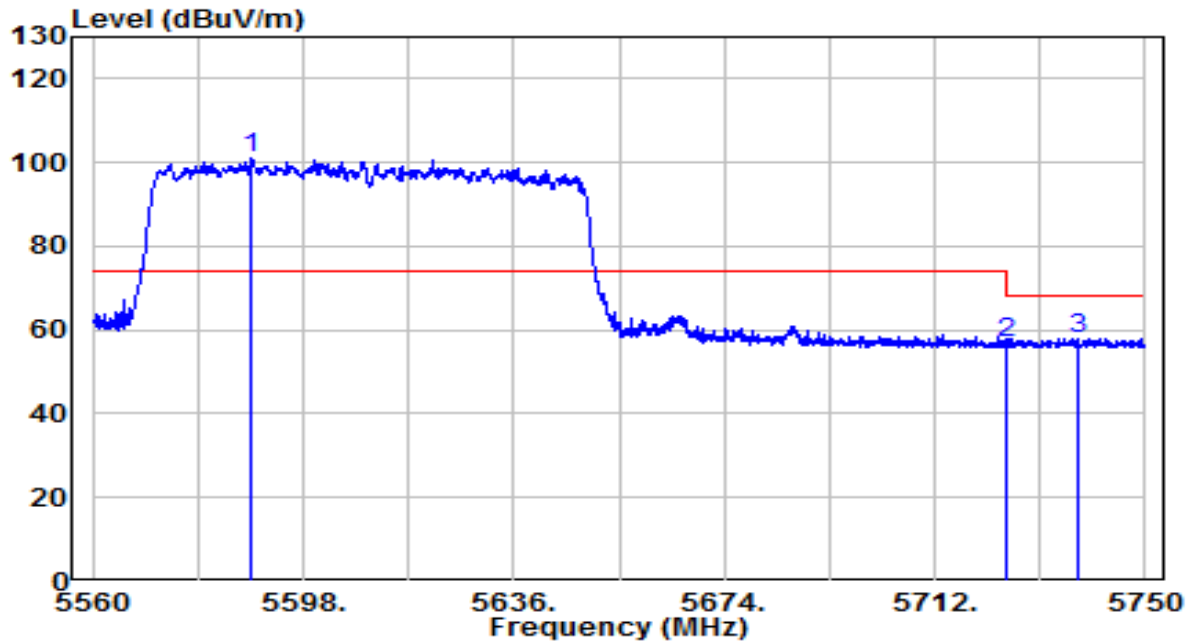


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5588.595        | 79.79          | 21.09    | 100.89               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 35.16          | 21.59    | 56.75                | -11.45      | 68.20          | Peak              |
| 3  |   | 5737.650        | 36.38          | 21.64    | 58.02                | -10.18      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 26.2°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5610MHz | Test Voltage         | 120V/60Hz  |

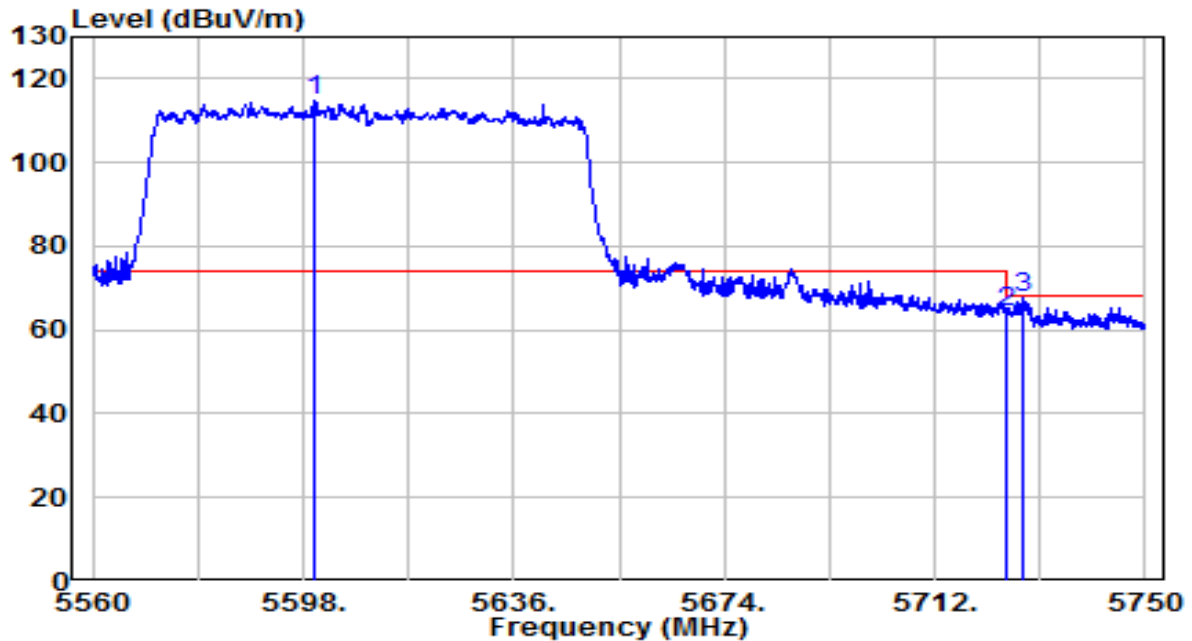


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5599.995        | 93.65          | 21.13    | 114.78               | N/A         | N/A            | Peak              |
| 2  |   | 5725.000        | 42.65          | 21.59    | 64.24                | -3.96       | 68.20          | Peak              |
| 3  |   | 5728.150        | 46.04          | 21.60    | 67.64                | -0.56       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5775MHz | Test Voltage         | 120V/60Hz  |

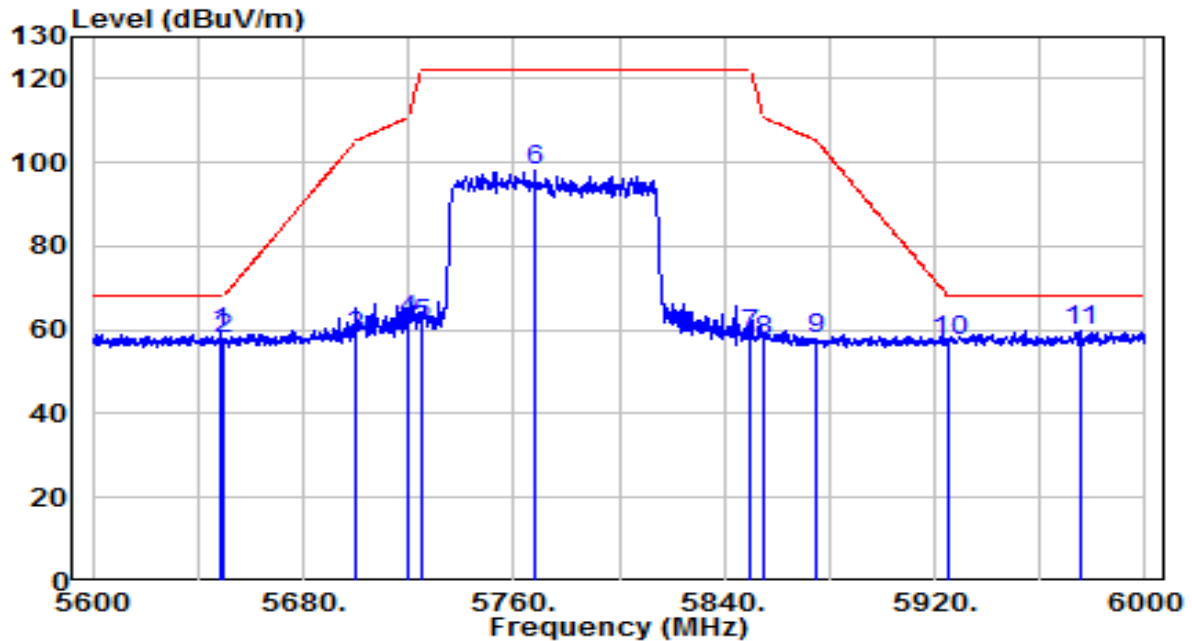

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5648.400        | 37.82          | 21.31    | 59.13                | -9.07       | 68.20          | Peak              |
| 2  | 5650.000        | 36.70          | 21.32    | 58.02                | -10.18      | 68.20          | Peak              |
| 3  | 5700.000        | 36.79          | 21.50    | 58.29                | -46.91      | 105.20         | Peak              |
| 4  | 5720.000        | 40.94          | 21.57    | 62.51                | -48.29      | 110.80         | Peak              |
| 5  | 5725.000        | 39.87          | 21.59    | 61.46                | -60.74      | 122.20         | Peak              |
| 6  | 5767.800        | 76.17          | 21.74    | 97.92                | N/A         | N/A            | Peak              |
| 7  | 5850.000        | 36.67          | 22.04    | 58.71                | -63.49      | 122.20         | Peak              |
| 8  | 5855.000        | 35.17          | 22.06    | 57.24                | -53.56      | 110.80         | Peak              |
| 9  | 5875.000        | 35.87          | 22.14    | 58.00                | -47.20      | 105.20         | Peak              |
| 10 | 5925.000        | 35.02          | 22.32    | 57.34                | -10.86      | 68.20          | Peak              |
| 11 | * 5975.000      | 37.24          | 22.50    | 59.74                | -8.46       | 68.20          | Peak              |


Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).

3.  $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$ .

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |            |
|-----------|----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router               | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 24.1°C/43% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5775MHz | Test Voltage         | 120V/60Hz  |

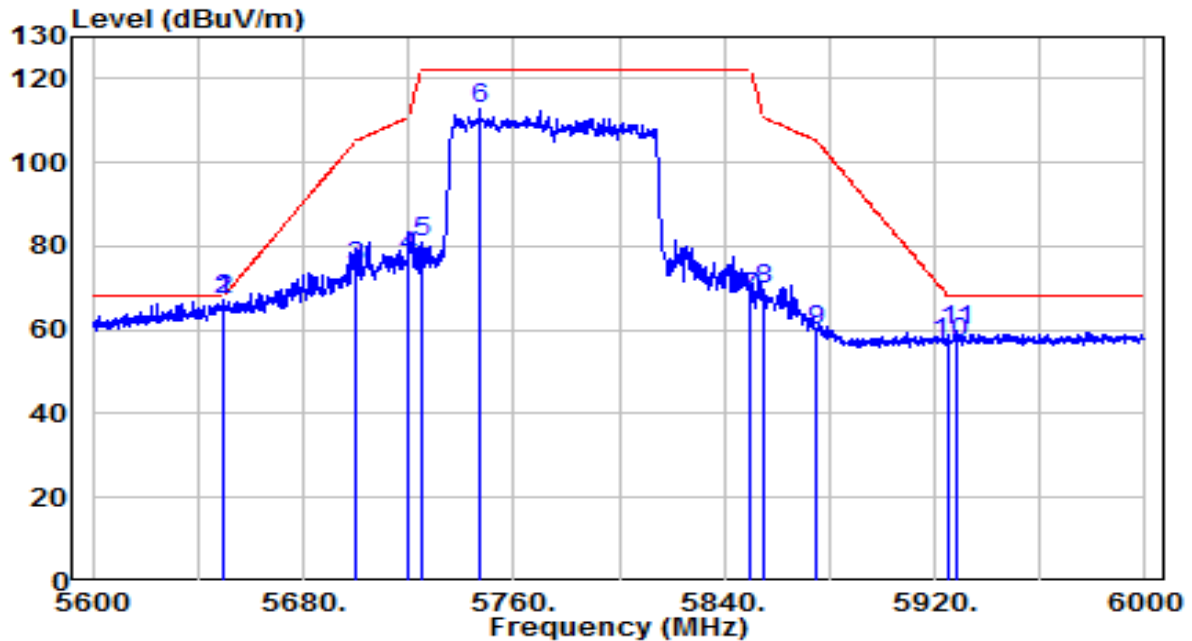

| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 5649.800        | 45.73          | 21.32    | 67.05                | -1.15       | 68.20          | Peak              |
| 2  |   | 5650.000        | 45.68          | 21.32    | 67.00                | -1.20       | 68.20          | Peak              |
| 3  |   | 5700.000        | 53.78          | 21.50    | 75.28                | -29.92      | 105.20         | Peak              |
| 4  |   | 5720.000        | 56.12          | 21.57    | 77.69                | -33.11      | 110.80         | Peak              |
| 5  |   | 5725.000        | 59.49          | 21.59    | 81.08                | -41.12      | 122.20         | Peak              |
| 6  |   | 5747.200        | 90.99          | 21.67    | 112.66               | N/A         | N/A            | Peak              |
| 7  |   | 5850.000        | 45.50          | 22.04    | 67.54                | -54.66      | 122.20         | Peak              |
| 8  |   | 5855.000        | 47.46          | 22.06    | 69.52                | -41.28      | 110.80         | Peak              |
| 9  |   | 5875.000        | 37.84          | 22.14    | 59.97                | -45.23      | 105.20         | Peak              |
| 10 |   | 5925.000        | 34.55          | 22.32    | 56.87                | -11.33      | 68.20          | Peak              |
| 11 |   | 5928.000        | 37.56          | 22.33    | 59.89                | -8.31       | 68.20          | Peak              |

Note:


1. " \*", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).

3.  $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$ .

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 5250MHz | Test Voltage         | 120V/60Hz  |

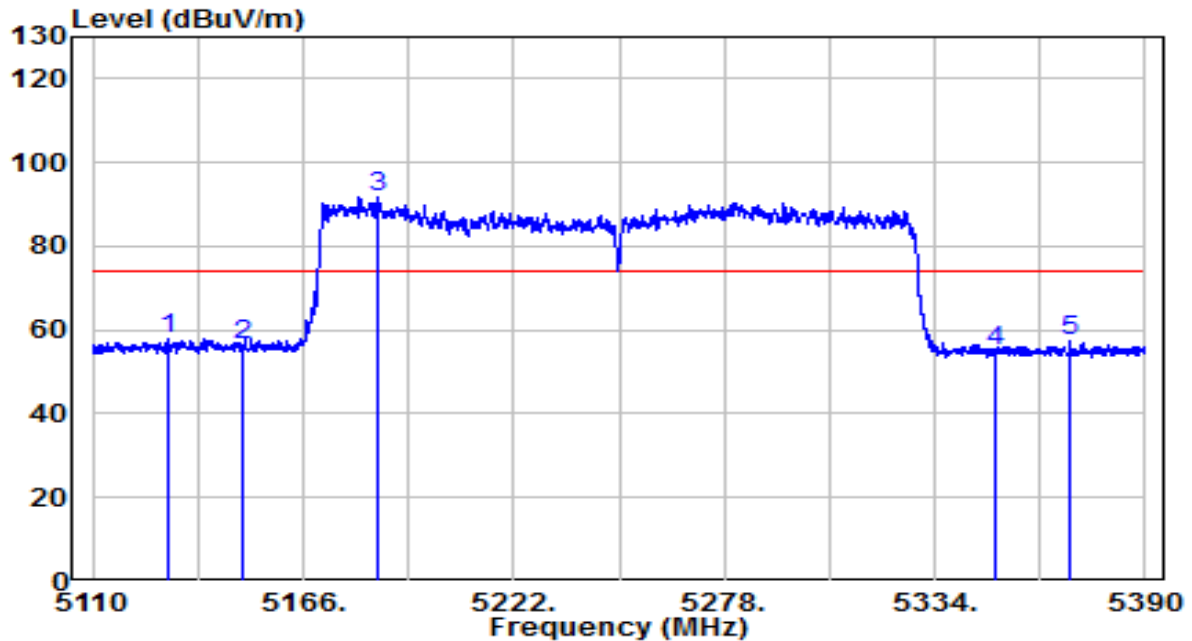


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5129.740        | 37.69          | 20.16    | 57.85                | -16.15      | 74.00          | Peak              |
| 2  | 5150.040        | 36.35          | 20.20    | 56.55                | -17.45      | 74.00          | Peak              |
| 3  | * 5185.740      | 71.57          | 20.25    | 91.83                | N/A         | N/A            | Peak              |
| 4  | 5350.000        | 34.21          | 20.52    | 54.73                | -19.27      | 74.00          | Peak              |
| 5  | 5369.980        | 36.81          | 20.56    | 57.37                | -16.63      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 5250MHz | Test Voltage         | 120V/60Hz  |

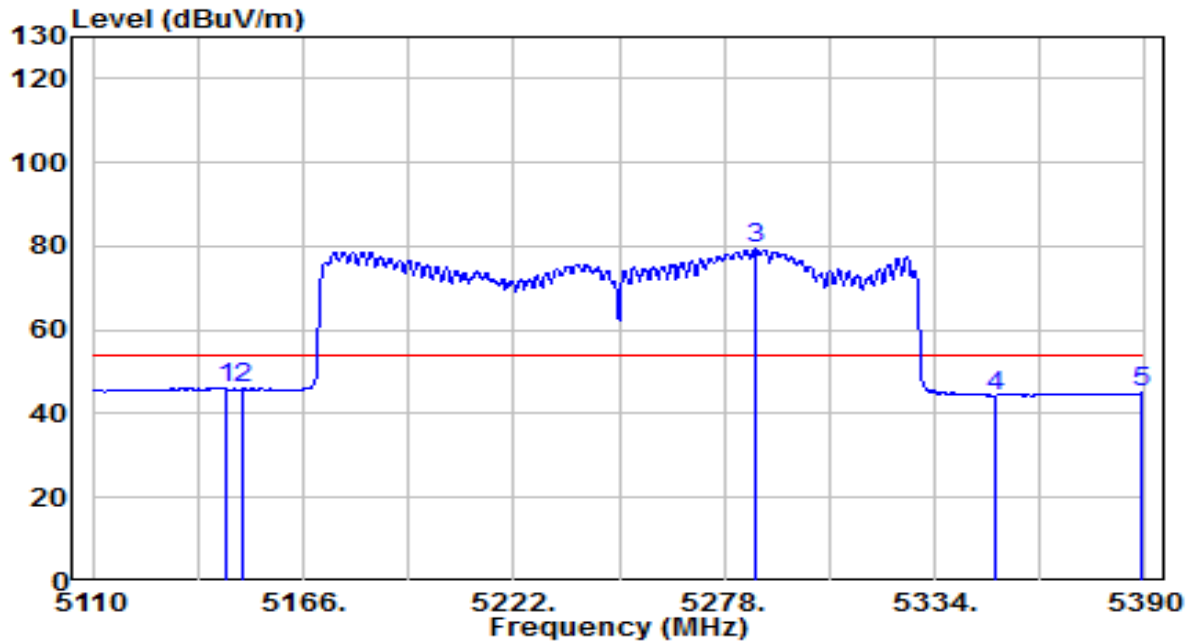


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5145.420        | 25.86          | 20.19    | 46.05                | -7.95       | 54.00          | Average           |
| 2  | 5150.040        | 25.73          | 20.20    | 45.93                | -8.07       | 54.00          | Average           |
| 3  | * 5286.260      | 58.85          | 20.42    | 79.27                | N/A         | N/A            | Average           |
| 4  | 5350.000        | 23.78          | 20.52    | 44.31                | -9.69       | 54.00          | Average           |
| 5  | 5388.880        | 24.33          | 20.59    | 44.92                | -9.08       | 54.00          | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 5250MHz | Test Voltage         | 120V/60Hz  |

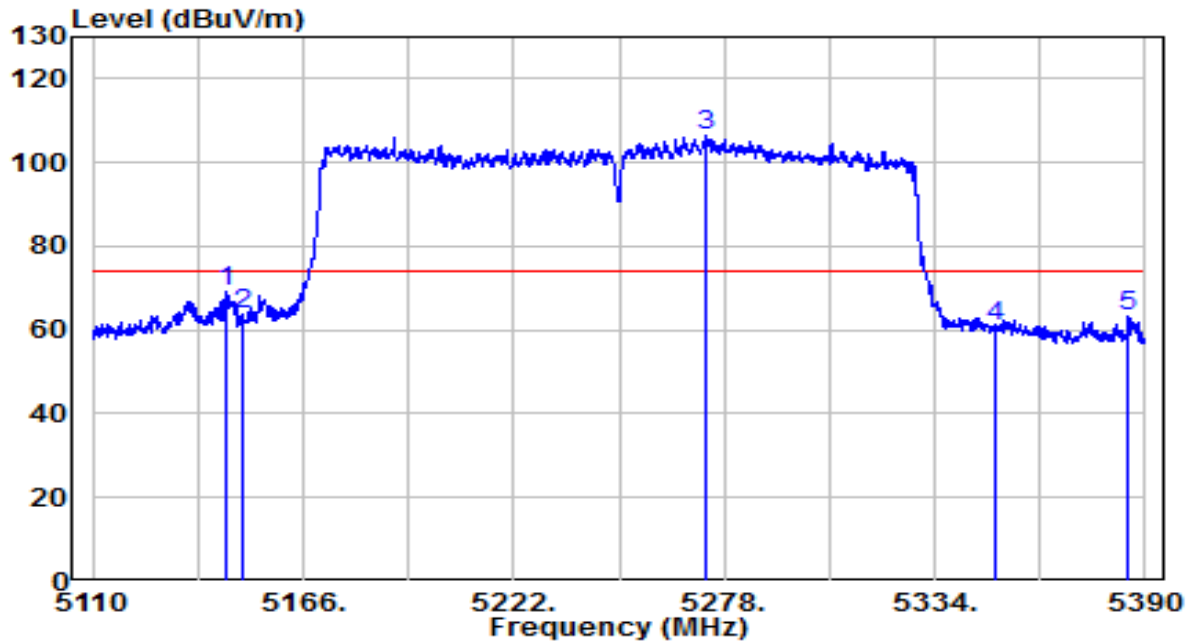


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5145.280        | 49.04          | 20.19    | 69.22                | -4.78       | 74.00          | Peak              |
| 2  | 5150.040        | 43.51          | 20.20    | 63.71                | -10.29      | 74.00          | Peak              |
| 3  | * 5272.960      | 86.17          | 20.40    | 106.57               | N/A         | N/A            | Peak              |
| 4  | 5350.000        | 40.53          | 20.52    | 61.05                | -12.95      | 74.00          | Peak              |
| 5  | 5385.240        | 42.94          | 20.58    | 63.52                | -10.48      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 5250MHz | Test Voltage         | 120V/60Hz  |

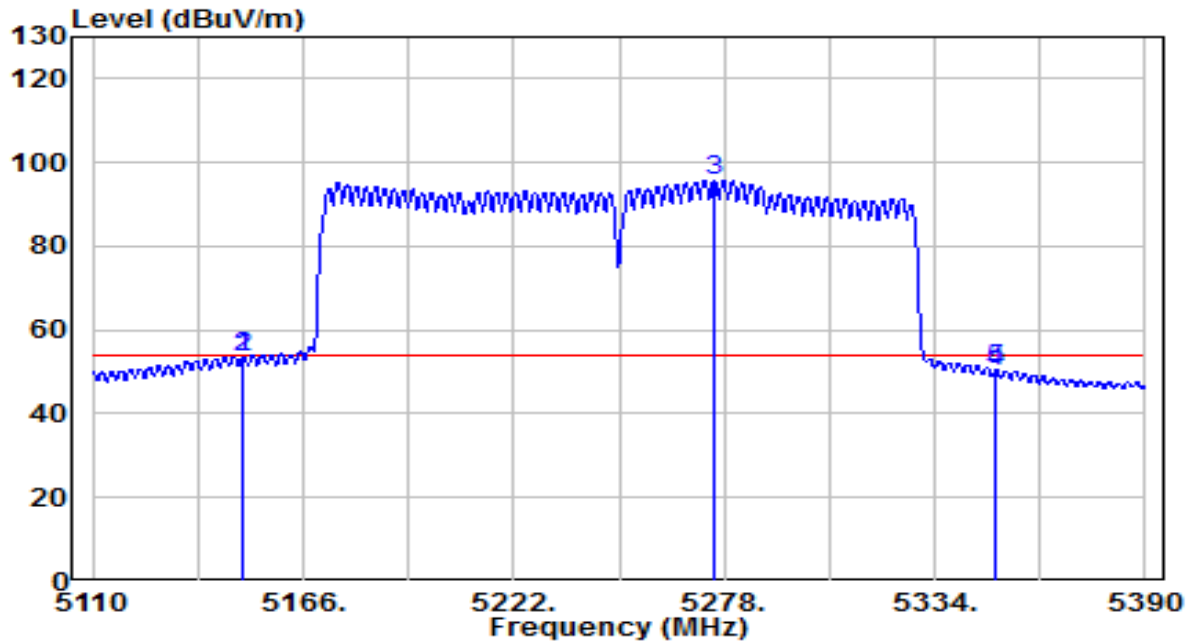


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5150.000        | 33.43          | 20.20    | 53.63                | -0.37       | 54.00          | Average           |
| 2  | 5150.040        | 33.43          | 20.20    | 53.63                | -0.37       | 54.00          | Average           |
| 3  | * 5275.340      | 75.44          | 20.40    | 95.84                | N/A         | N/A            | Average           |
| 4  | 5350.000        | 29.67          | 20.52    | 50.20                | -3.80       | 54.00          | Average           |
| 5  | 5350.380        | 29.98          | 20.52    | 50.51                | -3.49       | 54.00          | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 5570MHz | Test Voltage         | 120V/60Hz  |

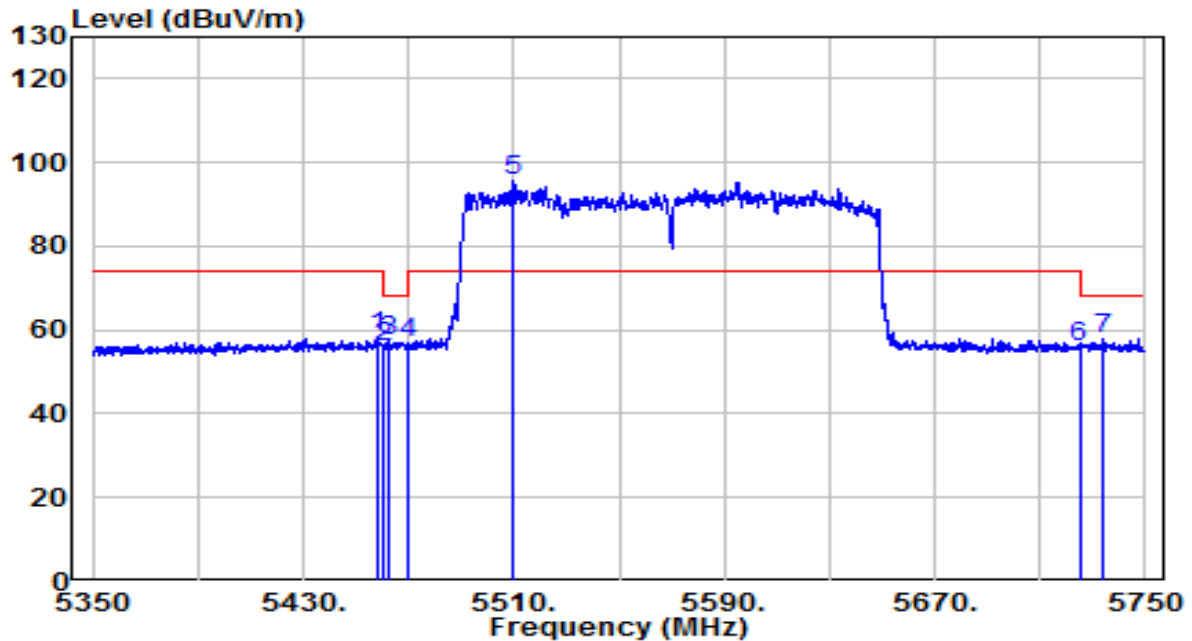


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5458.000        | 37.58          | 20.70    | 58.28                | -15.72      | 74.00          | Peak              |
| 2  | 5460.000        | 35.18          | 20.70    | 55.89                | -12.31      | 68.20          | Peak              |
| 3  | 5462.200        | 36.76          | 20.71    | 57.47                | -10.73      | 68.20          | Peak              |
| 4  | 5470.000        | 36.02          | 20.72    | 56.74                | -11.46      | 68.20          | Peak              |
| 5  | * 5509.800      | 74.97          | 20.81    | 95.78                | N/A         | N/A            | Peak              |
| 6  | 5725.000        | 34.26          | 21.59    | 55.84                | -12.36      | 68.20          | Peak              |
| 7  | 5733.600        | 36.19          | 21.62    | 57.81                | -10.39      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |            |
|-----------|-----------------------------------------------|----------------------|------------|
| EUT       | AX5400 Tri-Band Wi-Fi 6 Router                | Date of Test         | 2021-09-15 |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 24.6°C/47% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay  |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 5570MHz | Test Voltage         | 120V/60Hz  |

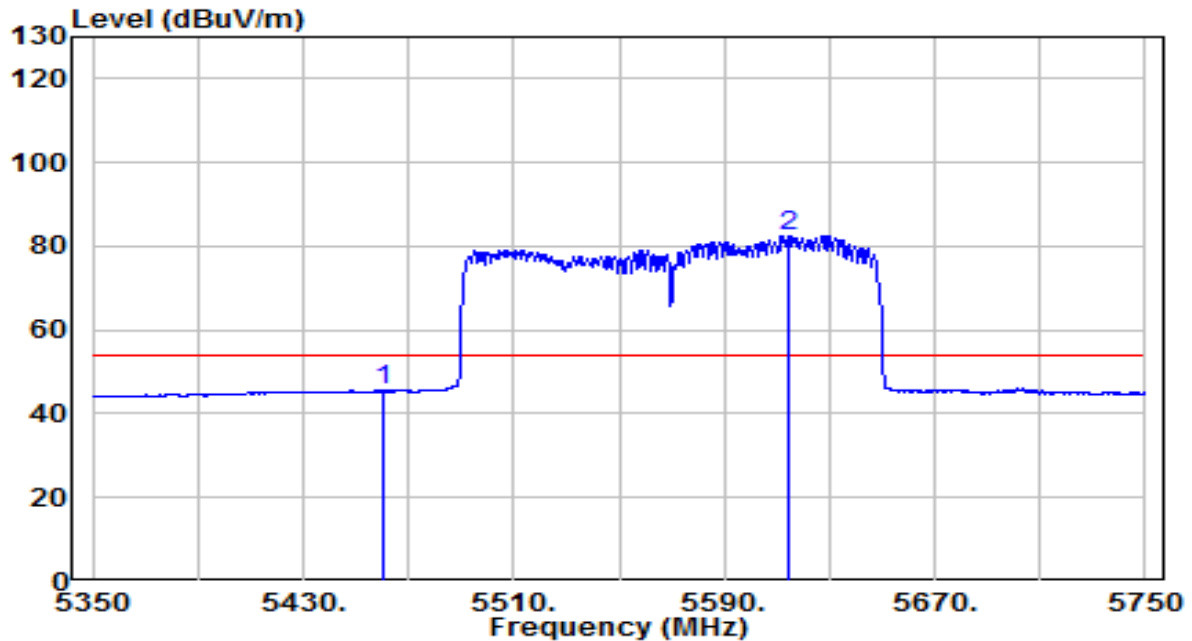

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 5460.000        | 24.73          | 20.70    | 45.44                | -8.56       | 54.00          | Average           |
| 2  | * 5614.600      | 61.37          | 21.19    | 82.55                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.