






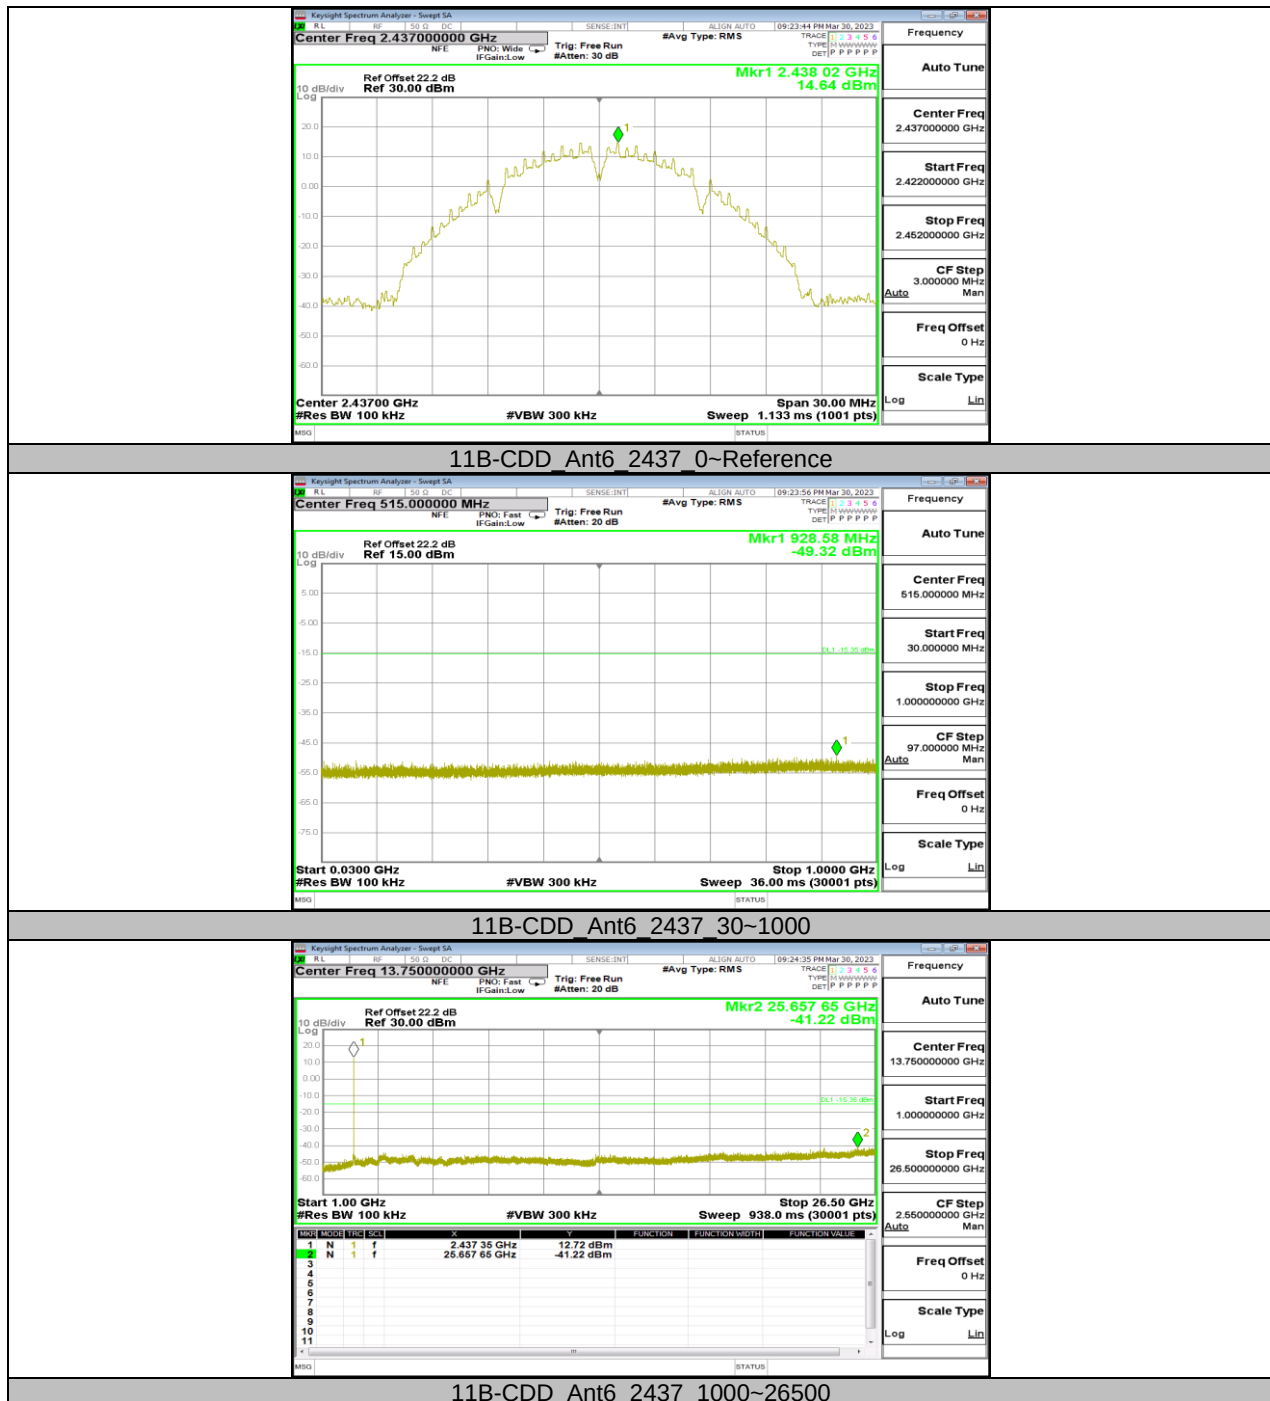


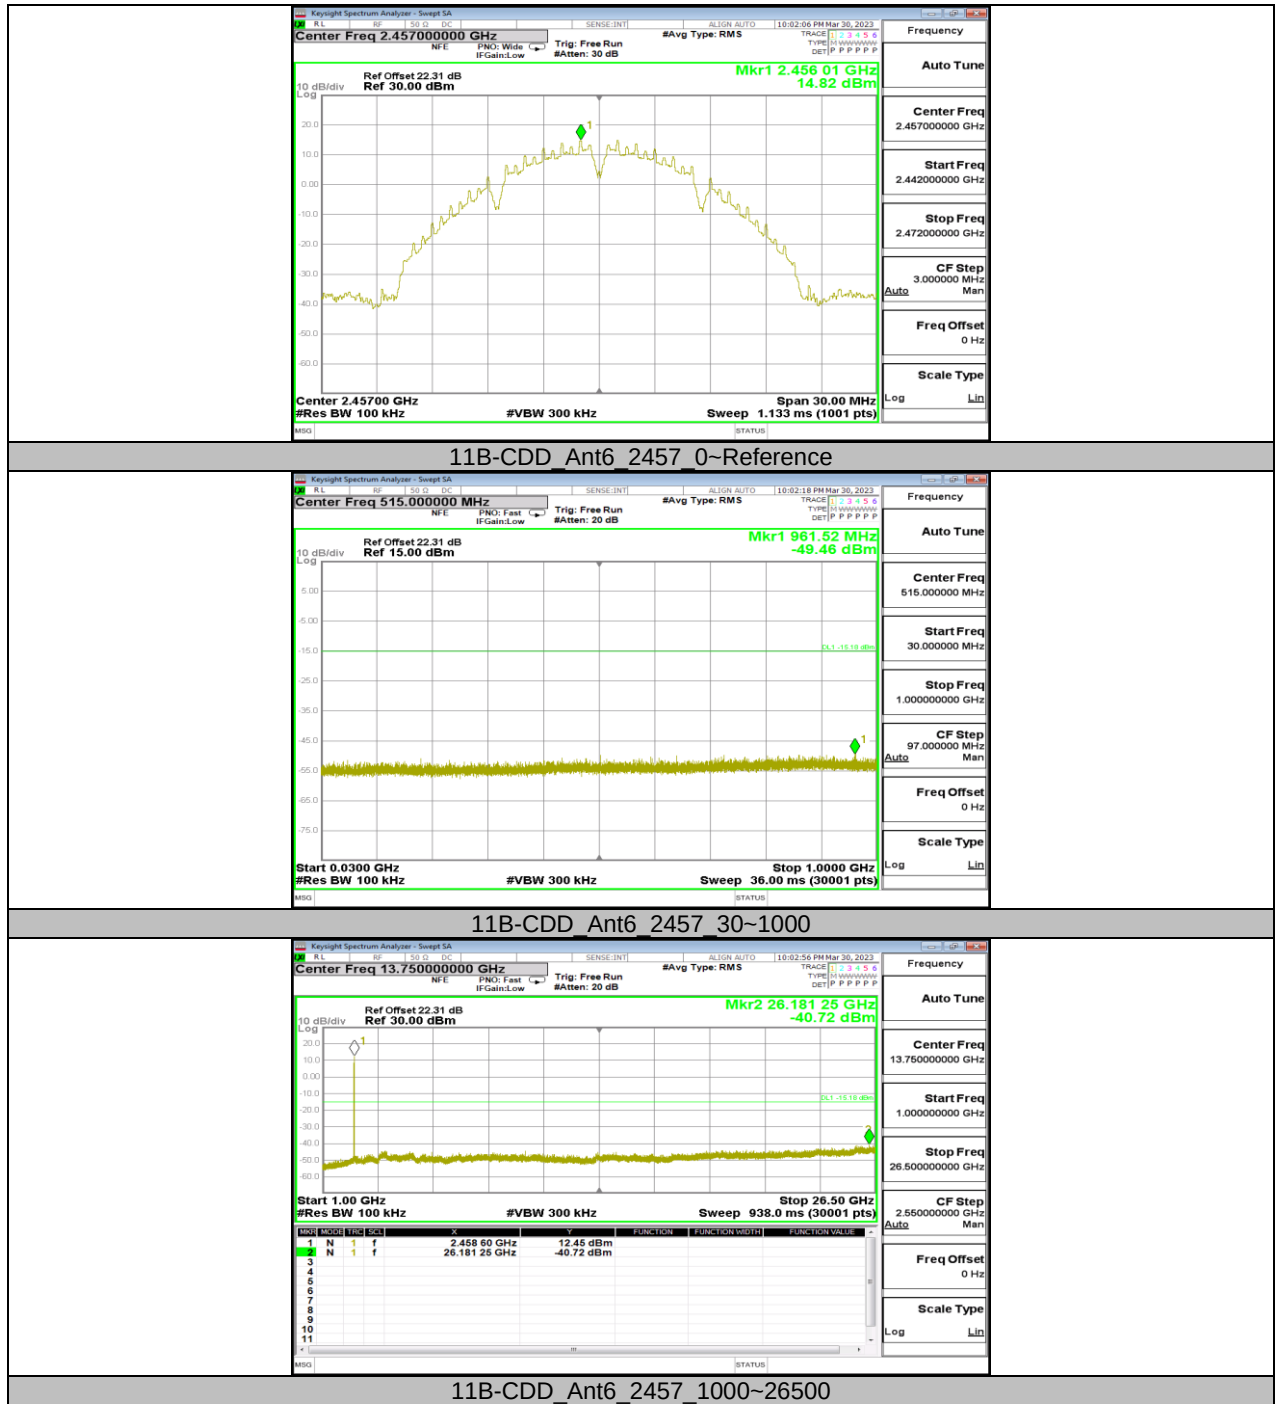

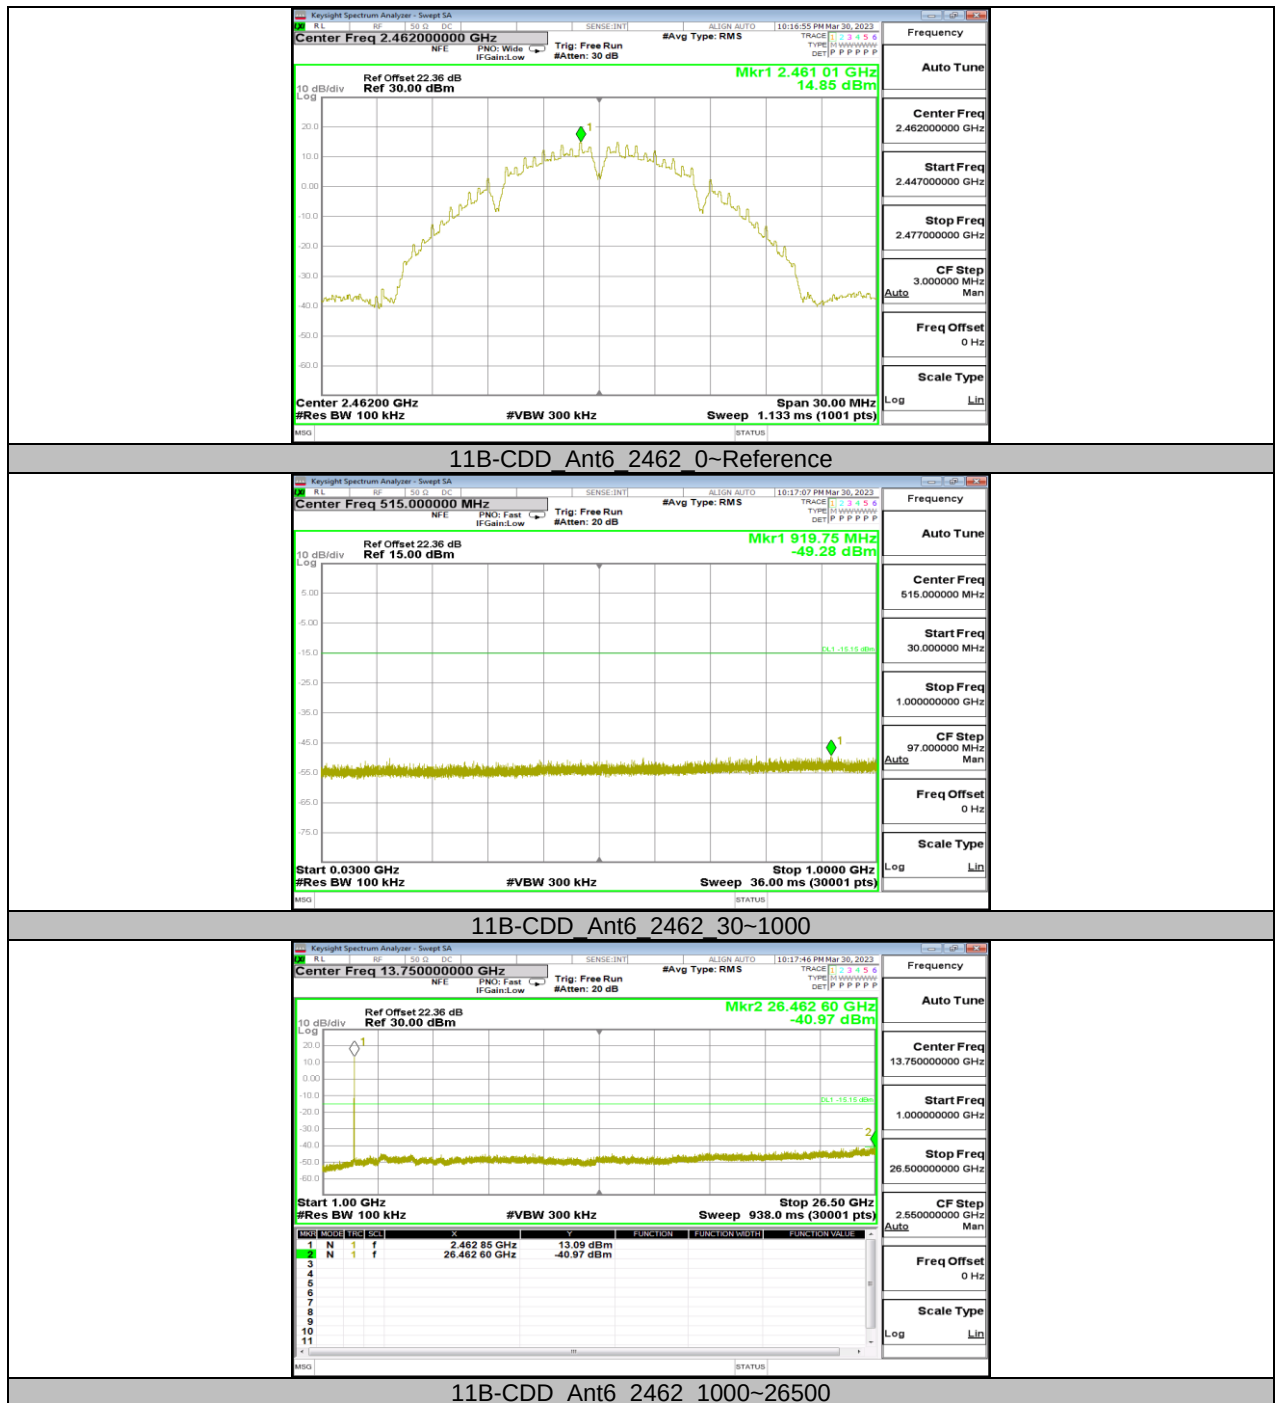

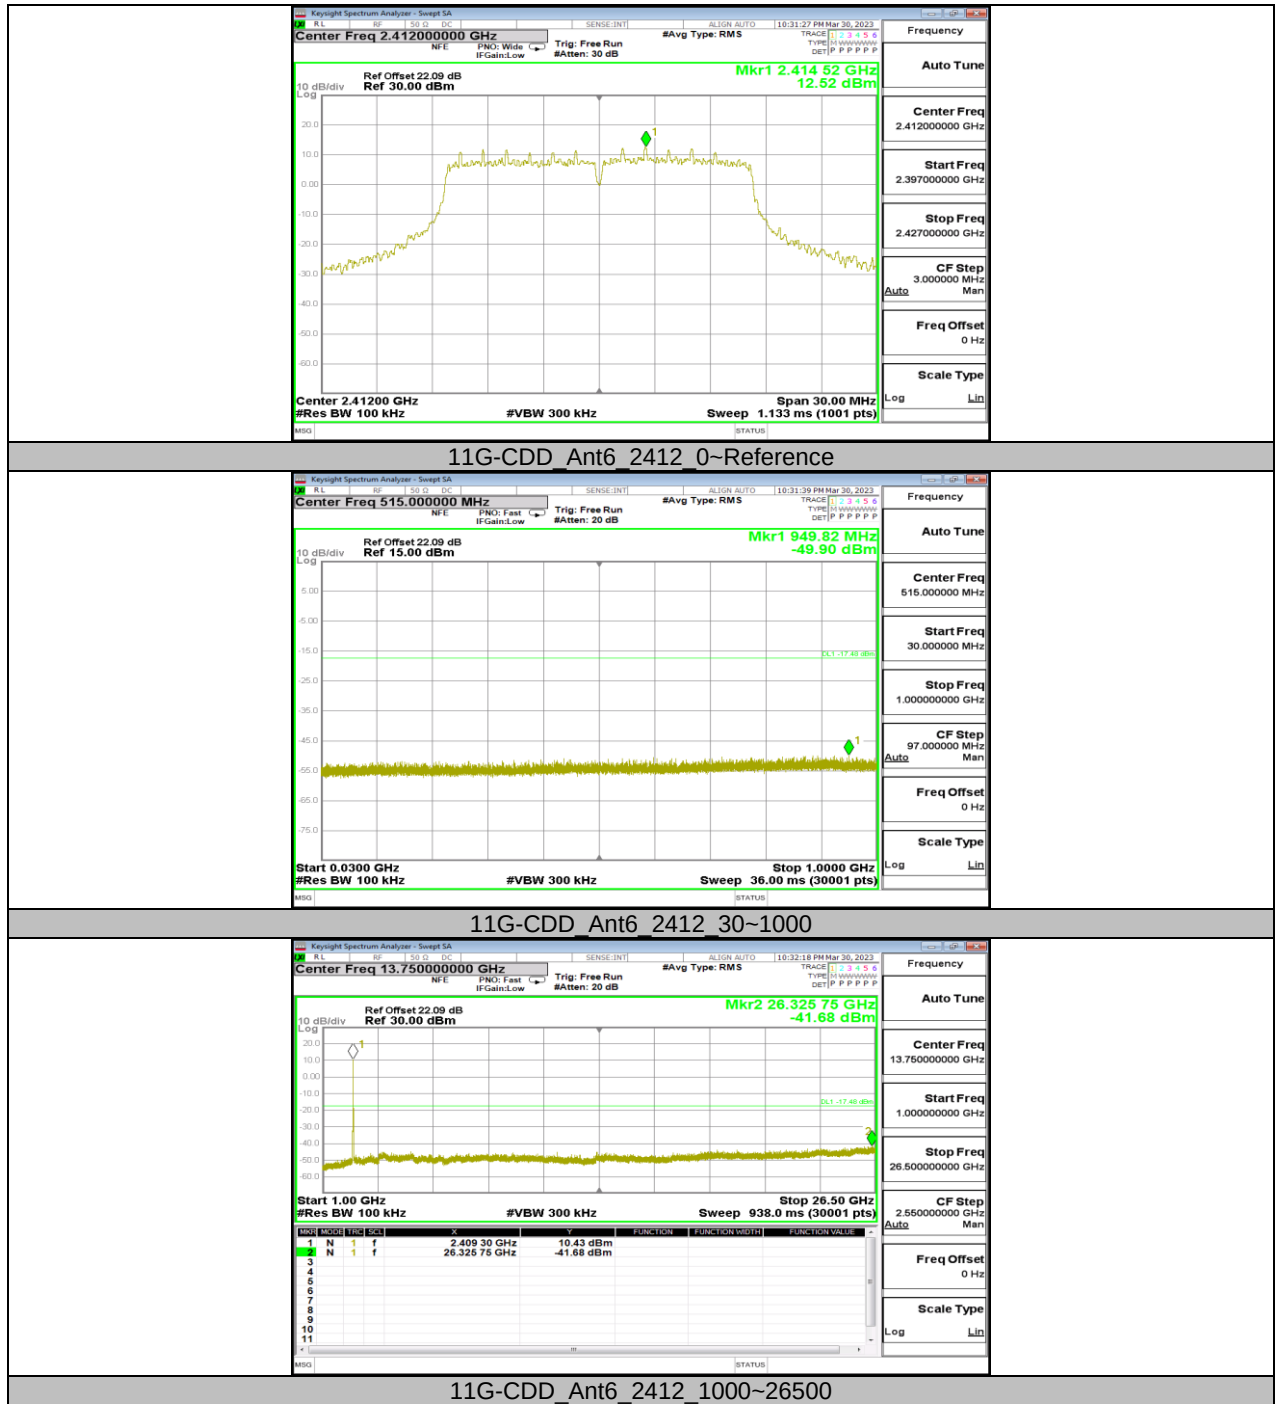

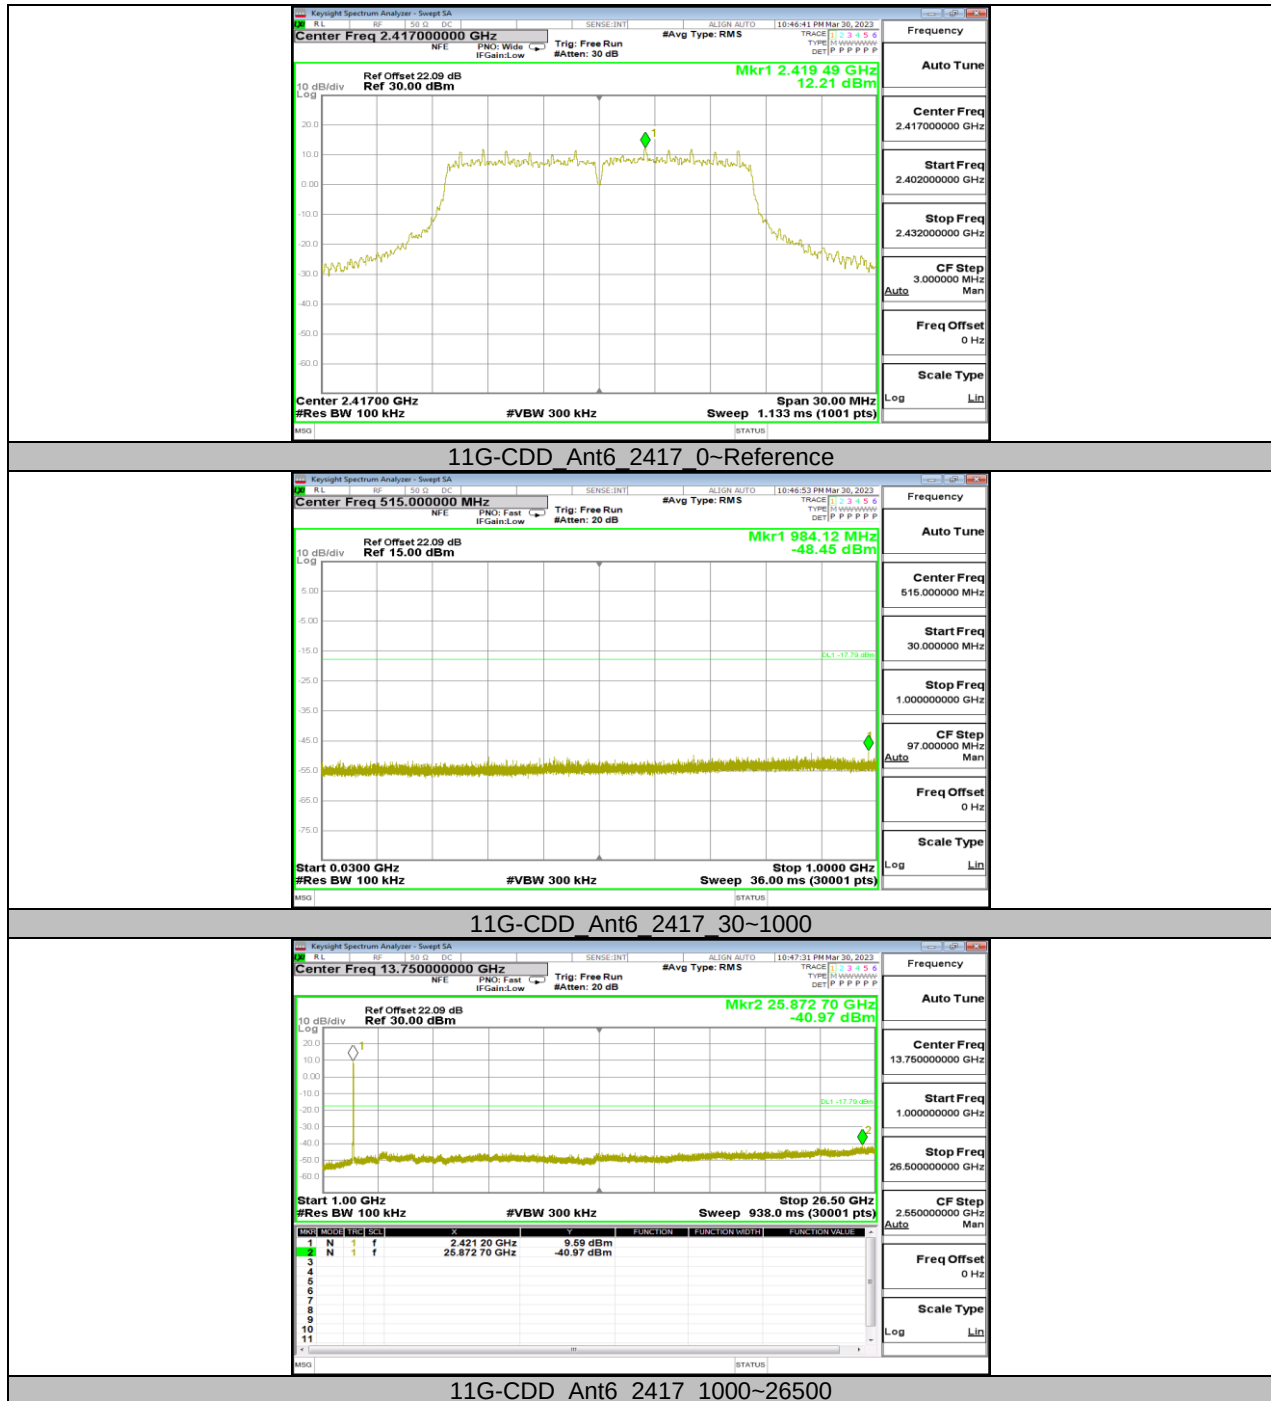

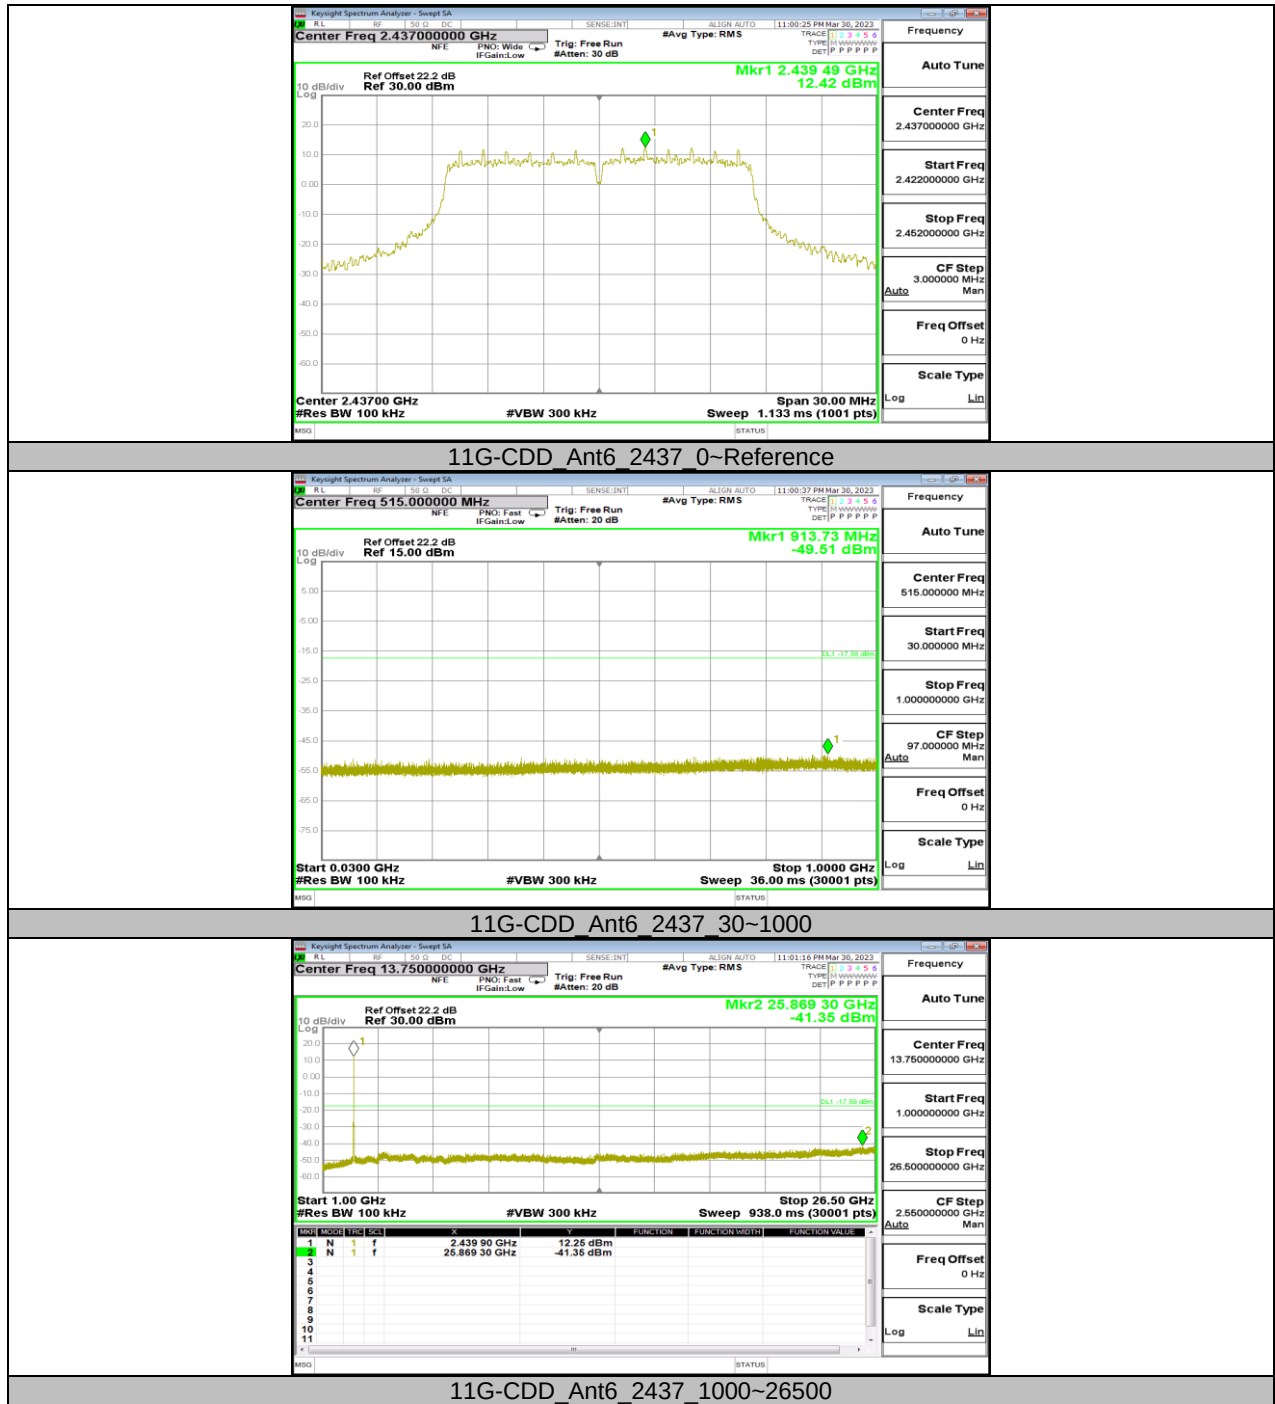











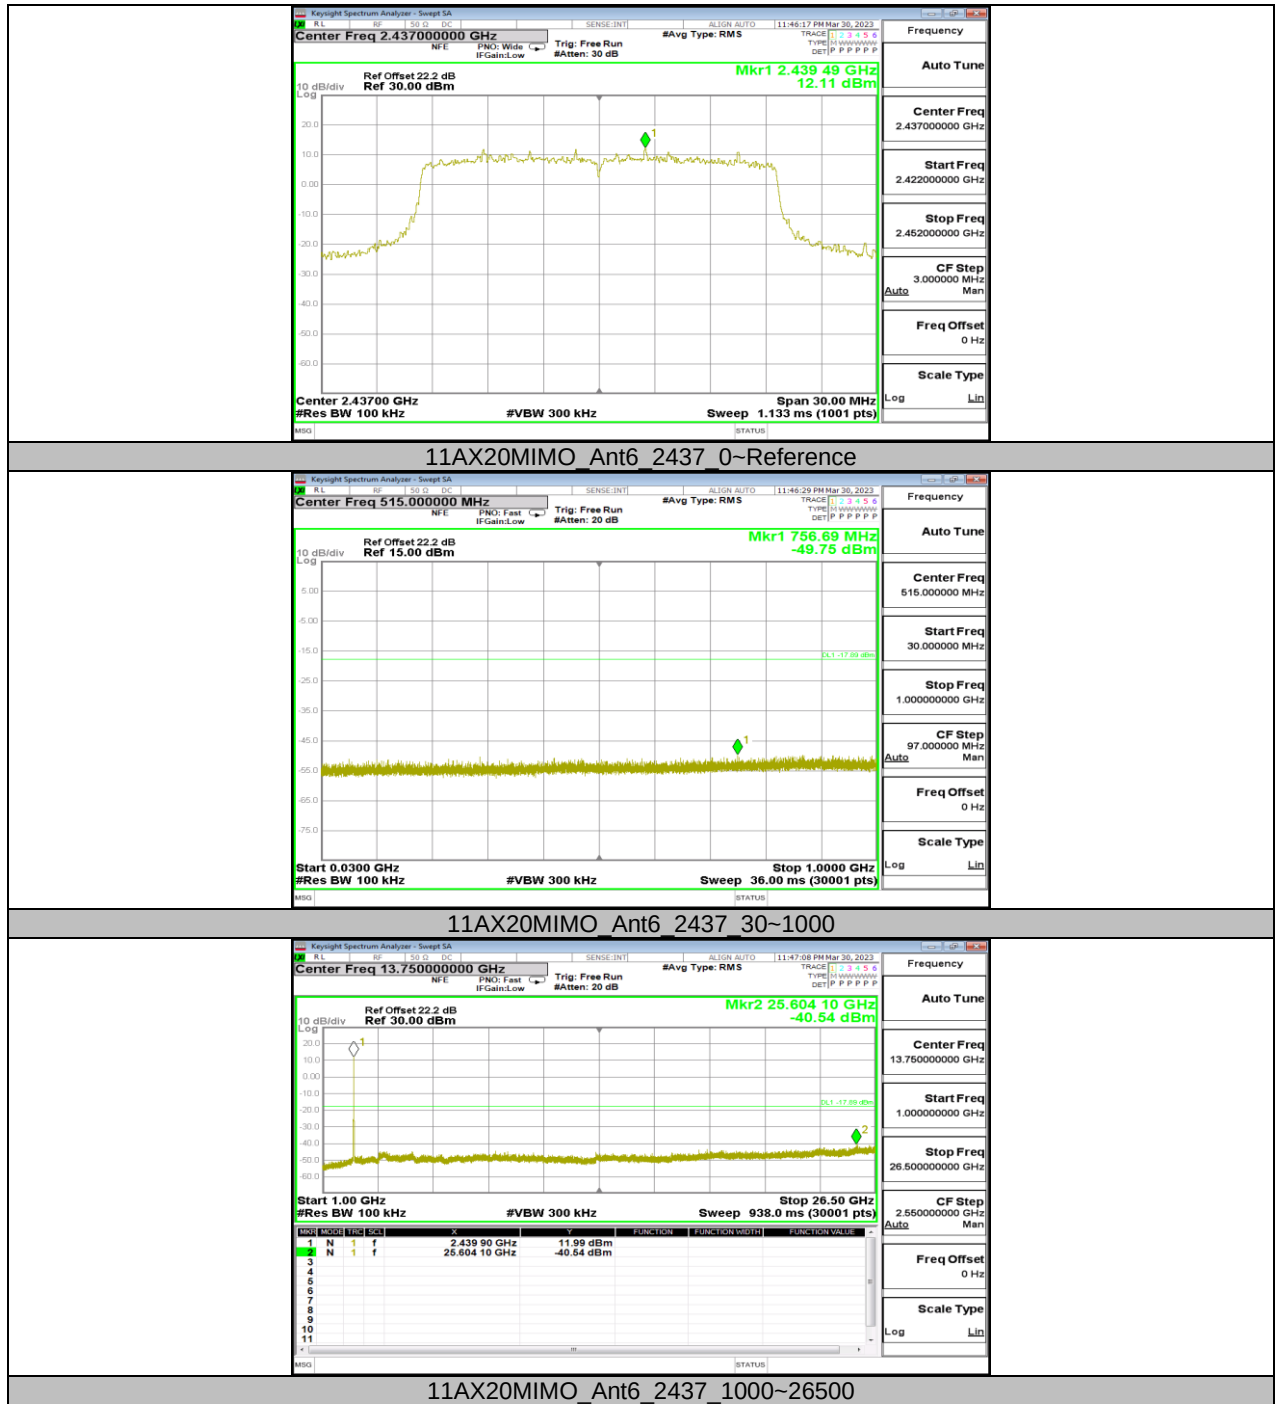







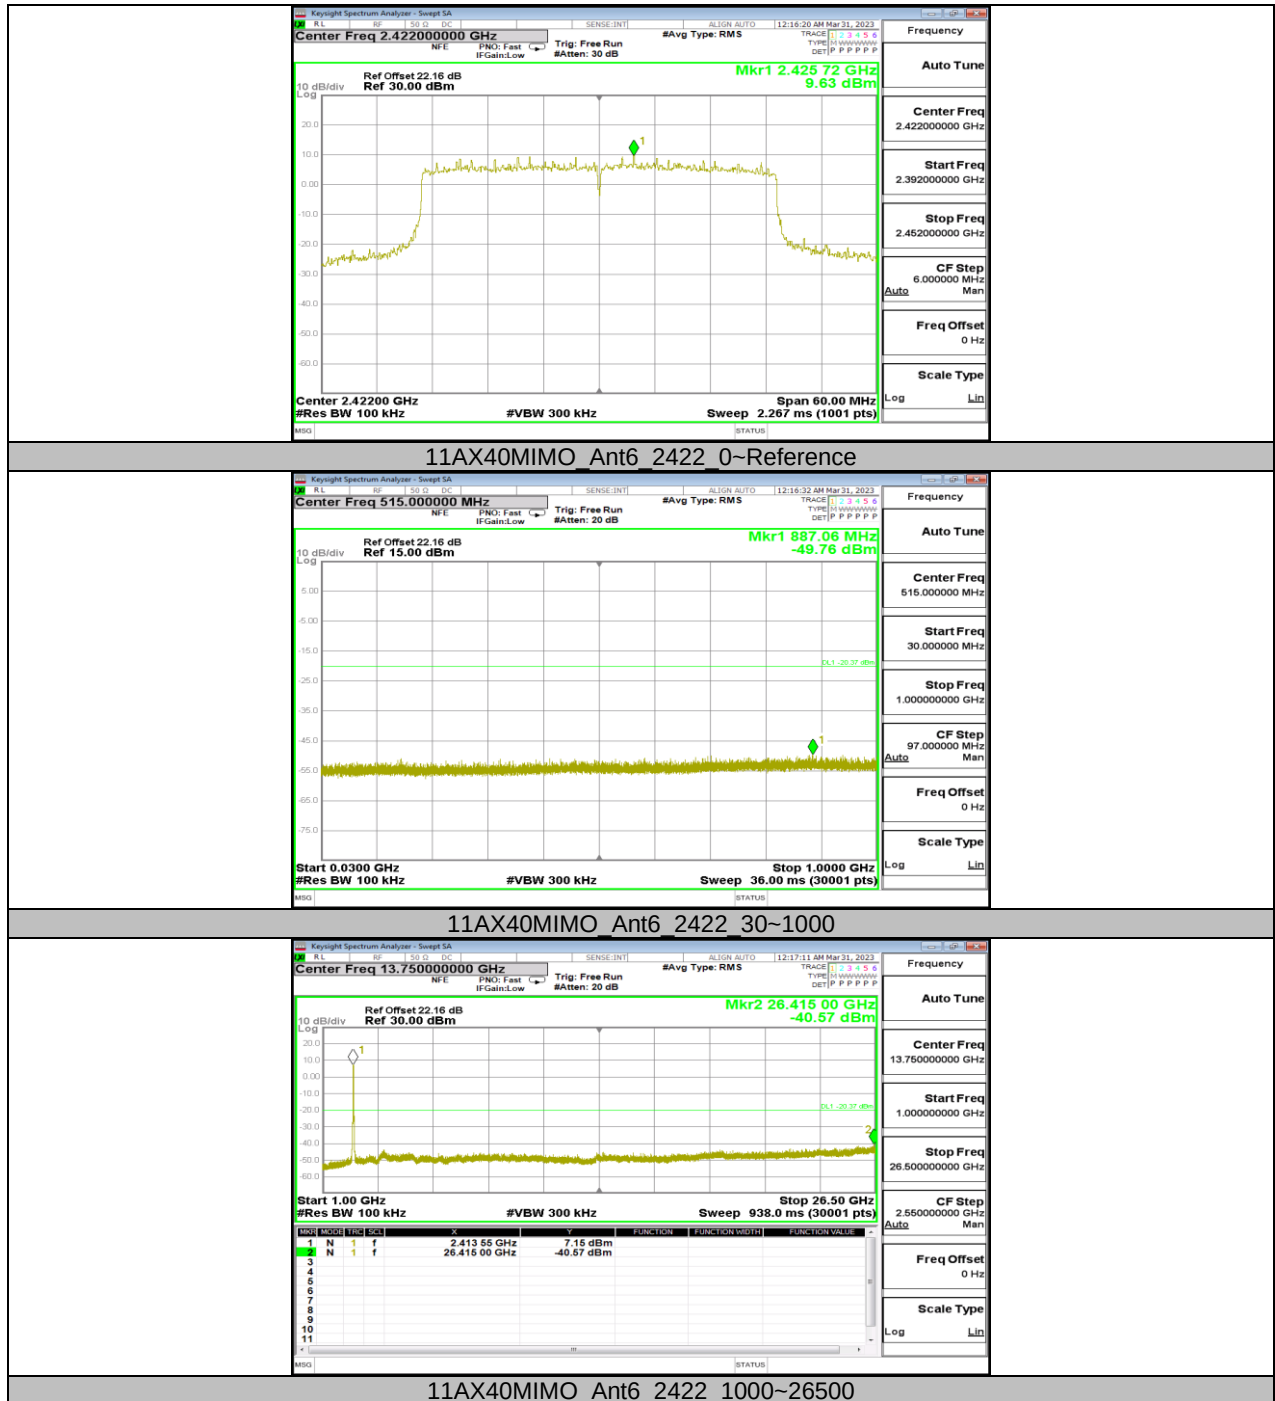





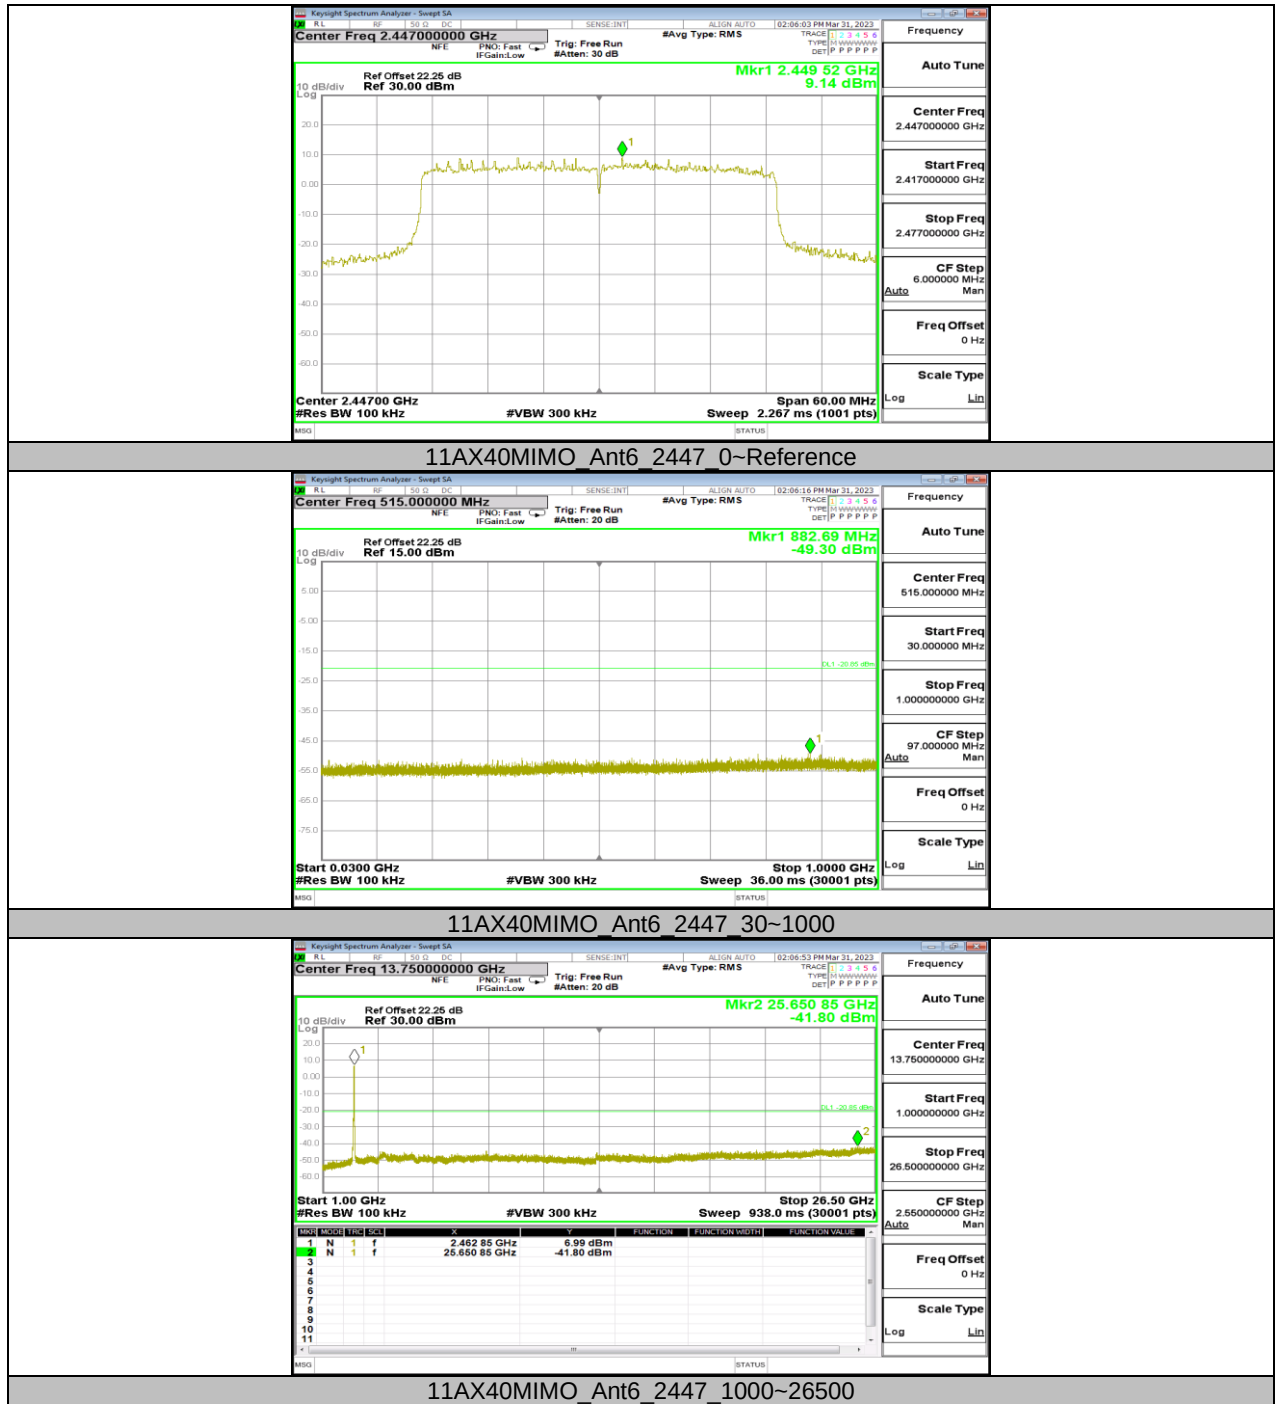

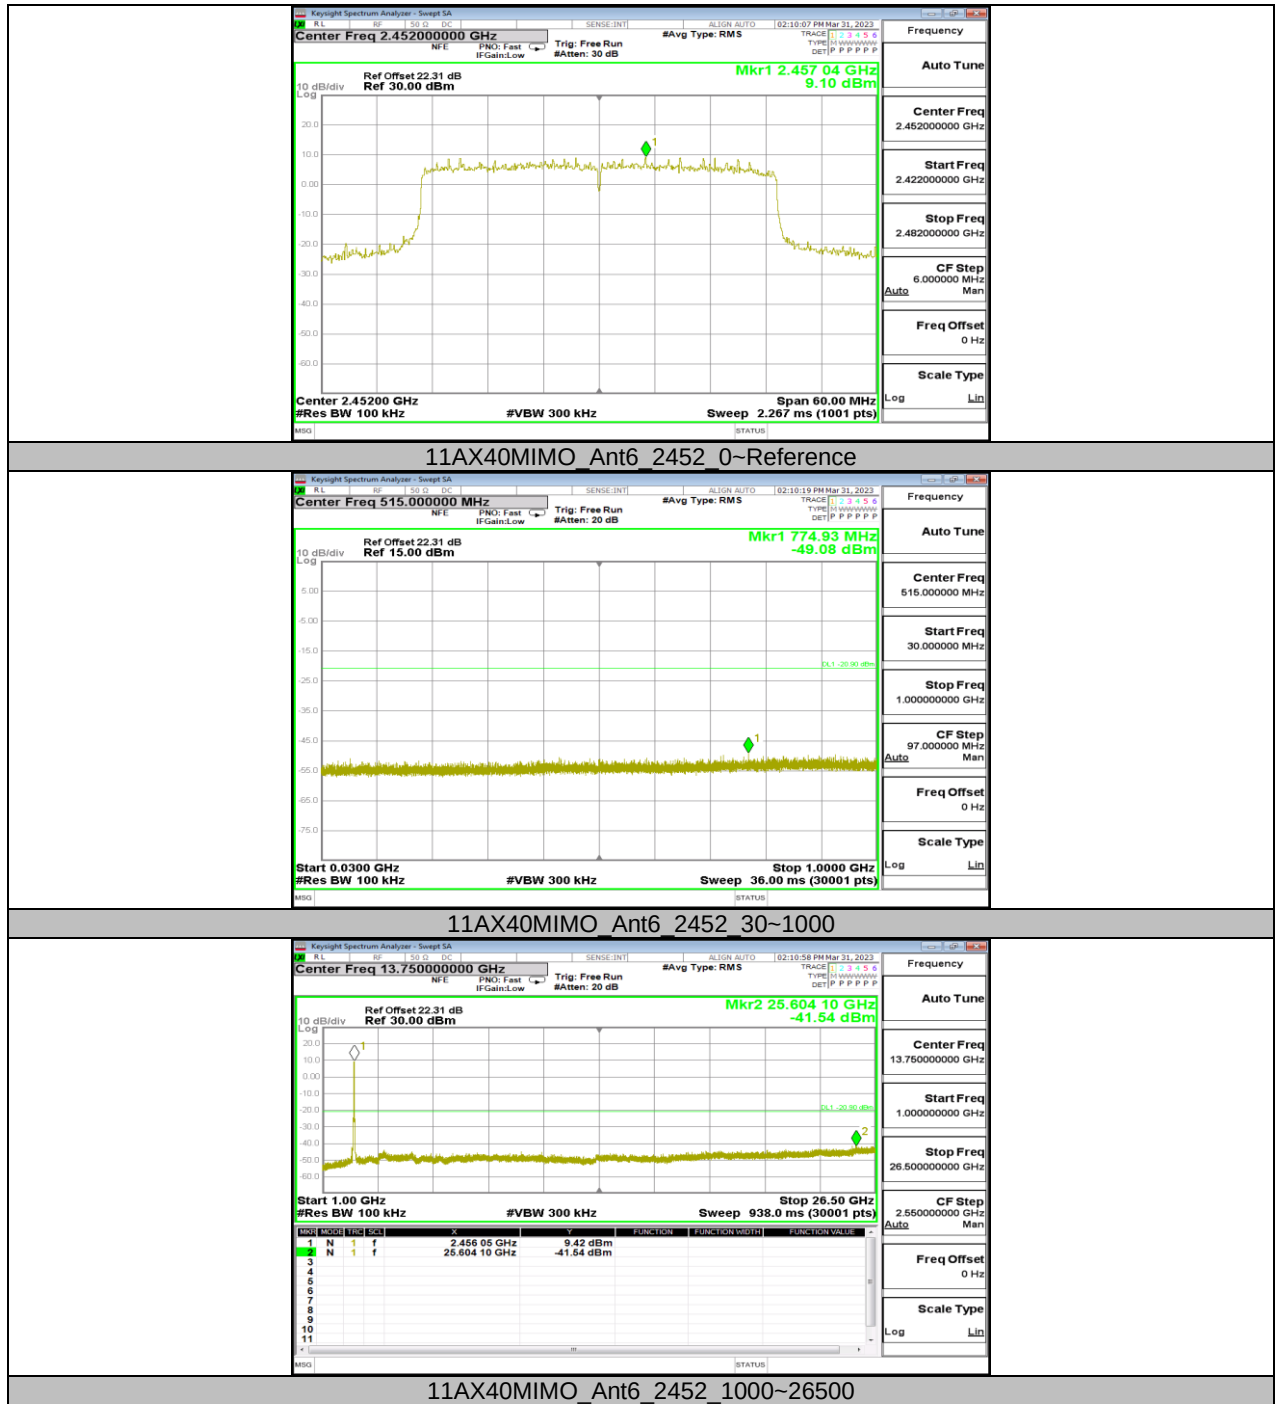

11.7. APPENDIX G: DUTY CYCLE**11.7.1. Test Result**

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B-CDD	8.62	9.78	0.8814	88.14	0.55	0.12	0.5
11G-CDD	1.42	2.12	0.6698	66.98	1.74	0.70	1
11AX20MIMO	5.45	5.80	0.9397	93.97	0.27	0.18	0.5
11AX40MIMO	5.42	5.77	0.9393	93.93	0.27	0.18	0.5

Note:

Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.7.2. Test Graphs



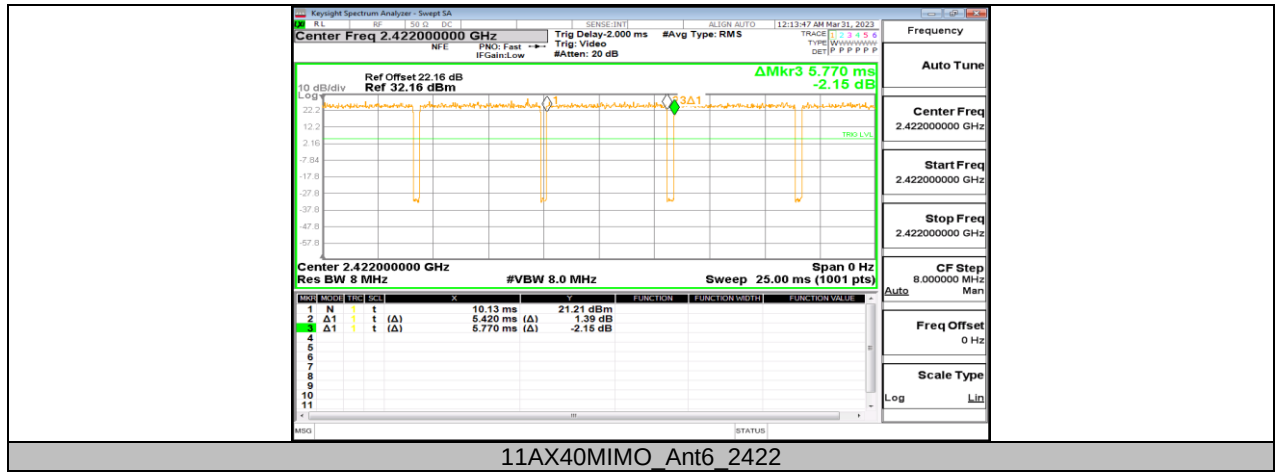

END OF REPORT