



FCC Radio Test Report

FCC ID: 2AXJ4X50

This report concerns: Class II Permissive Change

Project No. : 2507C244
Equipment : AX3000 Whole Home Mesh Wi-Fi 6 System
Brand Name : tp-link
Model Name : Deco X50, Deco X55
Applicant : TP-Link Corporation Limited
Address : Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong
Manufacturer : TP-Link Corporation Limited
Address : Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong
Date of Receipt : Jul. 28, 2025
Date of Test : Jul. 29, 2025 ~ Aug. 20, 2025
Issued Date : Nov. 07, 2025
Test Sample : Engineering Sample No.: DG2025072878
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : Chella Zheng
 Chella Zheng
Approved by : Chay Cai
 Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
 Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	4
1 . APPLICABLE STANDARDS	5
2 . SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
2.3 TEST ENVIRONMENT CONDITIONS	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 SUPPORT UNITS	9
4 . RADIATED EMISSIONS	10
4.1 LIMIT	10
4.2 TEST PROCEDURE	11
4.3 DEVIATION FROM TEST STANDARD	12
4.4 TEST SETUP	12
4.5 EUT OPERATION CONDITIONS	13
4.6 TEST RESULTS - 30 MHZ TO 1000 MHZ	13
4.7 TEST RESULTS - ABOVE 1000 MHZ	13
5 . MEASUREMENT INSTRUMENTS LIST	14
6 . EUT TEST PHOTO	16
APPENDIX A - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	19
APPENDIX B - RADIATED EMISSION- ABOVE 1000 MHZ	22

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2507C244	R00	Original Report.	Sep. 30, 2025	Invalid
BTL-FCCP-1-2507C244	R01	This report only updated the description of the differences on page 5. It is a revision of the report BTL-FCCP-1-2507C244. This is a newly released report, replacing the BTL-FCCP-1-2507C244 R00 report.	Nov. 07, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX A APPENDIX B	PASS	-----

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) The output power and radiated Emissions (Below 1GHz and Above 1GHz) have been re-evaluated by sample of FCC ID: 2AXJ4X50, model name: Deco X50, Deco X55. The output power is found that the original data was the worst, the radiated emissions is found that the new data are the worse, so the radiated emissions test data are reissue from the FCC ID: 2AXJ4X50, model name: Deco X50, Deco X55.

Model difference(s):

- Removed the components of the terminals U36 and U37.
- Pin-to-pin changes in the FEM chip. The FEM model change "2.4G:SKY85337-11; 5G:SKY85755-11 " to "2.4G:VC5337-31(U8, U65); 5G:VC5788-21(U61, U62)".
- Changes in the wiring at the power supply of the PCB.

(3) The other test records and results please refer to the test report number: FR171316AA, issued date is Sep. 24, 2021, and issued by:

Test Laboratory: Sporton International Inc. Hsinchu Laboratory

Address: No. 8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C).

This report is only valid conjunction with the above referenced test report.

2.1 TEST FACILITY

For Radiated Emissions-1000MHz to 18000MHz test item:

The test facilities used to collect the test data in this report is at the location of Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For other test items:

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB19 (3m)	CISPR	1GHz ~ 6GHz	4.48
		6GHz ~ 18GHz	3.88

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	5.46

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
Radiated Emissions -30MHz to 1000MHz	23°C	50%	AC 120V/60Hz	Calvin Wen	Aug. 19, 2025
Radiated Emissions -Above 1000MHz	22°C	51%	AC 120V/60Hz	Jensen Zhou	Aug. 11, 2025
	23°C	50%	AC 120V/60Hz	Calvin Wen	Aug. 19, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	AX3000 Whole Home Mesh Wi-Fi 6 System
Brand Name	tp-link
Test Model	Deco X50
Model Name	Deco X50, Deco X55
Model Difference(s)	Only the color of the upper cover plate of the EUT is different.
Hardware Version	V1.3
Software Version	V1.3
Power Source	DC Voltage supplied from AC adapter. Model: T120150-2B4
Power Rating	I/P: 100-240V~ 50/60Hz 0.6A O/P: 12.0V  1.5A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g/n: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ax: up to 573.6 Mbps

Note:

- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20), IEEE 802.11ax(HE20), CH03 - CH09 for IEEE 802.11n(HT40), IEEE 802.11ax(HE40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.


Pretest Mode	Description
Mode 1	TX B Mode Channel 11
Mode 5	TX AX(HE20) Mode Channel 01

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

Radiated emissions test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 11

Radiated emissions test - 1 GHz - 18 GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 11
Mode 5	TX AX(HE20) Mode Channel 01

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

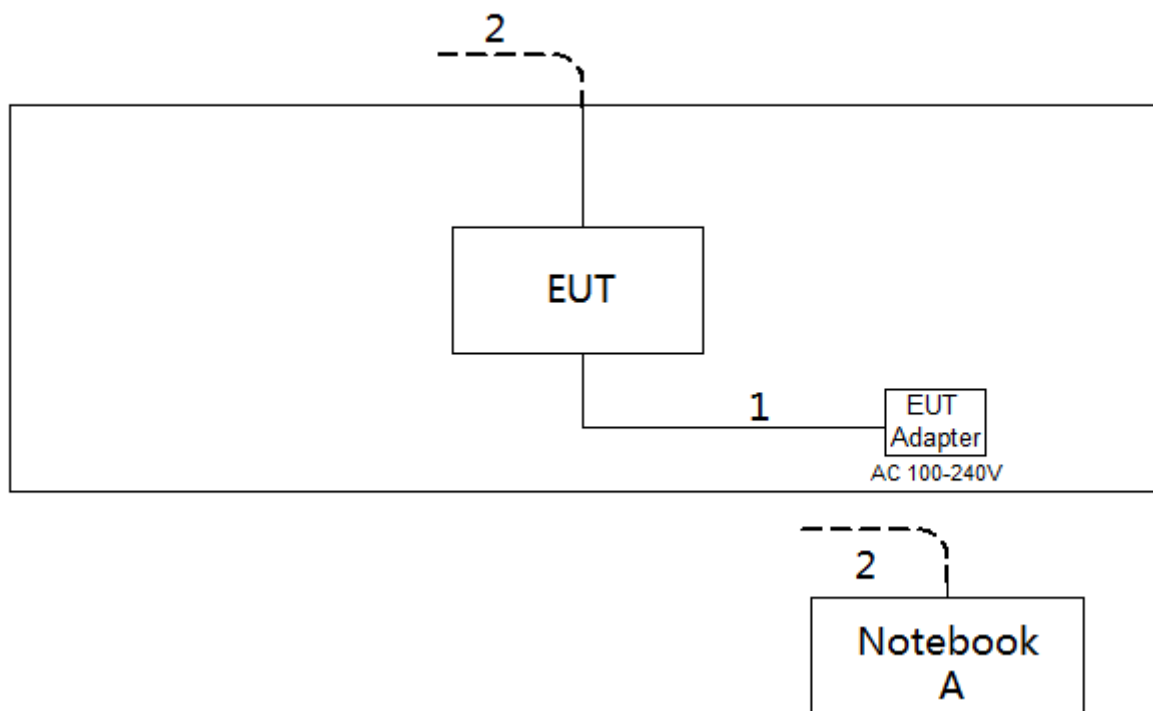

3.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	14SER5 3500	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (30Hz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBμV/m)		Harmonic at 1m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

$$(5) \quad FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$20 \log (d_{\text{limit}}/d_{\text{measure}}) = 20 \log (3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

4.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:



Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value

Receiver Parameters	Setting
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector


4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

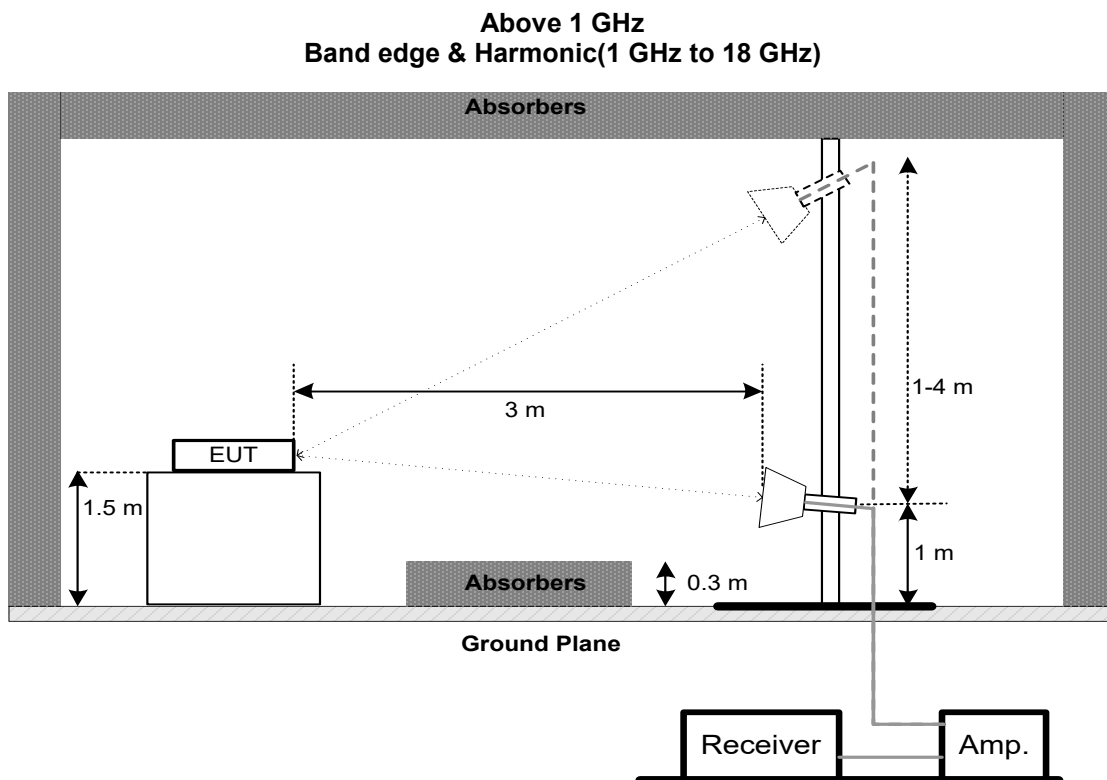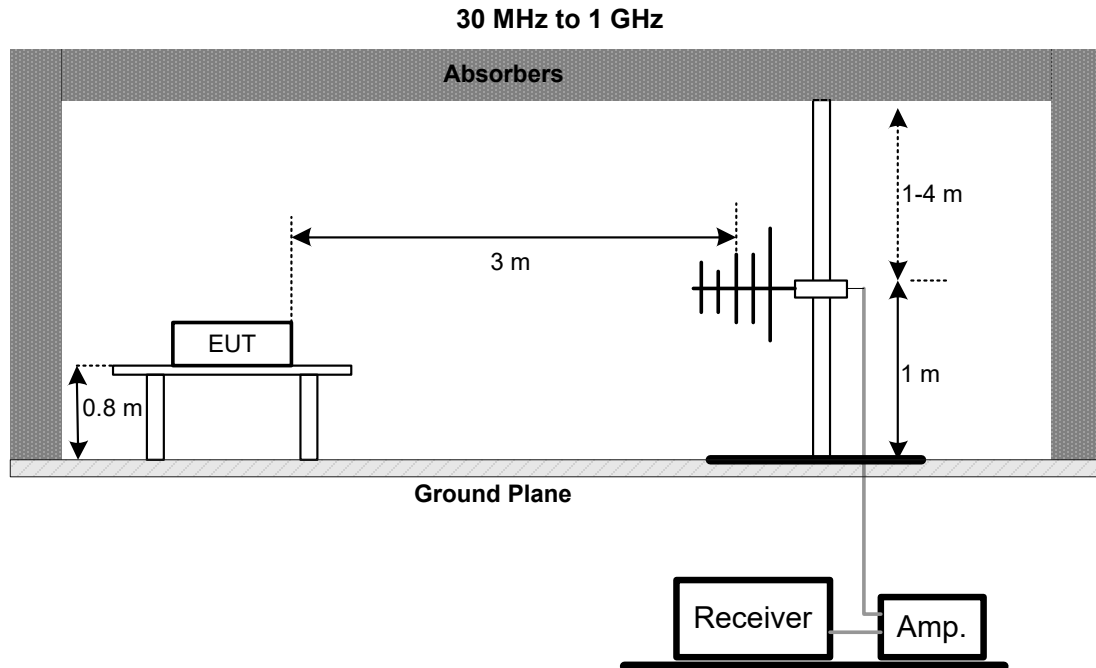

Harmonic(18 GHz to 26.5 GHz)

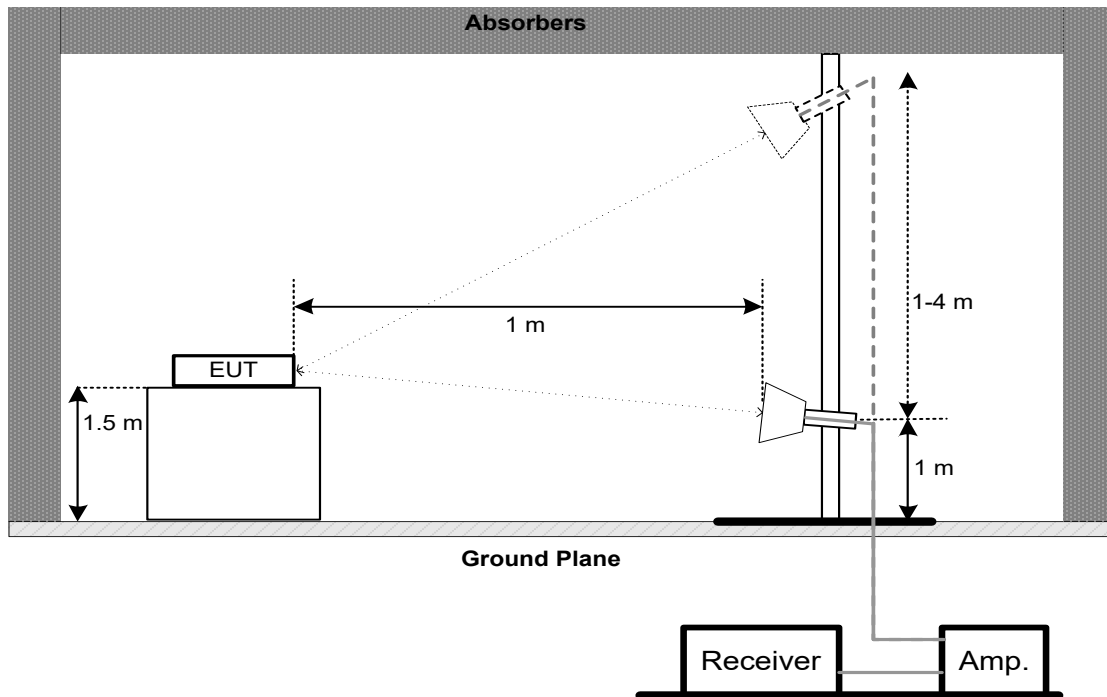

4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX A.

4.7 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 14, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec.14,2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	May 17, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 1 GHz - 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Positioning Controller	MF	MF-7802	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025
4	Cable	EMC INSTRUMENT	EMC104-SM-SM-10000	N/A	Jun. 12, 2026
5	Cable	EMC INSTRUMENT	EMC104-SM-SM-3000	N/A	Jun. 12, 2026
6	Cable	EMC INSTRUMENT	EMC104-SM-SM-1000	N/A	Jun. 12, 2026
7	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	May 18, 2026
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 28, 2025
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 28, 2026
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	COM-MW	ZHPF6-M3000-18000-174	N/A	Oct. 29, 2025

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
2	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 23, 2026
3	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 23, 2026
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
5	Positioning Controller	MF	MF-7802	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	May 17, 2026
8	966 Chamber room	CM	9*6*6	N/A	May 09, 2026



Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

6. EUT TEST PHOTO



Radiated Emissions Test Photos



30 MHz to 1 GHz

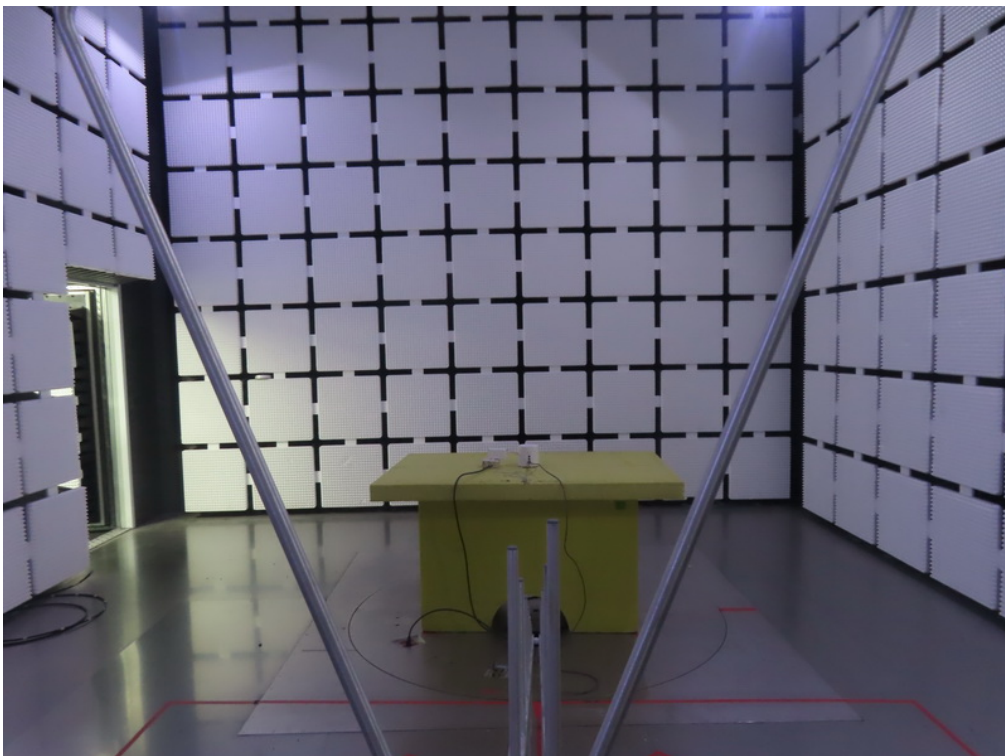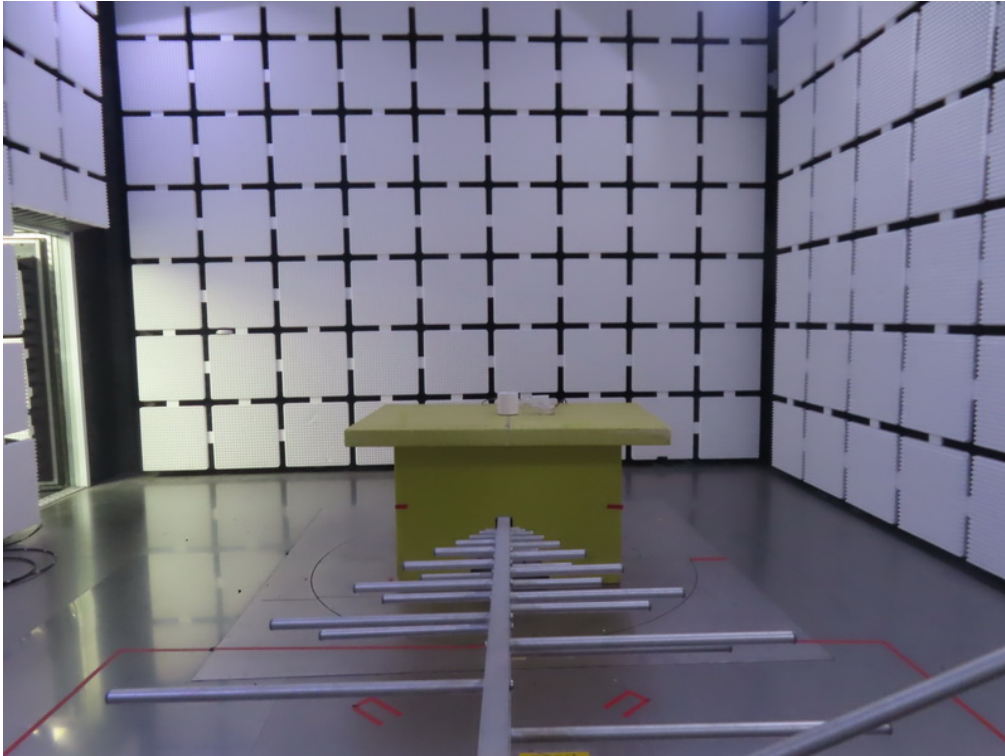

Radiated Emissions Test Photos


Band edge & Harmonic(1 GHz to 18 GHz)

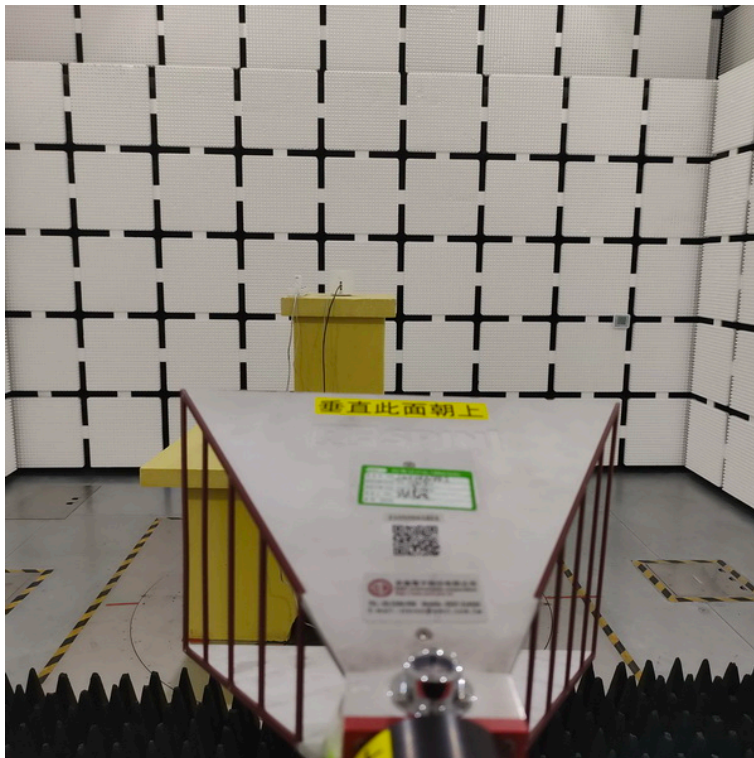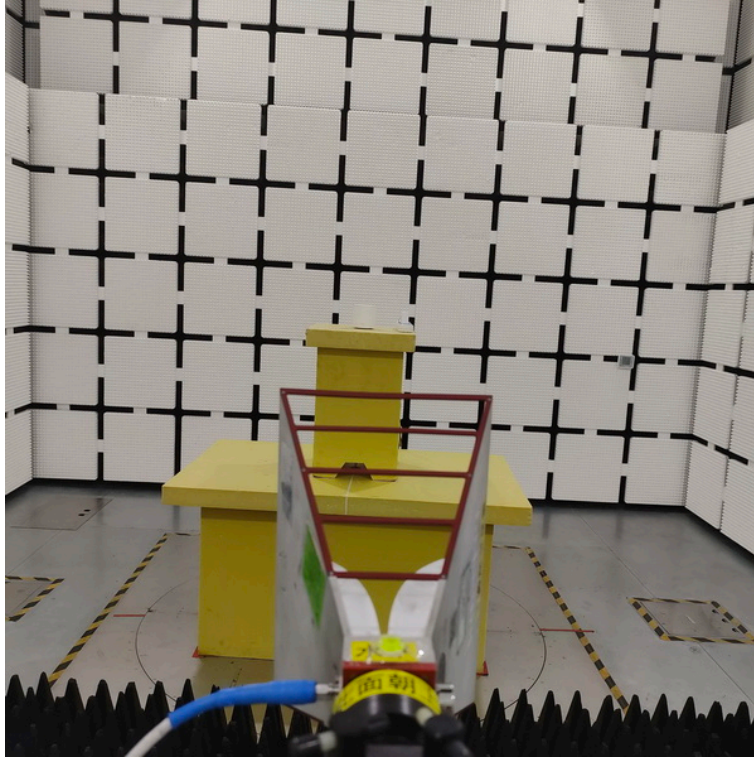

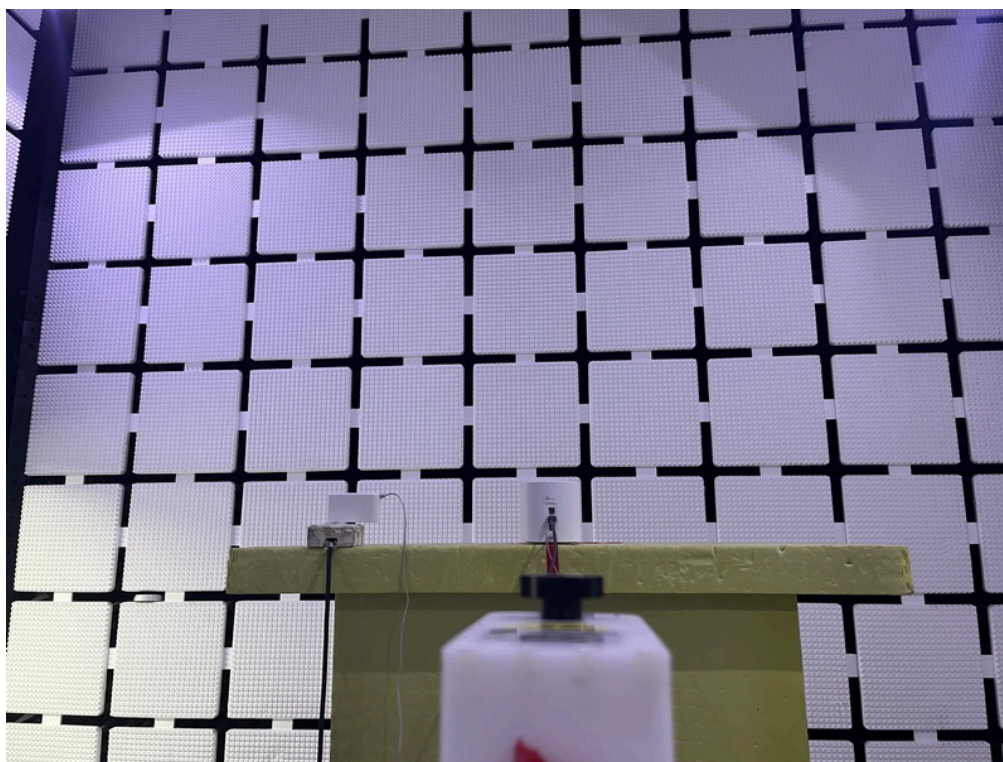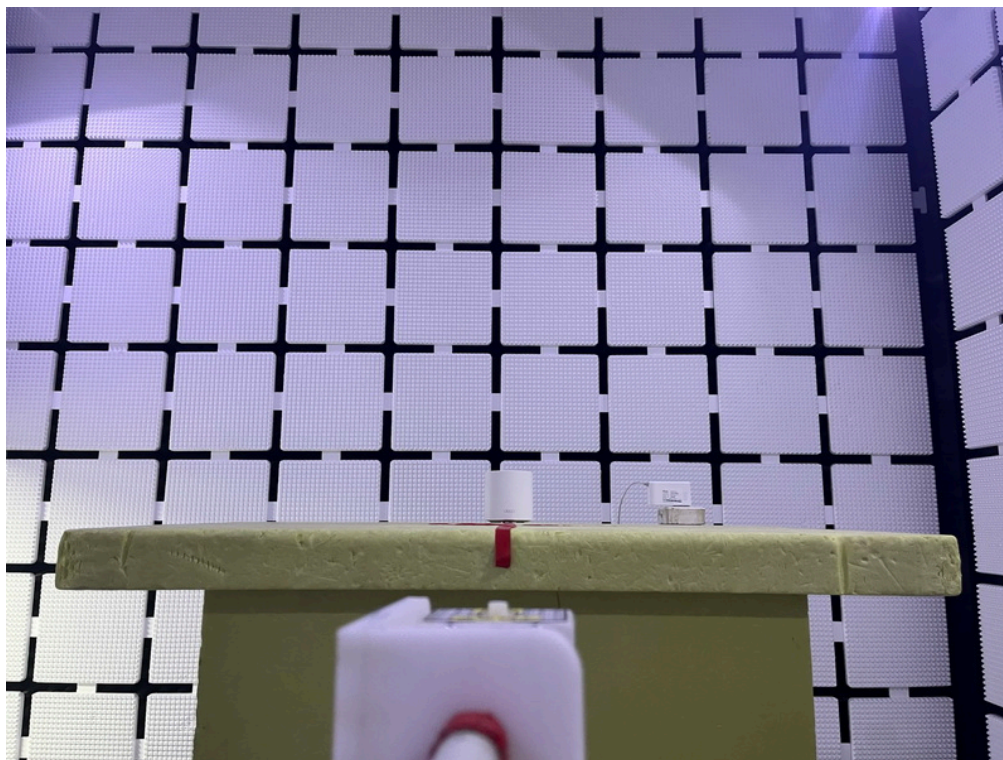Radiated Emissions Test Photos**Harmonic(18 GHz to 26.5 GHz)**

APPENDIX A - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX B Mode Channel 11	Polarization	Vertical
-----------	----------------------	--------------	----------

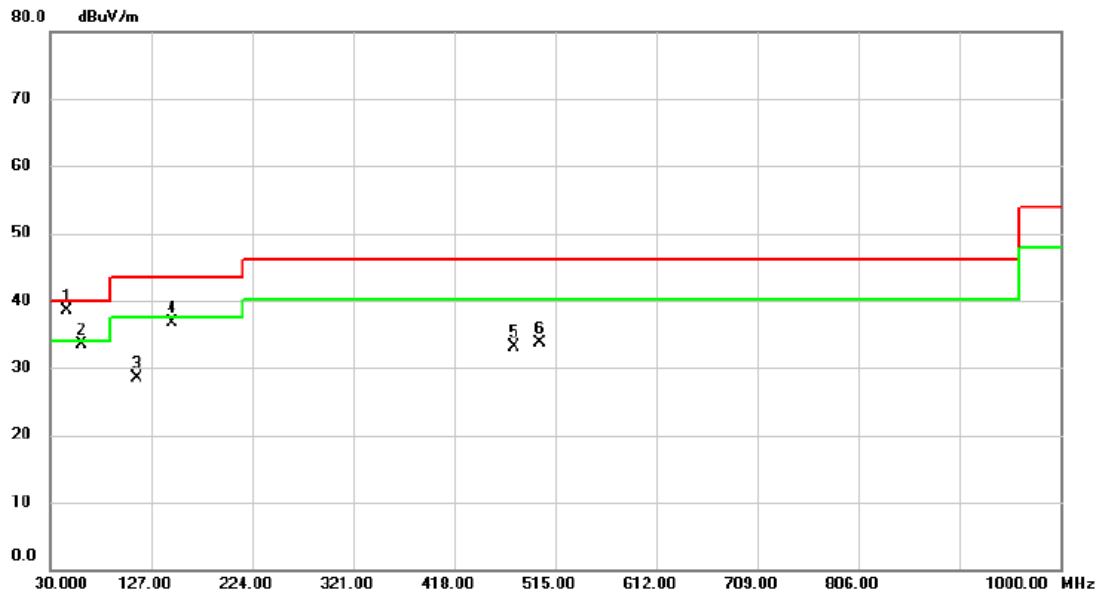


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	46.490	49.68	-11.11	38.57	40.00	-1.43	peak	
2		60.070	45.13	-11.57	33.56	40.00	-6.44	peak	
3		113.420	42.24	-13.67	28.57	43.52	-14.95	peak	
4		146.400	47.57	-10.84	36.73	43.52	-6.79	peak	
5		475.230	38.66	-5.61	33.05	46.02	-12.97	peak	
6		500.450	38.86	-5.25	33.61	46.02	-12.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 01	Polarization	Horizontal
-----------	----------------------	--------------	------------

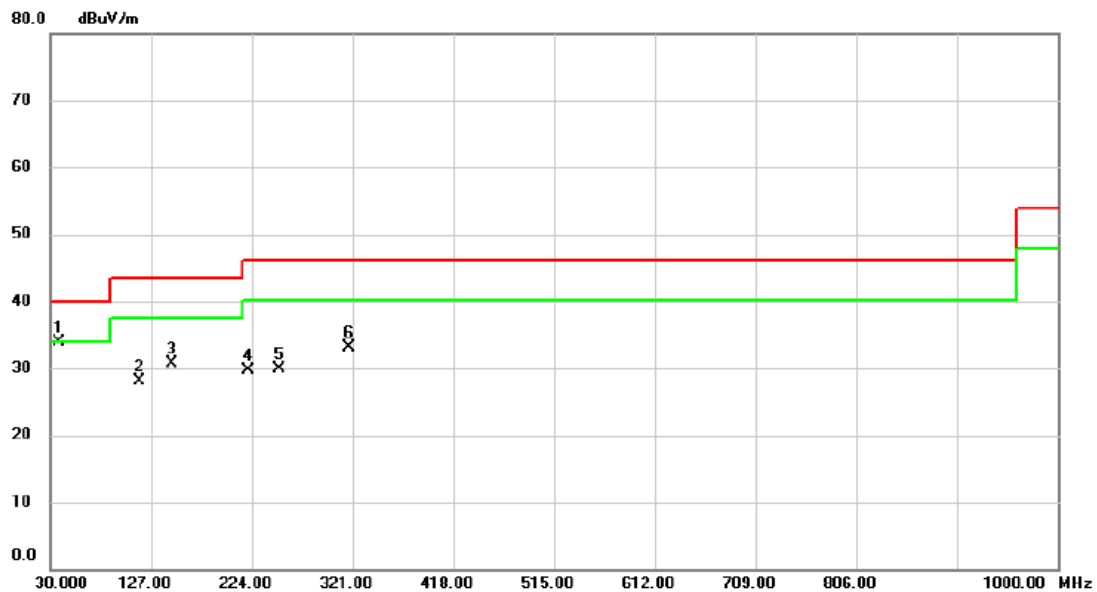

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.730	45.71	-11.73	33.98	40.00	-6.02	peak	
2		116.330	41.51	-13.43	28.08	43.52	-15.44	peak	
3		146.400	41.57	-10.84	30.73	43.52	-12.79	peak	
4		221.090	43.24	-13.46	29.78	46.02	-16.24	peak	
5		250.190	41.32	-11.37	29.95	46.02	-16.07	peak	
6		317.120	42.31	-9.20	33.11	46.02	-12.91	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4923.950	39.60	5.41	45.01	54.00	-8.99	AVG	
2		4924.000	44.51	5.41	49.92	74.00	-24.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

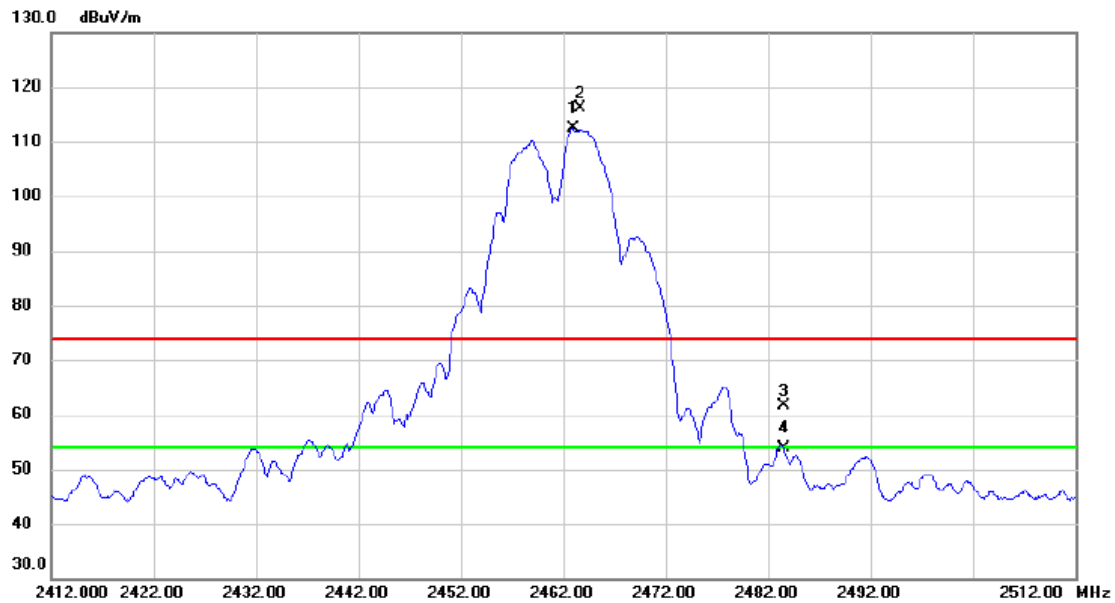


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2463.000	103.00	9.43	112.43	54.00	58.43	AVG	No Limit
2	X	2463.700	106.69	9.43	116.12	74.00	42.12	peak	No Limit
3		2483.500	52.12	9.47	61.59	74.00	-12.41	peak	
4		2483.500	44.31	9.47	53.78	54.00	-0.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2412 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

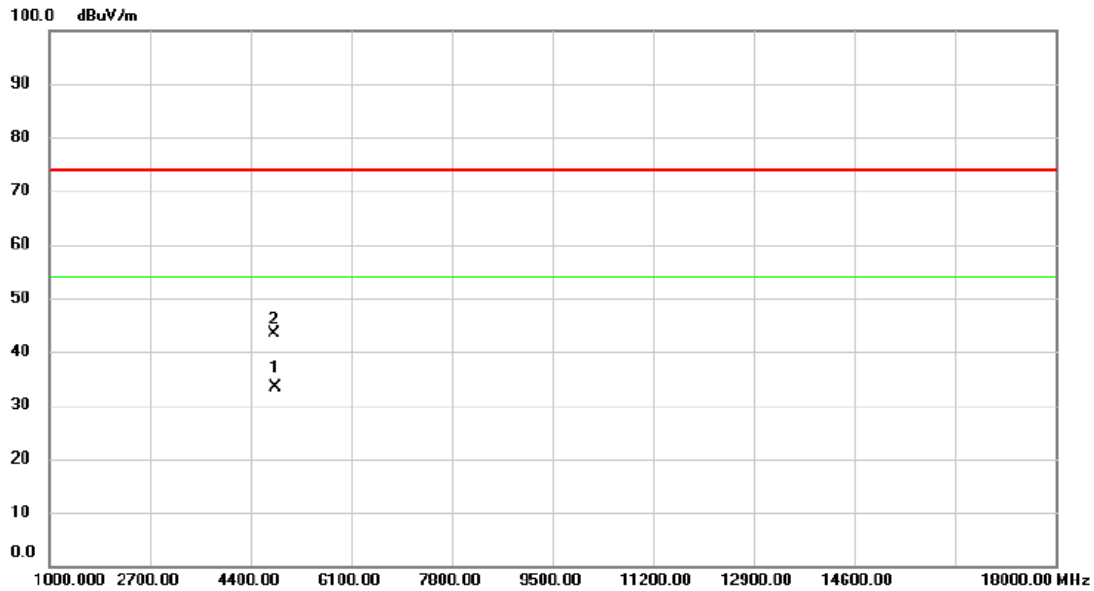


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4824.000	28.07	5.20	33.27	54.00	-20.73	AVG	
2		4806.800	38.09	5.18	43.27	74.00	-30.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2412 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

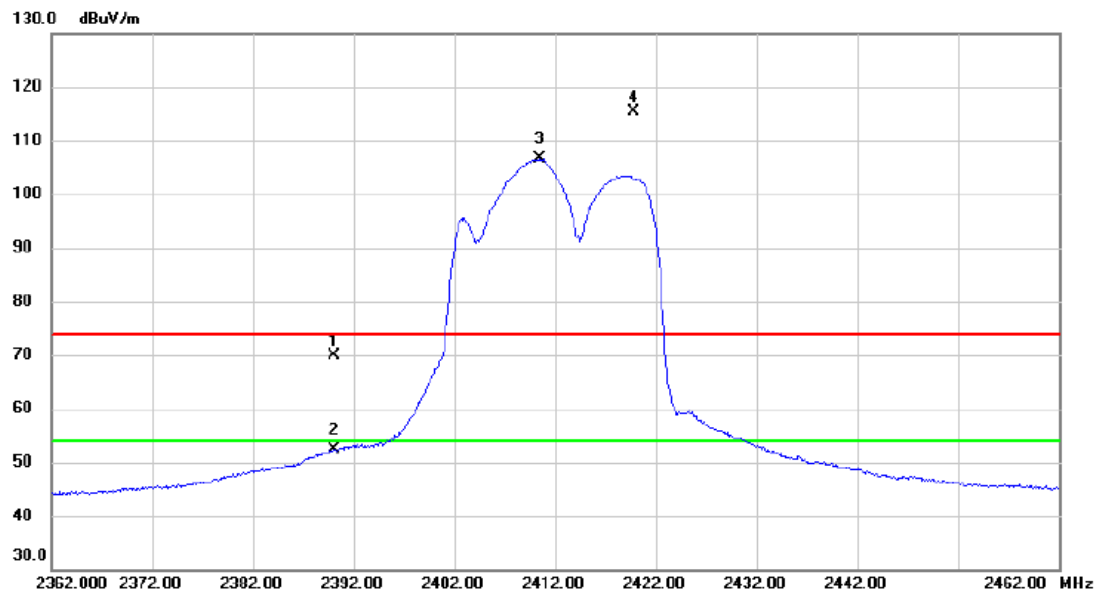


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	60.54	9.26	69.80	74.00	-4.20	peak	
2		2390.000	43.05	9.26	52.31	54.00	-1.69	AVG	
3	*	2410.500	97.20	9.31	106.51	54.00	52.51	AVG	No Limit
4	X	2419.800	106.06	9.33	115.39	74.00	41.39	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

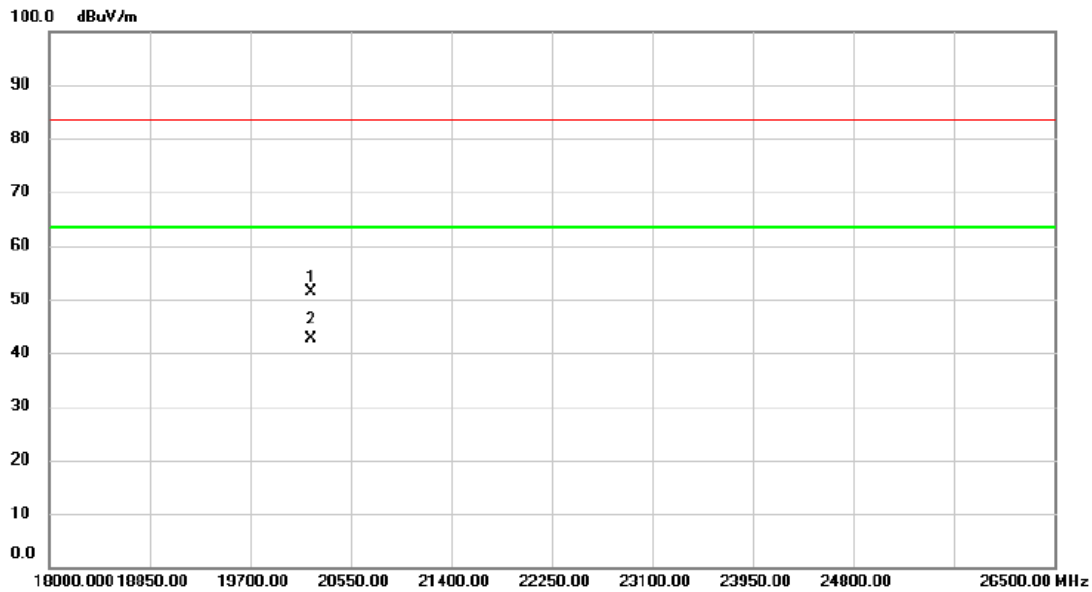


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		20218.500	56.49	-5.01	51.48	83.50	-32.02	peak	
2	*	20218.500	47.52	-5.01	42.51	63.50	-20.99	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

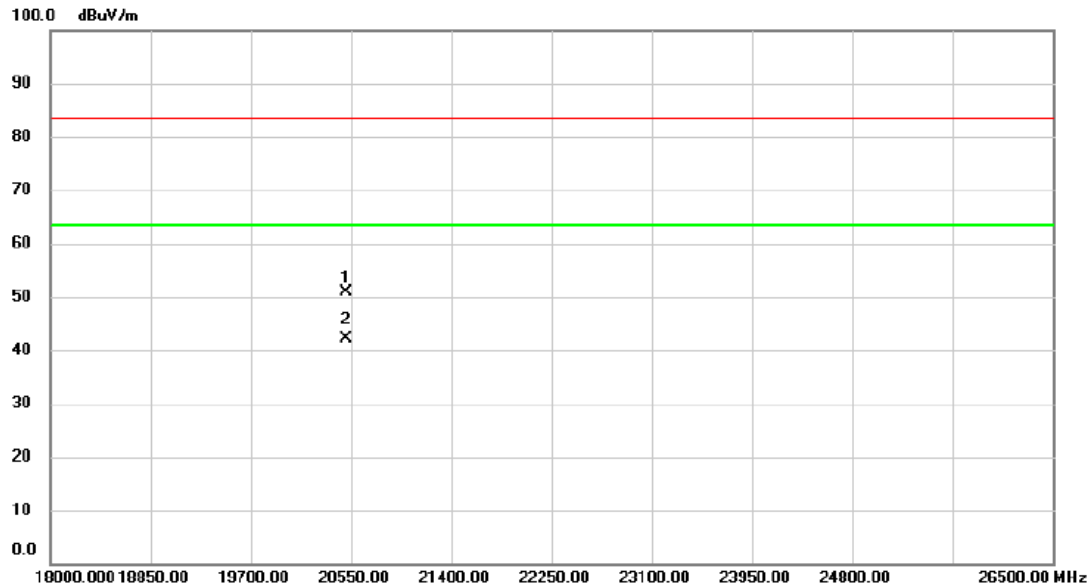

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	20507.500	55.03	-4.05	50.98	83.50	-32.52	peak	
2 *	20507.500	46.21	-4.05	42.16	63.50	-21.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

End of Test Report