


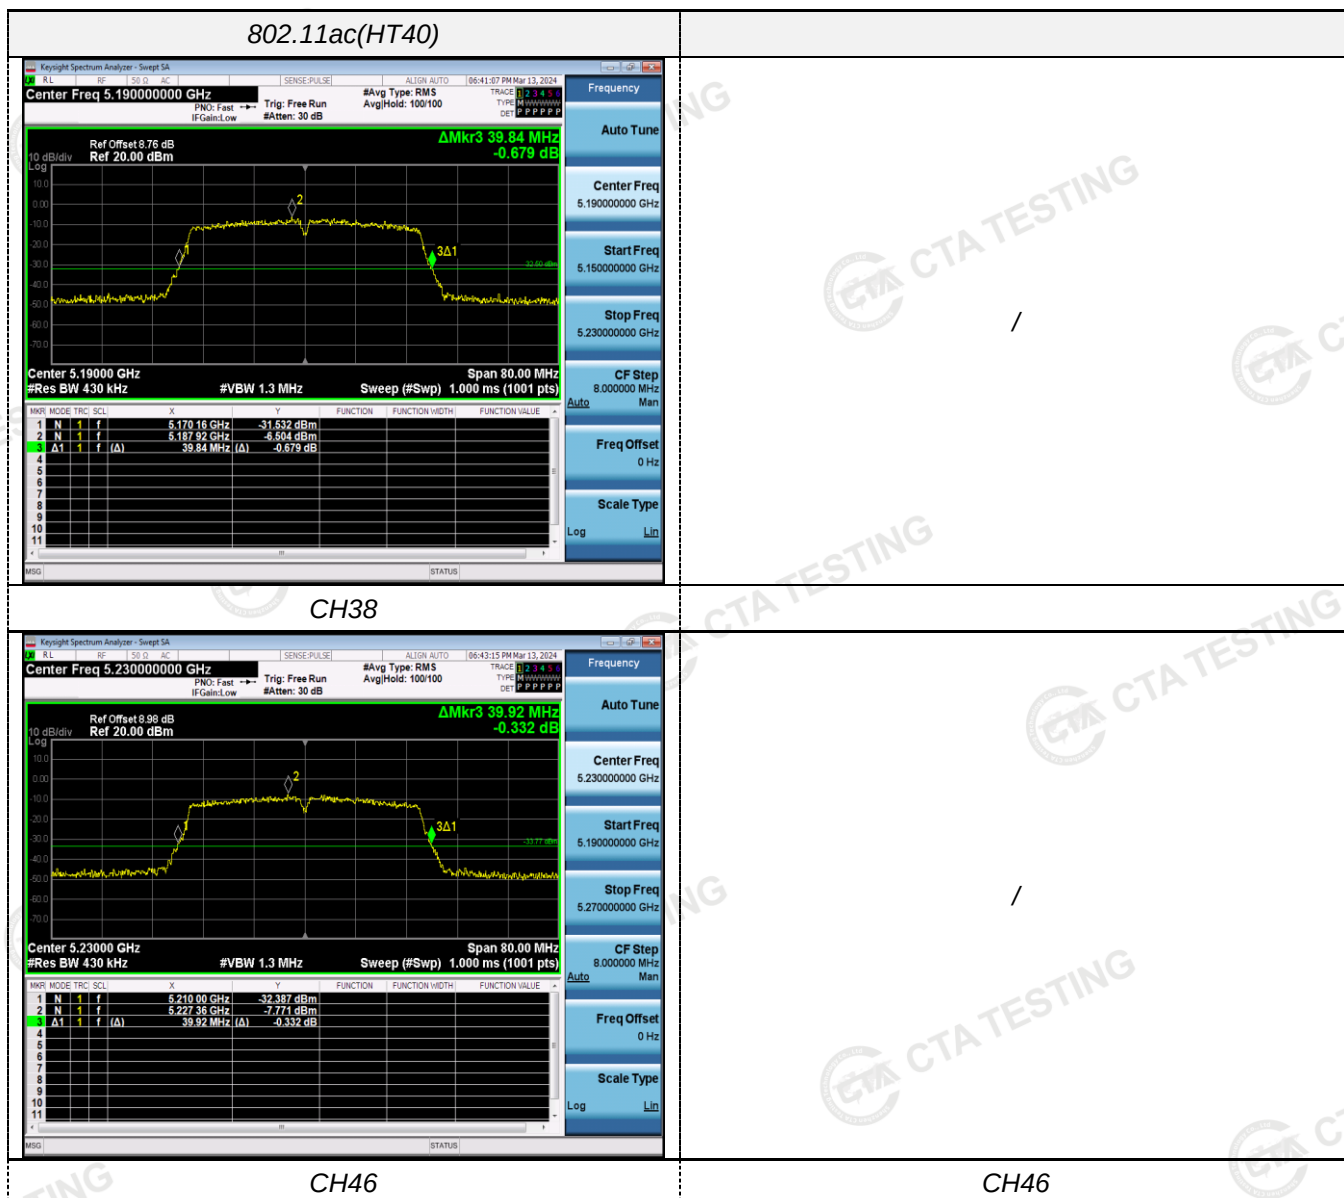

4.6 Minimum Emission Bandwidth (6dB Bandwidth)


Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration




Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	15.000	≥500KHz	Pass
		157	14.720		
		165	13.800		
802.11n(HT20)	U-NII 3	149	15.040		
		157	15.080		
		165	14.160		
802.11n(HT40)	U-NII 3	151	35.040		
		159	34.960		
802.11ac(HT20)	U-NII 3	149	16.680		
		157	17.040		
		165	15.040		
802.11ac(HT40)	U-NII 3	151	35.040		
		159	35.120		

Test plot as follows:

802.11a

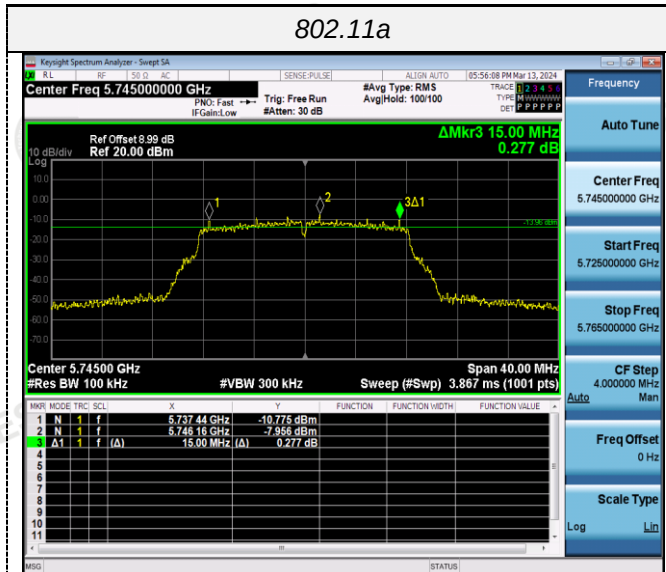


802.11n(HT20)

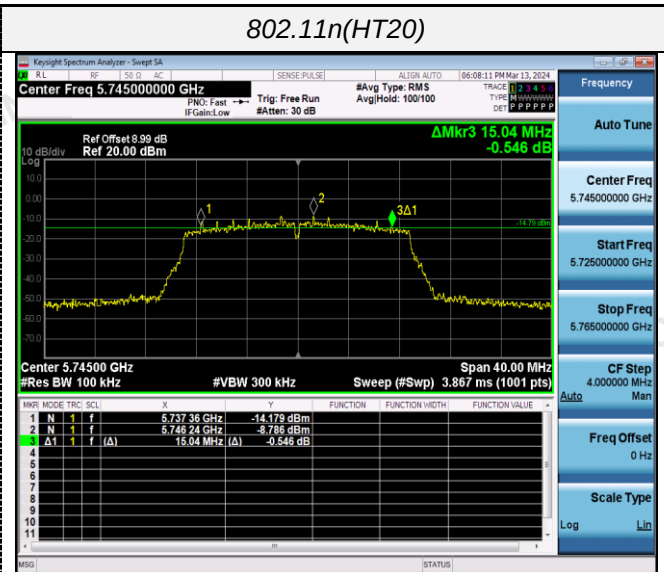


CH149




CH149

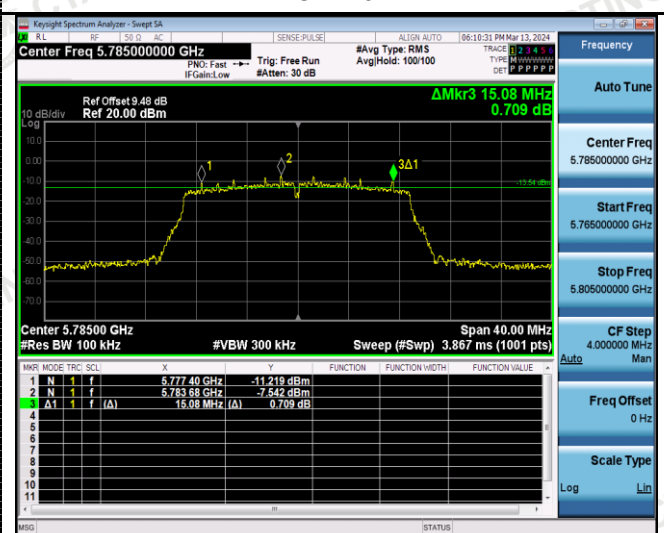

CH157

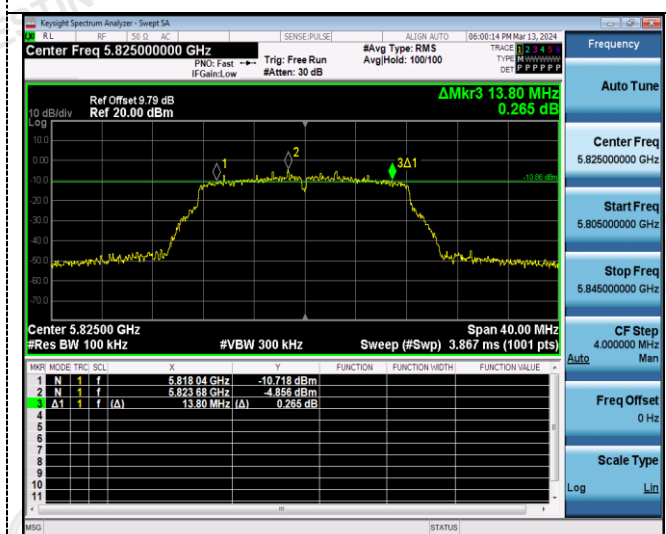

CH157

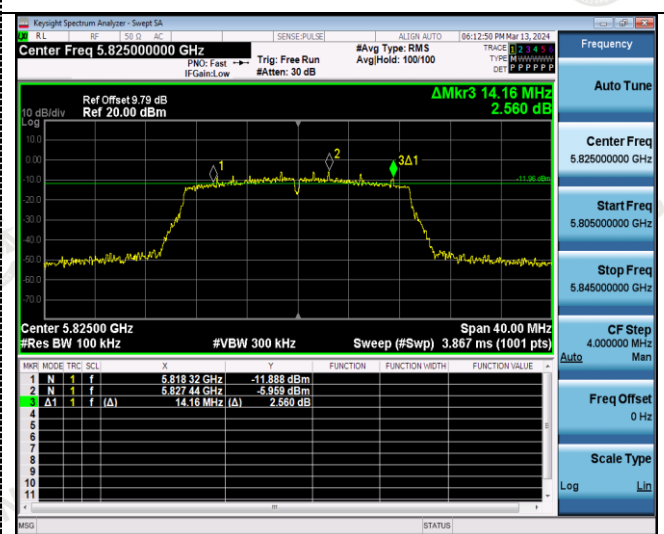


CH165




CH165




802.11n(HT40)

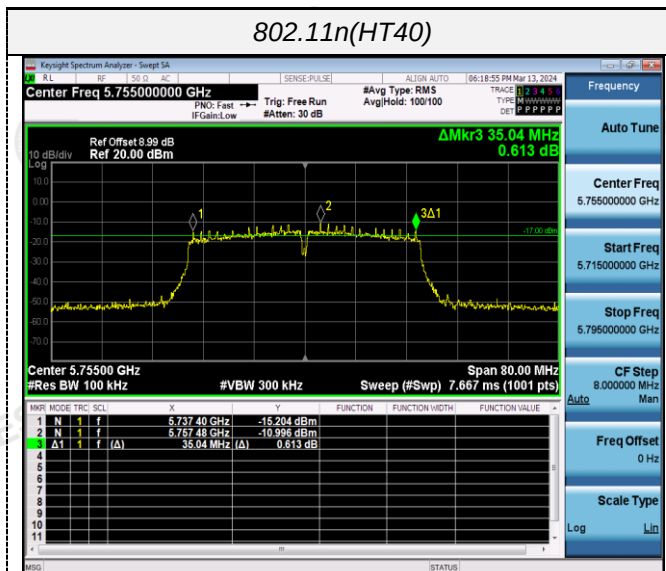


802.11ac(HT20)

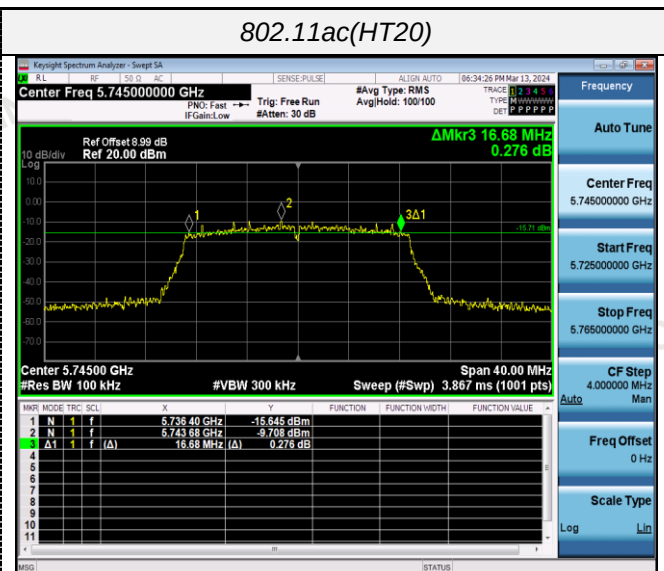


CH151

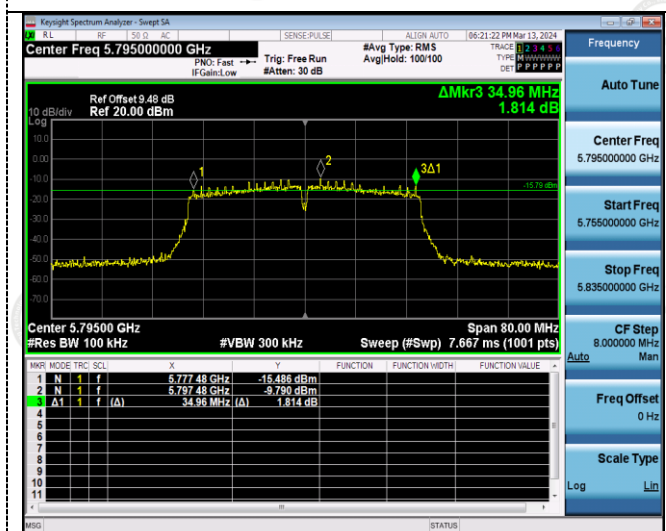


CH149

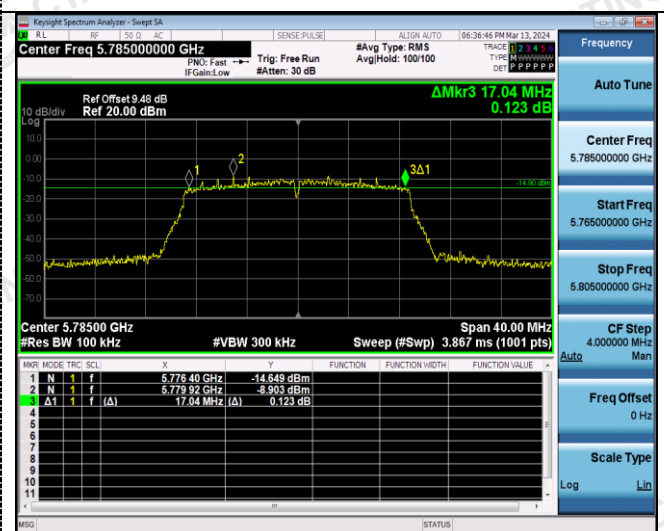

CH159

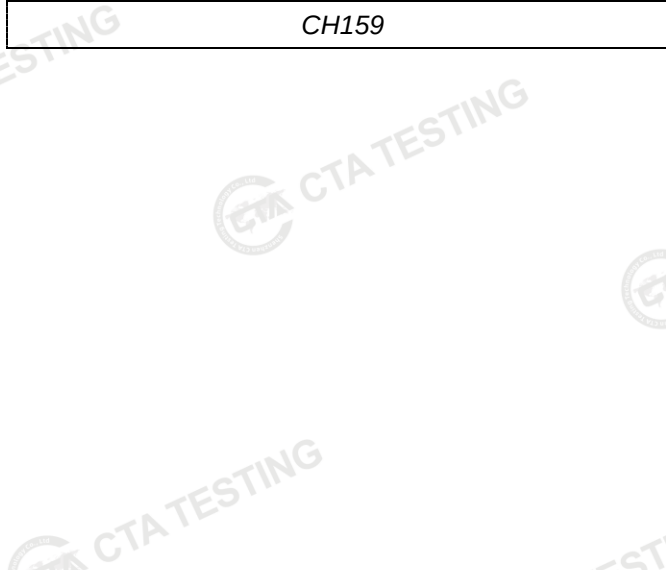

CH157

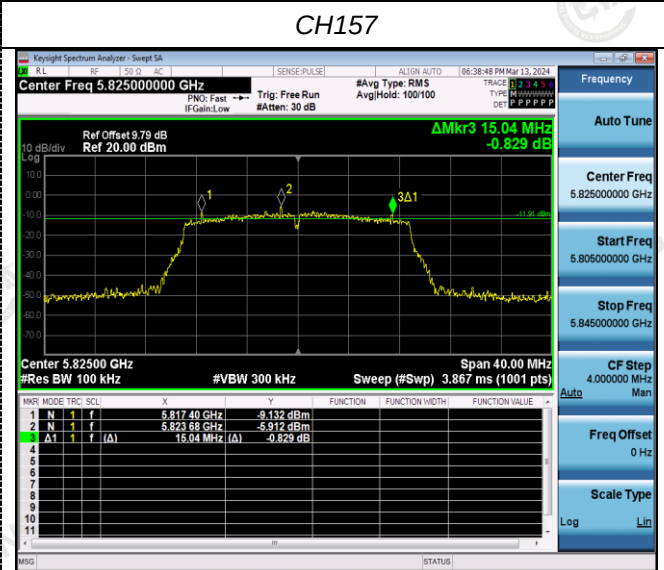

CH165

802.11ac(HT40)

Keysight Spectrum Analyzer - Sweep 5A

Center Freq 5.755000000 GHz

Ref Offset 8.99 dB
Ref 20.00 dBm

ΔMkr3 35.04 MHz
-0.882 dB

Center 5.75500 GHz
#Res BW 100 kHz
#VBW 300 kHz
Sweep (#Swp) 7.667 ms (1001 pts)

MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	5.737 48 GHz	-15.388 dBm			
2	N	1	f	5.757 48 GHz	-10.822 dBm			
Δ1	1	f	(Δ)	35.04 MHz (Δ)	-0.882 dB			

Frequency

Auto Tune

Center Freq
5.755000000 GHz

Start Freq
5.715000000 GHz

Stop Freq
5.795000000 GHz

CF Step
8.000000 MHz

Auto Man

Freq Offset
0 Hz

Scale Type
Log Lin

CH151

Keysight Spectrum Analyzer - Sweep 5A

Center Freq 5.795000000 GHz

Ref Offset 9.48 dB
Ref 20.00 dBm

ΔMkr3 35.12 MHz
0.073 dB

Center 5.79500 GHz
#Res BW 100 kHz
#VBW 300 kHz
Sweep (#Swp) 7.667 ms (1001 pts)

MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	5.777 40 GHz	-16.452 dBm			
2	N	1	f	5.797 48 GHz	-9.941 dBm			
Δ1	1	f	(Δ)	35.12 MHz (Δ)	0.073 dB			

Frequency

Auto Tune

Center Freq
5.795000000 GHz

Start Freq
5.755000000 GHz

Stop Freq
5.835000000 GHz

CF Step
8.000000 MHz

Auto Man

Freq Offset
0 Hz

Scale Type
Log Lin

CH159


CH159

4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

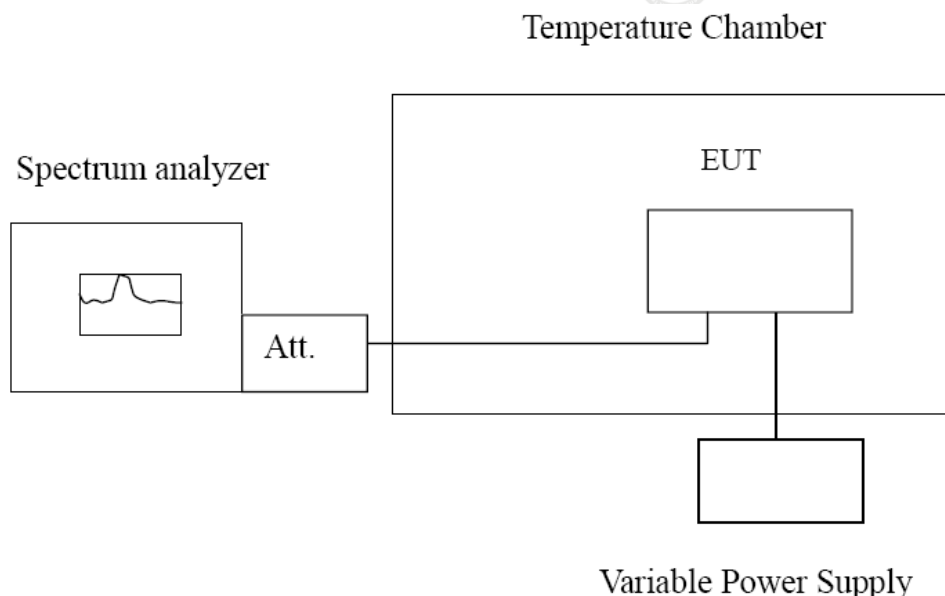

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.


TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.8	-30	110.30	0.021293	Within the band of operation	Pass
	-20	174.61	0.033708		
	-10	145.36	0.028062		
	0	146.68	0.028317		
	10	146.28	0.028239		
	20	99.84	0.019274		
	30	167.26	0.032290		
	40	129.53	0.025006		
	50	128.38	0.024784		
DC 4.2	25	195.56	0.037753	Within the band of operation	Pass
DC 3.4	25	118.62	0.022900		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.8	-30	135.86	0.023648	Within the band of operation	Pass
	-20	129.40	0.022524		
	-10	167.59	0.029171		
	0	169.66	0.029532		
	10	136.66	0.023788		
	20	144.77	0.025199		
	30	116.77	0.020326		
	40	168.56	0.029340		
	50	160.63	0.027960		
DC 4.2	25	150.90	0.026266	Within the band of operation	Pass
DC 3.4	25	129.55	0.022550		

5 Test Setup Photos of the EUT

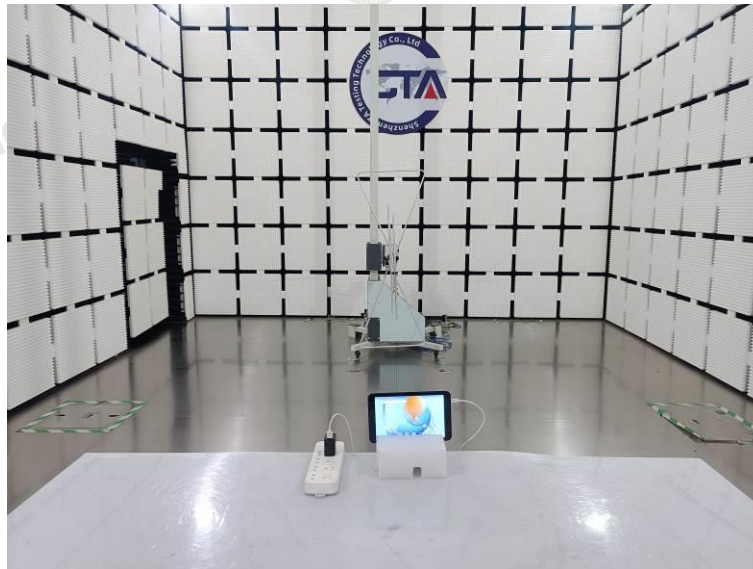

6 Photos of the EUT

Reference to the test report No. CTA24031200101.

***** End of Report *****