



SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V06

Report Template Revision Date: 2026-01-30

TEST REPORT

Report No.: CQASZ20260300645E-02
Applicant: AC Infinity Inc.
Address of Applicant: 21880 Baker Parkway, City of Industry, CA 91789 USA

Equipment Under Test (EUT):

Product: THROUGH-WALL FAN
Model No.: AC-TWT8, AC-TWT3, AC-TWT4, AC-TWT5, AC-TWT6, AC-TWT7, AC-TWT9, AC-TWT10, AC-TWS3, AC-TWS4, AC-TWS5, AC-TWS6, AC-TWS7, AC-TWS8, AC-TWS9, AC-TWS10, AC-TWX3, AC-TWX4, AC-TWX5, AC-TWX6, AC-TWX7, AC-TWX8, AC-TWX9, AC-TWX10

Test Model No.: AC-TWT8

Brand Name: N/A

FCC ID: 2AXMF-TWT

Standards: 47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2020

Date of Receipt: 2026-03-30

Date of Test: 2026-03-30 to 2026-04-10

Date of Issue: 2026-5-28

Test Result : PASS*

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

Lewis Zhou

(Lewis Zhou)

Reviewed By:

Timo Lei

(Timo Lei)

Approved By:

Jack Ai

(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20260300645E-02	Rev.01	Initial report	2026-5-28

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	5
.....	6
4 GENERAL INFORMATION	7
4.1 CLIENT INFORMATION	7
4.2 GENERAL DESCRIPTION OF EUT	7
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
4.4 TEST ENVIRONMENT AND MODE	10
4.5 DESCRIPTION OF SUPPORT UNITS	15
4.6 TEST LOCATION	15
4.7 TEST FACILITY	15
4.8 TEST CONFIGURATION	15
4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY	16
4.10 DEVIATION FROM STANDARDS	16
4.11 ABNORMALITIES FROM STANDARD CONDITIONS	16
4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER	16
4.13 EQUIPMENT LIST	17
5 TEST RESULTS AND MEASUREMENT DATA	18
5.1 ANTENNA REQUIREMENT	18
5.2 CONDUCTED EMISSIONS	19
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	23
Test Result	24
Note: Duty cycle correction factor details please see section 4.4.	24
When Duty cycle >98%, D.C.F is not required.	24
Test Graphs	25
5.4 99% OCCUPIED BANDWIDTH	32
Test Result	33
Test Graphs	34
5.5 6dB OCCUPIED BANDWIDTH	41
Test Result	42
Test Graphs	43
5.6 POWER SPECTRAL DENSITY	50
Test Result	51
Test Graphs	52
5.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS	59
Test Result	60
5.7.1 Test Graphs	61
5.8 RF CONDUCTED SPURIOUS EMISSIONS	66
Test Result	67
Test Graphs	69
5.9 RADIATED SPURIOUS EMISSIONS	88
5.9.1 Radiated emission below 1GHz	91
5.9.2 Transmitter emission above 1GHz	93
5.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	105
6 PHOTOGRAPHS - EUT TEST SETUP	113
6.1 RADIATED SPURIOUS EMISSION	113

6.2 CONDUCTED EMISSION	114
6.3 RF CONDUCTED MEASUREMENT	115
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	116

4 General Information

4.1 Client Information

Applicant:	AC Infinity Inc.
Address of Applicant:	21880 Baker Parkway, City of Industry, CA 91789 USA
Manufacturer:	AC Infinity Inc.
Address of Manufacturer:	21880 Baker Parkway, City of Industry, CA 91789 USA

4.2 General Description of EUT

Product Name:	THROUGH-WALL FAN
Model No.:	AC-TWT8, AC-TWT3, AC-TWT4, AC-TWT5, AC-TWT6, AC-TWT7, AC-TWT9, AC-TWT10, AC-TWS3, AC-TWS4, AC-TWS5, AC-TWS6, AC-TWS7, AC-TWS8, AC-TWS9, AC-TWS10, AC-TWX3, AC-TWX4, AC-TWX5, AC-TWX6, AC-TWX7, AC-TWX8, AC-TWX9, AC-TWX10
Test Model No.:	AC-TWT8
Trade Mark:	AC INFINITY
Software Version:	3.0.29
Hardware Version:	V1.0
Power Supply:	Power supply AC120V
EUT Supports Radios application:	2.4GHz: Wi-Fi: 802.11b/g/n(HT20)/ax(HE20): 2412MHz~2462MHz; 802.11n(HT40)/ax(HE40): 2422MHz~2452MHz
Simultaneous Transmission	☐ Simultaneous TX is supported and evaluated in this report. ☒ Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20)/ax(HE20): 2412MHz to 2462MHz IEEE 802.11n(HT40)/ax(HE40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20/ax HE20: 11 Channels IEEE 802.11n HT40/ax HE40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11ax(HE20 and HE40): OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) : 13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps IEEE for 802.11ax(HE20): 8.6Mbps/17.2Mbps/25.8Mbps/34.4Mbps/51.6Mbps/68.8Mbps/77.4Mbps

	/86.7Mbps/103.3Mbps/114.7Mbps/129.0Mbps/143.4Mbps IEEE for 802.11ax(HE40): 17.2Mbps/34.4Mbps/51.6Mbps/68.8Mbps/103.2Mbps/137.6Mbps/154.9Mbps /173.3Mbps/206.5Mbps/229.4Mbps/258.1Mbps/286.8Mbps
Product Type:	☒ Mobile ☐ Portable ☐ Fix Location
Test Software of EUT:	EspRFTTestTool
Antenna Type:	PCB antenna
Antenna Gain:	3.37dBi

Operation Frequency each of channel(802.11b/g/n HT20/ax HE20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40/ax HE40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20)/ax(HE20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz


For 802.11n (HT40)/ax(HE40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

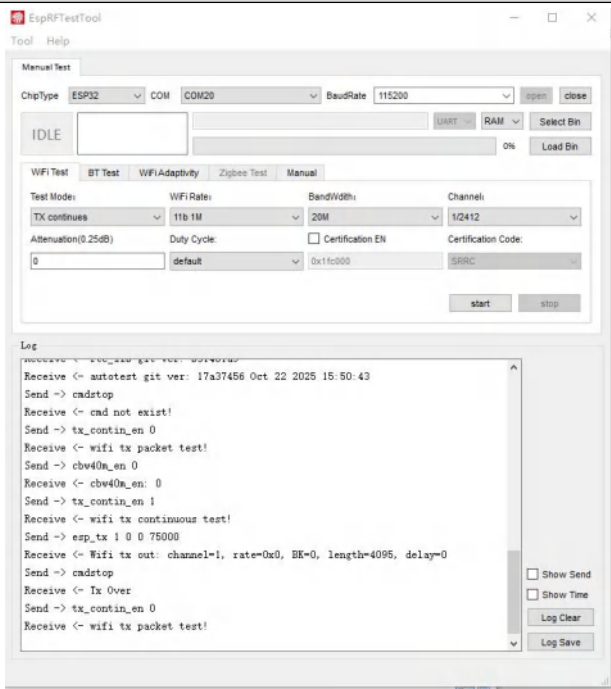
Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.
EUT Power level:	Class0
Run Software:	
	

Operated Mode for Worst Duty Cycle:				
Test Mode	On time [Ton] (ms)	Period [Ttotal] ms)	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	0.99	1.01	98.02	0.09
IEEE802.11g	0.68	0.69	98.55	0.06
IEEE802.11n (HT20)	0.65	0.67	97.01	0.13
IEEE802.11n (HT40)	0.34	0.35	97.14	0.13
IEEE802.11ax (HE20)	0.65	0.66	98.48	0.07
IEEE802.11ax (HE40)	0.34	0.35	97.14	0.13

Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

Test Graph_IEEE802.11b Duty Cycle:

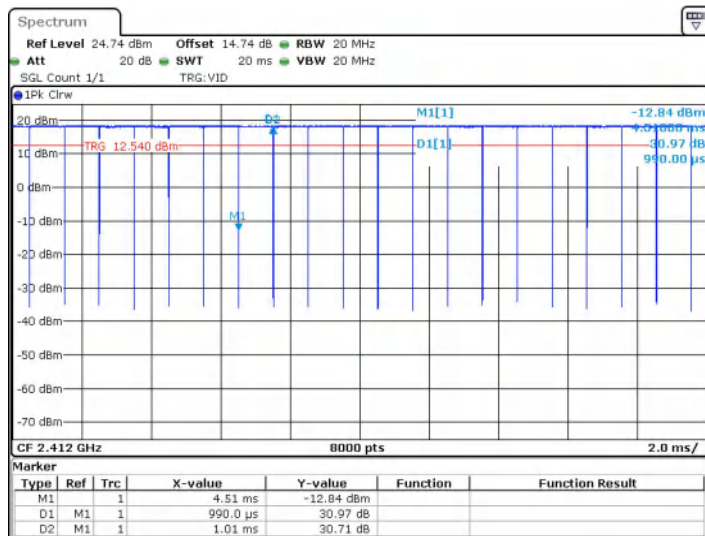


Date: 10 APR 2026 12:42:02

Test Graph_IEEE802.11g Duty Cycle:

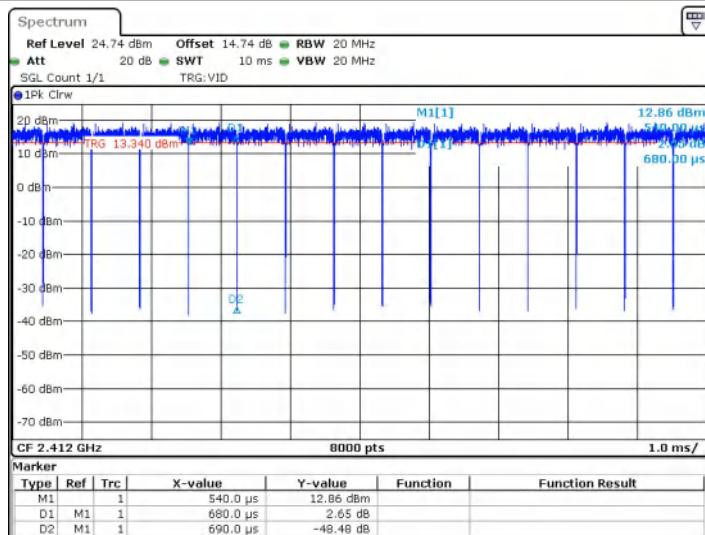


Date: 10 APR 2026 12:47:29


Test Graph_IEEE802.11 n (HT20) Duty Cycle:

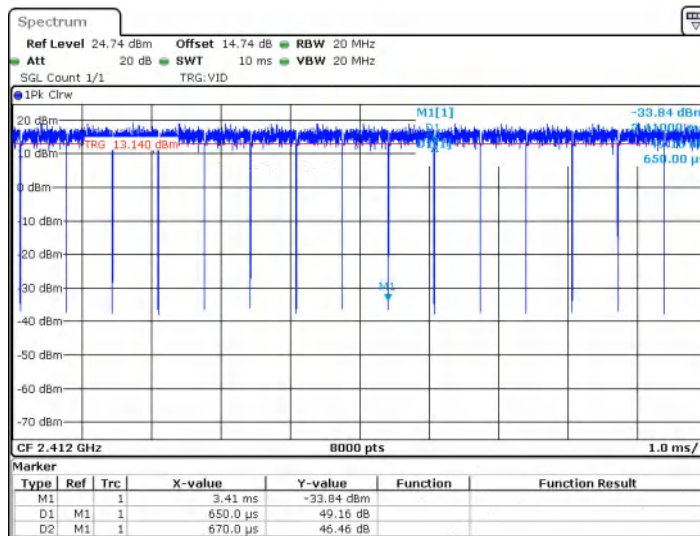


Test Graph_IEEE802.11 n (HT40) Duty Cycle:

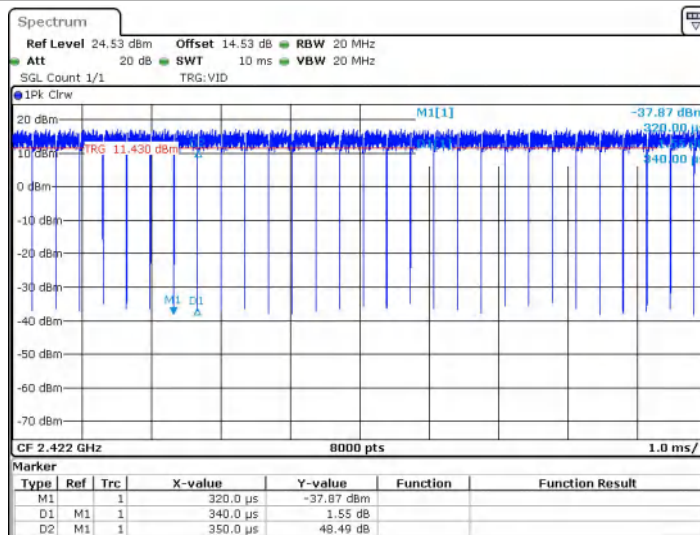

Test Graph_IEEE802.11 ax (HE20) Duty Cycle:

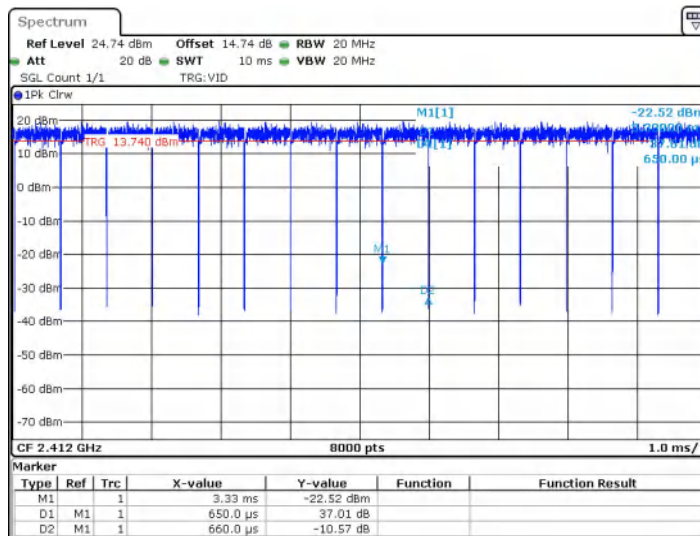

Test Graph_IEEE802.11 ax (HE40) Duty Cycle:

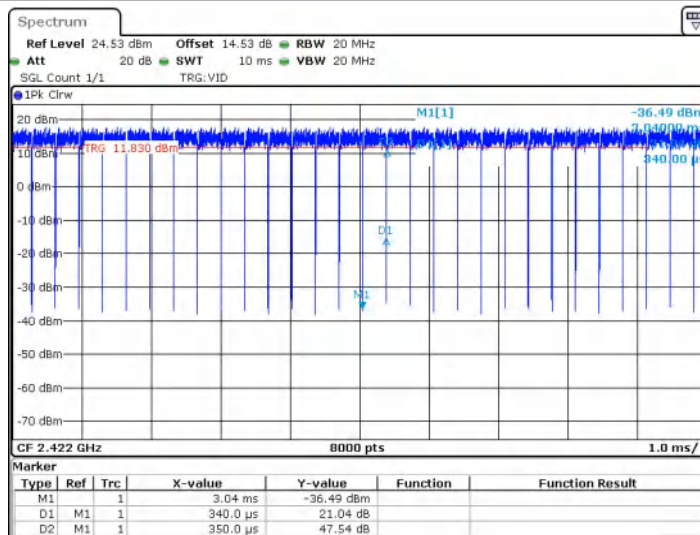

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD 102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:


• **A2LA (Certificate No. 4742.01)**

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Test configuration

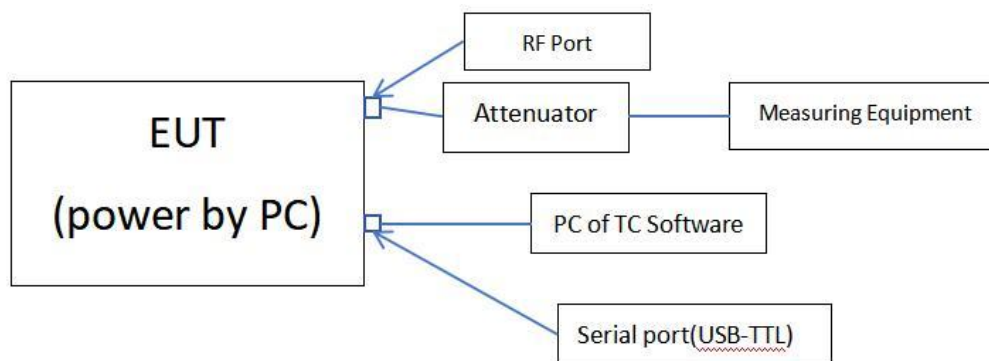

4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.10 Deviation from Standards

None.

4.11 Abnormalities from Standard Conditions

None.

4.12 Other Information Requested by the Customer

None.

4.13 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU26	CQA-038	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU40	CQA-075	2025/9/1	2026/8/31
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/9/1	2026/8/31
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/9/1	2026/8/31
Preamplifier	EMCI	EMC184055SE	CQA-089	2025/9/1	2026/8/31
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2025/9/1	2026/8/31
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2025/9/1	2026/8/31
Antenna Connector	CQA	RFC-01	CQA-080	2025/9/1	2026/8/31
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/9/1	2026/8/31
Power meter	R&S	NRVD	CQA-029	2025/9/1	2026/8/31
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/9/1	2026/8/31
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
LISN	R&S	ENV216	CQA-003	2025/9/1	2026/8/31
Coaxial cable	CQA	N/A	CQA-C009	2025/9/1	2026/8/31
DC power	KEYSIGHT	E3631A	CQA-028	2025/9/1	2026/8/31
Band Reject Filter	Wainwright instrument gmbh	WRCG2400/2483-2390/2493-35/10SS	CQA-037	2025/9/1	2026/8/31

Test software:

	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

5 Test results and Measurement Data

5.1 Antenna Requirement

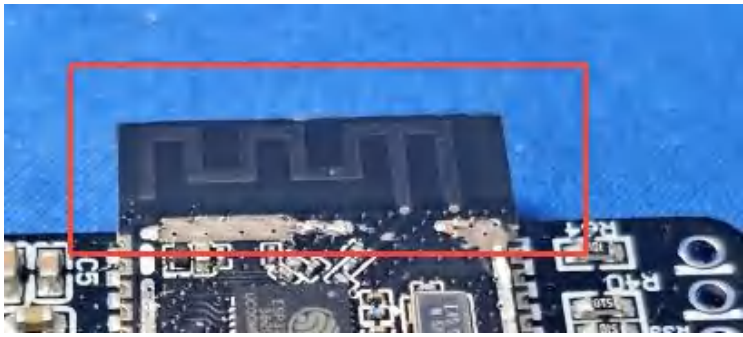Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is PCB antenna. The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment This is either permanently attachment or a unique coupling that satisfies the requirement.	


5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.		
Test Setup:	Shielding Room AC Mains LISN1 EUT AE LISN2 AC Mains Test Receiver 80cm 80cm 80cm Ground Reference Plane		

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

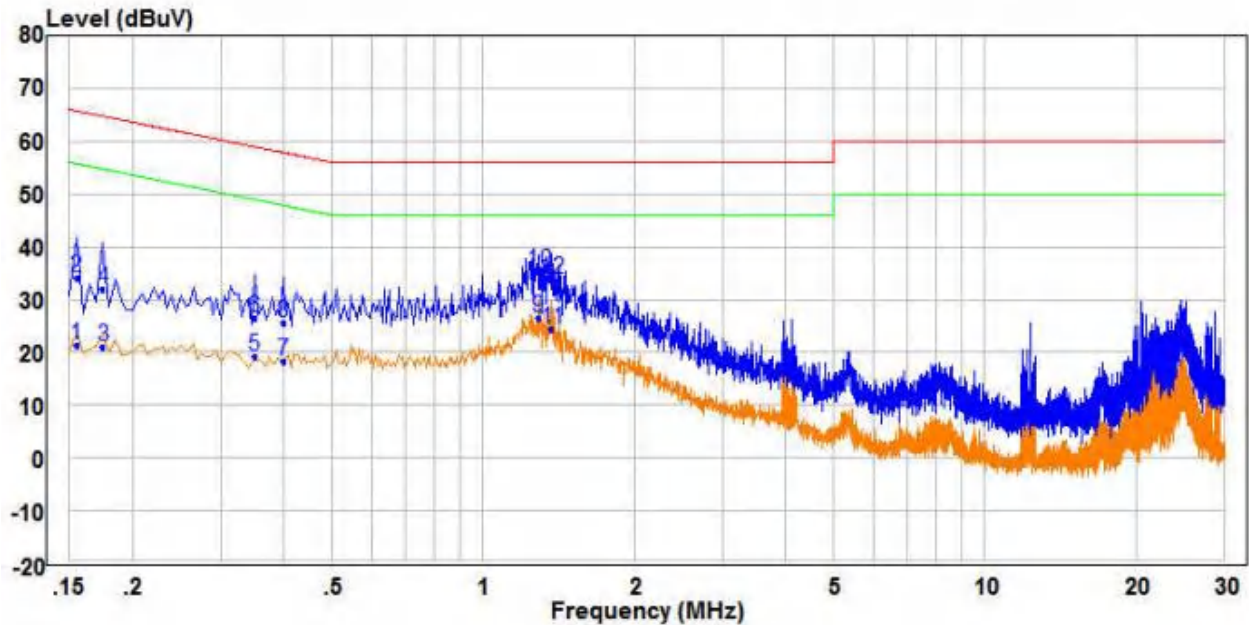


	Freq	Read		Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	Factor	dBuV	dBuV	dB		
1	0.155	11.53	9.69	21.22	55.73	-34.51	Average	Line
2	0.155	24.49	9.69	34.18	65.73	-31.55	QP	Line
3	0.175	11.53	9.65	21.18	54.72	-33.54	Average	Line
4	0.175	22.20	9.65	31.85	64.72	-32.87	QP	Line
5	0.350	9.54	9.55	19.09	48.96	-29.87	Average	Line
6	0.350	16.82	9.55	26.37	58.96	-32.59	QP	Line
7	0.400	8.73	9.61	18.34	47.85	-29.51	Average	Line
8	0.400	15.98	9.61	25.59	57.85	-32.26	QP	Line
9 PP	1.290	16.02	10.41	26.43	46.00	-19.57	Average	Line
10 QP	1.290	24.80	10.41	35.21	56.00	-20.79	QP	Line
11	1.370	13.83	10.58	24.41	46.00	-21.59	Average	Line
12	1.370	23.21	10.58	33.79	56.00	-22.21	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

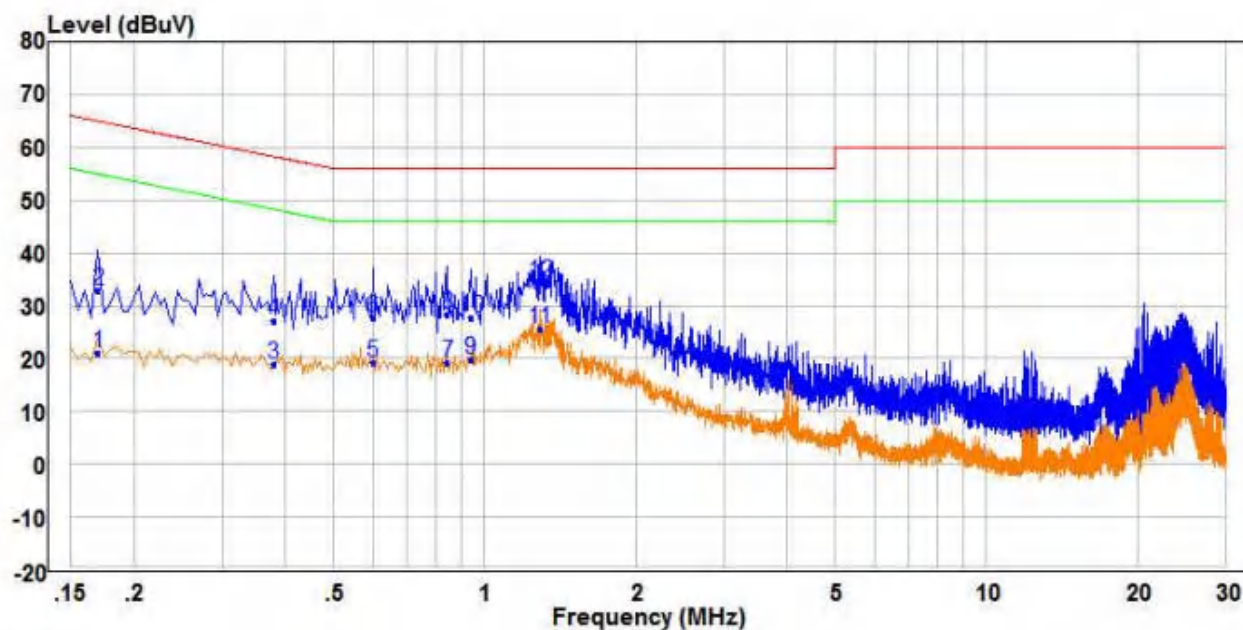


	Freq	Read		Limit	Over		
	MHz	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	Pol/Phase
1	0.170	11.43	9.66	21.09	54.96	-33.87	Average
2	0.170	23.36	9.66	33.02	64.96	-31.94	QP
3	0.380	9.33	9.58	18.91	48.28	-29.37	Average
4	0.380	17.65	9.58	27.23	58.28	-31.05	QP
5	0.600	9.44	9.80	19.24	46.00	-26.76	Average
6	0.600	18.01	9.80	27.81	56.00	-28.19	QP
7	0.845	9.41	9.80	19.21	46.00	-26.79	Average
8	0.845	18.44	9.80	28.24	56.00	-27.76	QP
9	0.940	10.03	9.74	19.77	46.00	-26.23	Average
10	0.940	17.94	9.74	27.68	56.00	-28.32	QP
11 PP	1.290	15.93	9.71	25.64	46.00	-20.36	Average
12 QP	1.290	24.61	9.71	34.32	56.00	-21.68	QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	<i>Setup for Power meter measurement method</i>  <i>Setup for Spectrum analyser measurement method</i> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report. Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel.
Limit:	30dBm
Test Results:	Pass


Test Result


Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	15.24	≤30.00	PASS
	2437	15.09	≤30.00	PASS
	2462	14.15	≤30.00	PASS
11G	2412	9.91	≤30.00	PASS
	2437	10.03	≤30.00	PASS
	2462	9.13	≤30.00	PASS
11N20SISO	2412	9.76	≤30.00	PASS
	2437	9.84	≤30.00	PASS
	2462	8.98	≤30.00	PASS
11N40SISO	2422	8.49	≤30.00	PASS
	2437	8.41	≤30.00	PASS
	2452	7.86	≤30.00	PASS
11AX20SISO	2412	10.26	≤30.00	PASS
	2437	10.40	≤30.00	PASS
	2462	9.57	≤30.00	PASS
11AX40SISO	2422	9.03	≤30.00	PASS
	2437	8.95	≤30.00	PASS
	2452	8.09	≤30.00	PASS

Note: Duty cycle correction factor details please see section 4.4.


When Duty cycle >98%, D.C.F is not required.

Test Graphs

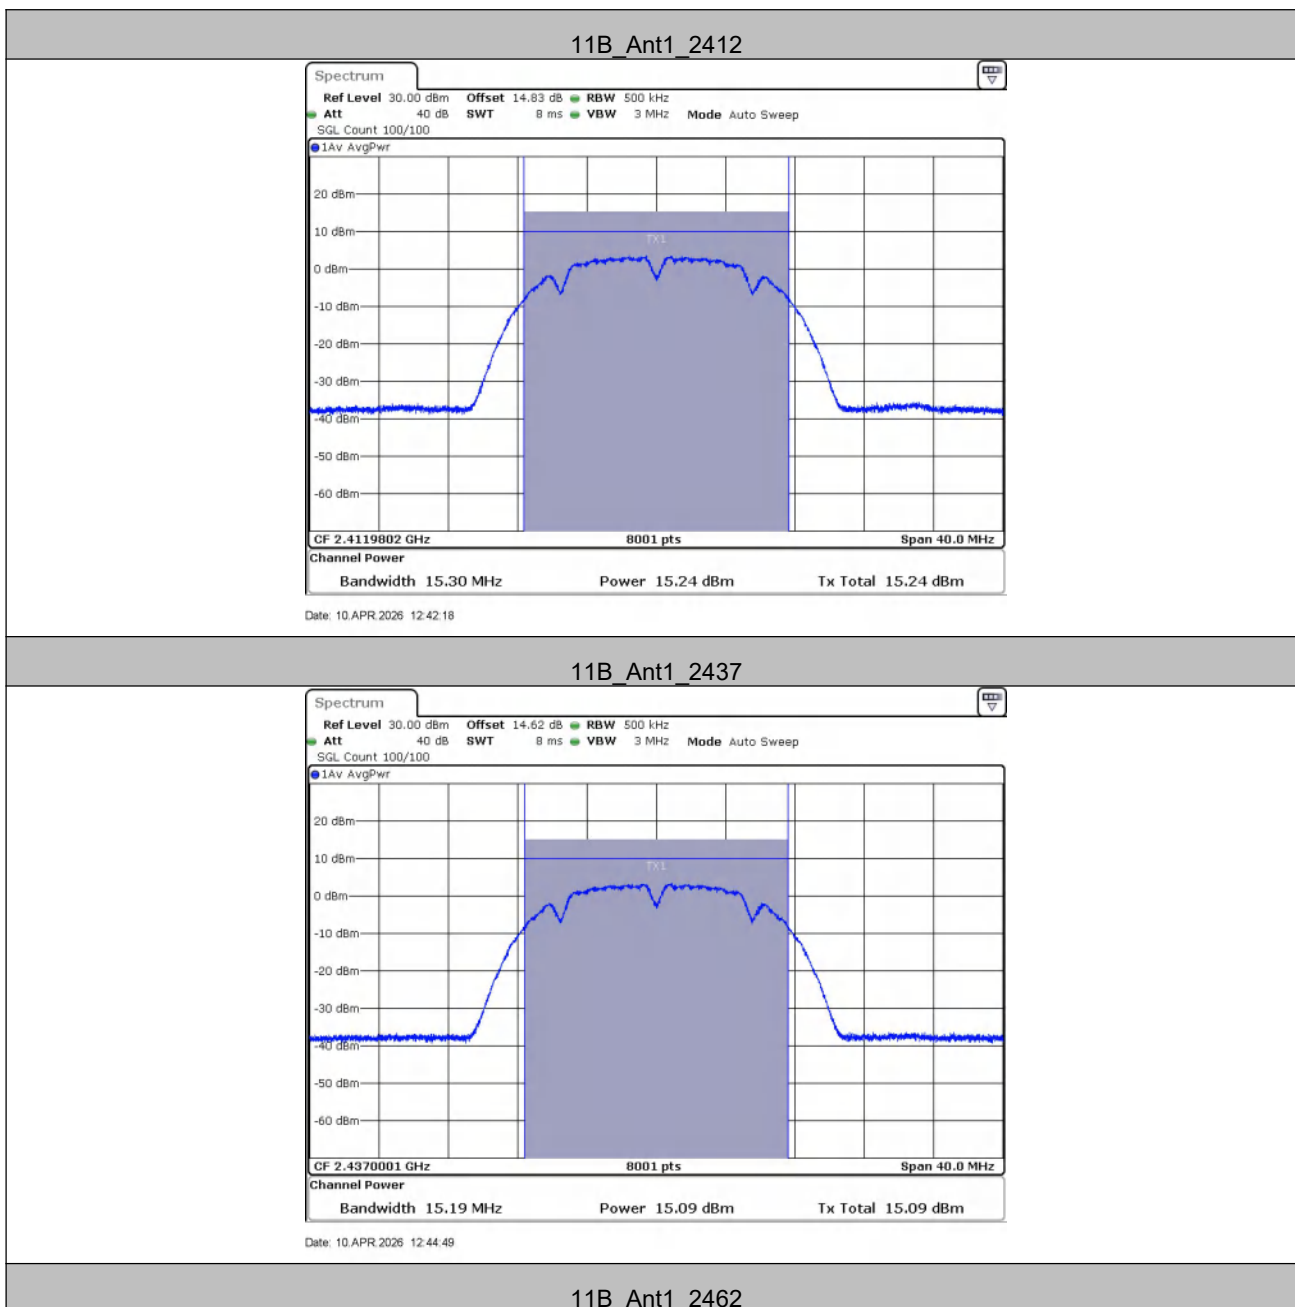


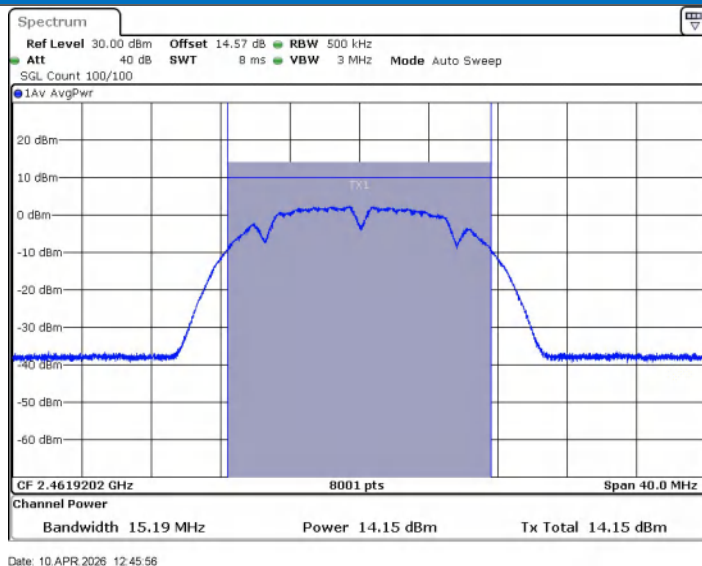


11G_Ant1_2412

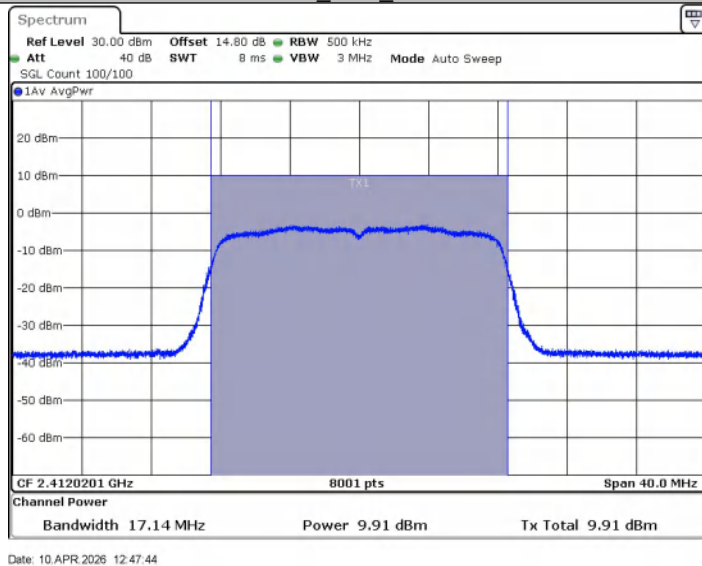

11G_Ant1_2437

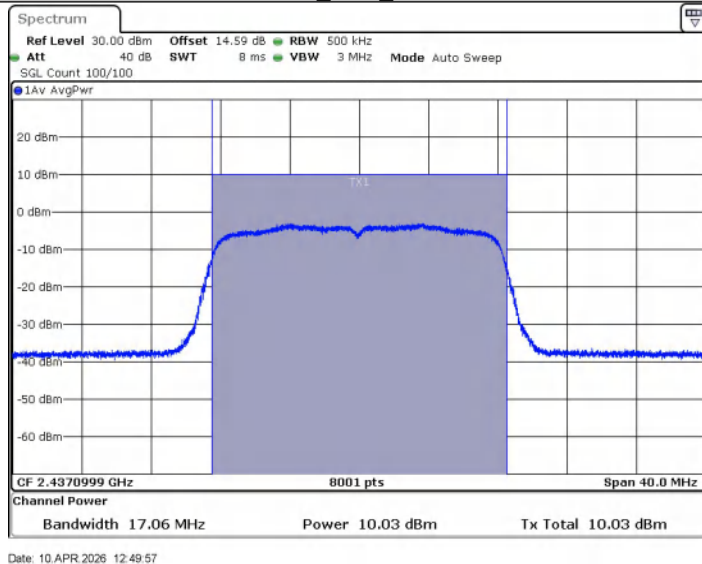


11G_Ant1_2462

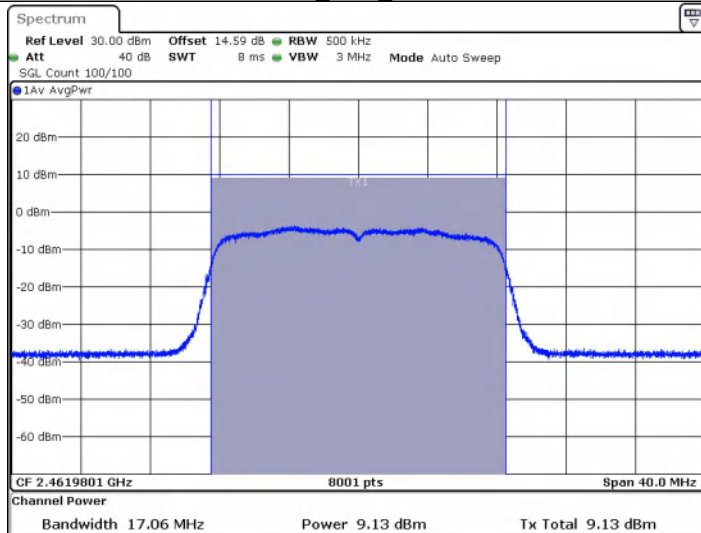


Date: 10 APR 2026 12:51:07

11N20SISO_Ant1_2412

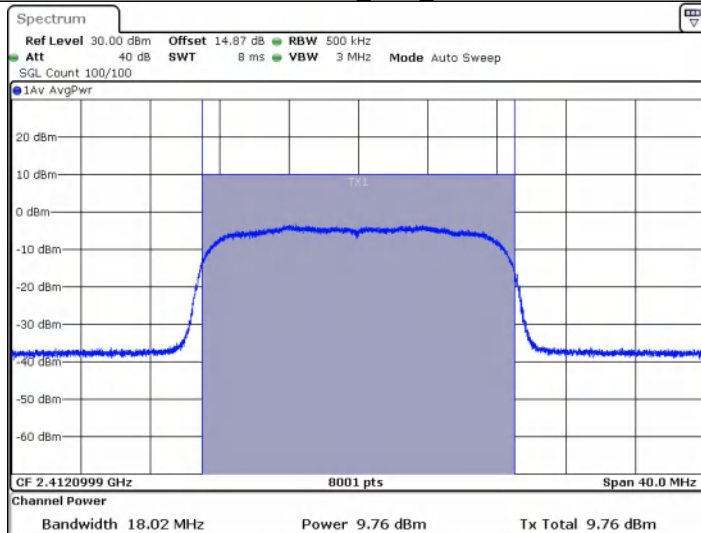


Date: 10 APR 2026 12:53:49


11N20SISO_Ant1_2437

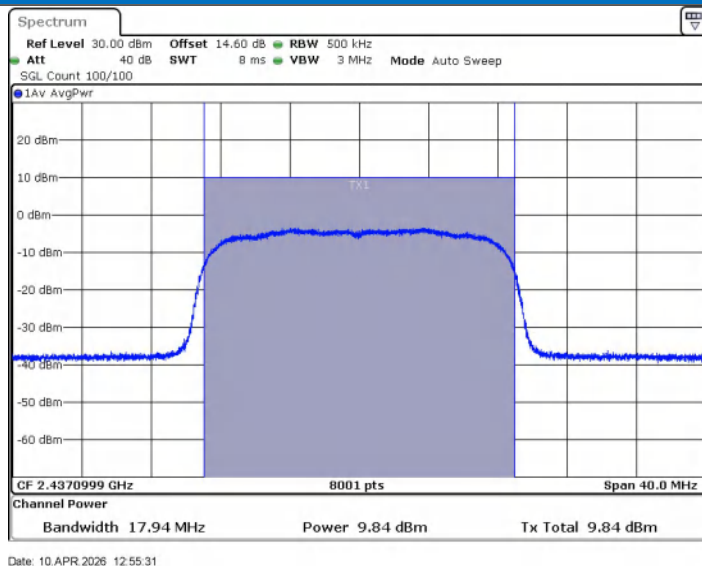


11N20SISO_Ant1_2462

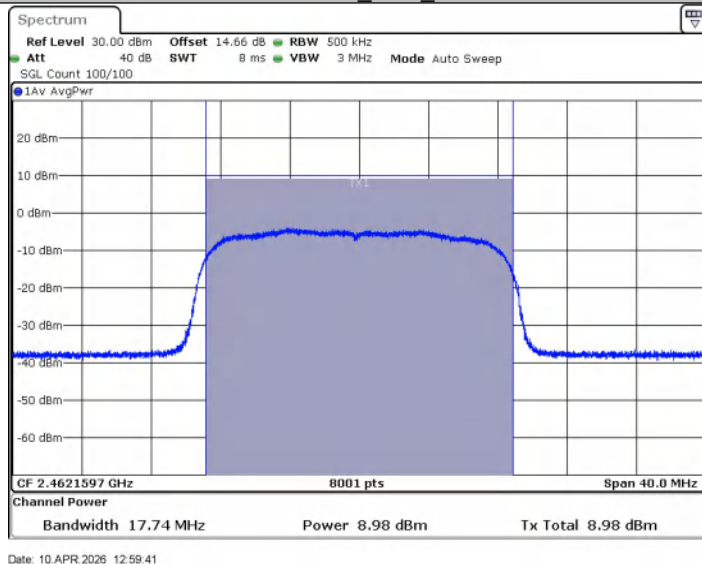

11N40SISO_Ant1_2422

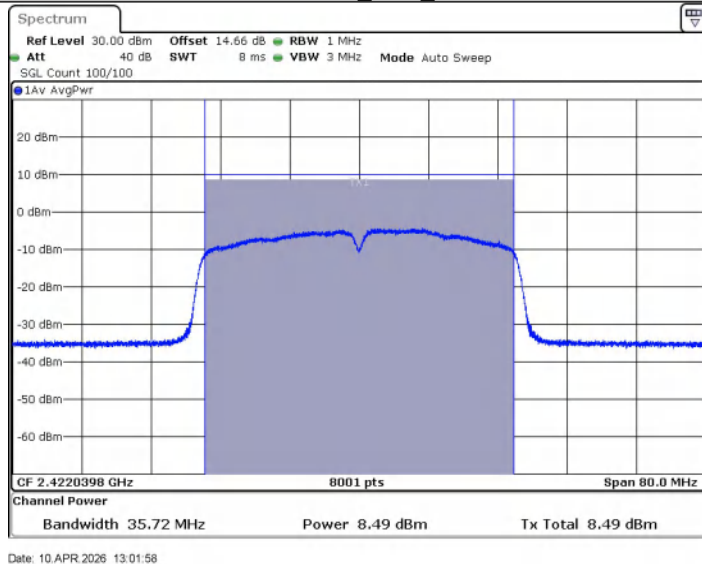


11N40SISO_Ant1_2437

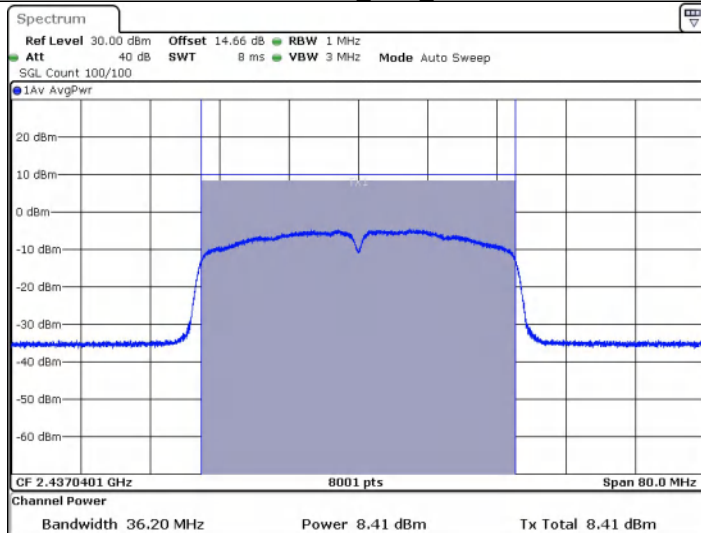


Date: 10 APR 2026 13:03:27

11N40SISO_Ant1_2452

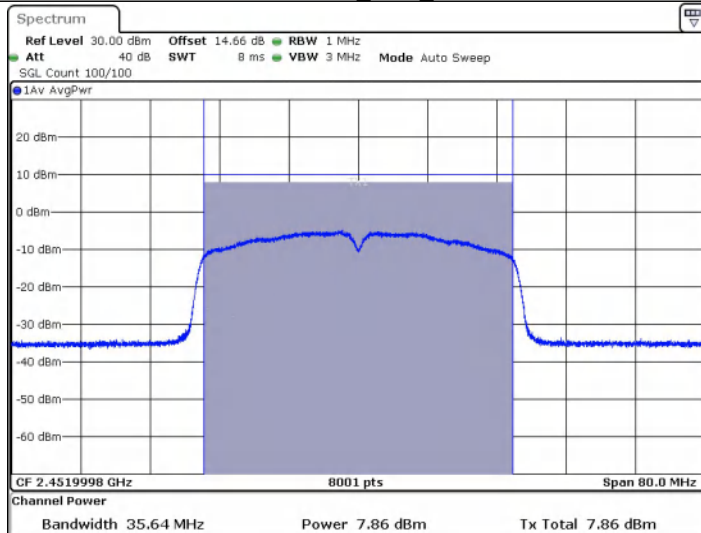


Date: 10 APR 2026 14:37:34


11AX20SISO_Ant1_2412

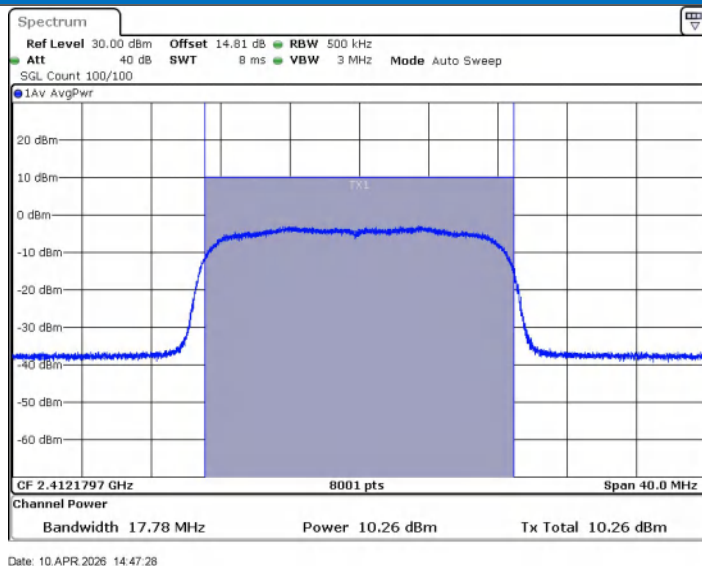


11AX20SISO_Ant1_2437

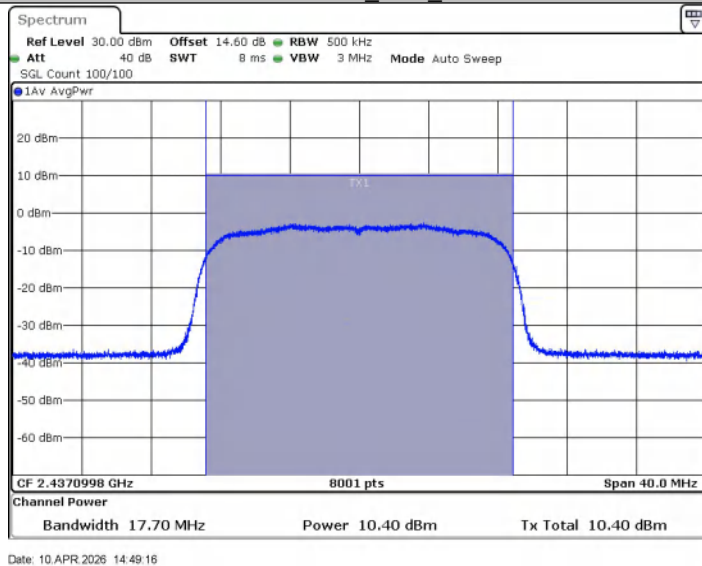

11AX20SISO_Ant1_2462

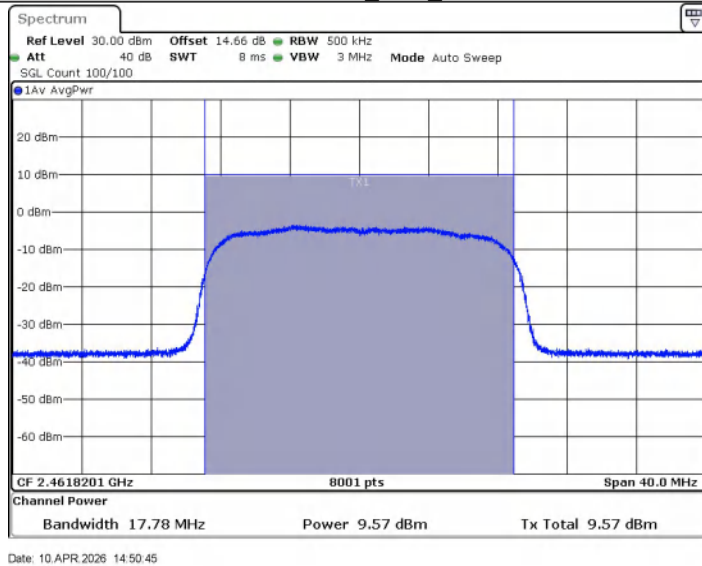


11AX40SISO_Ant1_2422

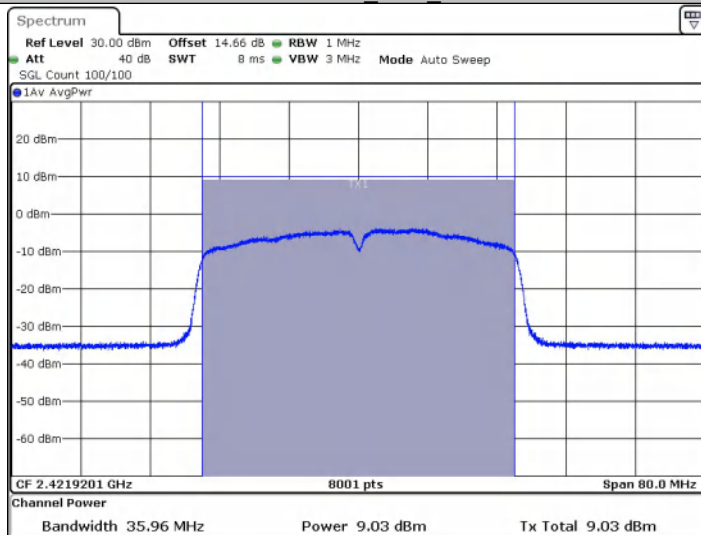


Date: 10 APR 2026 14:52:20

11AX40SISO_Ant1_2437

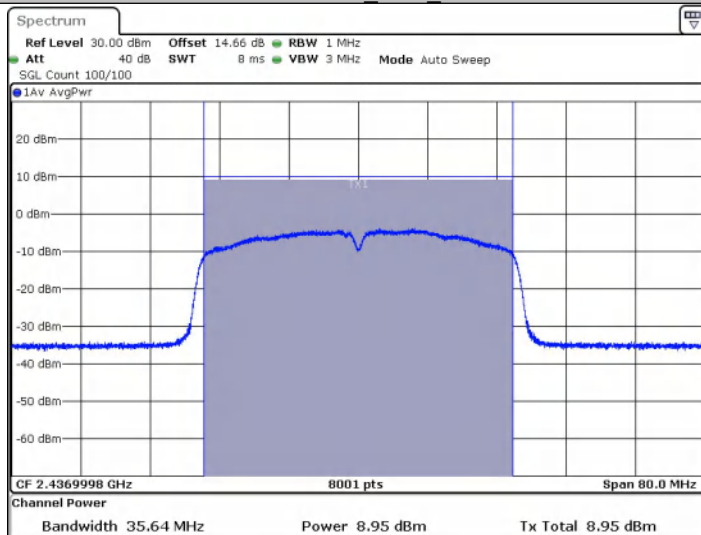


Date: 10 APR 2026 14:54:29

11AX40SISO_Ant1_2452

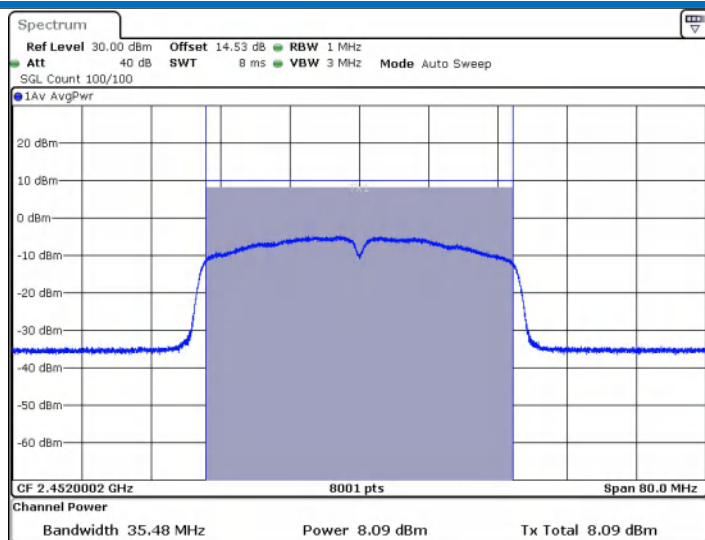

Date: 10.APR.2026 14:57:47

5.4 99% Occupied Bandwidth


Test Requirement:	47 CFR Part 15C
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report. Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel.
Test Results:	Pass

Test Result

TestMode	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	2412	15.305	2404.3277	2419.6324
	2437	15.185	2429.4076	2444.5924
	2462	15.185	2454.3277	2469.5125
11G	2412	17.143	2403.4486	2420.5914
	2437	17.063	2428.5684	2445.6314
	2462	17.063	2453.4486	2470.5115
11N20SISO	2412	18.022	2403.0889	2421.1109
	2437	17.942	2428.1289	2446.0709
	2462	17.742	2453.2887	2471.0310
11N40SISO	2422	35.724	2404.1778	2439.9021
	2437	36.204	2418.9381	2455.1419
	2452	35.644	2434.1778	2469.8222
11AX20SISO	2412	17.782	2403.2887	2421.0709
	2437	17.702	2428.2488	2445.9510
	2462	17.782	2452.9291	2470.7113
11AX40SISO	2422	35.964	2403.9381	2439.9021
	2437	35.644	2419.1778	2454.8222
	2452	35.485	2434.2577	2469.7423


Test Graphs

11B_Ant1_2412

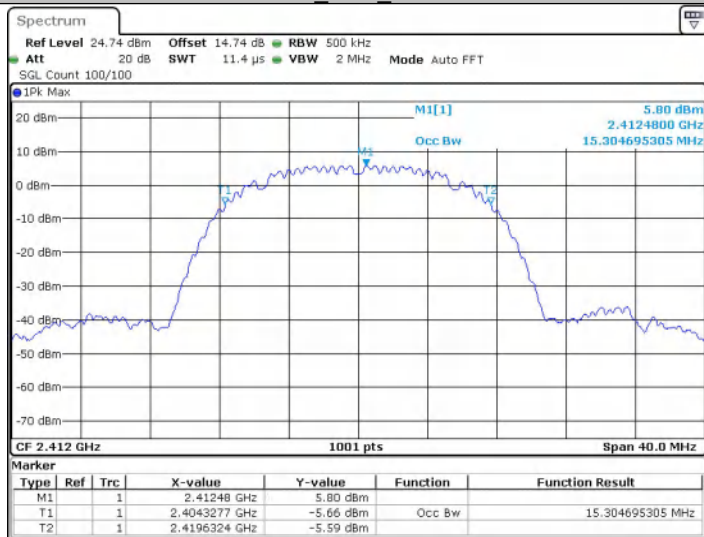


Date: 10 APR 2026 12:42:13

11B_Ant1_2437

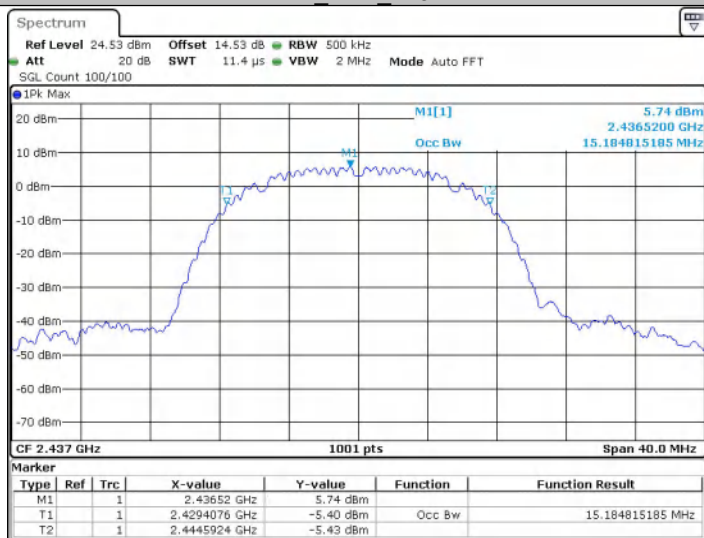


Date: 10 APR 2026 12:44:44


11B_Ant1_2462

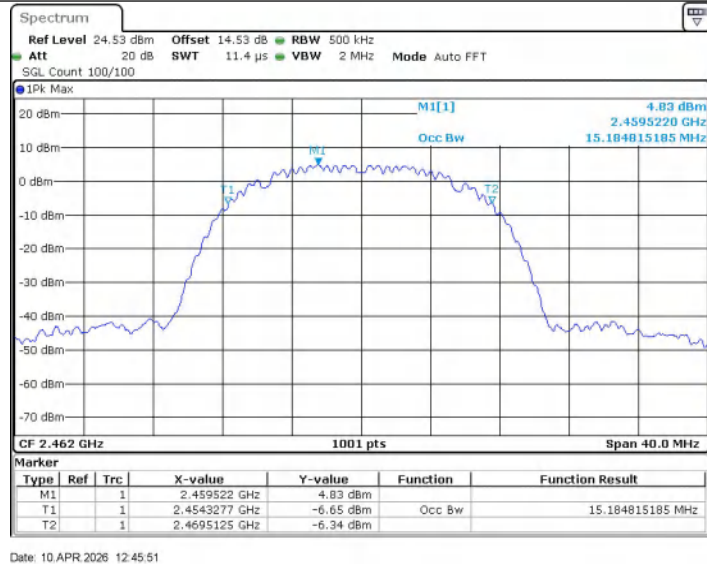


11G_Ant1_2412

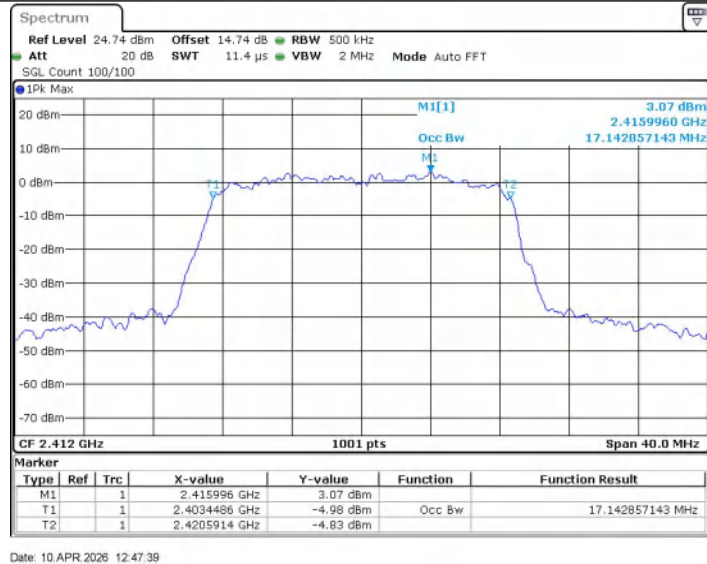

11G_Ant1_2437

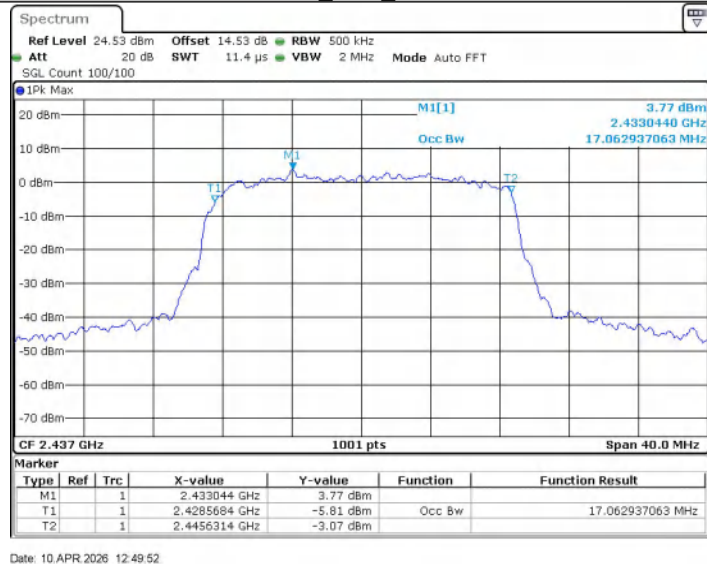


11G_Ant1_2462

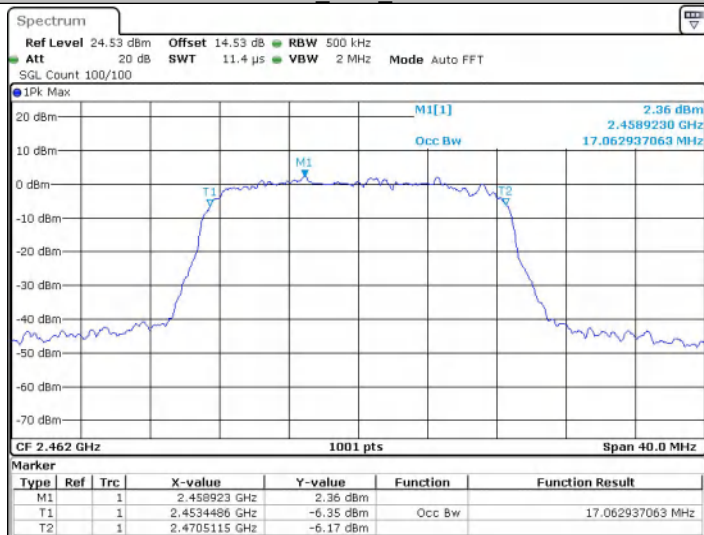


Date: 10 APR 2026 12:51:01

11N20SISO_Ant1_2412

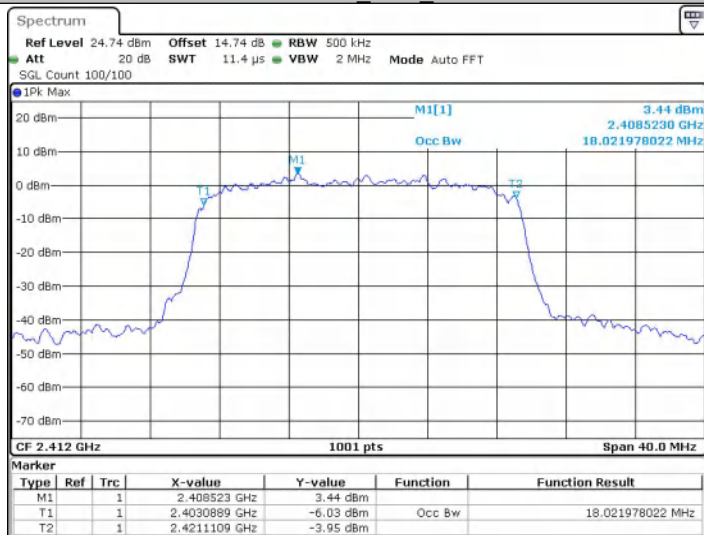


Date: 10 APR 2026 12:53:43


11N20SISO_Ant1_2437

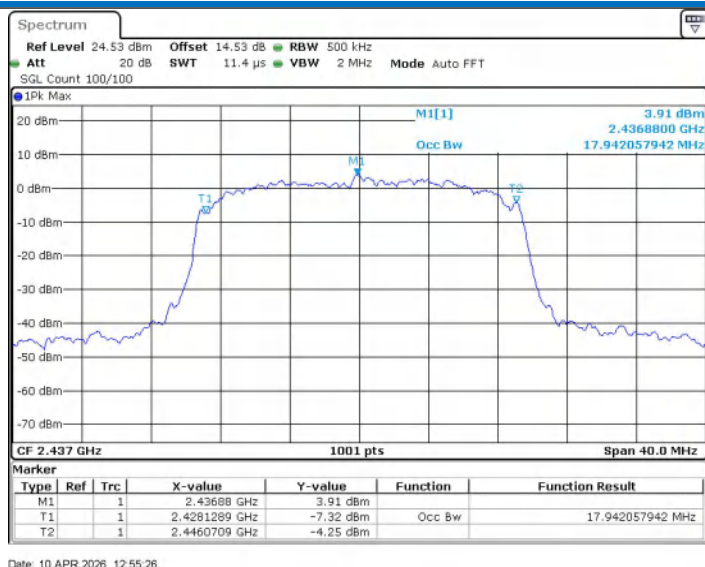


11N20SISO_Ant1_2462

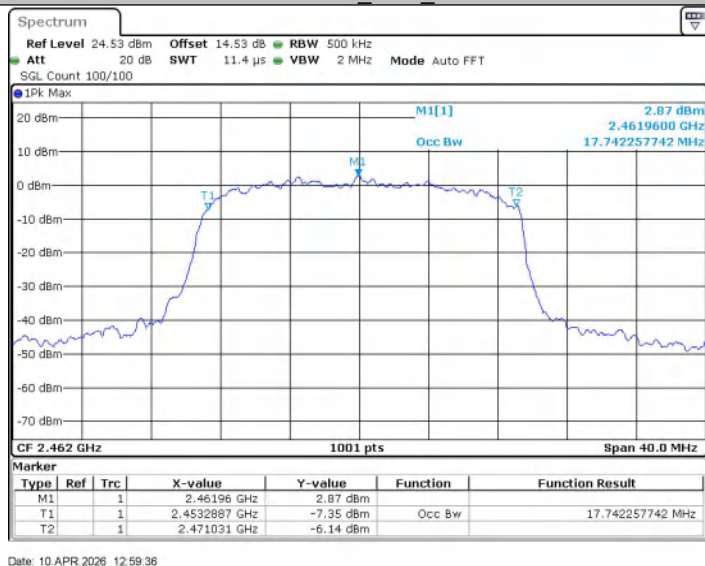


11N40SISO_Ant1_2422

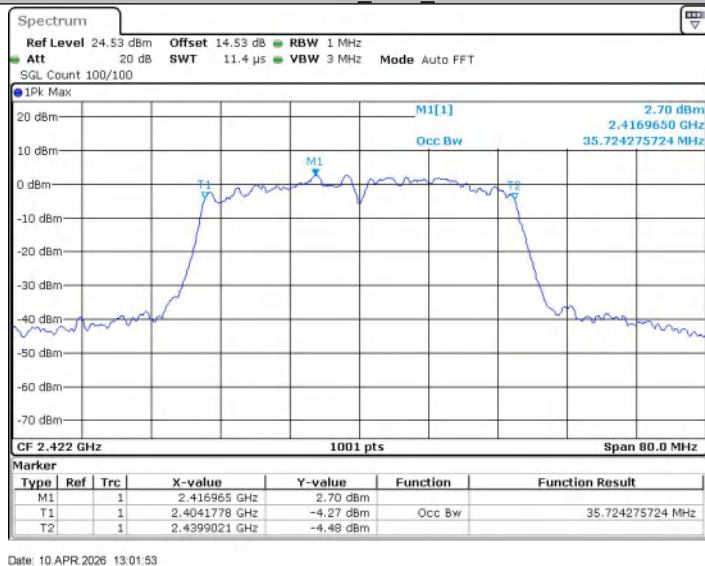


11N40SISO_Ant1_2437

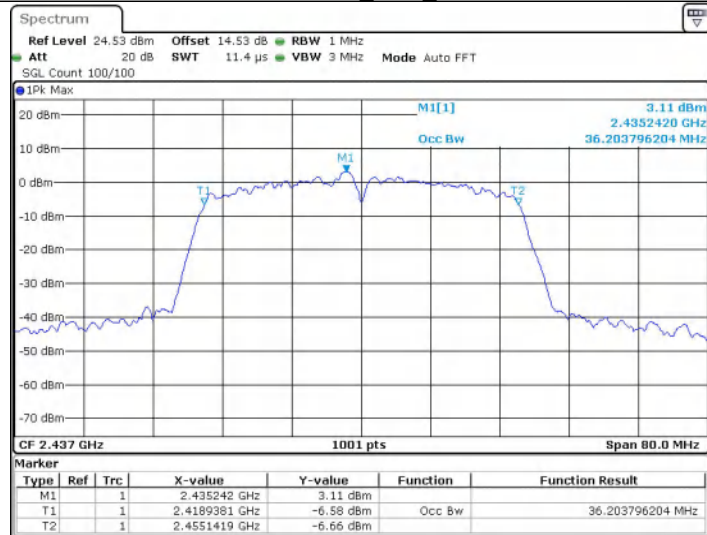

11N40SISO_Ant1_2452

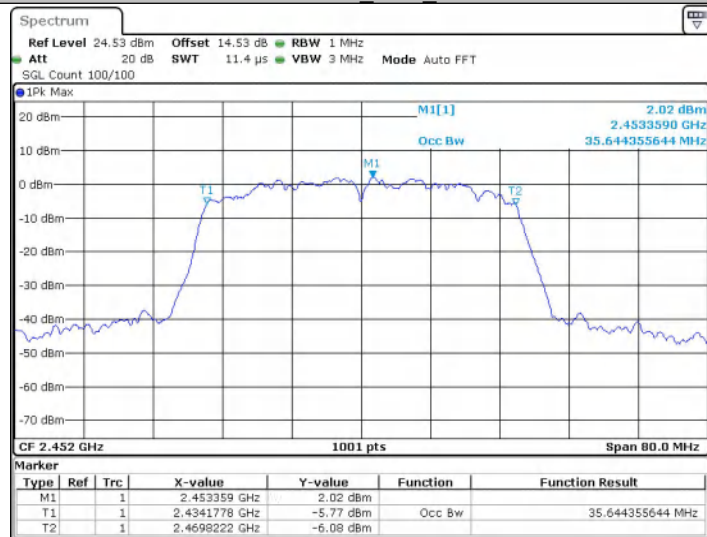


11AX20SISO_Ant1_2412

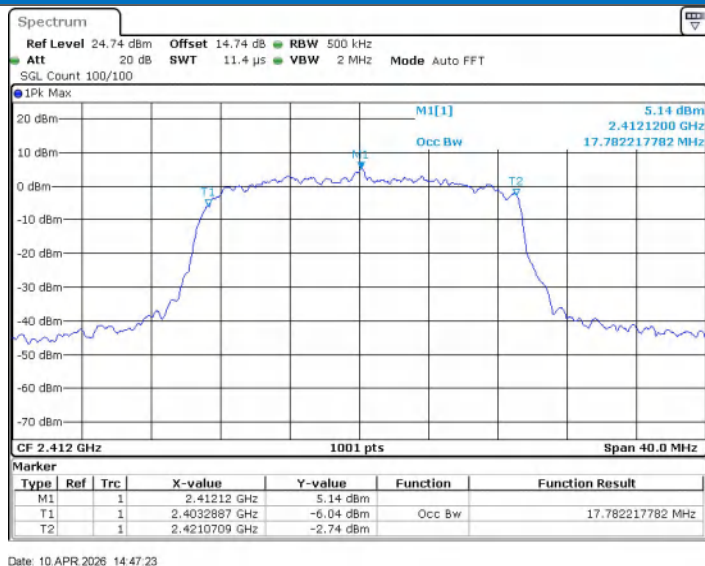


Date: 10 APR 2026 14:47:23

11AX20SISO_Ant1_2437

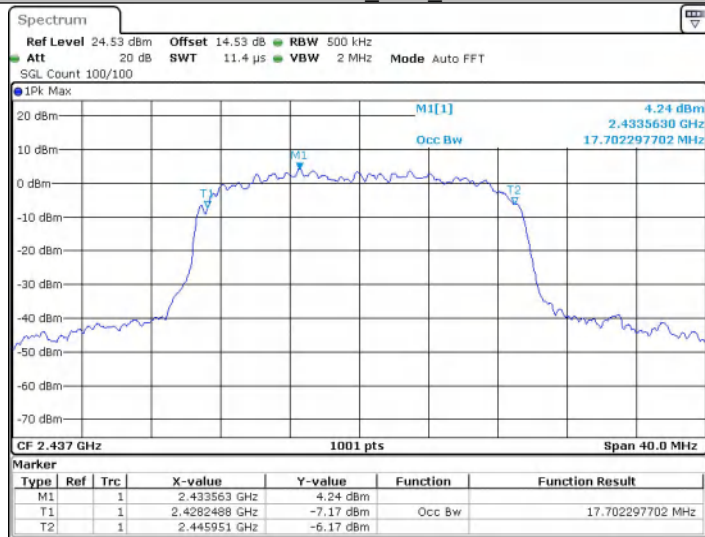


Date: 10 APR 2026 14:49:11

11AX20SISO_Ant1_2462

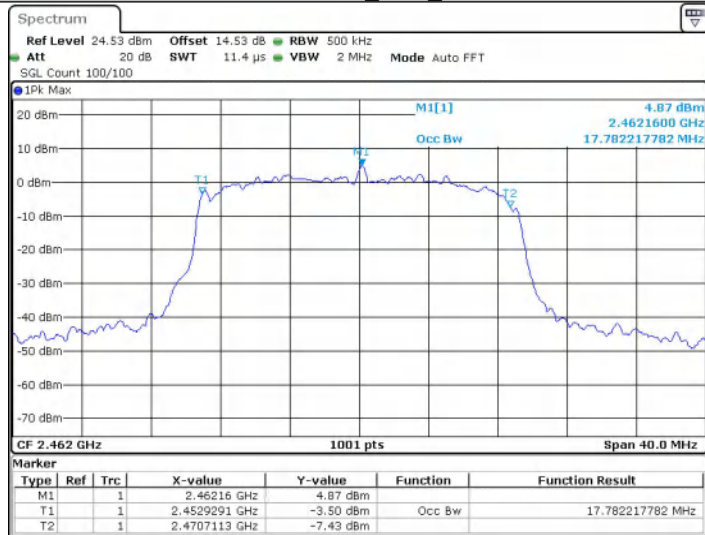


Date: 10 APR 2026 14:50:39


11AX40SISO_Ant1_2422

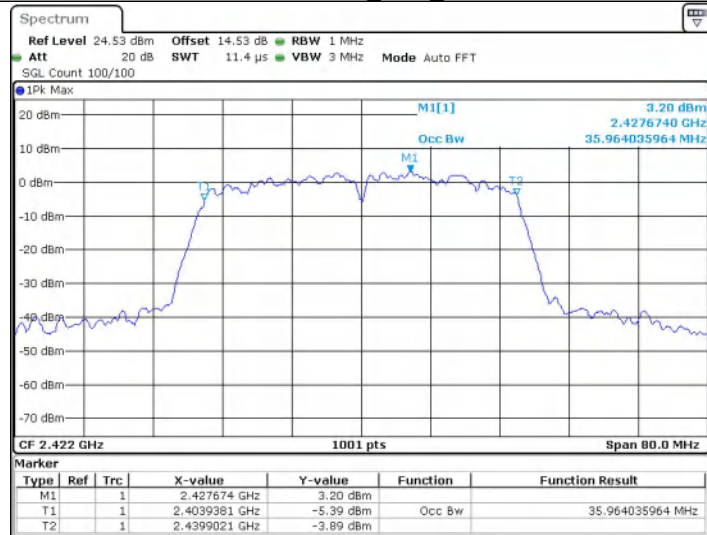

11AX40SISO_Ant1_2437

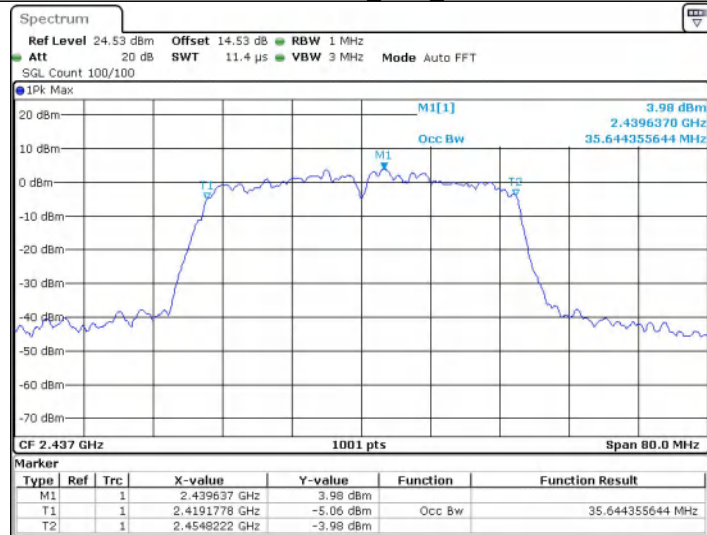


11AX40SISO_Ant1_2452

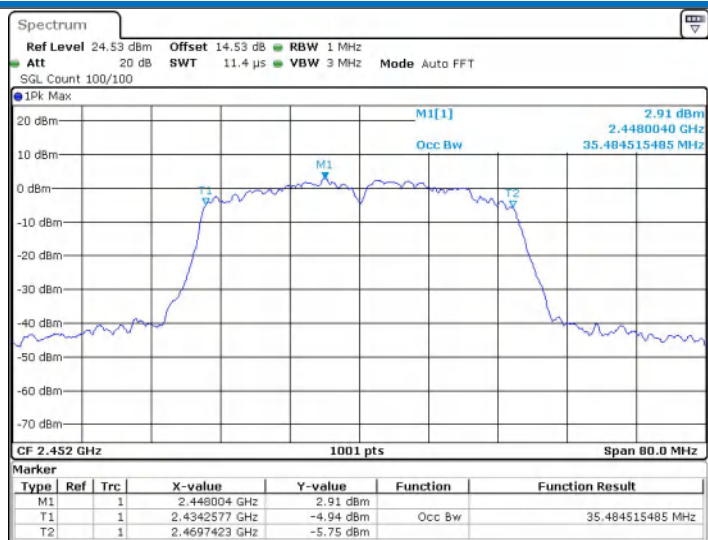

Date: 10 APR 2026 14:57:41

5.5 6dB Occupied Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report. Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel.
Limit:	≥ 500 kHz
Test Results:	Pass

Test Result

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	12.64	2405.48	2418.12	0.5	PASS
	2437	12.28	2430.84	2443.12	0.5	PASS
	2462	12.64	2455.44	2468.08	0.5	PASS
11G	2412	16.12	2403.88	2420.00	0.5	PASS
	2437	16.40	2429.04	2445.44	0.5	PASS
	2462	16.24	2453.84	2470.08	0.5	PASS
11N20SISO	2412	16.24	2403.88	2420.12	0.5	PASS
	2437	16.12	2428.96	2445.08	0.5	PASS
	2462	15.56	2454.20	2469.76	0.5	PASS
11N40SISO	2422	33.28	2405.36	2438.64	0.5	PASS
	2437	35.20	2419.16	2454.36	0.5	PASS
	2452	32.00	2436.16	2468.16	0.5	PASS
11AX20SISO	2412	16.36	2403.92	2420.28	0.5	PASS
	2437	15.40	2429.20	2444.60	0.5	PASS
	2462	16.00	2453.76	2469.76	0.5	PASS
11AX40SISO	2422	34.24	2404.96	2439.20	0.5	PASS
	2437	33.52	2420.04	2453.56	0.5	PASS
	2452	32.88	2435.28	2468.16	0.5	PASS


Test Graphs

11B_Ant1_2412

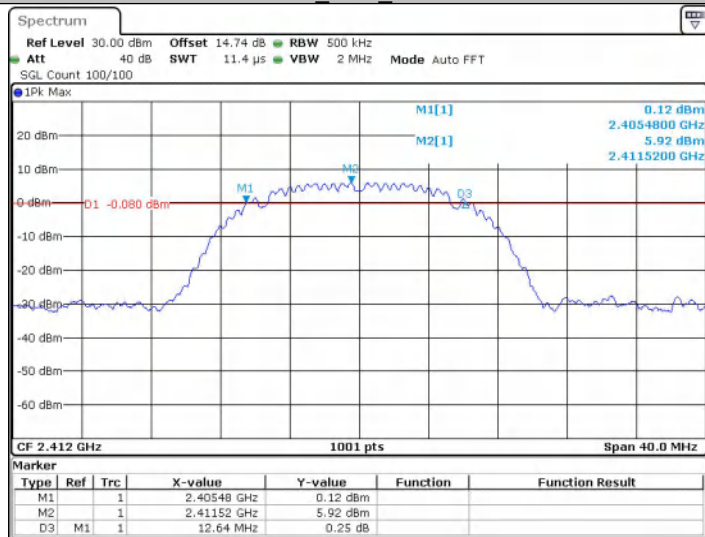


Date: 10 APR 2026 12:42:09

11B_Ant1_2437

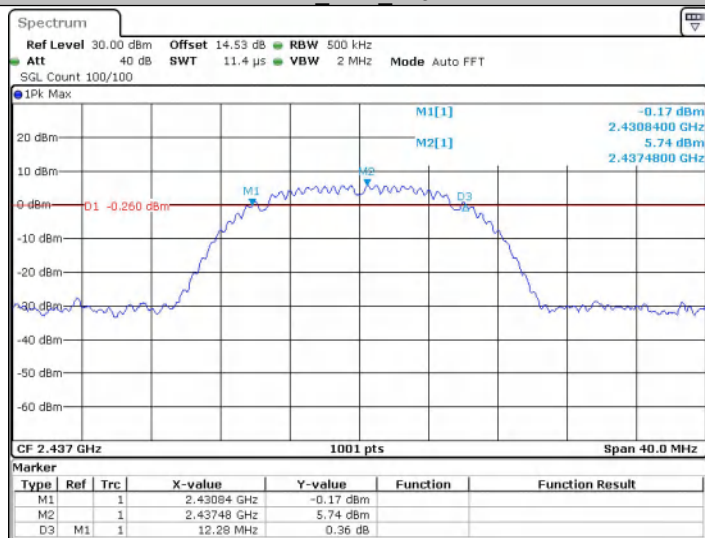


Date: 10 APR 2026 12:44:40

11B_Ant1_2462

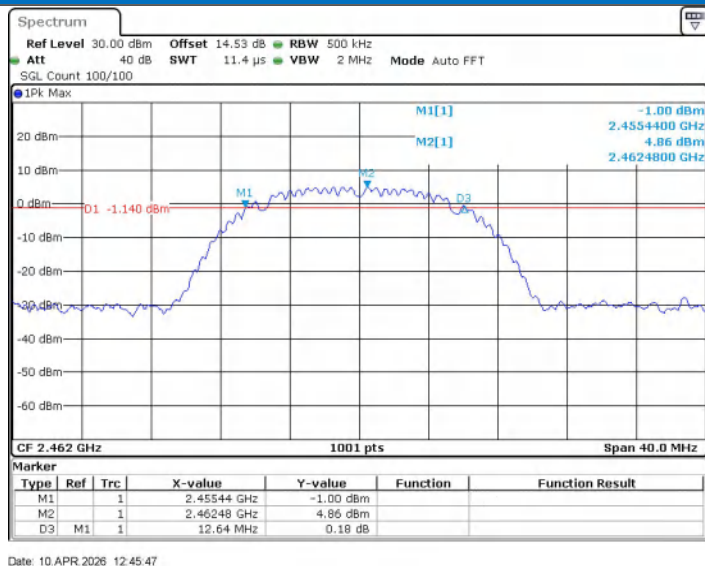


Date: 10 APR 2026 12:45:47

11G_Ant1_2412

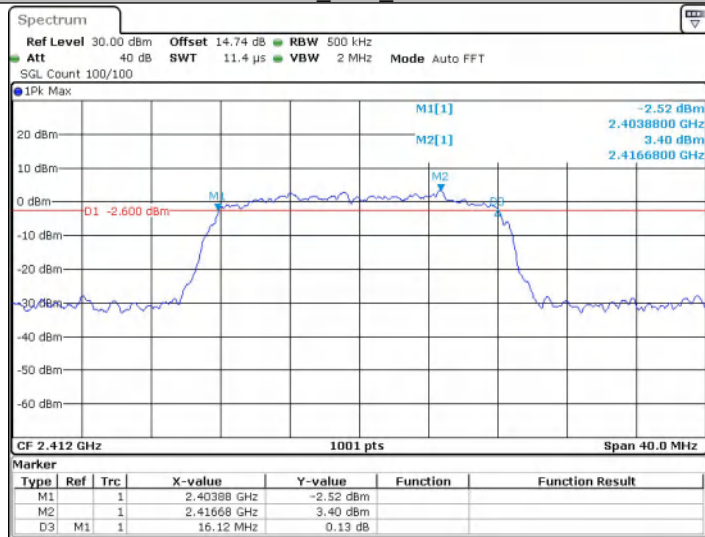


Date: 10 APR 2026 12:47:35

11G_Ant1_2437

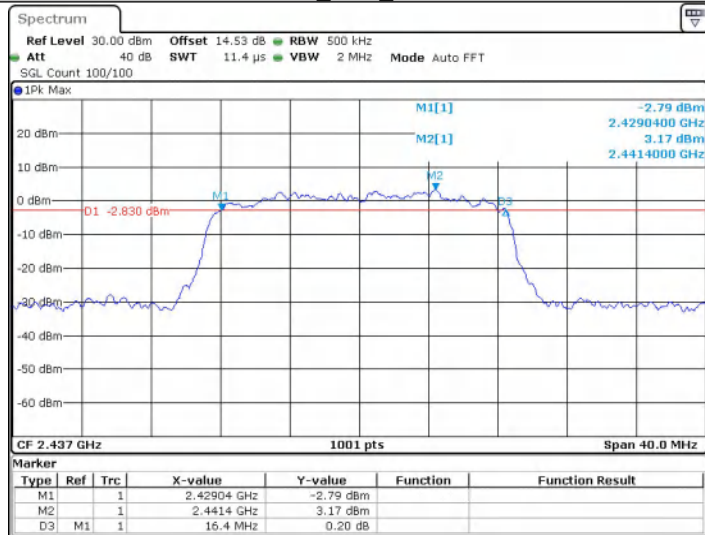


Date: 10 APR 2026 12:49:48

11G_Ant1_2462

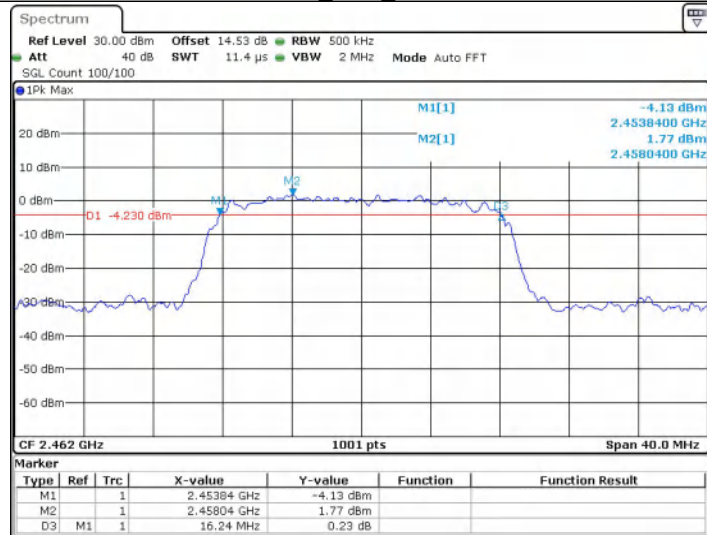


Date: 10 APR 2026 12:50:57

11N20SISO_Ant1_2412

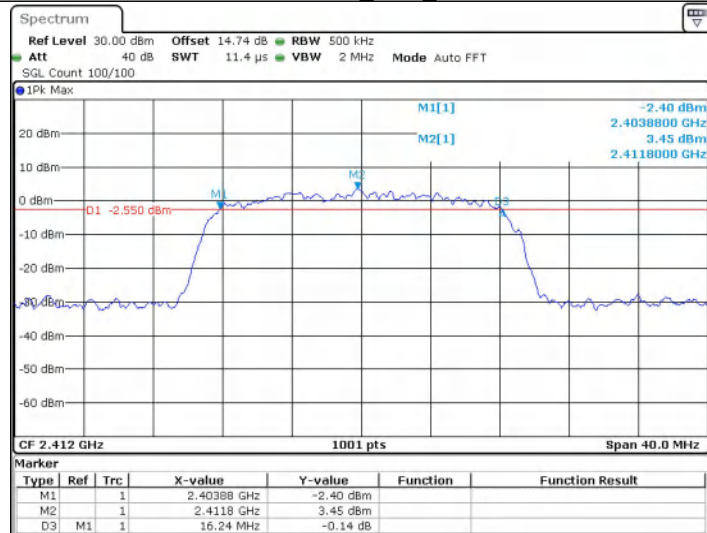


Date: 10 APR 2026 12:53:39


11N20SISO_Ant1_2437

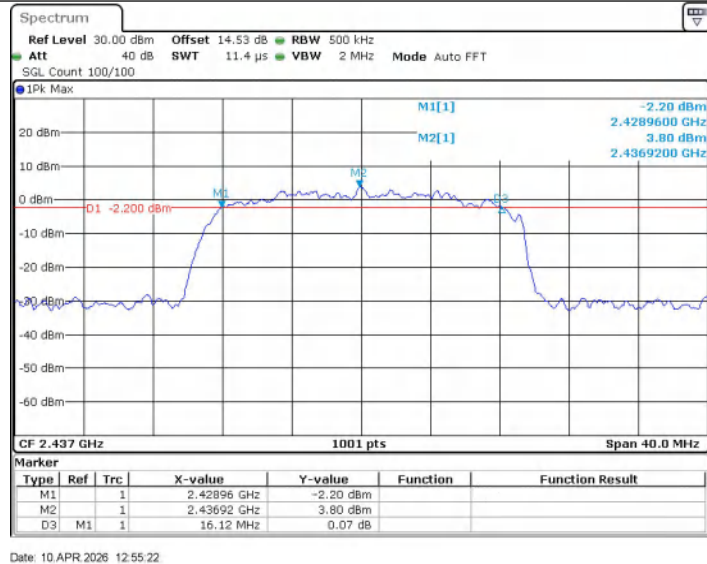


11N20SISO_Ant1_2462

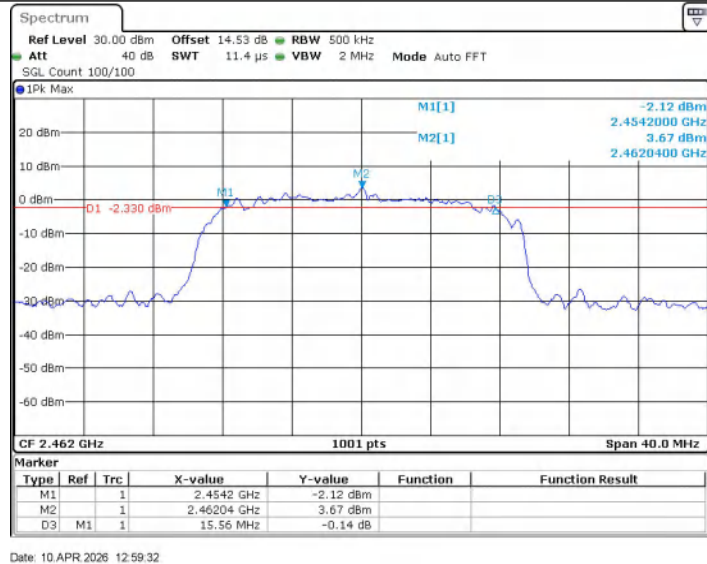

11N40SISO_Ant1_2422

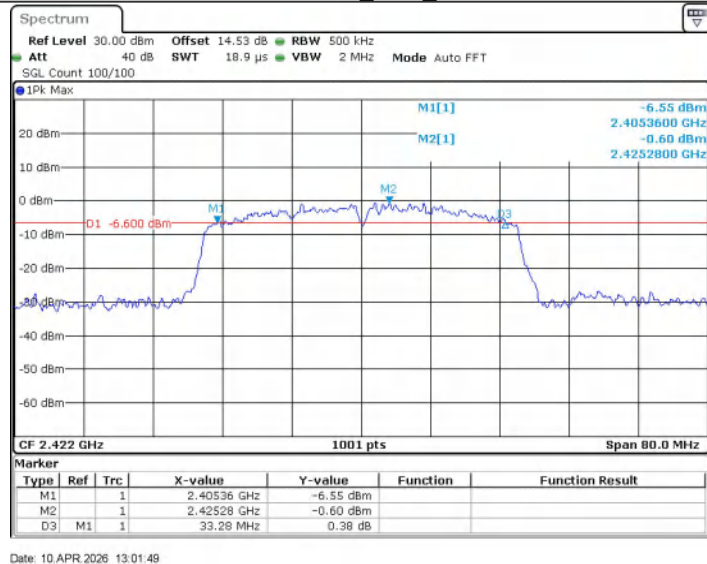


11N40SISO_Ant1_2437

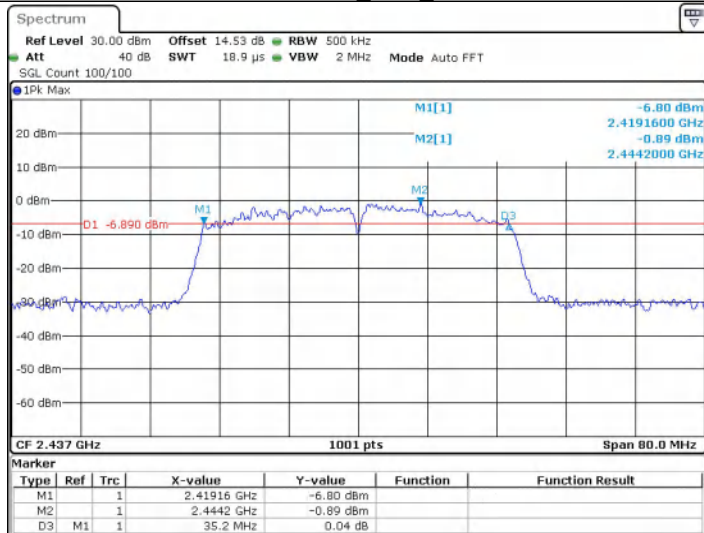


Date: 10 APR 2026 13:03:17

11N40SISO_Ant1_2452

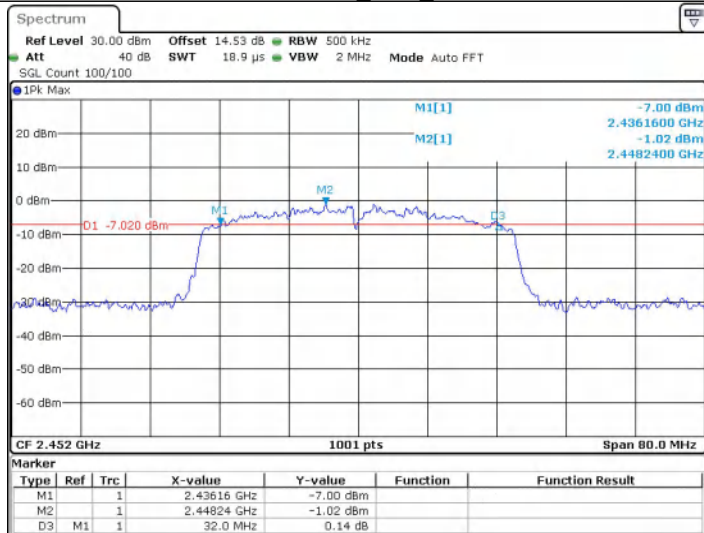


Date: 10 APR 2026 14:37:24


11AX20SISO_Ant1_2412

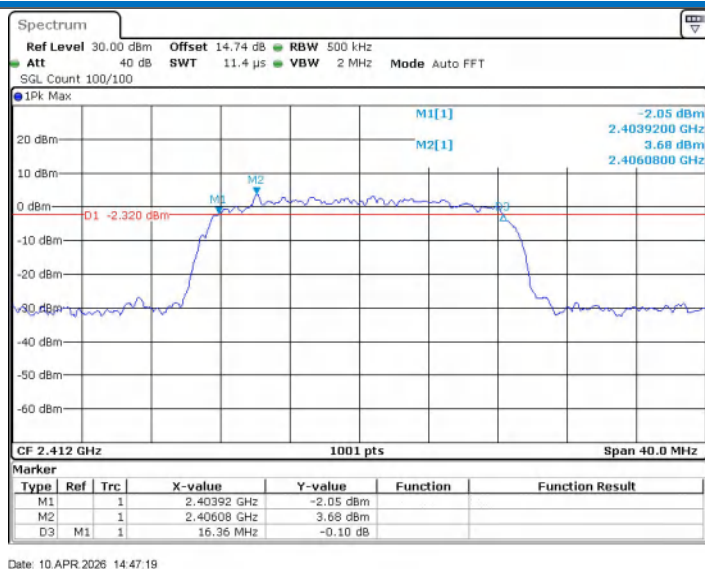


11AX20SISO_Ant1_2437

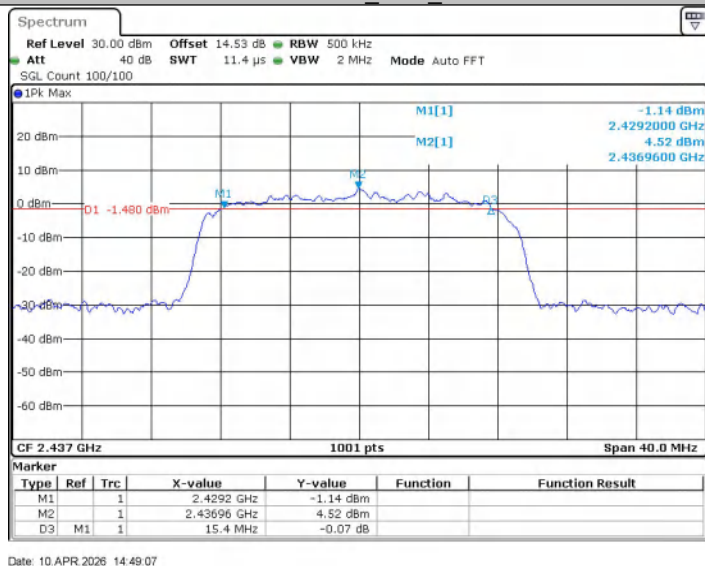

11AX20SISO_Ant1_2462

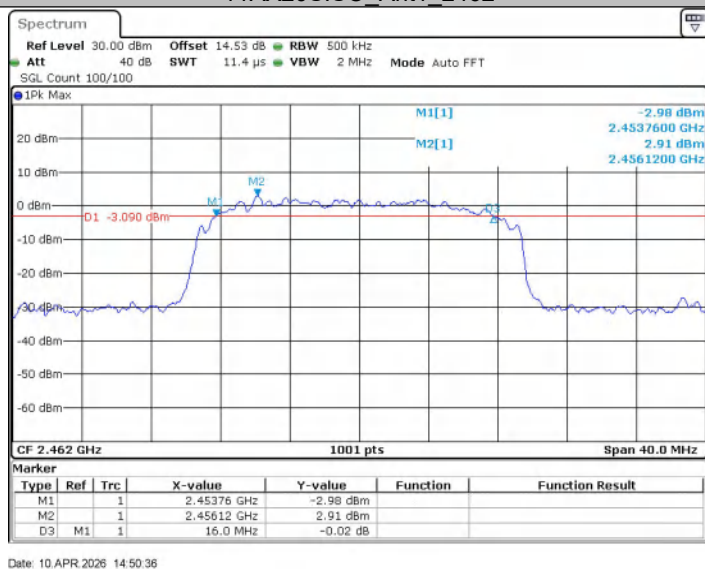


11AX40SISO_Ant1_2422

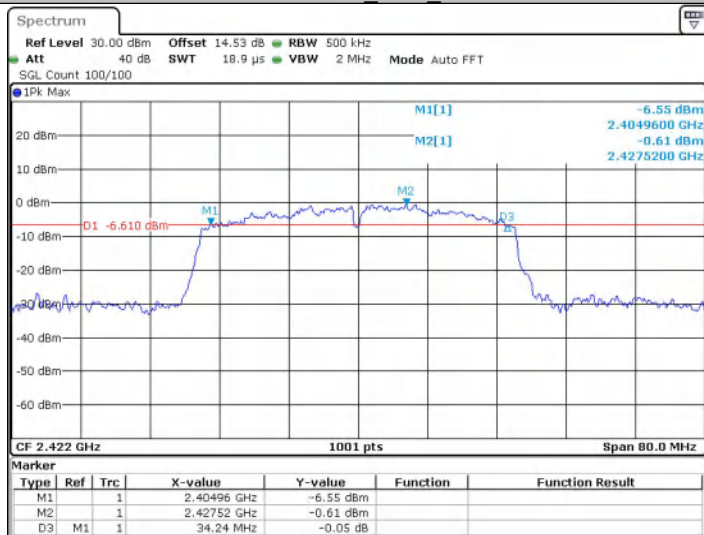


Date: 10 APR 2026 14:52:10

11AX40SISO_Ant1_2437

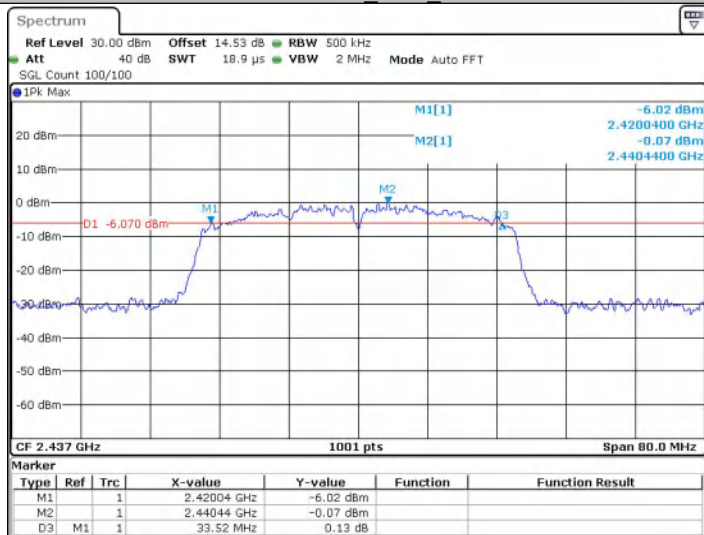


Date: 10 APR 2026 14:54:19

11AX40SISO_Ant1_2452

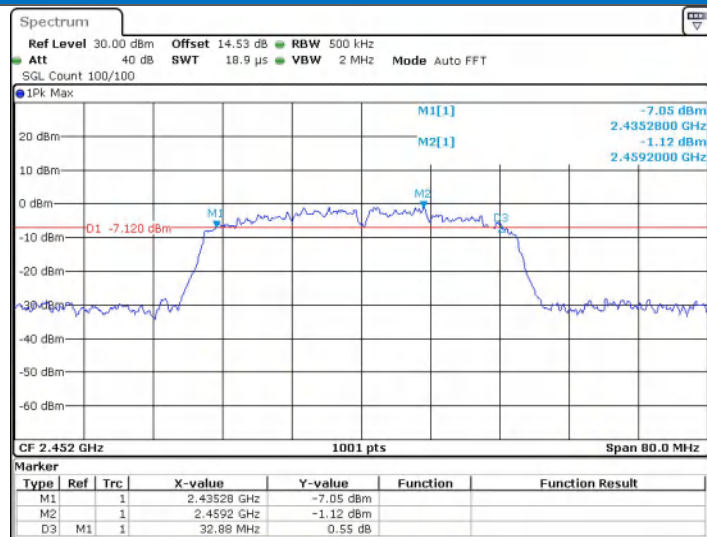

Date: 10.APR.2026 14:57:37

5.6 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report. Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass

Test Result


TestMode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-12.87	≤8.00	PASS
	2437	-11.74	≤8.00	PASS
	2462	-13.10	≤8.00	PASS
11G	2412	-18.77	≤8.00	PASS
	2437	-17.69	≤8.00	PASS
	2462	-19.29	≤8.00	PASS
11N20SISO	2412	-19.41	≤8.00	PASS
	2437	-19.44	≤8.00	PASS
	2462	-20.23	≤8.00	PASS
11N40SISO	2422	-20.37	≤8.00	PASS
	2437	-20.68	≤8.00	PASS
	2452	-19.10	≤8.00	PASS
11AX20SISO	2412	-19.13	≤8.00	PASS
	2437	-18.75	≤8.00	PASS
	2462	-19.53	≤8.00	PASS
11AX40SISO	2422	-19.02	≤8.00	PASS
	2437	-18.15	≤8.00	PASS
	2452	-20.10	≤8.00	PASS

Note: Duty cycle correction factor details please see section 4.4.


When Duty cycle >98%, D.C.F is not required.

Test Graphs


11B_Ant1_2412

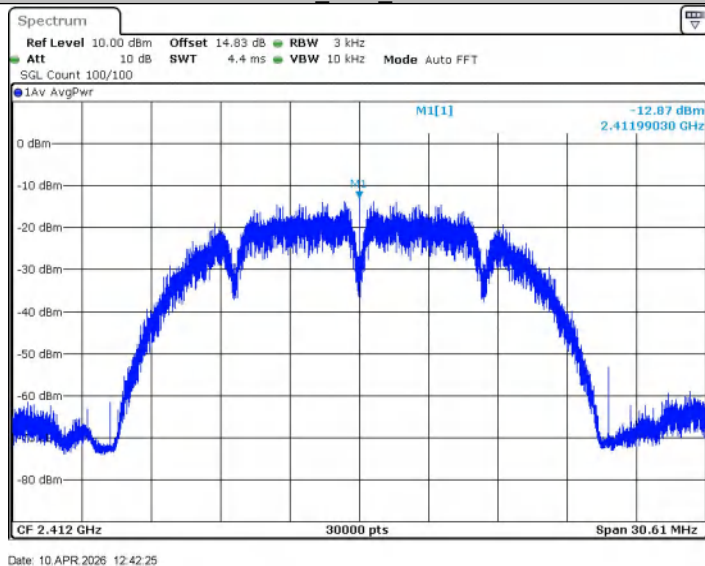


11B_Ant1_2437

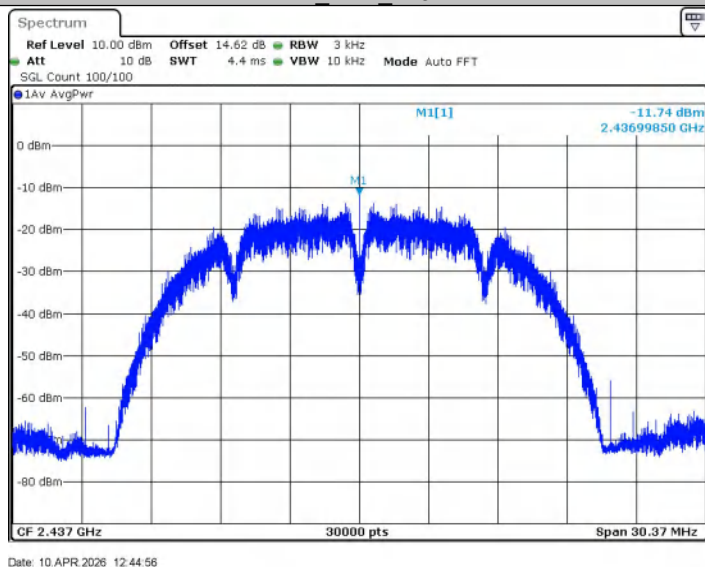


11B_Ant1_2462

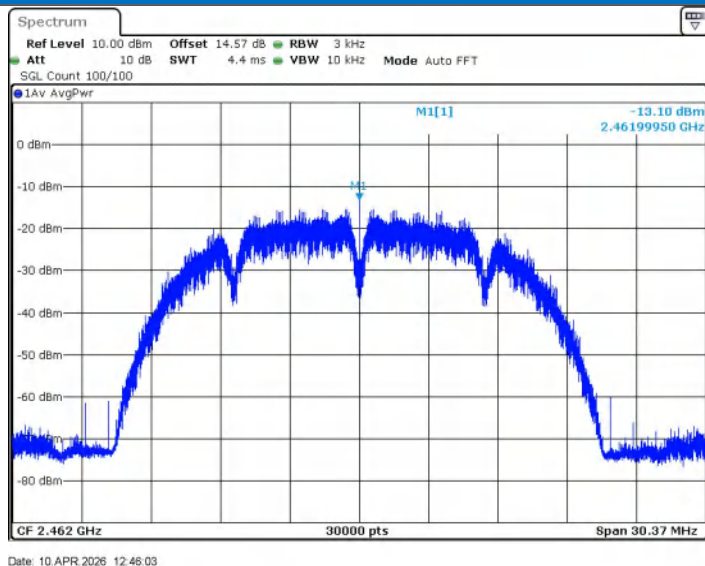


11G_Ant1_2412

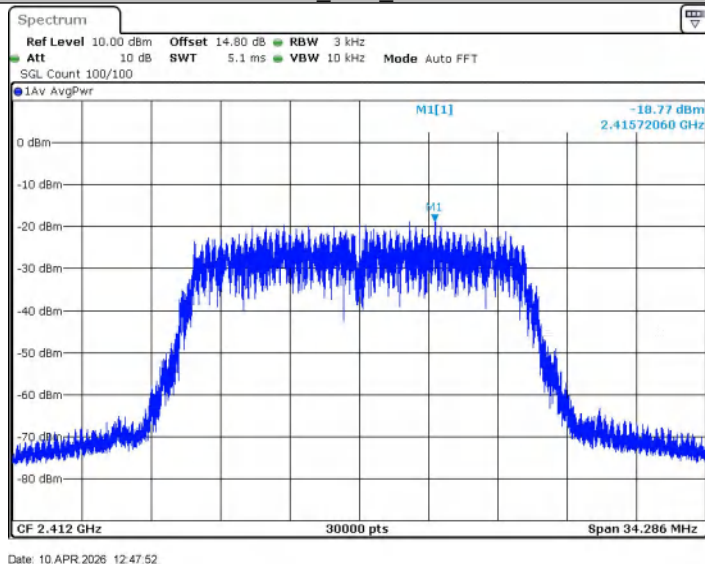

11G_Ant1_2437

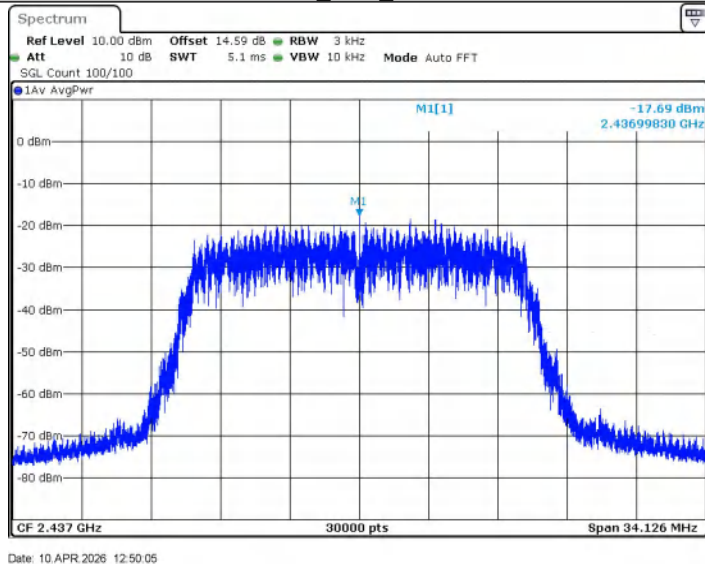


11G_Ant1_2462

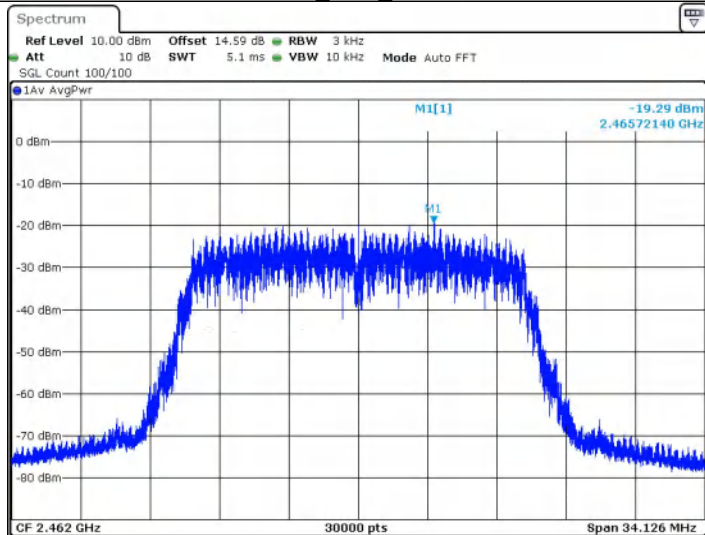


Date: 10 APR 2026 12:51:14

11N20SISO_Ant1_2412

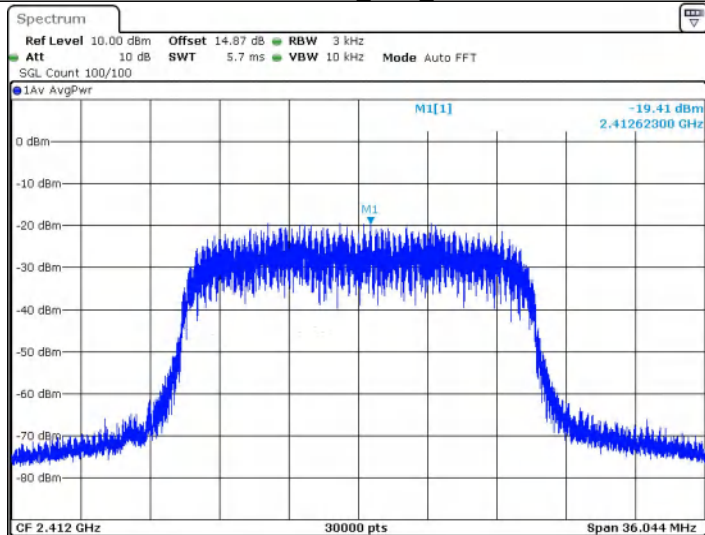


Date: 10 APR 2026 12:53:57


11N20SISO_Ant1_2437

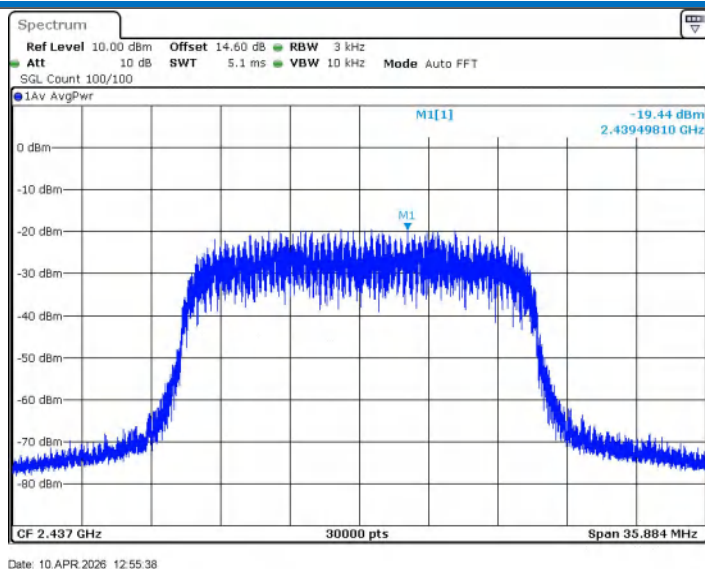


11N20SISO_Ant1_2462

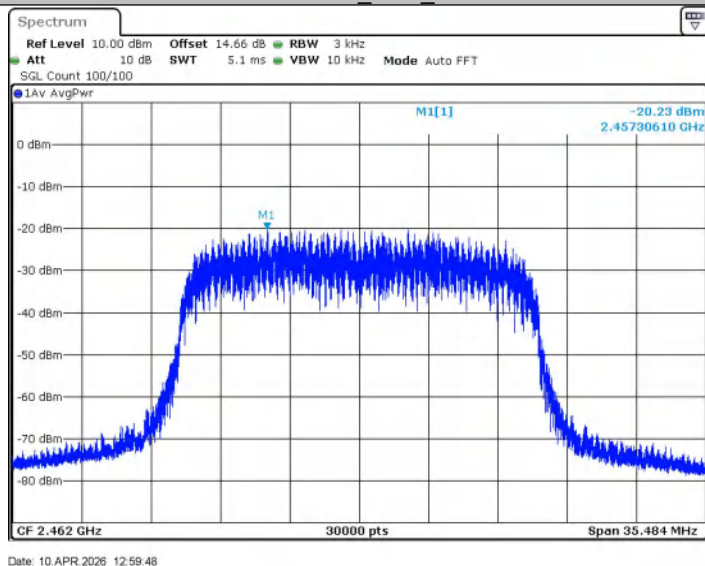

11N40SISO_Ant1_2422

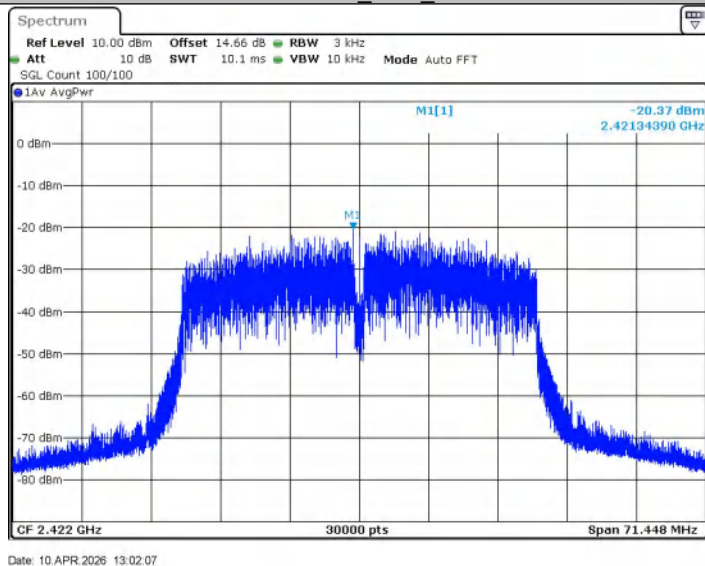


11N40SISO_Ant1_2437

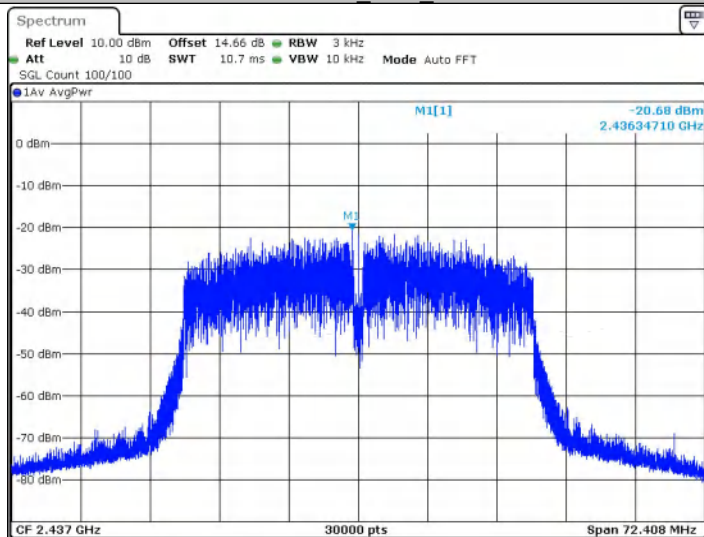


Date: 10 APR 2026 13:03:37

11N40SISO_Ant1_2452

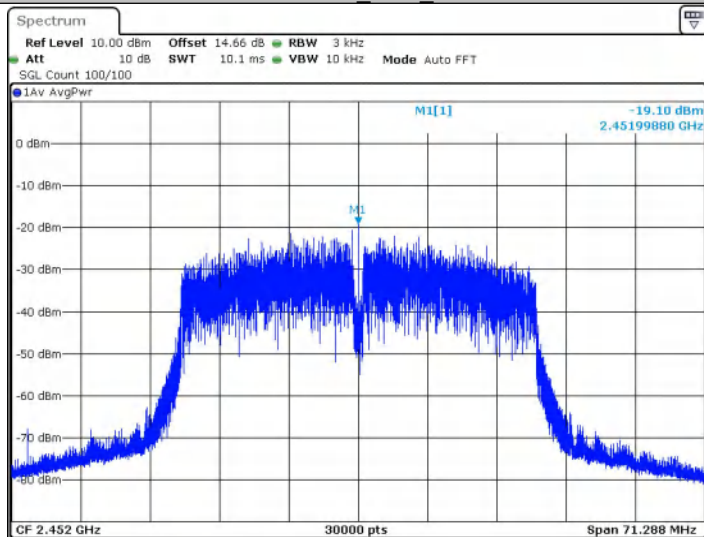


Date: 10 APR 2026 14:37:43


11AX20SISO_Ant1_2412

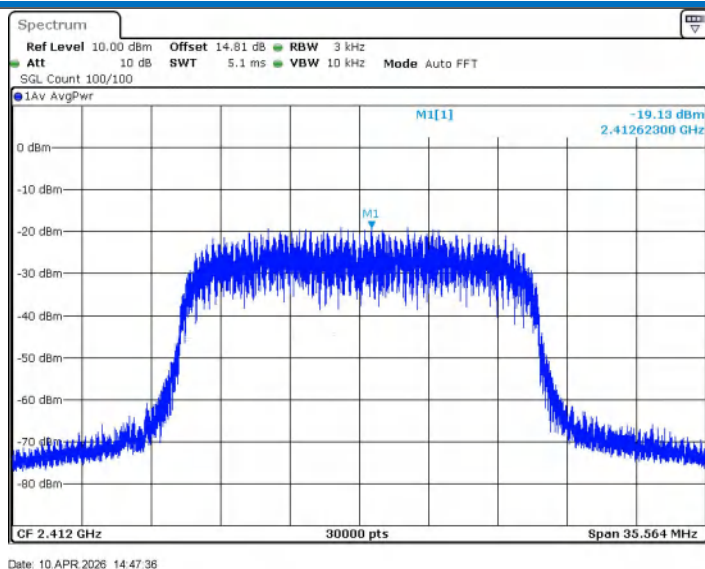


11AX20SISO_Ant1_2437

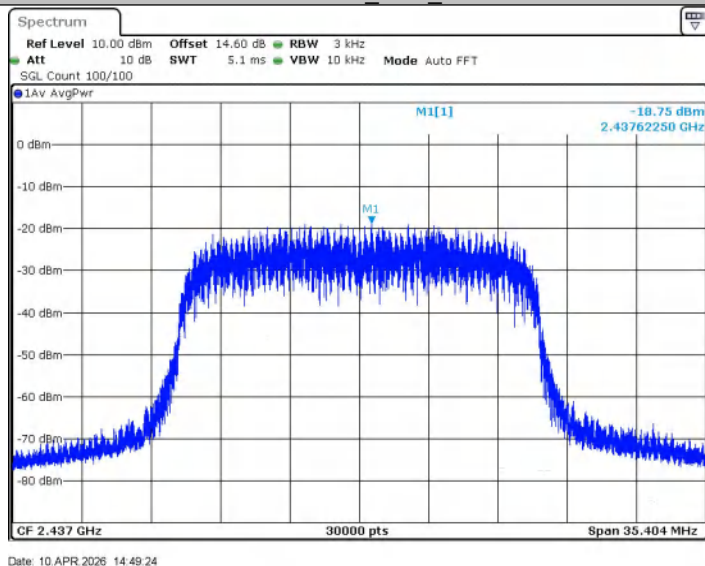

11AX20SISO_Ant1_2462

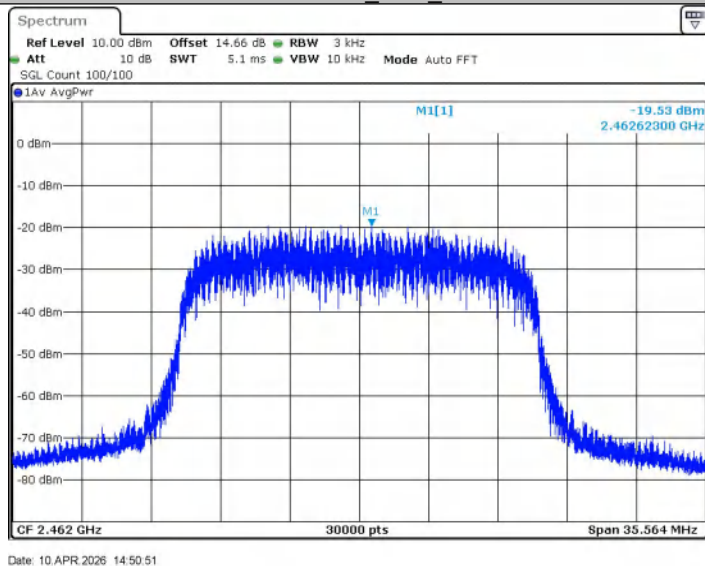


11AX40SISO_Ant1_2422

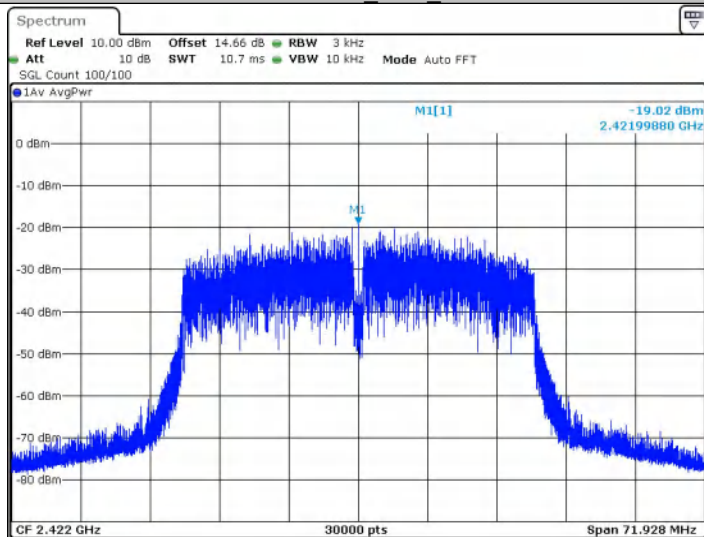


Date: 10 APR 2026 14:52:30

11AX40SISO_Ant1_2437

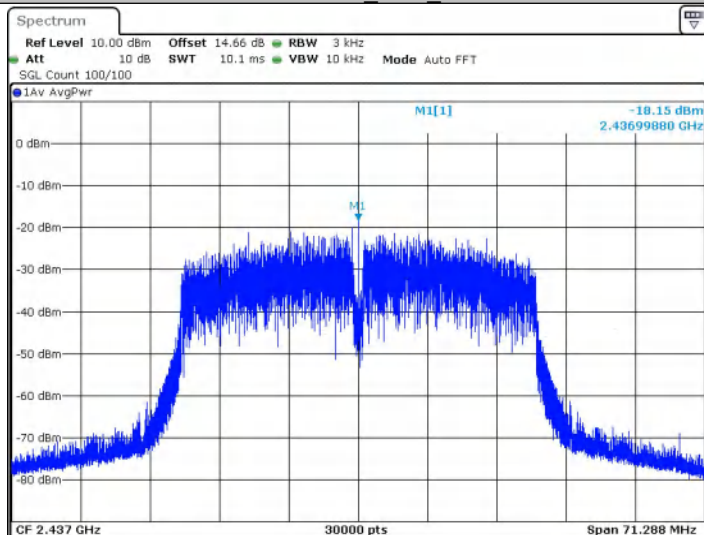


Date: 10 APR 2026 14:54:39

11AX40SISO_Ant1_2452

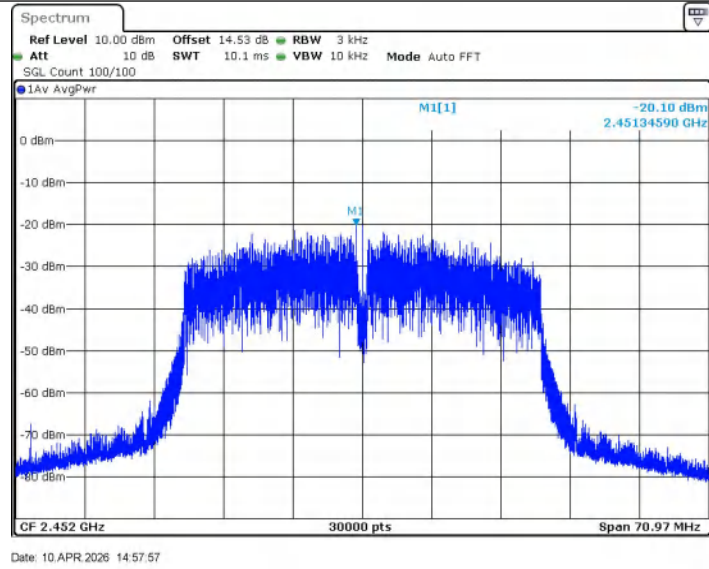


5.7 Band-edge for RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report. Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result


TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	4.04	-40.52	≤ -25.96	PASS
	High	2462	3.10	-42.25	≤ -26.9	PASS
11G	Low	2412	-1.41	-42.7	≤ -31.41	PASS
	High	2462	-1.93	-42.15	≤ -31.93	PASS
11N20SISO	Low	2412	-1.20	-42.89	≤ -31.2	PASS
	High	2462	-1.95	-42.34	≤ -31.95	PASS
11N40SISO	Low	2422	-4.87	-42.73	≤ -34.87	PASS
	High	2452	-4.66	-42.76	≤ -34.66	PASS
11AX20SISO	Low	2412	-0.71	-42.28	≤ -30.71	PASS
	High	2462	-1.59	-42.3	≤ -31.59	PASS
11AX40SISO	Low	2422	-3.63	-42.02	≤ -33.63	PASS
	High	2452	-4.41	-42.35	≤ -34.41	PASS

5.7.1 Test Graphs

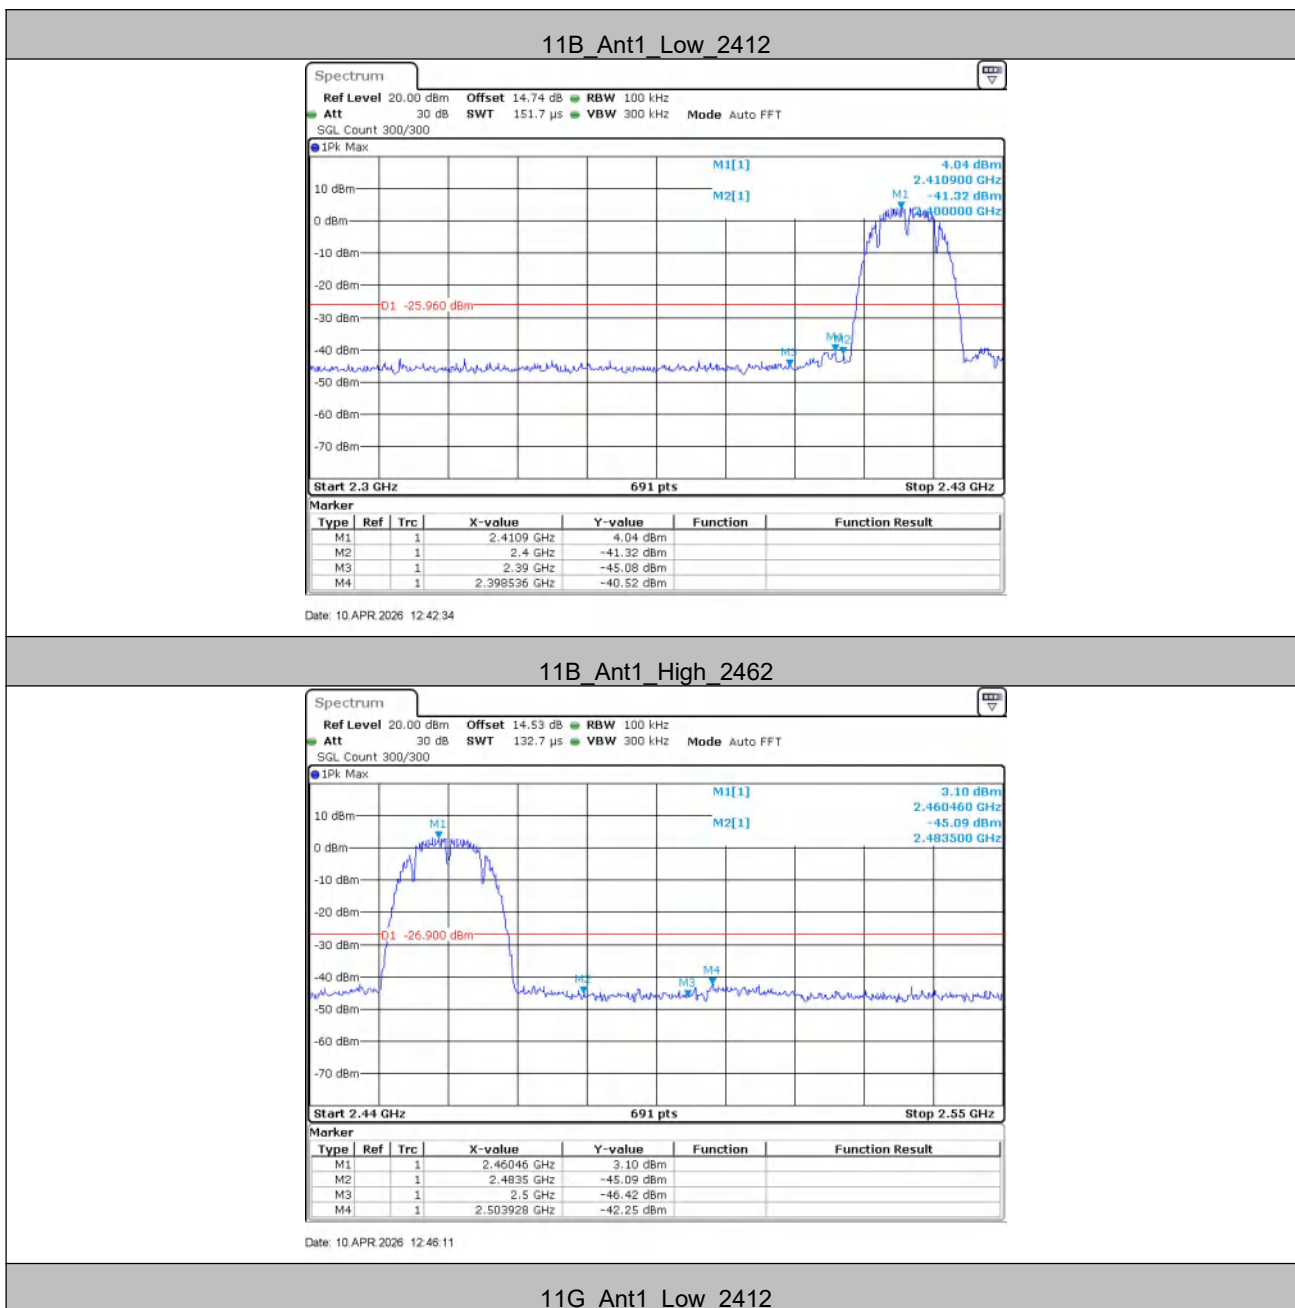


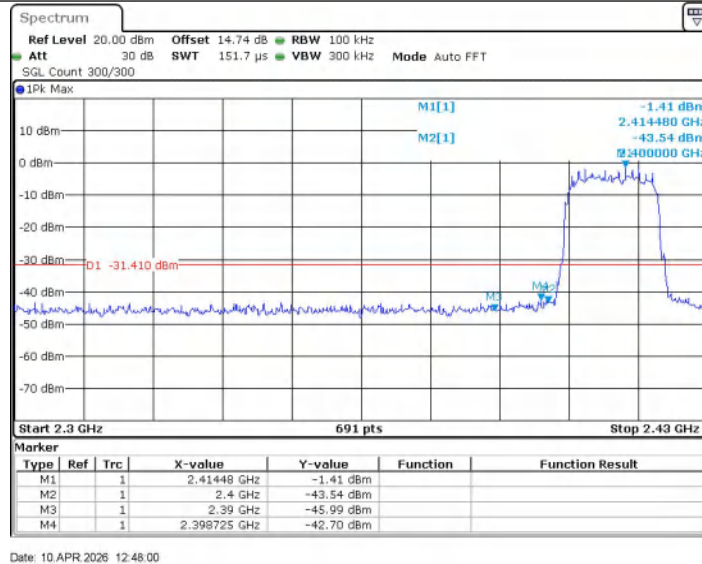

11G_Ant1_High_2462

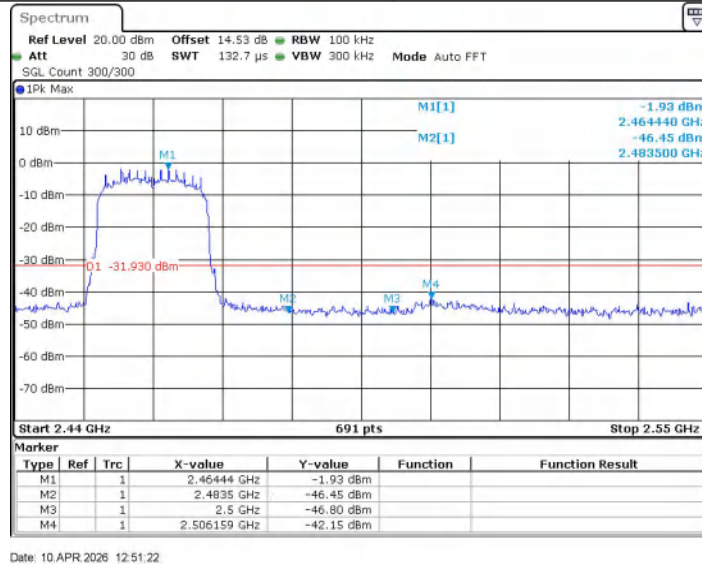

11N20SISO_Ant1_Low_2412

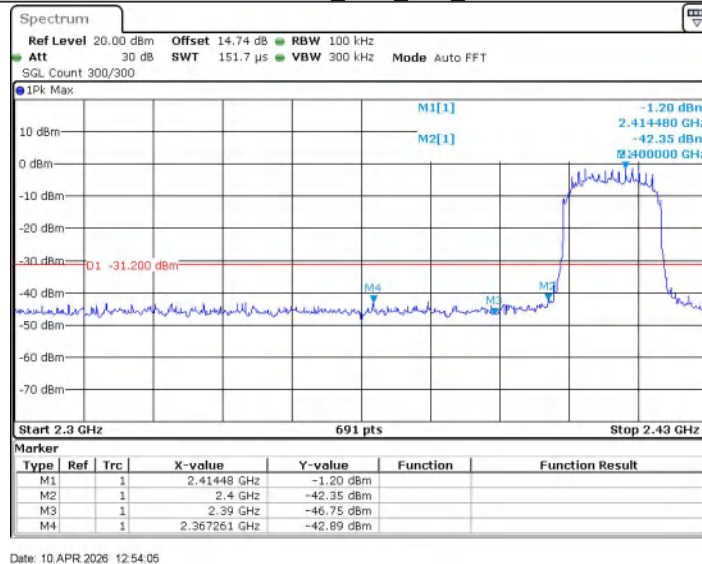


11N20SISO_Ant1_High_2462




Date: 10 APR 2026 12:59:56

11N40SISO_Ant1_Low_2422

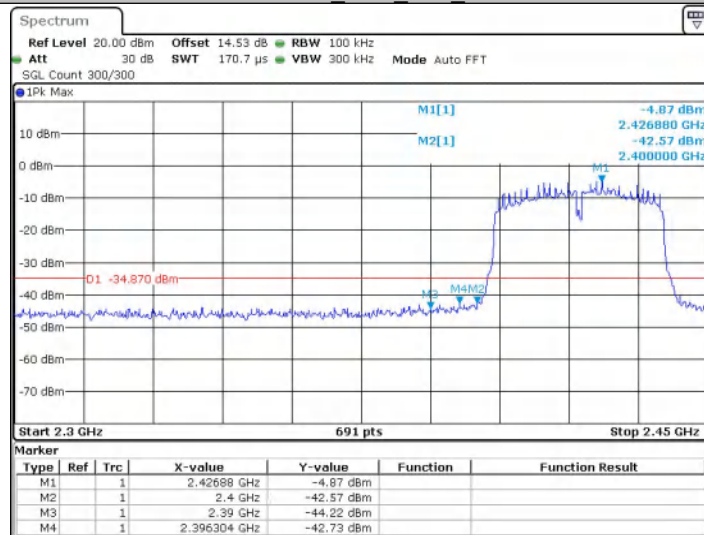


Date: 10 APR 2026 13:02:16

11N40SISO_Ant1_High_2452

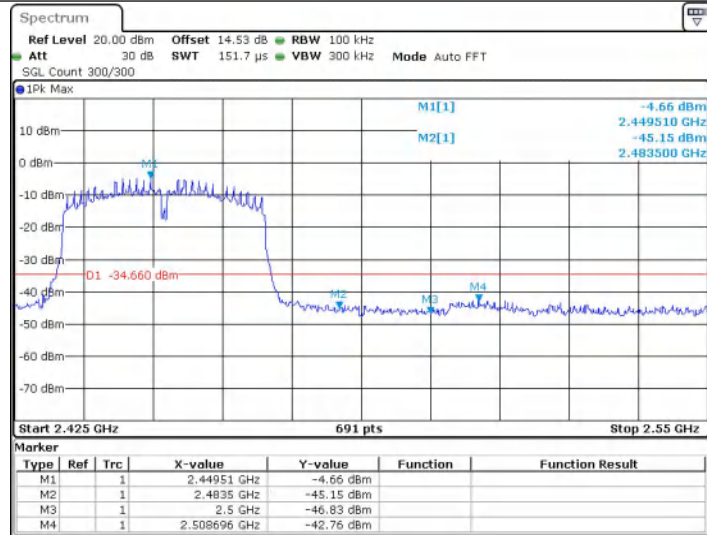


Date: 10 APR 2026 14:37:52

11AX20SISO_Ant1_Low_2412

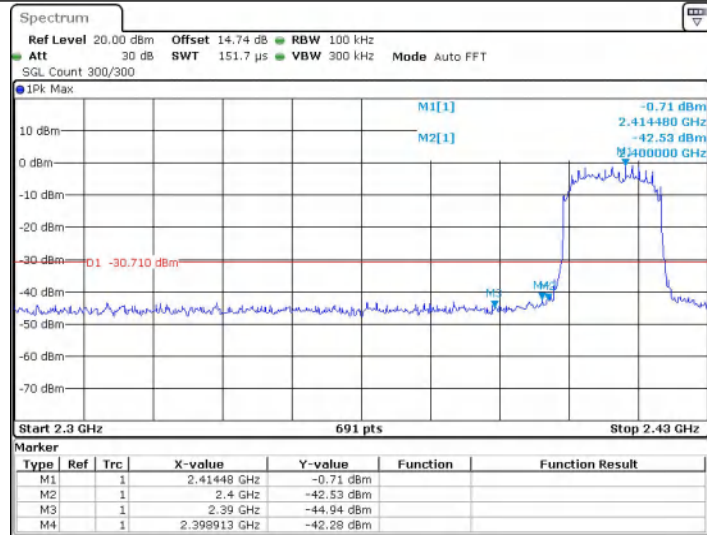


Date: 10 APR 2026 14:47:44

11AX20SISO_Ant1_High_2462

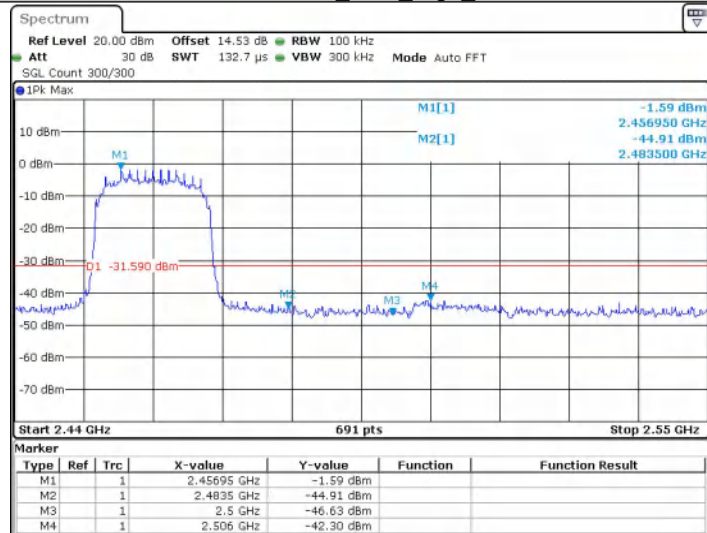


Date: 10 APR 2026 14:50:59

11AX40SISO_Ant1_Low_2422

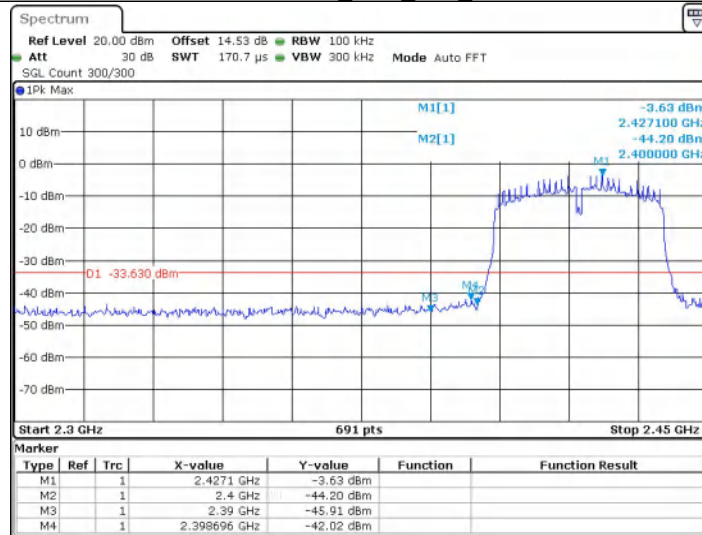


Date: 10 APR 2026 14:52:39

11AX40SISO_Ant1_High_2452

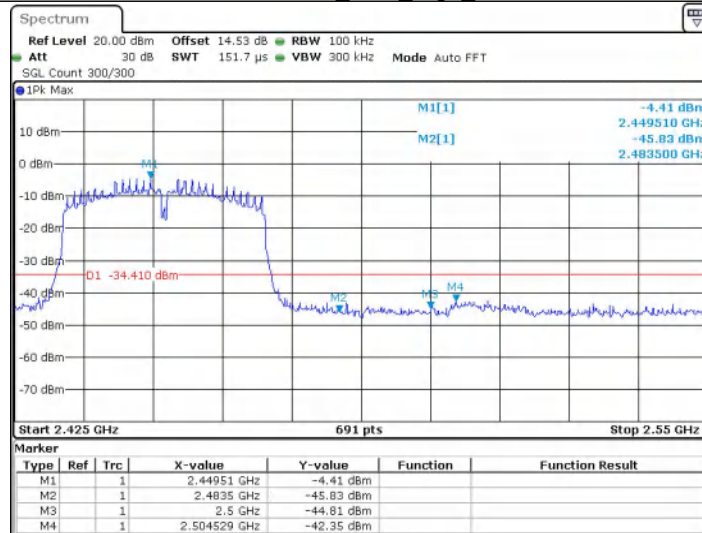

Date: 10 APR 2026 14:58:05

5.8 RF Conducted Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report. Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Result

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	1.93	1.93	---	PASS
		30~1000	1.93	-51.34	≤-28.07	PASS
		1000~26500	1.93	-44.2	≤-28.07	PASS
	2437	Reference	2.92	2.92	---	PASS
		30~1000	2.92	-49.86	≤-27.08	PASS
		1000~26500	2.92	-44.73	≤-27.08	PASS
	2462	Reference	1.21	1.21	---	PASS
		30~1000	1.21	-50.71	≤-28.79	PASS
		1000~26500	1.21	-44.4	≤-28.79	PASS
11G	2412	Reference	-3.13	-3.13	---	PASS
		30~1000	-3.13	-50.69	≤-33.13	PASS
		1000~26500	-3.13	-45.56	≤-33.13	PASS
	2437	Reference	-1.40	-1.40	---	PASS
		30~1000	-1.40	-50.25	≤-31.4	PASS
		1000~26500	-1.40	-46.75	≤-31.4	PASS
	2462	Reference	-4.78	-4.78	---	PASS
		30~1000	-4.78	-51.35	≤-34.78	PASS
		1000~26500	-4.78	-46.18	≤-34.78	PASS
11N20SISO	2412	Reference	-5.19	-5.19	---	PASS
		30~1000	-5.19	-49.48	≤-35.19	PASS
		1000~26500	-5.19	-45.66	≤-35.19	PASS
	2437	Reference	-0.80	-0.80	---	PASS
		30~1000	-0.80	-50.45	≤-30.8	PASS
		1000~26500	-0.80	-46.05	≤-30.8	PASS
	2462	Reference	-4.51	-4.51	---	PASS
		30~1000	-4.51	-50.72	≤-34.51	PASS
		1000~26500	-4.51	-45.91	≤-34.51	PASS
11N40SISO	2422	Reference	-5.20	-5.20	---	PASS
		30~1000	-5.20	-49.43	≤-35.2	PASS
		1000~26500	-5.20	-46.81	≤-35.2	PASS
	2437	Reference	-5.63	-5.63	---	PASS
		30~1000	-5.63	-49.39	≤-35.63	PASS
		1000~26500	-5.63	-47.85	≤-35.63	PASS
	2452	Reference	-7.72	-7.72	---	PASS


		30~1000	-7.72	-49.66	≤ -37.72	PASS
		1000~26500	-7.72	-47.23	≤ -37.72	PASS
11AX20SISO	2412	Reference	-3.97	-3.97	---	PASS
		30~1000	-3.97	-51.12	≤ -33.97	PASS
		1000~26500	-3.97	-44.7	≤ -33.97	PASS
	2437	Reference	-3.04	-3.04	---	PASS
		30~1000	-3.04	-50.86	≤ -33.04	PASS
		1000~26500	-3.04	-46	≤ -33.04	PASS
	2462	Reference	-5.04	-5.04	---	PASS
		30~1000	-5.04	-50.88	≤ -35.04	PASS
		1000~26500	-5.04	-46.8	≤ -35.04	PASS
11AX40SISO	2422	Reference	-7.35	-7.35	---	PASS
		30~1000	-7.35	-49.51	≤ -37.35	PASS
		1000~26500	-7.35	-46.07	≤ -37.35	PASS
	2437	Reference	-4.03	-4.03	---	PASS
		30~1000	-4.03	-50.27	≤ -34.03	PASS
		1000~26500	-4.03	-46.62	≤ -34.03	PASS
	2452	Reference	-6.50	-6.50	---	PASS
		30~1000	-6.50	-50.63	≤ -36.5	PASS
		1000~26500	-6.50	-48	≤ -36.5	PASS

Test Graphs

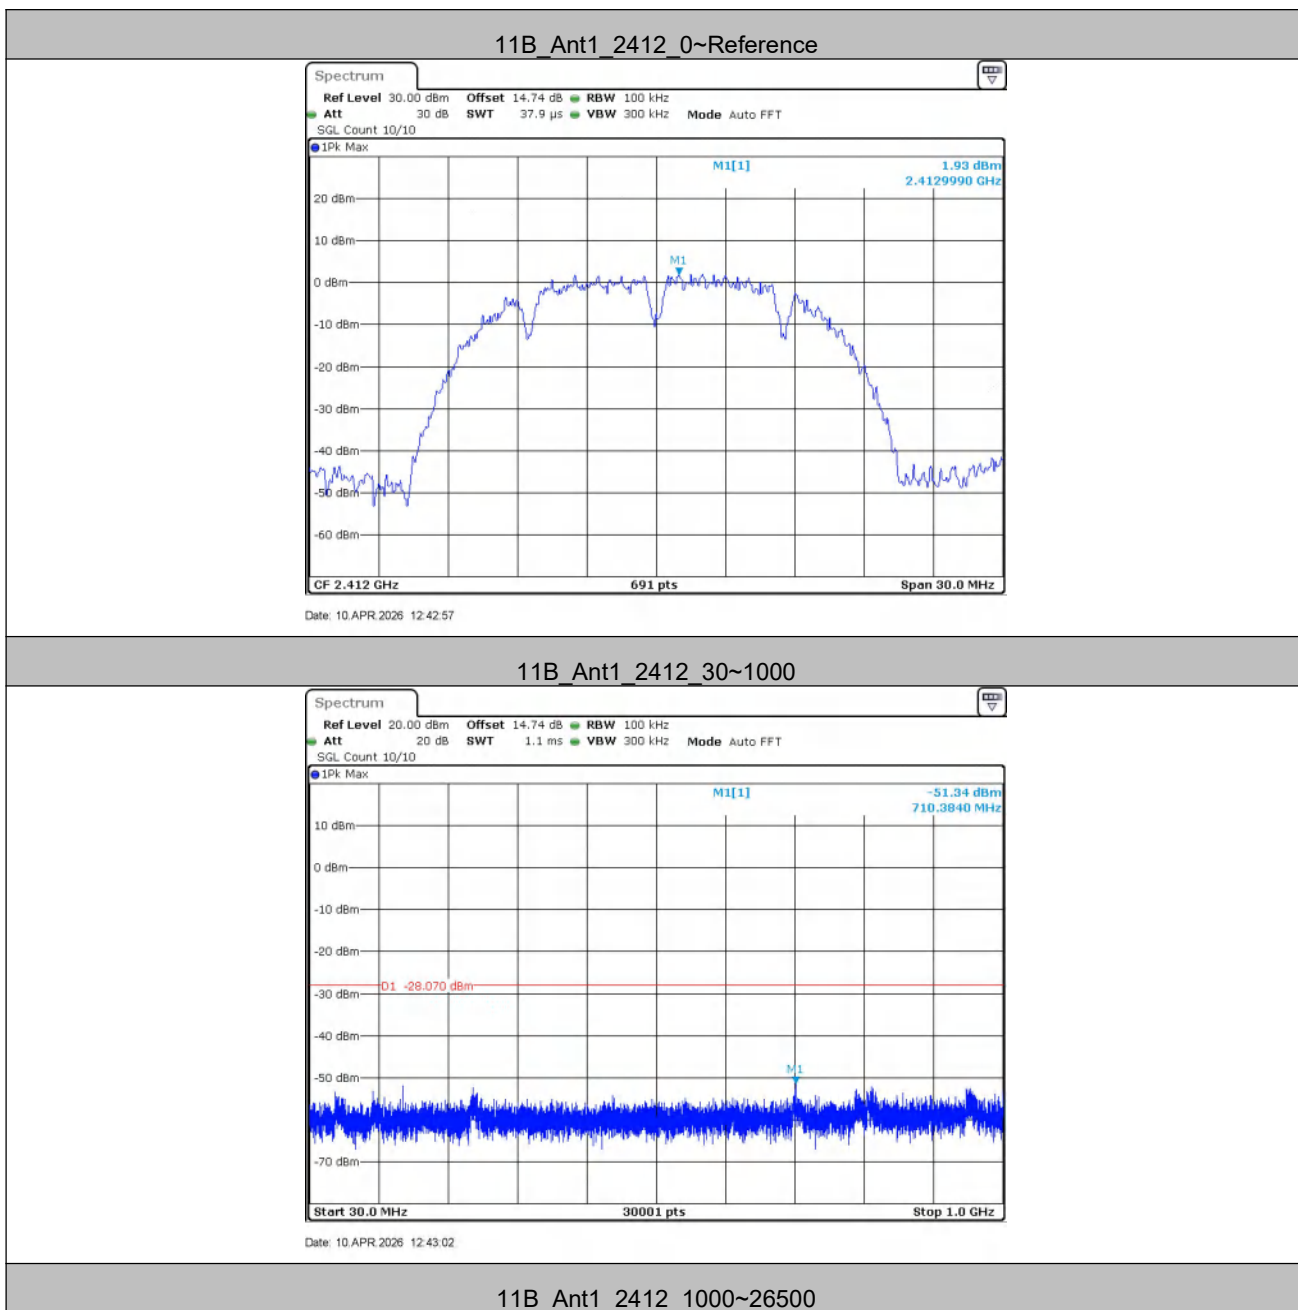


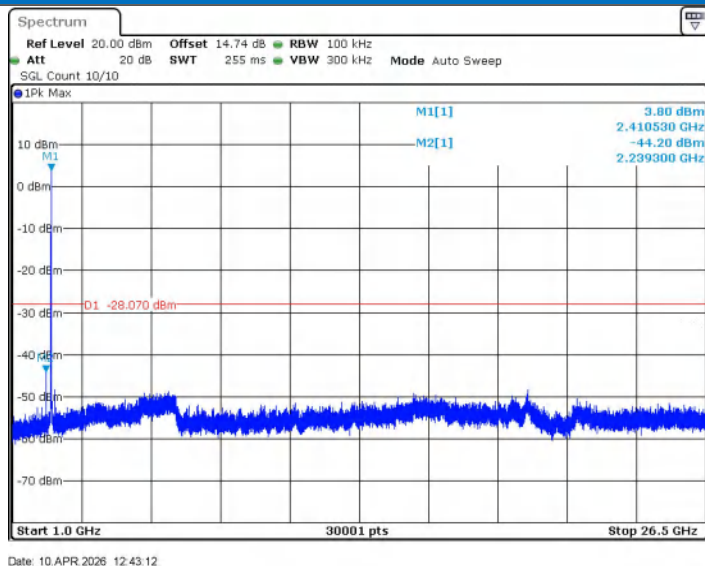


11B_Ant1_2437_0~Reference

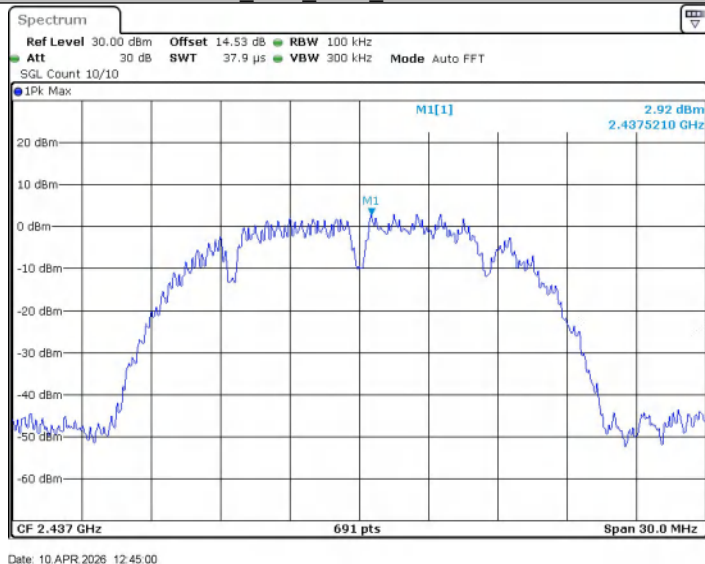

11B_Ant1_2437_30~1000

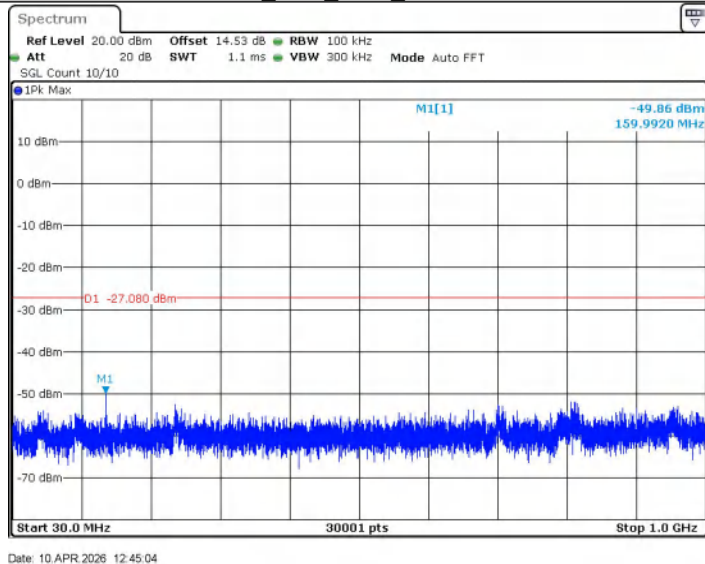


11B_Ant1_2437_1000~26500

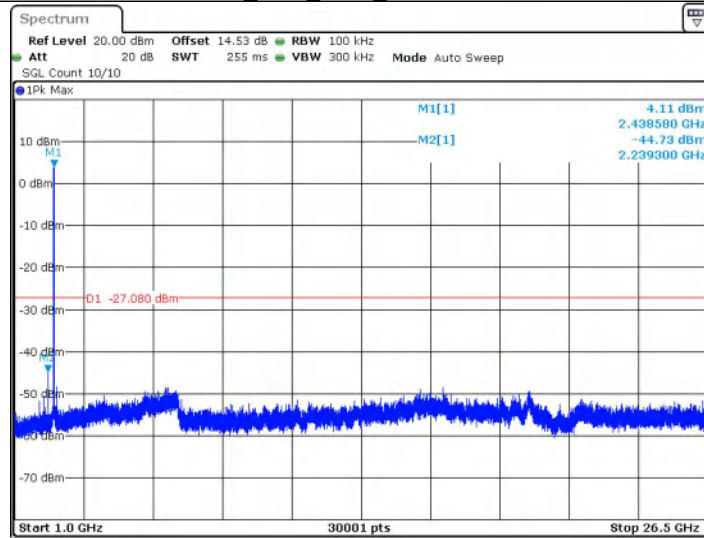


Date: 10 APR 2026 12:45:15

11B_Ant1_2462_0~Reference

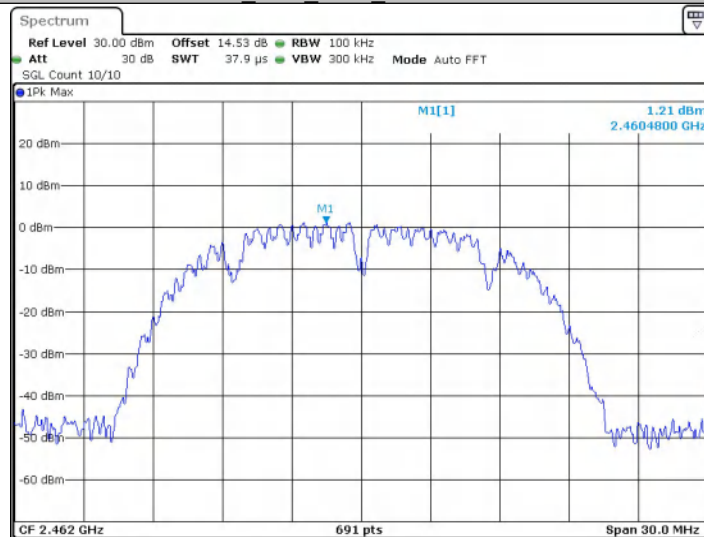


Date: 10 APR 2026 12:46:36


11B_Ant1_2462_30~1000

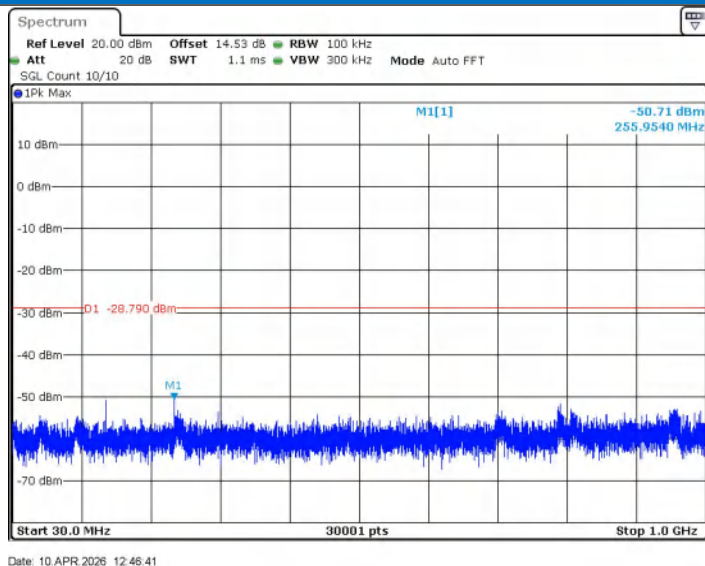


11B_Ant1_2462_1000~26500

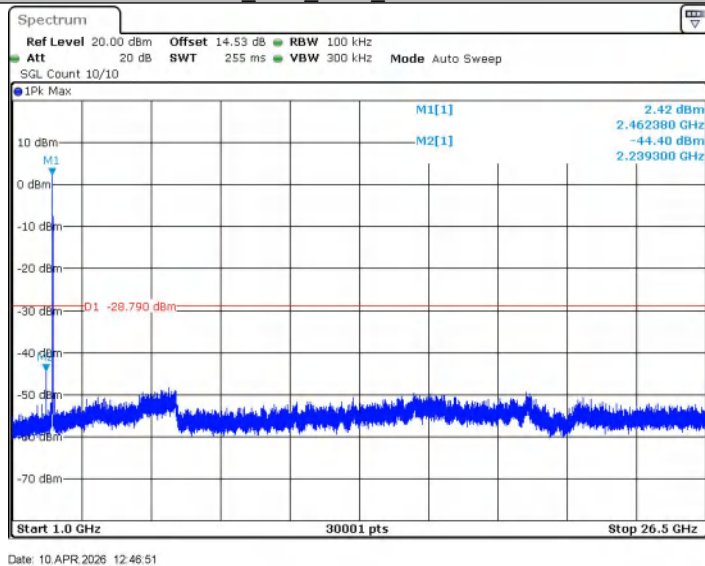

11G_Ant1_2412_0~Reference

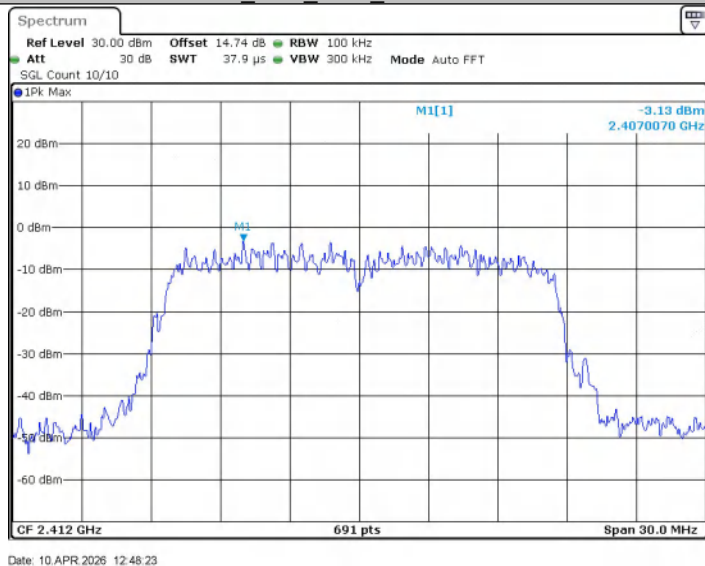


11G_Ant1_2412_30~1000

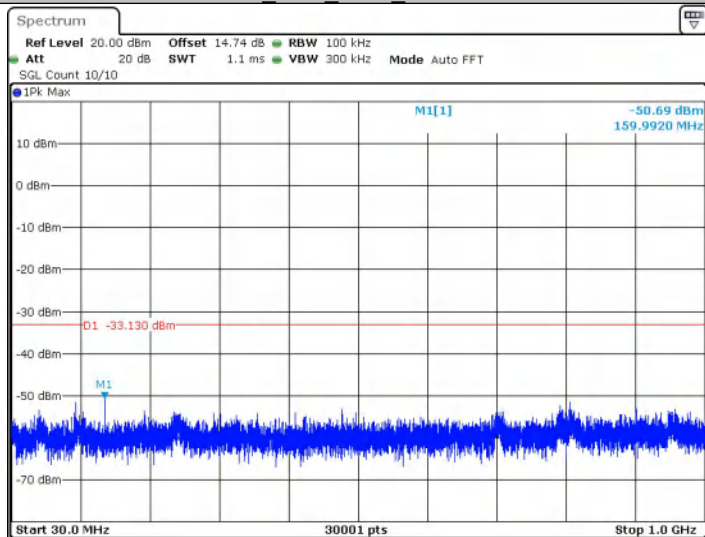


Date: 10 APR 2026 12:48:28

11G_Ant1_2412_1000~26500

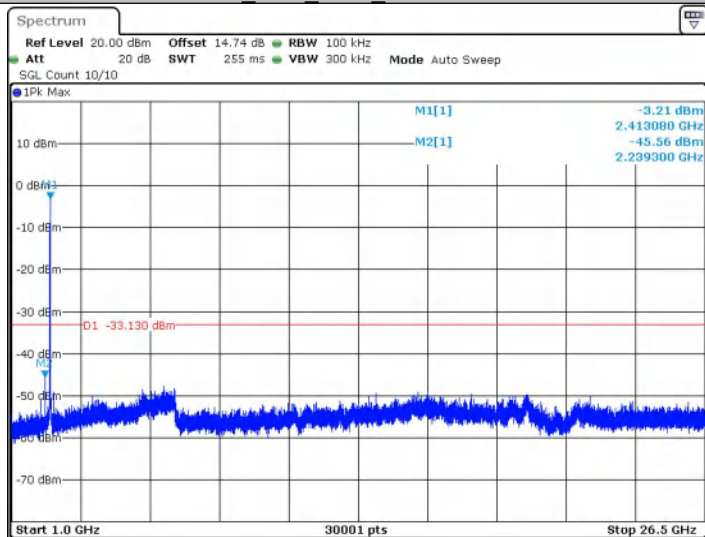


Date: 10 APR 2026 12:48:38


11G_Ant1_2437_0~Reference

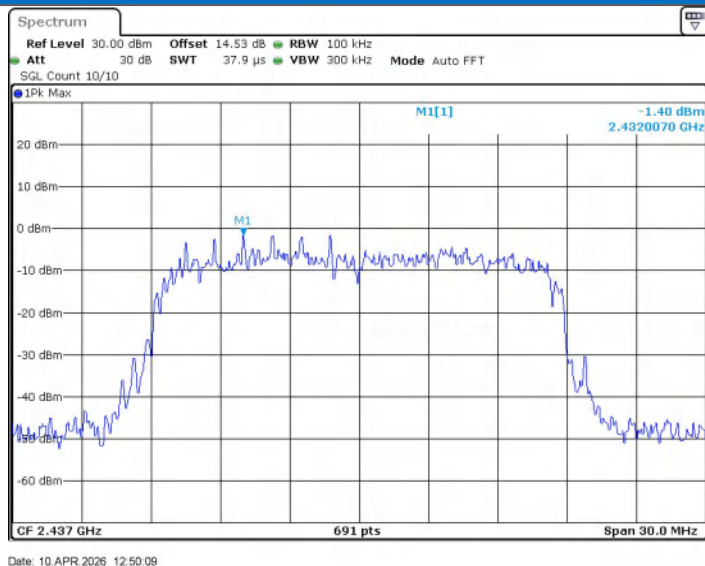


11G_Ant1_2437_30~1000

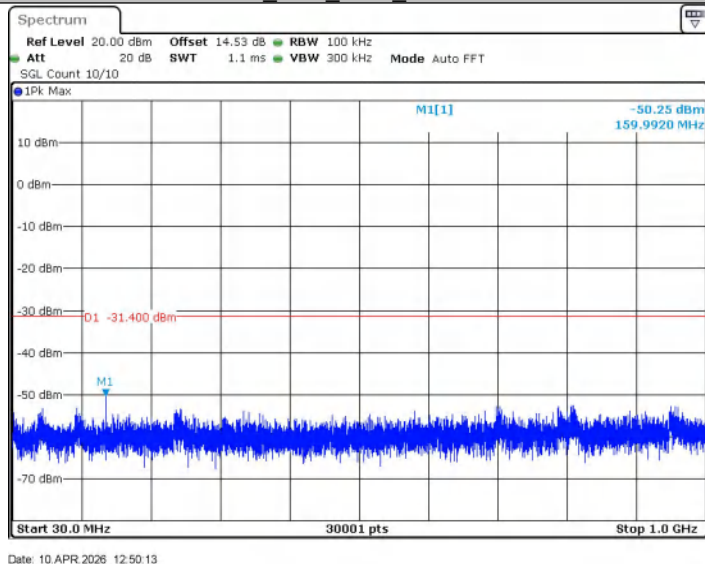

11G_Ant1_2437_1000~26500

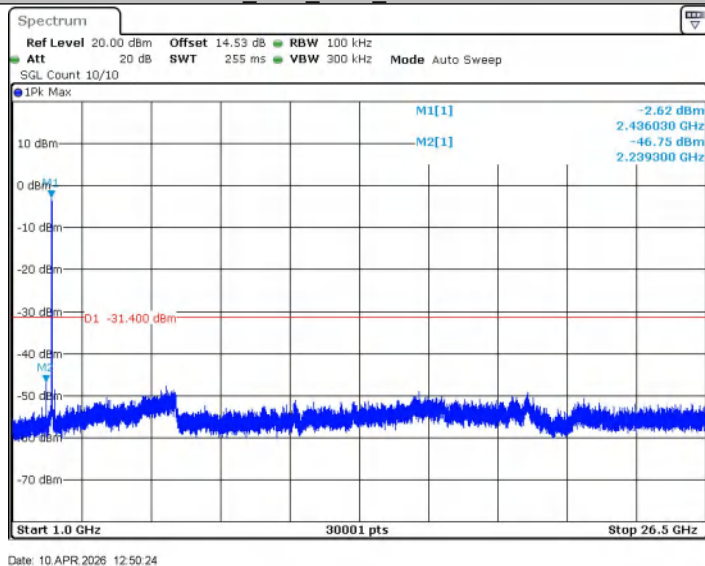


11G_Ant1_2462_0~Reference

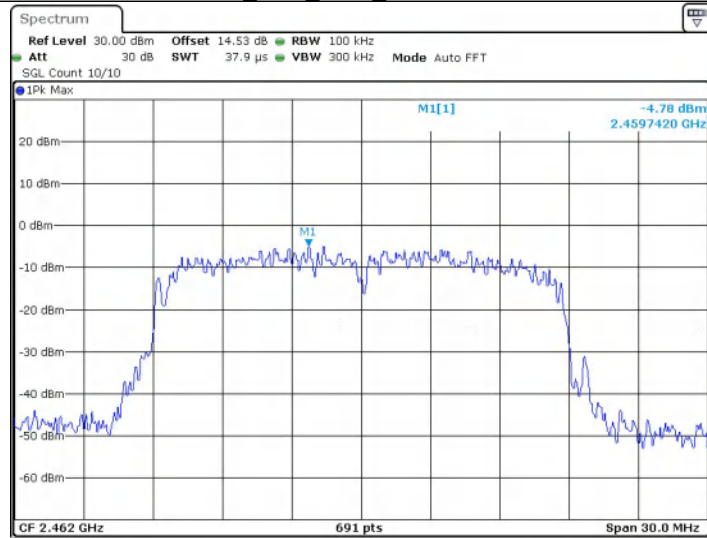


Date: 10 APR 2026 12:51:47

11G_Ant1_2462_30~1000

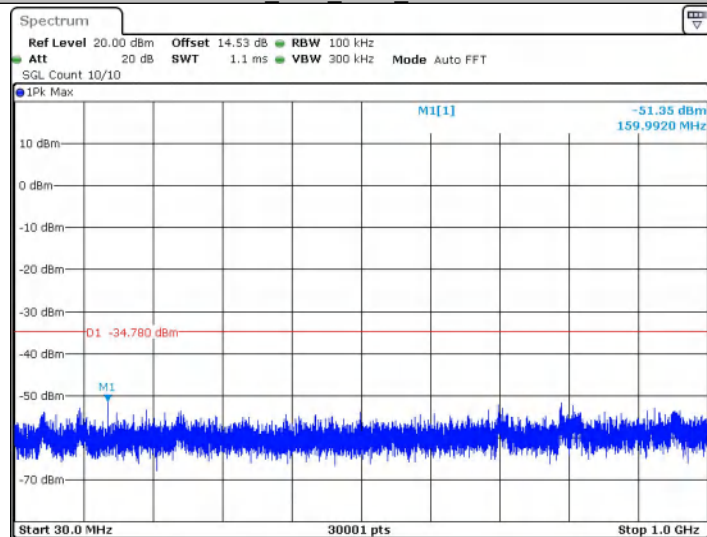


Date: 10 APR 2026 12:51:52


11G_Ant1_2462_1000~26500

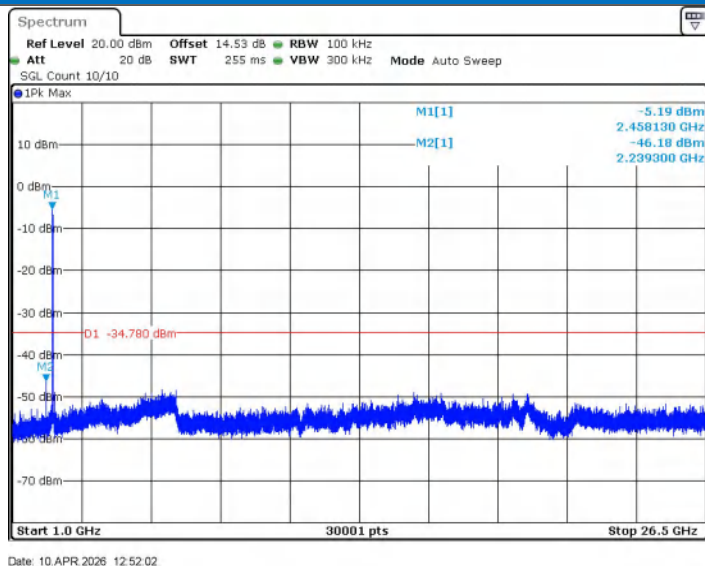


11N20SISO_Ant1_2412_0~Reference

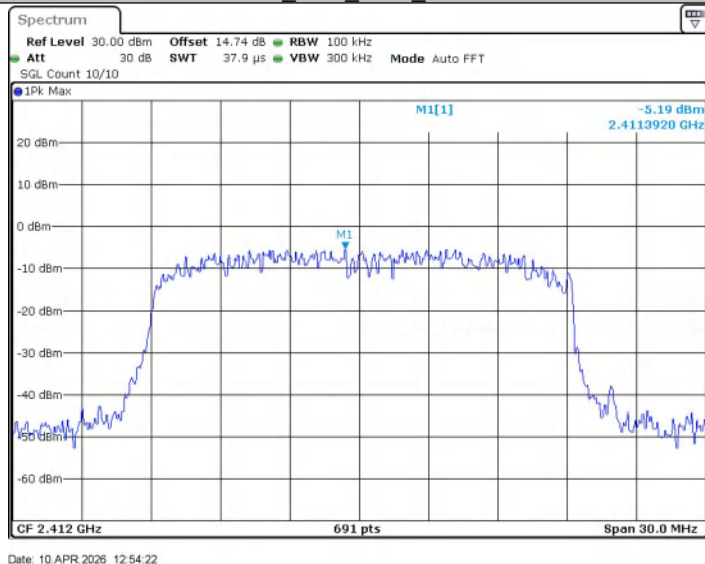

11N20SISO_Ant1_2412_30~1000

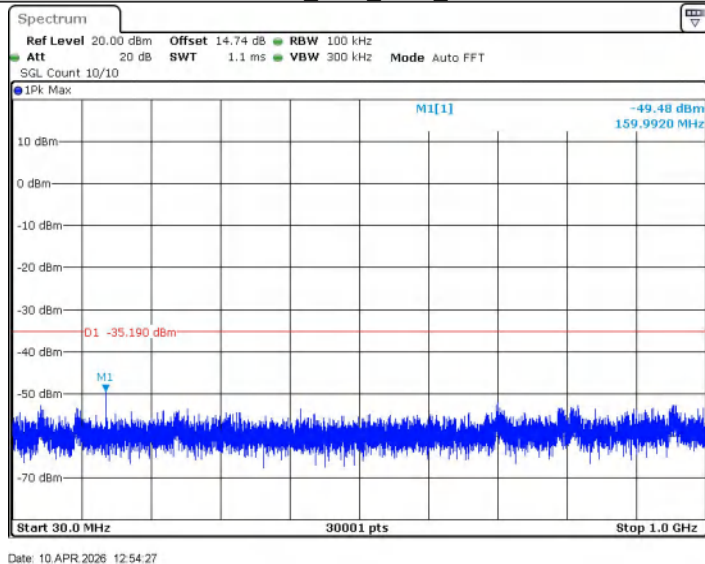


11N20SISO_Ant1_2412_1000~26500

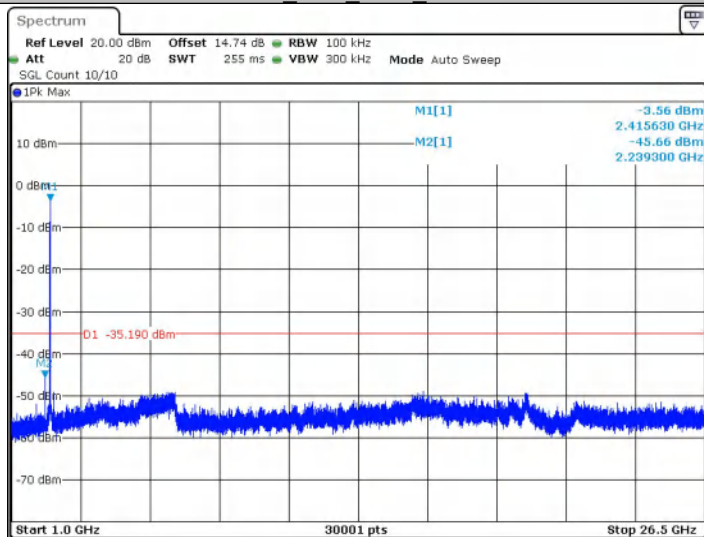


Date: 10 APR 2026 12:54:38

11N20SISO_Ant1_2437_0~Reference

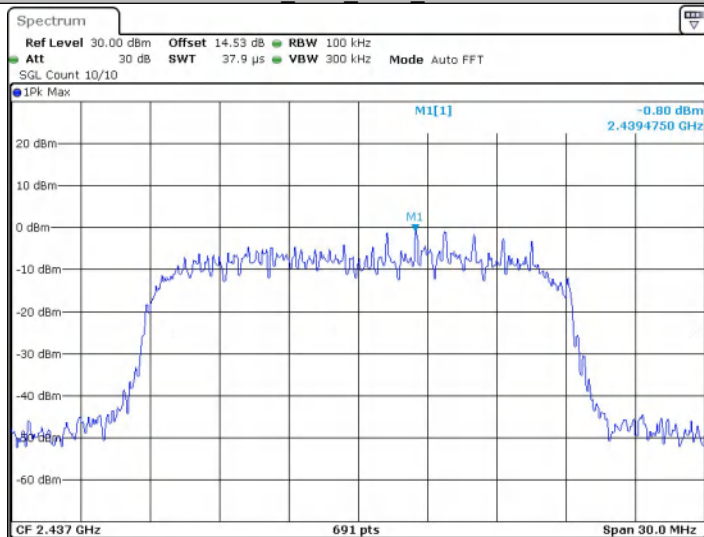


Date: 10 APR 2026 12:55:42


11N20SISO_Ant1_2437_30~1000

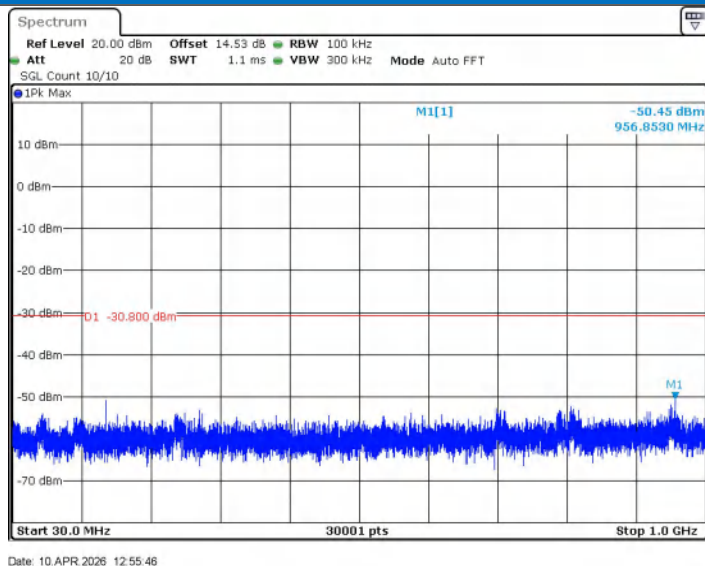


11N20SISO_Ant1_2437_1000~26500

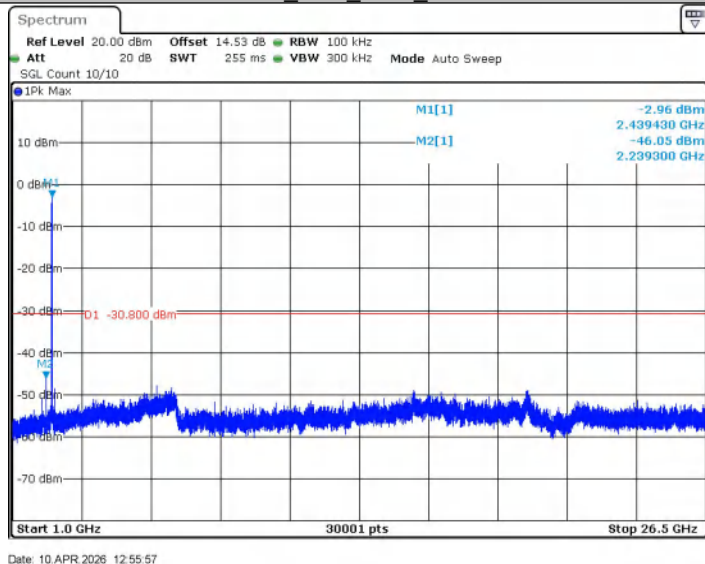

11N20SISO_Ant1_2462_0~Reference

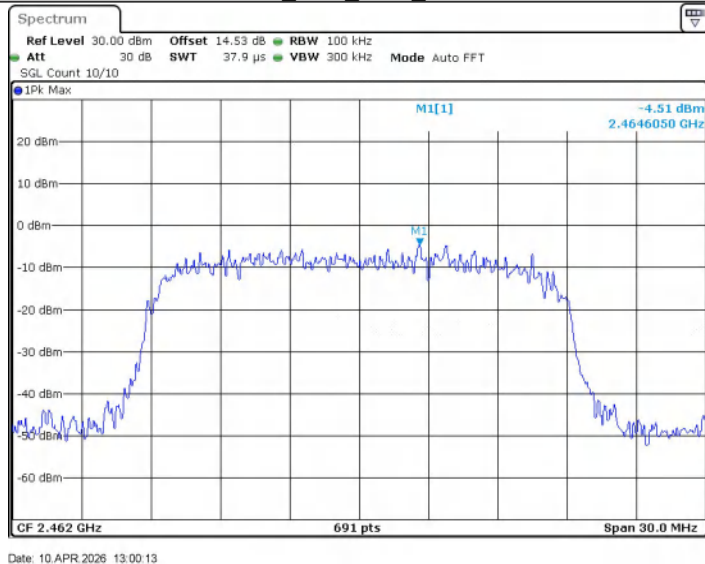


11N20SISO_Ant1_2462_30~1000

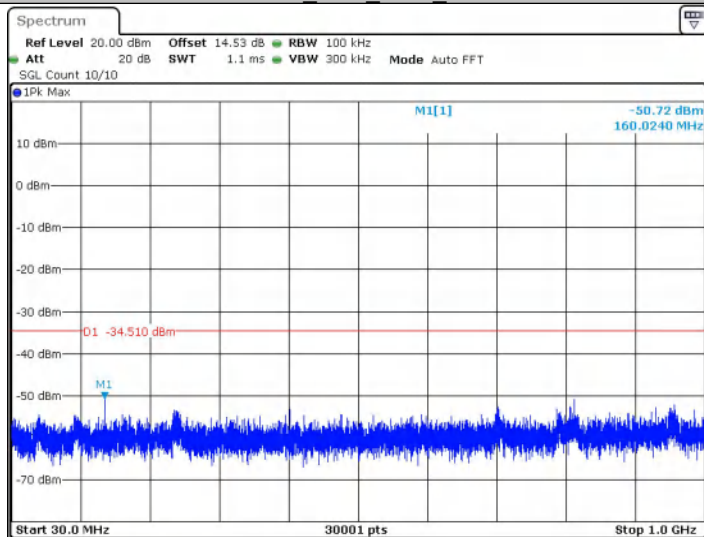


Date: 10 APR 2026 13:00:17

11N20SISO_Ant1_2462_1000~26500

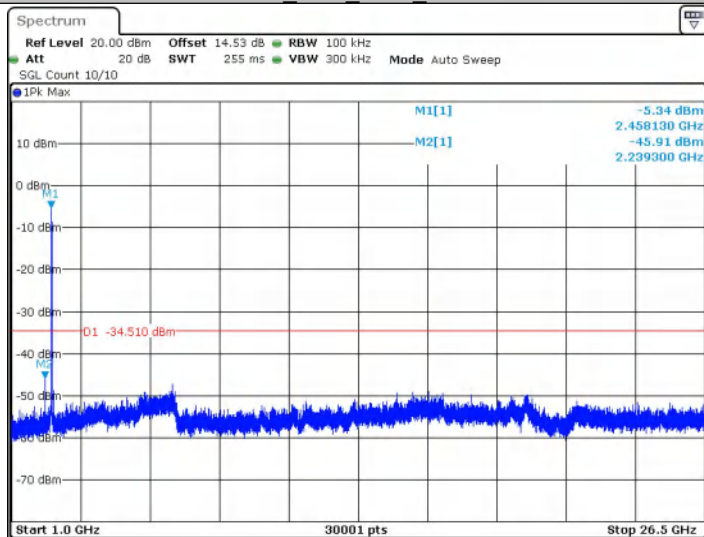


Date: 10 APR 2026 13:00:28


11N40SISO_Ant1_2422_0~Reference

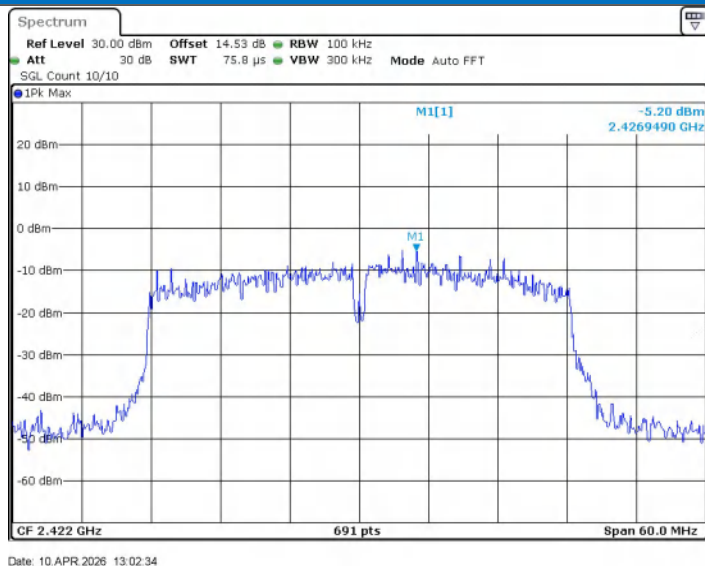


11N40SISO_Ant1_2422_30~1000

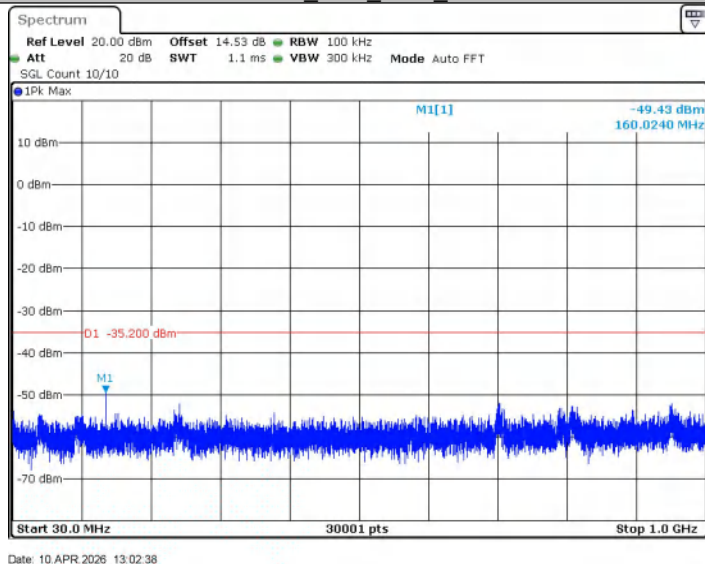

11N40SISO_Ant1_2422_1000~26500

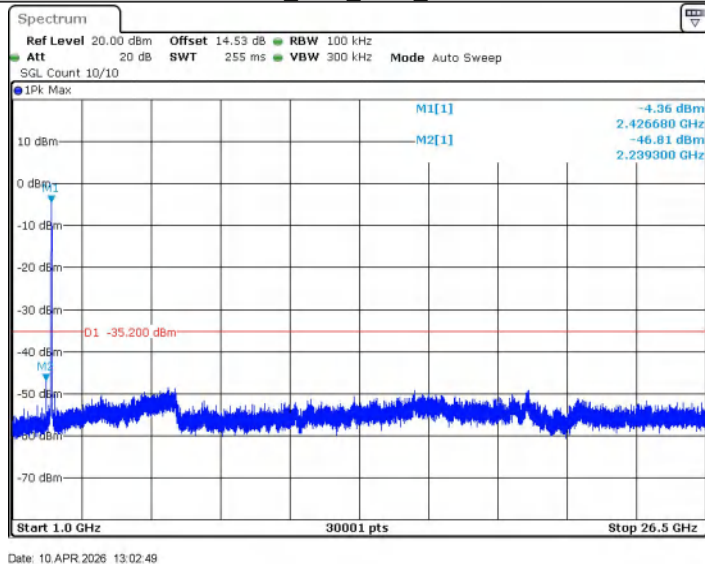


11N40SISO_Ant1_2437_0~Reference

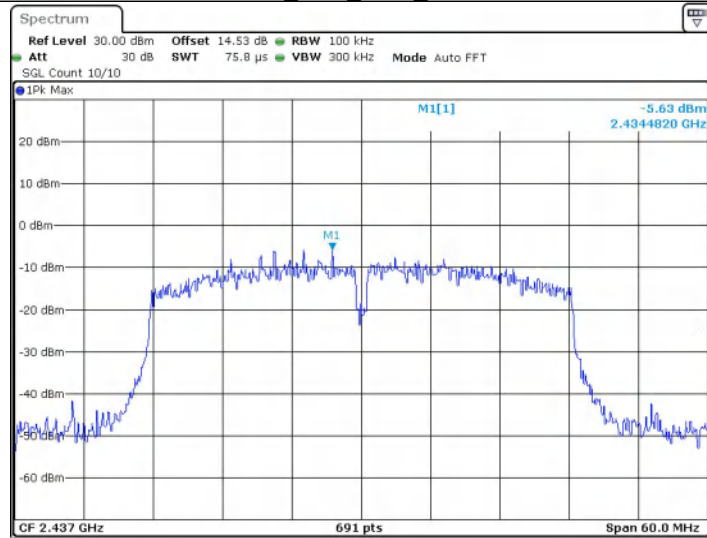


Date: 10 APR 2026 13:03:41

11N40SISO_Ant1_2437_30~1000

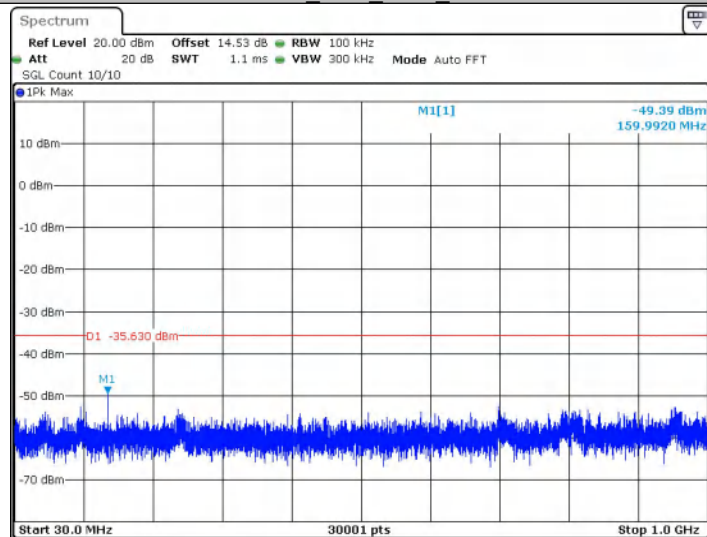


Date: 10 APR 2026 13:03:45


11N40SISO_Ant1_2437_1000~26500

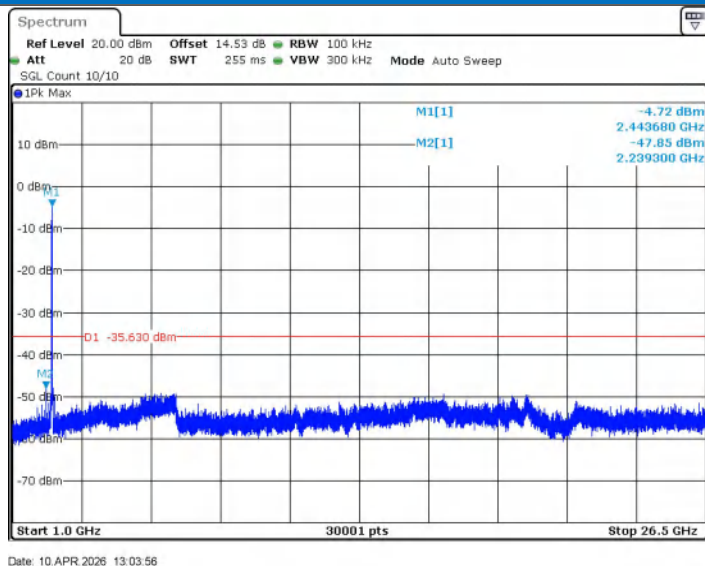


11N40SISO_Ant1_2452_0~Reference

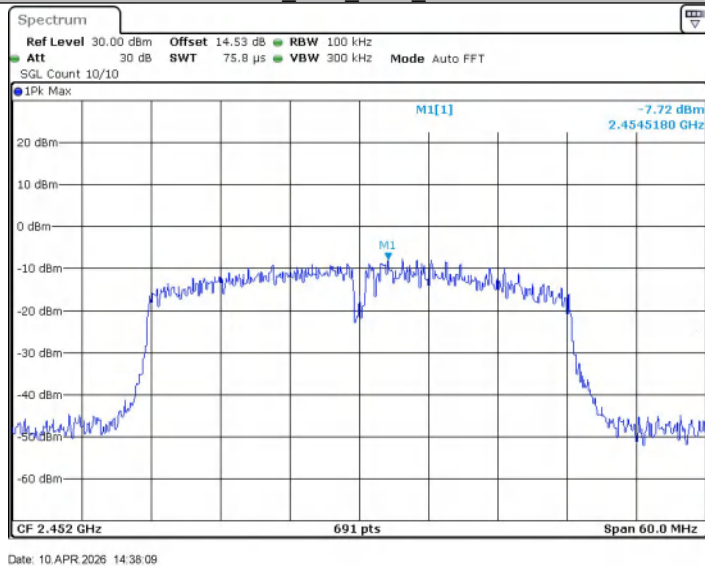

11N40SISO_Ant1_2452_30~1000

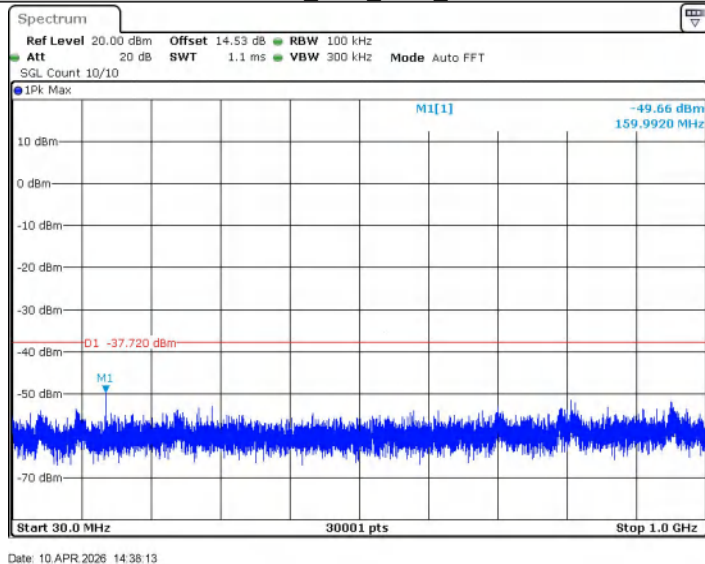


11N40SISO_Ant1_2452_1000~26500

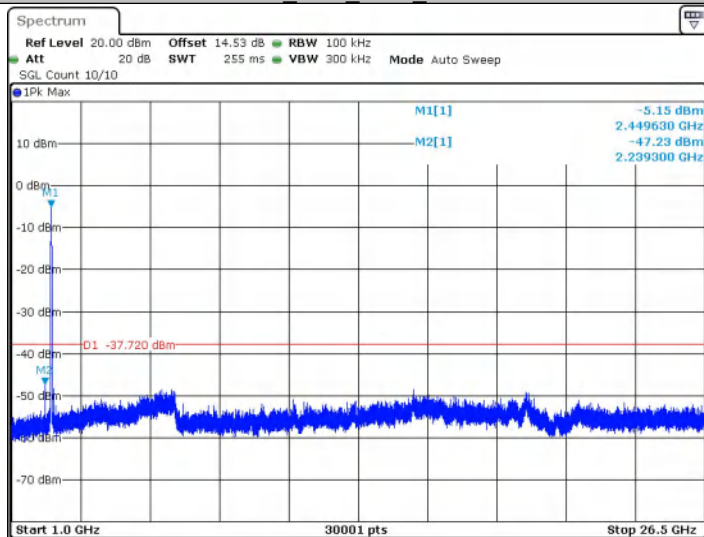


Date: 10 APR 2026 14:38:24

11AX20SISO_Ant1_2412_0~Reference

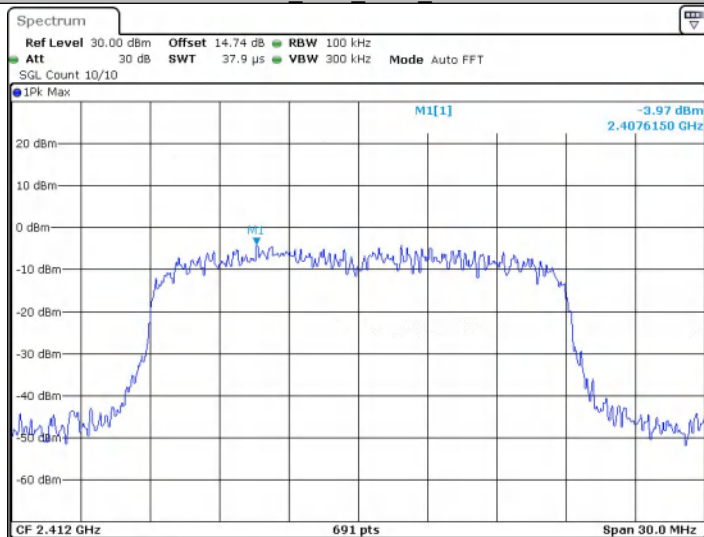


Date: 10 APR 2026 14:48:07


11AX20SISO_Ant1_2412_30~1000

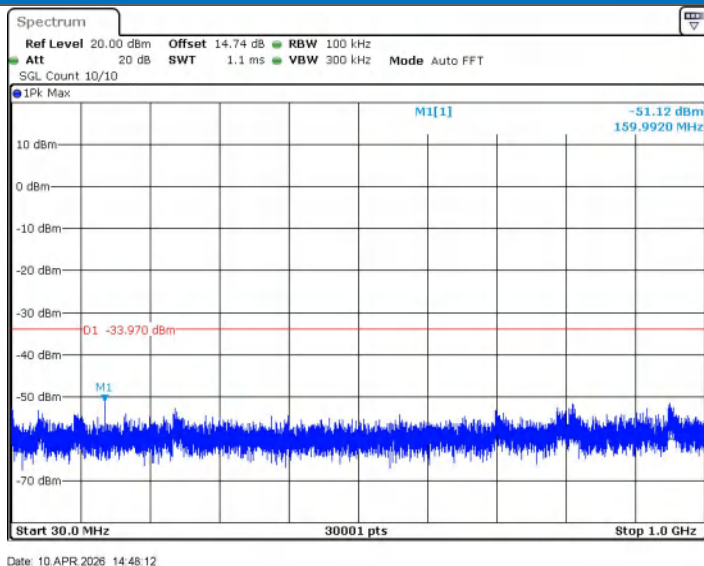


11AX20SISO_Ant1_2412_1000~26500

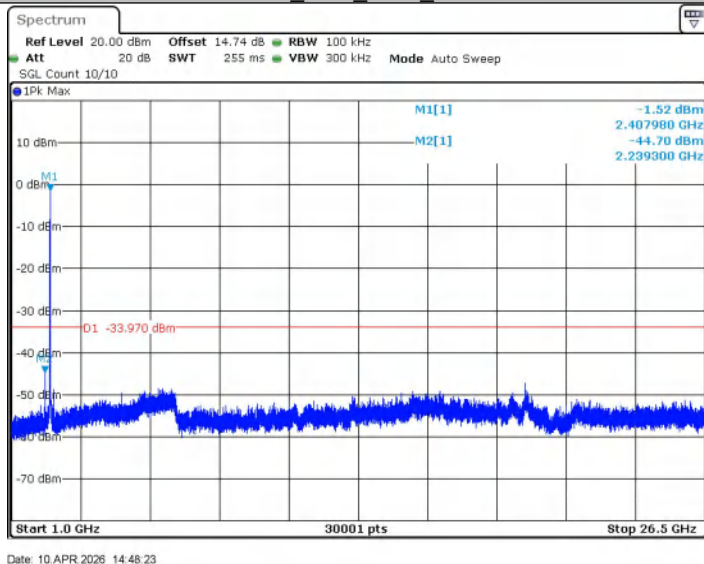

11AX20SISO_Ant1_2437_0~Reference

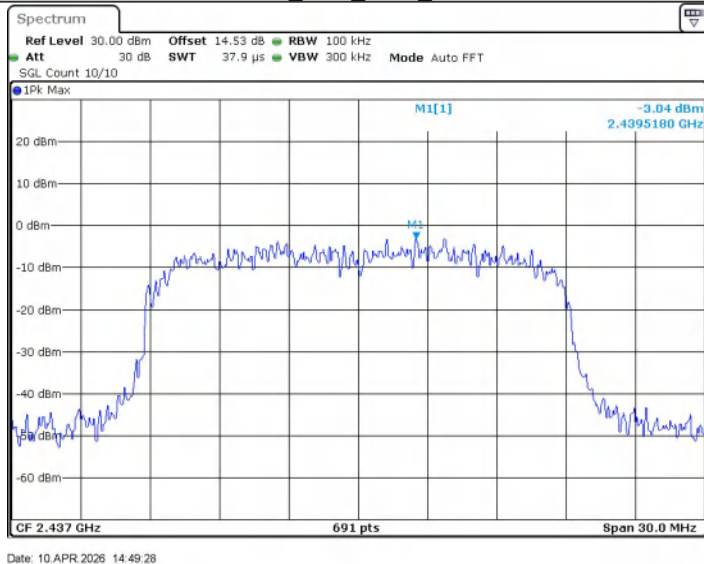


11AX20SISO_Ant1_2437_30~1000

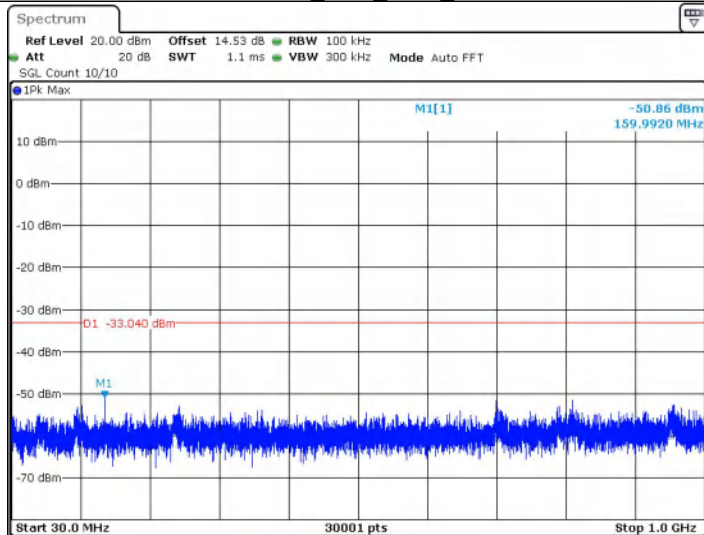


Date: 10 APR 2026 14:49:32

11AX20SISO_Ant1_2437_1000~26500

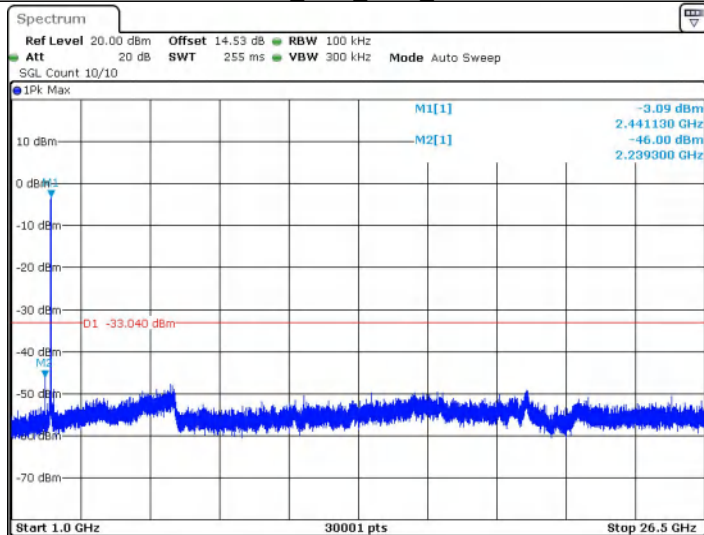


Date: 10 APR 2026 14:49:43


11AX20SISO_Ant1_2462_0~Reference

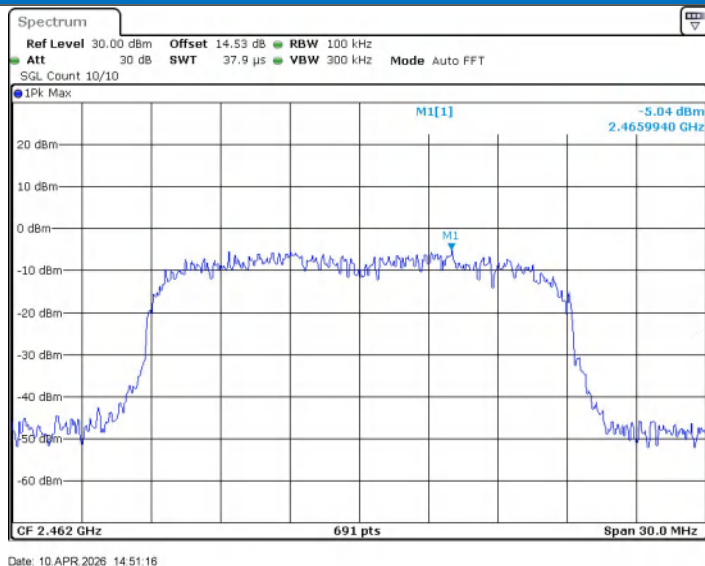


11AX20SISO_Ant1_2462_30~1000

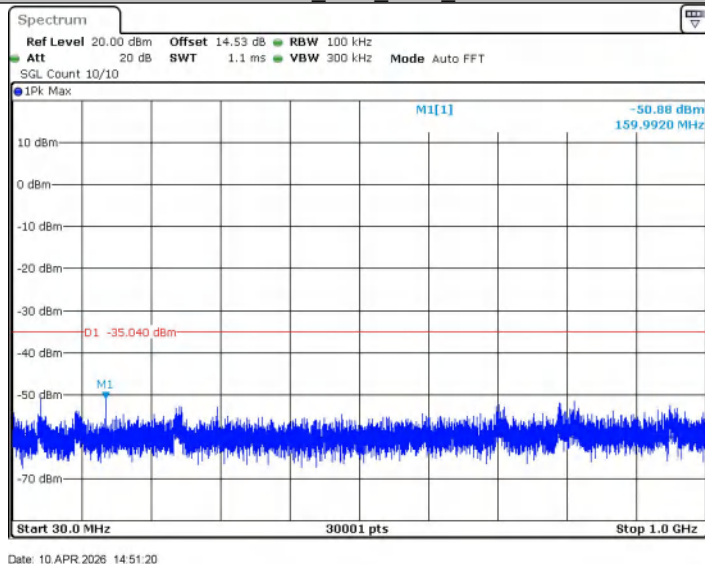

11AX20SISO_Ant1_2462_1000~26500

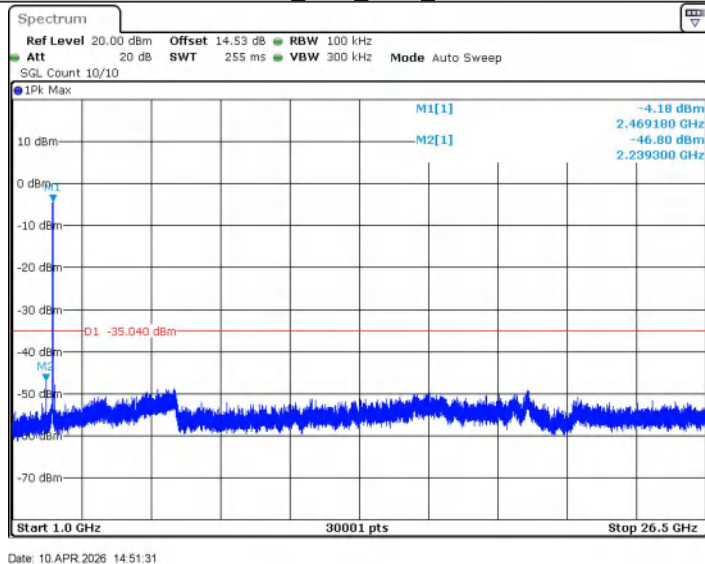


11AX40SISO_Ant1_2422_0~Reference

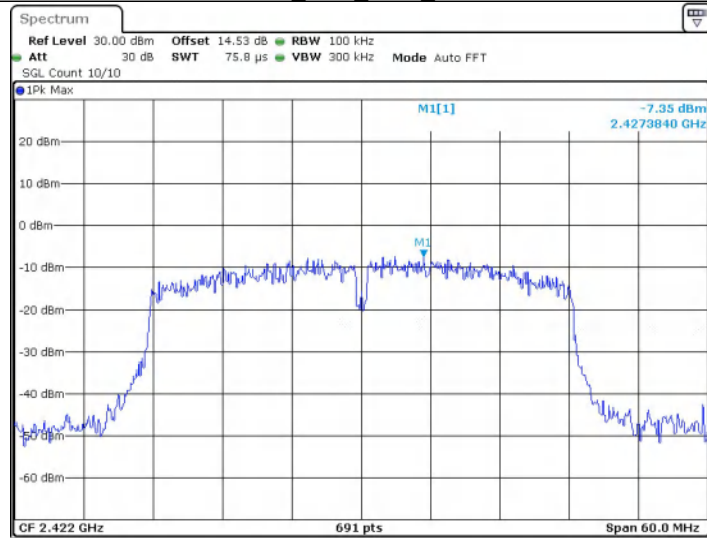


Date: 10 APR 2026 14:52:56

11AX40SISO_Ant1_2422_30~1000

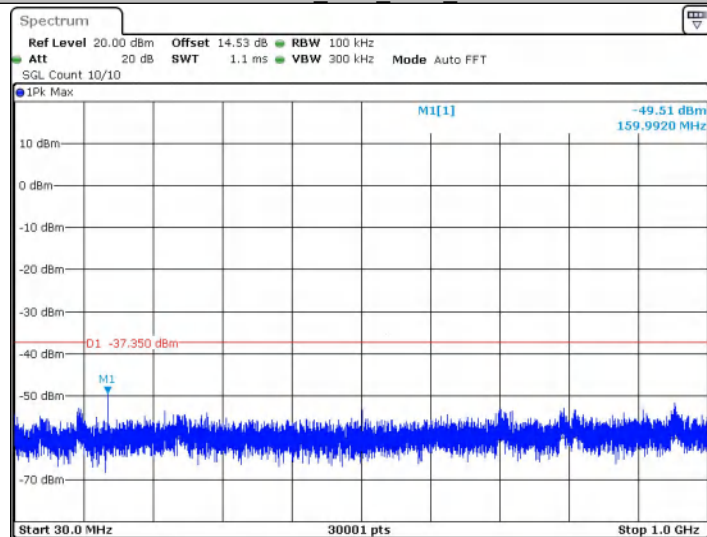


Date: 10 APR 2026 14:53:01


11AX40SISO_Ant1_2422_1000~26500

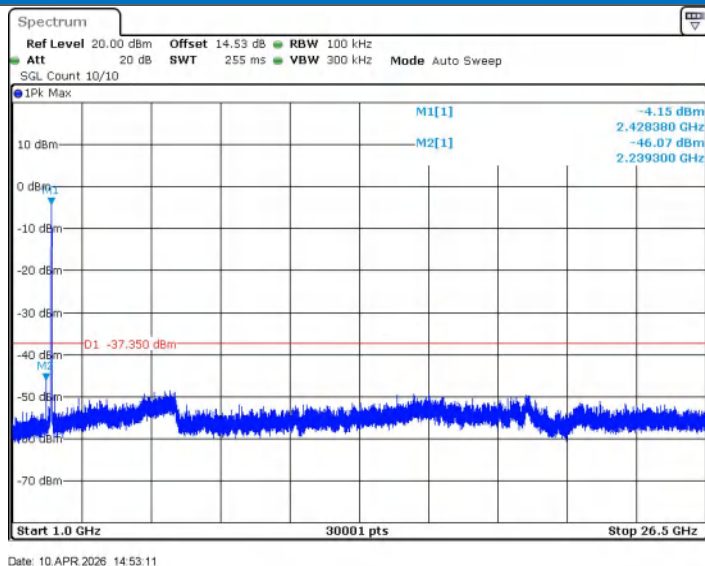


11AX40SISO_Ant1_2437_0~Reference

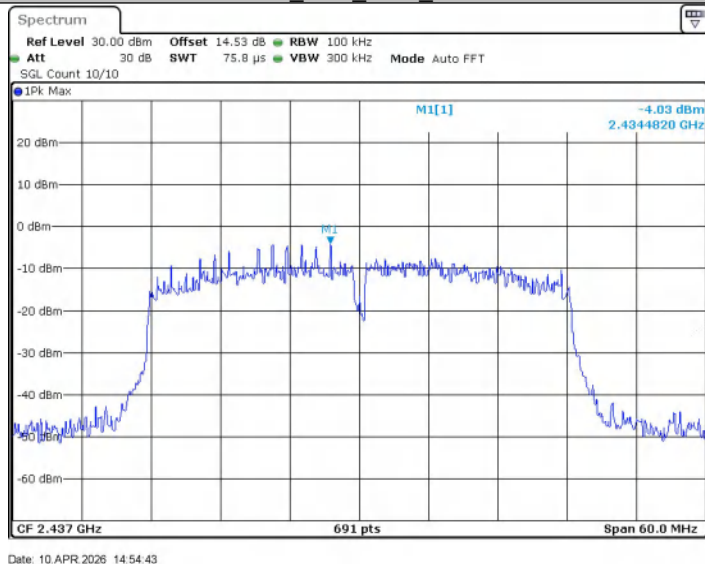

11AX40SISO_Ant1_2437_30~1000

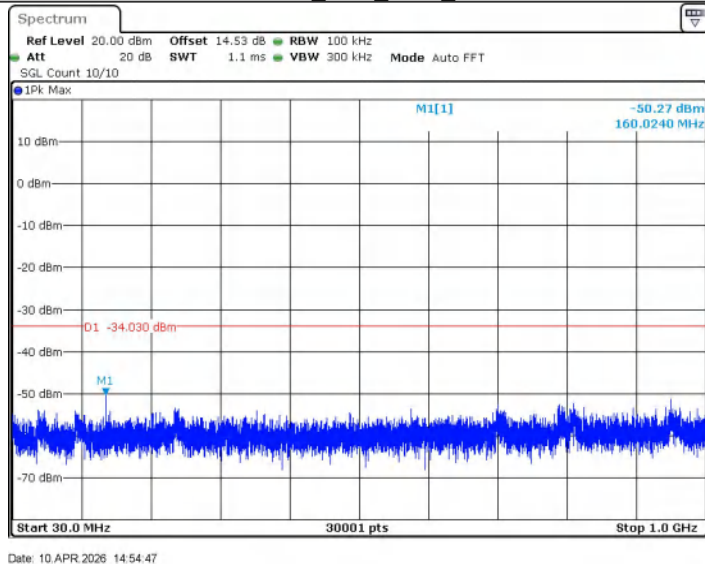


11AX40SISO_Ant1_2437_1000~26500

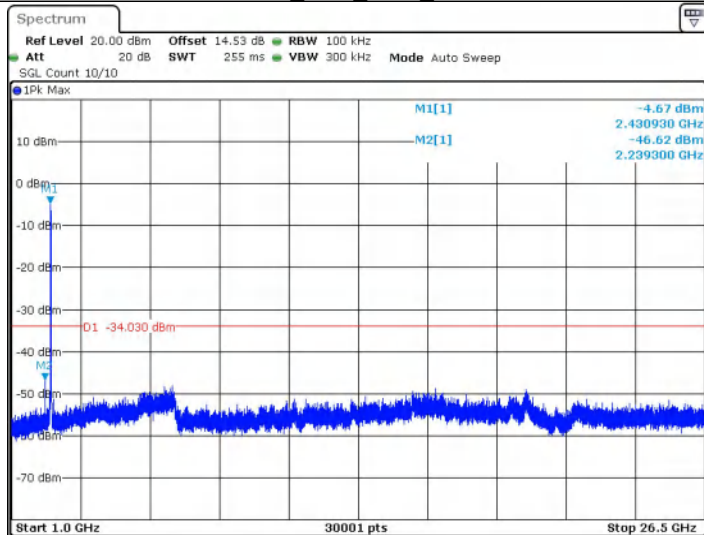


Date: 10 APR 2026 14:54:58

11AX40SISO_Ant1_2452_0~Reference

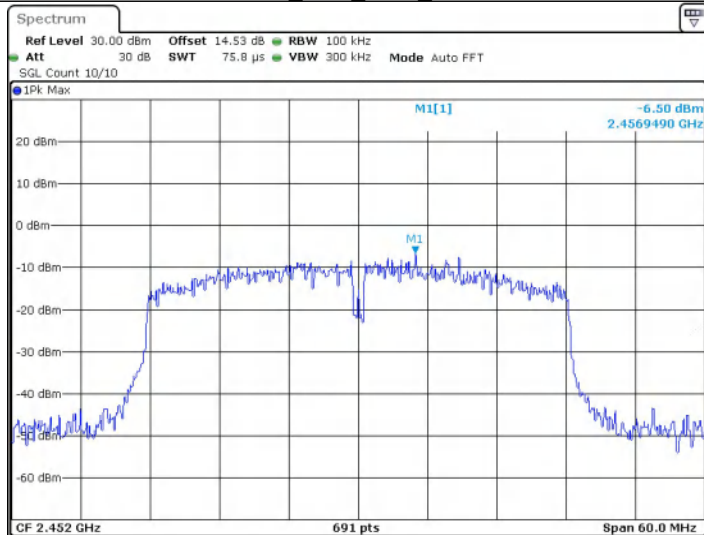


Date: 10 APR 2026 14:58:32

11AX40SISO_Ant1_2452_30~1000

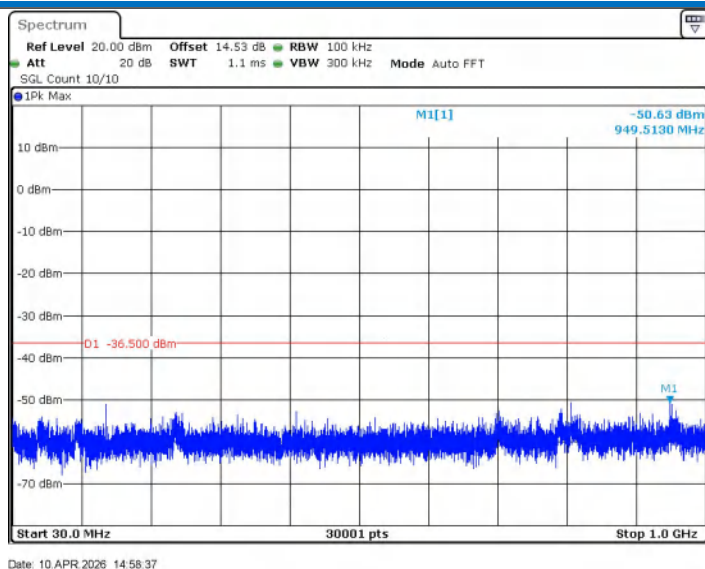

11AX40SISO_Ant1_2452_1000~26500

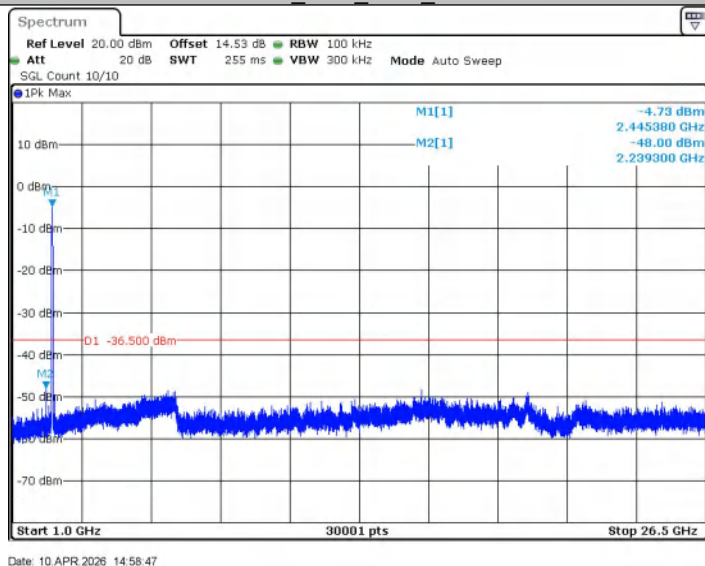

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

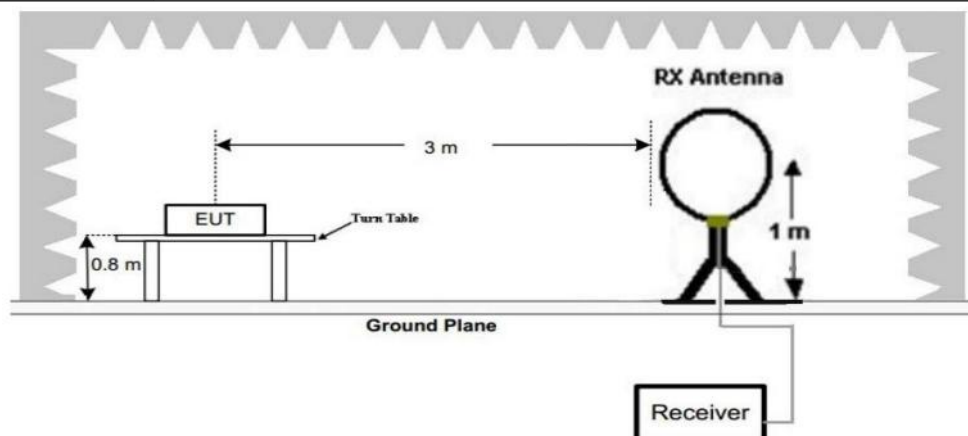


Figure 1. Below 30MHz

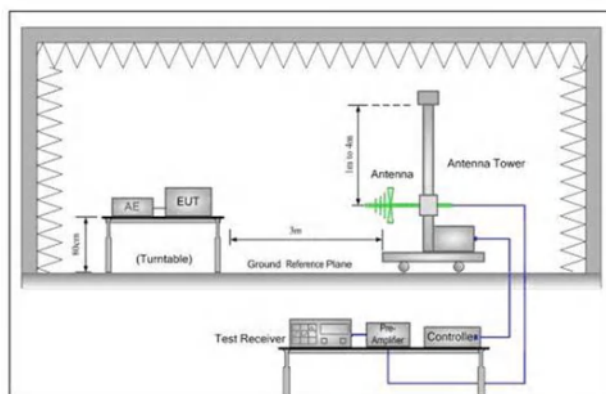


Figure 2. 30MHz to 1GHz

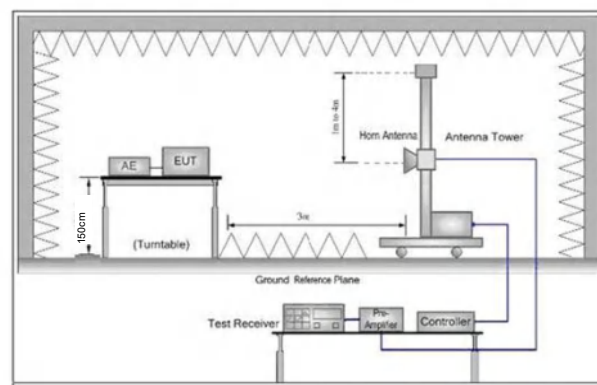


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Only the worst case is recorded in the report. Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel.
Test Results:	Pass

5.9.1 Radiated emission below 1GHz

30MHz~1GHz
Vertical

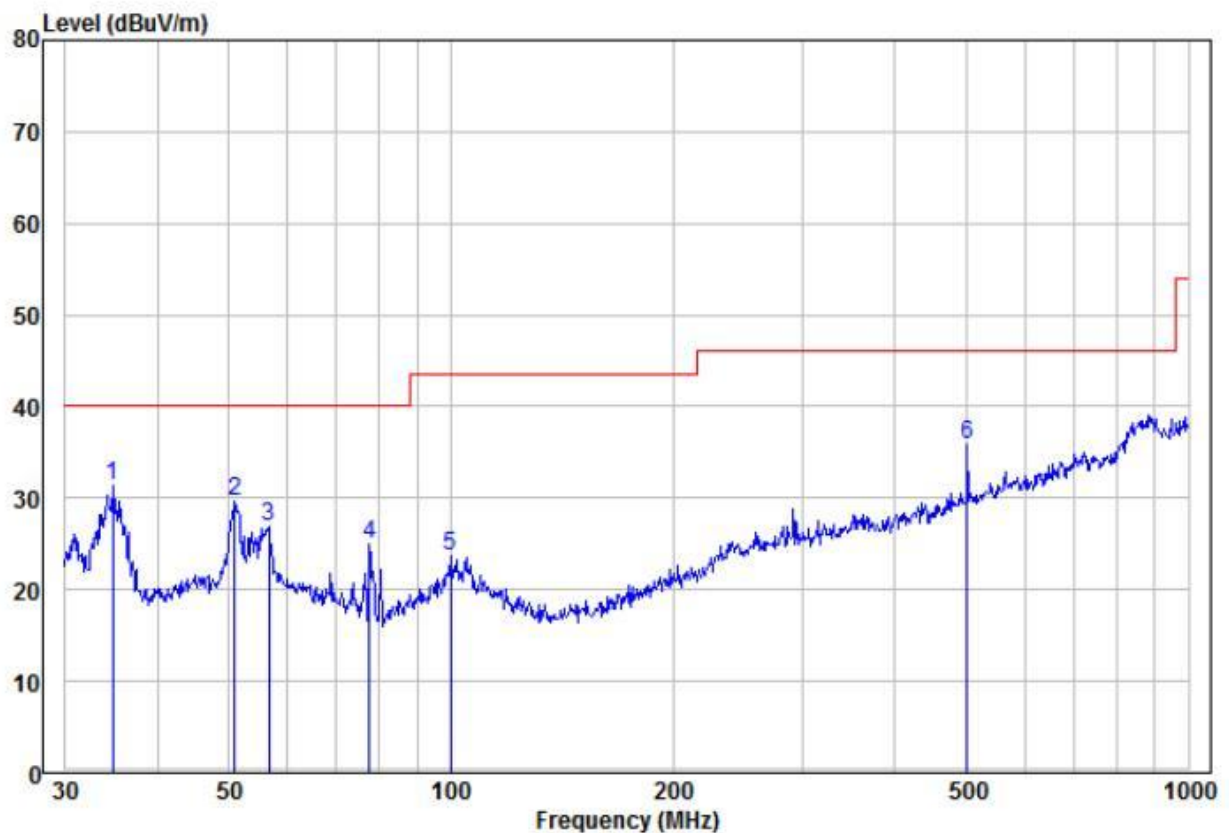

		Read		Limit	Over			APos	TPos
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm deg
1	pp	34.76	22.52	8.89	31.41	40.00	-8.59 Peak	VERTICAL	100 21
2		50.94	16.93	12.62	29.55	40.00	-10.45 Peak	VERTICAL	100 91
3		56.59	14.39	12.59	26.98	40.00	-13.02 Peak	VERTICAL	100 99
4		77.59	16.70	8.20	24.90	40.00	-15.10 Peak	VERTICAL	100 208
5		99.88	11.75	11.86	23.61	43.50	-19.89 Peak	VERTICAL	100 311
6		501.18	14.87	20.94	35.81	46.00	-10.19 Peak	VERTICAL	100 333

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Horizontal

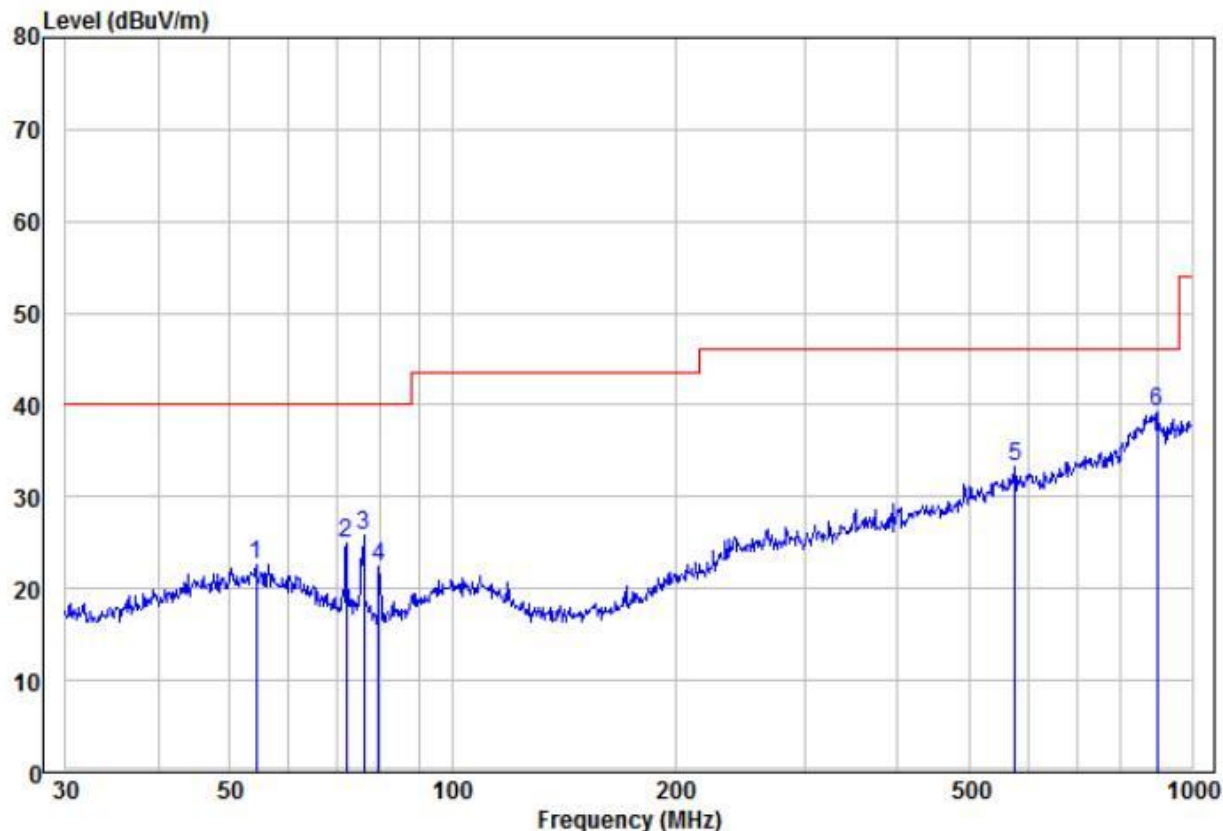

	Read			Limit	Over			APos	TPos
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	54.26	9.93	12.79	22.72	40.00	-17.28 Peak	HORIZONTAL	100	9
2	71.83	15.60	9.27	24.87	40.00	-15.13 Peak	HORIZONTAL	100	81
3	75.98	17.26	8.49	25.75	40.00	-14.25 Peak	HORIZONTAL	100	102
4	79.52	14.50	7.83	22.33	40.00	-17.67 Peak	HORIZONTAL	100	177
5	576.64	11.16	22.08	33.24	46.00	-12.76 Peak	HORIZONTAL	100	298
6 pp	897.00	10.18	29.05	39.23	46.00	-6.77 Peak	HORIZONTAL	100	306

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.9.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.84	-4.26	49.58	74	-24.42	peak	H	1.5	107
4824.000	36.40	-4.26	32.14	54	-21.86	AVG	H	1.5	203
7236.000	52.21	1.18	53.39	74	-20.61	peak	H	1.5	193
7236.000	37.55	1.18	38.73	54	-15.27	AVG	H	1.5	207
4824.000	55.03	-4.26	50.77	74	-23.23	peak	V	1.5	50
4824.000	38.29	-4.26	34.03	54	-19.97	AVG	V	1.5	153
7236.000	50.67	1.18	51.85	74	-22.15	peak	V	1.5	215
7236.000	35.05	1.18	36.23	54	-17.77	AVG	V	1.5	133

Test mode:		802.11b(1Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.57	-4.12	47.45	74	-26.55	peak	H	1.5	135
4874.000	36.59	-4.12	32.47	54	-21.53	AVG	H	1.5	277
7311.000	48.26	1.46	49.72	74	-24.28	peak	H	1.5	240
7311.000	35.34	1.46	36.80	54	-17.20	AVG	H	1.5	212
4874.000	52.78	-4.12	48.66	74	-25.34	peak	V	1.5	69
4874.000	36.76	-4.12	32.64	54	-21.36	AVG	V	1.5	167
7311.000	49.38	1.46	50.84	74	-23.16	peak	V	1.5	197
7311.000	35.68	1.46	37.14	54	-16.86	AVG	V	1.5	40

Test mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)			(m)	(Degree)
4924.000	51.83	-4.03	47.80	74	-26.20	peak	H	1.5	55
4924.000	38.10	-4.03	34.07	54	-19.93	AVG	H	1.5	228
7386.000	50.81	1.66	52.47	74	-21.53	peak	H	1.5	26
7386.000	37.55	1.66	39.21	54	-14.79	AVG	H	1.5	301
4924.000	53.75	-4.03	49.72	74	-24.28	peak	V	1.5	204
4924.000	38.70	-4.03	34.67	54	-19.33	AVG	V	1.5	227
7386.000	50.83	1.66	52.49	74	-21.51	peak	V	1.5	27
7386.000	37.36	1.66	39.02	54	-14.98	AVG	V	1.5	335

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.82	-4.26	49.56	74	-24.44	peak	H	1.5	20
4824.000	37.01	-4.26	32.75	54	-21.25	AVG	H	1.5	208
7236.000	51.02	1.18	52.20	74	-21.80	peak	H	1.5	86
7236.000	38.88	1.18	40.06	54	-13.94	AVG	H	1.5	336
4824.000	55.24	-4.26	50.98	74	-23.02	peak	V	1.5	157
4824.000	39.50	-4.26	35.24	54	-18.76	AVG	V	1.5	180
7236.000	50.70	1.18	51.88	74	-22.12	peak	V	1.5	214
7236.000	35.95	1.18	37.13	54	-16.87	AVG	V	1.5	324

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.64	-4.12	47.52	74	-26.48	peak	H	1.5	234
4874.000	36.69	-4.12	32.57	54	-21.43	AVG	H	1.5	206
7311.000	48.43	1.46	49.89	74	-24.11	peak	H	1.5	1
7311.000	35.95	1.46	37.41	54	-16.59	AVG	H	1.5	41
4874.000	53.38	-4.12	49.26	74	-24.74	peak	V	1.5	69
4874.000	36.98	-4.12	32.86	54	-21.14	AVG	V	1.5	304
7311.000	48.69	1.46	50.15	74	-23.85	peak	V	1.5	28
7311.000	35.90	1.46	37.36	54	-16.64	AVG	V	1.5	270

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)				
4924.000	51.65	-4.03	47.62	74	-26.38	peak	H	1.5	157
4924.000	37.83	-4.03	33.80	54	-20.20	AVG	H	1.5	150
7386.000	50.40	1.66	52.06	74	-21.94	peak	H	1.5	350
7386.000	37.62	1.66	39.28	54	-14.72	AVG	H	1.5	149
4924.000	53.55	-4.03	49.52	74	-24.48	peak	V	1.5	315
4924.000	37.03	-4.03	33.00	54	-21.00	AVG	V	1.5	294
7386.000	49.70	1.66	51.36	74	-22.64	peak	V	1.5	44
7386.000	36.49	1.66	38.15	54	-15.85	AVG	V	1.5	317

Remark:

- 1) The 6Mbps of rate of 802.11g is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	54.04	-4.26	49.78	74	-24.22	peak	H	1.5	96
4824.000	37.66	-4.26	33.40	54	-20.60	AVG	H	1.5	26
7236.000	50.48	1.18	51.66	74	-22.34	peak	H	1.5	164
7236.000	38.86	1.18	40.04	54	-13.96	AVG	H	1.5	153
4824.000	56.21	-4.26	51.95	74	-22.05	peak	V	1.5	331
4824.000	39.96	-4.26	35.70	54	-18.30	AVG	V	1.5	115
7236.000	50.79	1.18	51.97	74	-22.03	peak	V	1.5	99
7236.000	35.73	1.18	36.91	54	-17.09	AVG	V	1.5	204

Test mode:		802.11n20(6.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.02	-4.12	47.90	74	-26.10	peak	H	1.5	112
4874.000	37.77	-4.12	33.65	54	-20.35	AVG	H	1.5	154
7311.000	49.28	1.46	50.74	74	-23.26	peak	H	1.5	11
7311.000	35.03	1.46	36.49	54	-17.51	AVG	H	1.5	239
4874.000	52.25	-4.12	48.13	74	-25.87	peak	V	1.5	232
4874.000	36.36	-4.12	32.24	54	-21.76	AVG	V	1.5	181
7311.000	48.24	1.46	49.70	74	-24.30	peak	V	1.5	214
7311.000	35.41	1.46	36.87	54	-17.13	AVG	V	1.5	227

Test mode:		802.11n20(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	53.05	-4.03	49.02	74	-24.98	peak	H	1.5	7
4924.000	37.35	-4.03	33.32	54	-20.68	AVG	H	1.5	232
7386.000	50.89	1.66	52.55	74	-21.45	peak	H	1.5	259
7386.000	36.02	1.66	37.68	54	-16.32	AVG	H	1.5	287
4924.000	54.43	-4.03	50.40	74	-23.60	peak	V	1.5	293
4924.000	38.85	-4.03	34.82	54	-19.18	AVG	V	1.5	293
7386.000	49.27	1.66	50.93	74	-23.07	peak	V	1.5	20
7386.000	36.96	1.66	38.62	54	-15.38	AVG	V	1.5	305

Remark:

- 1) The MCS0 of rate of 802.11n20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n40(13.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4844.000	52.54	-4.24	48.30	74	-25.70	peak	H	1.5	337
4844.000	36.12	-4.24	31.88	54	-22.12	AVG	H	1.5	24
7266.000	50.63	1.2	51.83	74	-22.17	peak	H	1.5	219
7266.000	38.26	1.2	39.46	54	-14.54	AVG	H	1.5	278
4844.000	55.17	-4.24	50.93	74	-23.07	peak	V	1.5	126
4844.000	39.52	-4.24	35.28	54	-18.72	AVG	V	1.5	291
7266.000	50.97	1.2	52.17	74	-21.83	peak	V	1.5	1
7266.000	36.03	1.2	37.23	54	-16.77	AVG	V	1.5	130

Test mode:		802.11n40(13.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.16	-4.12	48.04	74	-25.96	peak	H	1.5	269
4874.000	36.87	-4.12	32.75	54	-21.25	AVG	H	1.5	89
7311.000	49.83	1.46	51.29	74	-22.71	peak	H	1.5	117
7311.000	36.52	1.46	37.98	54	-16.02	AVG	H	1.5	346
4874.000	52.37	-4.12	48.25	74	-25.75	peak	V	1.5	353
4874.000	36.37	-4.12	32.25	54	-21.75	AVG	V	1.5	147
7311.000	49.47	1.46	50.93	74	-23.07	peak	V	1.5	265
7311.000	35.59	1.46	37.05	54	-16.95	AVG	V	1.5	341

Test mode:		802.11n40(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4904.000	53.09	-4.05	49.04	74	-24.96	peak	H	1.5	158
4904.000	37.17	-4.05	33.12	54	-20.88	AVG	H	1.5	24
7356.000	51.19	1.64	52.83	74	-21.17	peak	H	1.5	160
7356.000	38.01	1.64	39.65	54	-14.35	AVG	H	1.5	294
4904.000	54.75	-4.05	50.70	74	-23.30	peak	V	1.5	41
4904.000	38.88	-4.05	34.83	54	-19.17	AVG	V	1.5	347
7356.000	51.69	1.64	53.33	74	-20.67	peak	V	1.5	230
7356.000	36.94	1.64	38.58	54	-15.42	AVG	V	1.5	161

Remark:

- 1) The MCS0 of rate of 802.11n40 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11ax20(8.6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	52.46	-4.26	48.20	74	-25.80	peak	H	1.5	229
4824.000	36.58	-4.26	32.32	54	-21.68	AVG	H	1.5	296
7236.000	51.29	1.18	52.47	74	-21.53	peak	H	1.5	349
7236.000	37.99	1.18	39.17	54	-14.83	AVG	H	1.5	247
4824.000	55.96	-4.26	51.70	74	-22.30	peak	V	1.5	239
4824.000	39.51	-4.26	35.25	54	-18.75	AVG	V	1.5	320
7236.000	51.05	1.18	52.23	74	-21.77	peak	V	1.5	78
7236.000	35.99	1.18	37.17	54	-16.83	AVG	V	1.5	302

Test mode:		802.11ax20(8.6Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.83	-4.12	47.71	74	-26.29	peak	H	1.5	276
4874.000	36.21	-4.12	32.09	54	-21.91	AVG	H	1.5	356
7311.000	48.71	1.46	50.17	74	-23.83	peak	H	1.5	360
7311.000	36.65	1.46	38.11	54	-15.89	AVG	H	1.5	350
4874.000	53.91	-4.12	49.79	74	-24.21	peak	V	1.5	110
4874.000	36.16	-4.12	32.04	54	-21.96	AVG	V	1.5	337
7311.000	48.54	1.46	50.00	74	-24.00	peak	V	1.5	321
7311.000	36.29	1.46	37.75	54	-16.25	AVG	V	1.5	81

Test mode:		802.11ax20(8.6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	52.23	-4.03	48.20	74	-25.80	peak	H	1.5	66
4924.000	37.88	-4.03	33.85	54	-20.15	AVG	H	1.5	207
7386.000	49.70	1.66	51.36	74	-22.64	peak	H	1.5	56
7386.000	37.69	1.66	39.35	54	-14.65	AVG	H	1.5	30
4924.000	54.67	-4.03	50.64	74	-23.36	peak	V	1.5	56
4924.000	37.29	-4.03	33.26	54	-20.74	AVG	V	1.5	68
7386.000	49.32	1.66	50.98	74	-23.02	peak	V	1.5	154
7386.000	37.48	1.66	39.14	54	-14.86	AVG	V	1.5	343

Remark:

- 1) The MCS0 of rate of 802.11ax20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11ax40(17.2Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4844.000	53.84	-4.24	49.60	74	-24.40	peak	H	1.5	170
4844.000	37.70	-4.24	33.46	54	-20.54	AVG	H	1.5	210
7266.000	51.66	1.2	52.86	74	-21.14	peak	H	1.5	302
7266.000	38.39	1.2	39.59	54	-14.41	AVG	H	1.5	271
4844.000	54.68	-4.24	50.44	74	-23.56	peak	V	1.5	292
4844.000	38.05	-4.24	33.81	54	-20.19	AVG	V	1.5	73
7266.000	50.76	1.2	51.96	74	-22.04	peak	V	1.5	274
7266.000	35.34	1.2	36.54	54	-17.46	AVG	V	1.5	126

Test mode:		802.11ax40(17.2Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.24	-4.12	48.12	74	-25.88	peak	H	1.5	0
4874.000	36.20	-4.12	32.08	54	-21.92	AVG	H	1.5	174
7311.000	49.86	1.46	51.32	74	-22.68	peak	H	1.5	248
7311.000	35.86	1.46	37.32	54	-16.68	AVG	H	1.5	86
4874.000	52.27	-4.12	48.15	74	-25.85	peak	V	1.5	59
4874.000	37.13	-4.12	33.01	54	-20.99	AVG	V	1.5	104
7311.000	48.64	1.46	50.10	74	-23.90	peak	V	1.5	356
7311.000	36.55	1.46	38.01	54	-15.99	AVG	V	1.5	339

Test mode:		802.11ax40(1.2Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4904.000	52.47	-4.05	48.42	74	-25.58	peak	H	1.5	23
4904.000	37.40	-4.05	33.35	54	-20.65	AVG	H	1.5	230
7356.000	51.30	1.64	52.94	74	-21.06	peak	H	1.5	113
7356.000	38.08	1.64	39.72	54	-14.28	AVG	H	1.5	72
4904.000	54.99	-4.05	50.94	74	-23.06	peak	V	1.5	333
4904.000	39.13	-4.05	35.08	54	-18.92	AVG	V	1.5	117
7356.000	50.63	1.64	52.27	74	-21.73	peak	V	1.5	134
7356.000	36.78	1.64	38.42	54	-15.58	AVG	V	1.5	261

Remark:

- 1) The MCS0 of rate of 802.11ax40 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2020		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

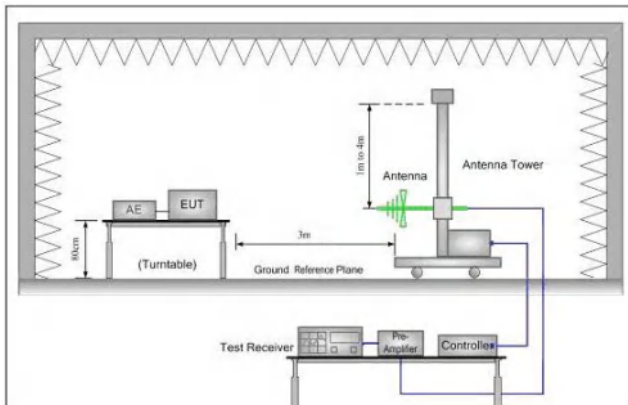


Figure 1. 30MHz to 1GHz

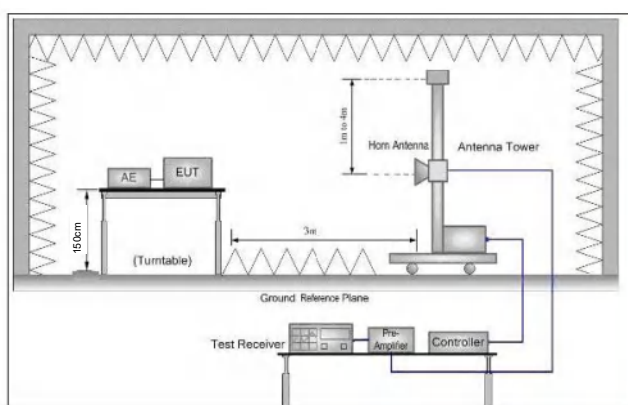


Figure 2. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40), 8.6Mbps of rate is the worst case of 802.11ax(HE20); 17.2Mbps of rate is the worst case of 802.11ax(HE40). Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel. Only the worst case is recorded in the report.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	58.73	-9.2	49.53	74	-24.47	peak	H	1.5	101
2390.000	44.76	-9.2	35.56	54	-18.44	AVG	H	1.5	337
2400.000	59.94	-9.39	50.55	74	-23.45	peak	H	1.5	303
2400.000	46.22	-9.39	36.83	54	-17.17	AVG	H	1.5	198
2390.000	59.23	-9.2	50.03	74	-23.97	peak	V	1.5	218
2390.000	44.40	-9.2	35.20	54	-18.80	AVG	V	1.5	71
2400.000	59.28	-9.39	49.89	74	-24.11	peak	V	1.5	53
2400.000	46.81	-9.39	37.42	54	-16.58	AVG	V	1.5	158

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.90	-9.29	48.61	74	-25.39	peak	H	1.5	200
2483.500	43.68	-9.29	34.39	54	-19.61	AVG	H	1.5	86
2483.500	58.19	-9.29	48.90	74	-25.10	peak	V	1.5	175
2483.500	45.79	-9.29	36.50	54	-17.50	AVG	V	1.5	250

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.37	-9.2	49.17	74	-24.83	peak	H	1.5	141
2390.000	44.74	-9.2	35.54	54	-18.46	AVG	H	1.5	124
2400.000	60.00	-9.39	50.61	74	-23.39	peak	H	1.5	100
2400.000	46.14	-9.39	36.75	54	-17.25	AVG	H	1.5	84
2390.000	58.58	-9.2	49.38	74	-24.62	peak	V	1.5	47
2390.000	44.24	-9.2	35.04	54	-18.96	AVG	V	1.5	341
2400.000	59.29	-9.39	49.90	74	-24.10	peak	V	1.5	189
2400.000	46.44	-9.39	37.05	54	-16.95	AVG	V	1.5	201

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	58.37	-9.29	49.08	74	-24.92	peak	H	1.5	343
2483.500	44.45	-9.29	35.16	54	-18.84	AVG	H	1.5	144
2483.500	57.64	-9.29	48.35	74	-25.65	peak	V	1.5	139
2483.500	46.02	-9.29	36.73	54	-17.27	AVG	V	1.5	263

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.88	-9.2	49.68	74	-24.32	peak	H	1.5	280
2390.000	44.97	-9.2	35.77	54	-18.23	AVG	H	1.5	80
2400.000	59.93	-9.39	50.54	74	-23.46	peak	H	1.5	281
2400.000	46.32	-9.39	36.93	54	-17.07	AVG	H	1.5	66
2390.000	58.47	-9.2	49.27	74	-24.73	peak	V	1.5	241
2390.000	44.62	-9.2	35.42	54	-18.58	AVG	V	1.5	61
2400.000	59.72	-9.39	50.33	74	-23.67	peak	V	1.5	270
2400.000	46.43	-9.39	37.04	54	-16.96	AVG	V	1.5	49

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	57.60	-9.29	48.31	74	-25.69	peak	H	1.5	147
2483.500	44.34	-9.29	35.05	54	-18.95	AVG	H	1.5	255
2483.500	57.43	-9.29	48.14	74	-25.86	peak	V	1.5	237
2483.500	45.88	-9.29	36.59	54	-17.41	AVG	V	1.5	157

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.80	-9.2	49.60	74	-24.40	peak	H	1.5	283
2390.000	44.59	-9.2	35.39	54	-18.61	AVG	H	1.5	56
2400.000	59.39	-9.39	50.00	74	-24.00	peak	H	1.5	211
2400.000	46.93	-9.39	37.54	54	-16.46	AVG	H	1.5	279
2390.000	58.73	-9.2	49.53	74	-24.47	peak	V	1.5	2
2390.000	44.83	-9.2	35.63	54	-18.37	AVG	V	1.5	80
2400.000	59.76	-9.39	50.37	74	-23.63	peak	V	1.5	47
2400.000	46.04	-9.39	36.65	54	-17.35	AVG	V	1.5	20

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	58.28	-9.29	48.99	74	-25.01	peak	H	1.5	135
2483.500	43.58	-9.29	34.29	54	-19.71	AVG	H	1.5	312
2483.500	57.60	-9.29	48.31	74	-25.69	peak	V	1.5	135
2483.500	46.01	-9.29	36.72	54	-17.28	AVG	V	1.5	240

Worse case mode:		802.11ax(HE20)(8.6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.63	-9.2	49.43	74	-24.57	peak	H	1.5	281
2390.000	44.50	-9.2	35.30	54	-18.70	AVG	H	1.5	328
2400.000	59.52	-9.39	50.13	74	-23.87	peak	H	1.5	346
2400.000	46.46	-9.39	37.07	54	-16.93	AVG	H	1.5	202
2390.000	58.67	-9.2	49.47	74	-24.53	peak	V	1.5	306
2390.000	44.31	-9.2	35.11	54	-18.89	AVG	V	1.5	348
2400.000	59.68	-9.39	50.29	74	-23.71	peak	V	1.5	351
2400.000	45.99	-9.39	36.60	54	-17.40	AVG	V	1.5	317

Worse case mode:		802.11ax(HE20)(8.6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	58.42	-9.29	49.13	74	-24.87	peak	H	1.5	59
2483.500	44.12	-9.29	34.83	54	-19.17	AVG	H	1.5	147
2483.500	57.82	-9.29	48.53	74	-25.47	peak	V	1.5	16
2483.500	46.44	-9.29	37.15	54	-16.85	AVG	V	1.5	241

Worse case mode:		802.11ax(HE40)(17.2Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.59	-9.2	49.39	74	-24.61	peak	H	1.5	211
2390.000	44.29	-9.2	35.09	54	-18.91	AVG	H	1.5	241
2400.000	60.00	-9.39	50.61	74	-23.39	peak	H	1.5	8
2400.000	46.73	-9.39	37.34	54	-16.66	AVG	H	1.5	182
2390.000	58.97	-9.2	49.77	74	-24.23	peak	V	1.5	360
2390.000	44.34	-9.2	35.14	54	-18.86	AVG	V	1.5	99
2400.000	59.96	-9.39	50.57	74	-23.43	peak	V	1.5	314
2400.000	46.60	-9.39	37.21	54	-16.79	AVG	V	1.5	180

Worse case mode:		802.11ax(HE40)(17.2Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	58.26	-9.29	48.97	74	-25.03	peak	H	1.5	334
2483.500	44.33	-9.29	35.04	54	-18.96	AVG	H	1.5	111
2483.500	58.40	-9.29	49.11	74	-24.89	peak	V	1.5	106
2483.500	46.20	-9.29	36.91	54	-17.09	AVG	V	1.5	289

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9kHz~30MHz:

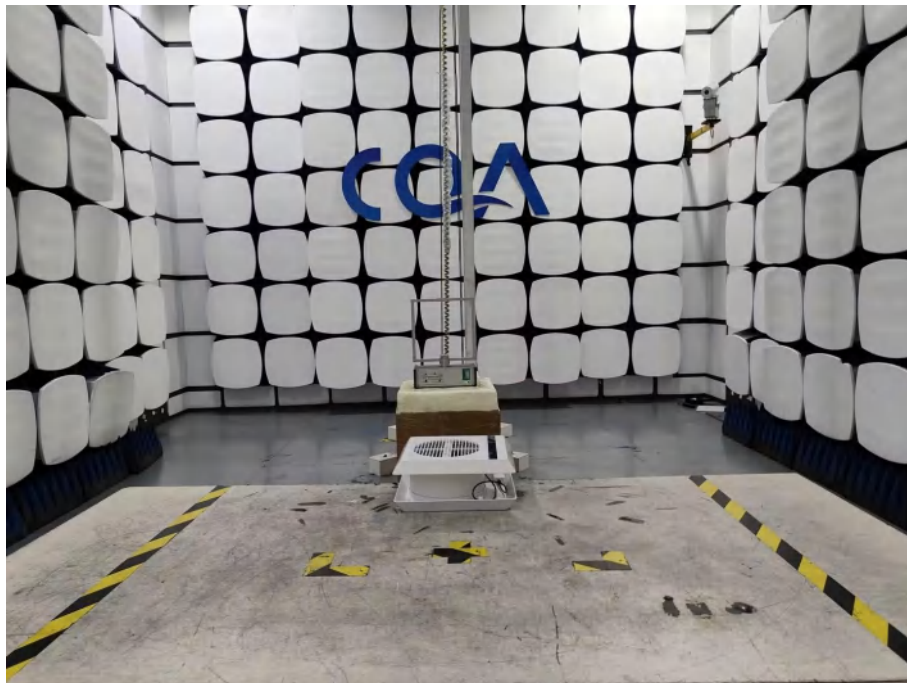

30MHz~1GHz:

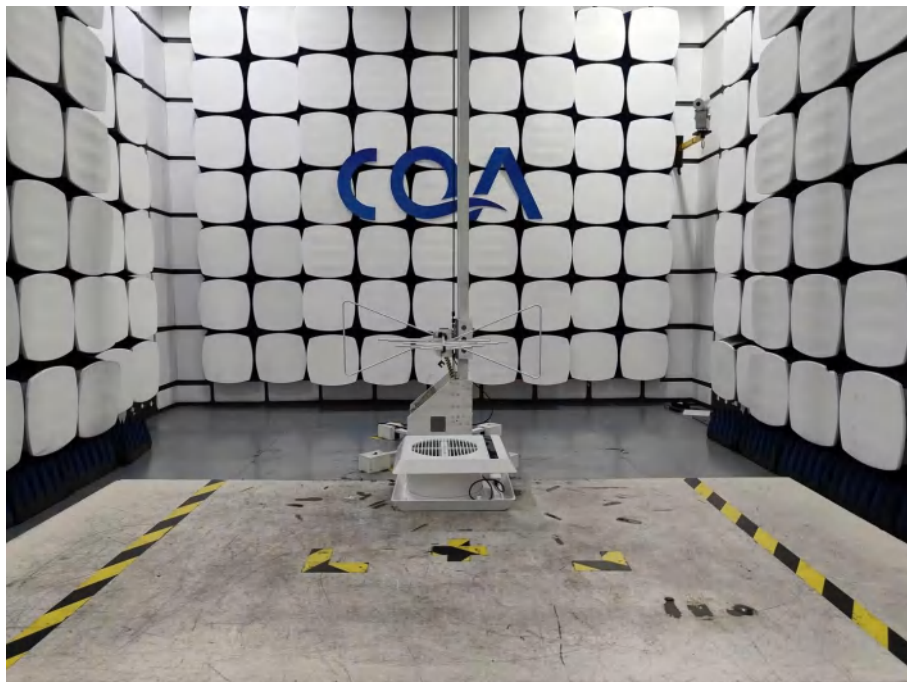

Above 1GHz:



6.2 Conducted Emission



6.3 RF Conducted measurement



7 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20260300645E-01.

*** END OF REPORT ***