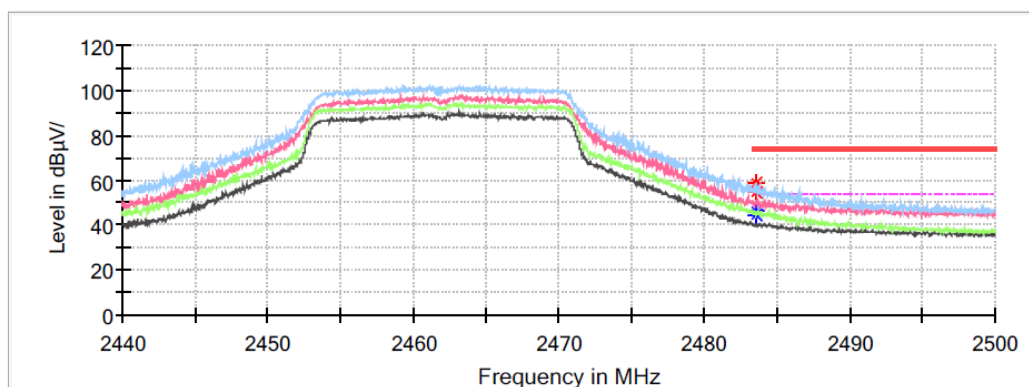


High Channel**Common Information**

Project No.: RKSA260311002
EUT Model: P5-PRO
Test Mode: 2.4G WIFI 802.11n20 mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8℃
Humidity: 51%
Atmospheric Pressure: 101.7kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/31

Full Spectrum


**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.560000	---	46.33	54.00	7.67	H	0.5
2483.560000	54.91	---	74.00	19.09	H	0.5
2483.584000	---	44.52	54.00	9.48	H	0.5
2483.584000	58.80	---	74.00	15.20	H	0.5

802.11n-HT40 Mode:**Low Channel****Common Information**

Project No.: RKSA260311002
EUT Model: P5-PRO
Test Mode: 2.4G WIFI 802.11n40 mode Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8°C
Humidity: 51%
Atmospheric Pressure: 101.7kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/31

Full Spectrum

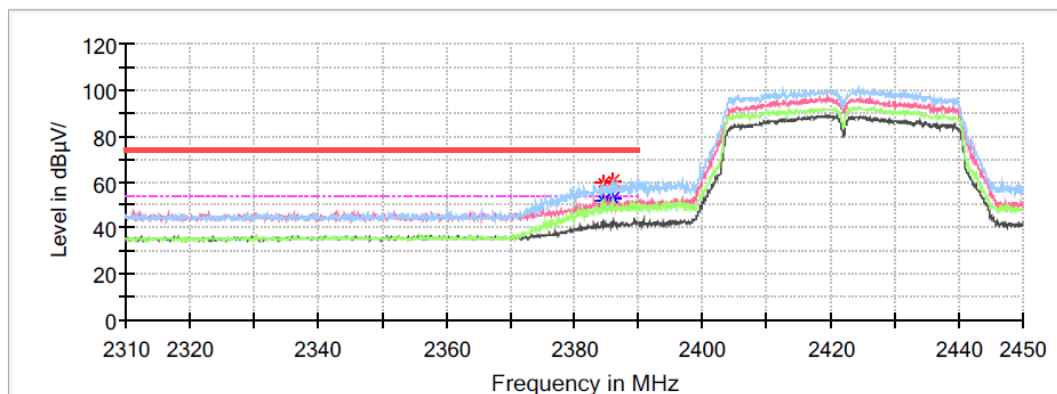**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2384.424000	59.85	---	74.00	14.15	H	0.4
2384.424000	---	52.09	54.00	1.91	H	0.4
2385.936000	---	52.56	54.00	1.44	H	0.4
2385.936000	60.25	---	74.00	13.75	H	0.4

High Channel

Common Information

Project No.: RKSA260311002
EUT Model: P5-PRO
Test Mode: 2.4G WIFI 802.11n40 mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8℃
Humidity: 51%
Atmospheric Pressure: 101.7kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/31


Full Spectrum

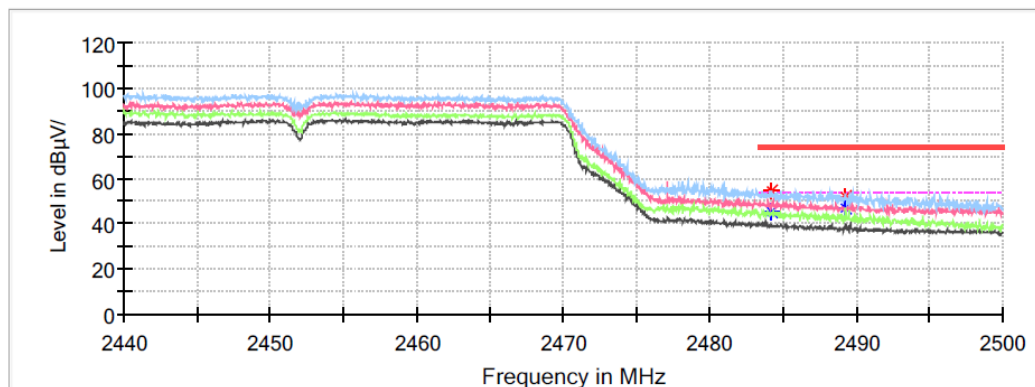

Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2484.232000	54.72	---	74.00	19.28	H	0.5
2484.232000	---	44.91	54.00	9.09	H	0.5
2489.296000	52.20	---	74.00	21.80	H	0.5
2489.296000	---	47.02	54.00	6.98	H	0.5

18GHz-25GHz: Transmitting in maximum output power mode and 802.11n40 mode high channel

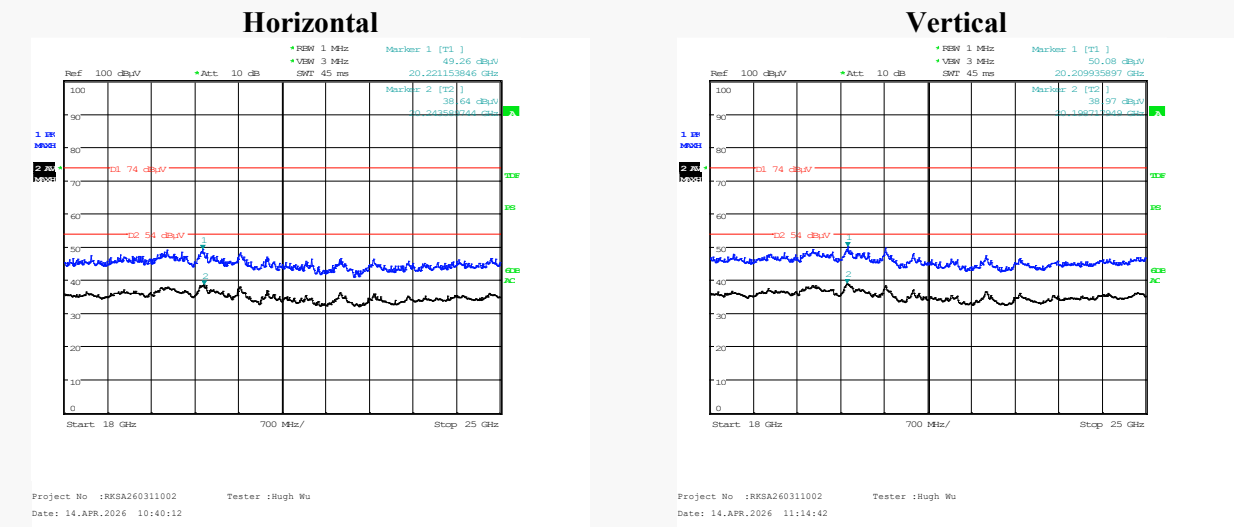


Frequency (GHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
20.20	---	38.97	54	15.03	V	12.46
20.21	50.08	---	74	23.92	V	12.47
20.24	---	38.64	54	15.36	H	12.5
20.22	49.26	---	74	24.74	H	12.48

Note: The test distance is 3m. The limit is 74dB μ V/m (Peak) and 54dB μ V/m (Average).

For BLE Mode:**9 kHz-30MHz:** Transmitting in maximum output power mode BLE (1 Mbps) high channel**Parallel(worst case)****9kHz-150kHz****Common Information**

Project No: RKSA260311002
EUT Model: P5-PRO
Test Mode: Transmitting in BLE 1M mode high channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment: ESCI, 1313-1A, 310N
Receiver Setting: RBW: 200 Hz, VBW: 1 kHz, Sweep Time: Auto
Temperature: 21.3°C
Humidity: 52%
Barometric Pressure: 101.8kPa
Test Engineer: Scarf Yang
Check by: Jason Lu
Test Date: 2026/4/28

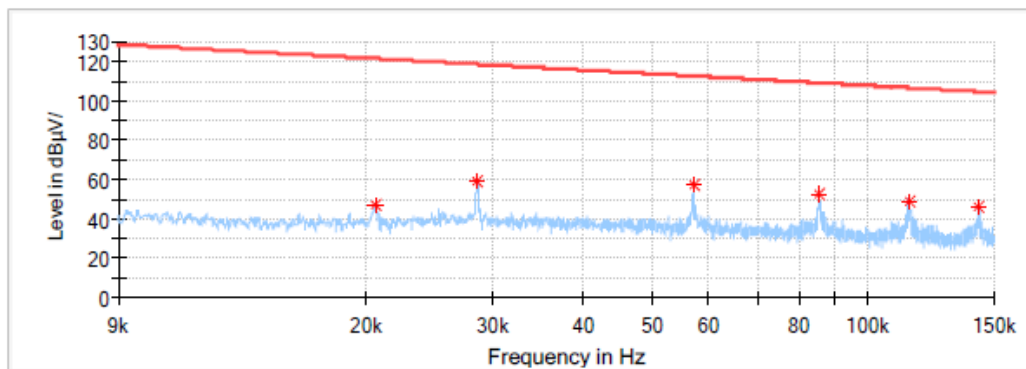
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.020509	46.89	121.36	74.47	Parallel	-0.1
0.028493	58.83	118.51	59.68	Parallel	0.0
0.057099	57.03	112.47	55.44	Parallel	-4.1
0.085475	52.67	108.96	56.29	Parallel	-7.2
0.113939	48.91	106.47	57.56	Parallel	-9.1
0.142633	45.92	104.52	58.60	Parallel	-10.3

150kHz-30MHz

Common Information

Project No: RKSA260311002
EUT Model: P5-PRO
Test Mode: Transmitting in BLE 1M mode high channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment: ESCI, 1313-1A, 310N
Receiver Setting: RBW: 9k Hz, VBW: 30 kHz, Sweep Time: Auto
Temperature: 21.3°C
Humidity: 52%
Barometric Pressure: 101.8kPa
Test Engineer: Scarf Yang
Check by: Jason Lu
Test Date: 2026/4/28

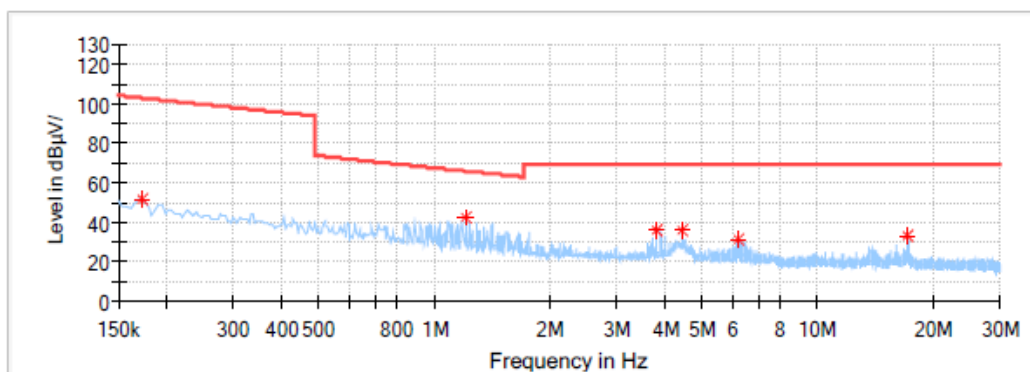


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.172388	51.55	102.82	51.27	Parallel	-11.6
1.209675	42.29	65.78	23.49	Parallel	-27.8
3.810356	35.60	69.54	33.94	Parallel	-31.2
4.433475	36.06	69.54	33.48	Parallel	-31.3
6.213281	31.54	69.54	38.00	Parallel	-31.6
17.268975	33.01	69.54	36.53	Parallel	-32.6

BLE (1 Mbps) (Transmitting in maximum output power BLE (1 Mbps) high channel)
30MHz-1GHz**High Channel: 2480MHz****Common Information**

Project No: RKSA260311002
EUT Model: P5-PRO
Test Mode: Transmitting in BLE 1M mode high channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment: ESCI, JB3, 310N
Receiver Setting: RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature: 16.7°C
Humidity: 43%
Barometric Pressure: 103.3kPa
Test Engineer: Scarf Yang
Check by: Jason Lu
Test Date: 2026/3/14

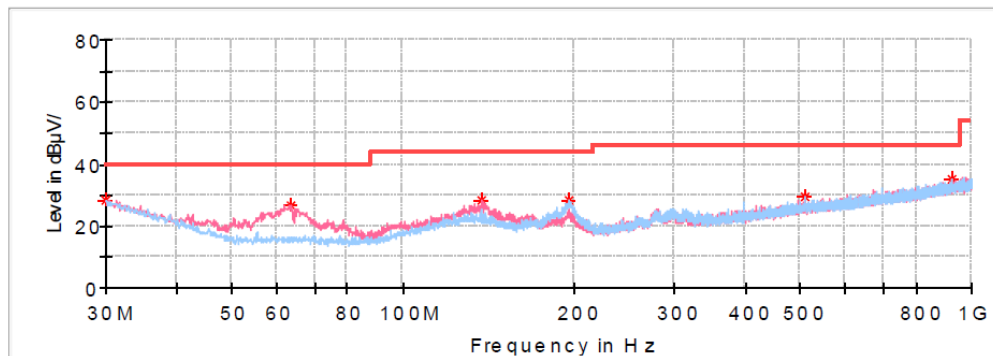**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
30.000000	28.52	40.00	11.48	V	-4.7
63.586250	26.69	40.00	13.31	V	-16.9
137.912500	28.26	43.50	15.24	V	-11.2
195.870000	28.28	43.50	15.22	H	-12.3
511.605000	29.68	46.00	16.32	H	-5.2
923.976250	35.07	46.00	10.93	H	1.4

**BLE (1 Mbps)
1GHz-18GHz:****Low Channel: 2402MHz****Common Information**

Project No.:	RKSA260311002
EUT Model:	P5-PRO
Test Mode:	Transmitting in BLE-1M Low Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.6°C
Humidity:	54%
Atmospheric Pressure:	101.8kPa
Test Engineer:	Destine Hu
Check by:	Bard Liu
Test Date:	2026/4/28

Fundamental Test with
Band Reject Filter


Full Spectrum

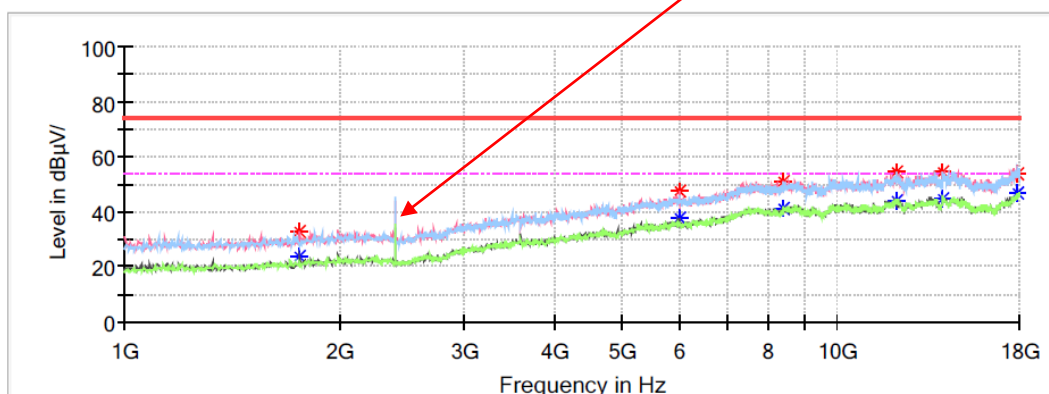**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1761.600000	32.93	---	74.00	41.07	V	-12.8
1761.600000	---	23.73	54.00	30.27	V	-12.8
5998.000000	---	38.10	54.00	15.90	V	-0.7
5998.000000	47.58	---	74.00	26.42	V	-0.7
8391.600000	---	41.13	54.00	12.87	H	4.4
8391.600000	51.01	---	74.00	22.99	H	4.4
12124.800000	---	43.73	54.00	10.27	H	9.0
12124.800000	54.56	---	74.00	19.44	H	9.0
14025.400000	---	45.09	54.00	8.91	V	10.7
14025.400000	54.70	---	74.00	19.30	V	10.7
17921.800000	53.67	---	74.00	20.33	V	13.4
17921.800000	---	46.93	54.00	7.07	V	13.4

Middle Channel: 2440MHz**Common Information**


Project No.: RKSA260311002
EUT Model: P5-PRO
Test Mode: Transmitting in BLE-1M Middle Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.6℃
Humidity: 54%
Atmospheric Pressure: 101.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/4/28

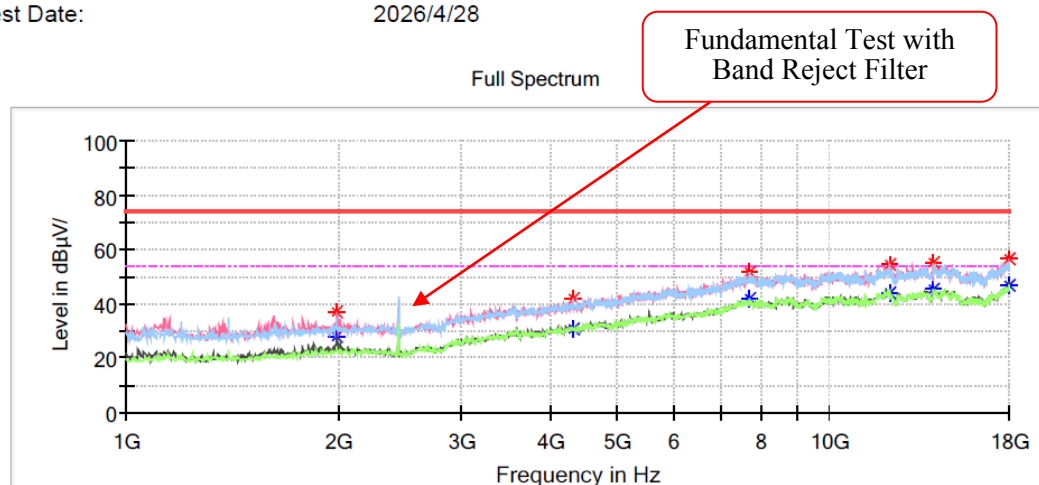**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1992.800000	37.09	---	74.00	36.91	V	-11.7
1992.800000	---	27.81	54.00	26.19	V	-11.7
4321.800000	---	30.72	54.00	23.28	H	-4.6
4321.800000	41.88	---	74.00	32.12	H	-4.6
7681.000000	---	41.79	54.00	12.21	H	3.4
7681.000000	51.88	---	74.00	22.12	H	3.4
12152.000000	---	43.81	54.00	10.19	V	8.9
12152.000000	54.56	---	74.00	19.44	V	8.9
14059.400000	---	45.60	54.00	8.40	V	10.7
14059.400000	55.22	---	74.00	18.78	V	10.7
17996.600000	---	47.15	54.00	6.85	V	13.8
17996.600000	56.48	---	74.00	17.52	V	13.8

High Channel: 2480MHz**Common Information**


Project No.: RKSA260311002
EUT Model: P5-PRO
Test Mode: Transmitting in BLE-1M High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.6°C
Humidity: 54%
Atmospheric Pressure: 101.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/4/28

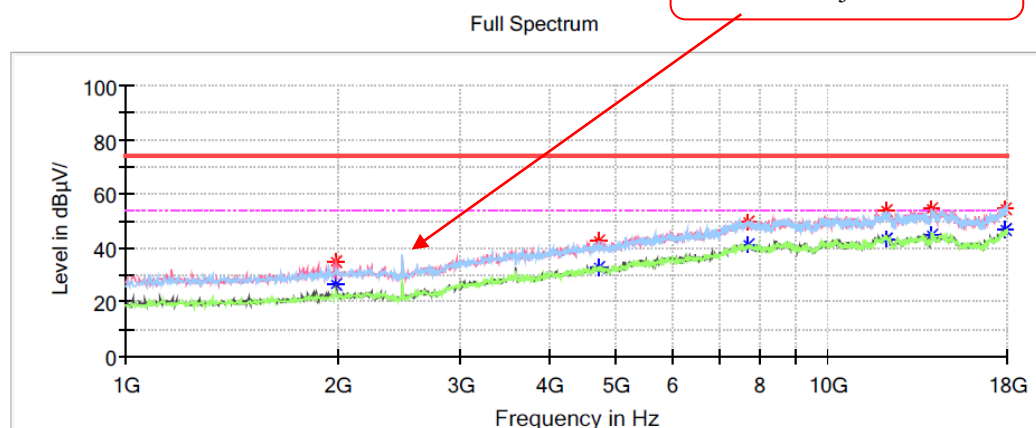**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1996.200000	---	26.30	54.00	27.70	V	-11.7
1996.200000	35.26	---	74.00	38.74	V	-11.7
4706.000000	---	32.97	54.00	21.03	H	-3.7
4706.000000	42.45	---	74.00	31.55	H	-3.7
7674.200000	49.46	---	74.00	24.54	H	3.4
7674.200000	---	41.47	54.00	12.53	H	3.4
12073.800000	---	43.53	54.00	10.47	V	9.0
12073.800000	54.15	---	74.00	19.85	V	9.0
14083.200000	---	44.81	54.00	9.19	H	10.7
14083.200000	54.62	---	74.00	19.38	H	10.7
17904.800000	54.21	---	74.00	19.79	H	13.2
17904.800000	---	46.86	54.00	7.14	H	13.2

Band Edge:**Low Channel****Common Information**

Project No.: RKSA260311002
EUT Model: P5-PRO
Test Mode: Transmitting in BLE-1M Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.3°C
Humidity: 50%
Atmospheric Pressure: 101.6kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/4/15

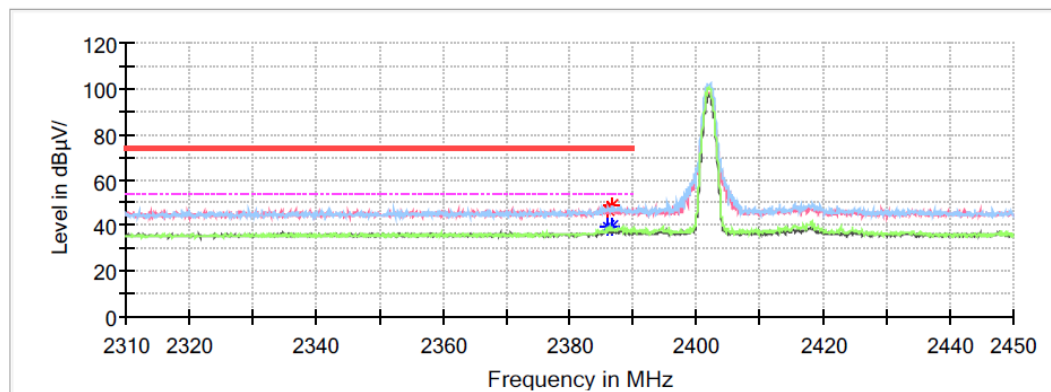
Full Spectrum**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2386.104000	---	39.65	54.00	14.35	H	0.4
2386.104000	47.41	---	74.00	26.59	H	0.4
2386.608000	---	39.07	54.00	14.93	H	0.4
2386.608000	48.34	---	74.00	25.66	H	0.4



High Channel**Common Information**

Project No.: RKSA260311002
EUT Model: P5-PRO
Test Mode: Transmitting in BLE-1M High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.3°C
Humidity: 50%
Atmospheric Pressure: 101.6kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/4/15

Full Spectrum

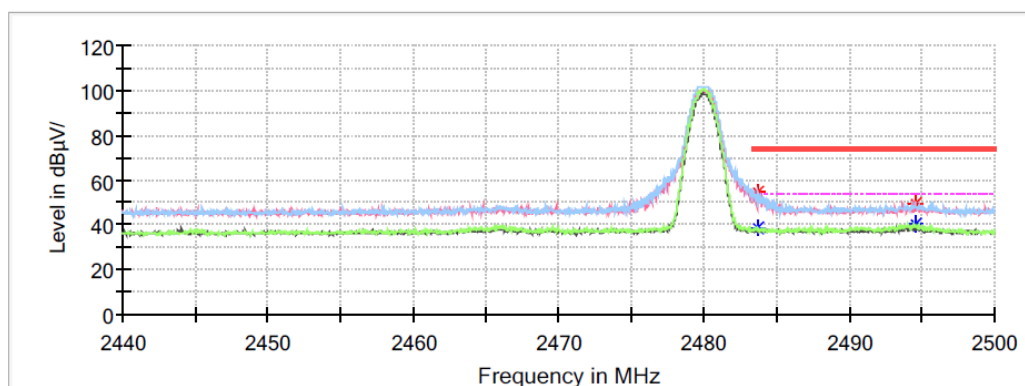**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.752000	54.37	---	74.00	19.63	H	0.7
2483.752000	---	38.28	54.00	15.72	H	0.7
2494.600000	49.58	---	74.00	24.42	H	0.7
2494.600000	---	40.52	54.00	13.48	H	0.7

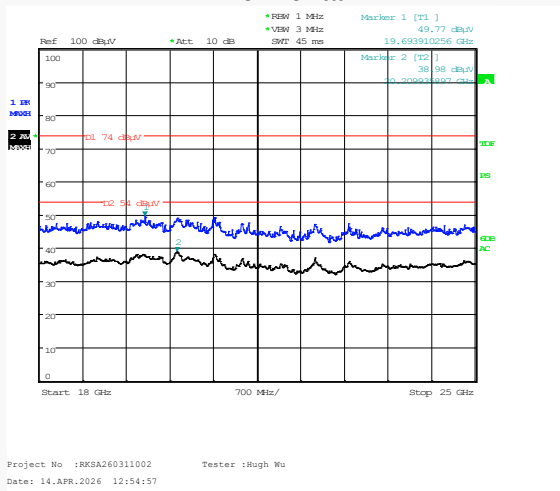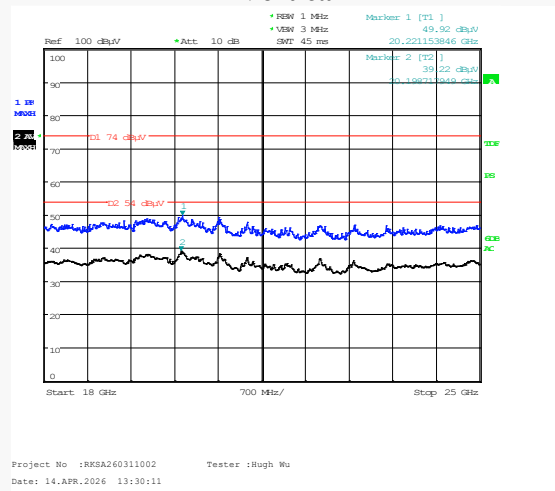18GHz-25GHz: Transmitting in maximum output power mode and BLE 1M high channel**Horizontal****Vertical**

Frequency (GHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
20.20	---	39.22	54	14.78	V	12.46
20.22	49.92	---	74	24.08	V	12.48
20.21	---	38.98	54	15.02	H	12.47
19.69	49.77	---	74	24.23	H	12

Note: The test distance is 3m. The limit is 74dBμV/m(Peak) and 54dBμV/m(Average).

6 dB EMISSION BANDWIDTH**Environmental Conditions & Test Information**

Test Date:	2026-04-08 to 2026-04-16
Temperature:	20.6-21.4℃
Relative Humidity:	49-51 %
ATM Pressure:	101.6-102.0 kPa
Test Engineer:	Neil Zhou

Test Result: Compliant.*EUT operation mode: Transmitting***For Wi-Fi Mode:**


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)	Result
802.11b Mode				
Low	2412	8.729	≥ 0.5	Pass
Middle	2437	8.729	≥ 0.5	Pass
High	2462	8.729	≥ 0.5	Pass
802.11g Mode				
Low	2412	15.736	≥ 0.5	Pass
Middle	2437	16.216	≥ 0.5	Pass
High	2462	16.176	≥ 0.5	Pass
802.11n-HT20 Mode				
Low	2412	16.817	≥ 0.5	Pass
Middle	2437	17.538	≥ 0.5	Pass
High	2462	16.737	≥ 0.5	Pass
802.11n-HT40 Mode				
Low	2422	35.155	≥ 0.5	Pass
Middle	2437	36.517	≥ 0.5	Pass
High	2452	36.837	≥ 0.5	Pass

For BLE Mode:

Mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)	Result
BLE (1 Mbps)	Low	2402	0.677	≥ 0.5	Pass
	Middle	2440	0.673	≥ 0.5	Pass
	High	2480	0.677	≥ 0.5	Pass


For Wi-Fi Mode:

802.11b_2412MHz

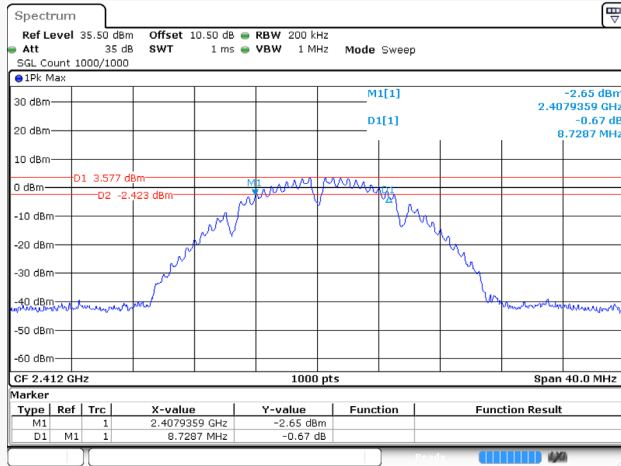


ProjectNo: RKSA260311002 Tester: Neil Zhou
Date: 8 APR 2026 15:34:33

802.11b_2437MHz

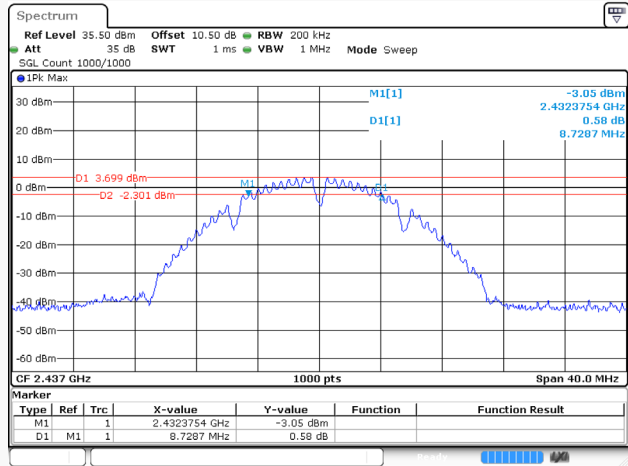


ProjectNo: RKSA260311002 Tester: Neil Zhou
Date: 8 APR 2026 15:39:45

802.11b_2462MHz

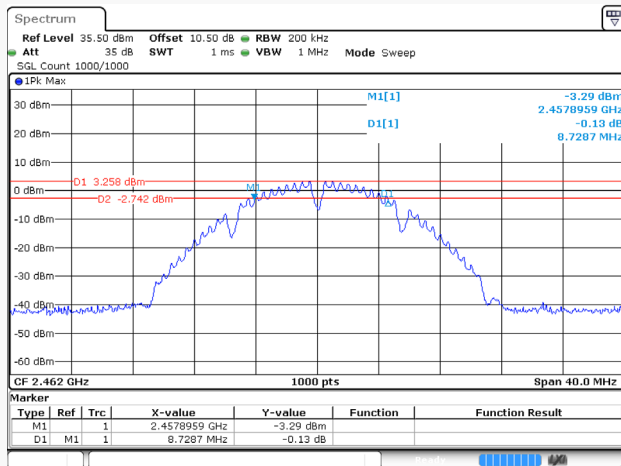


ProjectNo: RKSA260311002 Tester: Neil Zhou
Date: 8 APR 2026 16:44:18

802.11g_2412MHz

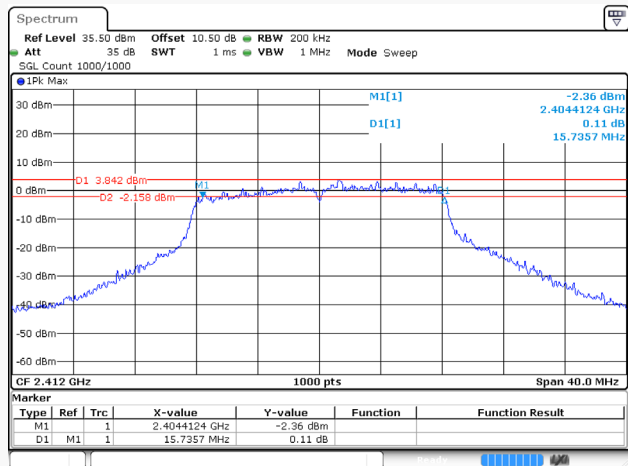


ProjectNo: RKSA260311002 Tester: Neil Zhou
Date: 16 APR 2026 16:16:20

802.11g_2437MHz

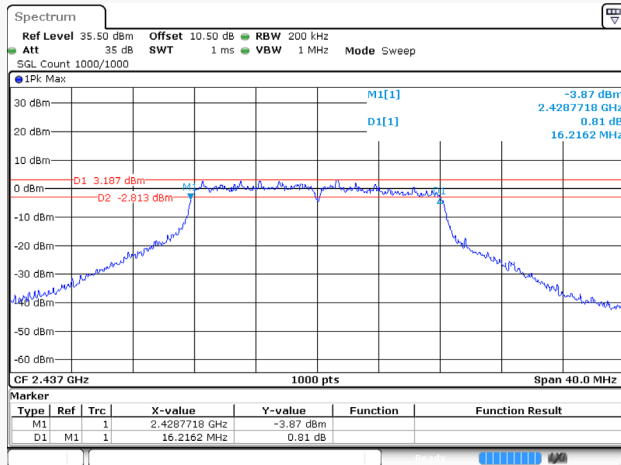


ProjectNo: RKSA260311002 Tester: Neil Zhou
Date: 16 APR 2026 16:20:58

802.11g_2462MHz

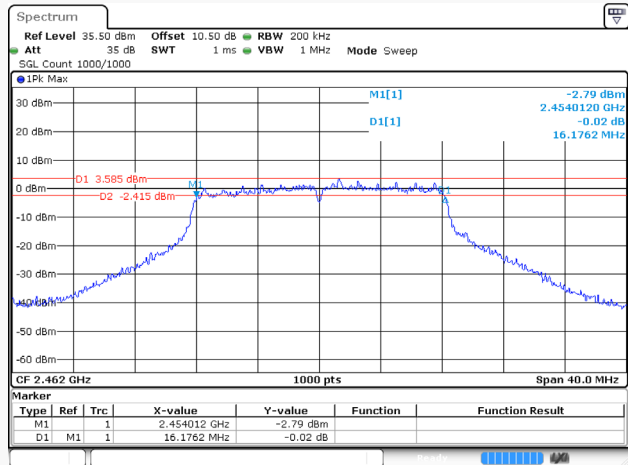


ProjectNo: RKSA260311002 Tester: Neil Zhou
Date: 16 APR 2026 16:25:13

802.11n20_2412MHz

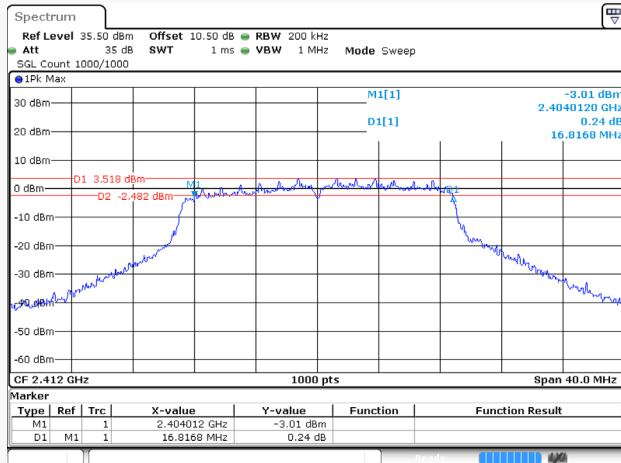


ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:16:21

802.11n20_2437MHz

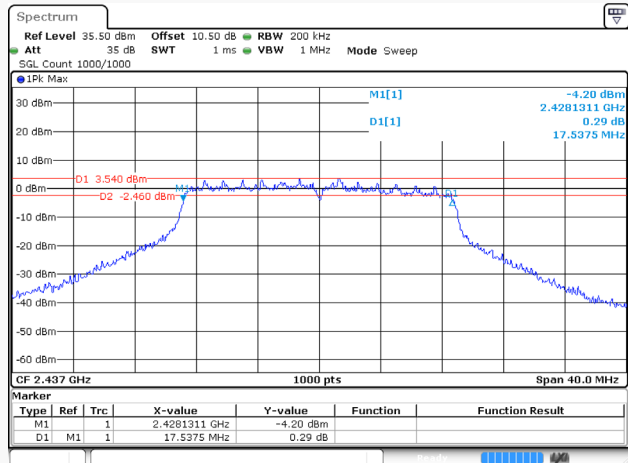


ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:20:37

802.11n20_2462MHz

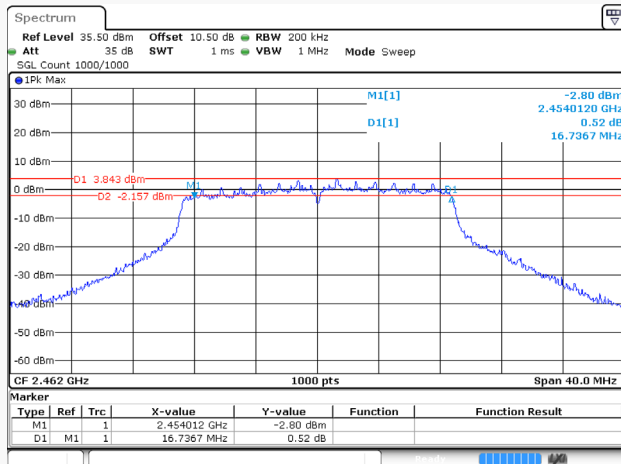


ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:28:10

802.11n40_2422MHz

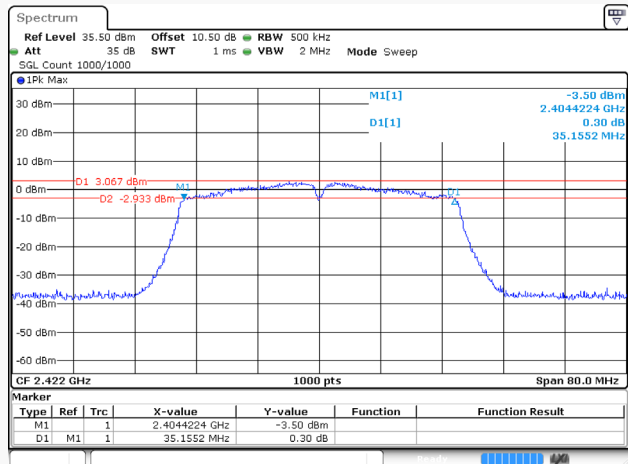


ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:35:19

802.11n40_2437MHz

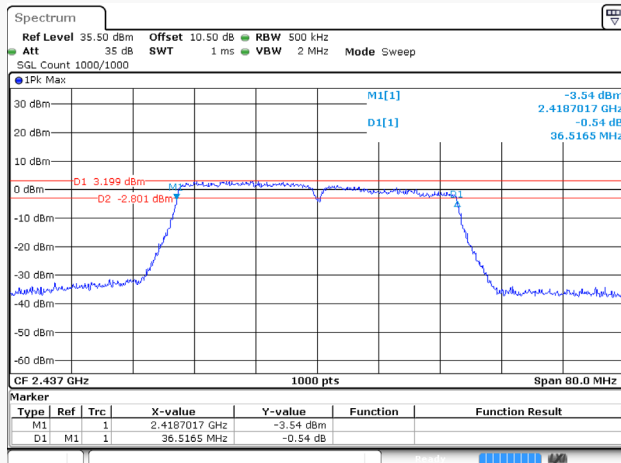

ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:40:25


802.11n40_2452MHz

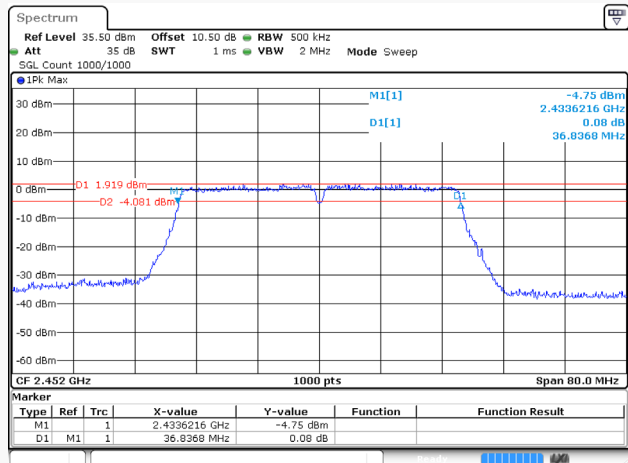

ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:44:48


For BLE Mode:
BLE (1 Mbps)

Low Channel

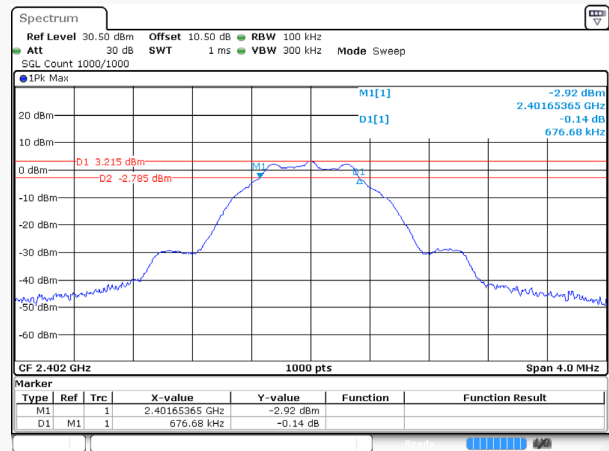


ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 9 APR 2026 17:36:24

Middle Channel

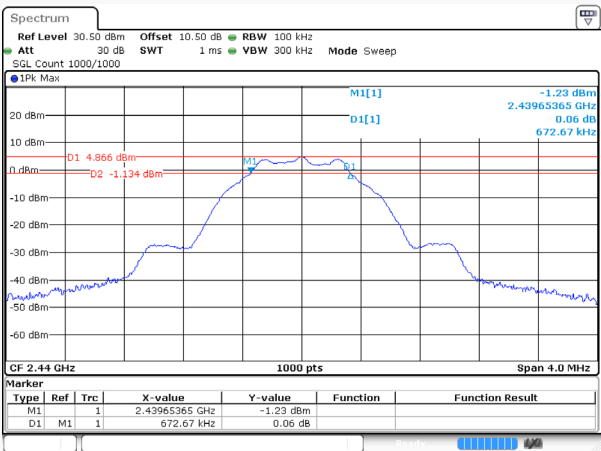

ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 9 APR 2026 17:27:50

High Channel

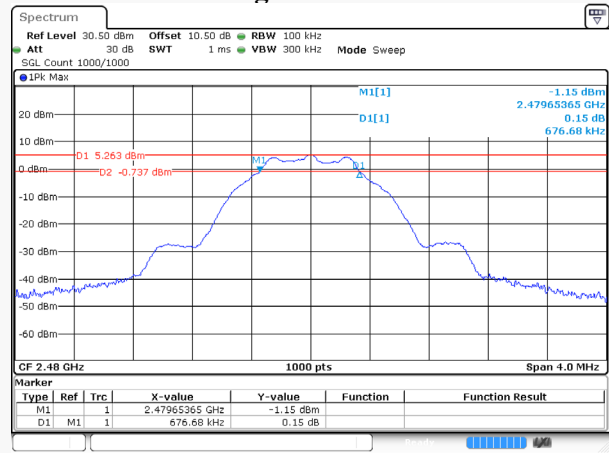

ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 9 APR 2026 17:32:07

MAXIMUM CONDUCTED OUTPUT POWER**Environmental Conditions & Test Information**

Test Date:	2026-04-09
Temperature:	21.2°C
Relative Humidity:	50 %
ATM Pressure:	100.5 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Result: Compliant.


EUT operation mode: Transmitting

For Wi-Fi Mode:


Channel	Frequency (MHz)	Average Output Power(dBm)	Peak Output Power(dBm)	Peak Output Power Limit (dBm)
802.11b Mode				
Low	2412	11.494	14.364	≤30
Middle	2437	11.492	14.817	≤30
High	2462	11.165	14.993	≤30
802.11g Mode				
Low	2412	9.763	15.876	≤30
Middle	2437	9.515	15.269	≤30
High	2462	9.604	15.548	≤30
802.11n-HT20 Mode				
Low	2412	9.502	15.662	≤30
Middle	2437	9.766	15.727	≤30
High	2462	9.115	15.061	≤30
802.11n-HT40 Mode				
Low	2422	8.251	16.201	≤30
Middle	2437	9.012	17.304	≤30
High	2452	8.756	16.906	≤30

BLE Mode:


Mode	Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
BLE (1 Mbps)	Low	2402	3.64	≤30	Pass
	Middle	2440	5.22	≤30	Pass
	High	2480	5.57	≤30	Pass

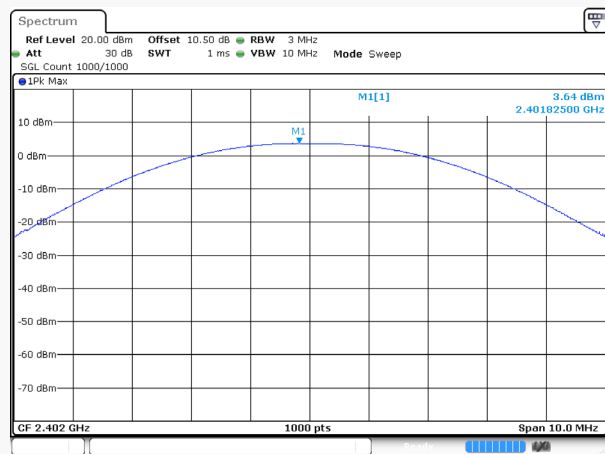BLE (1 Mbps)**Low Channel**

ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 9 APR 2026 17:36:35

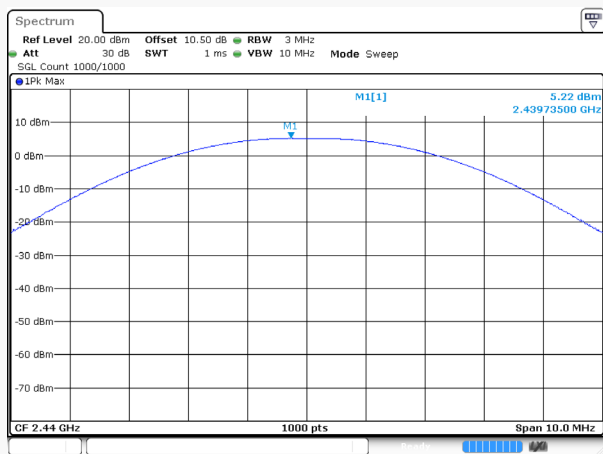Middle Channel

ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 9 APR 2026 17:28:02

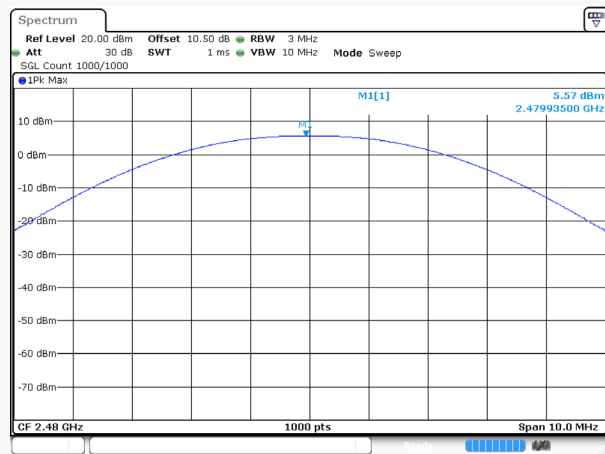High Channel

ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 9 APR 2026 17:32:15

100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE**Environmental Conditions & Test Information**

Test Date:	2026-04-08 to 2026-04-16
Temperature:	20.6-21.4℃
Relative Humidity:	49-51 %
ATM Pressure:	101.6-102.0 kPa
Test Engineer:	Neil Zhou


*EUT operation mode: Transmitting***Test Result:** Compliant

Mode	Channel	Test Frequency (MHz)	Result (dB)	Limit (dB)
802.11b	Low	2412	49.83	20
	High	2462	49.93	20
802.11g	Low	2412	32.45	20
	High	2462	48.94	20
802.11n20	Low	2412	31.65	20
	High	2462	48.37	20
802.11n40	Low	2422	39.06	20
	High	2452	41.89	20

Mode	Channel	Frequency (MHz)	Result (dB)	Limit (dB)
BLE (1 Mbps)	Low	2402	49.95	20
	High	2480	53.14	


For Wi-Fi Mode:

802.11b Mode Left Side

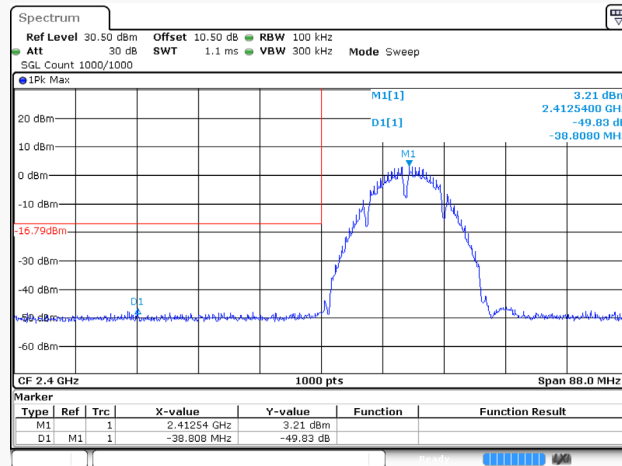


ProjectNo. RKSA260311002 Tester:Neil Zhou
Date: 8 APR 2026 15:35:28

802.11b Mode Right Side

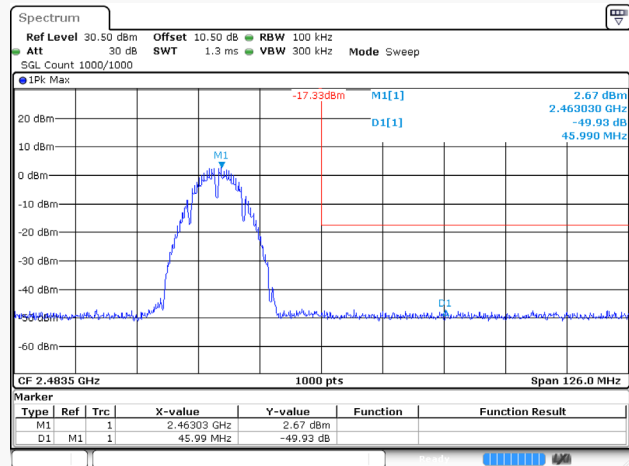


ProjectNo. RKSA260311002 Tester:Neil Zhou
Date: 8 APR 2026 16:44:33

802.11g Mode Left Side

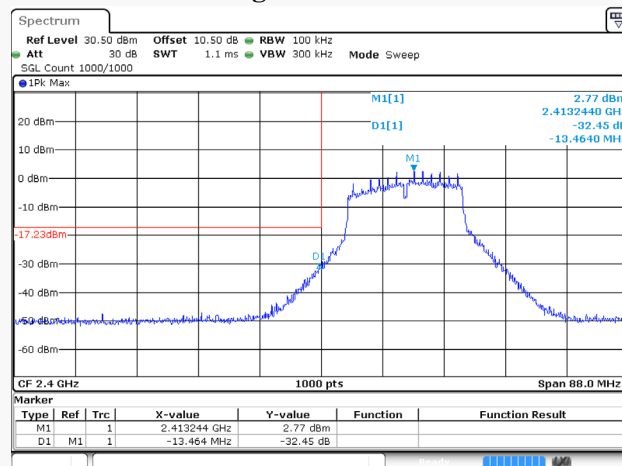


ProjectNo. RKSA260311002 Tester:Neil Zhou
Date: 16 APR 2026 16:16:53

802.11g Mode Right Side

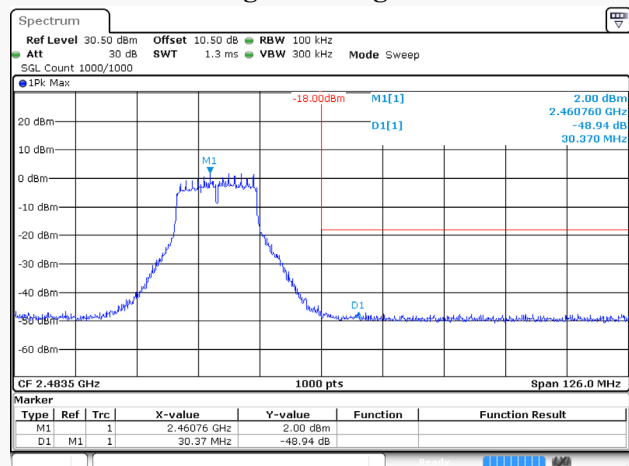


ProjectNo. RKSA260311002 Tester:Neil Zhou
Date: 16 APR 2026 16:25:32

802.11n-HT20 Mode Left Side

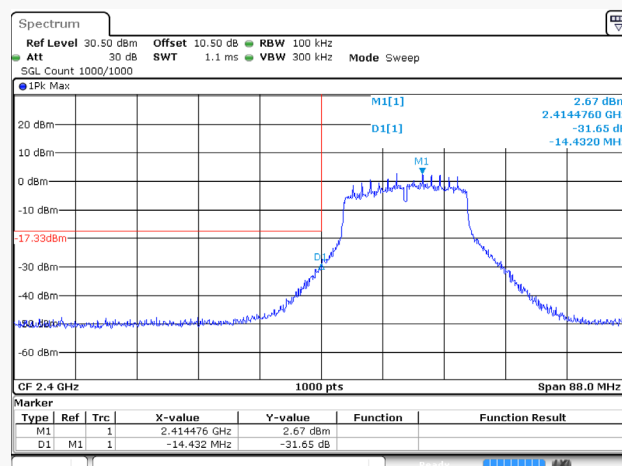


ProjectNo. RKSA260311002 Tester:Neil Zhou
Date: 8 APR 2026 17:16:40

802.11n-HT20 Mode Right Side

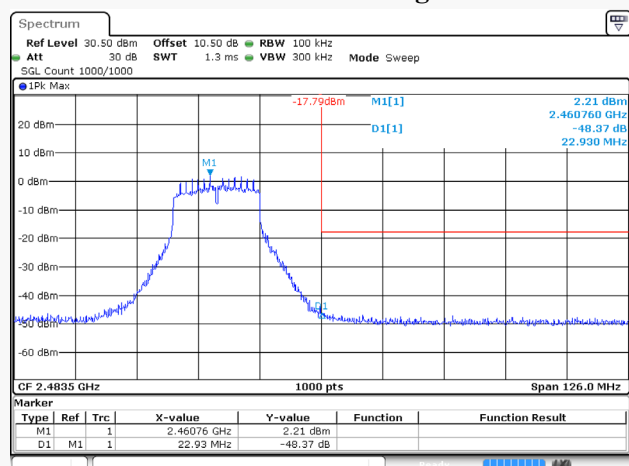


ProjectNo. RKSA260311002 Tester:Neil Zhou
Date: 8 APR 2026 17:28:29

802.11n-HT40 Mode Left Side

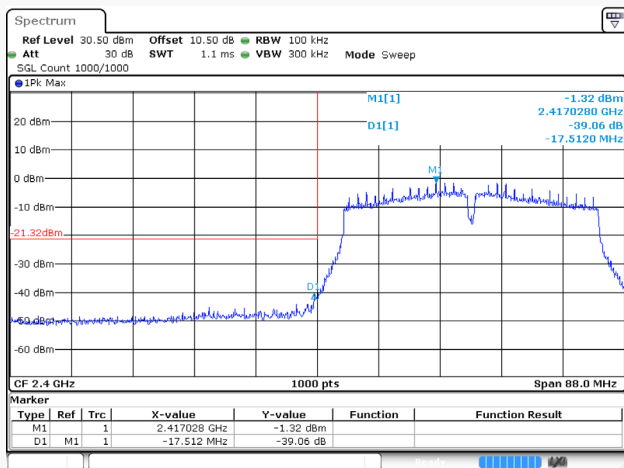

ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 8 APR 2026 17:35:38


802.11n-HT40 Mode Right Side

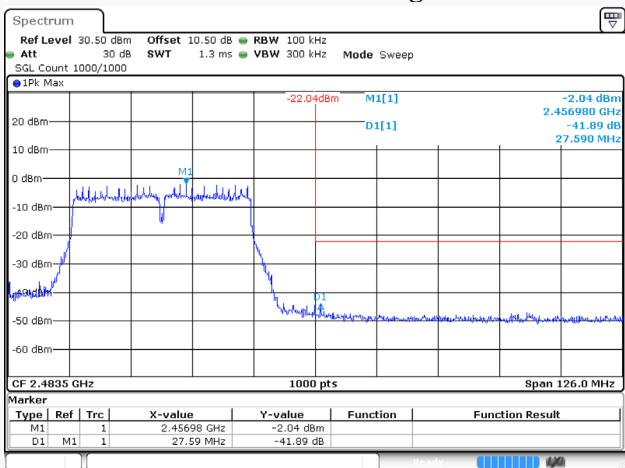

ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 8 APR 2026 17:45:06


For BLE Mode:
BLE (1 Mbps)

Left Side

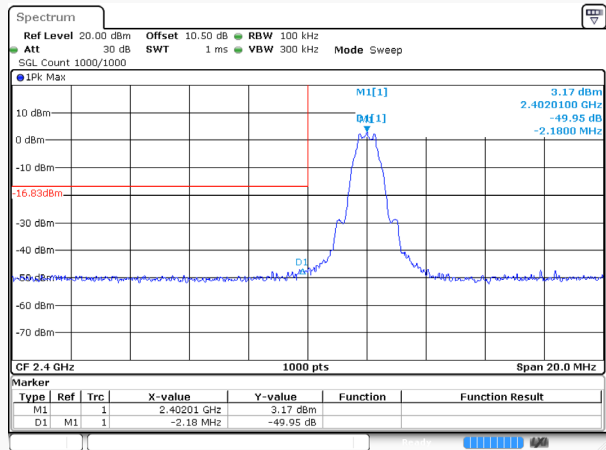

ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 9 APR 2026 17:36:55

Right Side

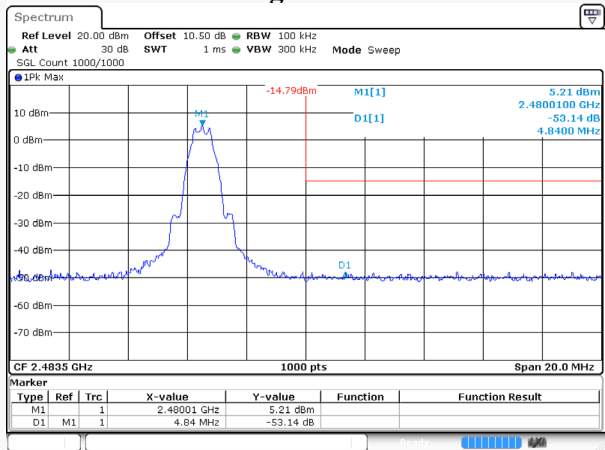

ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 9 APR 2026 17:32:31

CONDUCTED SPURIOUS EMISSION**Environmental Conditions & Test Information**

Test Date:	2026-04-08 to 2026-04-16
Temperature:	20.6-21.4℃
Relative Humidity:	49-51 %
ATM Pressure:	101.6-102.0 kPa
Test Engineer:	Neil Zhou


Mode	Channel	Frequency (MHz)	Result (dB)	Limit (dB)
802.11b	Low	2412	39.25	20
	Middle	2437	39.08	20
	High	2462	39.21	20
802.11g	Low	2412	38.39	20
	Middle	2437	36.48	20
	High	2462	35.30	20
802.11n20	Low	2412	37.91	20
	Middle	2437	38.25	20
	High	2462	36.96	20
802.11n40	Low	2422	33.76	20
	Middle	2437	34.31	20
	High	2452	33.92	20

Mode	Channel	Frequency (MHz)	Result (dB)	Limit (dB)
BLE (1 Mbps)	Low	2402	39.21	20
	Middle	2440	41.17	20
	High	2480	41.77	20

Note: the maximum path attenuation of 30MHz~25GHz was added into the offset


For Wi-Fi Mode:

802.11b_2412MHz

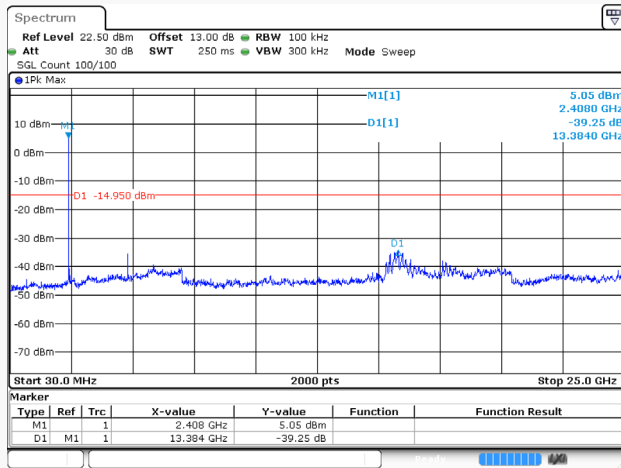


ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 8 APR 2026 15:37:21

802.11b_2437MHz

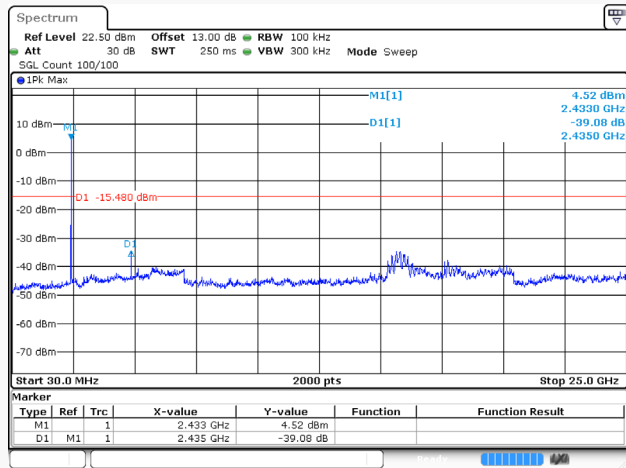


ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 8 APR 2026 15:41:46

802.11b_2462MHz

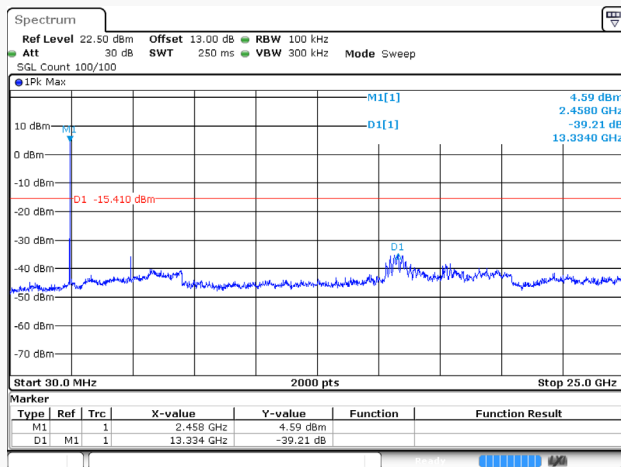


ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 8 APR 2026 16:46:26

802.11g_2412MHz

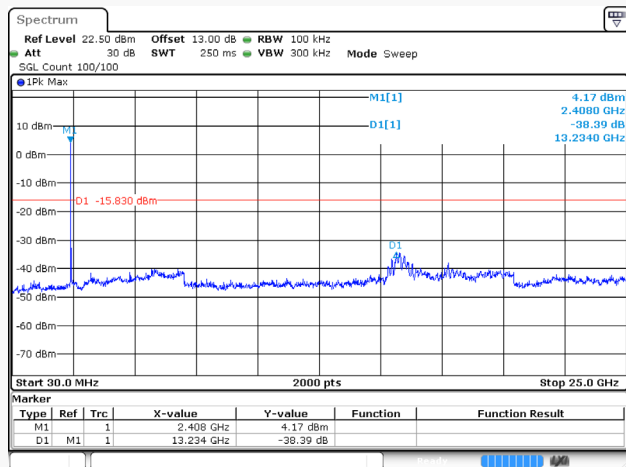


ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 16 APR 2026 16:18:47

802.11g_2437MHz

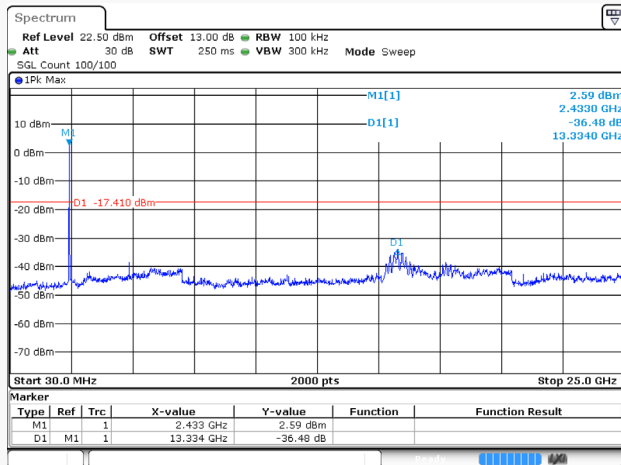


ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 16 APR 2026 16:22:59

802.11g_2462MHz

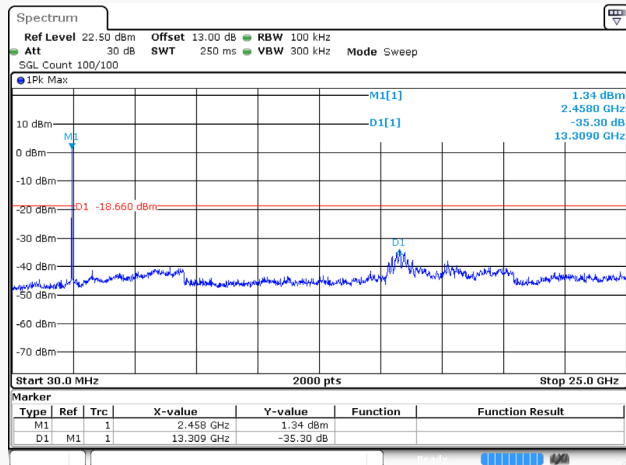


ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 16 APR 2026 16:27:26

802.11n20_2412MHz

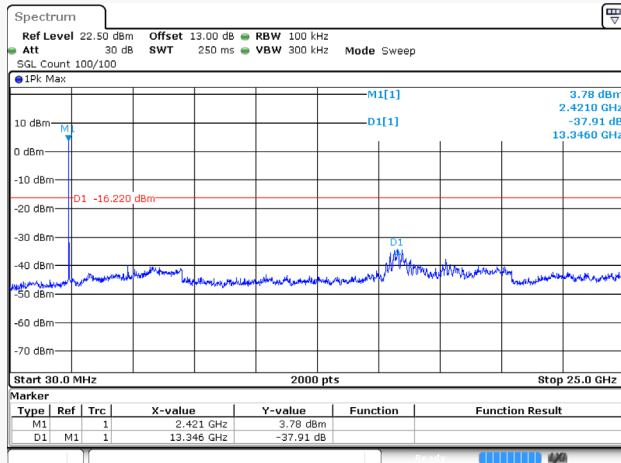


ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:18:34

802.11n20_2437MHz

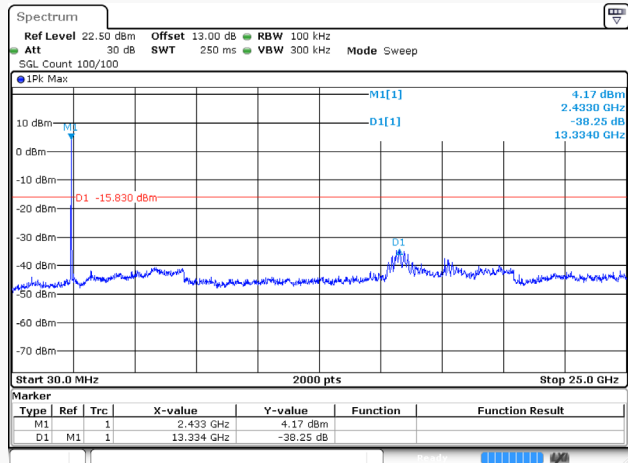


ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:22:38

802.11n20_2462MHz

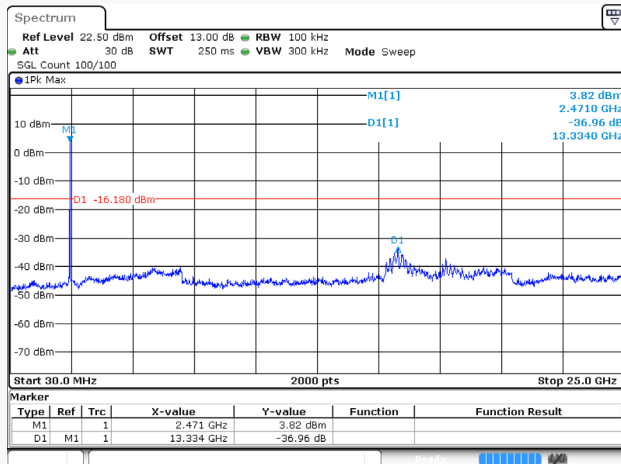


ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:30:23

802.11n40_2422MHz

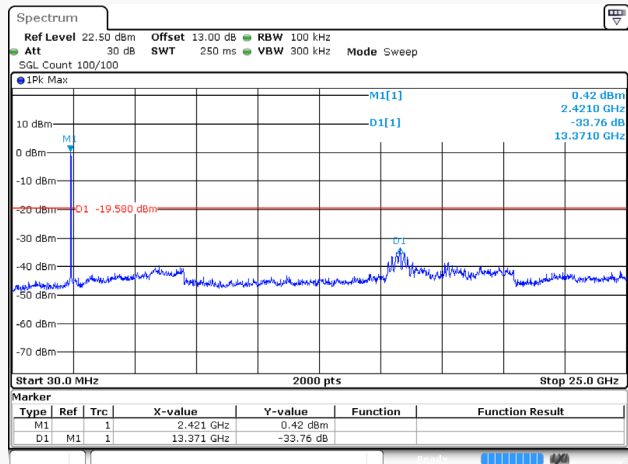


ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:37:32

802.11n40_2437MHz

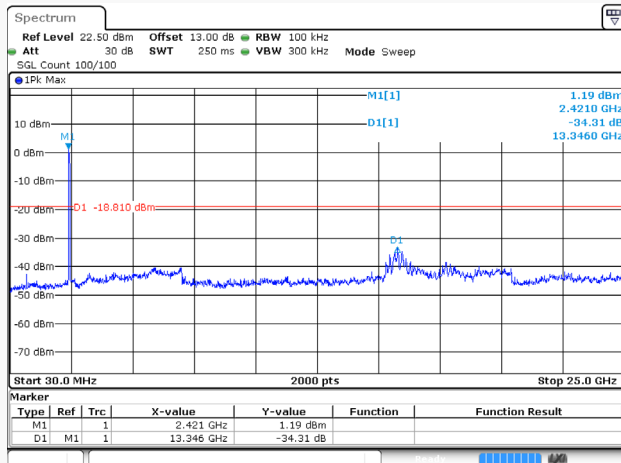

ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:42:27

802.11n40_2452MHz

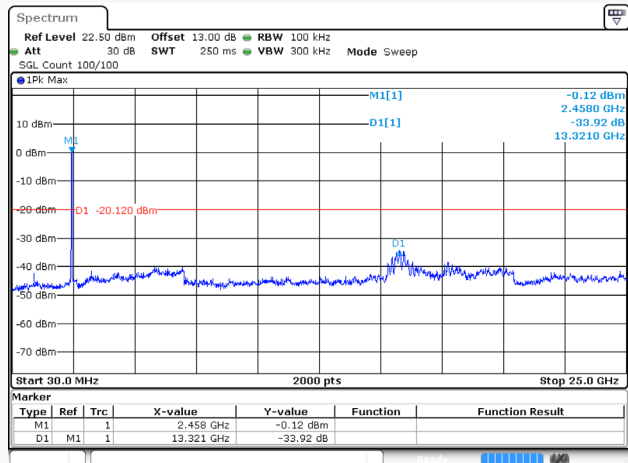

ProjectNo. RKSA260311002 Tester Neil Zhou
Date: 8 APR 2026 17:47:00