



RF - TEST REPORT

- FCC Part 15B, ICES-003 -

Type / Model Name : KY-LOC 1D.03.01

Product Description : Radar sensor

HVIN: 1.1.2.1.1

Applicant : Kymati GmbH

Address : Am Hochacker 5

85630 GRASBRUNN, GERMANY

Manufacturer : Kymati GmbH

Address : Am Hochacker 5

85630 GRASBRUNN, GERMANY

Test Result according to the standards
listed in clause 1 test standards:

POSITIVE

Test Report No. : 80141961-03 Rev_2

27. April 2023

Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-03
D-PL-12030-01-04

Contents

1	<u>TEST STANDARDS</u>	<u>3</u>
2	<u>TEST RESULT SUMMARY</u>	<u>4</u>
2.1	Revision history of test report	4
2.2	Final assessment	4
3	<u>EQUIPMENT UNDER TEST</u>	<u>5</u>
3.1	Information provided by the Client	5
3.2	Sampling	5
3.3	Photo documentation of the EUT – Detailed photos see ATTACHMENT A	5
3.4	Power supply system utilised	5
3.5	Highest internal frequency	5
3.6	Short description of the Equipment under Test (EUT)	5
3.7	EUT operation mode	5
3.8	EUT configuration	6
4	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1	Address of the test laboratory	7
4.2	Environmental conditions	7
4.3	Statement of the measurement uncertainty	7
4.4	Conformity Decision Rule	7
4.5	Measurement protocol for FCC and ISED	7
5	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
5.1	Conducted emission	12
5.2	Radiated emission < 1 GHz (electric field)	17
5.3	Radiated emission > 1 GHz (electric field)	22
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	<u>25</u>
7	<u>DETAILED MEASUREMENT UNCERTAINTY</u>	<u>26</u>
7.1	Overview	26
7.2	Definitions and symbols	26
7.3	Measurement uncertainty	26

ATTACHMENTs A, B as separate supplements

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15 Subpart B - Unintentional Radiators (September 2022)

Part 15, Subpart B, Section 15.107

AC Line conducted emission

☐

Class A device

☒

Class B device

Part 15, Subpart B, Section 15.109

Radiated emission, general requirements

☐

Class A device

☒

Class B device

ANSI C63.4: 2014

Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

CISPR 16-4-2: 2011 + A1: 2014
EN 55016-4-2: 2011

Uncertainty in EMC measurement

ISED Canada Rules and Regulations - Information Technology Equipment (Including Digital Apparatus)

ICES-003, Issue 7, October 15, 2020

AC Power Line Conducted Emissions

☐

Class A device

☒

Class B device

ICES-003, Issue 7, October 15, 2020

Radiated emission

☐

Class A device

☒

Class B device

ANSI C63.4: 2014

Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

2 TEST RESULT SUMMARY

FCC Rule Part	ISED Standard	Description
15.107	ICES-003 3.2.1	AC power line conducted emissions
15.109	ICES-003 3.2.2	Radiated Emissions

Type of test	Test result
Emission:	
A4 Conducted emission (AC mains power / DC power)	passed
A5 Radiated emission (< 1 GHz)	passed
SER 3 Radiated emission (> 1 GHz)	passed

2.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80141961-03	0	03 March 2023	Initial test report
80141961-03	1	22 March 2023	3.8 AC adaptors added
80141961-03	2	27 April 2023	5.1 Test results updated (JBP), 6 updated

The test report with the highest revision number replaces the previous test reports.

2.2 Final assessment

The equipment under test fulfils the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records


Testing commenced on : 07 December 2022

Testing concluded on : 17 April 2023

Checked by:


 Klaus
 Gegenfurtner
 2023.04.27
 15:33:59 +02'00'
 Klaus Gegenfurtner
 Teamleader Radio

Tested by:


 Sabine Kugler
 2023.04.27
 15:27:23 +02'00'
 Sabine Kugler
 Radio Team

3 EQUIPMENT UNDER TEST

3.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

3.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according his/her instructions.

3.3 Photo documentation of the EUT – Detailed photos see ATTACHMENT A

3.4 Power supply system utilised

Power supply voltage : 9 – 36 V/DC
Alternative power supply PoE : 53.5 V/DC

All tests were carried out with a supply voltage of 120 V, 60 Hz unless otherwise stated.

3.5 Highest internal frequency

Highest internal frequency : 63.921 GHz

3.6 Short description of the Equipment under Test (EUT)

The EUT is a radar sensor in the operating band 61.0 GHz to 61.5 GHz and 60 GHz to 64 GHz. It determines the distance in primary or secondary radar mode.

Number of tested samples: 1
Serial number: 00009
Firmware ID: 3D.02

3.7 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- Operation mode 1: Data communication with notebook via LAN + PoE power supply

- Operation mode 2: Data communication with Notebook via LAN + DC power supply

3.8 EUT configuration

The following peripheral devices and interface cables were connected during the measurements:

- Notebook	Model : ThinkPad
- AC adaptor notebook	Model : Lenovo ADLX65YLC3A
- Switch with PoE+	Model : tp-link TL-SG1005P
- AC adaptor PoE switch	Model : Tp-link T535131-2-DT
- LAN cable	Model : CAT6 M12-RJ45
- DC power supply 24 V/DC	Model : Custom-built (provided by customer)
- DC power supply	Model : Hameg HM8143

Port	Cable	Screening	Transmission	Status	Length
1	DC power line	shielded	analogue	active	5 m
2	LAN cable	shielded	analogue/digital	active	3 m

Modifications during the EMC test: **None**

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 °C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ($w = 0$).

Details can be found in the procedure CSA_B_V50_29.

4.5 Measurement protocol for FCC and ISCED

4.5.1 General information


CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

**FCC: DE 0011
ISED: DE0009**

4.5.2 Details of test procedures

4.5.2.1 Conducted emission

Test setup according ANSI C63.4

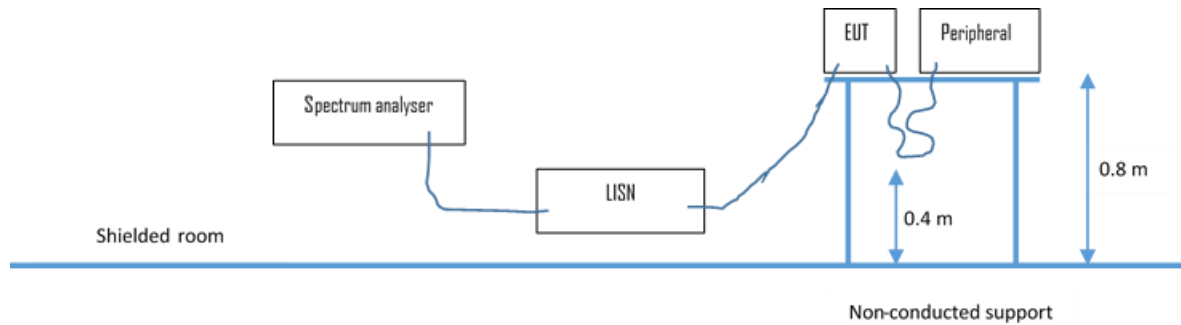

Description of measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$


$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω / 50 μ H (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

4.5.2.2 Radiated emission

4.5.2.2.1 OATS1 test site (30 MHz - 1 GHz)

Test setup according ANSI C63.4

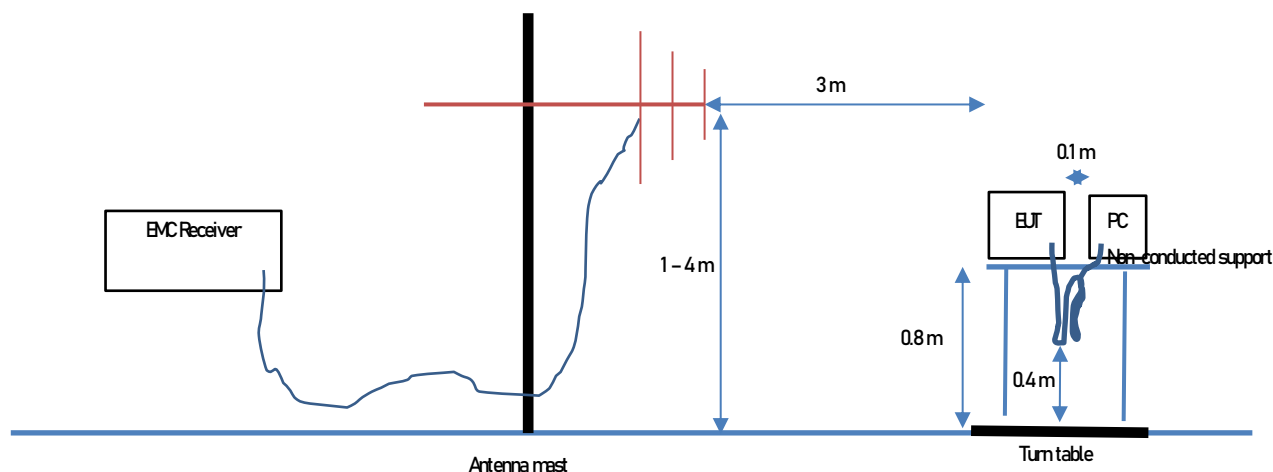

Description of measurement

Spurious emission from the EUT is measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 metre non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The setup of the equipment under test is established in accordance with ANSI C63.4. The interface cables that are closer than 40 centimetres to the ground plane are bundled in the centre in a serpentine fashion so that they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the centre of the table and to a screened room located outside the test area.

The antenna is positioned 3 or 10 metres horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres, measurement scans are made with both horizontal and vertical antenna polarization planes and the EUT is rotated 360 degrees.

The final level is calculated in a calculation sheet by taking the reading from the EMI receiver (Level dBμV) and adding the correction factors and cable loss factor (Factor dB) on to it. The limit is subtracted from this result in order to provide the limit margin listed in the measurement protocols.

Example:

Frequency (MHz)	Reading (dBμV)	+	Correction* (dB/m)	=	Level (dBμV/m)	-	Limit (dBμV/m)	=	Dlimit (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4


*Correction Factor = Antenna Factor + Cable Attenuation = 30 dB/m + 2.6 dB = 32.6 dB/m

The resolution bandwidth during the measurement is as follows:

30 MHz – 1000 MHz: RBW: 120 kHz

4.5.2.2.2 Anechoic chamber 1, 1000 MHz – 18000 MHz

Test setup according ANSI C63.4

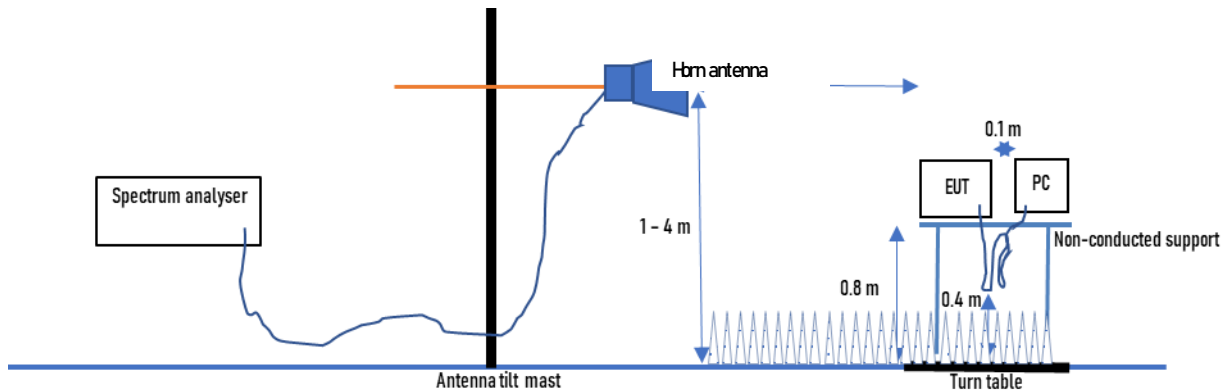


Description of measurement

Radiated emission from the EUT are measured in the frequency range of 1 GHz to the maximum frequency as specified in 47 CFR Part 15 Subpart A section 15.33, using a tuned receiver (spectrum analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 0.65 X 1.0 metre non-conducting table 80 centimetres above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12).

The interface cables that are closer than 40 centimetres to the ground plane are bundled in the centre in a serpentine fashion, so they are at least 40 centimetres from the ground plane. Measurements are made in both the horizontal and vertical polarization planes in a fully anechoic room using a spectrum analyser set to a peak detector function and a RBW= 1 MHz and VBW = 3 MHz. All tests are performed at a test distance of 3 metres. Hand-held or body-worn devices are rotated around three orthogonal axes in order to determine the position, angle and configuration having the maximum emission. The antenna height is then adjusted from 1 m to 4 m maximizing the measured value. The antenna is mounted to a boresight axis, so the antenna centre always points to the EUT. The turntable is rotated 360° until the spectrum analyser displays the maximum level at the observed frequency. The antenna height is then adjusted from 1 m to 4 m maximizing the measured value. The turntable is re-adjusted to re-affirm the maximum emission value which is then recorded. This procedure is repeated for all frequencies of interest.

4.5.2.2.3 Anechoic chamber 1, 18 GHz – 40 GHz

Test setup according ANSI C63.4

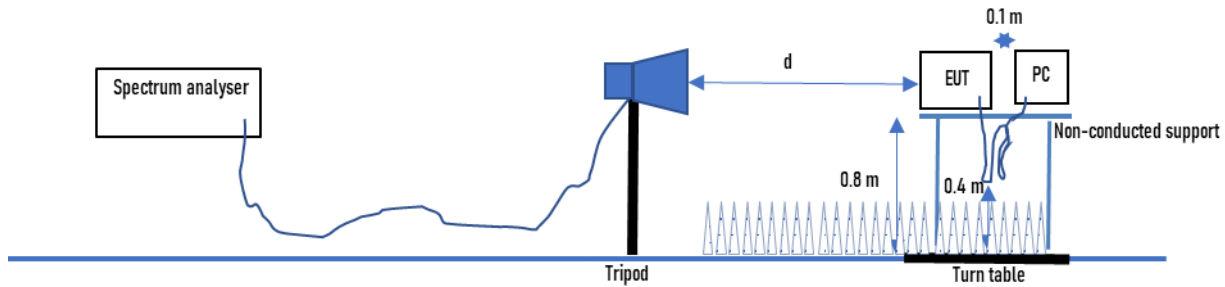

Description of measurement

Radiated emission from the EUT are measured in the frequency range of 1 GHz to the maximum frequency as specified in 47 CFR Part 15 Subpart A section 15.33, using a tuned receiver (spectrum analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 0.65 X 1.0 metre non-conducting table 80 centimetres above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12).

The interface cables that are closer than 40 centimetres to the ground plane are bundled in the centre in a serpentine fashion, so they are at least 40 centimetres from the ground plane. Measurements are made in both the horizontal and vertical polarization planes in a fully anechoic room using a spectrum analyser set to a peak detector function and an RBW= 1 MHz and VBW = 3 MHz. All tests are performed at a test distance of 3 metres. Hand-held or body-worn devices are rotated around three orthogonal axes in order to determine the position, angle and configuration having the maximum emission. The turntable is rotated 360° until the spectrum analyser displays the maximum level at the observed frequency, the maximum emission value is then recorded. This procedure is repeated for all frequencies of interest.

Where appropriate in frequency range 18 GHz - 40 GHz, the test distance may be reduced to 1 m in order to reduce the noise level to hold a minimum distance between noise level and limit. The limit will be adopted to the measurement distance.

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emission

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test setup

See Attachment B for detailed photo documentation of the test set-up.

5.1.3 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin -2.4 dB at 0.498 MHz

Limit according to FCC Part 15, Section 15.107(a):

Frequency of Emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Limit according to ICES-003 3.2.1:

Frequency of Emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases linearly with the logarithm of frequency

The requirements are **FULFILLED**.


Remarks: For detailed results, please see the following page(s).

For description of the measurement see 4.5.2.

5.1.4 Test protocol

Test point: L1
Operation mode: Operation mode 1: Data communication with notebook
via LAN + PoE power supply
Remarks: Model power supply: Lenovo ADLX65YLC3A

Result: passed

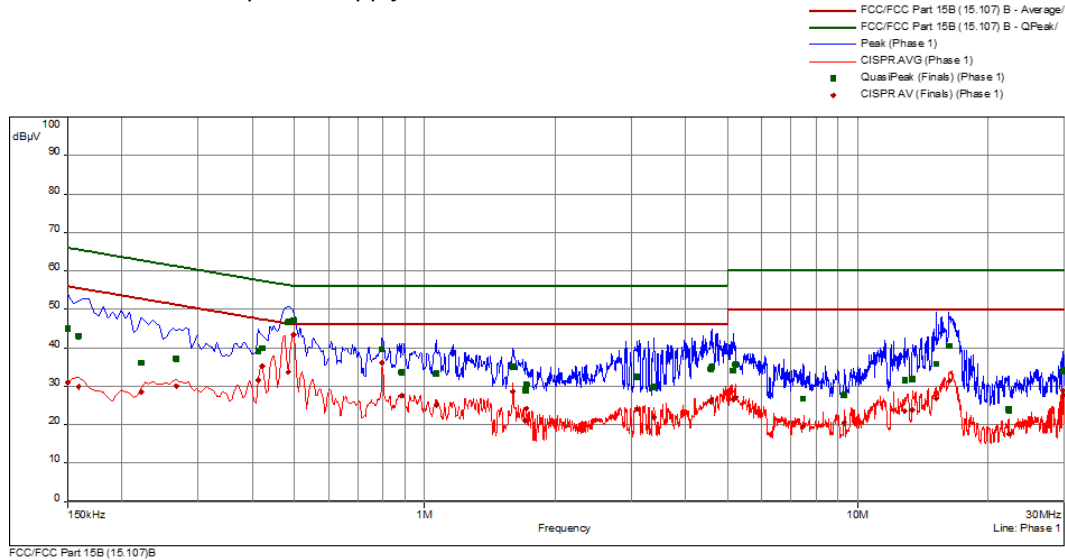

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.150	1	45.2	-20.9	66.0	31.0	-25.0	56.0	Phase 1	10.1
0.159	1	43.0	-22.5	65.5	29.9	-25.6	55.5	Phase 1	10.1
0.222	1	36.2	-26.5	62.7	28.6	-24.2	52.7	Phase 1	10.1
0.267	1	37.3	-24.0	61.2	30.1	-21.1	51.2	Phase 1	10.1
0.413	2	39.3	-18.3	57.6	31.6	-16.0	47.6	Phase 1	10.1
0.422	2	39.8	-17.6	57.4	35.3	-12.1	47.4	Phase 1	10.1
0.485	2	46.7	-9.5	56.3	33.8	-12.5	46.3	Phase 1	10.2
0.498	2	47.3	-8.8	56.0	43.3	-2.7	46.0	Phase 1	10.2
0.798	3	39.6	-16.4	56.0	36.1	-9.9	46.0	Phase 1	10.2
0.884	3	33.7	-22.3	56.0	27.6	-18.4	46.0	Phase 1	10.2
1.064	3	33.3	-22.7	56.0	25.2	-20.9	46.0	Phase 1	10.2
1.601	4	35.0	-21.0	56.0	28.6	-17.4	46.0	Phase 1	10.3
1.709	4	29.0	-27.0	56.0	21.1	-24.9	46.0	Phase 1	10.3
1.718	4	30.5	-25.6	56.0	24.3	-21.7	46.0	Phase 1	10.3
3.098	5	32.5	-23.5	56.0	24.2	-21.9	46.0	Phase 1	10.3
3.381	5	29.9	-26.1	56.0	22.0	-24.0	46.0	Phase 1	10.3
4.583	5	34.6	-21.4	56.0	26.0	-20.0	46.0	Phase 1	10.4
4.601	5	35.1	-20.9	56.0	26.6	-19.5	46.0	Phase 1	10.4
5.156	6	34.1	-25.9	60.0	26.6	-23.4	50.0	Phase 1	10.4
5.210	6	35.6	-24.4	60.0	27.2	-22.8	50.0	Phase 1	10.5
7.473	6	26.8	-33.2	60.0	19.5	-30.5	50.0	Phase 1	10.6
9.305	6	27.8	-32.2	60.0	20.6	-29.4	50.0	Phase 1	10.7
12.845	7	31.6	-28.4	60.0	23.5	-26.5	50.0	Phase 1	10.9
13.358	7	31.9	-28.1	60.0	23.9	-26.1	50.0	Phase 1	11.0
15.189	7	35.8	-24.2	60.0	26.8	-23.2	50.0	Phase 1	11.1
16.242	7	40.5	-19.5	60.0	31.4	-18.6	50.0	Phase 1	11.1
22.323	8	24.1	-35.9	60.0	17.7	-32.3	50.0	Phase 1	11.4
22.328	8	23.8	-36.2	60.0	17.7	-32.3	50.0	Phase 1	11.4
29.672	8	34.4	-25.6	60.0	28.9	-21.1	50.0	Phase 1	11.5
29.784	8	33.9	-26.1	60.0	27.7	-22.3	50.0	Phase 1	11.5

Test point:

N


Result: passed

Operation mode:

Operation mode 1: Data communication with notebook
via LAN + PoE power supply

Remarks:

Model power supply: Lenovo ADLX65YLC3A

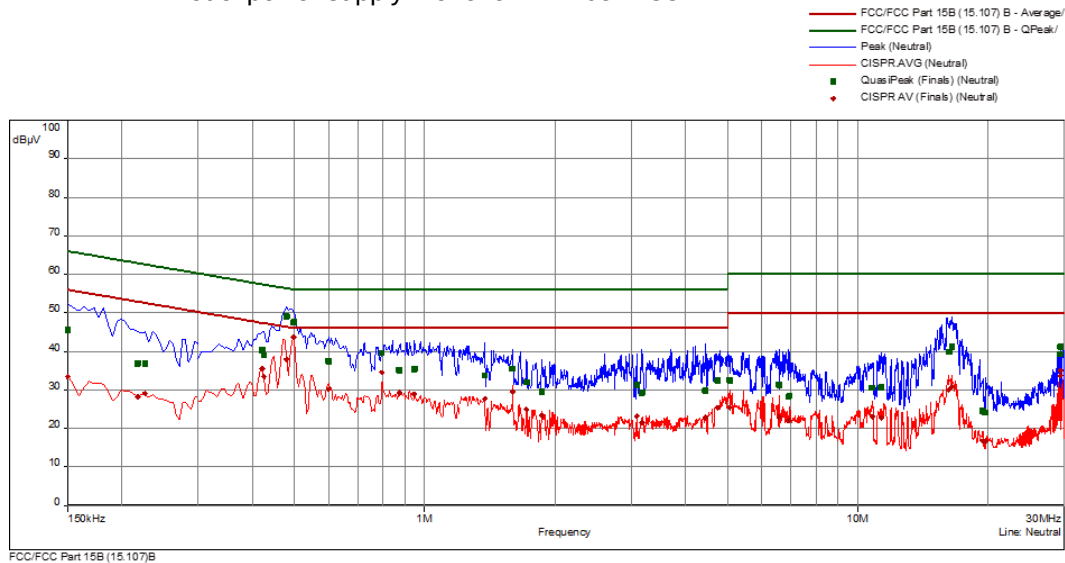

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.150	9	45.6	-20.4	66.0	33.4	-22.6	56.0	Neutral	10.1
0.218	9	36.9	-26.0	62.9	28.3	-24.7	52.9	Neutral	10.1
0.227	9	36.9	-25.7	62.6	29.2	-23.4	52.6	Neutral	10.1
0.422	10	40.4	-17.1	57.4	35.6	-11.8	47.4	Neutral	10.2
0.426	10	39.1	-18.2	57.3	33.4	-13.9	47.3	Neutral	10.2
0.480	10	49.1	-7.3	56.3	37.9	-8.4	46.3	Neutral	10.2
0.498	10	47.7	-8.4	56.0	43.7	-2.4	46.0	Neutral	10.2
0.600	11	37.6	-18.4	56.0	30.2	-15.8	46.0	Neutral	10.2
0.798	11	39.7	-16.4	56.0	34.5	-11.5	46.0	Neutral	10.2
0.875	11	35.2	-20.8	56.0	29.3	-16.8	46.0	Neutral	10.2
0.947	11	35.5	-20.5	56.0	29.0	-17.0	46.0	Neutral	10.2
1.376	12	33.8	-22.2	56.0	27.7	-18.3	46.0	Neutral	10.3
1.596	12	35.6	-20.5	56.0	29.5	-16.5	46.0	Neutral	10.3
1.718	12	32.0	-24.0	56.0	25.0	-21.0	46.0	Neutral	10.3
1.866	12	29.5	-26.5	56.0	23.4	-22.6	46.0	Neutral	10.3
3.089	13	31.3	-24.8	56.0	23.2	-22.8	46.0	Neutral	10.4
3.174	13	29.3	-26.7	56.0	21.5	-24.5	46.0	Neutral	10.4
4.443	13	29.9	-26.1	56.0	22.8	-23.2	46.0	Neutral	10.4
4.749	13	32.5	-23.5	56.0	25.5	-20.6	46.0	Neutral	10.4
5.061	14	32.5	-27.5	60.0	25.5	-24.5	50.0	Neutral	10.5
6.569	14	31.4	-28.6	60.0	23.0	-27.0	50.0	Neutral	10.6
6.893	14	28.2	-31.8	60.0	22.1	-27.9	50.0	Neutral	10.6
6.938	14	28.6	-31.4	60.0	22.2	-27.8	50.0	Neutral	10.6
10.784	15	30.6	-29.4	60.0	23.1	-26.9	50.0	Neutral	10.7
11.324	15	30.6	-29.4	60.0	22.8	-27.2	50.0	Neutral	10.7
16.238	15	39.9	-20.1	60.0	30.1	-19.9	50.0	Neutral	10.9
16.463	15	41.2	-18.8	60.0	30.8	-19.2	50.0	Neutral	11.0
19.425	16	24.6	-35.4	60.0	16.8	-33.2	50.0	Neutral	11.1
19.713	16	24.2	-35.8	60.0	16.8	-33.3	50.0	Neutral	11.1
29.325	16	41.3	-18.7	60.0	35.1	-14.9	50.0	Neutral	11.0
29.330	16	39.3	-20.7	60.0	33.8	-16.3	50.0	Neutral	11.0

Test point:

L1


Result: passed

Operation mode:

Operation mode 2: Data communication with Notebook
via LAN + DC power supply

Remarks:


Model power supply: Lenovo ADLX65YLC3A
24V/DC applied by commercially available HM8143

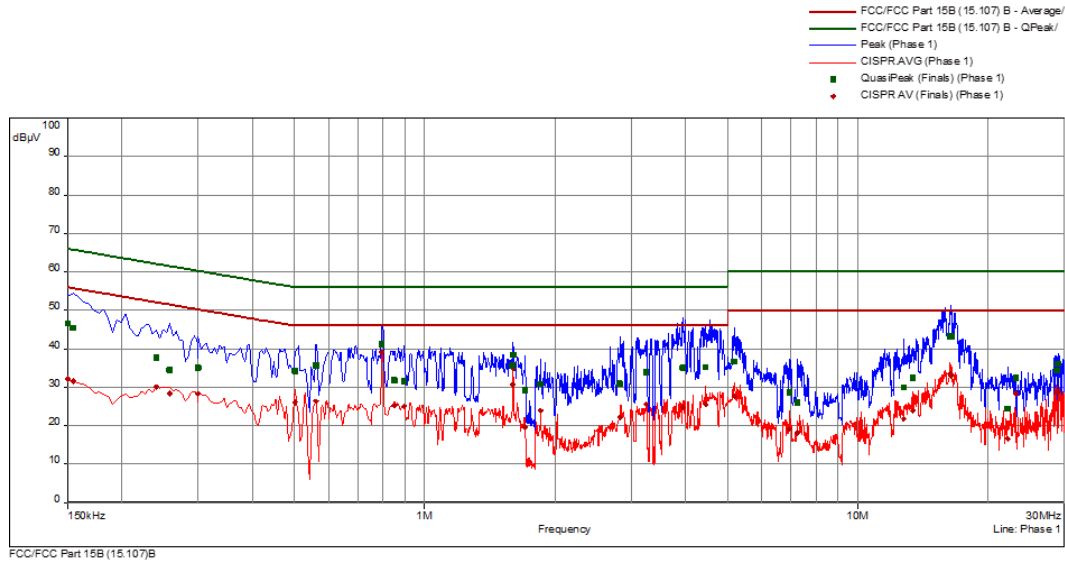

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.150	1	46.6	-19.4	66.0	32.2	-23.8	56.0	Phase 1	10.1
0.155	1	45.5	-20.2	65.8	31.7	-24.1	55.8	Phase 1	10.1
0.240	1	37.7	-24.4	62.1	30.1	-22.0	52.1	Phase 1	10.1
0.258	1	34.5	-27.0	61.5	28.4	-23.1	51.5	Phase 1	10.1
0.300	2	35.1	-25.1	60.2	28.3	-22.0	50.2	Phase 1	10.1
0.503	2	34.2	-21.8	56.0	26.1	-19.9	46.0	Phase 1	10.2
0.561	2	35.7	-20.3	56.0	26.4	-19.6	46.0	Phase 1	10.2
0.798	3	41.2	-14.8	56.0	39.2	-6.8	46.0	Phase 1	10.2
0.852	3	31.9	-24.1	56.0	25.2	-20.8	46.0	Phase 1	10.2
0.897	3	31.6	-24.4	56.0	25.1	-20.9	46.0	Phase 1	10.2
1.596	4	35.7	-20.3	56.0	30.7	-15.4	46.0	Phase 1	10.3
1.601	4	38.4	-17.6	56.0	34.9	-11.1	46.0	Phase 1	10.3
1.704	4	29.4	-26.6	56.0	19.6	-26.4	46.0	Phase 1	10.3
1.853	4	30.9	-25.1	56.0	23.9	-22.1	46.0	Phase 1	10.3
2.828	5	31.0	-25.0	56.0	22.2	-23.8	46.0	Phase 1	10.3
3.242	5	34.0	-22.1	56.0	25.7	-20.3	46.0	Phase 1	10.3
3.939	5	35.1	-20.9	56.0	24.9	-21.1	46.0	Phase 1	10.4
4.461	5	35.3	-20.7	56.0	25.6	-20.4	46.0	Phase 1	10.4
5.187	6	36.7	-23.3	60.0	27.7	-22.3	50.0	Phase 1	10.5
6.942	6	28.8	-31.2	60.0	19.2	-30.8	50.0	Phase 1	10.6
7.253	6	26.1	-33.9	60.0	18.2	-31.8	50.0	Phase 1	10.6
12.750	7	29.9	-30.1	60.0	21.8	-28.2	50.0	Phase 1	10.9
13.385	7	32.4	-27.6	60.0	24.0	-26.0	50.0	Phase 1	11.0
16.337	7	43.4	-16.6	60.0	33.5	-16.5	50.0	Phase 1	11.1
16.422	7	43.1	-16.9	60.0	33.1	-17.0	50.0	Phase 1	11.1
22.184	8	24.4	-35.6	60.0	16.6	-33.4	50.0	Phase 1	11.4
23.129	8	32.6	-27.5	60.0	28.4	-21.6	50.0	Phase 1	11.4
28.772	8	34.3	-25.7	60.0	28.7	-21.3	50.0	Phase 1	11.5
28.992	8	36.1	-23.9	60.0	29.0	-21.0	50.0	Phase 1	11.5

Test point: N
 Operation mode: Operation mode 2: Data communication with Notebook via LAN + DC power supply
 Remarks: Model power supply: Lenovo ADLX65YLC3A
 24V/DC applied by commercially available HM8143

Result: passed

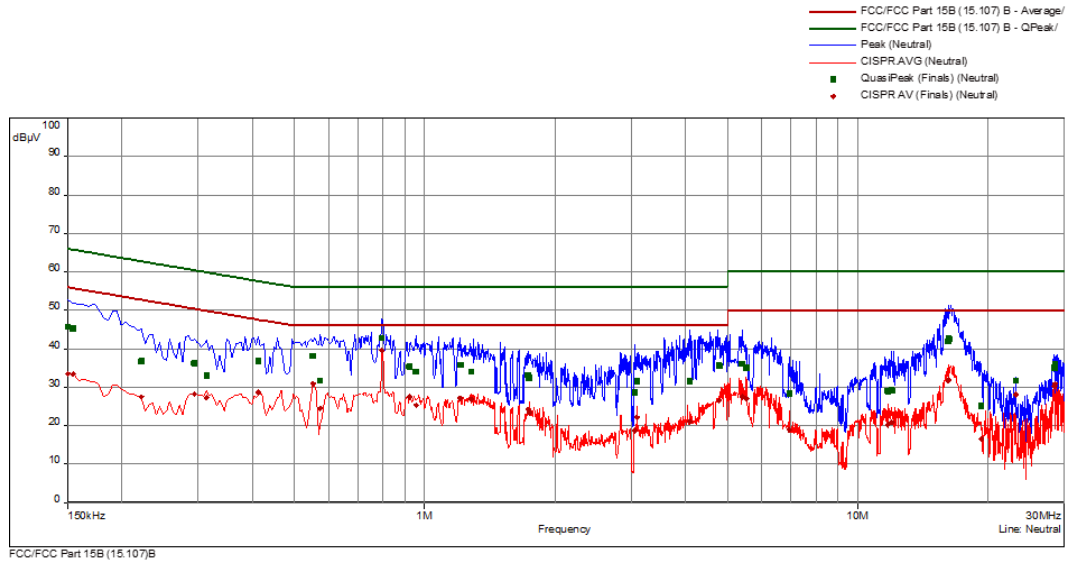

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.150	9	45.8	-20.2	66.0	33.6	-22.4	56.0	Neutral	10.1
0.155	9	45.4	-20.4	65.8	33.4	-22.3	55.8	Neutral	10.1
0.222	9	36.8	-25.9	62.7	27.5	-25.2	52.7	Neutral	10.1
0.294	9	36.3	-24.1	60.4	28.3	-22.2	50.4	Neutral	10.2
0.314	10	33.2	-26.7	59.9	27.3	-22.6	49.9	Neutral	10.2
0.413	10	36.9	-20.7	57.6	28.8	-18.8	47.6	Neutral	10.2
0.552	10	38.2	-17.8	56.0	31.0	-15.0	46.0	Neutral	10.2
0.575	10	31.9	-24.2	56.0	24.6	-21.4	46.0	Neutral	10.2
0.798	11	42.9	-13.1	56.0	39.6	-6.4	46.0	Neutral	10.2
0.924	11	35.4	-20.7	56.0	27.6	-18.5	46.0	Neutral	10.2
0.956	11	34.1	-21.9	56.0	25.4	-20.7	46.0	Neutral	10.2
1.209	12	35.9	-20.1	56.0	27.2	-18.8	46.0	Neutral	10.3
1.281	12	34.0	-22.0	56.0	26.9	-19.1	46.0	Neutral	10.3
1.731	12	33.1	-22.9	56.0	24.2	-21.8	46.0	Neutral	10.3
1.745	12	32.4	-23.6	56.0	23.4	-22.6	46.0	Neutral	10.3
3.062	13	28.7	-27.3	56.0	18.8	-27.2	46.0	Neutral	10.4
3.089	13	31.6	-24.4	56.0	22.2	-23.8	46.0	Neutral	10.4
4.088	13	31.6	-24.4	56.0	21.0	-25.0	46.0	Neutral	10.4
4.785	13	35.7	-20.3	56.0	26.6	-19.5	46.0	Neutral	10.4
5.417	14	36.1	-23.9	60.0	27.5	-22.5	50.0	Neutral	10.5
5.525	14	35.2	-24.8	60.0	27.0	-23.0	50.0	Neutral	10.5
6.938	14	28.4	-31.6	60.0	18.9	-31.1	50.0	Neutral	10.6
11.729	15	29.1	-30.9	60.0	20.3	-29.8	50.0	Neutral	10.8
11.972	15	29.3	-30.7	60.0	20.9	-29.1	50.0	Neutral	10.8
16.188	15	42.1	-18.0	60.0	31.8	-18.3	50.0	Neutral	10.9
16.215	15	42.7	-17.3	60.0	31.9	-18.1	50.0	Neutral	10.9
19.281	16	25.2	-34.8	60.0	16.6	-33.4	50.0	Neutral	11.1
23.129	16	31.8	-28.2	60.0	28.2	-21.9	50.0	Neutral	11.1
28.434	16	35.1	-24.9	60.0	30.3	-19.7	50.0	Neutral	11.0
28.547	16	36.0	-24.0	60.0	30.9	-19.1	50.0	Neutral	11.0

5.2 Radiated emission < 1 GHz (electric field)

For test instruments and accessories used see section 6 Part A 5.

5.2.1 Description of the test location

Test location: OATS 1
Test distance: 3 m

5.2.2 Photo documentation of the test setup

See Attachment B for detailed photo documentation of the test set-up.

5.2.3 Test result

Frequency range: 30 MHz - 1000 MHz

Min. limit margin -8.5 dB at 79.22 MHz

Limit according to FCC Part 15, Section 15.109(a):

Frequency of emission (MHz)	Field strength @3m (μ V/m)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

Limit according to ICES-003 3.2.2:

Frequency range (MHz)	Quasi-peak @3m (dB μ V/m)
30 - 88	40
88 - 216	43.5
216 - 230	46
230 - 960	47
960 - 1000	54

The requirements are **FULFILLED**.

Remarks: For detailed results, please see the following page(s).


For description of the measurement see 4.5.2.

5.2.4 Test protocol

Operation mode: Operation mode 1: Data communication with notebook via LAN + PoE power supply Result: passed
Remarks: None


According to FCC Part 15, Section 15.109:

Frequency (MHz)	Reading Vert. (dBµV)	Reading Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBµV/m)	Level Hor. (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
79.22	17.2	10.0	14.3	14.7	31.5	24.7	40.0	-8.5
125.00	11.7	9.5	17.9	17.2	29.6	26.7	43.5	-13.9
250.00	11.3	10.5	18.7	18.7	30.0	29.2	46.0	-16.0
300.00	9.6	13.0	20.2	20.7	29.8	33.7	46.0	-12.3
375.00	0.1	3.4	22.4	22.8	22.5	26.2	46.0	-19.8
400.00	-1.2	1.5	23.1	23.5	21.9	25.0	46.0	-21.0
450.00	3.3	6.0	24.4	24.8	27.7	30.8	46.0	-15.2
500.00	7.2	4.5	25.7	26.0	32.9	30.5	46.0	-13.1
579.00	2.7	-0.5	27.5	27.9	30.2	27.4	46.0	-15.8
650.00	4.8	4.1	28.8	29.3	33.6	33.4	46.0	-12.4

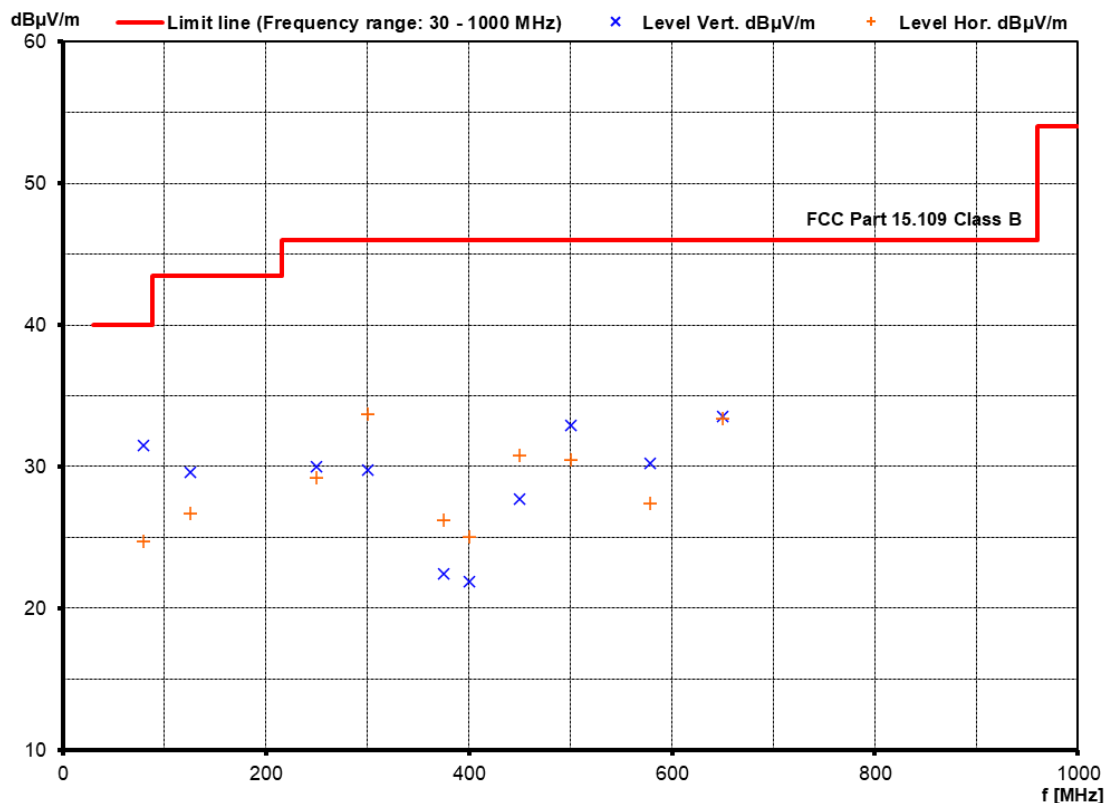

According to ICES-003 3.2.2:


Frequency (MHz)	Reading Vert. (dBµV)	Reading Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBµV/m)	Level Hor. (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
79.22	17.2	10.0	14.3	14.7	31.5	24.7	40.0	-8.5
125.00	11.7	9.5	17.9	17.2	29.6	26.7	43.5	-13.9
250.00	11.3	10.5	18.7	18.7	30.0	29.2	47.0	-17.0
300.00	9.6	13.0	20.2	20.7	29.8	33.7	47.0	-13.3
375.00	0.1	3.4	22.4	22.8	22.5	26.2	47.0	-20.8
400.00	-1.2	1.5	23.1	23.5	21.9	25.0	47.0	-22.0
450.00	3.3	6.0	24.4	24.8	27.7	30.8	47.0	-16.2
500.00	7.2	4.5	25.7	26.0	32.9	30.5	47.0	-14.1
579.00	2.7	-0.5	27.5	27.9	30.2	27.4	47.0	-16.8
650.00	4.8	4.1	28.8	29.3	33.6	33.4	47.0	-13.4

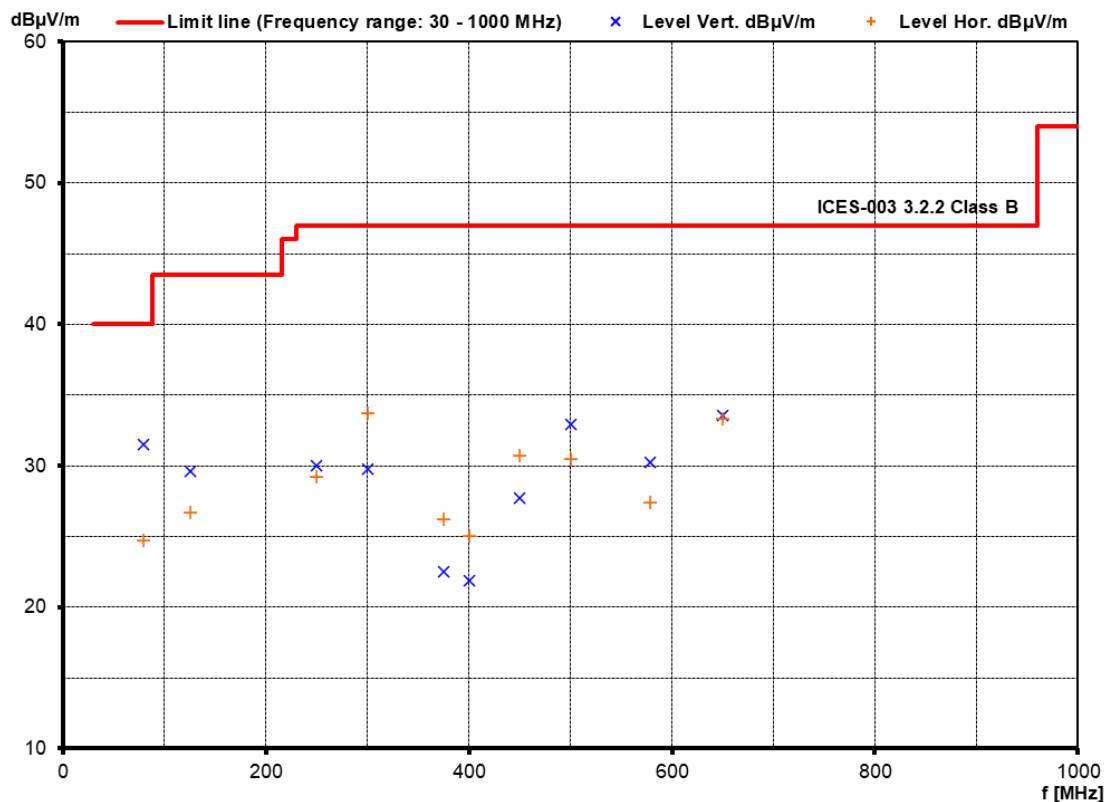

Operation mode: Operation mode 2: Data communication with Notebook via LAN + DC power supply Result: passed
Remarks: None


According to FCC Part 15, Section 15.109:

Frequency (MHz)	Reading Vert. (dBµV)	Reading Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBµV/m)	Level Hor. (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
71.40	7.1	5.5	15.6	16.1	22.7	21.6	40.0	-17.3
90.30	6.8	3.8	13.4	12.6	20.2	16.4	43.5	-23.3
120.00	7.0	0.7	17.4	16.8	24.4	17.5	43.5	-19.1
164.20	5.4	11.5	19.5	18.9	24.9	30.4	43.5	-13.1
250.00	11.2	15.8	18.7	18.7	29.9	34.5	46.0	-11.5
329.40	5.7	10.3	21.1	21.5	26.8	31.8	46.0	-14.2
375.00	8.5	12.2	22.4	22.8	30.9	35.0	46.0	-11.0
443.30	7.9	10.0	24.2	24.6	32.1	34.6	46.0	-11.4
500.00	10.5	5.2	25.7	26.0	36.2	31.2	46.0	-9.8
582.10	-0.1	-0.3	27.6	28.0	27.5	27.7	46.0	-18.3

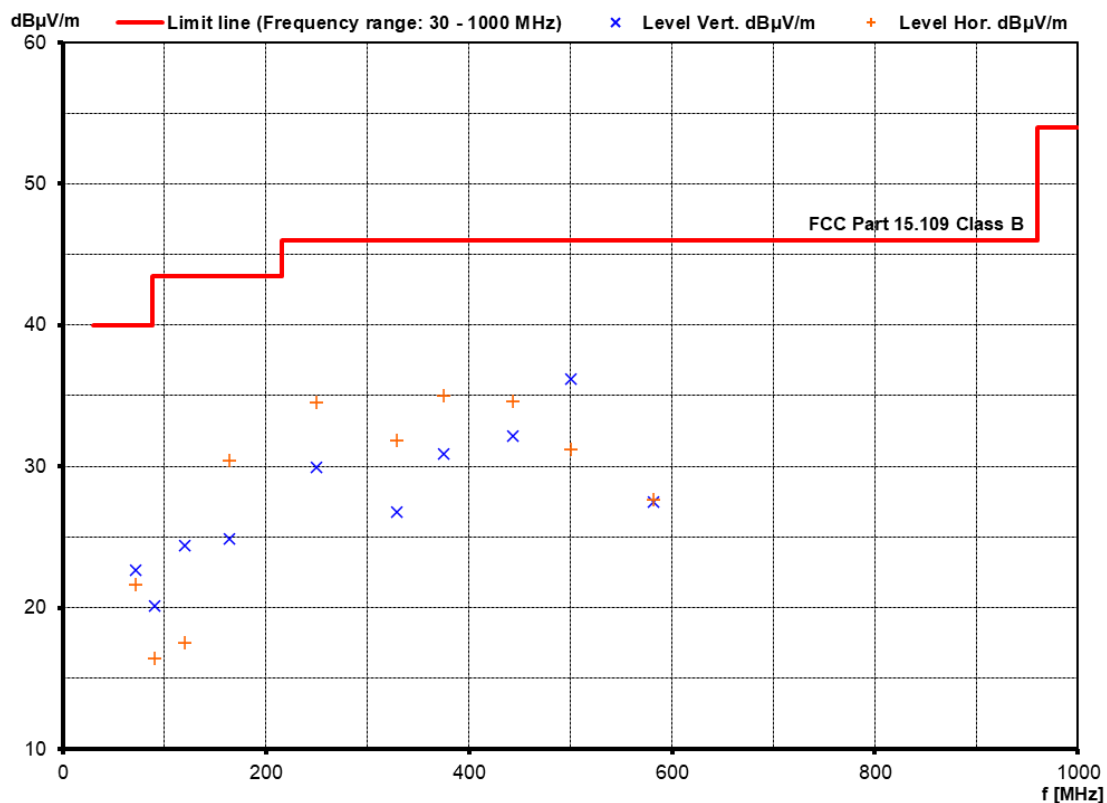

According to ICES-003 3.2.2:

Frequency (MHz)	Reading Vert. (dBµV)	Reading Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBµV/m)	Level Hor. (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
71.40	7.1	5.5	15.6	16.1	22.7	21.6	40.0	-17.3
90.30	6.8	3.8	13.4	12.6	20.2	16.4	43.5	-23.3
120.00	7.0	0.7	17.4	16.8	24.4	17.5	43.5	-19.1
164.20	5.4	11.5	19.5	18.9	24.9	30.4	43.5	-13.1
250.00	11.2	15.8	18.7	18.7	29.9	34.5	47.0	-12.5
329.40	5.7	10.3	21.1	21.5	26.8	31.8	47.0	-15.2
375.00	8.5	12.2	22.4	22.8	30.9	35.0	47.0	-12.0
443.30	7.9	10.0	24.2	24.6	32.1	34.6	47.0	-12.4
500.00	10.5	5.2	25.7	26.0	36.2	31.2	47.0	-10.8
582.10	-0.1	-0.3	27.6	28.0	27.5	27.7	47.0	-19.3

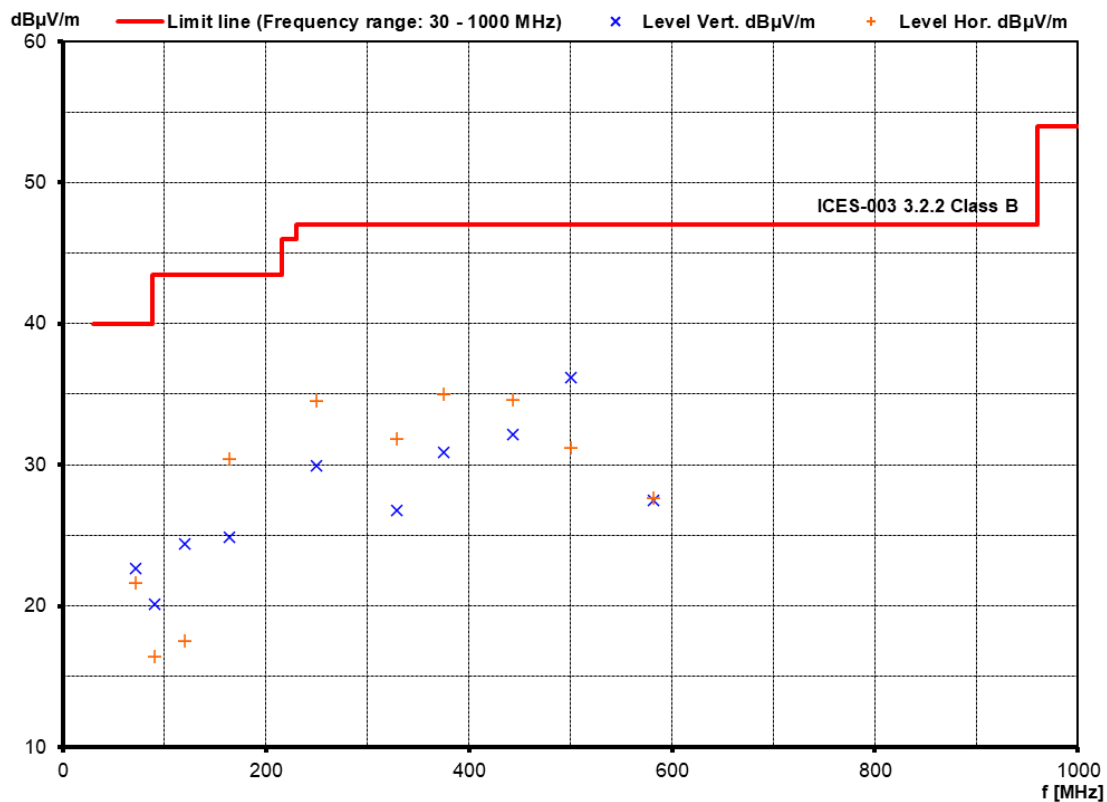

5.3 Radiated emission > 1 GHz (electric field)

For test instruments and accessories used see section 6 Part SER 3.

5.3.1 Description of the test location

Test location: Anechoic chamber 1
Test distance: 3 m

5.3.2 Photo documentation of the test setup

See Attachment B for detailed photo documentation of the test set-up.

5.3.3 Test result

Frequency range: 1 GHz - 40 GHz
Min. limit margin -1.9 dB at 28.8 GHz

Limit according to FCC Part 15, Section 15.109(a):

Frequency of emission (MHz)	Field strength @3m ($\mu\text{V/m}$)
Above 960	500

Limit according to ICES-003 3.2.2:

Frequency range (GHz)	Average @3m (dB $\mu\text{V/m}$)	Peak @3m (dB $\mu\text{V/m}$)
1 - 40	54	74



The requirements are **FULFILLED**.

Remarks: For detailed results, please see the following page(s).
For description of the measurement see 4.5.2.



5.3.4 Test protocol

Operation mode: Operation mode 1: Data communication with notebook via LAN + PoE power supply Result: passed

Remarks: None

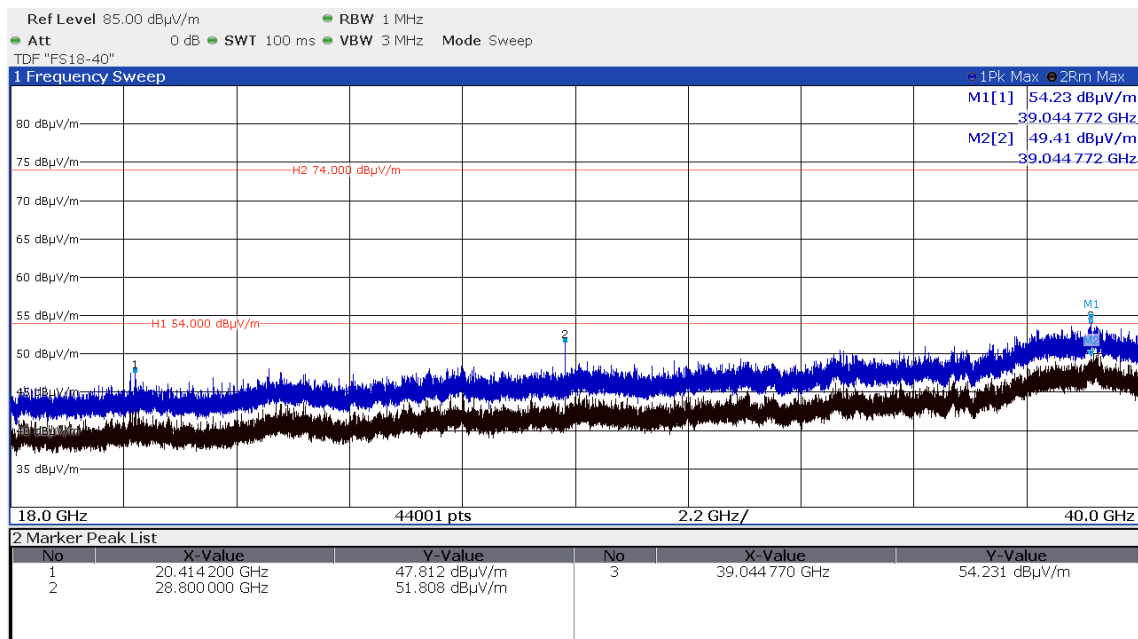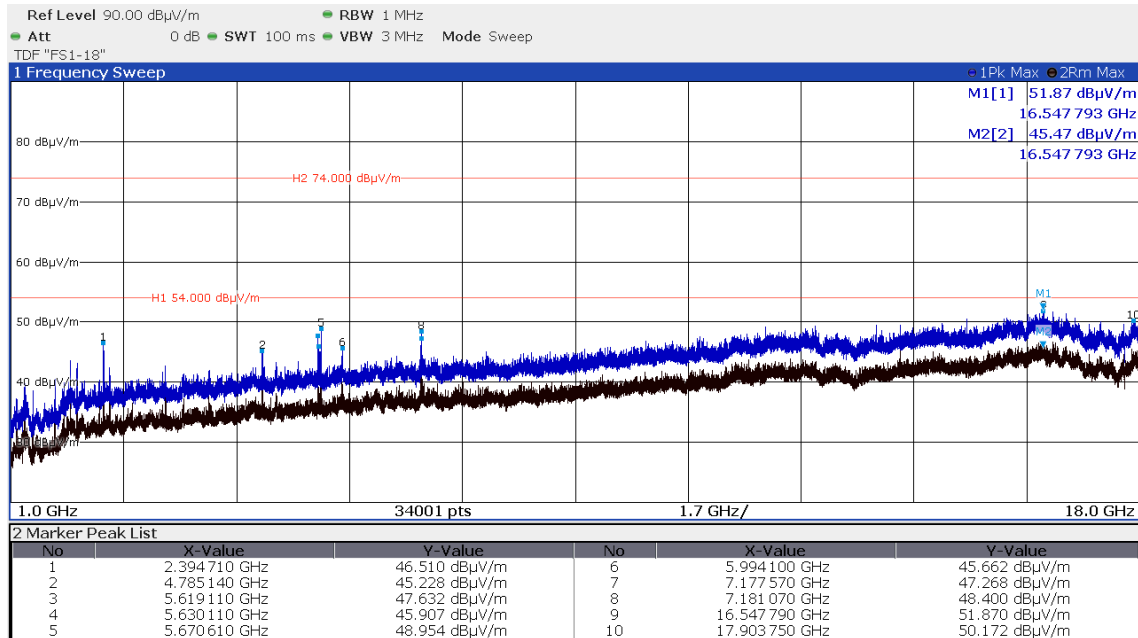

Operation mode: Operation mode 2: Data communication with Notebook Result: passed
via LAN + DC power supply
Remarks: None

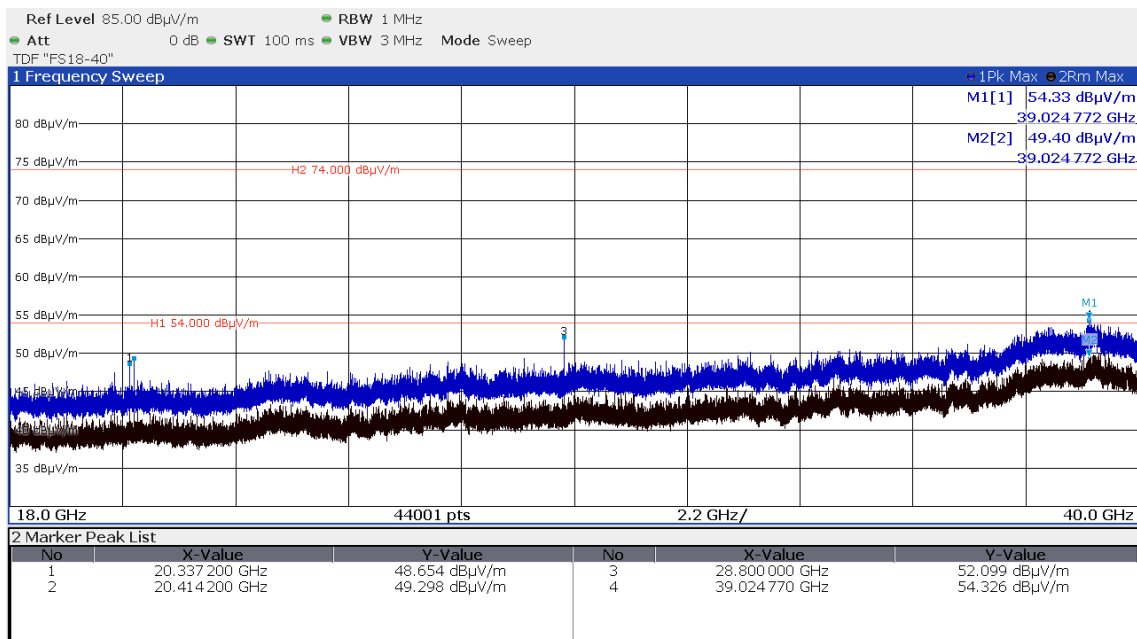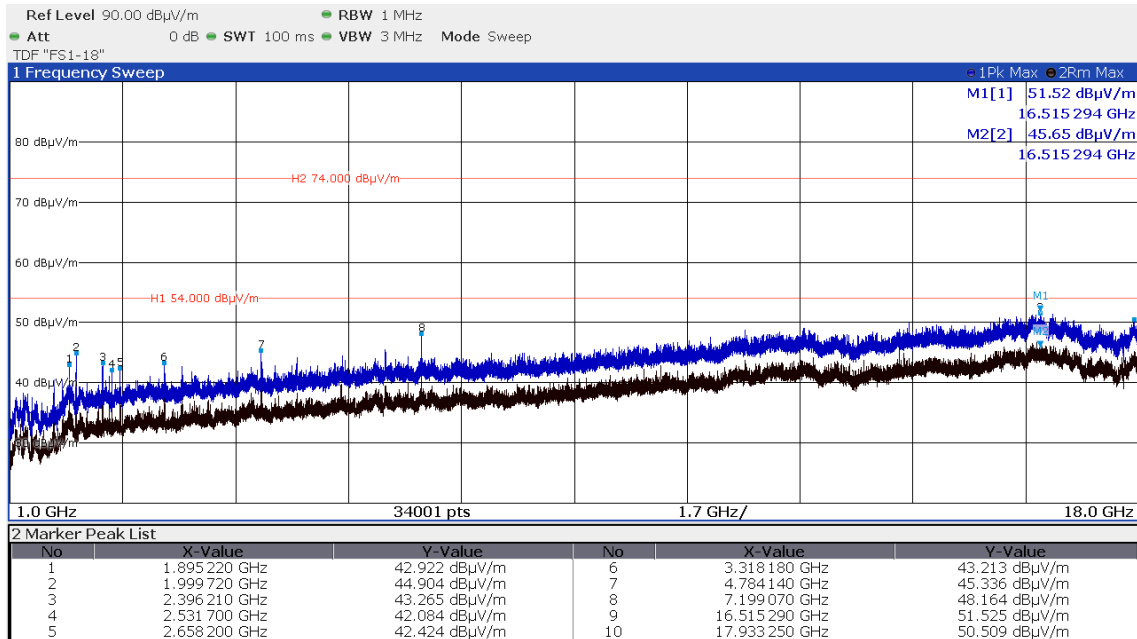

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

Test ID	Model Type	Kind of Equipment	Manufacturer	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	BAT-EMC 2022.0.23.0	Nexio Software	EMCO Elektronik GmbH	01-02/68-13-001				
	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-15-001	17/06/2023	17/06/2022		
	ESH 2 - Z 5	LISN	Rohde & Schwarz München	02-02/20-05-003	12/05/2023	12/05/2020	22/08/2023	22/02/2023
	ESH 2 - Z 5	LISN	Rohde & Schwarz München	02-02/20-05-004	13/10/2025	13/10/2022	17/10/2023	17/04/2023
	EMV D 30000/PAS	Testsystem	Spitzenberger + Spies	02-02/30-05-006	14/12/2025	14/12/2022	14/12/2023	14/12/2022
	N-4000-BNC	RF Cable	CSA Group Bayern GmbH	02-02/50-05-138				
	ESH 3 - Z 2	Pulse Limiter	Rohde & Schwarz München	02-02/50-05-185	27/10/2025	27/10/2022	27/04/2023	27/10/2022
	6430	Programmable AC Sourc	Power Control Electronic G	02-02/50-13-014				
A 5	ESR 7	EMI Test Receiver	Rohde & Schwarz München	02-02/03-17-001	05/08/2023	05/08/2022		
	VULB 9168	Trilog Broadband Antenn	Schwarzbeck Mess-Elektron	02-02/24-05-005	20/12/2022	20/12/2021	03/07/2023	03/07/2022
	EMV D 30000/PAS	Testsystem	Spitzenberger + Spies	02-02/30-05-006	21/08/2023	21/08/2020	05/01/2023	05/08/2021
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	RF Cable 20m	Huber + Suhner	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	RF Cable 33 m	Huber + Suhner AG	02-02/50-15-028				
	50F-003 N 3 dB	Dämpfungsglied 3dB_5	Tactron Elektronik	02-02/50-21-010				
SER 3	FSW43	Spectrum Analyser	Rohde & Schwarz München	02-02/11-15-001	22/04/2023	22/04/2022		
	AMF-6D-01002000-22-10P	RF Amplifier	MITEQ, Inc.	02-02/17-15-004				
	LNA-40-18004000-33-5P	Amplifier 18-40 GHz	MITEQ, Inc.	02-02/17-20-002				
	3117	Horn Antenna 1 - 18 GH	EMCO Elektronik GmbH	02-02/24-05-009	23/06/2023	23/06/2022		
	BBHA 9170	SHF-EHF Horn Antenna	Schwarzbeck Mess-Elektron	02-02/24-05-013	19/05/2023	19/05/2020	10/03/2023	10/03/2022
	EMV D 30000/PAS	Testsystem	Spitzenberger + Spies	02-02/30-05-006	21/08/2023	21/08/2020	05/01/2023	05/08/2021
	BAM 4.5-P	Antenna Mast	maturo GmbH	02-02/50-17-024				
	NCD	Controller for Antenna M	maturo GmbH	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	RF Cable	Huber + Suhner	02-02/50-18-016				
	KMS116-GL140SE-KMS116	Cable DC-40GHz	GigaLane Co., Ltd.	02-02/50-20-026				

Note: A4 performed on 17.04.2023, A5 + SER3 performed between 7.12.2022 and 14.12.2022

7 Detailed measurement uncertainty

7.1 Overview

Measurement instrumentation uncertainty shall be taken into account when determining compliance or non-compliance with a disturbance limit.

The measurement instrumentation uncertainty for a test laboratory shall be evaluated. The standard uncertainty $u(x_i)$ in decibels and the sensitivity coefficient c_i shall be evaluated for the estimate x_i of each quantity. The combined standard uncertainty $u_c(y)$ of the estimate y of the measurand shall be calculated as

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

The expanded measurement instrumentation uncertainty U_{lab} for a test laboratory shall be calculated as $U_{lab} = 2 u_c(y)$

$$U_{lab} = 2 u_c(y)$$

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} in the table below, then:

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} in the table below, then:

- compliance is deemed to occur if no measured disturbance, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.
- non-compliance is deemed to occur if any measured disturbance, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

7.2 Definitions and symbols

X_i	Input quantity
x_i	estimate of X_i
$u(x_i)$	standard uncertainty of x_i
c_i	sensitivity coefficient
$u_c(y)$	(combined) standard uncertainty of y
Y	result of a measurement, (the estimate of the measured), corrected for all recognised significant systematic effects
U	expanded uncertainty of y

7.3 Measurement uncertainty

Measurement	U_{lab} [dB]
Conducted disturbance	+ 2.53 / - 2.77
Radiated disturbance (electric field)	
- 10 m test distance	+ 3.16 / - 3.22
- 3 m test distance	+ 3.16 / - 3.22
- Frequency range: 30 MHz – 200 MHz	
Radiated disturbance (electric field)	
- 10 m test distance	+ 4.51 / - 4.51
- 3 m test distance	+ 4.51 / - 4.51
- Frequency range: 200 MHz – 1000 MHz	
Radiated disturbance (electric field)	
- 3 m test distance	+ 5.07 / - 3.70
- Frequency range: 1 GHz – 30 GHz	