


Exemplary nominal labels for R series of balances

 www.radwag.com	RADWAG Balances & Scales Made in Poland (EU)	
Model: AS 82/200.R2 PLUS S/N: 123456		
Max 82/220g Min 1mg d = 0,01/0,1mg e = 1mg T = - 220g Certificate number: xx-xxx Temperature range: +10°C to +40°C (50°F to 104°F)		 Wi-Fi
FCC ID: 2AXRT-ASPSR (Contains FCC ID:2AHMR-ESP12F) Regional distribution center: RADWAG USA LLC Tel +1 305 651 3522 / Fax +1 305 651 3523 office@radwagusa.com, www.radwagusa.com	 	xxxx


 www.radwag.com	RADWAG Balances & Scales Made in Poland (EU)	
Model: PS 750.R2 S/N: 123456		
Max 750g Min 20mg d = 0,001g e = 0,01g T = - 750g Certificate number: xx-xxx Temperature range: +10°C to +40°C (50°F to 104°F)		 Wi-Fi
FCC ID: 2AXRT-ASPSR (Contains FCC ID:2AHMR-ESP12F) Regional distribution center: RADWAG USA LLC Tel +1 305 651 3522 / Fax +1 305 651 3523 office@radwagusa.com, www.radwagusa.com	 	xxxx

 www.radwag.com	RADWAG Balances & Scales Made in Poland (EU)	
Model: PS 8100.R2.M S/N: 123456		
Max 8100g Min 500mg d = 0,01g e = 0,1g T = - 8100g Certificate number: xx-xxx Temperature range: +10°C to +40°C (50°F to 104°F)		 Wi-Fi
FCC ID: 2AXRT-ASPSR (Contains FCC ID:2AHMR-ESP12F) Regional distribution center: RADWAG USA LLC Tel +1 305 651 3522 / Fax +1 305 651 3523 office@radwagusa.com, www.radwagusa.com	 	xxxx


Placemant of nominal labels on devices

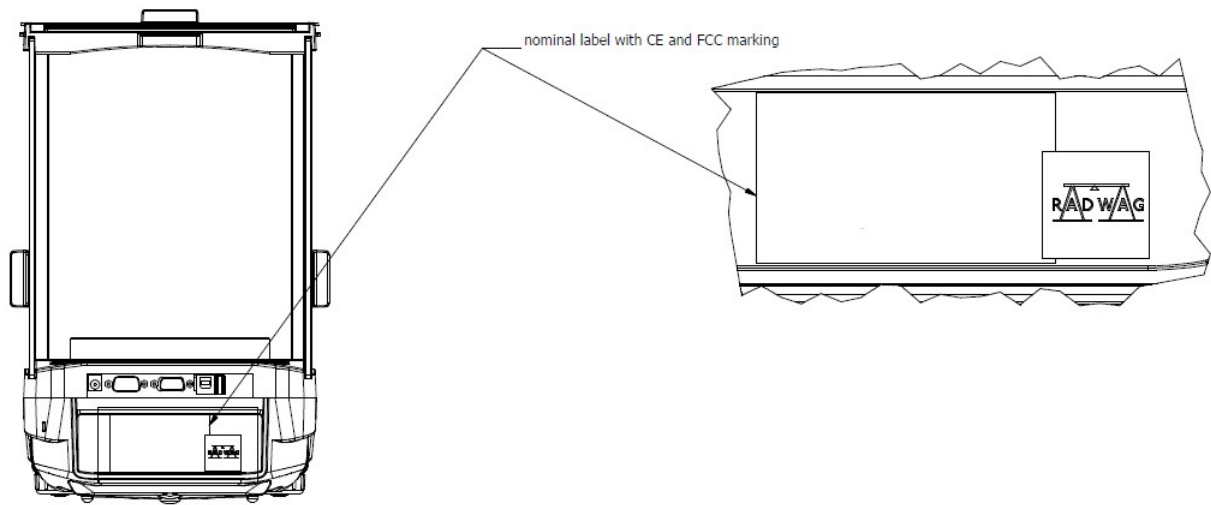

AS R label placement

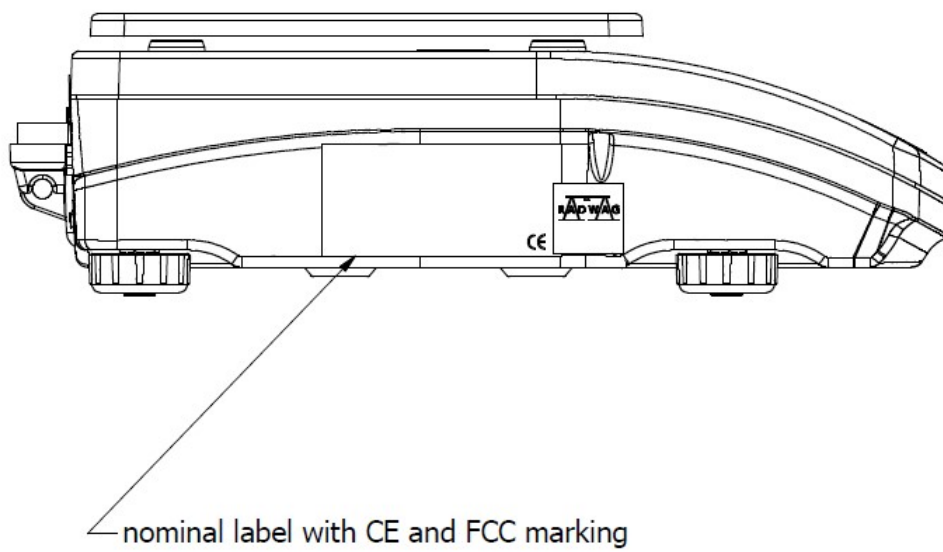

PS R label placement

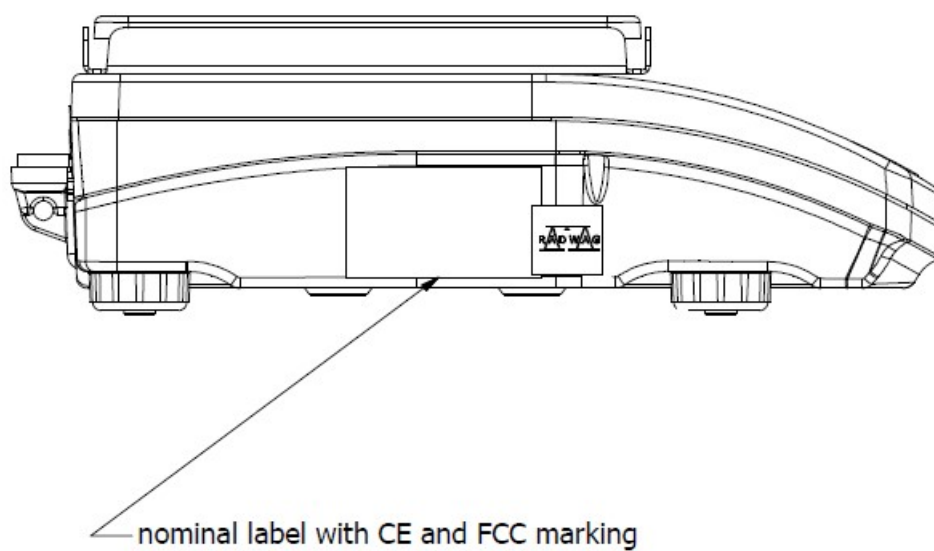

PS R.M label placement