

Test Report No:
2570531R-RFUSV01S-A

TEST REPORT

FCC Rules&Regulations

Product Name	Pyxis Duo
Brand Name	
Model No.	Pyxis Duo RB701, Pyxis Duo
FCC ID	2AXTDPYXISDUO
Applicant's Name / Address	Ubiik Inc. 19F., No. 17, Sec. 1, Chengde Rd., Datong Dist., Taipei City 103, Taiwan (R.O.C.)
Manufacturer's Name / Address	Ubiik Inc. 19F., No. 17, Sec. 1, Chengde Rd., Datong Dist., Taipei City 103, Taiwan (R.O.C.)
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10-2013
Verdict Summary	IN COMPLIANCE
Documented By	 Jennie She
Approved By	 Allen Lin
Date of Receipt	Jul. 17, 2025
Date of Issue	Oct. 08, 2025
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	4
General Conditions	4
Revision History	5
Summary of Test Result.....	6
Comments and Remarks	6
1. General Information.....	7
1.1. EUT Description	7
1.2. EUT Information	9
1.3. Testing Applied Standards.....	9
1.4. Testing Location Information	10
1.5. Measurement Uncertainty	10
1.6. List of Test Equipment	11
2. Test Configuration of EUT	12
2.1. Test Condition.....	12
2.2. Test Frequency Mode	12
2.3. Duty Cycle	13
2.4. The Worst Case Measurement Configuration.....	14
2.5. Tested System Details.....	15
2.6. Configuration of Tested System	15
3. AC Power Line Conducted Emission	17
3.1. Test Setup	17
3.2. Test Limit	17
3.3. Test Procedure	17
3.4. Test Result of AC Power Line Conducted Emission	17
4. Occupied Bandwidth & DTS Bandwidth.....	18
4.1. Test Setup	18
4.2. Test Limit	18
4.3. Test Procedures	18
4.4. Test Result of Occupied Bandwidth & DTS Bandwidth.....	18
5. Maximum Conducted Output Power	19
5.1. Test Setup	19
5.2. Test Limit	19
5.3. Test Procedures	19
5.4. Test Result of Maximum Conducted Output Power	19
6. Maximum Power Spectral Density	20
6.1. Test Setup	20

6.2.	Test Limit	20
6.3.	Test Procedures	20
6.4.	Test Result of Maximum Power Spectral Density	20
7.	Antenna Port Conducted Emission	21
7.1.	Test Setup	21
7.2.	Test Limit	21
7.3.	Test Procedure	21
7.4.	Test Result of Antenna Port Conducted Emission	21
8.	Transmitter Radiated Spurious Emission	22
8.1.	Test Setup	22
8.2.	Test Limit	23
8.3.	Test Procedure	23
8.4.	Test Result of Transmitter Radiated Spurious Emission (Below 30 MHz)	24
8.5.	Test Result of Transmitter Radiated Spurious Emission	24
Appendix A. Test Result of AC Power Line Conducted Emission		
Appendix B. Test Result of Occupied Bandwidth & DTS Bandwidth		
Appendix C. Test Result of Maximum Conducted Output Power		
Appendix D. Test Result of Maximum Power Spectral Density		
Appendix E. Test Result of Antenna Port Conducted Emission		
Appendix F. Test Result of Transmitter Radiated Spurious Emission		
Appendix G. Test Setup Photograph		

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Oct. 08, 2025

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
3	AC Power Line Conducted Emission	PASS	-
4	Occupied Bandwidth & DTS Bandwidth	PASS	-
5	Maximum Conducted Output Power	PASS	-
6	Maximum Power Spectral Density	PASS	-
7	Antenna Port Conducted Emission	PASS	-
8	Transmitter Radiated Spurious Emission	PASS	-

Note:

For model Pyxis Duo RB701, it contains a certified WWAN module (model: GCM4701NA, FCC ID: 2BGOOGCM4701NA).

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1. General Information

1.1. EUT Description

Frequency Range	2400 ~ 2483.5 MHz	
Operating Frequency	IEEE 802.11b/g IEEE 802.11n/ax, VHT (20 MHz)	2412 ~ 2462 MHz
	IEEE 802.11n/ax, VHT (40 MHz)	2422 ~ 2452 MHz
Channel Number	IEEE 802.11b/g IEEE 802.11n/ax, VHT (20 MHz)	11 Channels
	IEEE 802.11n/ax, VHT (40 MHz)	7 Channels
Type of Modulation	IEEE 802.11b	DSSS-DBPSK, DQPSK, CCK
	IEEE 802.11g/n	OFDM-BPSK, QPSK, 16QAM, 64QAM
	IEEE 802.11ax	OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
	VHT	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM

<For Model: Pyxis Duo RB701>

Accessories Information					
No.	Equipment Name	Brand Name	Model No.	Rating	Remark
1	Power Adapter	Ktec	KSA-36W-120300D5	INPUT: 100-240V, 1A, 50-60Hz OUTPUT: 12V, 3A, 36W	With power cable: Non-Shielded, 1.5m
No.	Equipment Name	Brand Name	Model No.	Description	
2	Ethernet Cable	NIENYI	0572-1150000002	Non-Shielded, 1.5m	
3	GPIO and Power Cable	U-MEDIA	0573-1200090003	Non-Shielded, 2m	

For SRD / WWAN Function:**<For Model: Pyxis Duo RB701>**

Antenna Information							
Ant.	Brand Name	Model No.	Type	Antenna Gain (dBi)	Cable Loss (dB)	Actual Gain (dBi)	Remark
1	Dawn Communication Co., Ltd.	DB-896-960V-13-75-NV2	Panel	13	0.39	12.61	with cable, Not included with the product
2	JOYMAX ELECTRONICS CO., LTD.	ZWX-715BS A5B-1264	Dipole	1.2	-	-	Included with the product

Note:

1. The EUT supports the 1TX function.
2. The EUT has 2 antennas, and only Ant. 1 is the highest gain and be evaluated.
3. Although the antenna 1 is not included in the shipment, it has been documented in this report as per the manufacturer's request.

For WiFi 2.4G Function:**<For Model: Pyxis Duo RB701>**

Antenna Information					
Ant.	Brand Name	Model No.	Type	Antenna Gain (dBi)	Remark
1	JOYMAX ELECTRONICS CO., LTD.	IWX-1511RSJX-999	Dipole	5	Included with the product

For GNSS Function:**<For Model: Pyxis Duo RB701>**

Antenna Information					
Ant.	Brand Name	Model No.	Type	Antenna Gain (dBi)	Remark
1	Jinchang	JCA211Magnet	RHCP	2	Included with the product
2	INPAQ	ENS000041280	RHCP	4.87	Not included with the product

Note:

Although the antenna 1 is not included in the shipment, it has been documented in this report as per the manufacturer's request.

The difference for each model is shown as below:

Model No.	Description			
Pyxis Duo RB701	Contain a certified WWAN module. The details are provided below.			
	Brand Name	Model No.	FCC ID	Bands
	CM PARTNER	GCM4701NA	2BGOOGCM4701NA	LTE Band 48
				LTE Band 54
Pyxis Duo	Identical except without the WWAN module.			

From the above models, model: Pyxis Duo RB701 was selected as representative model for the test, and its data was recorded in this report.

1.2. EUT Information

EUT Power Type	From Adapter / DC Power			
EUT Function	☒	Point-to-multipoint	☐	Point-to-point
Beamforming Function	☐	With beamforming	☒	Without beamforming
Resource Unit of 802.11ax	☒	Full RU	☐	Partial RU

1.3. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 558074 D01 v05r02

1.4. Testing Location Information

Testing Location Information		
Test Laboratory : DEKRA Testing and Certification Co., Ltd.		
1 (TAF: 3024)	ADD: No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958 Test site Designation No. TW3024 with FCC. Conformity Assessment Body Identifier (CABID) TW3024 with ISED.	
2 (TAF: 3024)	ADD: No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958 Test site Designation No. TW3024 with FCC. Conformity Assessment Body Identifier (CABID) TW3024 with ISED.	
Test site number for address 1 includes HC-SR02 and HC-CB10. Test site number for address 2 includes HC-CB02, HC-CB03, HC-CB04, HC-SR10 and HC-SR12.		

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
AC Conduction Emission	HC-SR02	Brook Cheng	21 / 57	2025/09/04
RF Conducted Emission	HC-SR12	Kevin Teng	24.4 / 50	2025/08/15
Radiated Emission	HC-CB02	Brook Cheng	21~23 / 57~68	2025/09/01~2025/09/30

1.5. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Test Item	Uncertainty
AC Power Line Conducted Emission	± 2.34 dB
Occupied Bandwidth & DTS Bandwidth	± 282.55 Hz
Maximum Conducted Output Power	± 1.16 dB
Maximum Power Spectral Density	± 2.47 dB
Antenna Port Conducted Emission	± 2.47 dB
Transmitter Radiated Spurious Emission	± 3.52 dB below 1 GHz ± 3.56 dB above 1 GHz

1.6. List of Test Equipment

HC-SR02

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Artificial Mains Network	R&S	ENV4200	848411/010	9kHz-30MHz, 4line/100A	2024/12/02	2025/12/01
EMI Test Receiver	R&S	ESR3	102608	9 kHz - 3.6 GHz	2024/09/11	2025/09/10
Two-Line V-Network	R&S	ENV216	100096	9kHz-30MHz	2025/06/26	2026/06/25
Coaxial Cable(9 m)	Harbour	RG-400	HC-SR02	9 kHz–2500 MHz	2025/08/15	2026/08/15
EMI Testing System	Audix	e3 210616 dekra V9	HC-SR02	N/A	N/A	N/A

HC-SR12

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101869	10Hz-40GHz	2025/06/17	2026/06/16
High Speed Peak Power Meter Dual Input	Anritsu	ML2496A	1602004	0.3-40 GHz	2024/10/29	2025/10/28
Pulse Power Sensor	Anritsu	MA2411B	1531043	0.3-40 GHz	2024/10/29	2025/10/28

HC-CB02

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Trilog Broadband Antenna	Schwarzbeck	VULB 9168	1272	30 MHz-2 GHz	2025/05/13	2026/05/12
Double Ridged Horn Antenna	RF SPIN	DRH18-E	211211A18EN	1G-18GHz	2024/11/08	2025/11/07
Pre-Amplifier	EMCI	EMC01820I	980365	30M-8 GHz,20 dB	2025/03/20	2026/03/19
Pre-Amplifier	EMEC	EM01G18GA	060741	1G-18 GHz,50 dB	2025/04/14	2026/04/13

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition	
Testing Voltage	AC 120V/60Hz

2.2. Test Frequency Mode


Test Software Version	TeraTerm v5.4
-----------------------	---------------

Modulation	Frequency (MHz)	Power Setting
802.11b	2412	22.5
	2437	25.0
	2462	22.0
802.11g	2412	25.5
	2437	26.0
	2462	24.0
802.11ax (20 MHz)	2412	25.5
	2437	25.5
	2462	22.0
802.11ax (40 MHz)	2422	23.0
	2437	25.5
	2452	21.5

2.3. Duty Cycle

Modulation	On Times (ms)	On+Off Times (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	0.675	1.175	57.45	2.407	1.481
802.11g	1.960	2.070	94.69	0.237	0.510
802.11ax (20 MHz)	5.400	5.880	91.84	0.370	0.185
802.11ax (40 MHz)	5.420	5.900	91.86	0.369	0.185

Note: The duty factor will compensate for the total power and power spectral density.

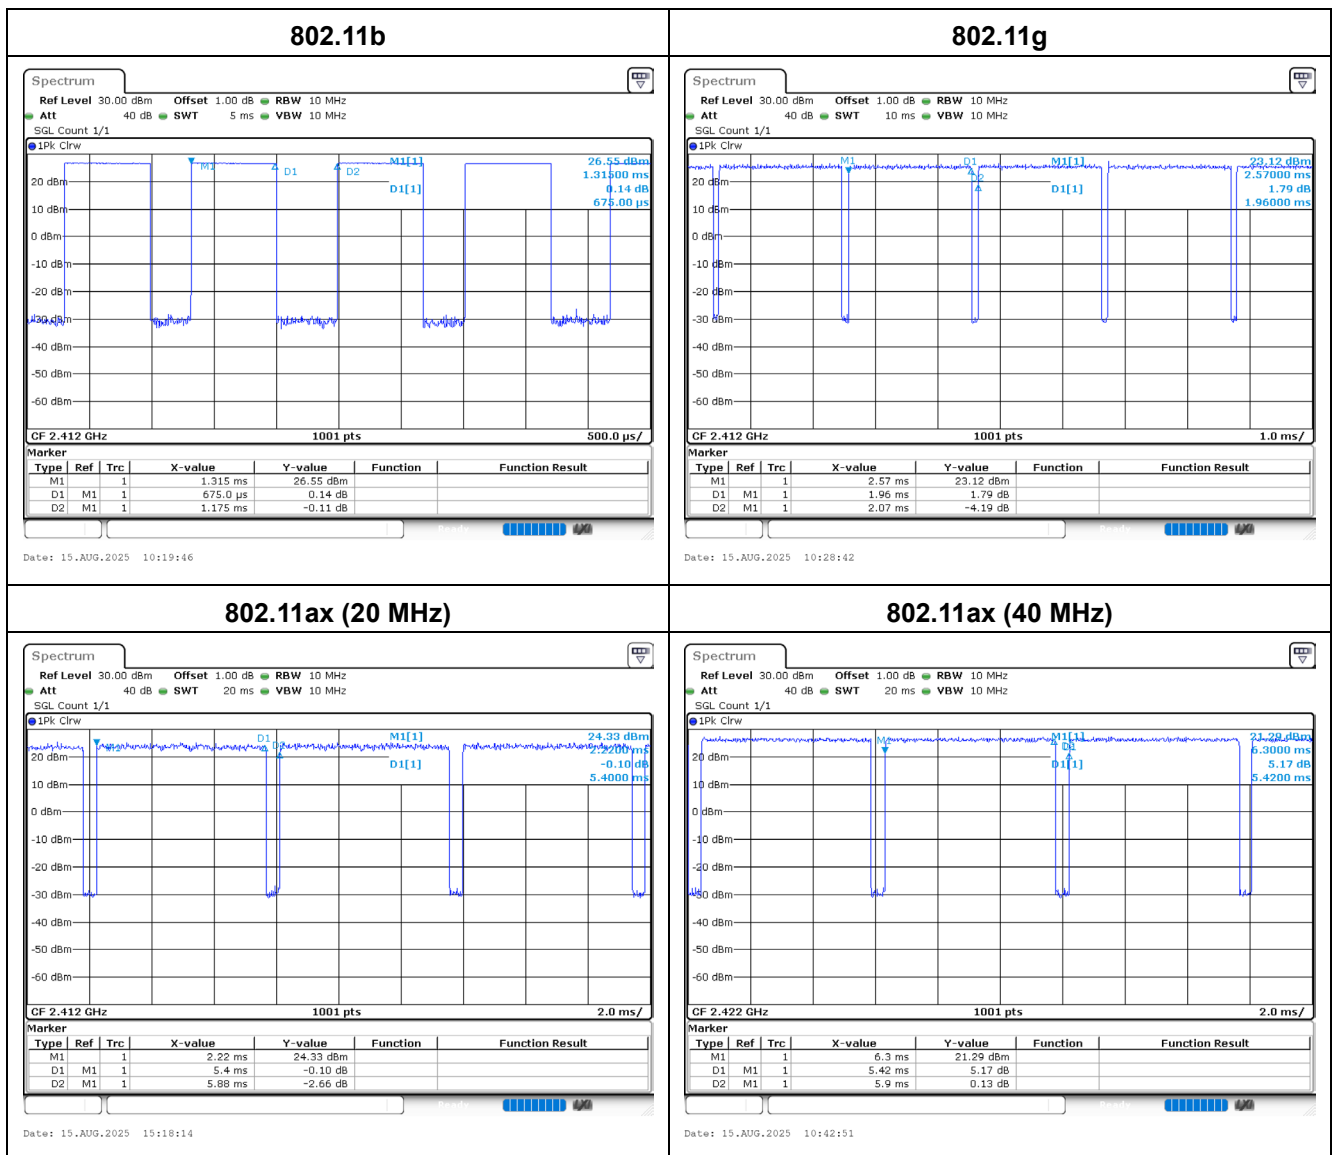

2.4. The Worst Case Measurement Configuration

Tests Item	AC Power Line Conducted Emission
Test Condition	AC power line conducted measurement for line and neutral
Operating Mode	Transmit
1	EUT + Power Adapter

Tests Item	Occupied Bandwidth & DTS Bandwidth Maximum Conducted Output Power Maximum Power Spectral Density Antenna Port Conducted Emission
Test Condition	Conducted measurement at transmit chains

Tests Item	Transmitter Radiated Spurious Emission
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Transmit
1	EUT + Power Adapter
2	EUT + GPIO and Power Cable
Operating Mode > 1GHz	Transmit
1	EUT + Power Adapter

The EUT was performed at X axis, Y axis and Z axis position for radiated spurious emission test.
The worst case was found at X axis, so the measurement will follow this same test configuration.

Note:

4. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
5. For radiated spurious emission below 1 GHz and AC power line conducted emission have performed all modes of operation were investigated and the worst-case emissions are reported.
6. The modulation and bandwidth are similar for 802.11n mode for HT20/HT40, VHT mode for VHT20/VHT40 and 802.11ax mode for HEW20/HEW40, therefore investigated worst case to representative mode in test report.
7. The EUT could be applied with WiFi 2.4 GHz and LTE certified module functions; therefore Co-location Maximum Permissible Exposure (please refer to DEKRA Test Report No.: 2570531R-RFUSV17S-A).

2.5. Tested System Details

Test Mode: Mode 1


No.	Equipment	Brand Name	Model No.	Serial No.
1	Notebook	DELL	Latitude E7440	9TN6YY1
2	50 ohm	-	-	-

Test Mode: Mode 2


No.	Equipment	Brand Name	Model No.	Serial No.
1	Notebook	DELL	Latitude E7440	9TN6YY1
2	50 ohm	-	-	-
3	Power Supply	Topward	6303D	809497

2.6. Configuration of Tested System

Test Mode: Mode 1

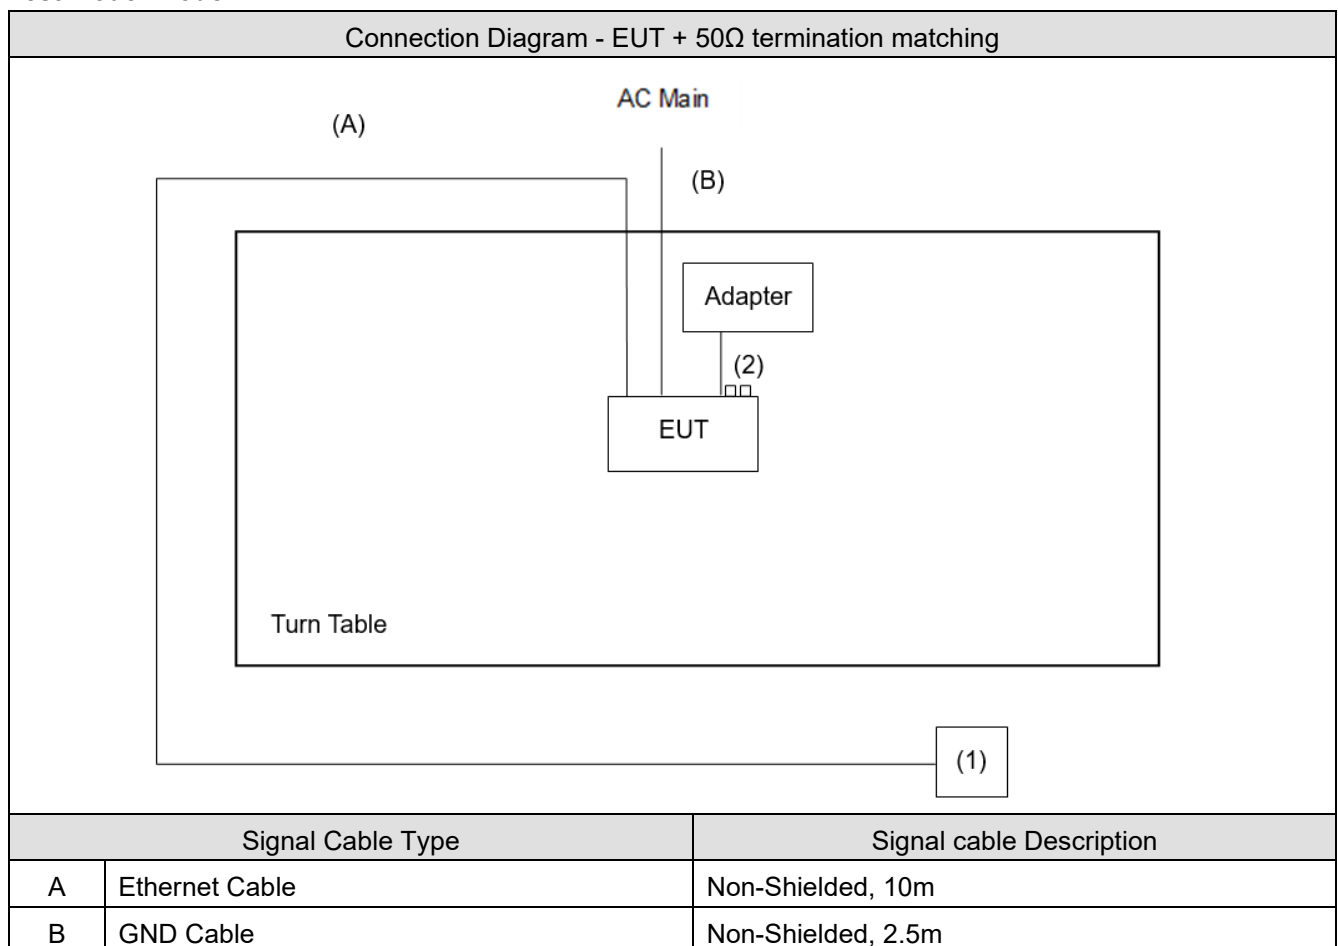


Test Mode: Mode 2

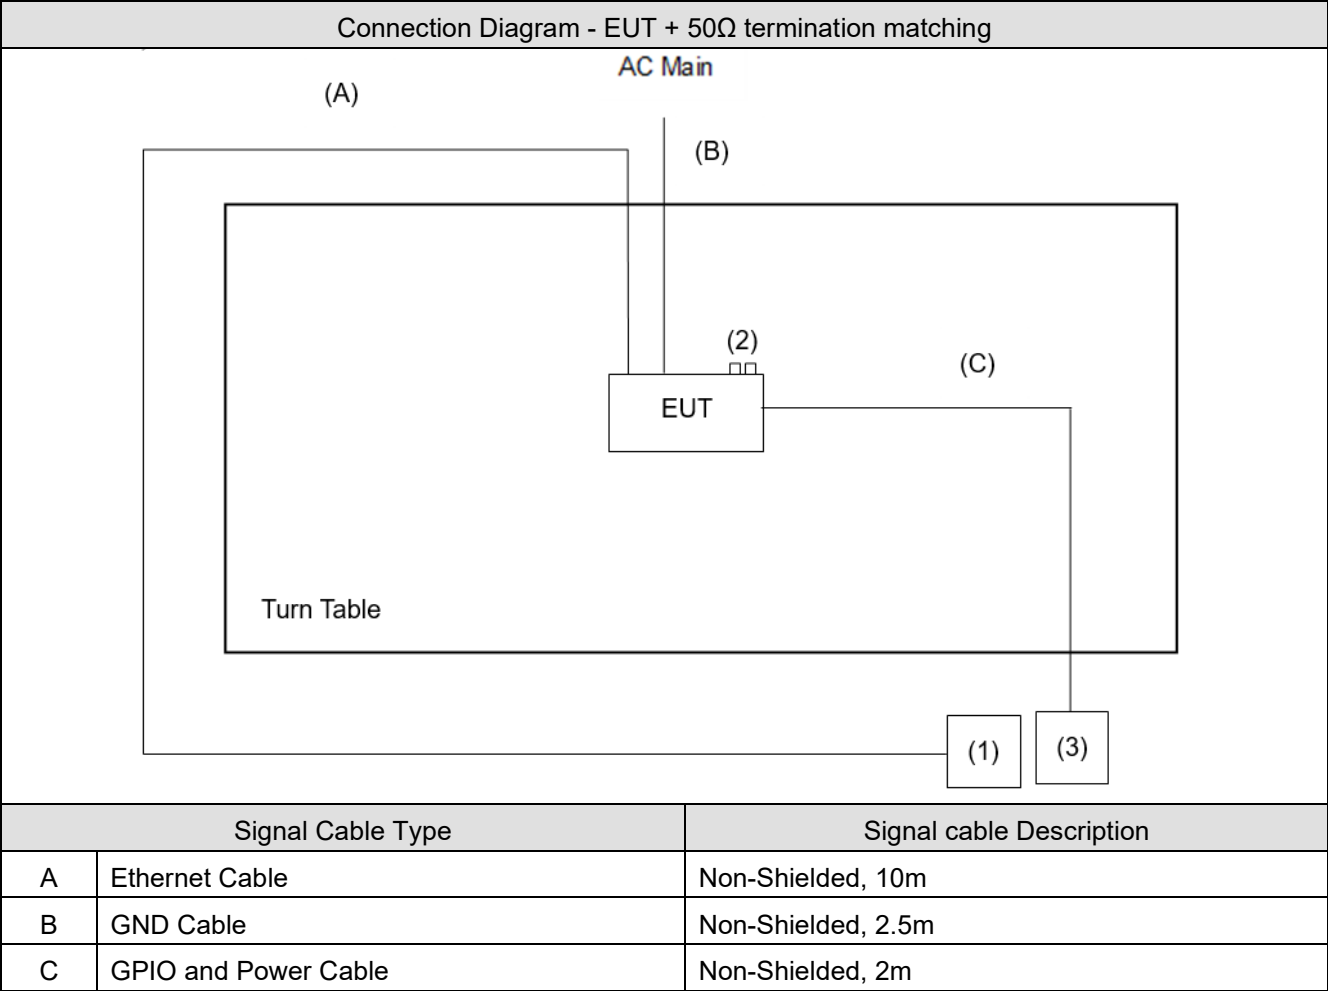

3. AC Power Line Conducted Emission

3.1. Test Setup

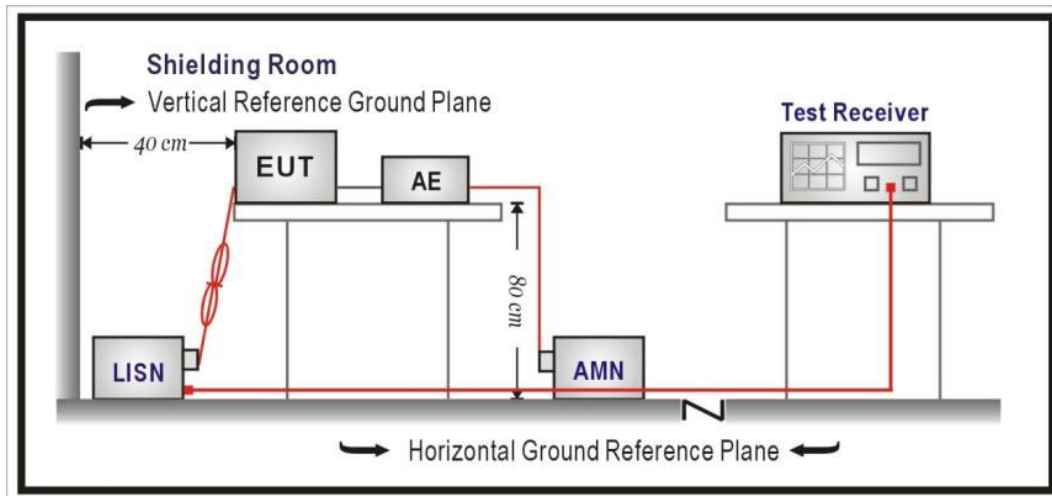

3.2. Test Limit

Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs.)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.

3.4. Test Result of AC Power Line Conducted Emission

Refer as Appendix A

4. Occupied Bandwidth & DTS Bandwidth

4.1. Test Setup

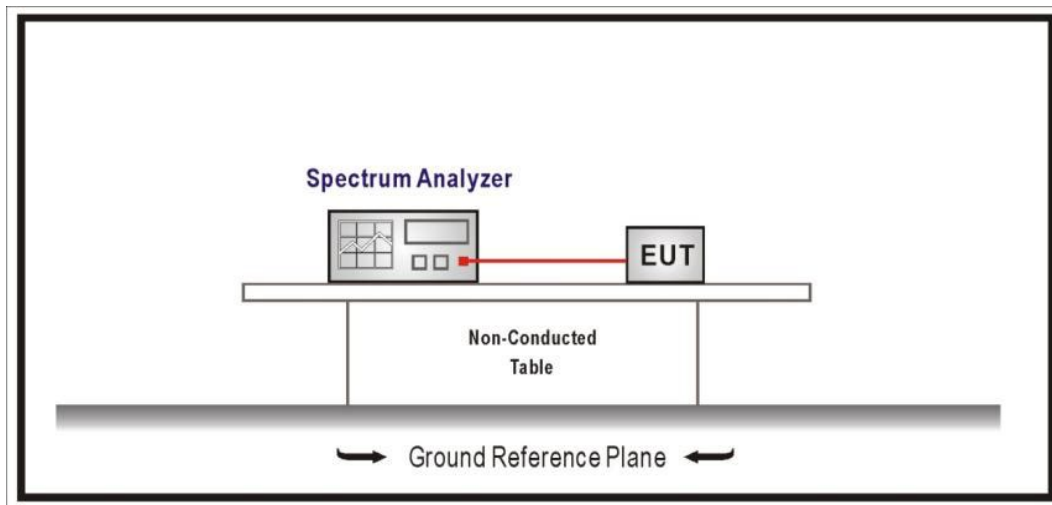

4.2. Test Limit

The 6 dB bandwidth: ≥ 0.50 MHz.

Occupied Bandwidth: N/A

4.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

4.4. Test Result of Occupied Bandwidth & DTS Bandwidth

Refer as Appendix B

5. Maximum Conducted Output Power

5.1. Test Setup

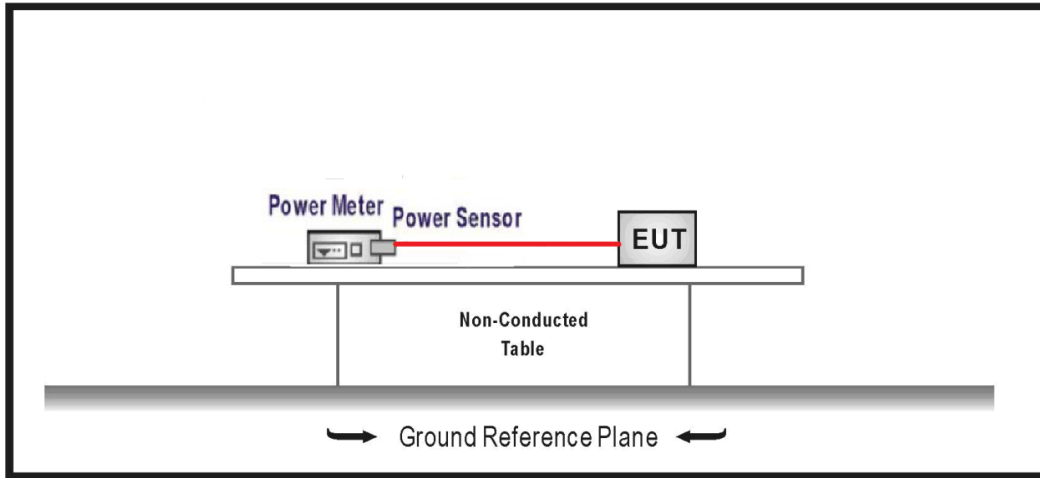

5.2. Test Limit

The maximum conducted output power shall be less 30 dBm (1 Watt).

5.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

5.4. Test Result of Maximum Conducted Output Power

Refer as Appendix C

6. Maximum Power Spectral Density

6.1. Test Setup

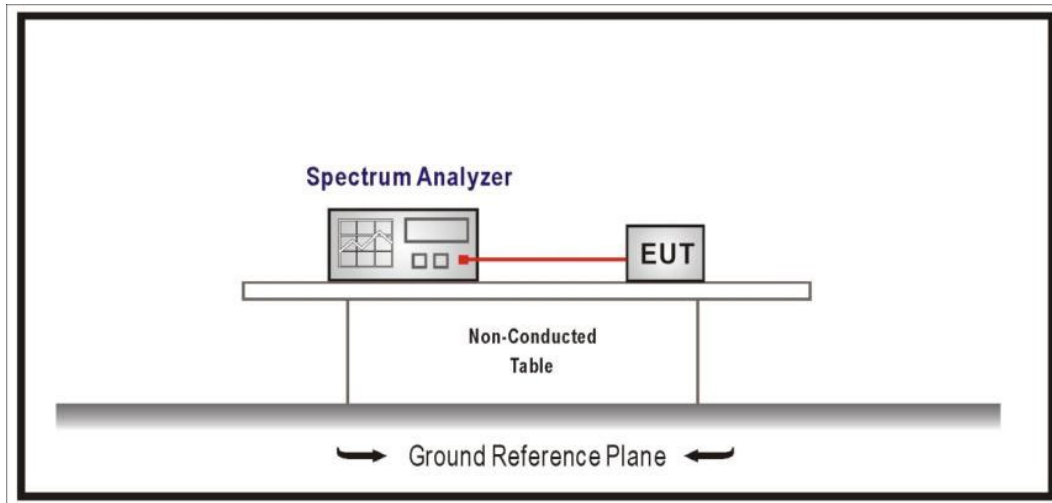

6.2. Test Limit

The peak power spectral density conducted from the intentional radiated to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

6.4. Test Result of Maximum Power Spectral Density

Refer as Appendix D

7. Antenna Port Conducted Emission

7.1. Test Setup

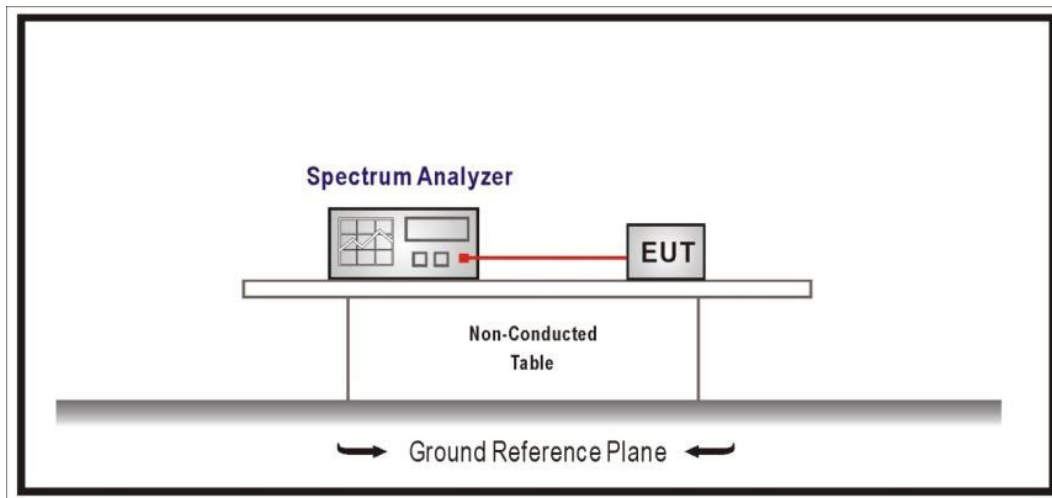

7.2. Test Limit

RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Remarks:

1. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limit.
2. If the transmitter complies with the conducted power limit based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074.


7.4. Test Result of Antenna Port Conducted Emission

Refer as Appendix E


8. Transmitter Radiated Spurious Emission

8.1. Test Setup


9 kHz ~ 30 MHz

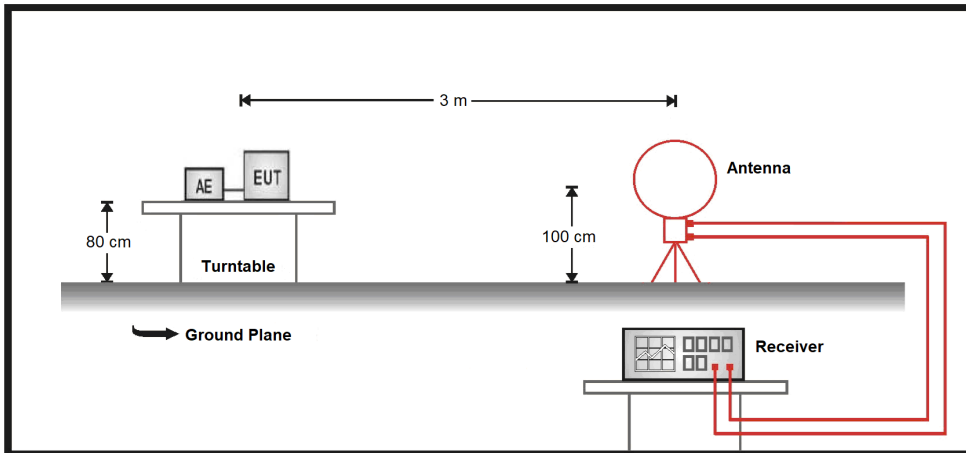

30 MHz ~ 1 GHz

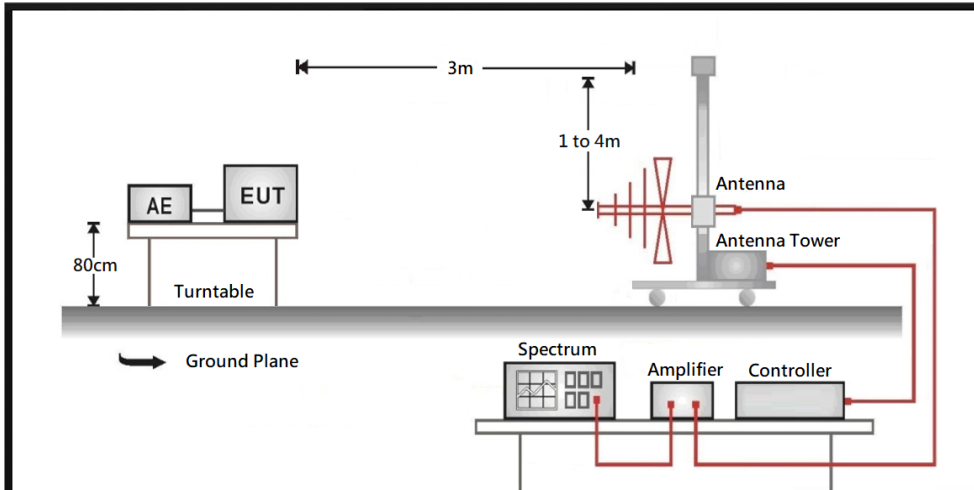

Above 1 GHz

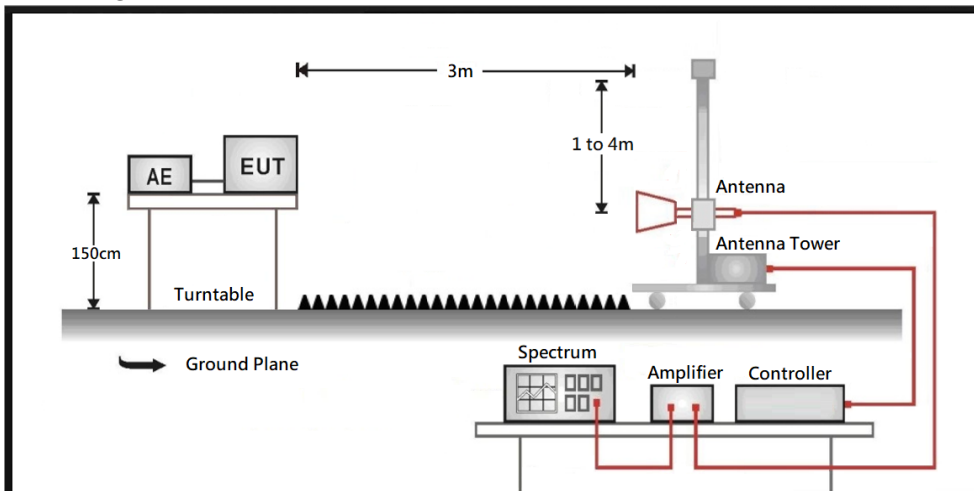

8.2. Test Limit

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074.

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

On any frequency or frequencies from 9 kHz(include The the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limit shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limit shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz and above 1 GHz is 1 MHz.

8.4. Test Result of Transmitter Radiated Spurious Emission (Below 30 MHz)


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8.5. Test Result of Transmitter Radiated Spurious Emission

Refer as Appendix F

Appendix A. Test Result of AC Power Line Conducted Emission

Test Mode	Transmit	Phase	Line
Test Condition	WIFI 2.4G_TX		

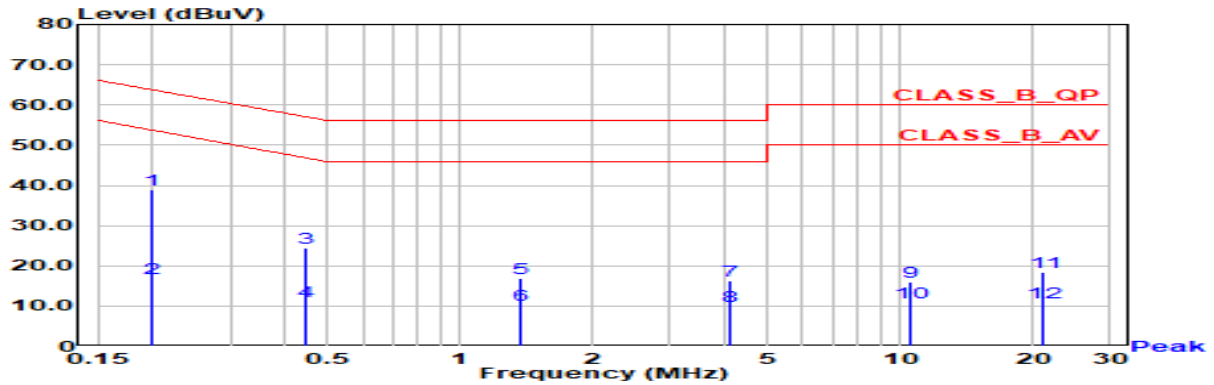


No	Frequency (MHz)	Emission Level (dBUV)	Limit (dBUV)	Margin (dB)	Reading Level (dBUV)	Correct Factor (dB)	Detector Type
*1	0.200	39.00	63.61	-24.61	29.38	9.61	QP
2	0.200	16.89	53.61	-36.72	7.28	9.61	AV
3	0.447	24.46	56.93	-32.47	14.81	9.65	QP
4	0.447	11.21	46.93	-35.72	1.56	9.65	AV
5	1.375	16.99	56.00	-39.01	7.27	9.72	QP
6	1.375	10.41	46.00	-35.59	0.69	9.72	AV
7	4.081	16.24	56.00	-39.76	6.39	9.85	QP
8	4.081	10.00	46.00	-36.00	0.15	9.85	AV
9	10.514	16.05	60.00	-43.95	5.95	10.10	QP
10	10.514	10.97	50.00	-39.03	0.87	10.10	AV
11	21.148	18.50	60.00	-41.50	8.12	10.38	QP
12	21.148	10.83	50.00	-39.17	0.45	10.38	AV

Note:

1. "*" means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor (Correct Factor = LISN Insertion Loss + Cable Loss).
3. Margin = Emission Level - Limit.

Test Mode	Transmit	Phase	Neutral
Test Condition	WIFI 2.4G_TX		

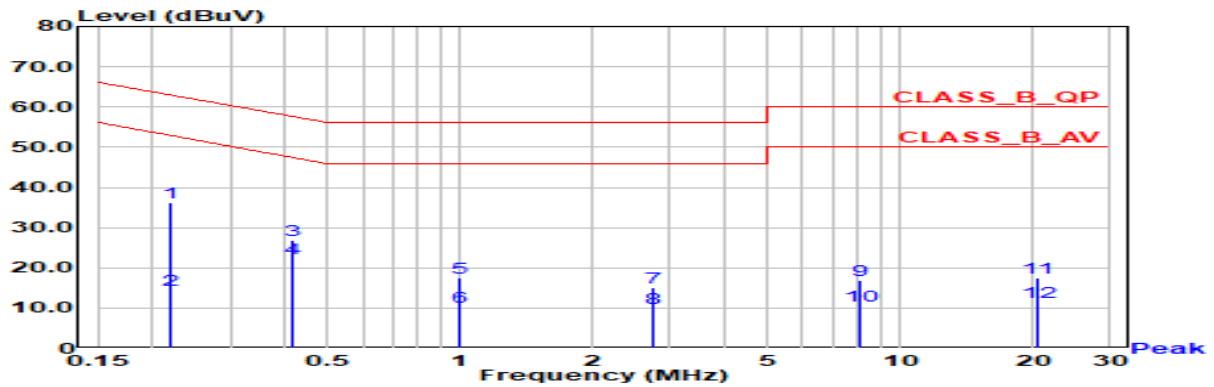

No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.219	36.28	62.85	-26.58	26.66	9.62	QP
2	0.219	14.49	52.85	-38.37	4.87	9.62	AV
3	0.418	26.94	57.50	-30.56	17.30	9.64	QP
*4	0.418	22.44	47.50	-25.06	12.79	9.64	AV
5	0.994	17.43	56.00	-38.57	7.73	9.70	QP
6	0.994	10.26	46.00	-35.74	0.56	9.70	AV
7	2.729	15.08	56.00	-40.92	5.29	9.78	QP
8	2.729	9.89	46.00	-36.11	0.10	9.78	AV
9	8.079	16.92	60.00	-43.08	6.90	10.01	QP
10	8.079	10.42	50.00	-39.58	0.41	10.01	AV
11	20.445	17.43	60.00	-42.57	7.06	10.37	QP
12	20.445	11.43	50.00	-38.57	1.07	10.37	AV

Note:


1. "*" means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor (Correct Factor = LISN Insertion Loss + Cable Loss).
3. Margin = Emission Level - Limit.

Appendix B.1 Test Result of Occupied Bandwidth


Modulation	Frequency (MHz)	Occupied Bandwidth (MHz)	Limit (MHz)
802.11b	2412	13.07	-
	2437	13.03	-
	2462	13.11	-
802.11g	2412	16.22	-
	2437	16.26	-
	2462	16.30	-
802.11ax (20 MHz)	2412	18.78	-
	2437	18.78	-
	2462	18.86	-
802.11ax (40 MHz)	2422	37.72	-
	2437	37.48	-
	2452	37.56	-

Spectrum plot of maximum value


802.11b / 2462 MHz

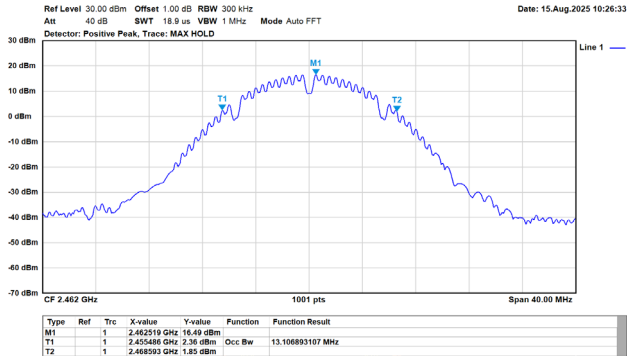


802.11g / 2462 MHz

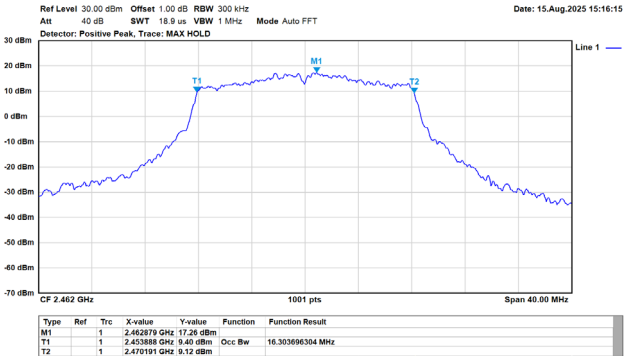

802.11ax (20 MHz) / 2462 MHz

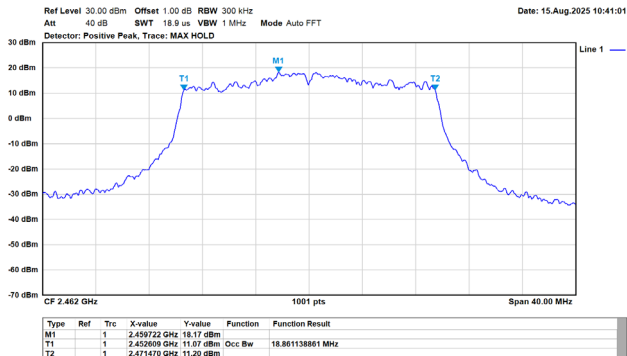


802.11ax (40 MHz) / 2422 MHz

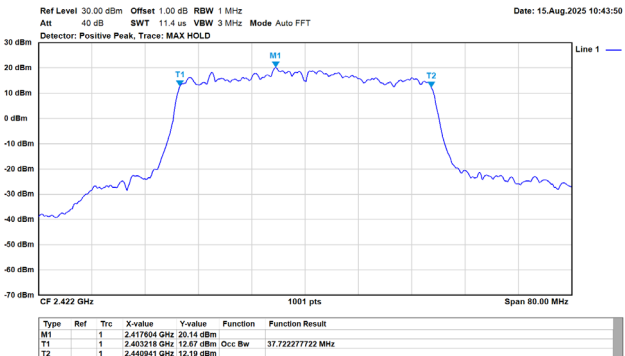

Appendix B.2 Test Result of DTS Bandwidth

Modulation	Frequency (MHz)	DTS Bandwidth (MHz)	Limit (MHz)	Result
802.11b	2412	8.04	0.50	Pass
	2437	8.04	0.50	Pass
	2462	8.04	0.50	Pass
802.11g	2412	15.04	0.50	Pass
	2437	15.08	0.50	Pass
	2462	15.08	0.50	Pass
802.11ax (20 MHz)	2412	13.80	0.50	Pass
	2437	13.84	0.50	Pass
	2462	17.92	0.50	Pass
802.11ax (40 MHz)	2422	36.56	0.50	Pass
	2437	26.48	0.50	Pass
	2452	34.00	0.50	Pass

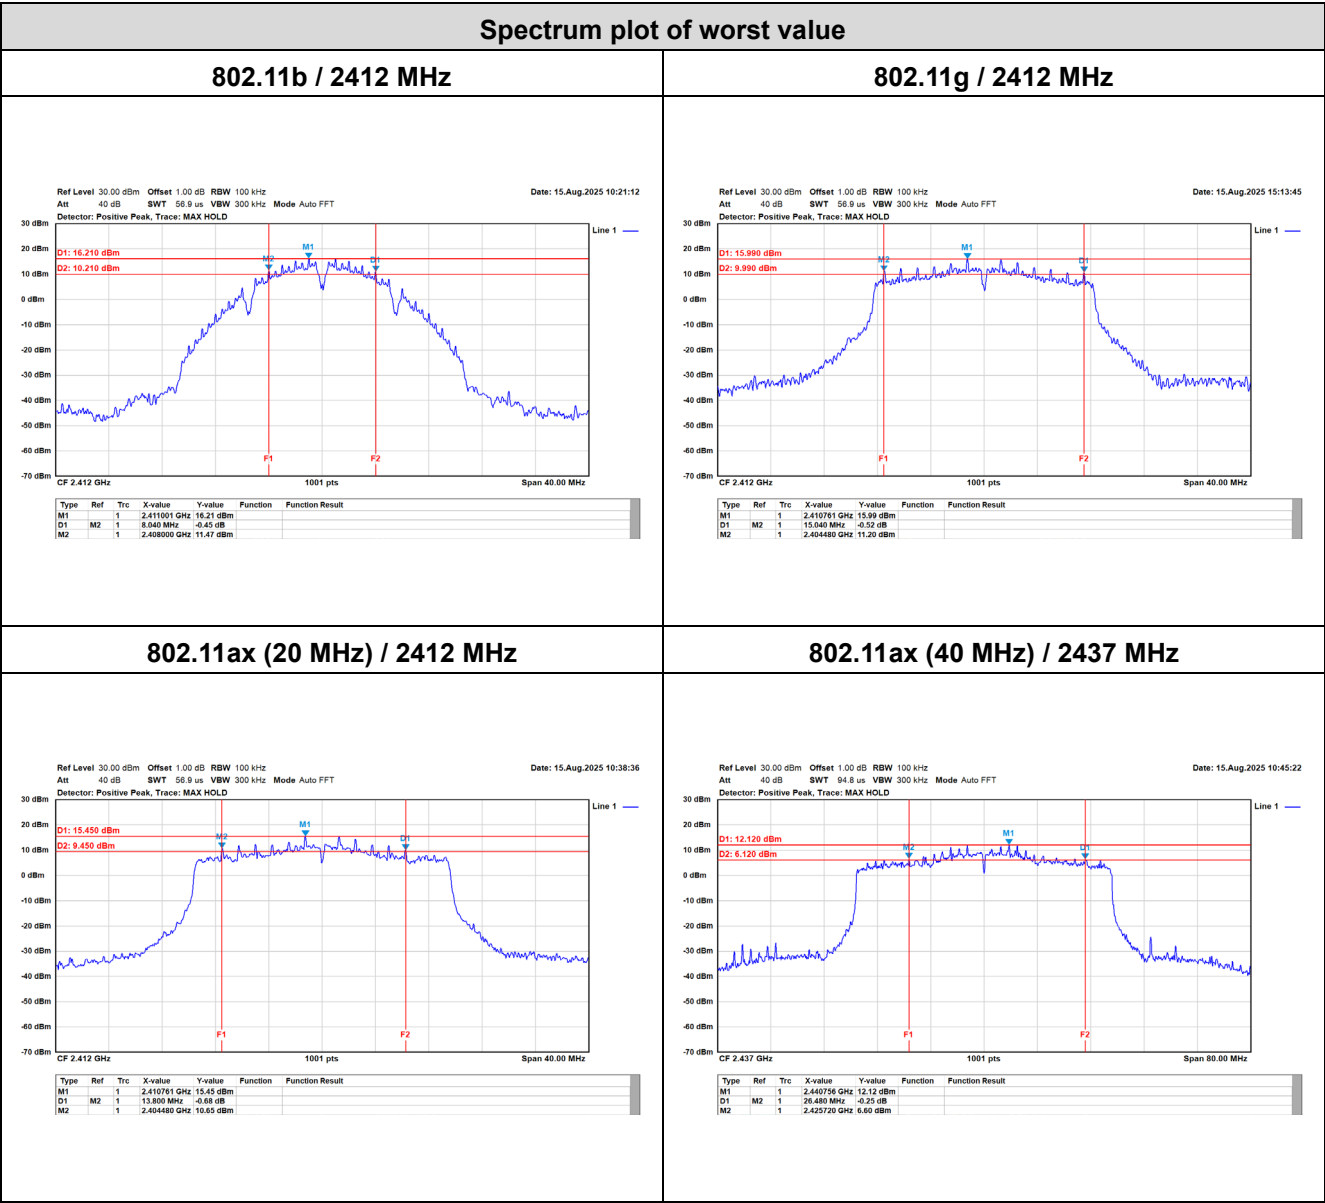


Appendix C. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)		Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant	Limit			
802.11b	2412	20.48	30.00	5.00	25.48	36.00
	2437	23.48	30.00	5.00	28.48	36.00
	2462	20.79	30.00	5.00	25.79	36.00
802.11g	2412	23.63	30.00	5.00	28.63	36.00
	2437	23.83	30.00	5.00	28.83	36.00
	2462	23.12	30.00	5.00	28.12	36.00
802.11ax (20 MHz)	2412	23.38	30.00	5.00	28.38	36.00
	2437	23.82	30.00	5.00	28.82	36.00
	2462	20.96	30.00	5.00	25.96	36.00
802.11ax (40 MHz)	2422	20.75	30.00	5.00	25.75	36.00
	2437	23.83	30.00	5.00	28.83	36.00
	2452	20.61	30.00	5.00	25.61	36.00


Note: E.I.R.P. = Maximum Conducted Output Power + Antenna Gain.

Appendix D. Test Result of Maximum Power Spectral Density



Modulation	Frequency (MHz)	Power Spectral Density (dBm/RBW)	Limit (dBm/3kHz)	Result
802.11b	2412	-1.98	8.00	Pass
	2437	-2.06	8.00	Pass
	2462	-2.36	8.00	Pass
802.11g	2412	-2.04	8.00	Pass
	2437	-1.78	8.00	Pass
	2462	-2.55	8.00	Pass
802.11ax (20 MHz)	2412	-4.36	8.00	Pass
	2437	-4.22	8.00	Pass
	2462	-4.13	8.00	Pass
802.11ax (40 MHz)	2422	-7.74	8.00	Pass
	2437	-6.98	8.00	Pass
	2452	-6.69	8.00	Pass

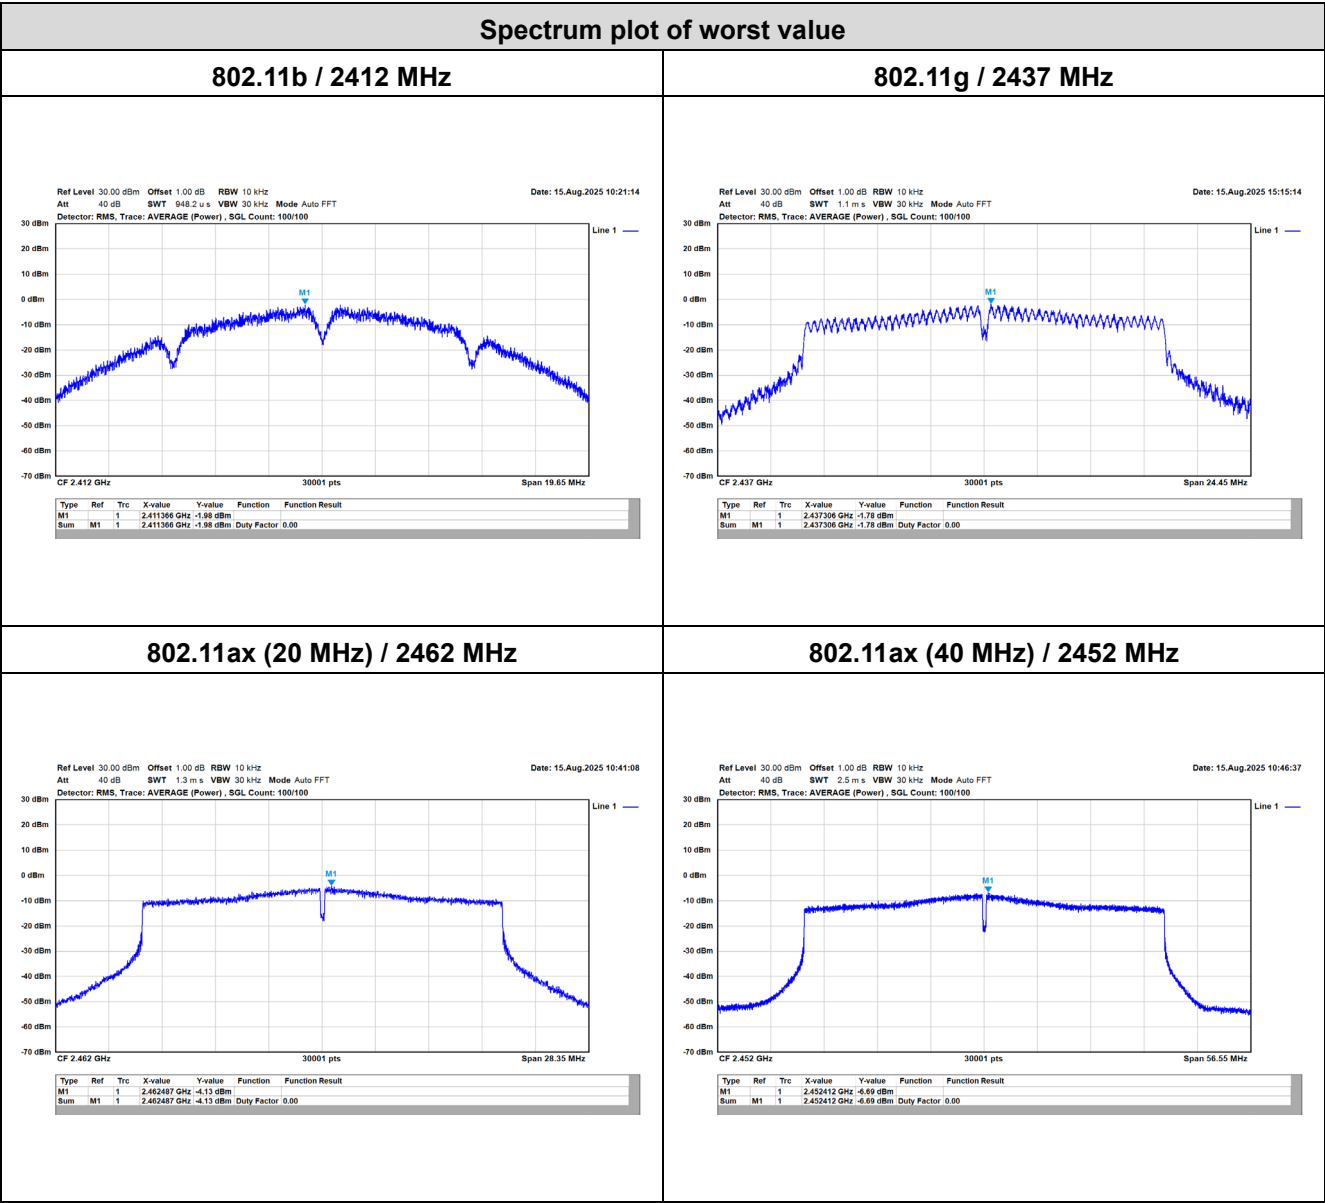



Appendix E. Test Result of Antenna Port Conducted Emission

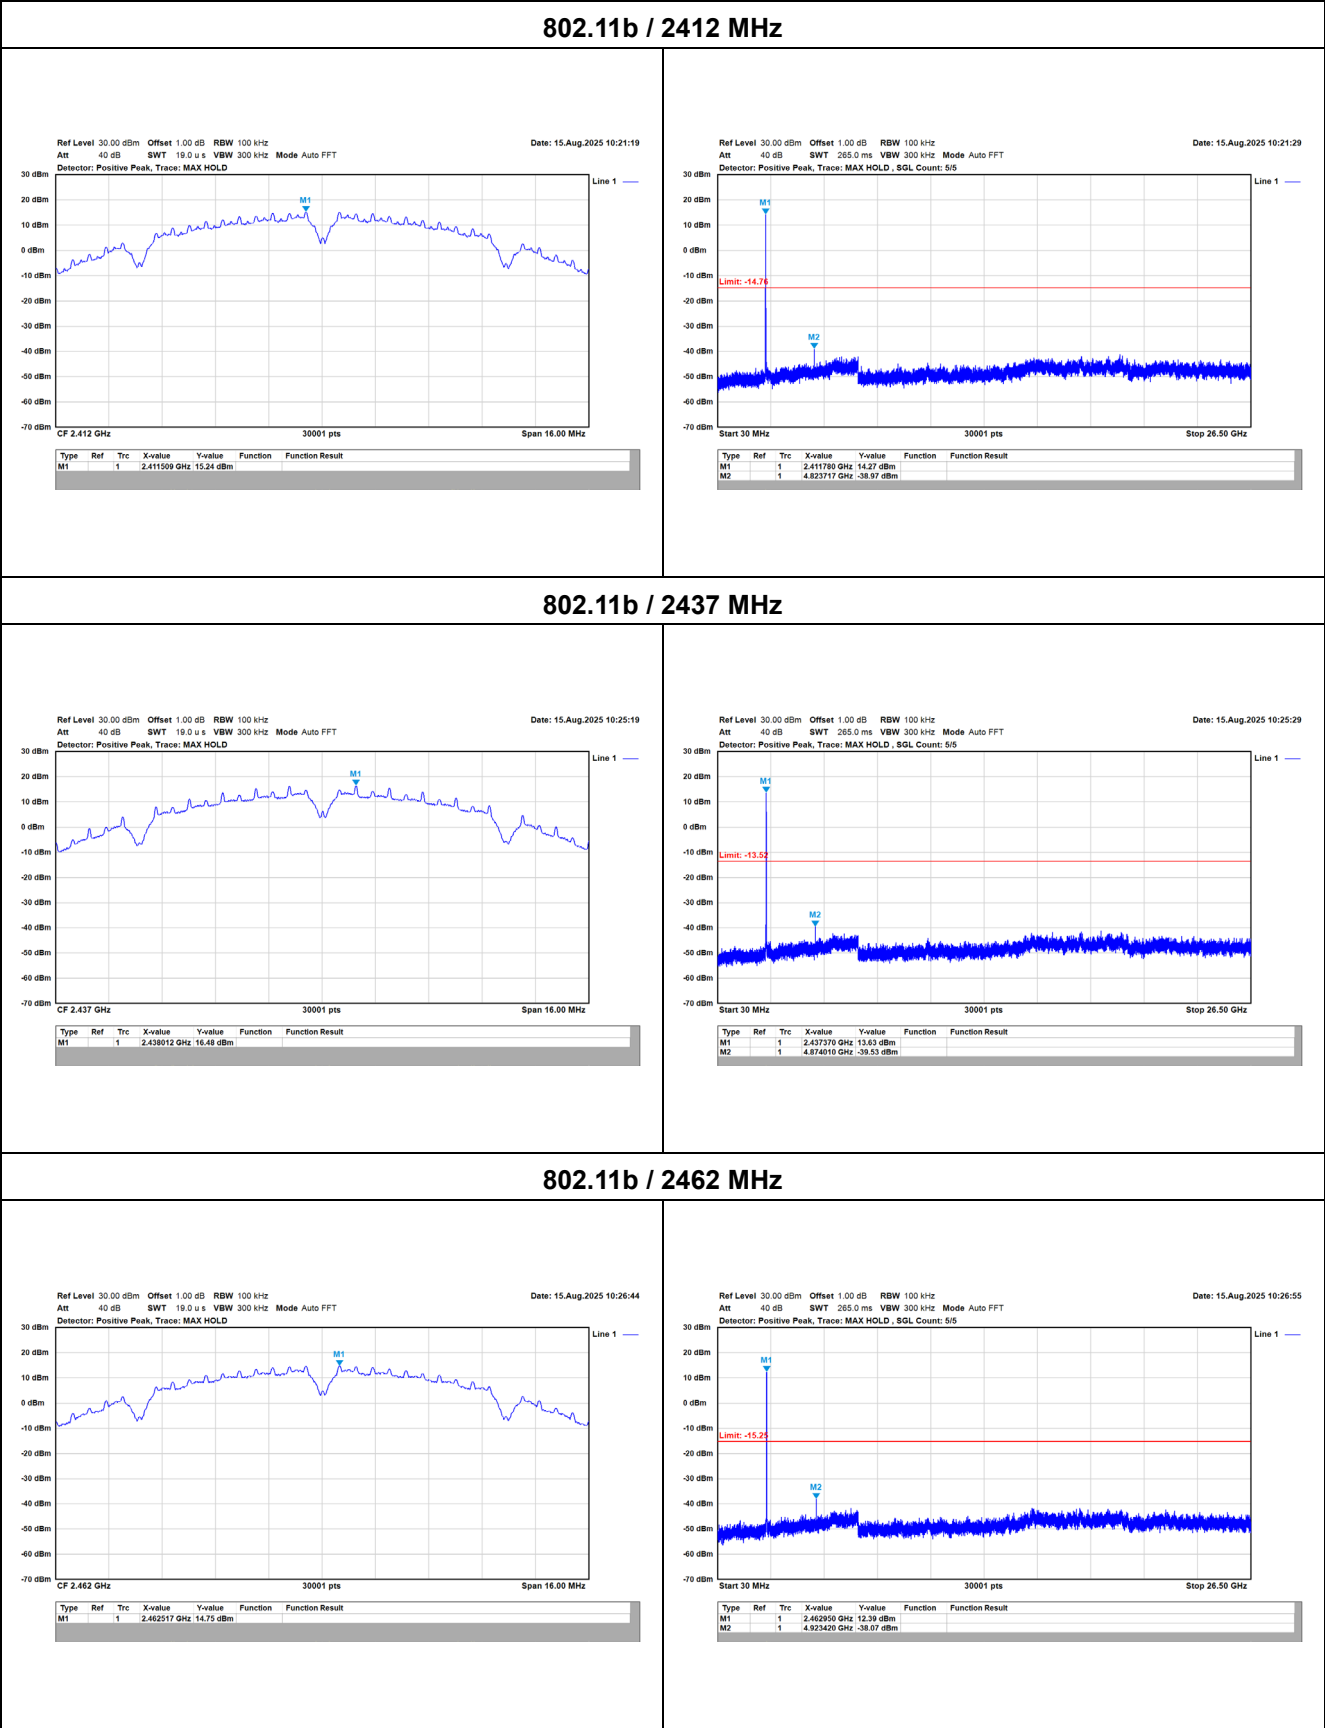



802.11g / 2412 MHz

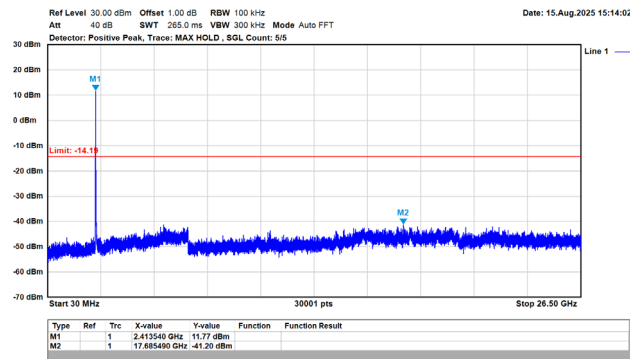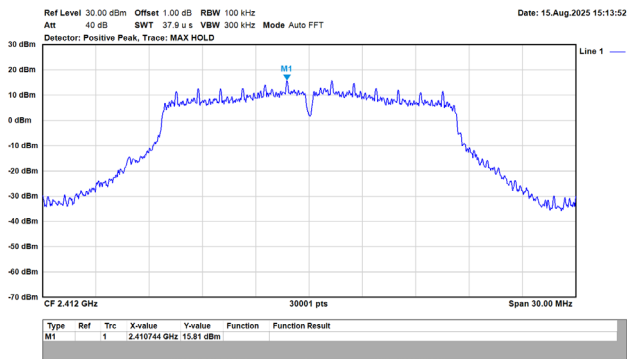



802.11g / 2437 MHz

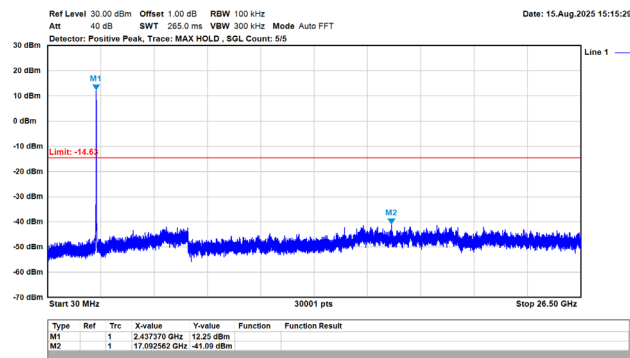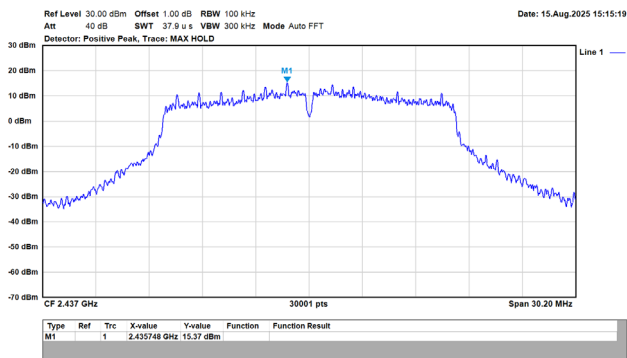



802.11g / 2462 MHz

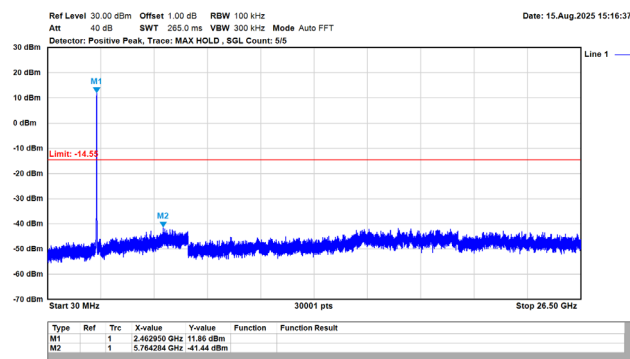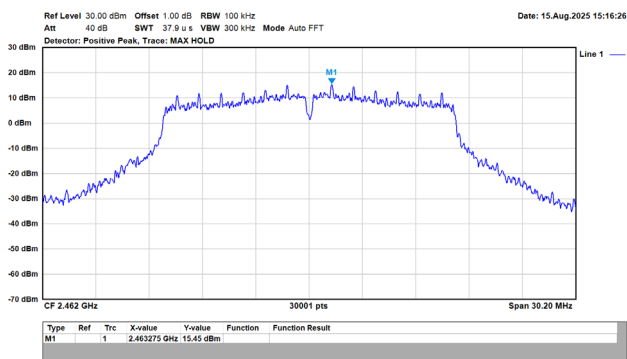



802.11ax (20 MHz) / 2412 MHz



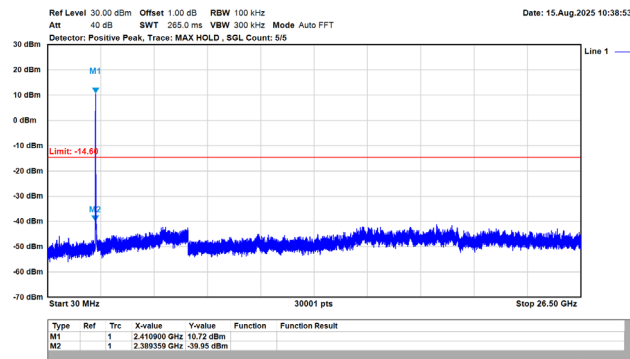
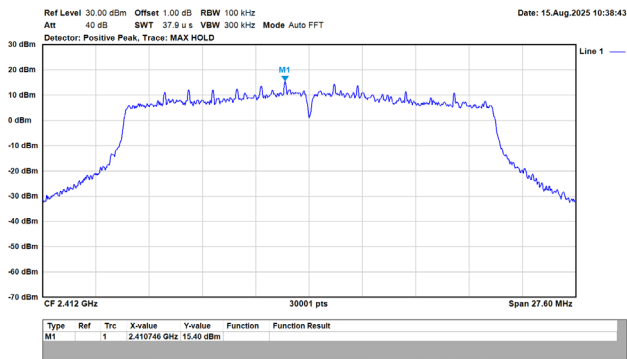


802.11ax (20 MHz) / 2437 MHz

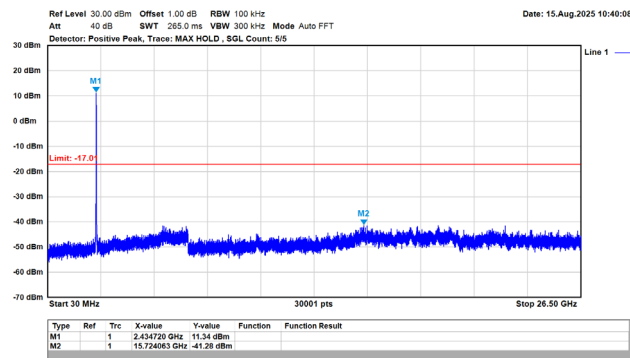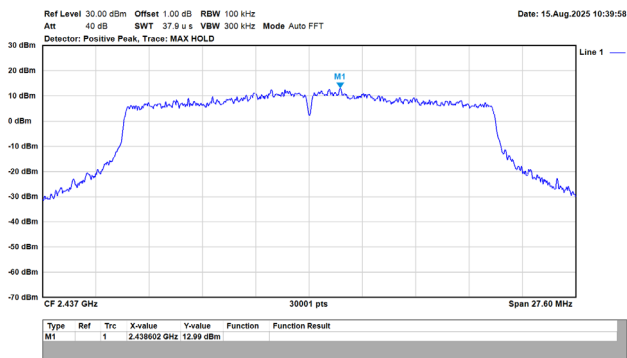

802.11ax (20 MHz) / 2462 MHz

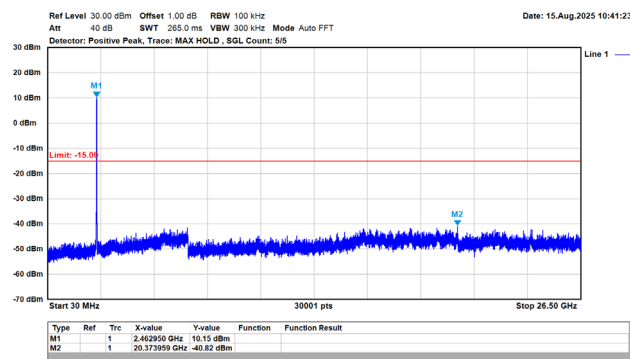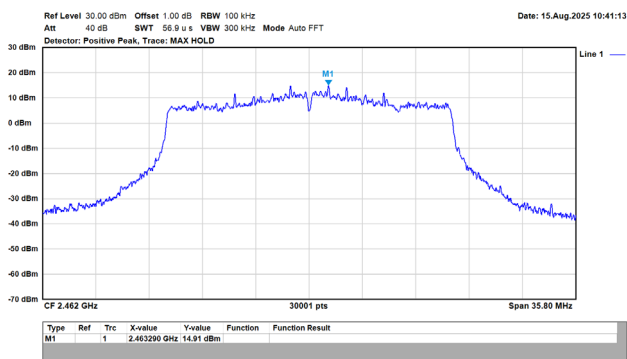

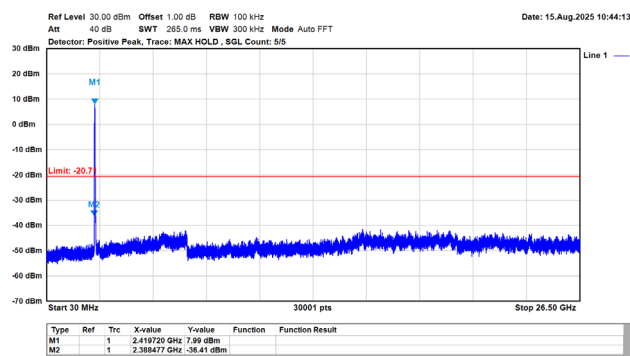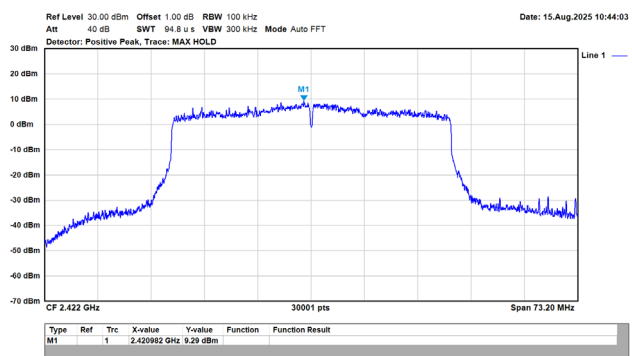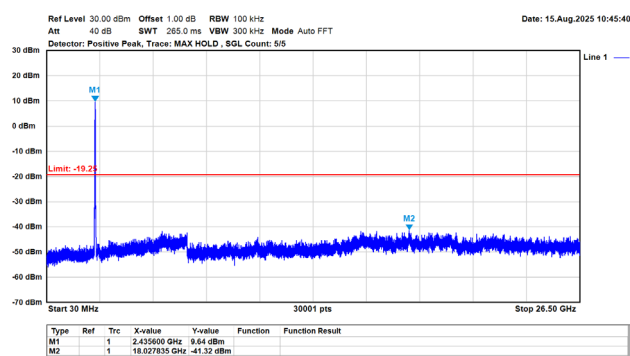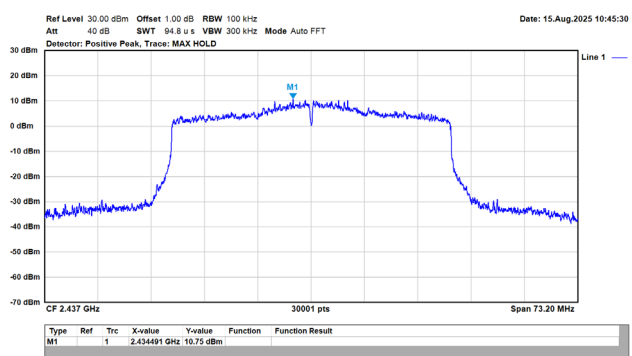802.11ax (40 MHz) / 2422 MHz**802.11ax (40 MHz) / 2437 MHz****802.11ax (40 MHz) / 2452 MHz**