

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.

RADIO TEST - REPORT

FCC Compliance Test Report for

Product name: 2.4GHz remote control car

**Model name: G03094R, G5002R, G5005R, G5006R, G03094R01
G03094R02, G03094R03, G03094R04, G03094R05, G03094R06
G03094R07, G03094R08**

FCC ID: 2AXV4-G03094R

Test Report Number: EFGX26050033-IE-01-E01

1	General Information	3
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant	4
1.4	Details of manufacturer	4
1.5	Application details	5
1.6	Test item	5
1.7	Test standards	5
2	Technical Test	6
2.1	Summary of test results	6
2.2	Test environment	6
2.3	Measurement uncertainty	6
2.4	Test equipment utilized	7
2.5	Test mode	7
2.6	Auxiliary equipment used during test	8
2.7	Test software information	8
2.8	Test results	9
3	Test Requirements	10
3.1	AC power-line conducted emissions	10
3.2	Occupied bandwidth and 20 Db bandwidth	11
3.3	Radiated emissions	12
Appendix A: Occupied Channel Bandwidth		14
Appendix B: Radiated emission		16

1 General Information

1.1 Notes

The results of this test report relate exclusively to the item tested as specified in chapter "Description of test item" and are not transferable to any other test items.

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD. Is not responsible for any generalisations and conclusions drawn from this report. Any modification of the test item can lead to invalidity of test results and this test report may therefore be not applicable to the modified test item.

The test report may only be reproduced or published in full. Reproducing or publishing extracts of the report requires the prior written approval of the EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.

This document is subject to the General Terms and Conditions and the Testing and Certification System of EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD., available on request or accessible at www.eurofins.com.

Operator

2026-05-20	Bruce Zheng / Project Engineer	
------------	--------------------------------	---

Date	Eurofins-Lab.	Name / Title	Signature
------	---------------	--------------	-----------

Technical responsibility for area of testing:

2026-05-20	Albert Xu / EMC Manager	
------------	-------------------------	---

Date	Eurofins-Lab.	Name / Title	Signature
------	---------------	--------------	-----------

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83, Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

1.2 Testing laboratory

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.

Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83, Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Telephone : +86-755-82911867

Fax : +86-755-82910749

The Laboratory has passed the Accreditation by the American Association for Laboratory Accreditation (A2LA). The Accreditation number is 5376.01.

The Laboratory has been listed by industry Canada to perform electromagnetic emission measurements, The CAB identifier is CN0088.

1.3 Details of applicant

Name	:	HONGDI TOYS FACTORY
Address	:	No. 82, Zhenxing Road, Chenghai District, Shantou City, Guangdong Province, China
Telephone	:	./.
Fax	:	./.

1.4 Details of manufacturer

Name	:	HONGDI TOYS FACTORY
Address	:	No. 82, Zhenxing Road, Chenghai District, Shantou City, Guangdong Province, China
Telephone	:	./.
Fax	:	./.

1.5 Application details

Date of receipt of application : 2026-04-24
Date of receipt of test item : 2026-04-24
Date of test : 2026-04-24 to 2026-05-20
Date of issue : 2026-05-20

1.6 Test item

Product type : 2.4GHz remote control car
Model name : G03094R, G5002R, G5005R, G5006R,
G03094R01, G03094R02, G03094R03,
G03094R04, G03094R05, G03094R06,
G03094R07, G03094R08
Brand name : ./.
Technical Description : DC 3V
Sample Code : 260424-25-001

RadioTechnical data

Fundamental frequency : 2405 – 2475MHz
Modulation : GFSK
Antenna type : Internal antenna
MaxGain : 0.17 dBi

(General disclaimer:

The above sample(s) and sample information was/were submitted and identified on behalf of the applicant.

Eurofins assures objectivity and impartiality of the test, and fulfills the obligation of confidentiality for applicant's commercial information and technical documents.)

1.7 Test standards

FCC Part 15 Subpart C	PART 15 – RADIO FREQUENCY DEVICES Subpart C – Intentional Radiators
RSS-210 Issue 11	Licence-Exempt Radio Apparatus: Category I Equipment
RSS-GEN Issue 5	General Requirements for Compliance of Radio Apparatus

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

2 Technical Test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified were ascertained in the course of the tests performed.



2.2 Test environment

Ac line conducted

Environment Parameter	Temperature °C	Relative Humidity
101.7 kPa	24.2	63.5%

RF Conducted

Environment Parameter	Temperature °C	Relative Humidity
101.7 kPa	24.3	61.7%

Radiated

Environment Parameter	Temperature °C	Relative Humidity
101.7 kPa	22.2	62.4%

2.3 Measurement uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty in conducted measurements	1.96dB
Uncertainty for Conducted RF test	RF Power Conducted: 1.16dB Frequency test involved: 1.05×10 ⁻⁷ or 1%
Uncertainty for Radiated Emission 9KHz-30MHz	4.56dB
Uncertainty for Radiated Spurious Emission 30MHz-1000MHz	Horizontal: 4.46dB; Vertical: 4.54dB;
Uncertainty for Radiated Spurious Emission 1000MHz-18000MHz	Horizontal: 4.42dB; Vertical: 4.41dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 4.63dB; Vertical: 4.62dB;

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

2.4 Test equipment utilized

EQUIPMENT ID	EQUIPMENT NAME	MODEL NO.	CAL. DUE DATE
23-2-13-05	EMI Test Receiver	ESR3	2027-03-20
23-2-13-06	LISN	NNLK 8127 RC	2027-03-20
23-2-10-16	Attenuator	VTSD 9561-F	2027-03-20
23-2-13-12	Signal Analyzer	N9010B-544	2027-03-20
23-2-13-13	BT/WLAN Tester	CMW270	2027-03-20
23-2-13-14	Signal Generator	N5183B-520	2027-03-20
23-2-13-15	Vector Signal Generator	N5182B-506	2027-03-20
23-2-10-44	DC power supply	E3642A	2027-03-20
23-2-10-45	Temperature test chamber	SG-80-CC-2	2027-03-20
23-2-13-01	EMI Test Receiver	ESR7	2027-03-20
23-2-13-02	Signal Analyzer	N9020B-544	2027-03-20
23-2-12-01	Active Loop Antenna	FMZB 1519B	2026-05-29
23-2-12-02	TRILOG Broadband Antenna	VULB9168	2026-06-02
23-2-12-03	Horn Antenna	3117	2026-06-02
23-2-12-04	Horn Antenna	BBHA 9170	2026-05-29
23-2-10-01	Preamplifier	BBV9745	2027-03-20
23-2-10-02	Preamplifier	TAP01018048	2027-03-20
23-2-10-03	Preamplifier	TAP18040048	2027-03-20
23-2-10-14	Switch and Control Unit	ERIT-E-JS0806-SF1	N/A
23-2-13-03	EMI Test Receiver	ESR7	2027-03-20
23-2-13-04	Signal Analyzer	N9020B-526	2027-03-20
23-2-10-15	Switch and Control Unit	ERIT-E-JS0806-SF1	N/A

2.5 Test mode

Measure using fixed-frequency mode.

Channel	Frequency (MHz)
1	2405
19	2445
33	2475

Channel List

Chan-nel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	11	2425	21	2452	31	2473
2	2406	12	2427	22	2453	32	2474
3	2407	13	2428	23	2454	33	2475
4	2408	14	2430	24	2456		
5	2409	15	2435	25	2459		
6	2410	16	2437	26	2462		
7	2411	17	2440	27	2469		
8	2414	18	2442	28	2470		
9	2418	19	2445	29	2471		
10	2422	20	2446	30	2472		

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.

Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83, Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

2.6 Auxiliary equipment used during test

N/A

2.7 Test software information

The test samples have been burned with the test mode firmware.

2.8 Test results

☒ 1st test

☐ test after modification

☐ production test

FCC rule section(s)		Test Result	Verdict
§15.207	AC power-line conducted emissions	N.A	N.A
§15.215(c)(1)	20dB bandwidth	Appendix A	Pass
§15.249(a)&(d)&§15.209 & §15.205	Radiated emission	Appendix B	Pass
§15.203	Antenna requirement	See note 1	Pass

Note 1: The EUT incorporates internal antenna with a maximum gain of 0.17 dBi. This design satisfies FCC §15.203 (prohibiting user-replaceable antennas) and ISSED RSS-GEN Section 6.8 (antenna gain $\leq$ 6 dBi).

3 Test Requirements

3.1 AC power-line conducted emissions

3.1.1 Limits


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

3.1.2 Measurement procedure

Clause 6.2 of *ANSI C63.10-2020*.

3.1.3 Setup

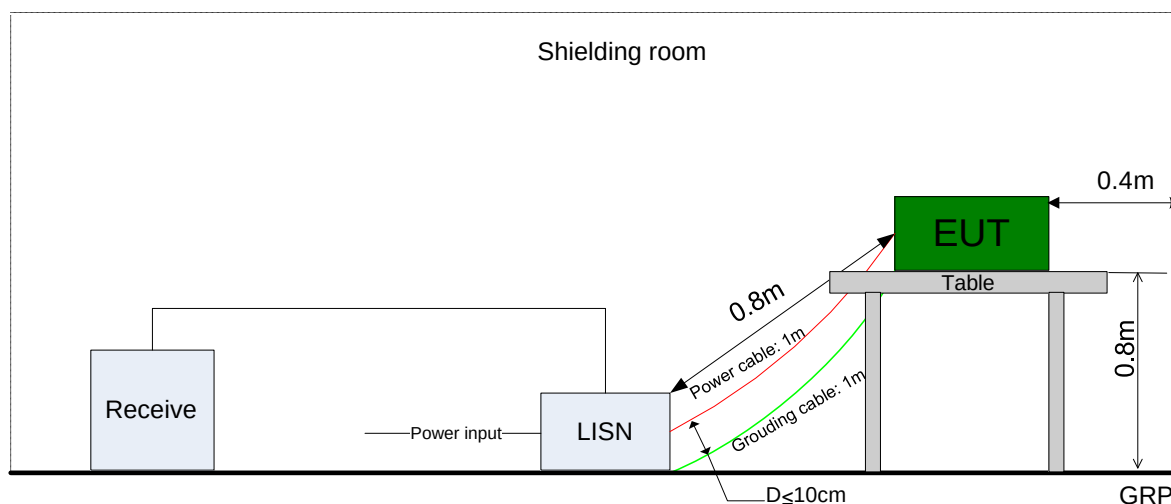

3.2 Occupied bandwidth and 20 dB bandwidth


3.2.1 Limits

None; for reporting purposes only.

3.2.2 Measurement procedure

Clause 6.9 of *ANSI C63.10-2020*.

3.2.3 Setup

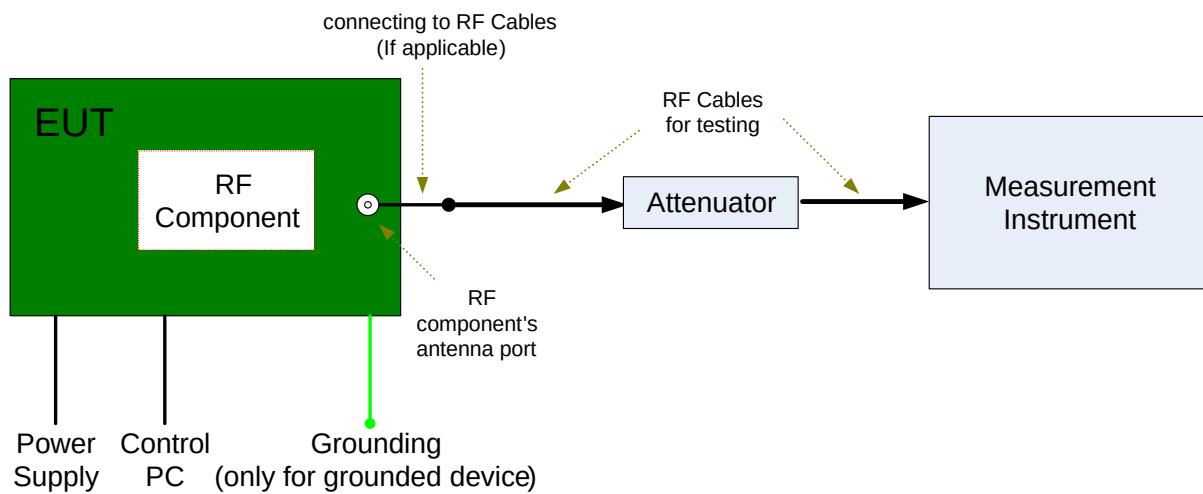

3.3 Radiated emissions

3.3.1 Limits

Fundamental frequency (MHz)	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	500

Field strength limits are specified at a distance of 3 meters.

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the emission limits in the following table, whichever requires the lesser attenuation.


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

3.3.2 Measurement procedure


Clause 4.1.5; 5.2; 5.3; 6.3; 6.4; 6.5; 6.6 of ANSI C63.10-2020.

3.3.3 Setup


Below 30MHz

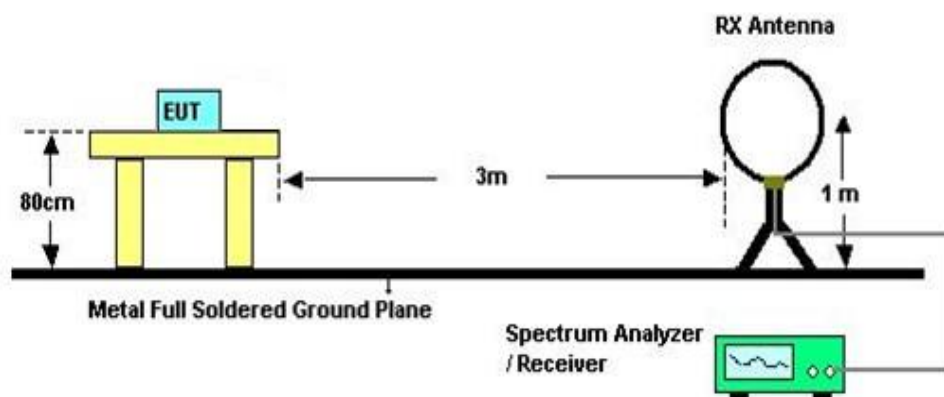

Below 1GHz

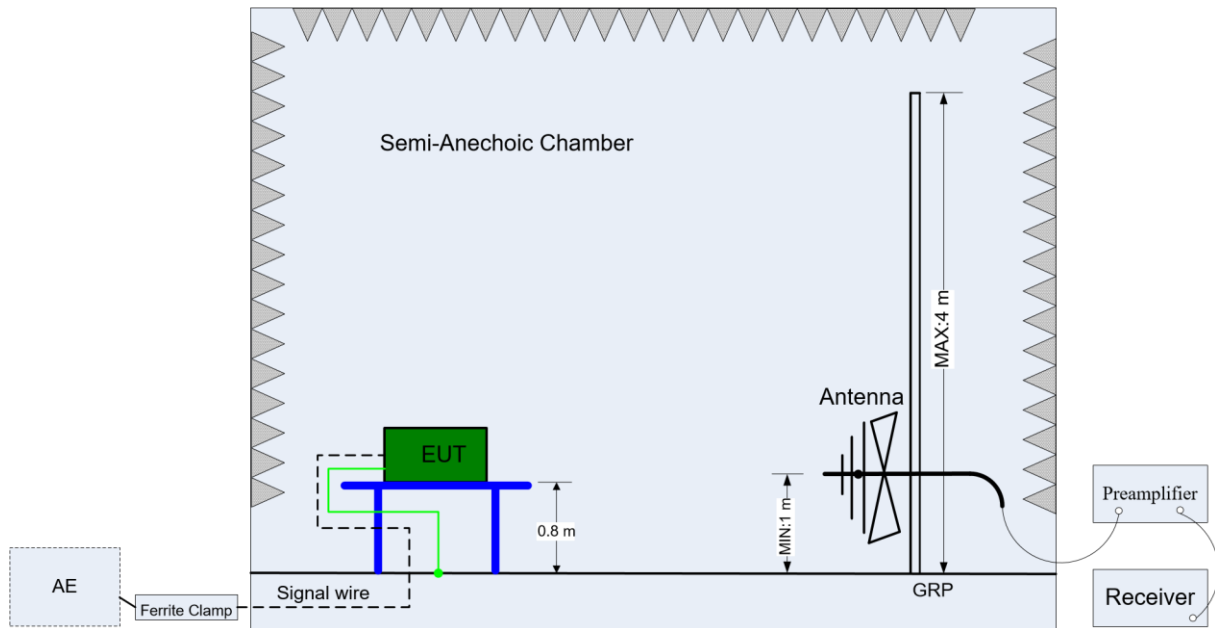

Above 1GHz

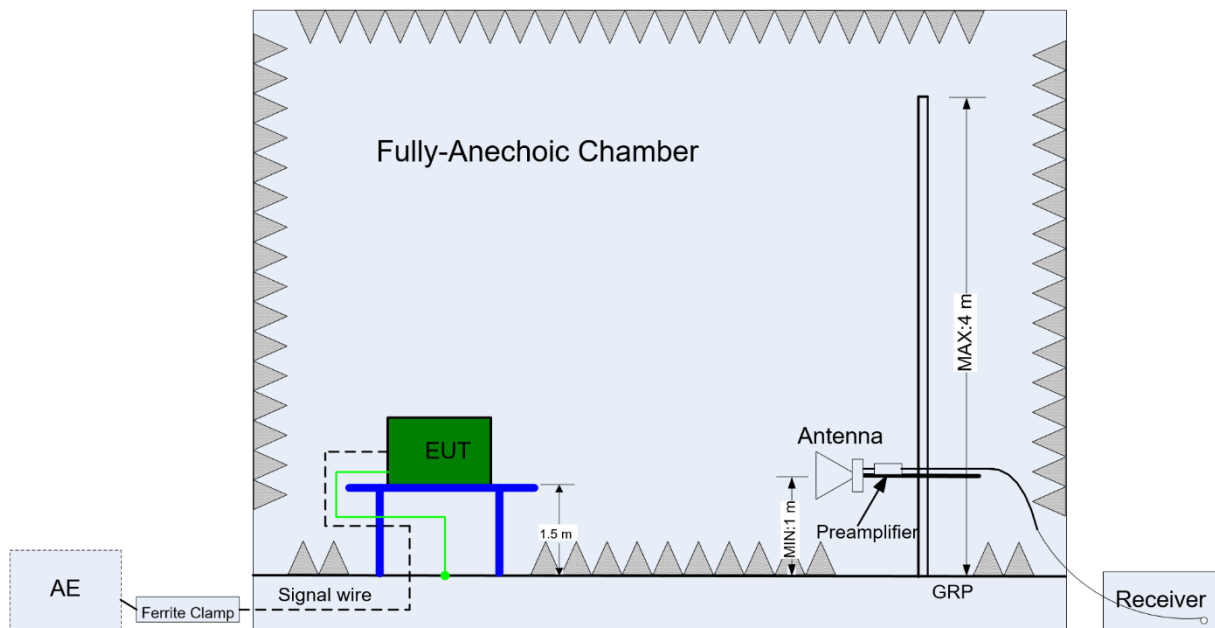

Test Report No.: EFGX26050033-IE-01-E01


EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Appendix A: Occupied Channel Bandwidth

Test Result


Channel Frequency[MHz]	20dB EBW[KHz]
2405	107.9
2445	84.71
2475	96.50

Test Graphs

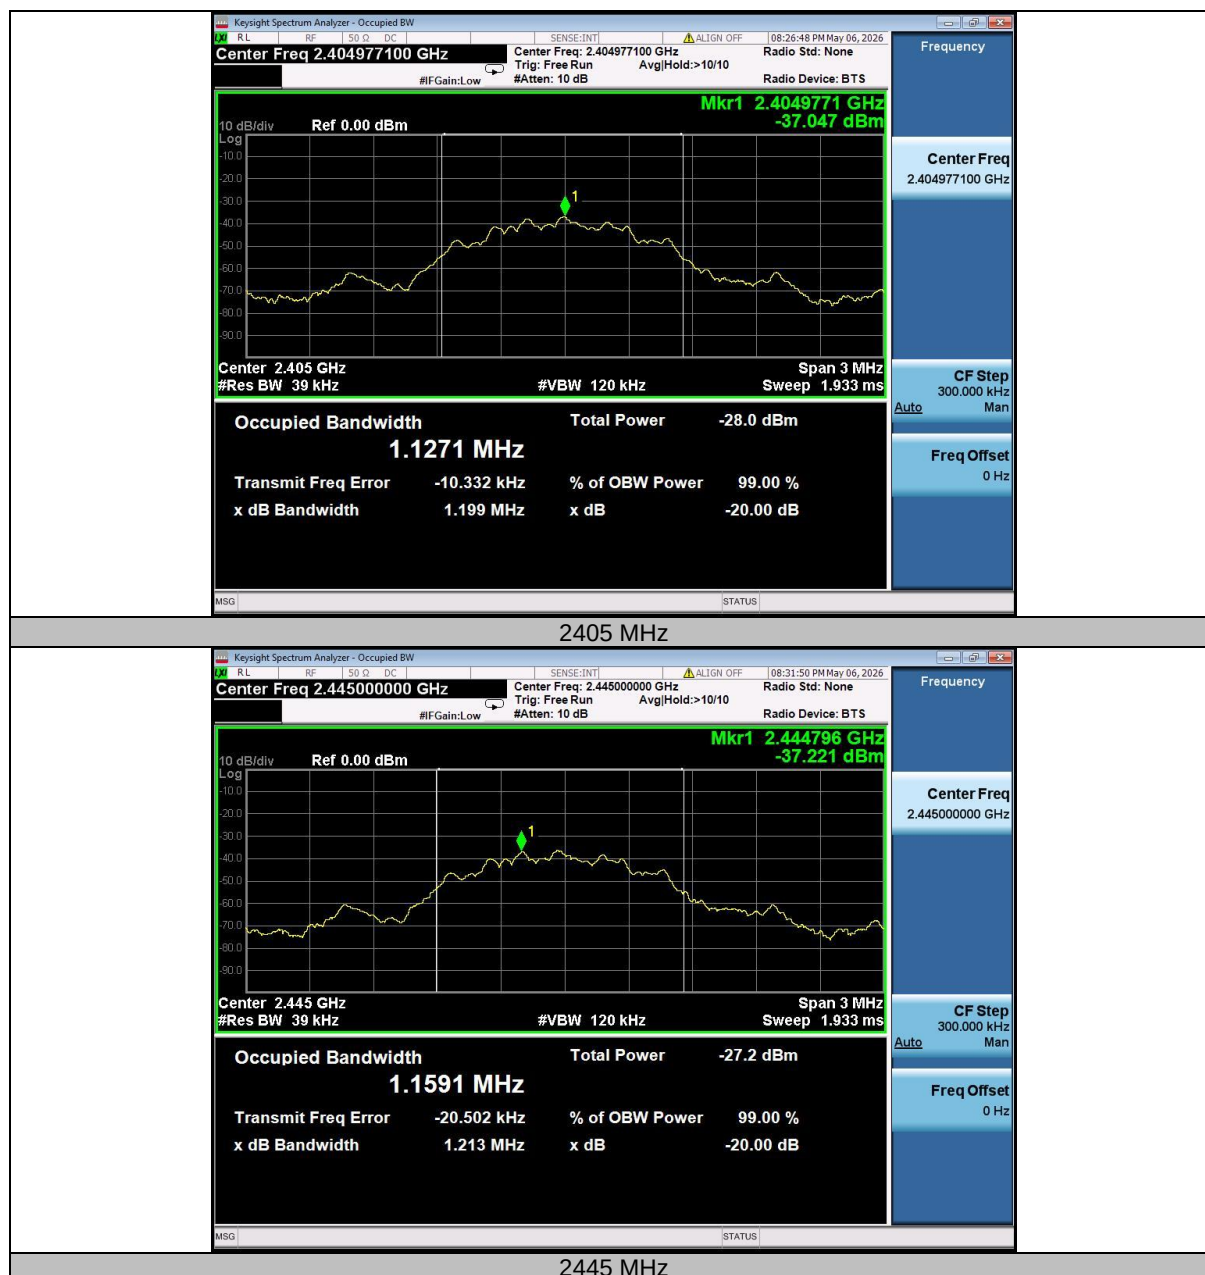

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

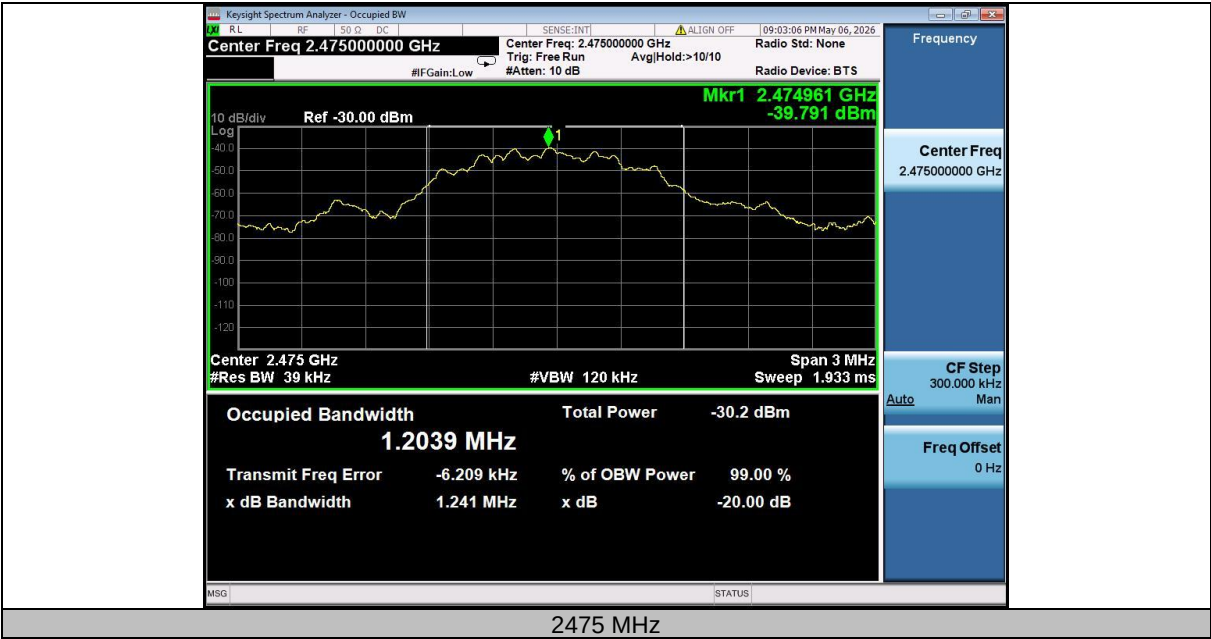

Appendix B: Radiated emission


The report only records the worst-case emission levels.

he low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels. The test data of the worst-case (2405MHz) condition was recorded in this report. The measurement results above 18GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz are reported.

For radiated emissions at frequencies above 1 GHz, per ANSI C63.10-2020, Section 6.6.4.3, Note 1, if the peak measured value complies with the average limit, an average measurement is not required. Therefore, for frequencies where the peak result complies with the average limit, average (AV) emission values may be omitted from the table below.

Mode:	Tx	Channel:	2405MHz
-------	----	----------	---------

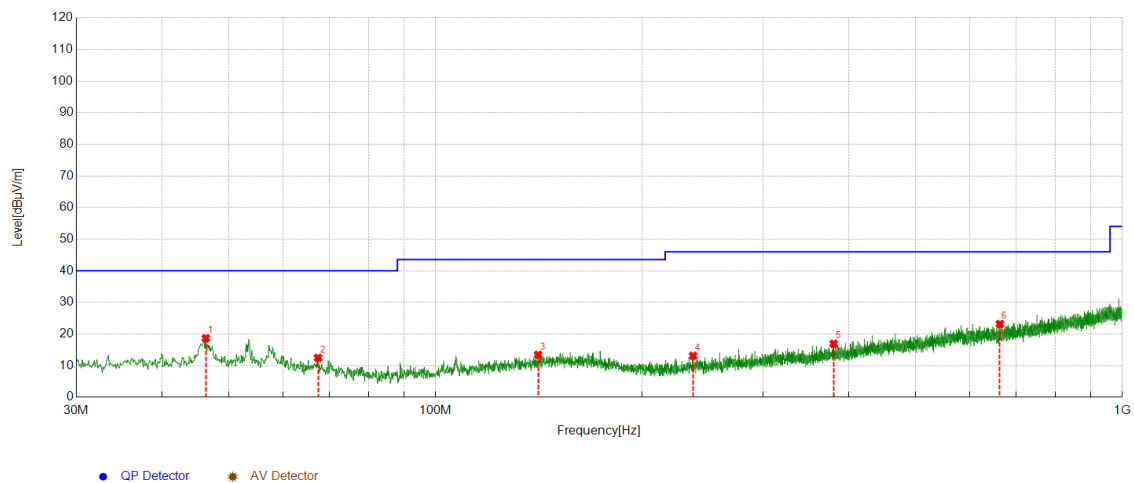


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	46.2976	34.57	18.65	-15.92	40.00	21.35	150	300	PK	Vertical	PASS
2	67.4457	30.07	12.45	-17.62	40.00	27.55	150	60	PK	Vertical	PASS
3	141.0761	29.97	13.42	-16.55	43.50	30.08	150	340	PK	Vertical	PASS
4	237.2127	31.48	13.11	-18.37	46.00	32.89	150	90	PK	Vertical	PASS
5	380.0110	30.83	16.92	-13.91	46.00	29.08	150	210	PK	Vertical	PASS
6	663.5704	31.83	23.14	-8.69	46.00	22.86	150	30	PK	Vertical	PASS

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83, Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2405MHz
-------	----	----------	---------

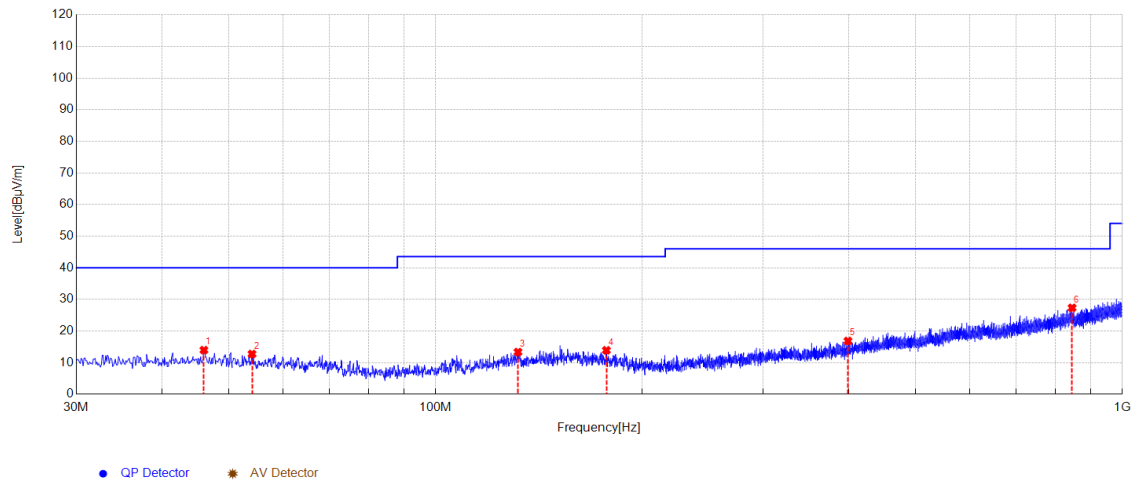


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	46.0066	29.78	13.96	-15.82	40.00	26.04	150	350	PK	Horizontal	PASS
2	54.0584	29.16	12.74	-16.42	40.00	27.26	150	290	PK	Horizontal	PASS
3	131.8602	30.27	13.35	-16.92	43.50	30.15	150	170	PK	Horizontal	PASS
4	177.3577	31.14	13.89	-17.25	43.50	29.61	150	170	PK	Horizontal	PASS
5	398.6369	30.28	16.85	-13.43	46.00	29.15	150	190	PK	Horizontal	PASS
6	845.2695	32.06	27.33	-4.73	46.00	18.67	150	0	PK	Horizontal	PASS

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

RE Above 1GHz

Mode:	Tx	Channel:	2405MHz
-------	----	----------	---------

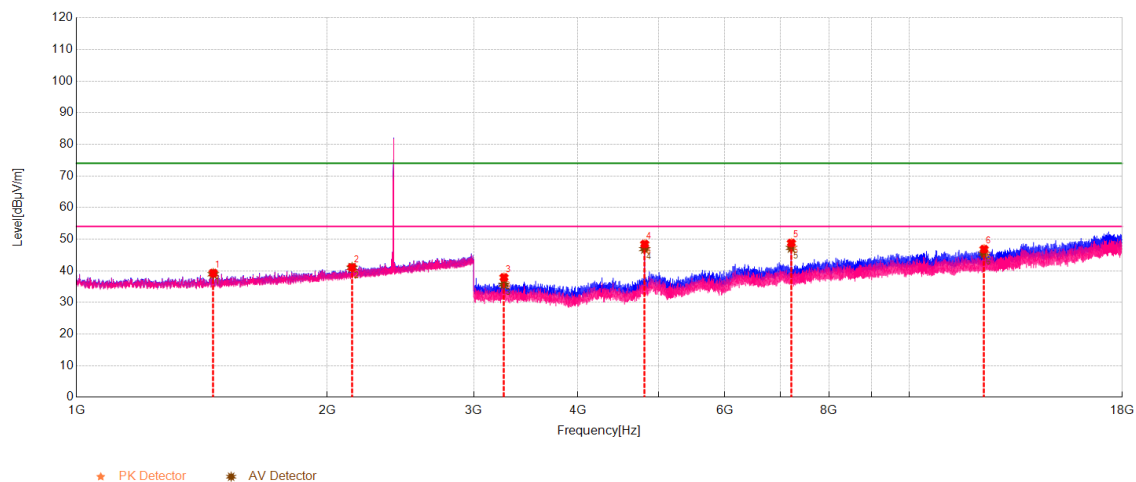


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1459.8000	39.35	39.28	-0.07	74.00	34.72	150	4	PK	Horizontal	PASS
2	2142.0000	38.89	41.07	2.18	74.00	32.93	150	54	PK	Horizontal	PASS
3	3260.0000	57.92	37.91	-20.01	74.00	36.09	150	216	PK	Horizontal	PASS
4	4810.0000	62.65	48.44	-14.21	74.00	25.56	150	146	PK	Horizontal	PASS
5	7214.0000	58.14	48.79	-9.35	74.00	25.21	150	285	PK	Horizontal	PASS
6	12287.000	48.18	46.85	-1.33	74.00	27.15	150	193	PK	Horizontal	PASS

Test Report No.: EFGX26050033-IE-01-E01


EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83, Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2405MHz
-------	----	----------	---------

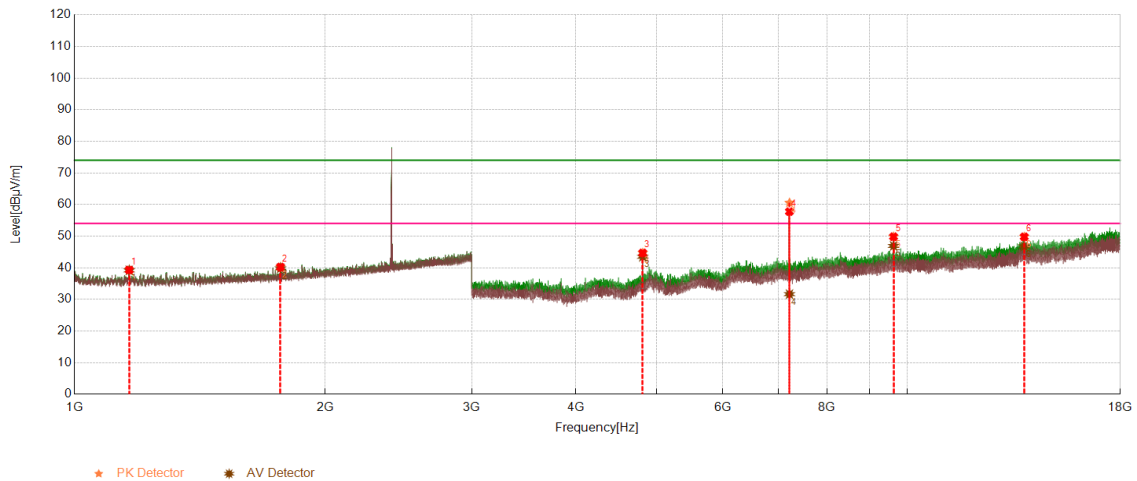


Final Data List														
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1163.6000	-0.25	39.55	39.30	74.00	34.70	39.40	39.15	54.00	14.85	150	282	Vertical	PASS
2	1767.6000	0.96	39.29	40.25	74.00	33.75	38.85	39.81	54.00	14.19	150	113	Vertical	PASS
3	4810.0000	-14.21	58.91	44.70	74.00	29.30	57.68	43.47	54.00	10.53	150	170	Vertical	PASS
4	7215.4933	-9.35	69.90	60.55	74.00	13.45	41	31.65	54.00	22.35	150	153.7	Vertical	PASS
5	9620.5000	-5.01	54.83	49.82	74.00	24.18	51.90	46.89	54.00	7.11	150	231	Vertical	PASS
6	13806.0000	1.16	48.63	49.79	74.00	24.21	45.58	46.74	54.00	7.26	150	123	Vertical	PASS

Mode:	Tx	Channel:	2445MHz
-------	----	----------	---------

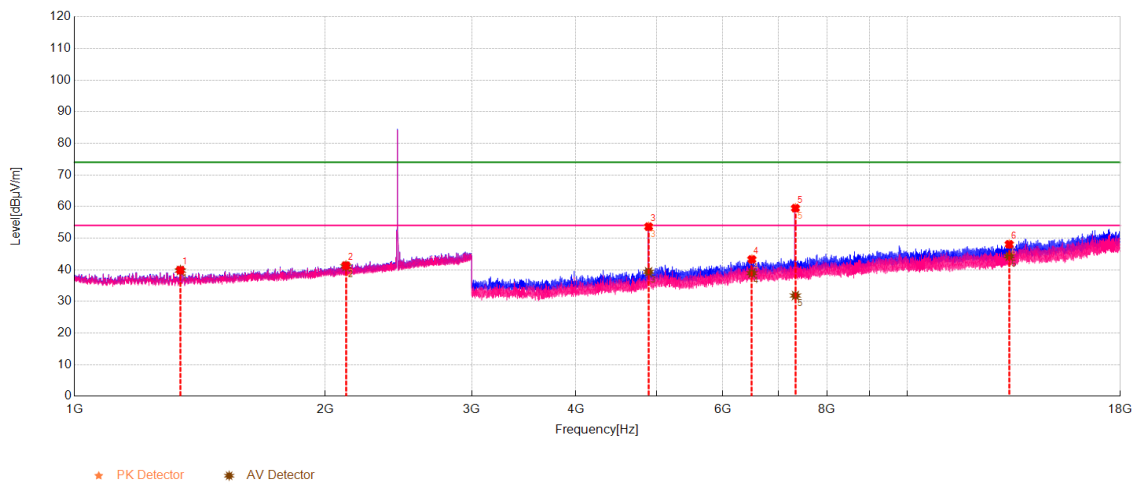


Final Data List														
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1340.2000	-0.39	40.28	39.89	74.00	34.11	40.11	39.72	54.00	14.28	150	149	Horizontal	PASS
2	2117.8000	2.17	39.19	41.36	74.00	32.64	38.86	41.03	54.00	12.97	150	36	Horizontal	PASS
3	4889.0000	-13.74	67.37	53.63	74.00	20.37	53.08	39.34	54.00	14.66	150	75	Horizontal	PASS
4	6504.0000	-10.24	53.53	43.29	74.00	30.71	49.15	38.91	54.00	15.09	150	254	Horizontal	PASS
5	7335.5000	-9.20	68.68	59.48	74.00	14.52	41.04	31.84	54.00	22.16	150	28	Horizontal	PASS
6	13244.0000	0.44	47.62	48.06	74.00	25.94	43.83	44.27	54.00	9.73	150	51	Horizontal	PASS

Mode:	Tx	Channel:	2445MHz
-------	----	----------	---------

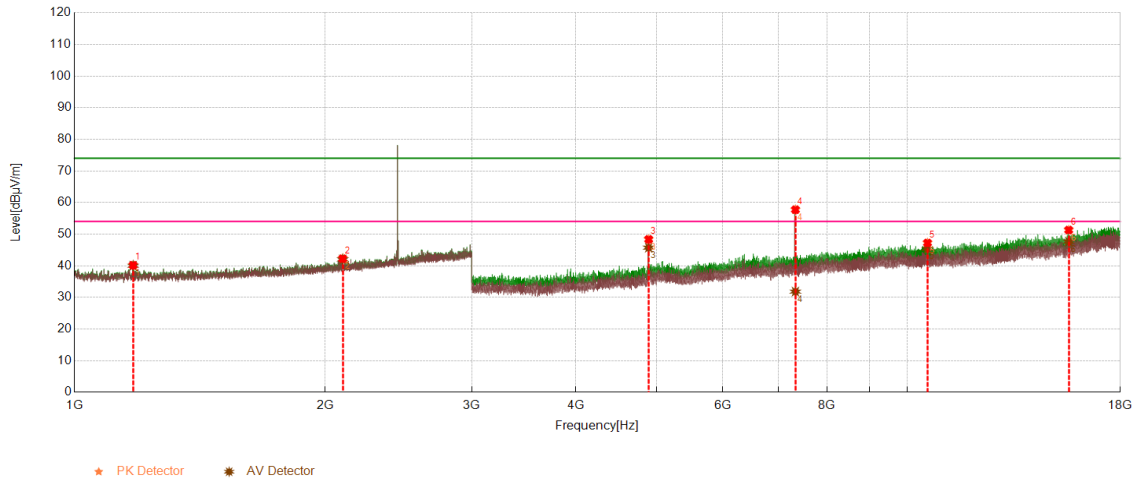


Final Data List														
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1176.2000	-0.16	40.33	40.17	74.00	33.83	40.15	39.99	54.00	14.01	150	283	Vertical	PASS
2	2099.2000	2.22	40.02	42.24	74.00	31.76	39.78	42.00	54.00	12.00	150	54	Vertical	PASS
3	4889.5000	-13.72	62.08	48.36	74.00	25.64	59.43	45.71	54.00	8.29	150	260	Vertical	PASS
4	7335.5000	-9.20	66.94	57.74	74.00	16.26	41.02	31.82	54.00	22.18	150	206	Vertical	PASS
5	10566.5000	-3.61	50.83	47.22	74.00	26.78	48.99	45.38	54.00	8.62	150	340	Vertical	PASS
6	15610.0000	2.88	48.42	51.30	74.00	22.70	44.75	47.63	54.00	6.37	150	76	Vertical	PASS

Mode:	Tx	Channel:	2475MHz
-------	----	----------	---------

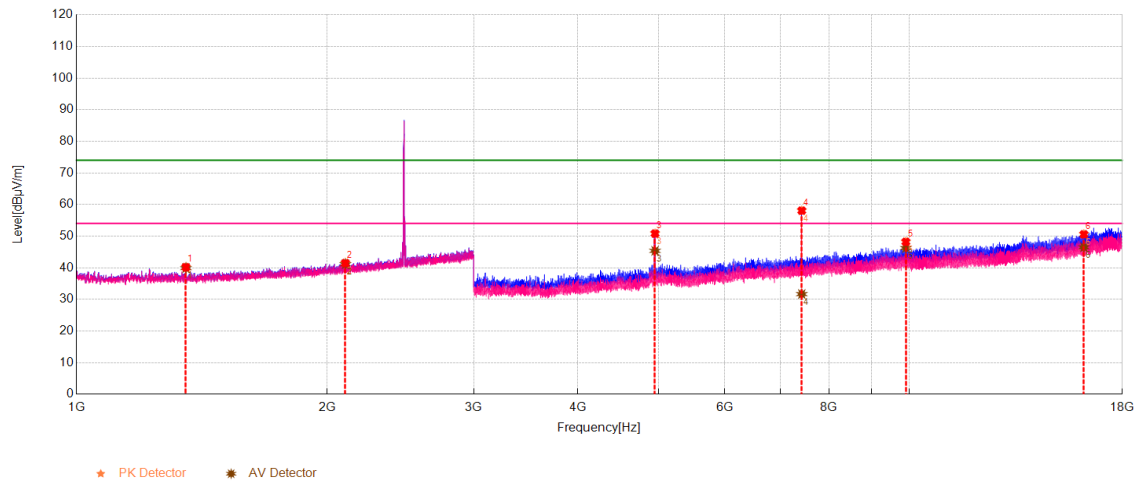

Final Data List														
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1353.6000	-0.38	40.56	40.18	74.00	33.82	40.25	39.87	54.00	14.13	150	271	Horizontal	PASS
2	2103.0000	2.19	39.28	41.47	74.00	32.53	38.89	41.08	54.00	12.92	150	109	Horizontal	PASS
3	4949.0000	-13.86	64.68	50.82	74.00	23.18	59.20	45.34	54.00	8.66	150	132	Horizontal	PASS
4	7424.0000	-9.39	67.45	58.06	74.00	15.94	41.06	31.67	54.00	22.33	150	216	Horizontal	PASS
5	9898.5000	-4.46	52.66	48.20	74.00	25.80	50.69	46.23	54.00	7.77	150	178	Horizontal	PASS
6	16189.5000	2.69	47.89	50.58	74.00	23.42	43.78	46.47	54.00	7.53	150	178	Horizontal	PASS


Mode:	Tx	Channel:	2475MHz
-------	----	----------	---------

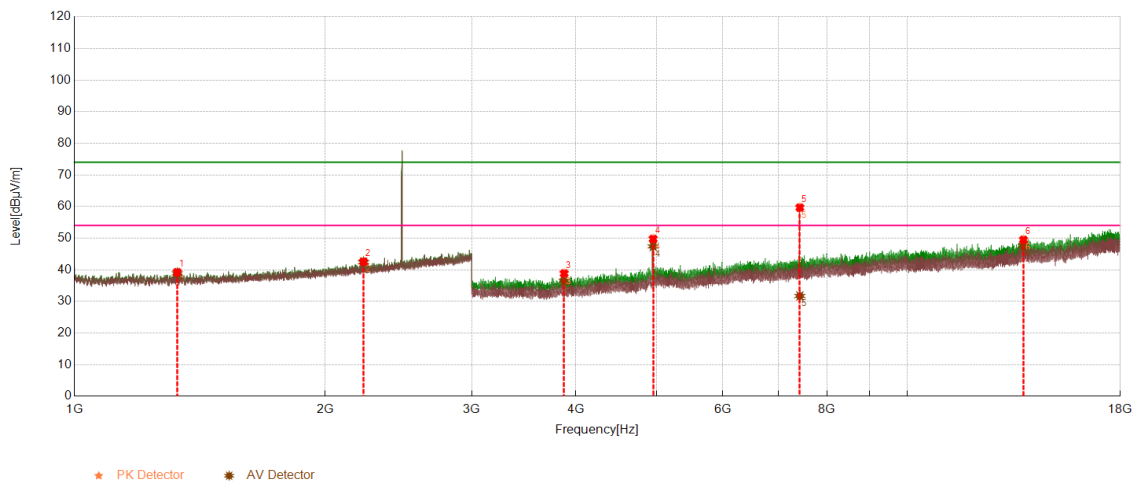

Final Data List														
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1328.8000	-0.57	39.78	39.21	74.00	34.79	39.42	38.85	54.00	15.15	150	42	Vertical	PASS
2	2223.6000	2.61	39.94	42.55	74.00	31.45	39.75	42.36	54.00	11.64	150	210	Vertical	PASS
3	3871.0000	-17.98	56.81	38.83	74.00	35.17	54.48	36.50	54.00	17.50	150	38	Vertical	PASS
4	4950.5000	-13.90	63.65	49.75	74.00	24.25	61.28	47.38	54.00	6.62	150	76	Vertical	PASS
5	7425.5000	-9.38	69.03	59.65	74.00	14.35	41.08	31.70	54.00	22.30	150	216	Vertical	PASS
6	13777.0000	0.90	48.57	49.47	74.00	24.53	46.69	47.59	54.00	6.41	150	38	Vertical	PASS

Bandedge

Mode:	Tx	Channel:	2405MHz
-------	----	----------	---------

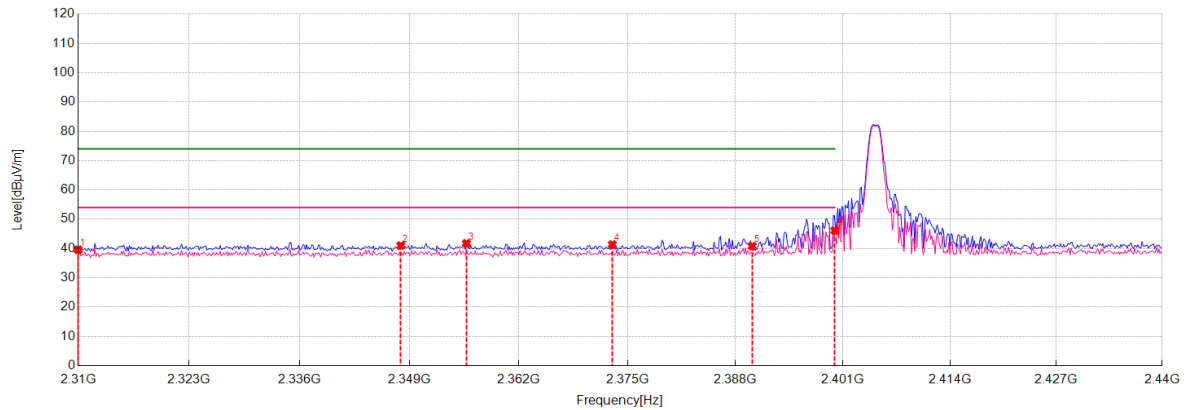

★ PK Detector
 ★ AV Detector


Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310.00	39.55	2.67	74.00	34.45	150	182	Horizontal	PASS
2	2347.96	41.00	2.96	74.00	33.00	150	264	Horizontal	PASS
3	2355.76	41.75	2.97	74.00	32.25	150	305	Horizontal	PASS
4	2373.18	41.36	3.00	74.00	32.64	150	81	Horizontal	PASS
5	2390.00	40.81	2.95	74.00	33.19	150	230	Horizontal	PASS
6	2400.00	46.13	3.24	74.00	27.87	150	210	Horizontal	PASS

Mode:	Tx	Channel:	2405MHz
-------	----	----------	---------

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

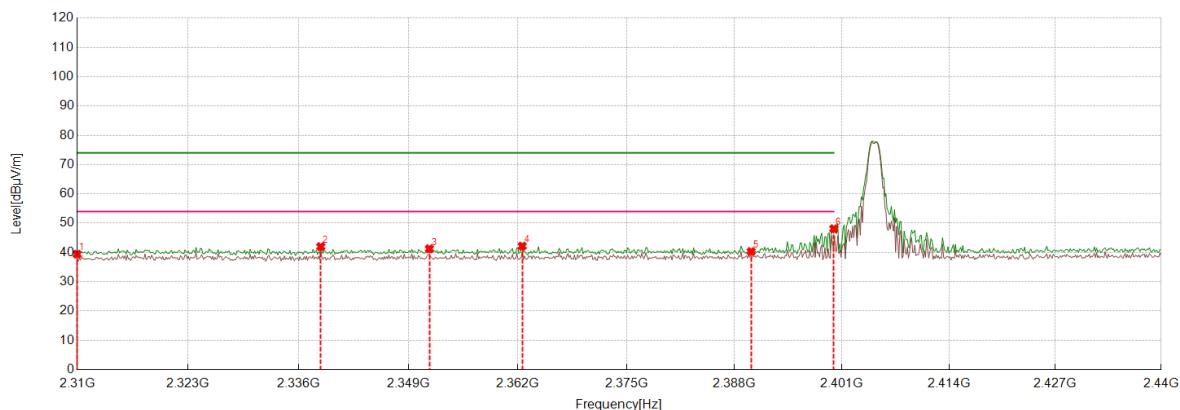

★ PK Detector ★ AV Detector


Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310.00	39.44	2.67	74.00	34.56	150	276	Vertical	PASS
2	2338.60	42.01	2.82	74.00	31.99	150	0	Vertical	PASS
3	2351.47	41.28	2.99	74.00	32.72	150	240	Vertical	PASS
4	2362.52	42.19	2.89	74.00	31.81	150	159	Vertical	PASS
5	2390.00	40.33	2.95	74.00	33.67	150	94	Vertical	PASS
6	2400.00	48.12	3.24	74.00	25.88	150	11	Vertical	PASS

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2475MHz
-------	----	----------	---------

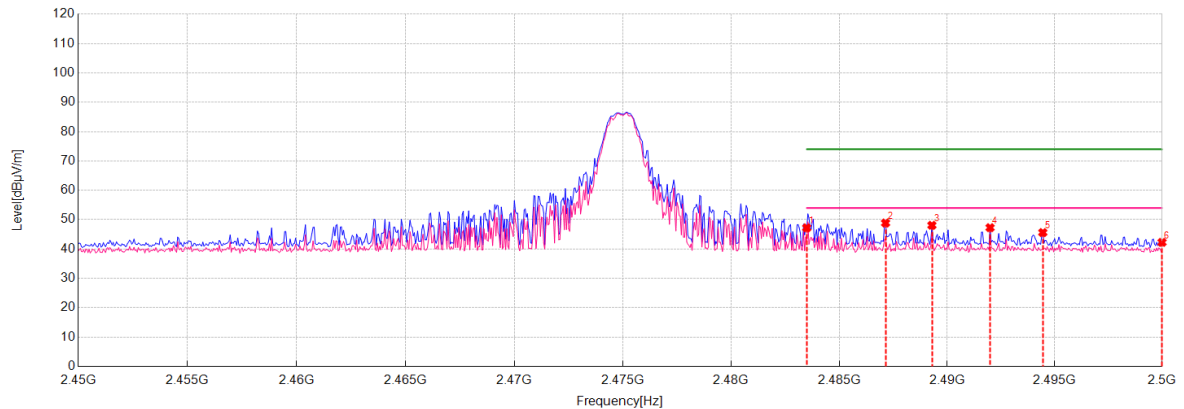


★ PK Detector ★ AV Detector

Suspected Data List									
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.50	47.21	3.46	74.00	26.79	150	37	Horizontal	PASS
2	2487.15	48.86	3.53	74.00	25.14	150	141	Horizontal	PASS
3	2489.30	48.07	3.56	74.00	25.93	150	143	Horizontal	PASS
4	2492.00	47.27	3.56	74.00	26.73	150	154	Horizontal	PASS
5	2494.45	45.60	3.58	74.00	28.40	150	162	Horizontal	PASS
6	2500.00	42.26	3.50	74.00	31.74	150	126	Horizontal	PASS

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2475MHz
-------	----	----------	---------

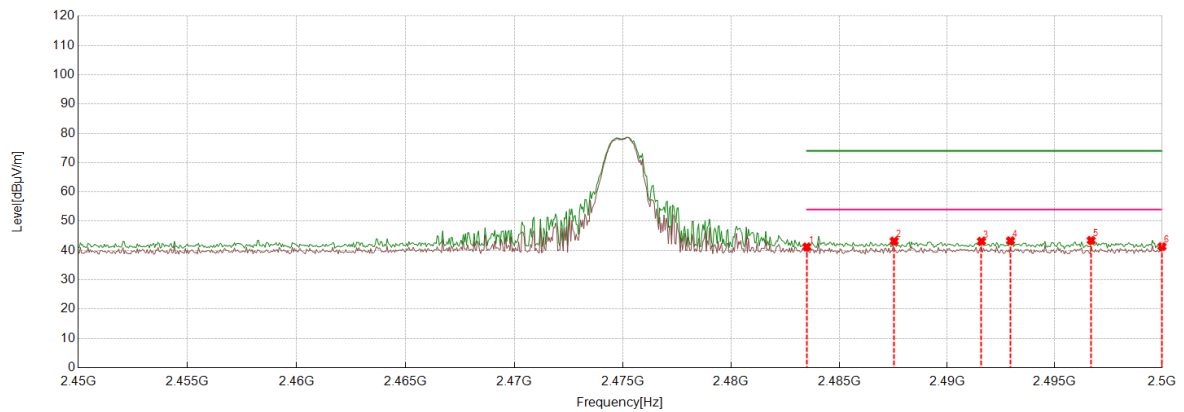

★ PK Detector ★ AV Detector

Suspected Data List									
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.50	41.26	3.46	74.00	32.74	150	135	Vertical	PASS
2	2487.55	43.24	3.50	74.00	30.76	150	214	Vertical	PASS
3	2491.60	43.16	3.56	74.00	30.84	150	108	Vertical	PASS
4	2492.95	43.34	3.57	74.00	30.66	150	124	Vertical	PASS
5	2496.70	43.46	3.58	74.00	30.54	150	196	Vertical	PASS
6	2500.00	41.34	3.50	74.00	32.66	150	235	Vertical	PASS

Field strength of fundamental

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2405	79.06	82.27	3.21	114.00	31.73	150	284	PK	Horizontal	PASS
2	2405	74.79	77.99	3.20	114.00	36.01	150	44	PK	Vertical	PASS
3	2445	81.44	84.67	3.23	114.00	29.33	150	145	PK	Horizontal	PASS
4	2445	75.06	78.29	3.23	114.00	35.71	150	53	PK	Vertical	PASS
5	2475	83.22	86.67	3.45	114.00	27.33	150	146	PK	Horizontal	PASS
6	2475	75.10	78.55	3.45	114.00	35.45	150	26	PK	Vertical	PASS

--End of report--

Test Report No.: EFGX26050033-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Page 28 of 28