




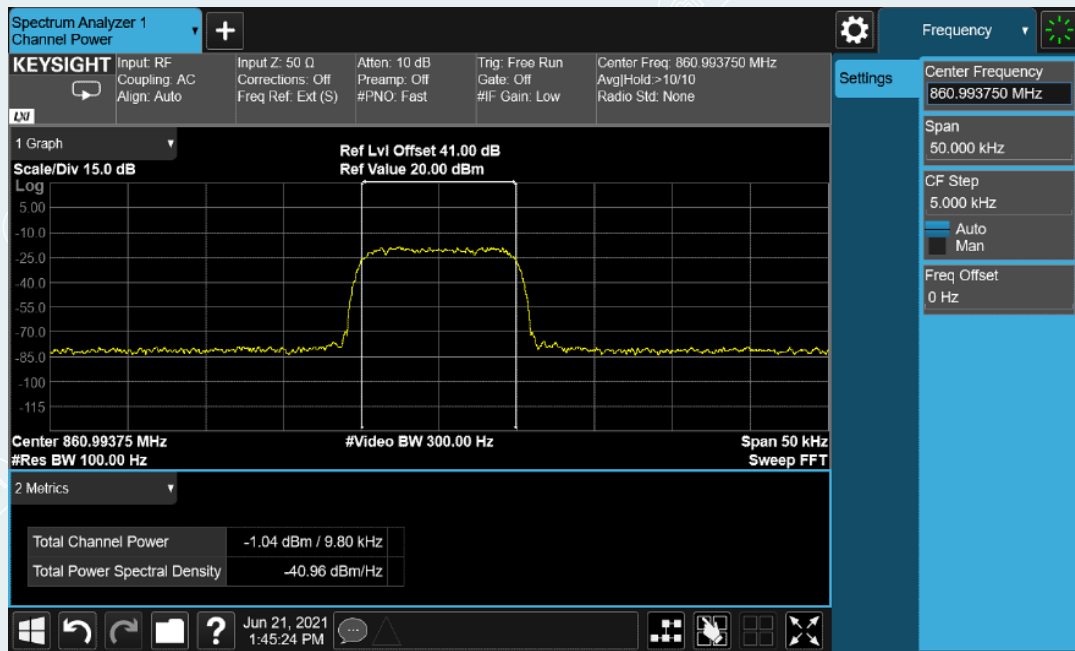

High Frequency: 860.99375MHz, Input occupied BW

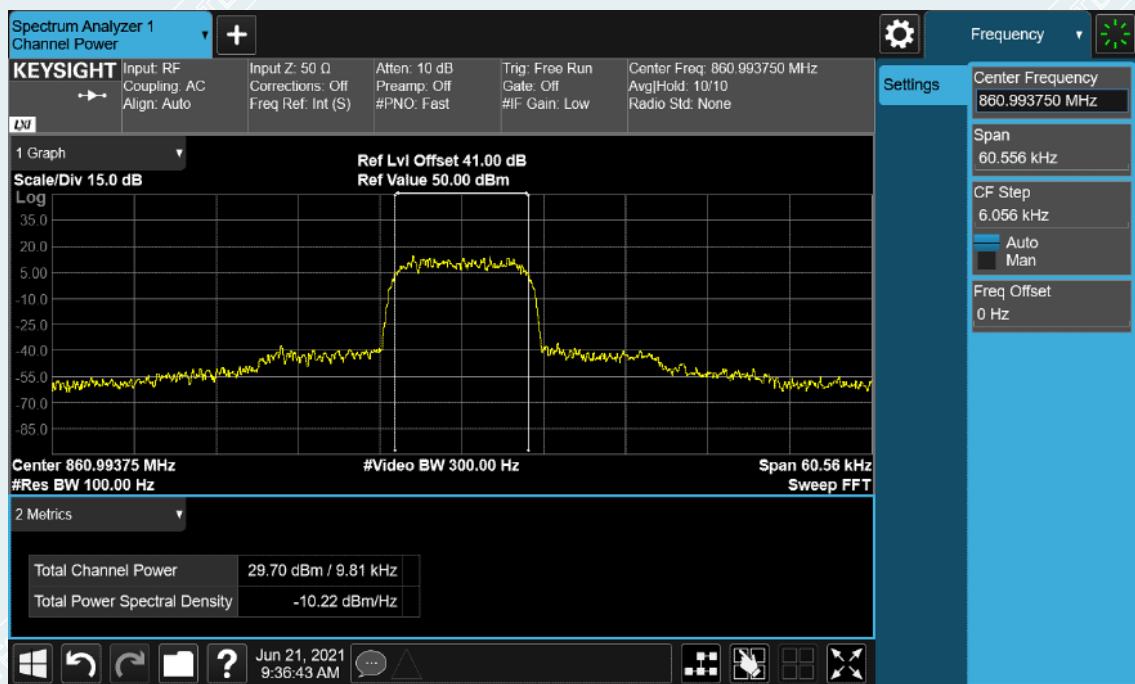


High Frequency: 860.99375MHz, Output occupied BW(AGC)

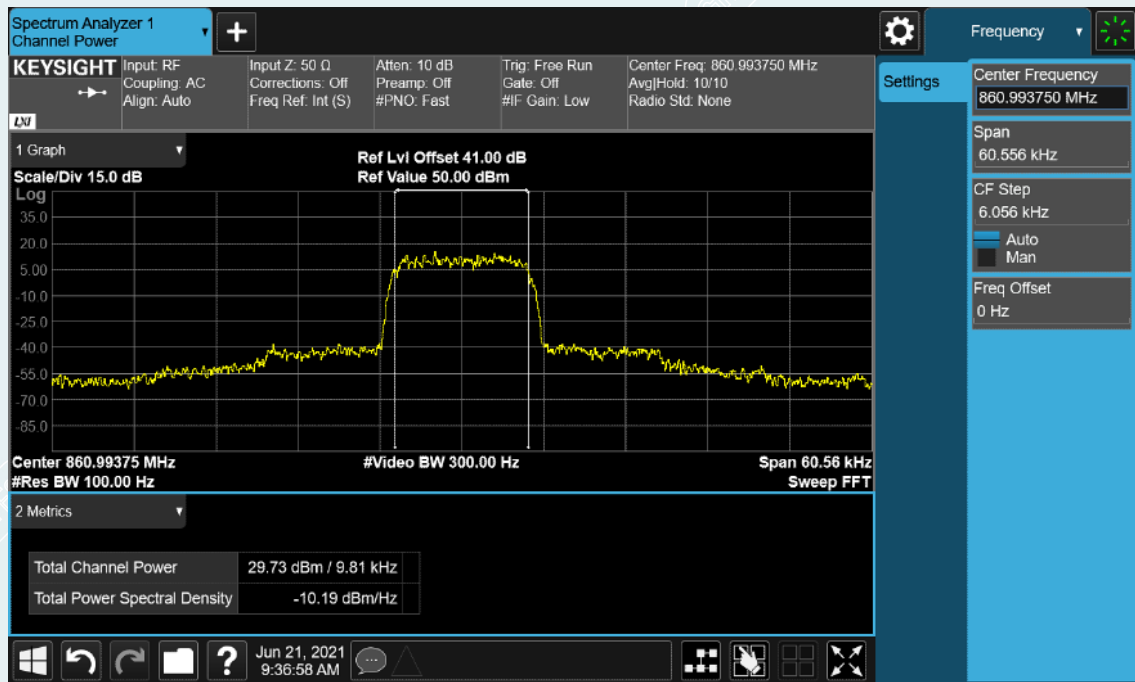


High Frequency: 860.99375MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)


10.5.5.3.2.2.2 Uplink

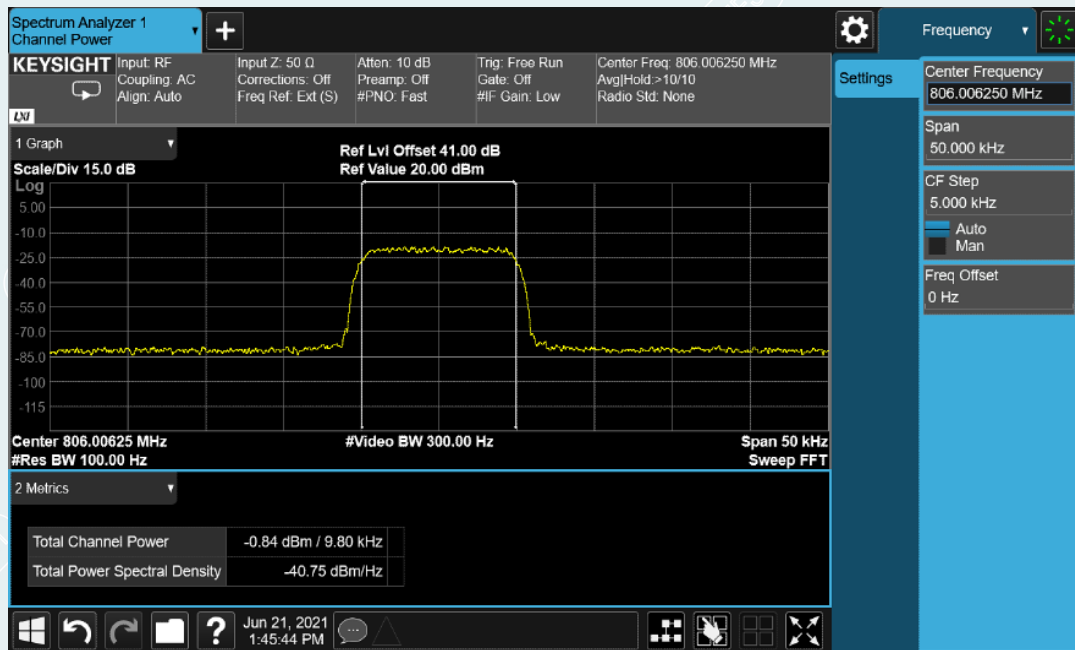


Low Frequency: 806.00625MHz, Input occupied BW

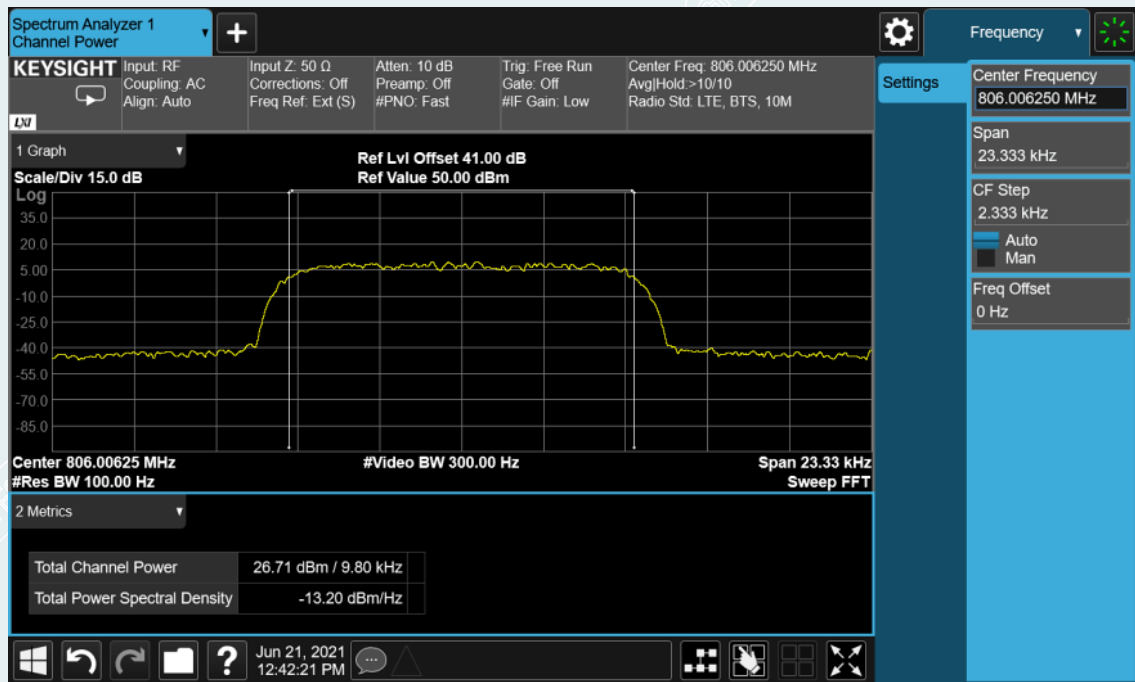


Low Frequency: 806.00625MHz, Output occupied BW(AGC)

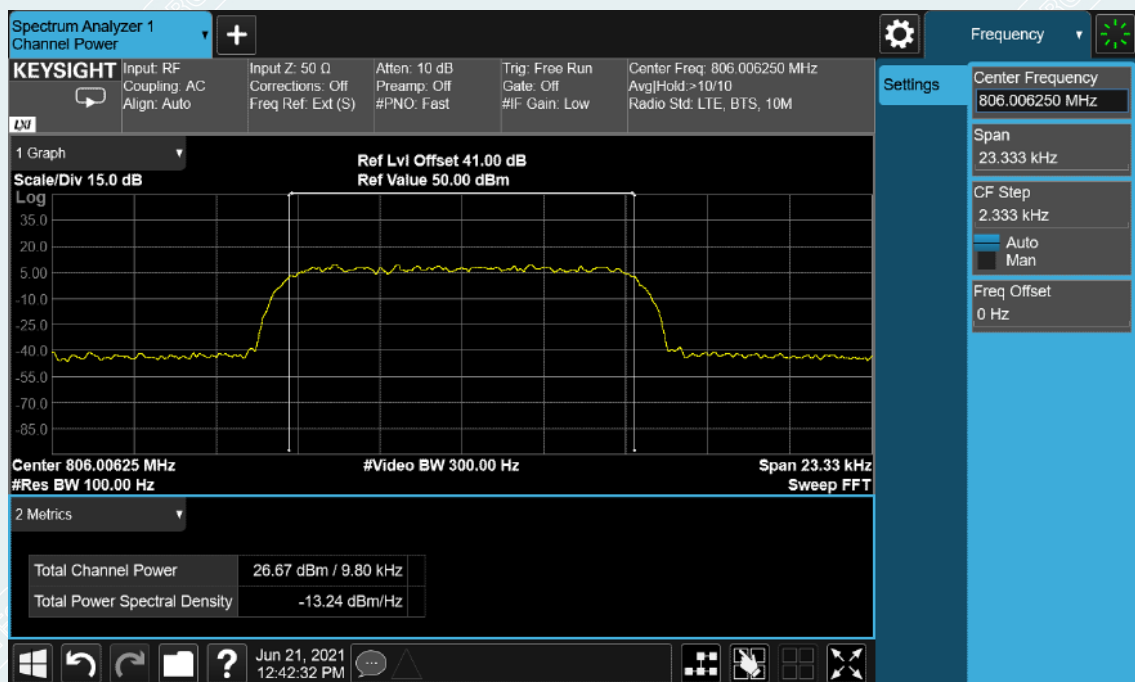


Low Frequency: 806.00625MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

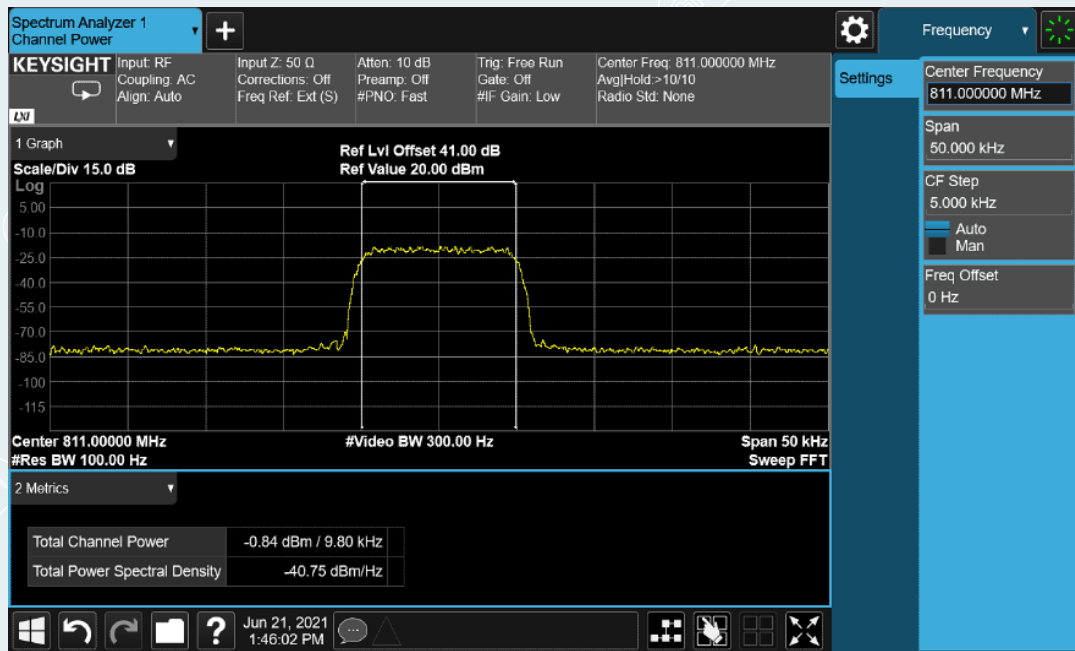


Middle Frequency: 811.0MHz, Input occupied BW

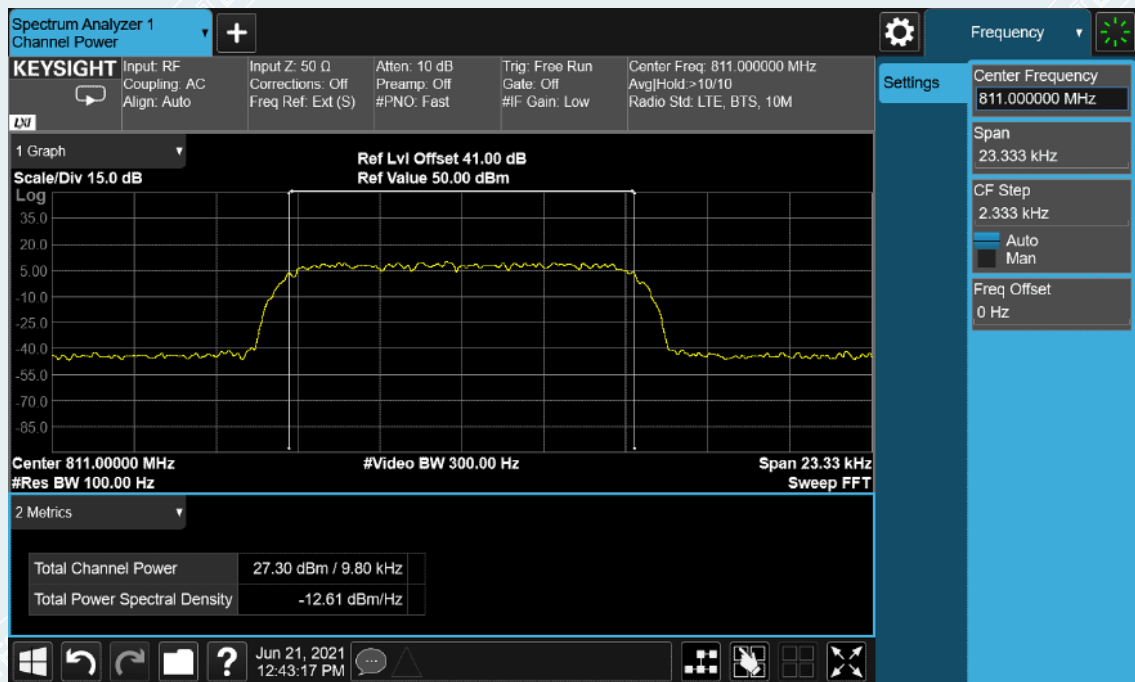


Middle Frequency: 811.0MHz, Output occupied BW(AGC)

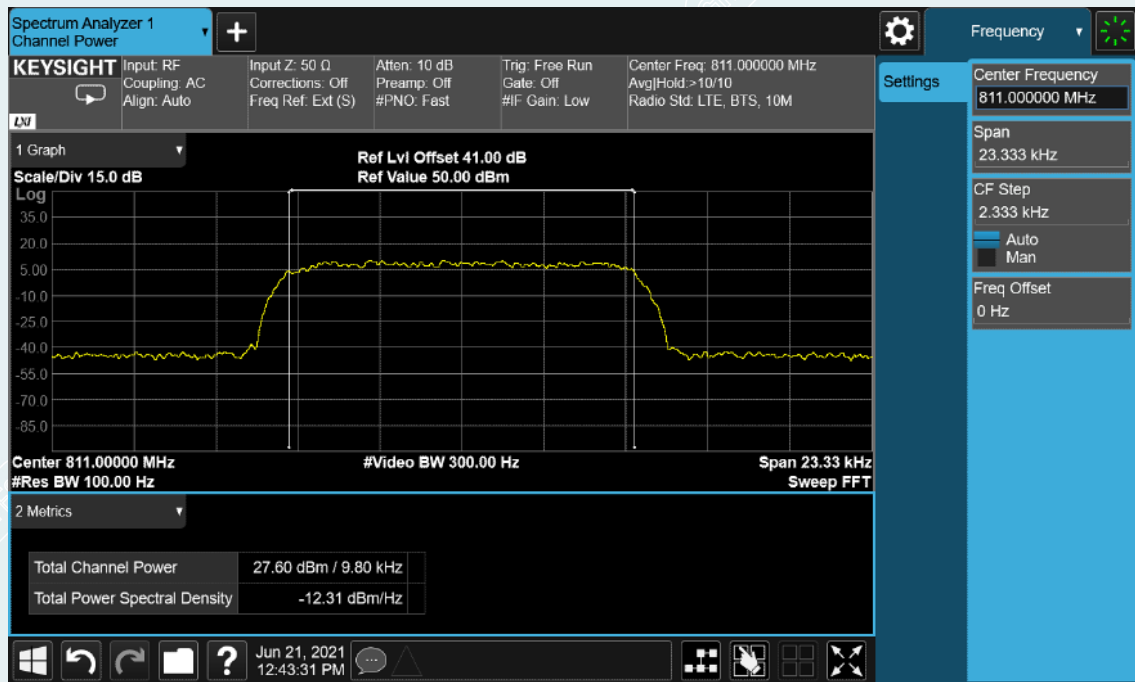


Middle Frequency: 811.0MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

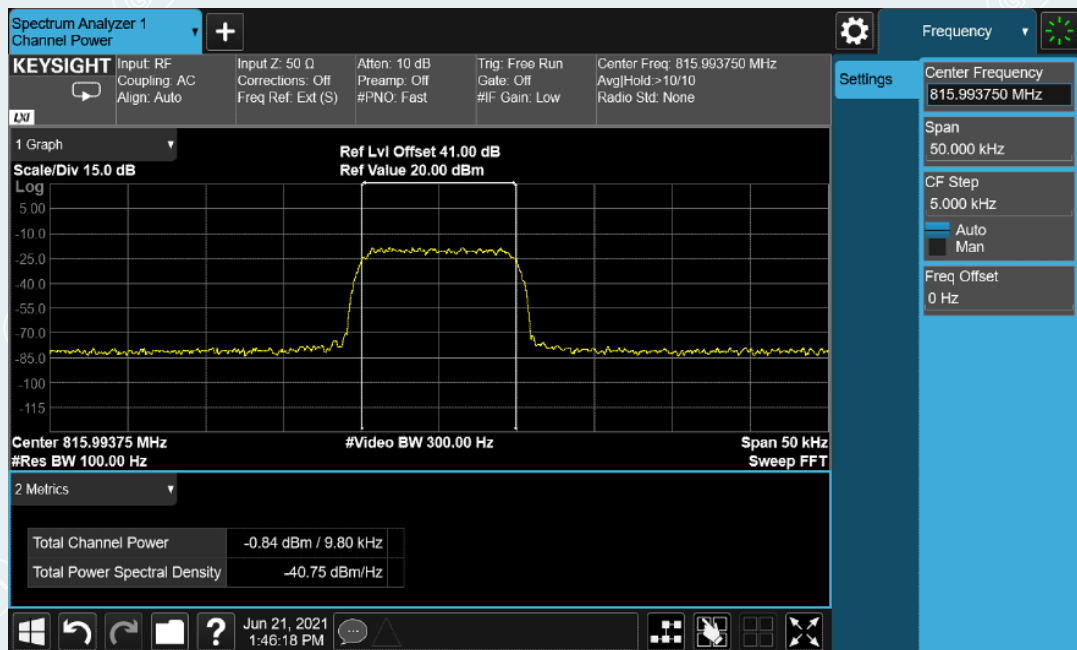

High Frequency: 815.99375MHz, Input occupied BW

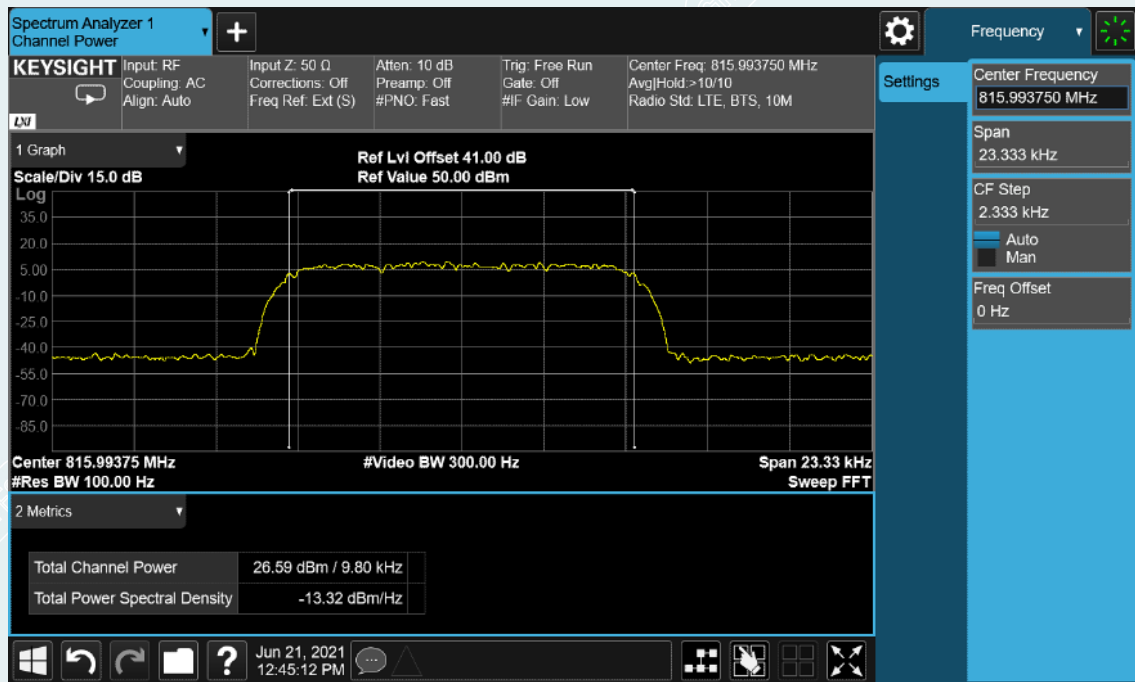


High Frequency: 815.99375MHz, Output occupied BW(AGC)

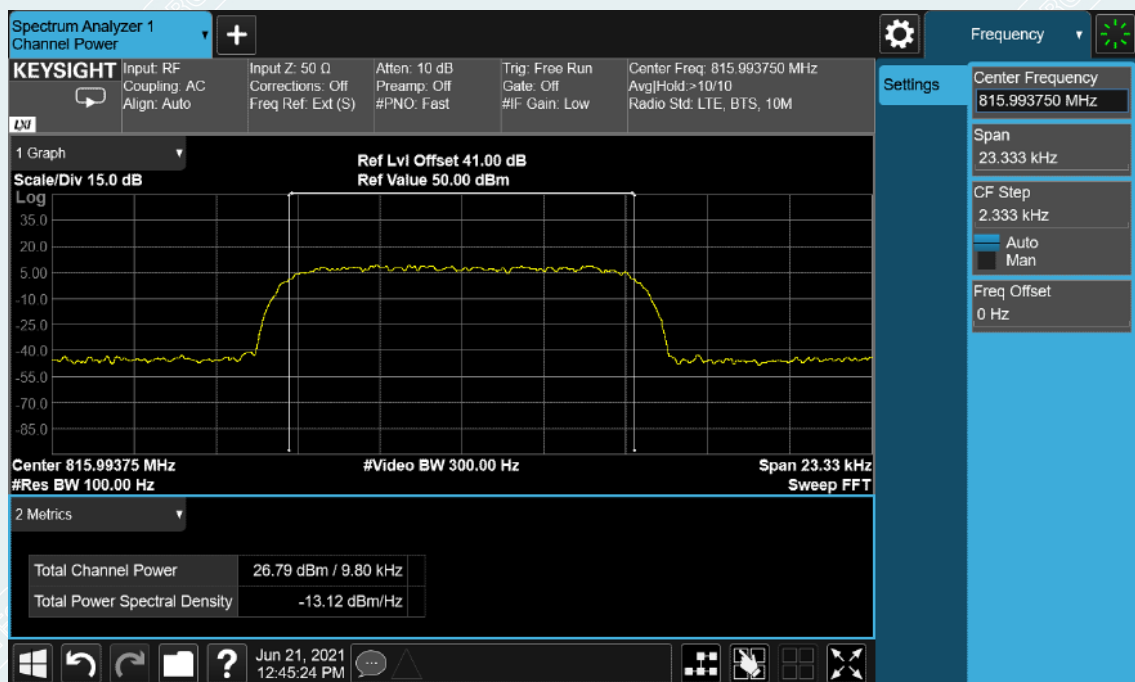


High Frequency: 815.99375MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

10.5.5.3.2.3 TETRA mode


10.5.5.3.2.3.1 Downlink

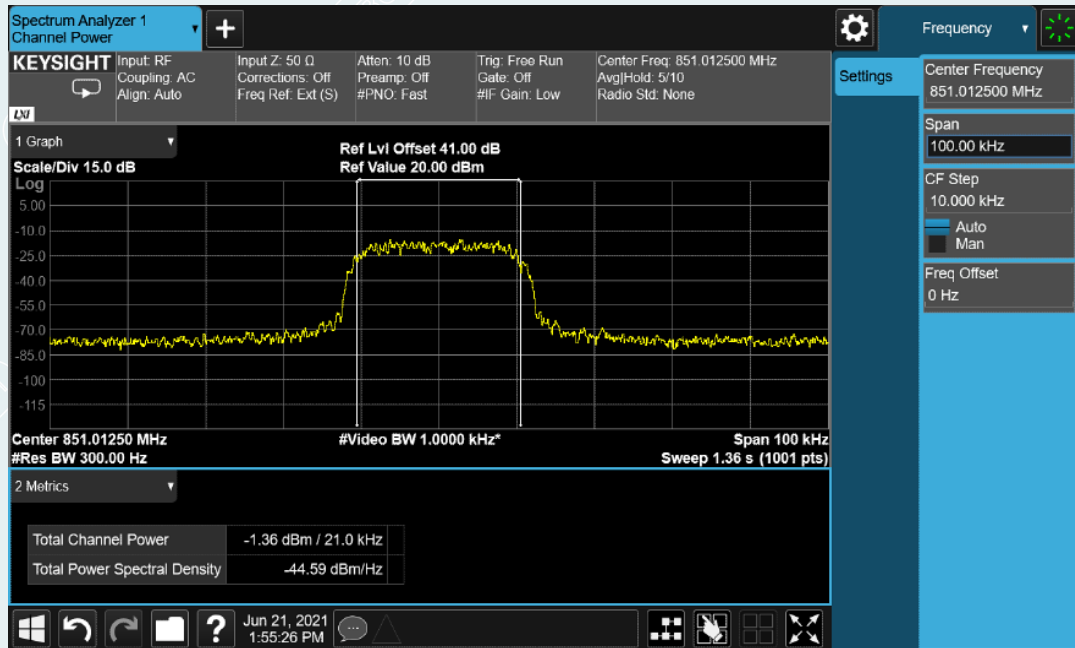


Low Frequency: 851.0125MHz, Input occupied BW

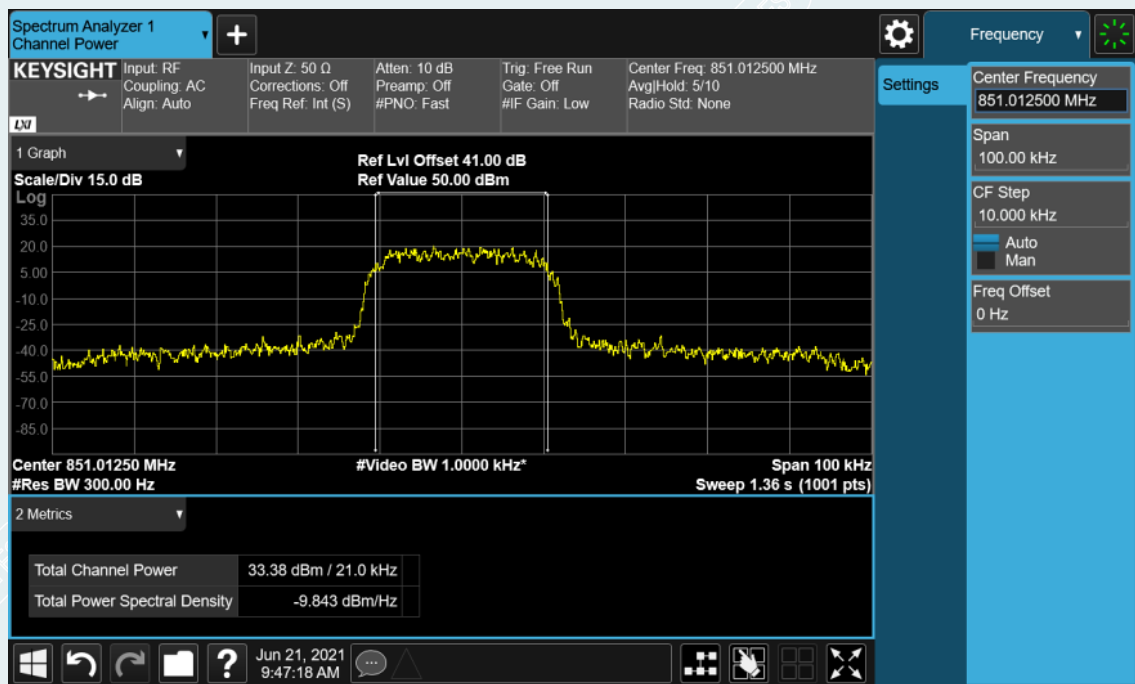


Low Frequency: 851.0125MHz, Output occupied BW(AGC)

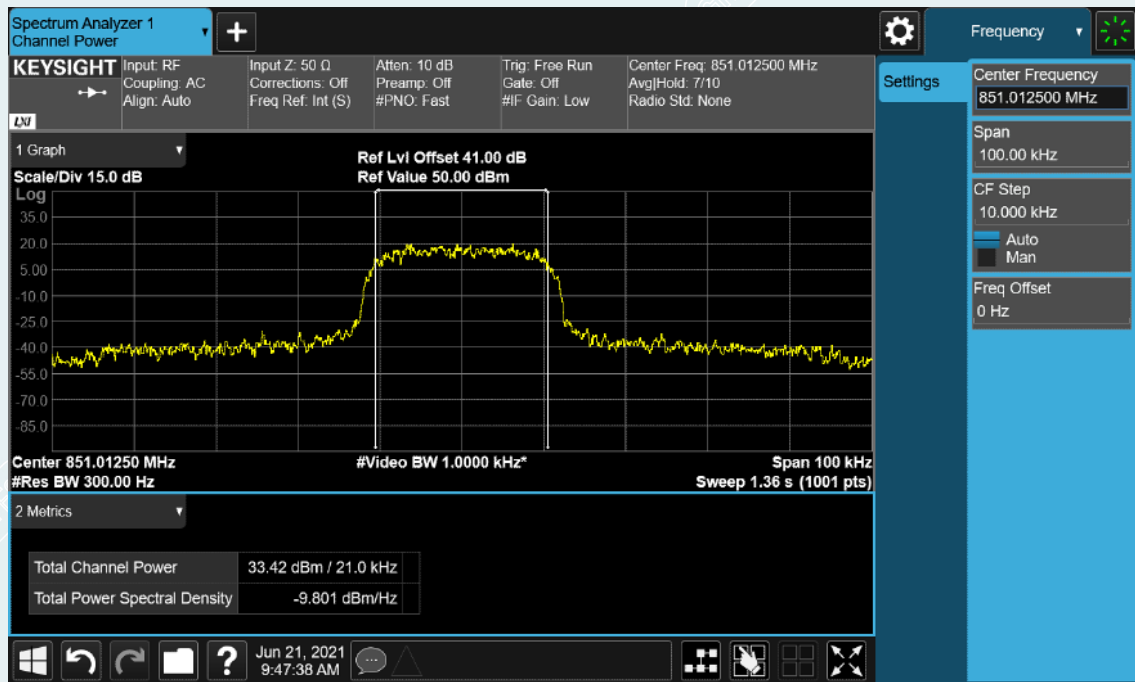


Low Frequency: 851.0125MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

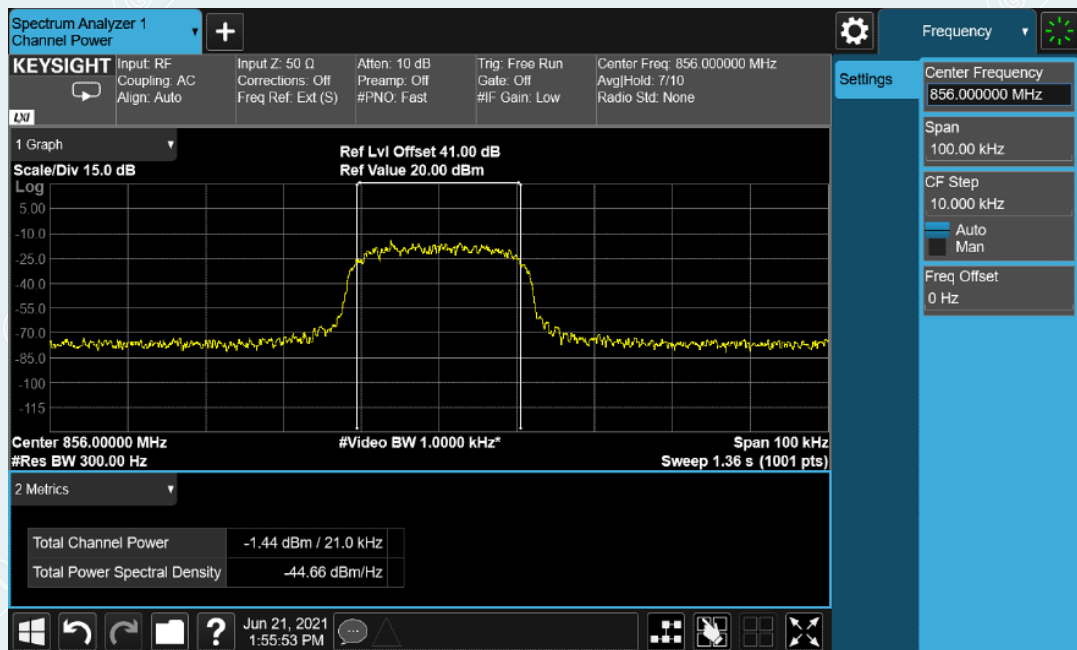


Middle Frequency: 856.0MHz, Input occupied BW

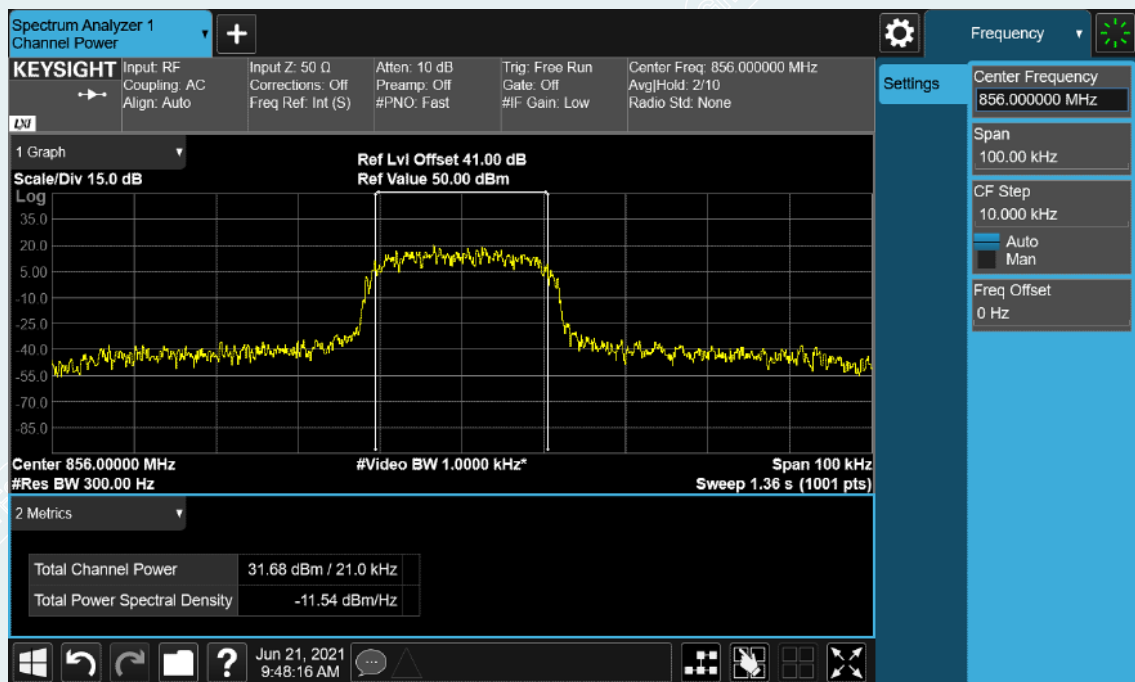


Middle Frequency: 856.0MHz, Output occupied BW(AGC)

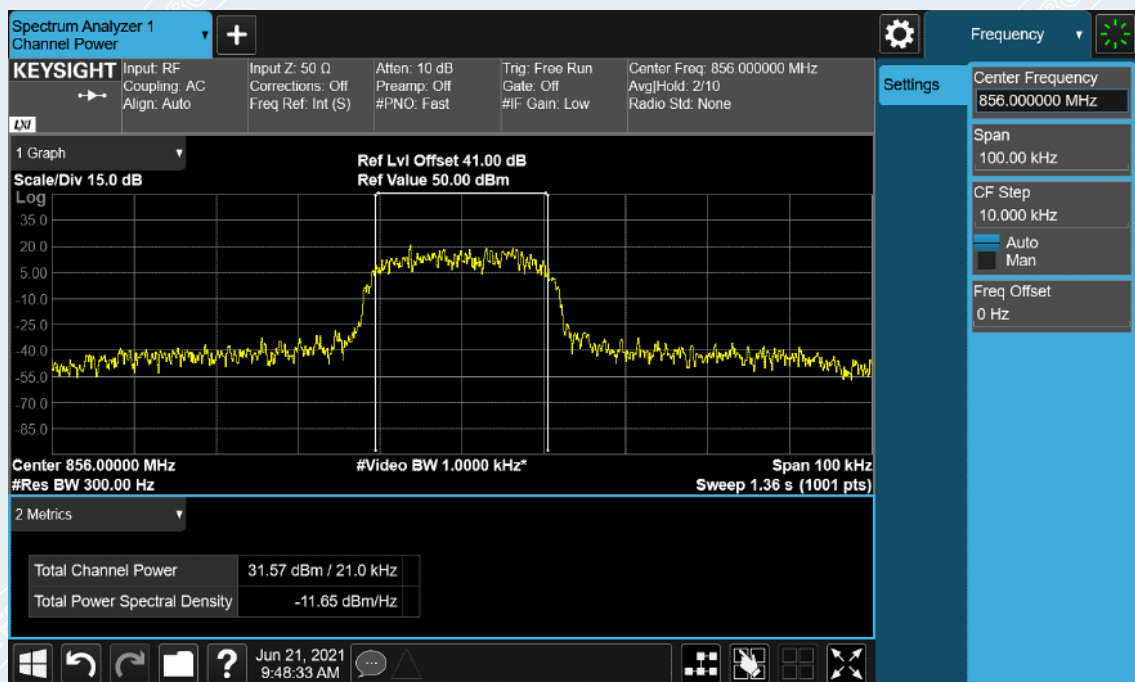


Middle Frequency: 856.0MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

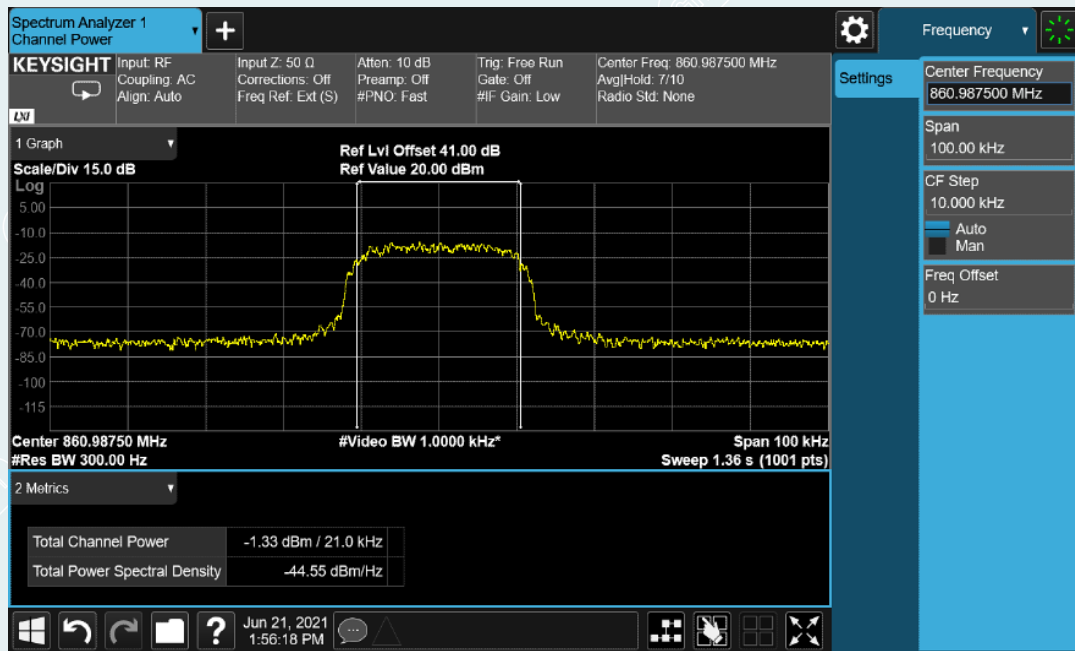

High Frequency: 860.9875MHz, Input occupied BW

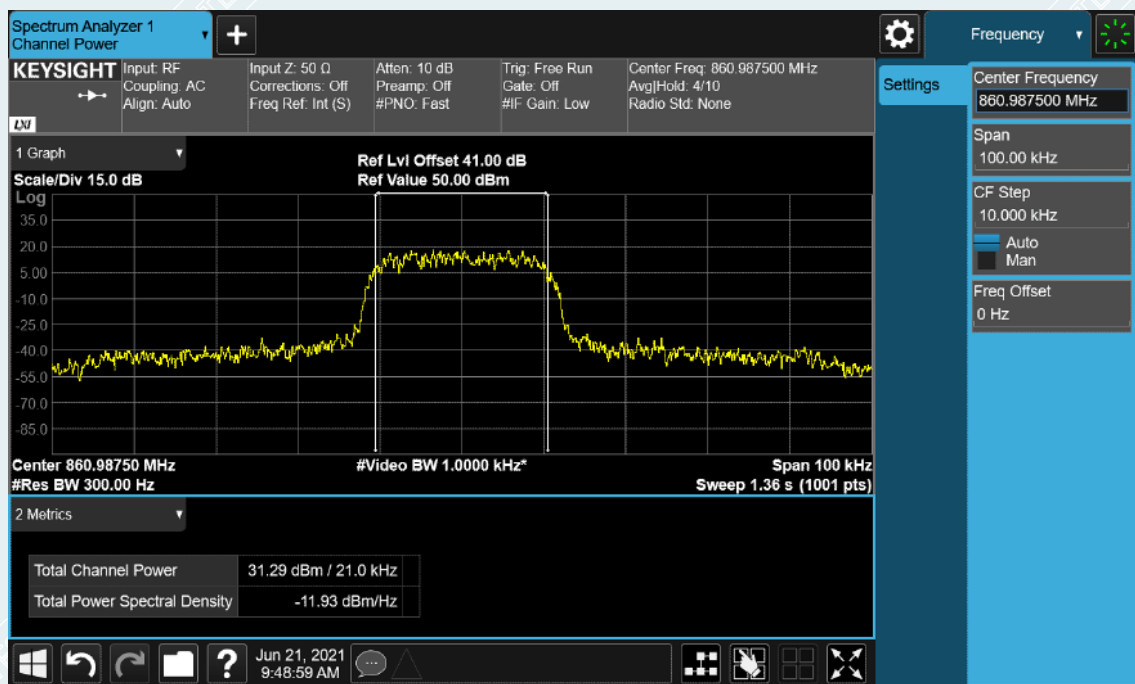


High Frequency: 860.9875MHz, Output occupied BW(AGC)

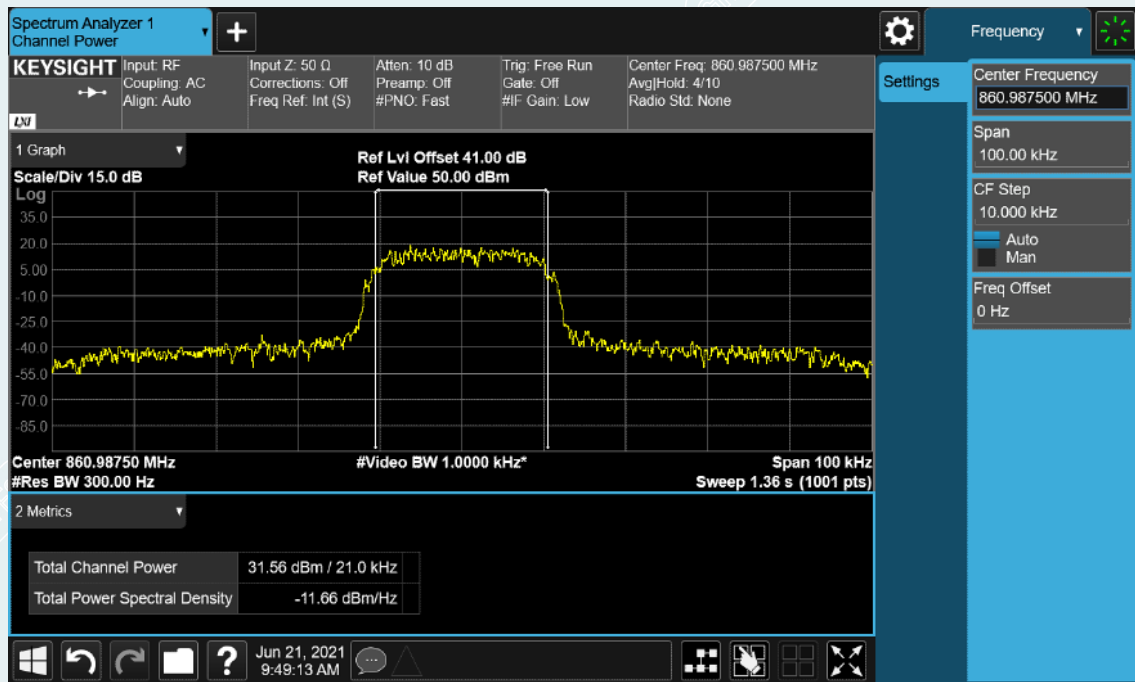


High Frequency: 860.9875MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)


10.5.5.3.2.3.2 Uplink

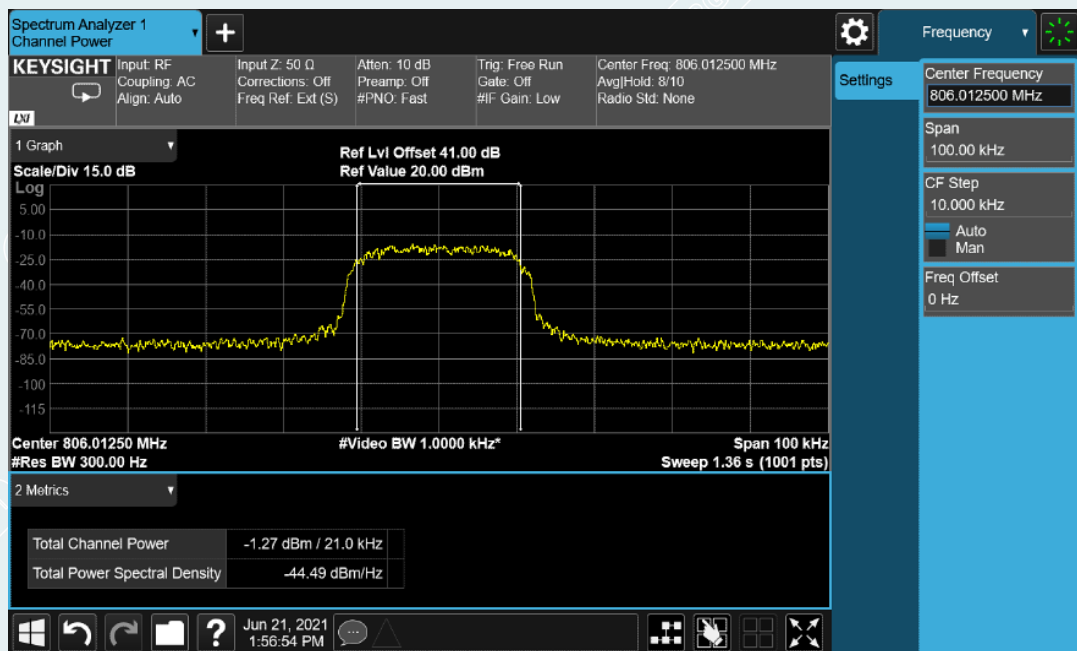


Low Frequency: 806.0125MHz, Input occupied BW

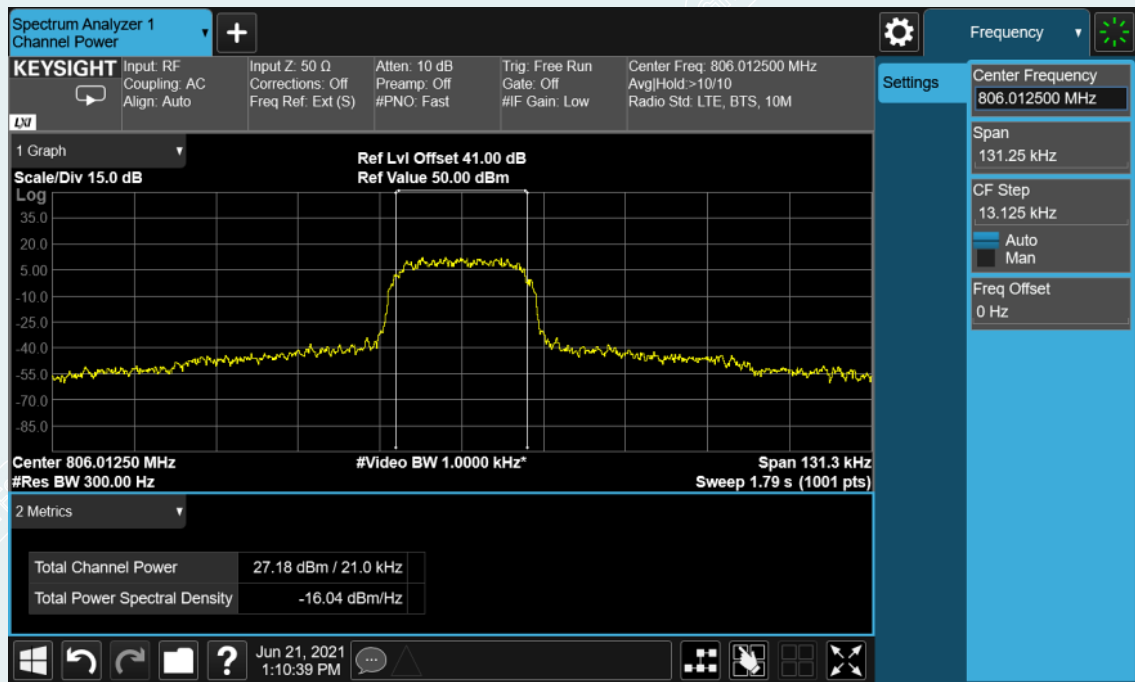


Low Frequency: 806.0125MHz, Output occupied BW(AGC)

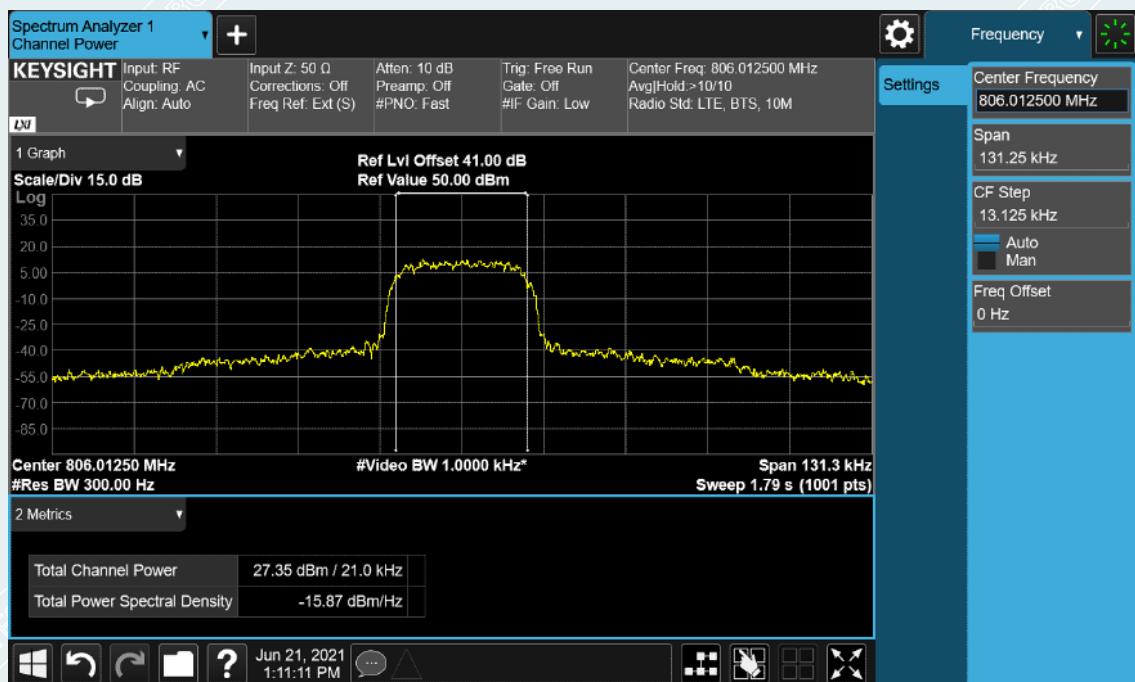


Low Frequency: 806.0125MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

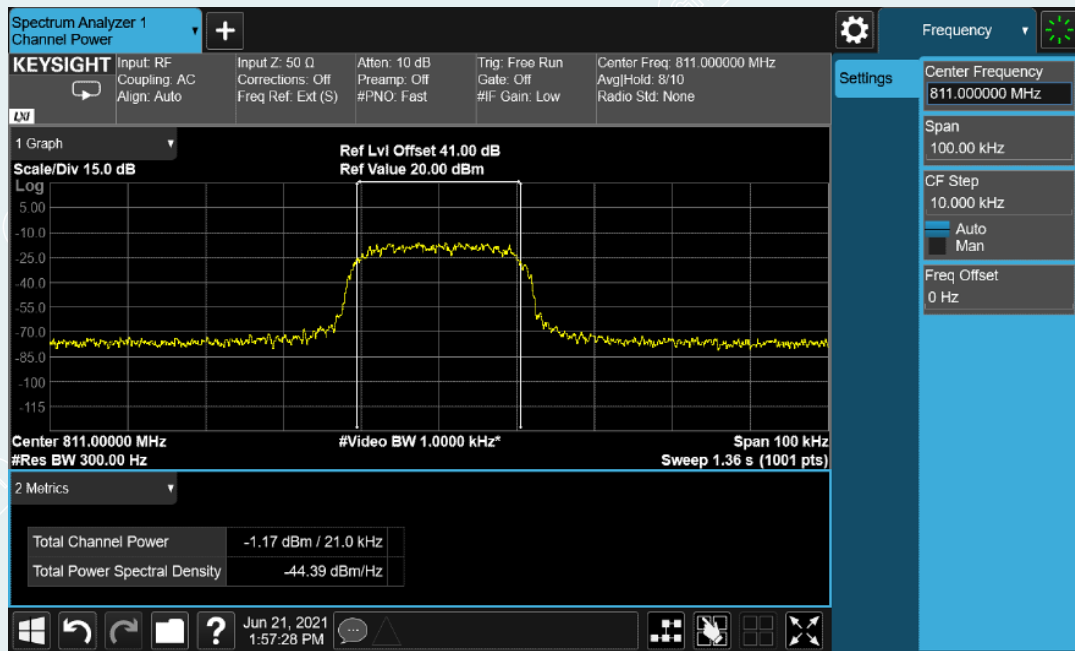


Middle Frequency: 811.0MHz, Input occupied BW

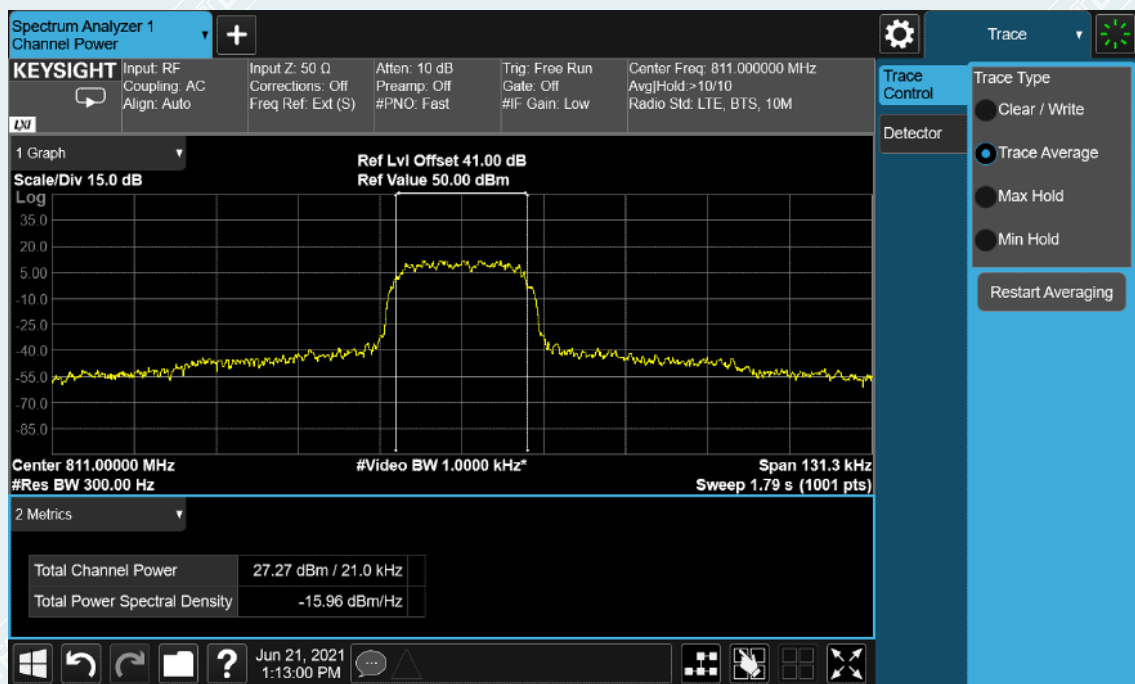


Middle Frequency: 811.0MHz, Output occupied BW(AGC)

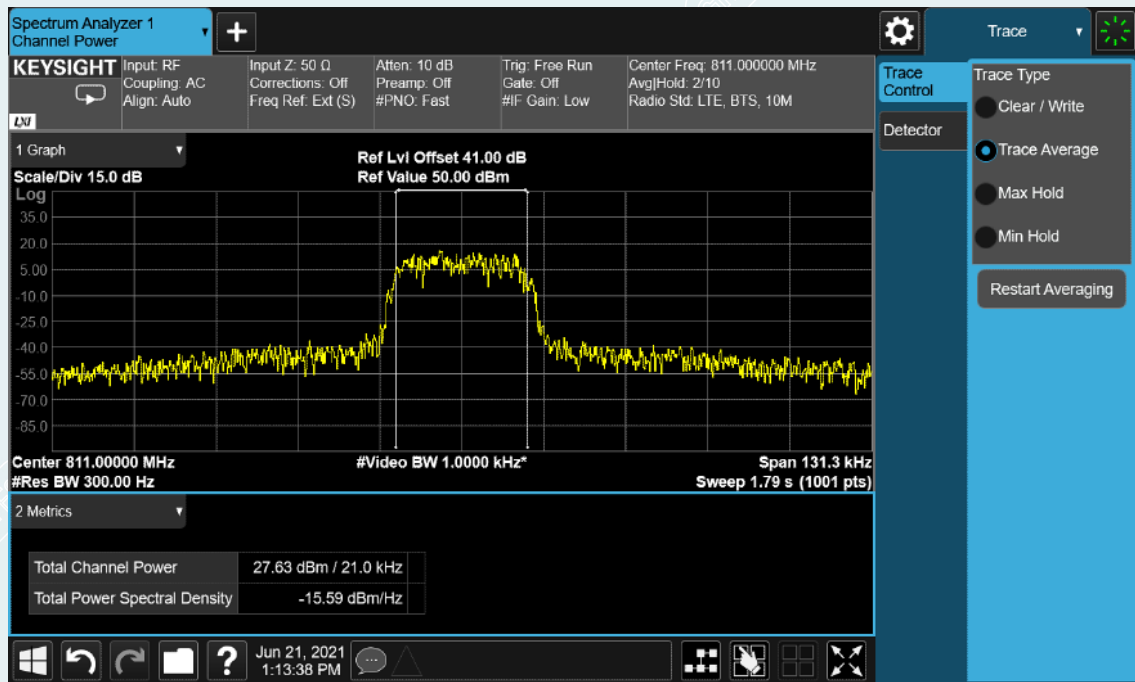


Middle Frequency: 811.0MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

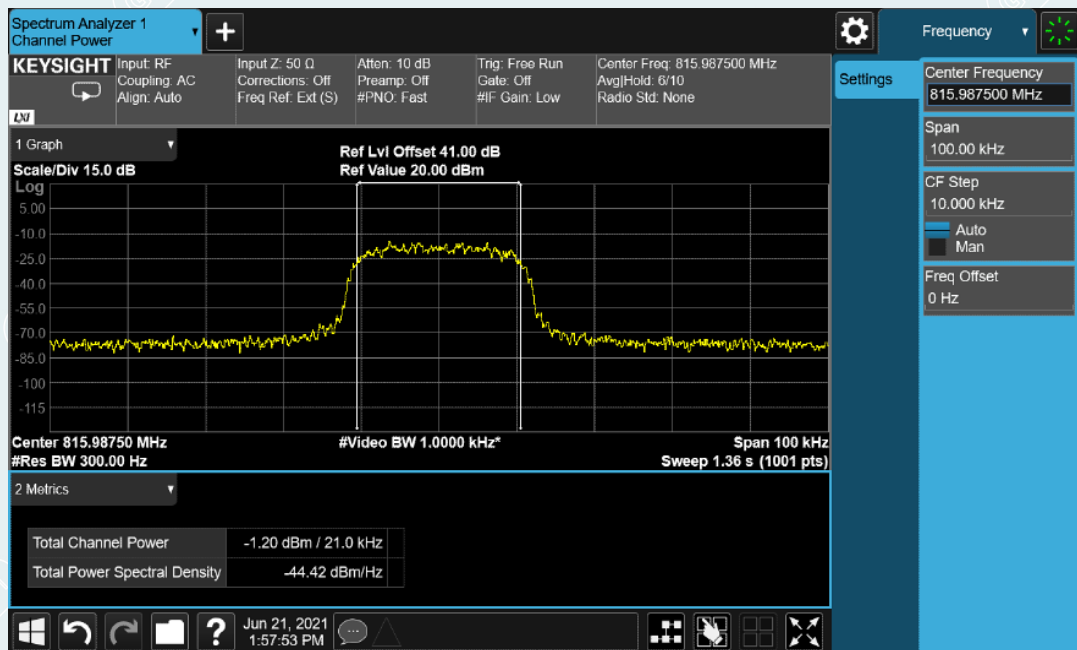

High Frequency: 815.9875MHz, Input occupied BW

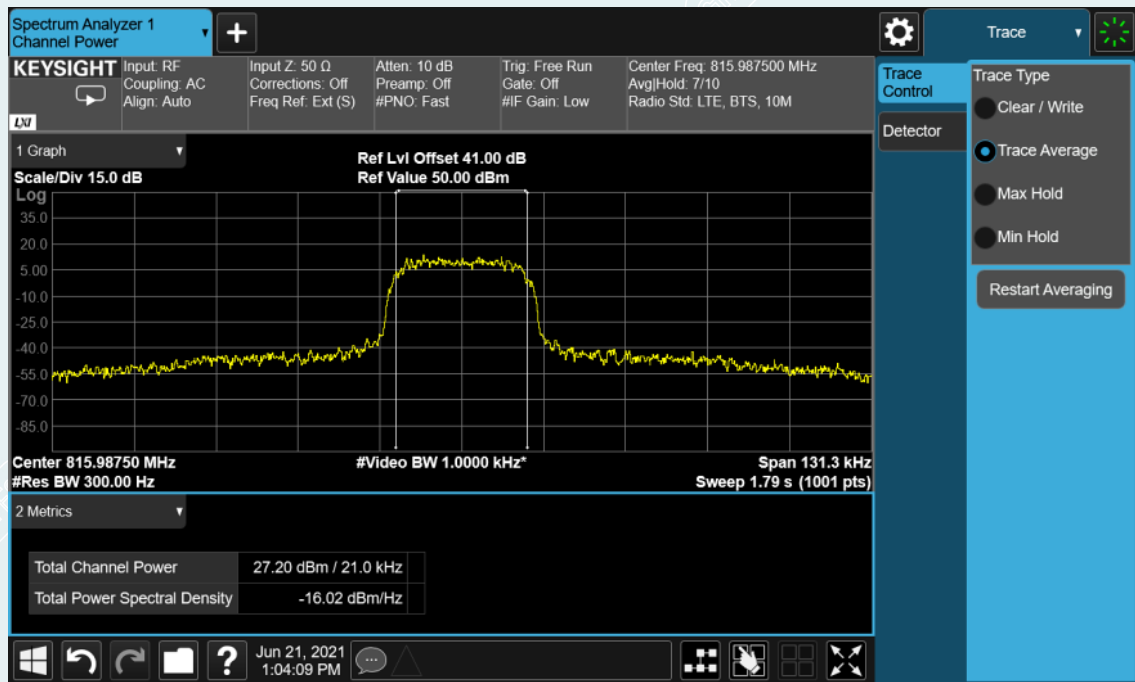


High Frequency: 815.9875MHz, Output occupied BW(AGC)

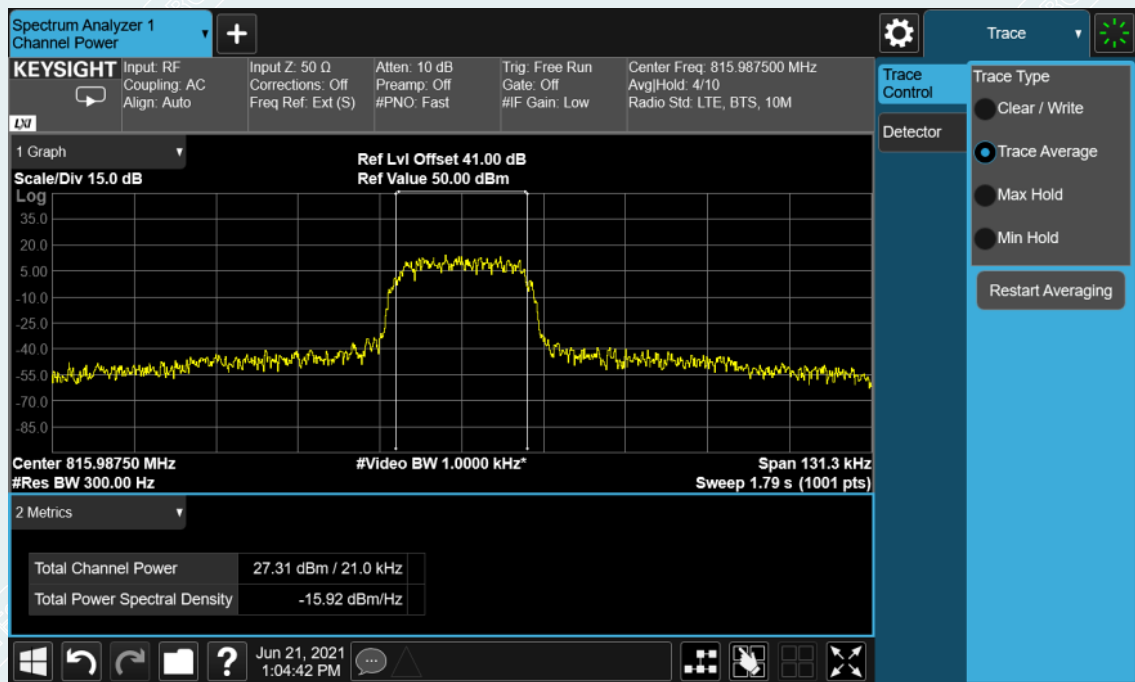


High Frequency: 815.9875MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

10.5.5.3.2.4 Analog FM mode


10.5.5.3.2.4.1 Downlink

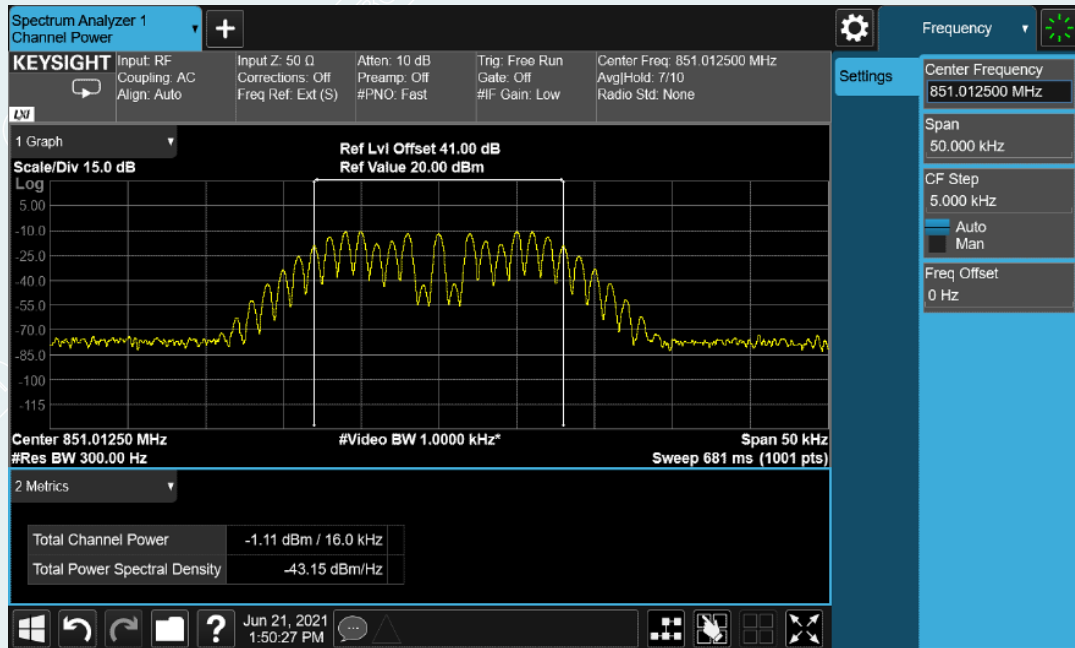


Low Frequency: 851.0125MHz, Input occupied BW

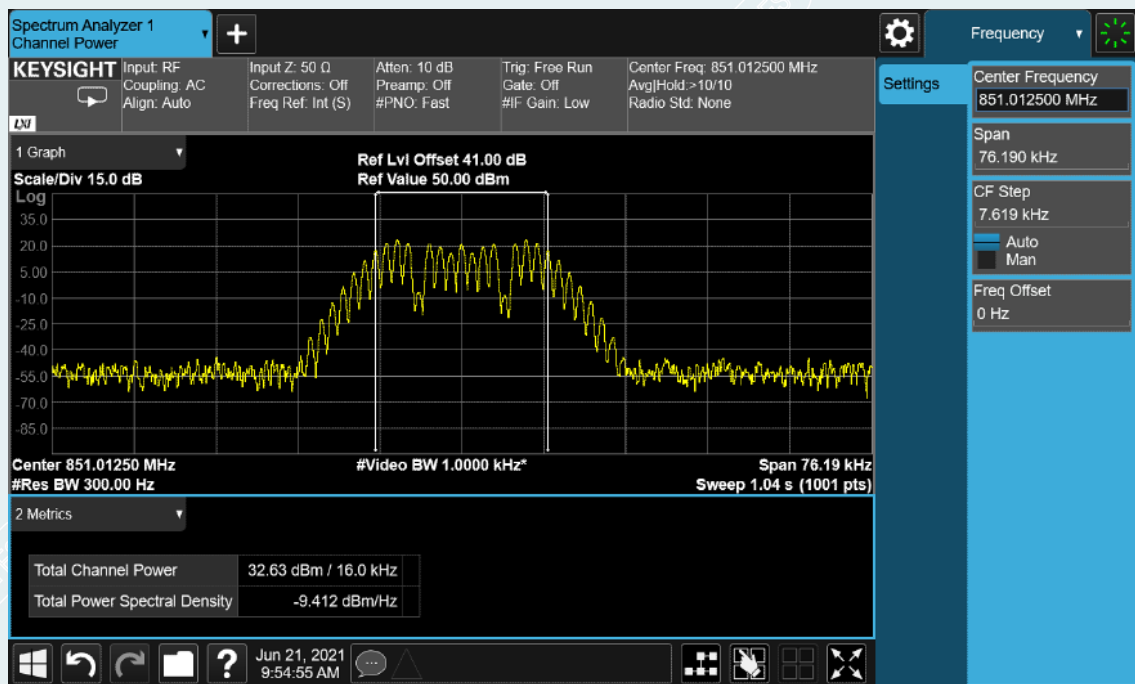


Low Frequency: 851.0125MHz, Output occupied BW(AGC)

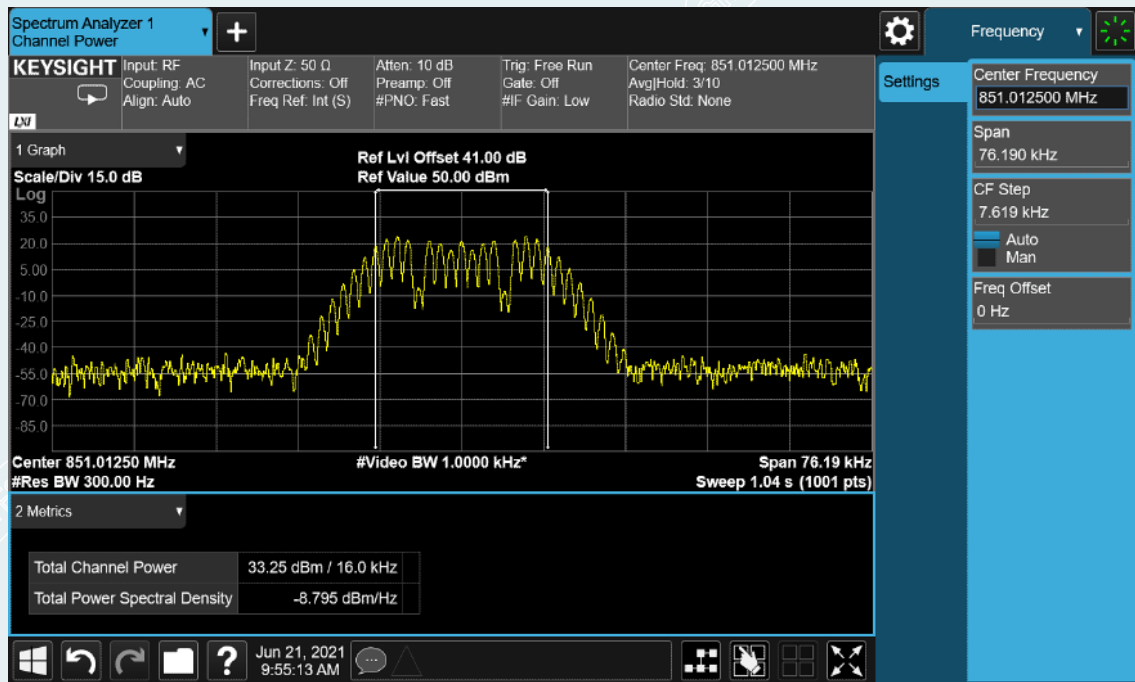


Low Frequency: 851.0125MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

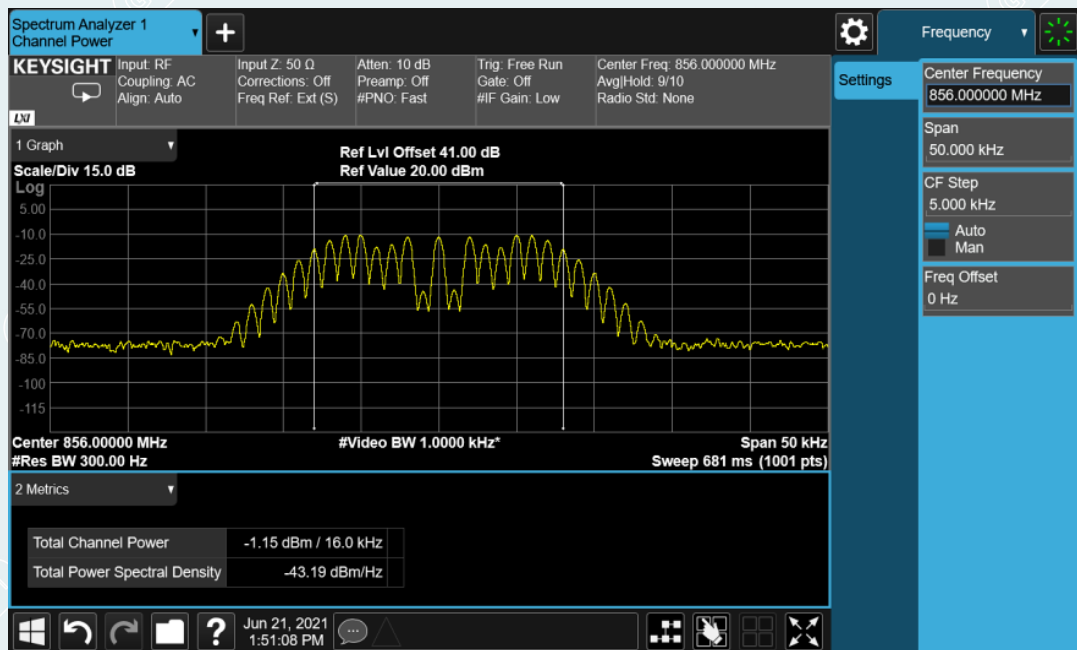


Middle Frequency: 856.0MHz, Input occupied BW

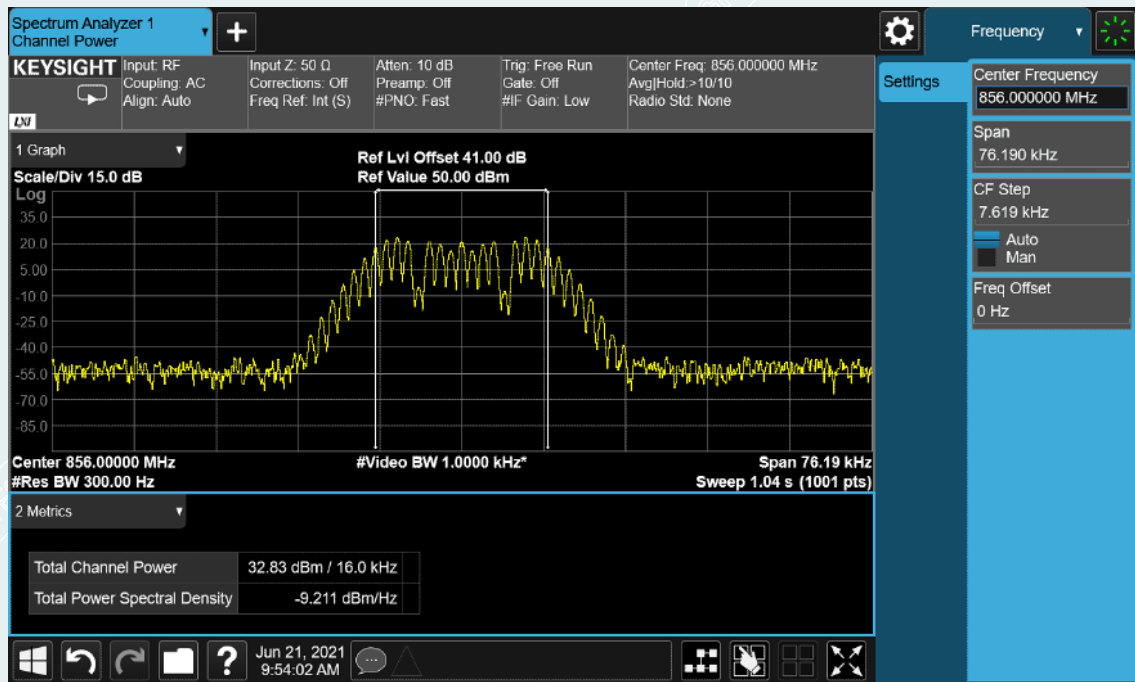


Middle Frequency: 856.0MHz, Output occupied BW(AGC)

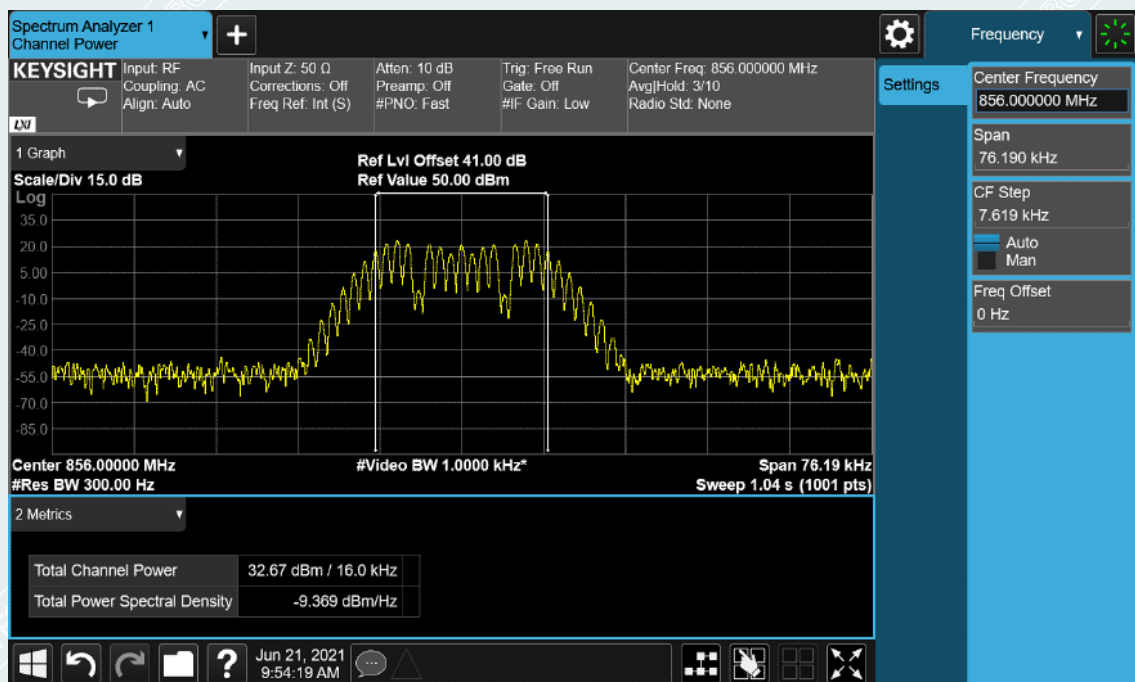


Middle Frequency: 856.0MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

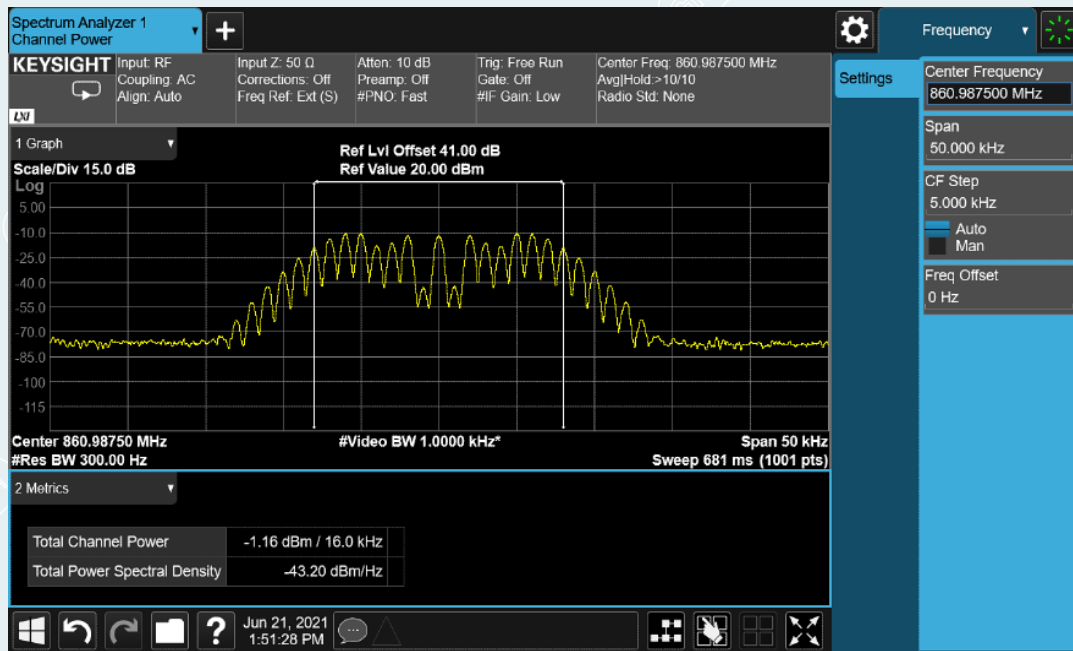

High Frequency: 860.9875MHz, Input occupied BW

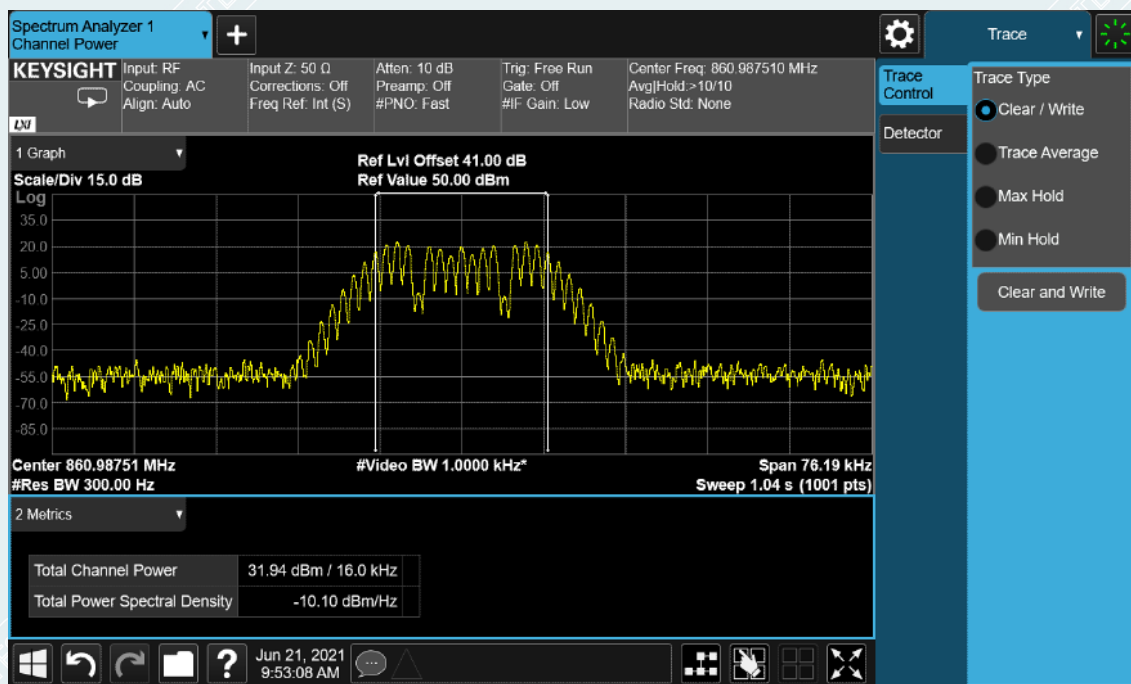


High Frequency: 860.9875MHz, Output occupied BW(AGC)

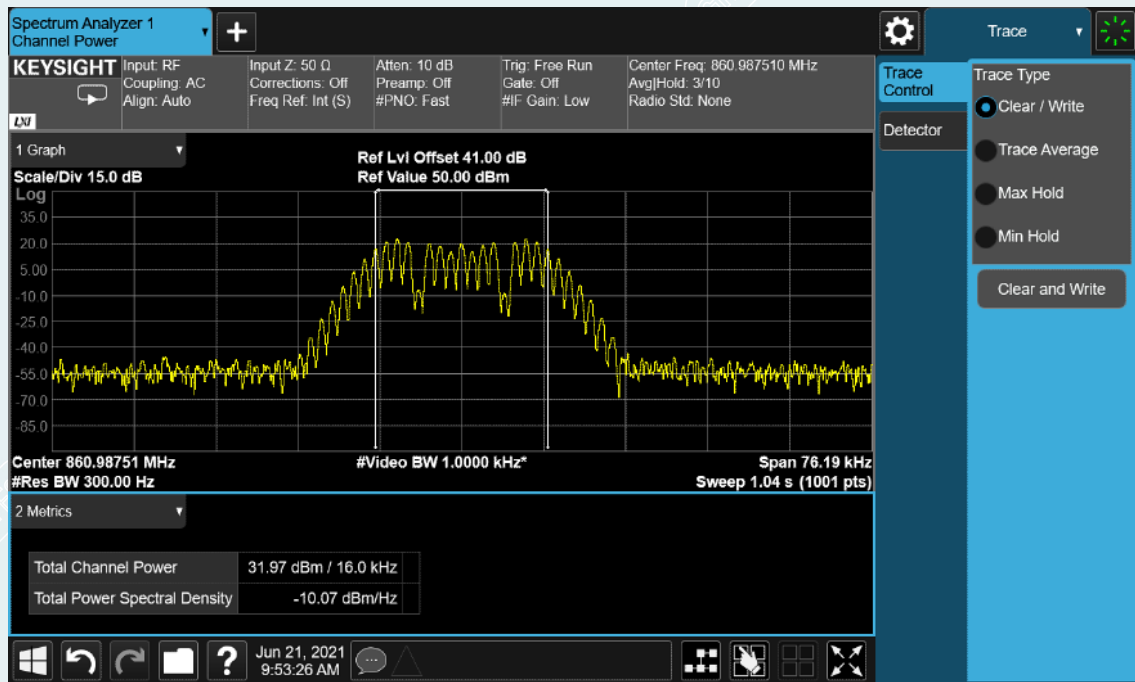


High Frequency: 860.9875MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)


10.5.5.3.2.4.2 Uplink

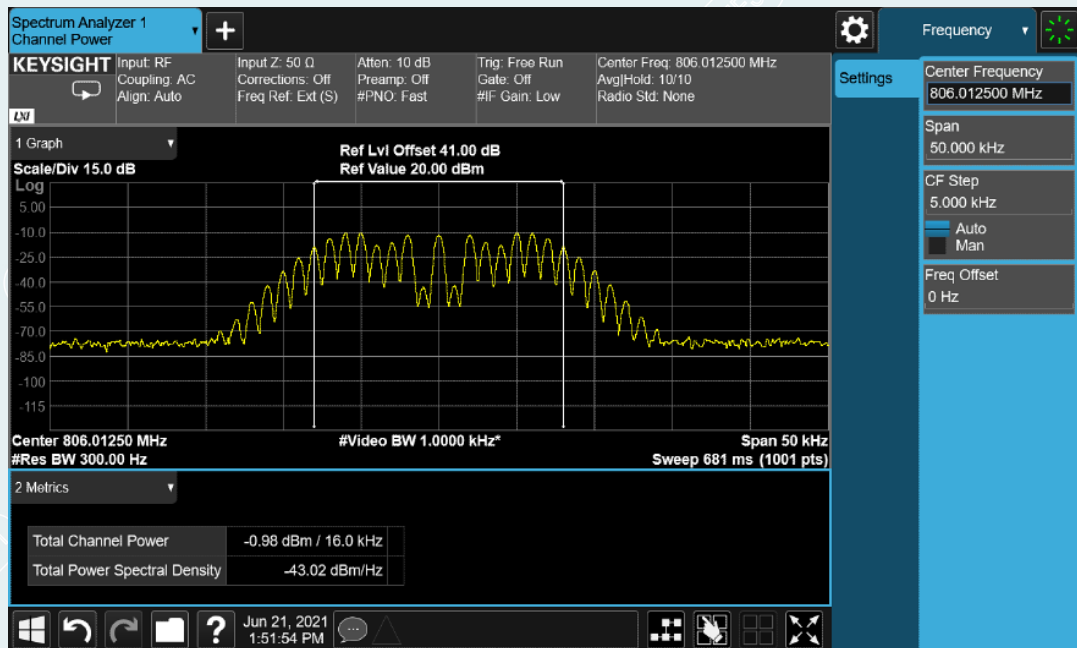


Low Frequency: 806.0125MHz, Input occupied BW

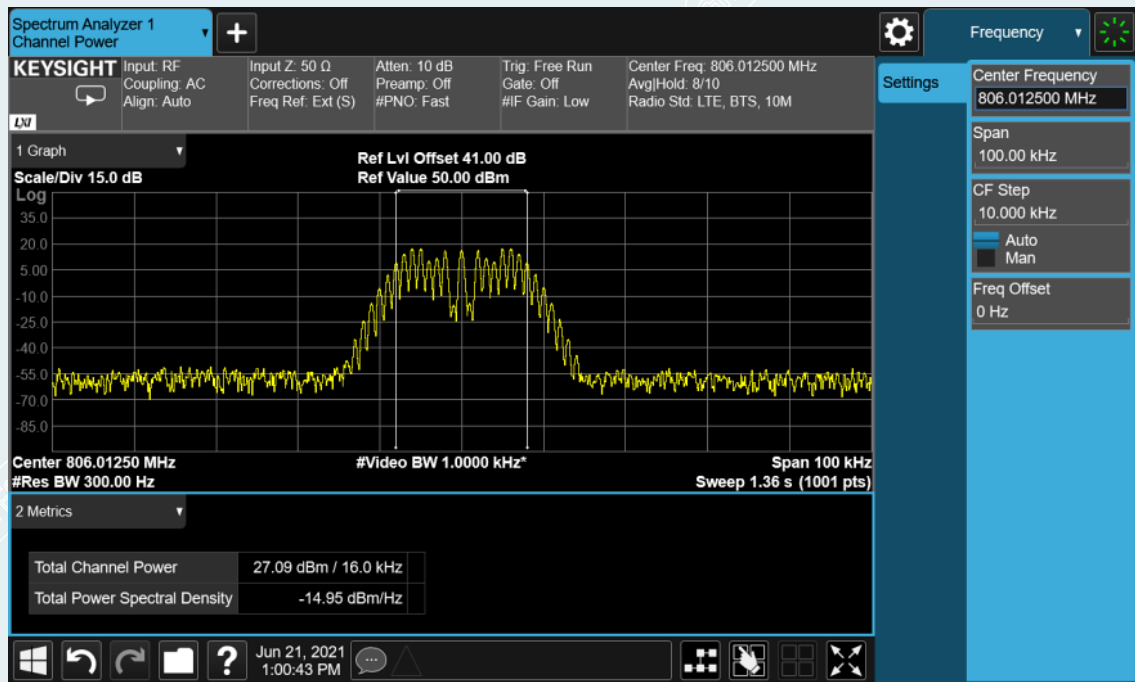


Low Frequency: 806.0125MHz, Output occupied BW(AGC)

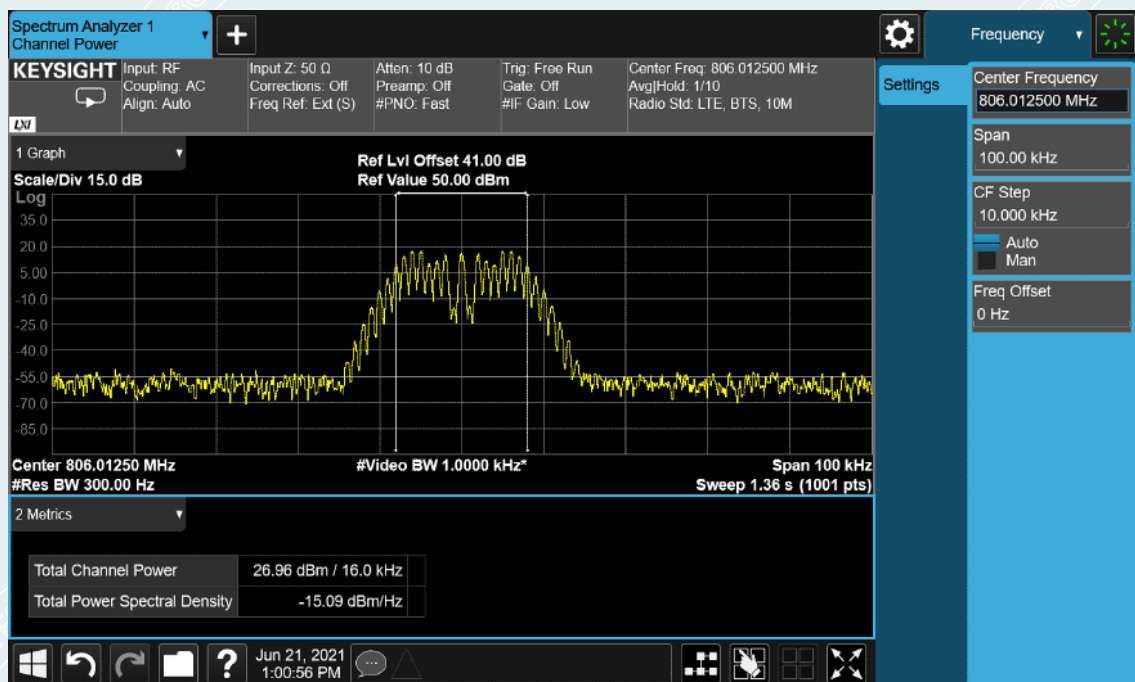


Low Frequency: 806.0125MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

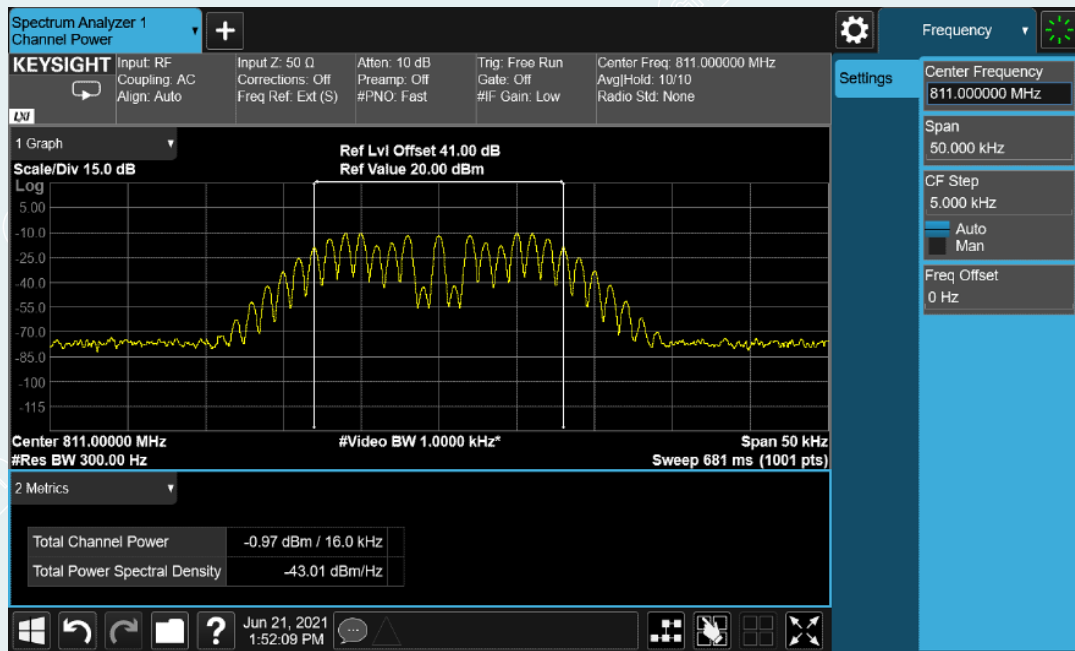


Middle Frequency: 811.0MHz, Input occupied BW

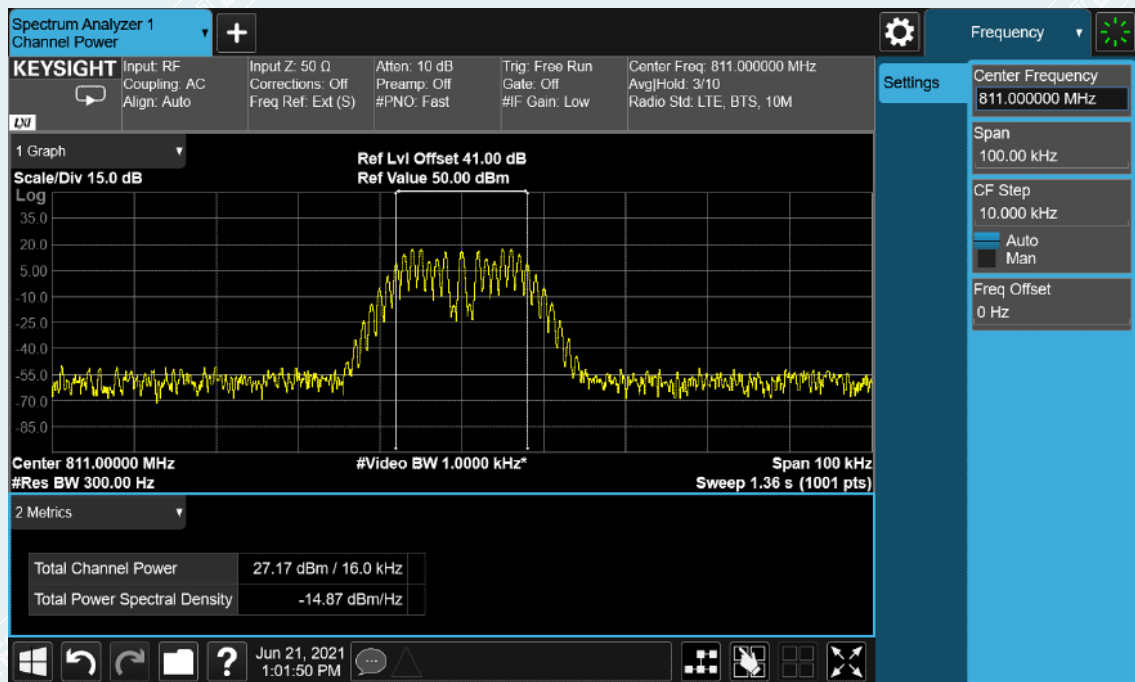


Middle Frequency: 811.0MHz, Output occupied BW(AGC)

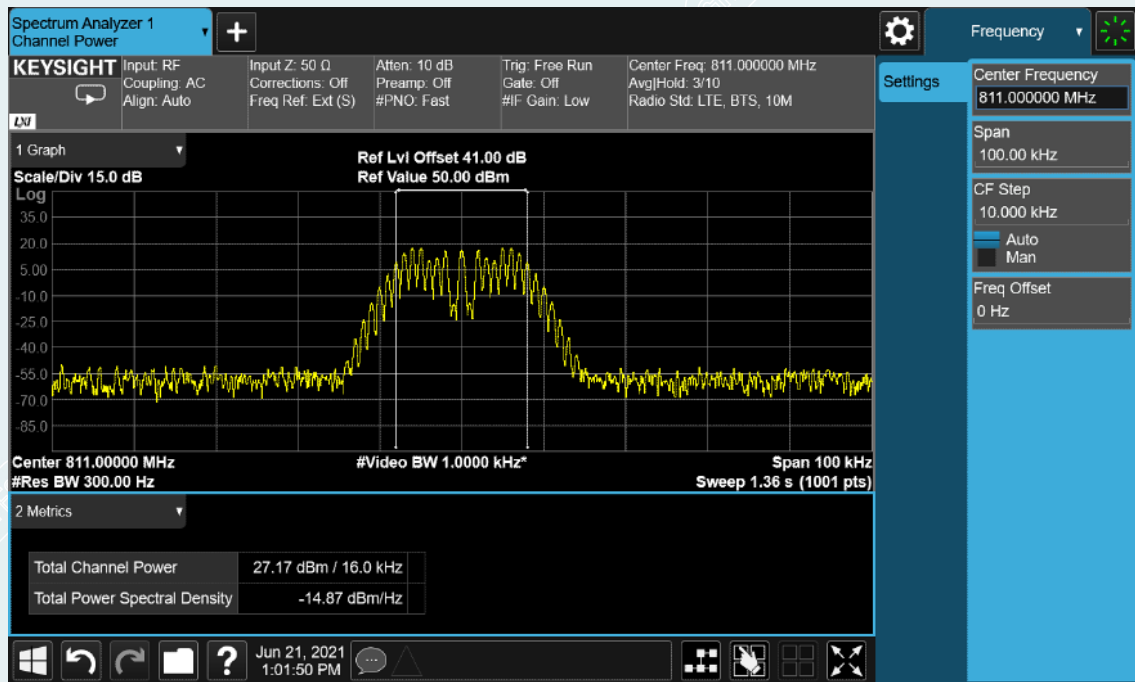


Middle Frequency: 811.0MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

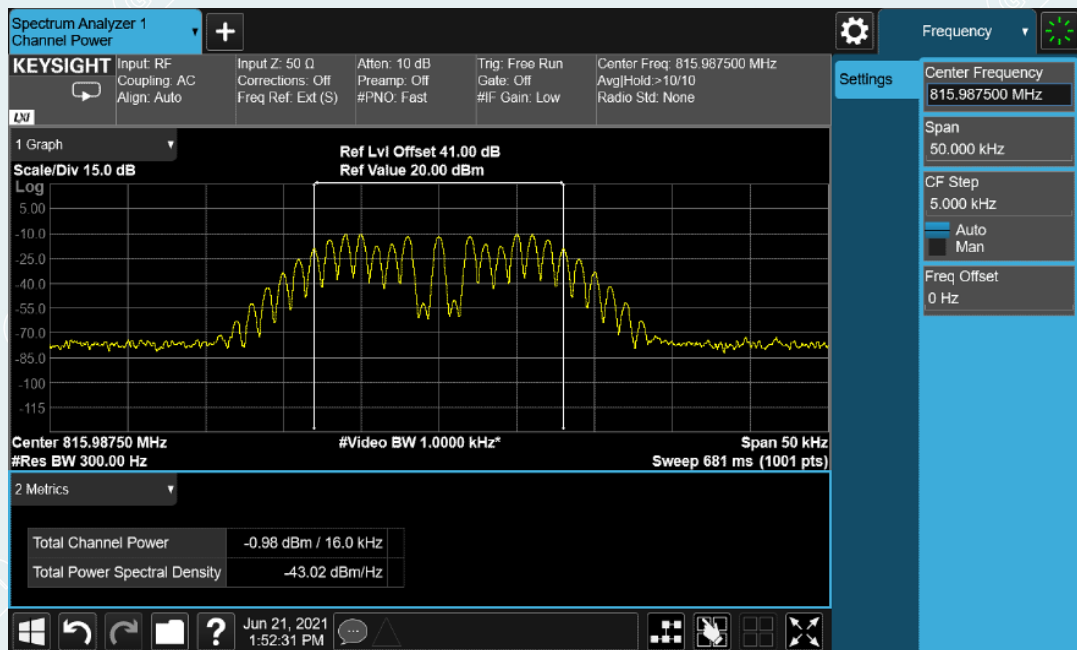

High Frequency: 815.9875MHz, Input occupied BW

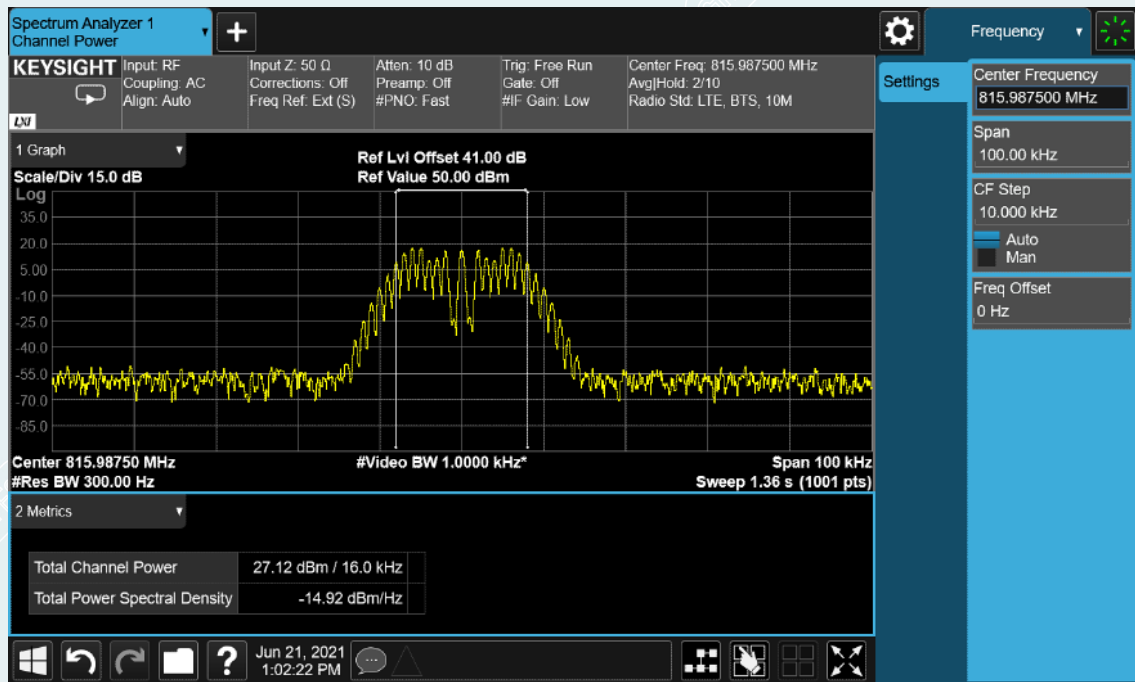

High Frequency: 815.9875MHz, Output occupied BW(AGC)

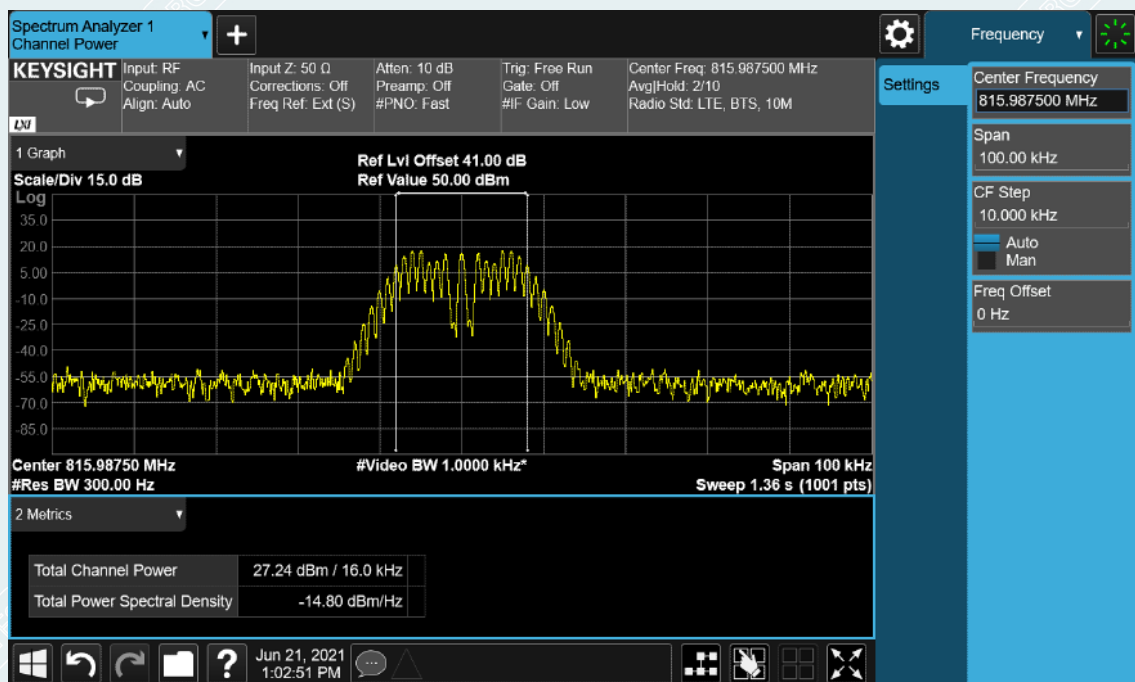

High Frequency: 815.9875MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

10.6 Mean power and amplifier/booster gain

Test requirement: KDB 935210 D05 clause 4.5
FCC PART 90.219 (e)(1)

Test Method: KDB 935210 D05 clause 4.5

10.6.1 Requirements

According to KDB 935210 D05 clause 4.5, the mean input and output power and the amplifier gain was measured by adjusting the internal gain control of the EUT to the maximum gain for which equipment certification is sought. Any EUT attenuation settings were set to their minimum value.

Input power levels (Downlink and Uplink) were set to maximum input ratings while confirming that the device is not capable of operating in saturation (Non-linear mode) at the rated input levels, including during the performance of the input/output power measurements.

FCC PART 90.219 (e)(1) requirement:

(e) Device Specifications. In addition to the general rules for equipment certification in §90.203(a)(2) and part 2, subpart J of this chapter, a signal booster must also meet the rules in this paragraph.

(1) The output power capability of a signal booster must be designed for deployments providing a radiated power not exceeding 5 Watts ERP for each retransmitted channel.

10.6.2 Test configuration

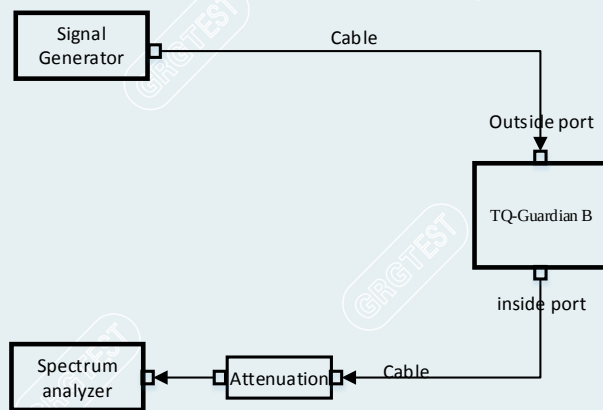


Figure 10.5-1 Downlink connection diagram

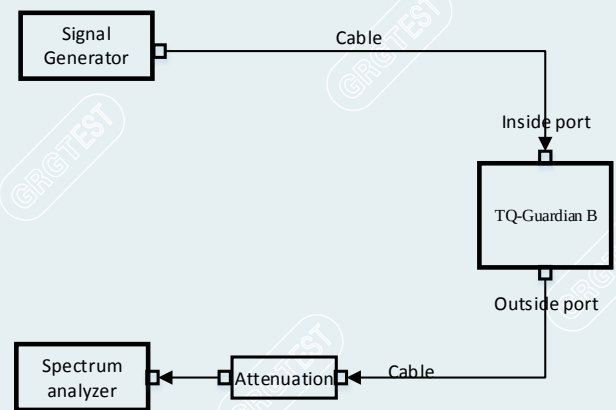


Figure 10.5-2 Uplink connection diagram

10.6.3 Test procedures

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the AWGN (broadband) test signal.
- c) The frequency of the signal generator shall be set to the frequency f_0 as determined from 3.3.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- f) Measure and record the output power of the EUT; use 3.5.3 or 3.5.4 for power measurement.
- g) Remove the EUT from the measurement setup. Using the same signal generator settings, repeat the power measurement at the signal generator port, which was used as the input signal to the EUT, and record as the input power. EUT gain may be calculated as described in 3.5.5.
- h) Repeat steps f) and g) with input signal amplitude set to 3 dB above the AGC threshold level.
- i) Repeat steps e) to h) with the narrowband test signal.
- j) Repeat steps e) to i) for all frequency bands authorized for use by the EUT.

10.6.4 Test results

Test Date (yy-mm-dd): 2021-06-16

Normal condition: Temp: 22.9℃, Humid:35%, Atmospheric Pressure:101kpa

Supply Voltage: AC 110V, 50Hz

10.6.4.1 Mean power and gain

10.6.4.1.1 700MHz Band

10.6.4.1.1.1 Downlink: 758~768MHz/ Uplink: 788~798MHz

10.6.4.1.1.1.1 Channel Bandwidth: 5MHz

Test link	Freq. (MHz)	Sig output power (dBm)	Input Cable Loss (dB)	Peak power (dBm)	Output Atten (dB)	Output Cable Loss (dB)	Output power (dBm)	Output power (W)	Gain (dB)
Down ⁽¹⁾	763.0	-48.3	1.0	-7.8	40.0	1.0	33.2	2.089	82.5
Down ⁽²⁾	763.0	-45.3	1.0	-7.7	40.0	1.0	33.3	2.138	79.6
Up ⁽¹⁾	793.0	-51.9	1.0	-13.3	40.0	1.0	27.7	0.589	80.6
Up ⁽²⁾	793.0	-48.9	1.0	-13.1	40.0	1.0	27.9	0.617	77.8

NOTE: ⁽¹⁾ Level is 0.5 dB below AGC threshold; ⁽²⁾ Level is 3dB above AGC threshold.

10.6.4.1.1.1.2 Channel Bandwidth: 10MHz

Test link	Freq. (MHz)	Sig output power (dBm)	Input Cable Loss (dB)	Peak power (dBm)	Output Atten (dB)	Output Cable Loss (dB)	Output power (dBm)	Output power (W)	Gain (dB)
Down ⁽¹⁾	763.0	-49.3	1.0	-7.8	40.0	1.0	33.2	2.089	83.5
Down ⁽²⁾	763.0	-46.3	1.0	-7.7	40.0	1.0	33.3	2.138	80.6
Up ⁽¹⁾	793.0	-54.1	1.0	-14.3	40.0	1.0	26.7	0.468	81.8
Up ⁽²⁾	793.0	-51.1	1.0	-14.3	40.0	1.0	26.7	0.468	78.8

NOTE: ⁽¹⁾ Level is 0.5 dB below AGC threshold; ⁽²⁾ Level is 3dB above AGC threshold.

10.6.4.1.1.2 Downlink: 768~775MHz/ Uplink: 798~805MHz

Test link	Freq. (MHz)	Sig output power (dBm)	Input Cable Loss (dB)	Peak power (dBm)	Output Atten (dB)	Output Cable Loss (dB)	Output power (dBm)	Output power (W)	Gain (dB)
Down ⁽¹⁾	771.5	-47.6	1.0	-8.0	40.0	1.0	33.0	1.995	81.6
Down ⁽²⁾	771.5	-44.6	1.0	-7.9	40.0	1.0	33.1	2.042	78.7
Up ⁽¹⁾	801.5	-54.1	1.0	-14.3	40.0	1.0	26.7	0.468	81.8
Up ⁽²⁾	801.5	-51.1	1.0	-14.3	40.0	1.0	26.7	0.468	78.8

NOTE: ⁽¹⁾ Level is 0.5 dB below AGC threshold; ⁽²⁾ Level is 3dB above AGC threshold.

10.6.4.1.2 800MHz Band

10.6.4.1.2.1 Downlink: 851~861MHz/ Uplink: 806~816MHz

Test link	Freq. (MHz)	Sig output power (dBm)	Input Cable Loss (dB)	Peak power (dBm)	Output Atten (dB)	Output Cable Loss (dB)	Output power (dBm)	Output power (W)	Gain (dB)
Down ⁽¹⁾	856.0	-47.4	1.0	-7.9	40.0	1.0	33.1	2.042	81.5
Down ⁽²⁾	856.0	-44.4	1.0	-7.8	40.0	1.0	33.2	2.089	78.6
Up ⁽¹⁾	811.0	-49.7	1.0	-13.5	40.0	1.0	27.5	0.562	78.2
Up ⁽²⁾	811.0	-46.7	1.0	-13.3	40.0	1.0	27.7	0.589	75.4

NOTE: ⁽¹⁾ Level is 0.5 dB below AGC threshold; ⁽²⁾ Level is 3dB above AGC threshold.

10.6.4.2 ERP Calculations

10.6.4.2.1 700MHz Band

10.6.4.2.1.1 Downlink: 758~768MHz/ Uplink: 788~798MHz

10.6.4.2.1.1.1 Channel Bandwidth: 5MHz

Test link	Freq. (MHz)	EUT Max. output power (dBm)	Max. Ant Gain(dBi)	Duty Cycle (%)	ERP (W)	ERP Limit (W)	AGC Mode
Down	763.0	33.2	3.0	100	4.169	5	-0.5dB Below
Down	763.0	33.3	3.0	100	4.266	5	+3.0dB above
Up	793.0	27.7	9.0	100	4.677	5	-0.5dB Below
Up	793.0	27.9	9.0	100	4.898	5	+3.0dB above

10.6.4.2.1.1.2 Channel Bandwidth: 10MHz

Test link	Freq. (MHz)	EUT Max. output power (dBm)	Max. Ant Gain(dBi)	Duty Cycle (%)	ERP (W)	ERP Limit (W)	AGC Mode
Down	763.0	33.2	3.0	100	4.169	5	-0.5dB Below
Down	763.0	33.3	3.0	100	4.266	5	+3.0dB above
Up	793.0	26.7	9.0	100	3.715	5	-0.5dB Below
Up	793.0	26.7	9.0	100	3.715	5	+3.0dB above

10.6.4.2.1.2 Downlink: 769~775MHz/ Uplink: 799~805MHz

Test link	Freq. (MHz)	EUT Max. output power (dBm)	Max. Ant Gain(dBi)	Duty Cycle (%)	ERP (W)	ERP Limit (W)	AGC Mode
Down	771.5	33.0	3.0	100	3.981	5	-0.5dB Below
Down	771.5	33.1	3.0	100	4.074	5	+3.0dB above
Up	801.5	26.7	9.0	100	3.715	5	-0.5dB Below
Up	801.5	26.7	9.0	100	3.715	5	+3.0dB above

10.6.4.2.2 800MHz Band

10.6.4.2.2.1 Downlink: 851~861MHz/ Uplink: 806~816MHz

Test link	Freq. (MHz)	EUT Max. output power (dBm)	Max. Ant Gain(dBi)	Duty Cycle (%)	ERP (W)	ERP Limit (W)	AGC Mode
Down	856.0	33.1	3.0	100	4.074	5	-0.5dB Below
Down	856.0	33.2	3.0	100	4.169	5	+3.0dB above
Up	811.0	27.5	9.0	100	4.467	5	-0.5dB Below
Up	811.0	27.7	9.0	100	4.677	5	+3.0dB above

10.7 Noise figure

Test requirement: KDB 935210 D05 clause 4.6
FCC PART 90.219 (e)(2)

Test Method: KDB 935210 D05/4.6

10.7.1 Requirements

According to FCC PART 90 § 90.219 (e) (2) requirement, the noise figure limit of a signal booster must be given in table 10.7-1.

Table 10.7-1 Noise figure limits

frequency range(MHz)	Max. Noise figure limit(dB)
758-775/788~805	9
851-861/806-816	9

10.7.2 Test configuration

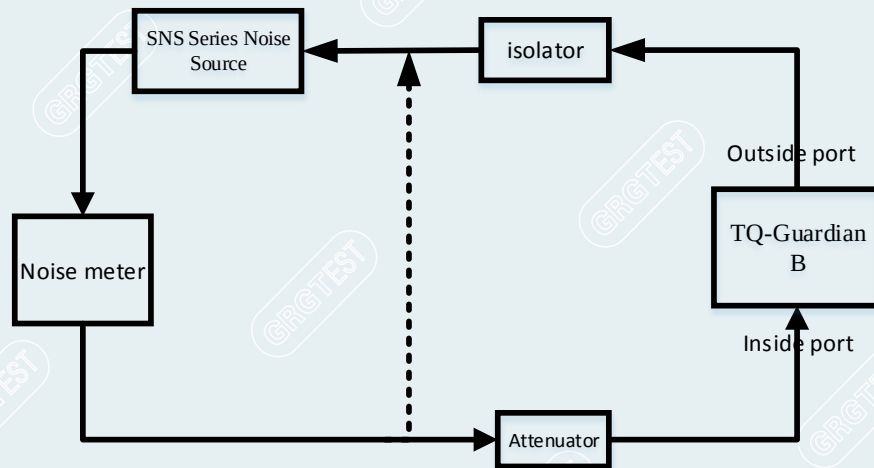


Figure 10.7-1 Downlink connection diagram

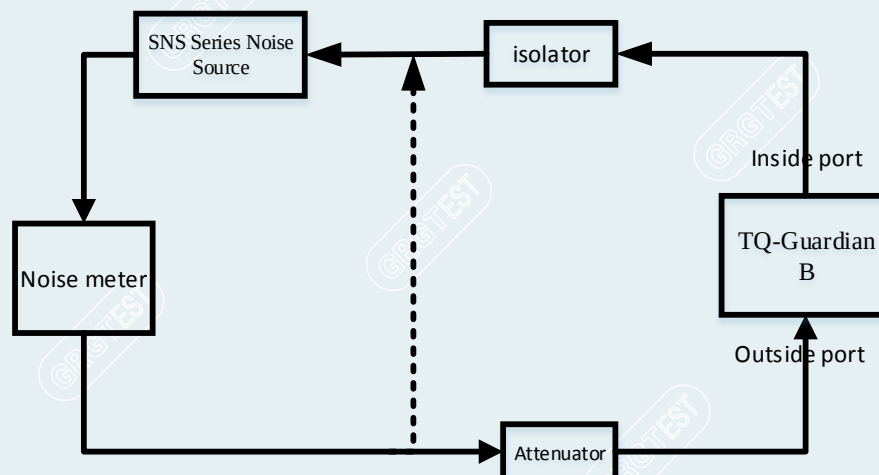


Figure 10.7-2 Uplink connection diagram