RF Conducted Spurious Emissions Graphs			
802.11n (HT20)/ LCH		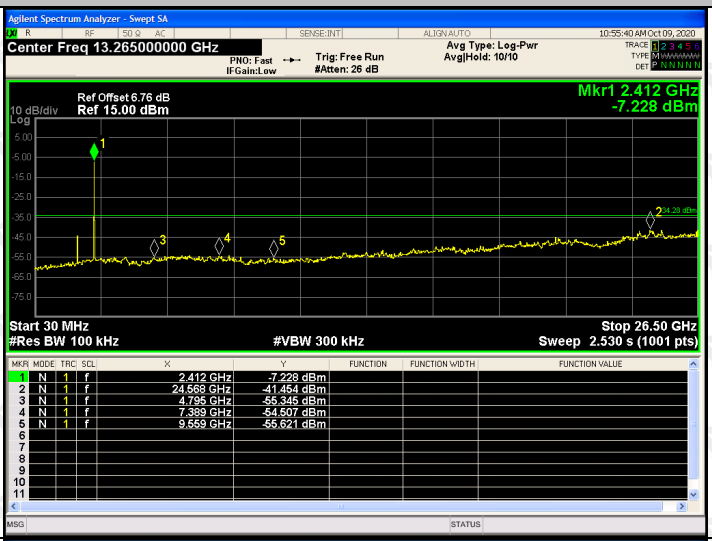	
802.11 n(HT20) /MCH		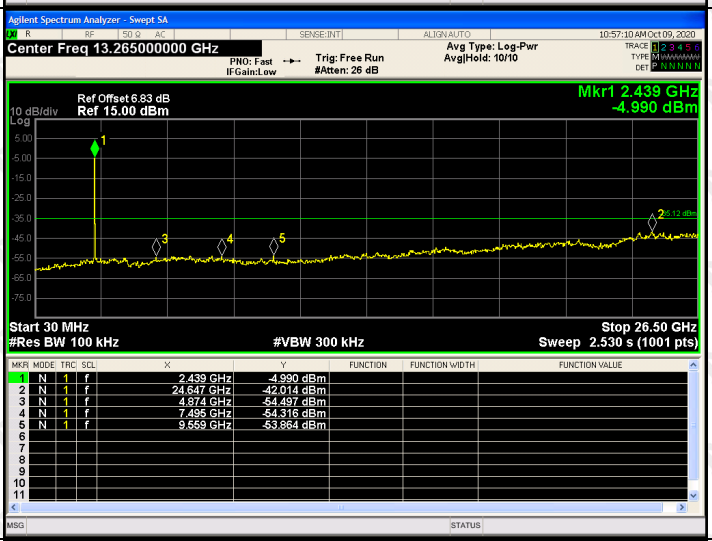	
802.11 n(HT20) /HCH		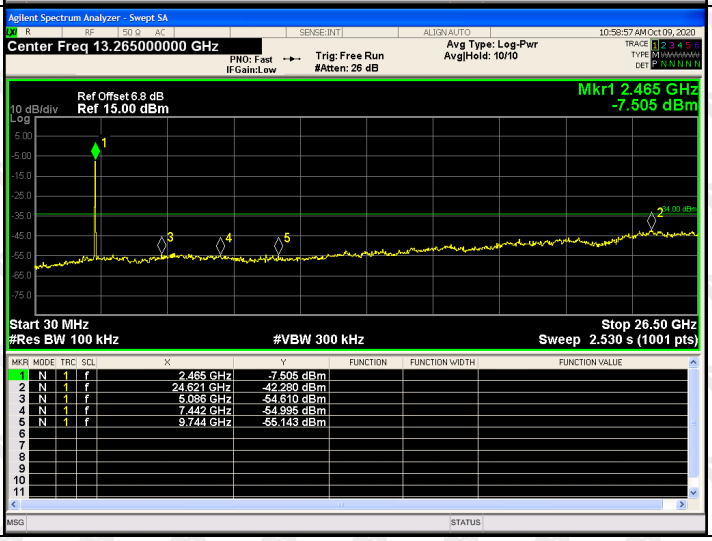	

RF Conducted Spurious Emissions Graphs			
802.11 n(HT40) /LCH		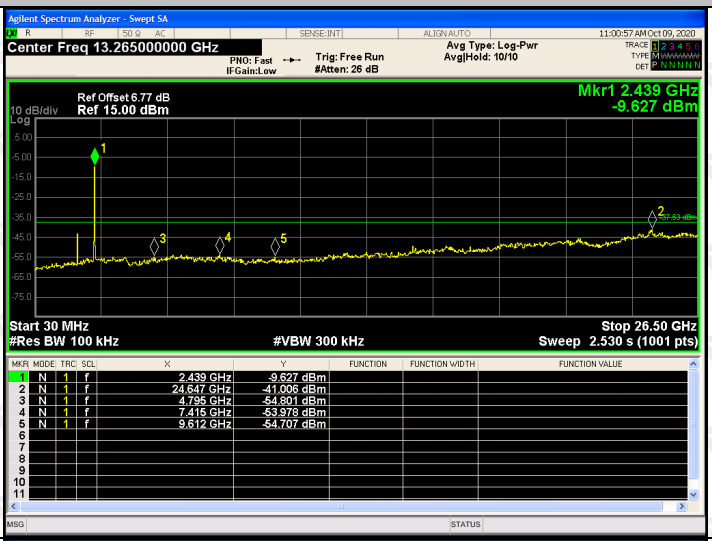	
802.11 n(HT40) /MCH		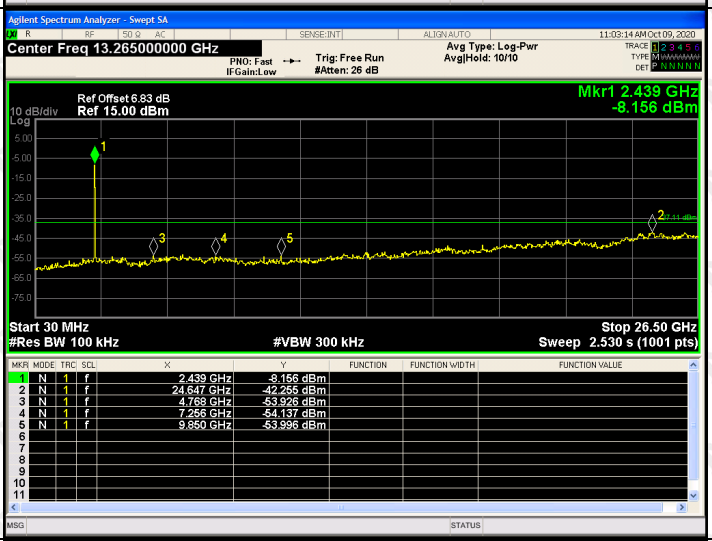	
802.11 n(HT40) /HCH		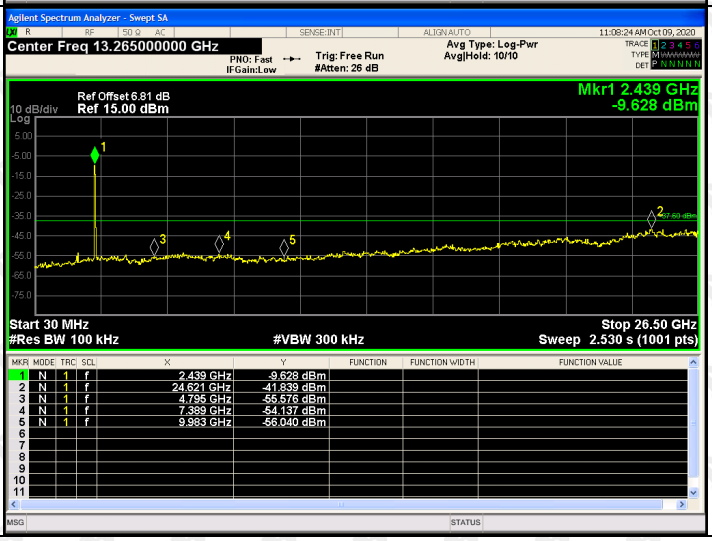	

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

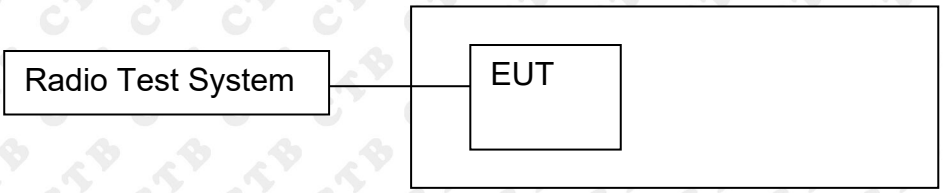

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = RMS. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	7.488	7.849	/	30
	MCH	7.093	7.323	/	30
	HCH	7.208	7.758	/	30
802.11g	LCH	6.781	6.756	/	30
	MCH	6.486	6.341	/	30
	HCH	6.019	6.546	/	30
802.11n(HT20)	LCH	5.393	5.656	8.537	30
	MCH	5.565	5.647	8.616	30
	HCH	5.357	5.602	8.492	30
802.11n(HT40)	LCH	3.77	3.63	6.711	30
	MCH	3.482	3.564	6.533	30
	HCH	3.511	3.187	6.362	30

ANT1:

Mode	Channel.	Maximum Output Power [dBm]
802.11b	LCH	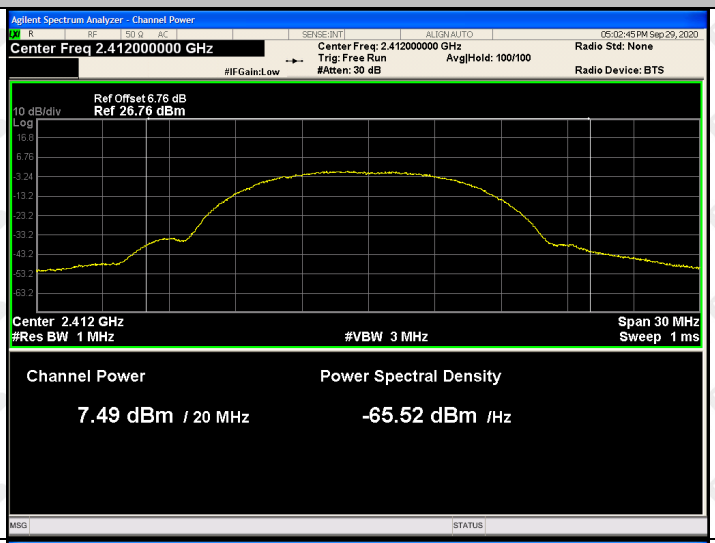
	MCH	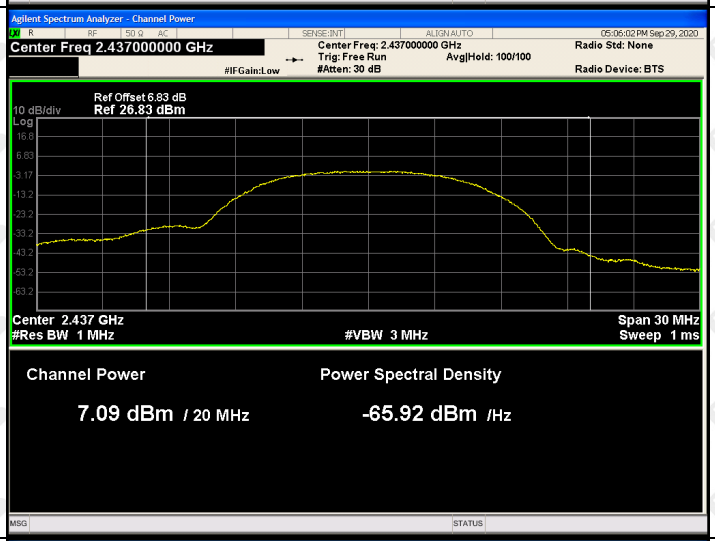
	HCH	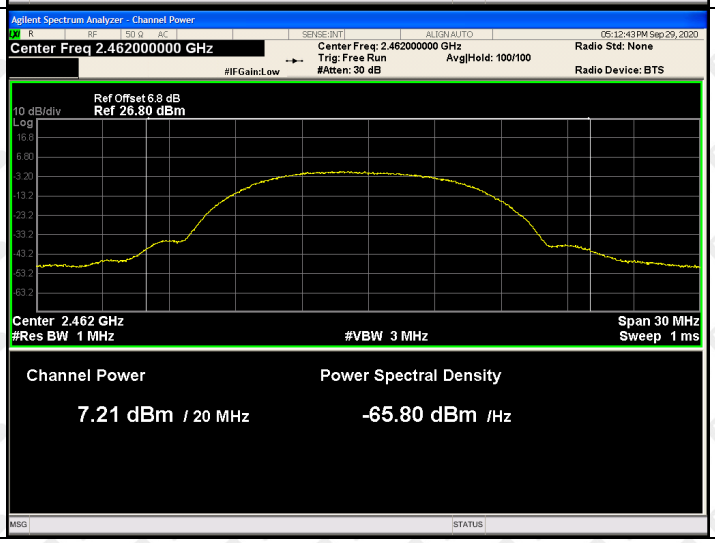

802.11g	LCH		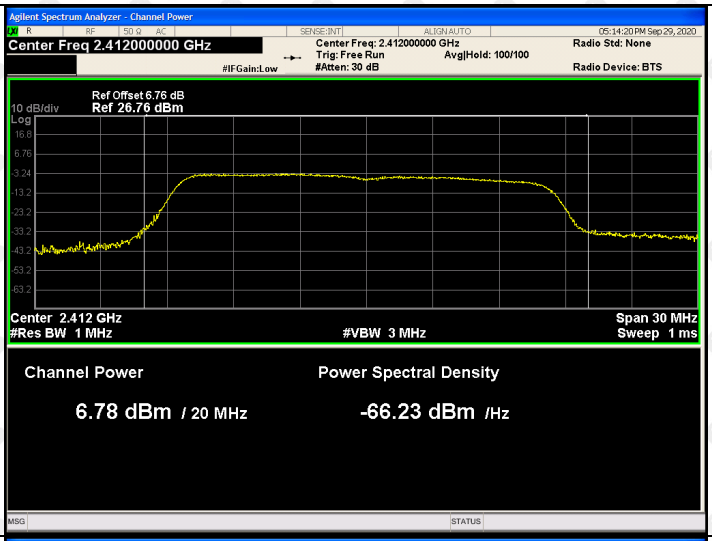	
	MCH		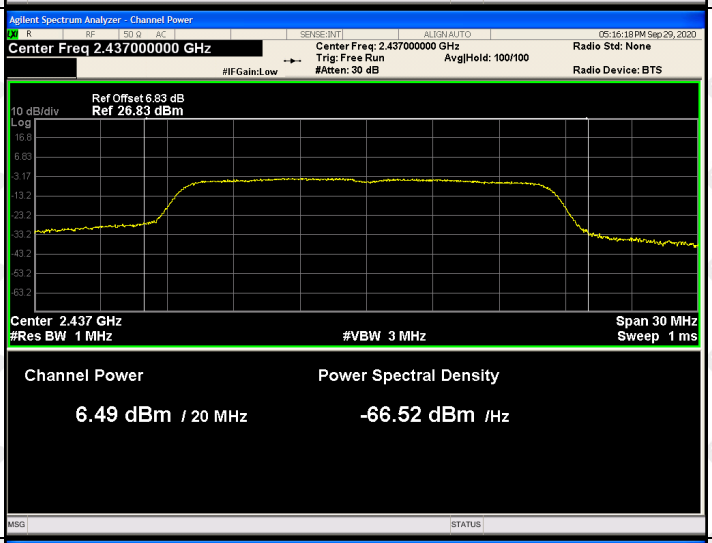	
	HCH		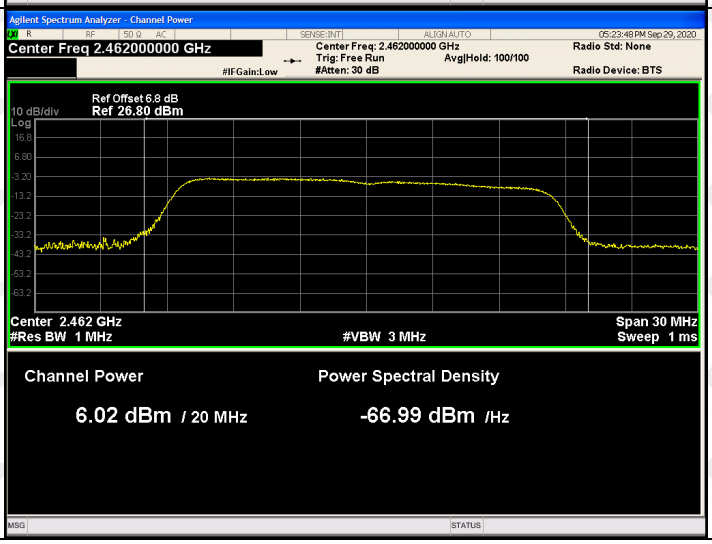	

802.11n(HT20)	LCH		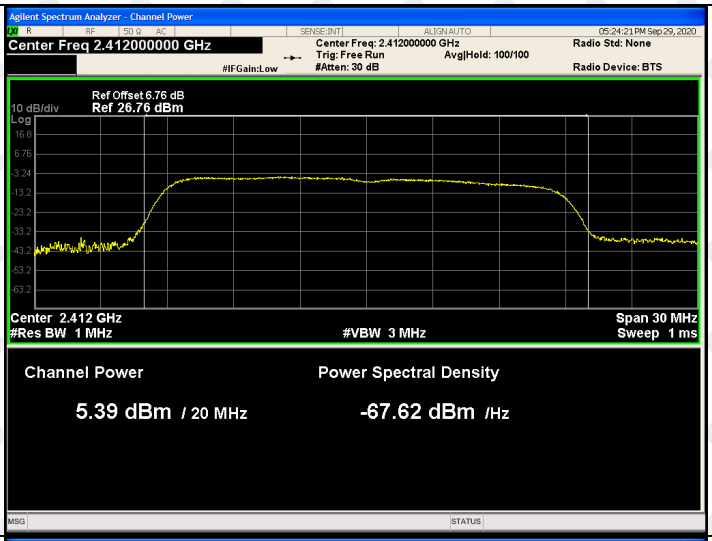	
	MCH		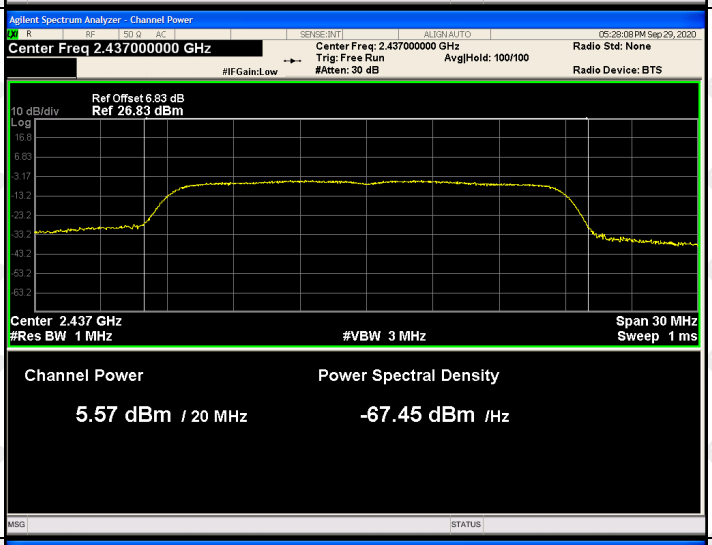	
	HCH		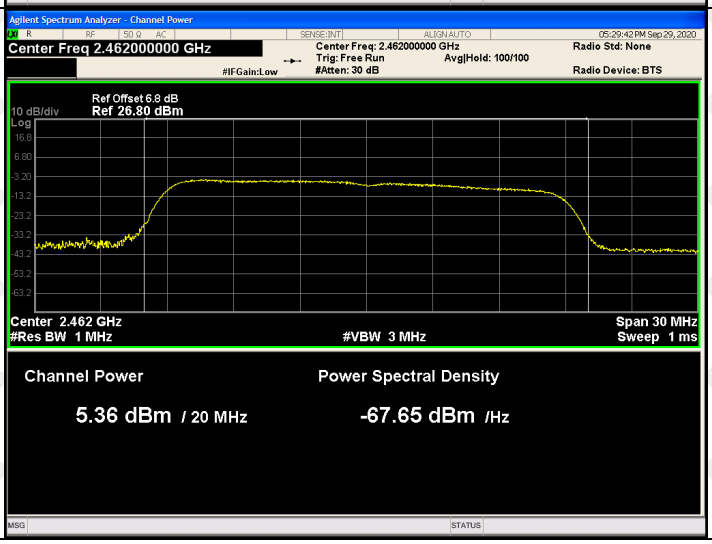	

802.11n(HT40)	LCH		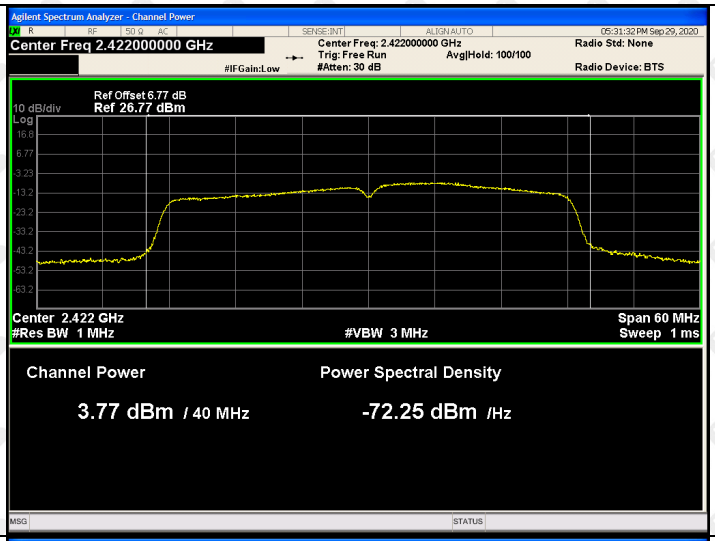	
	MCH		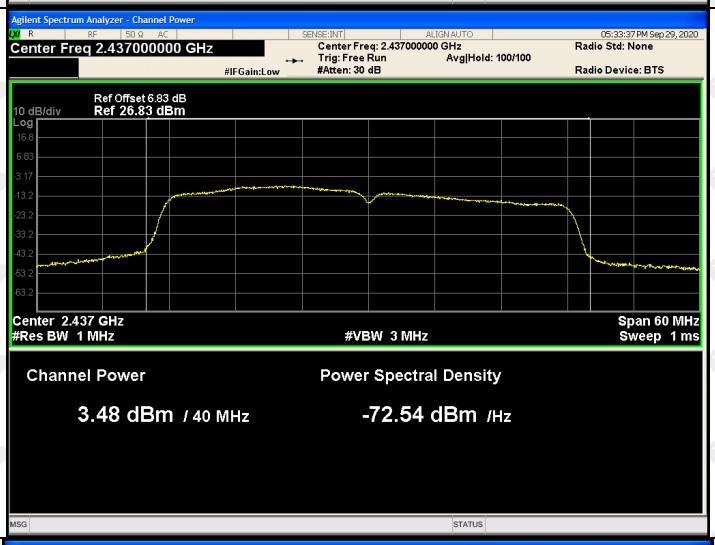	
	HCH		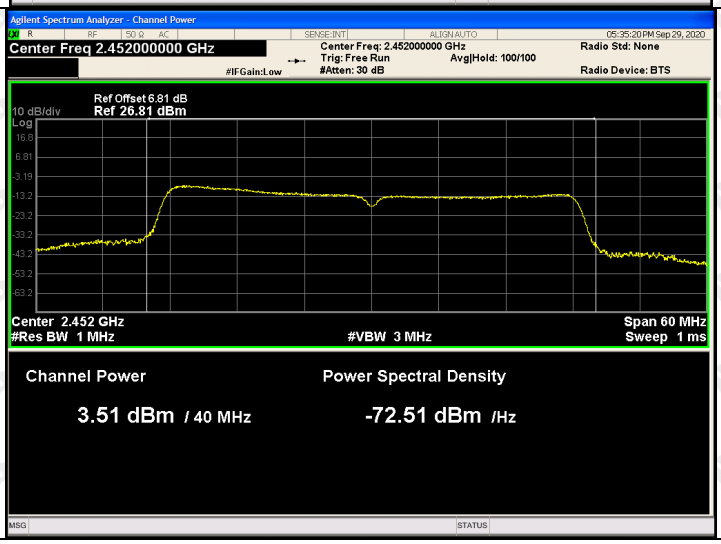	

ANT2:

Mode	Channel.	Maximum Output Power [dBm]
802.11b	LCH	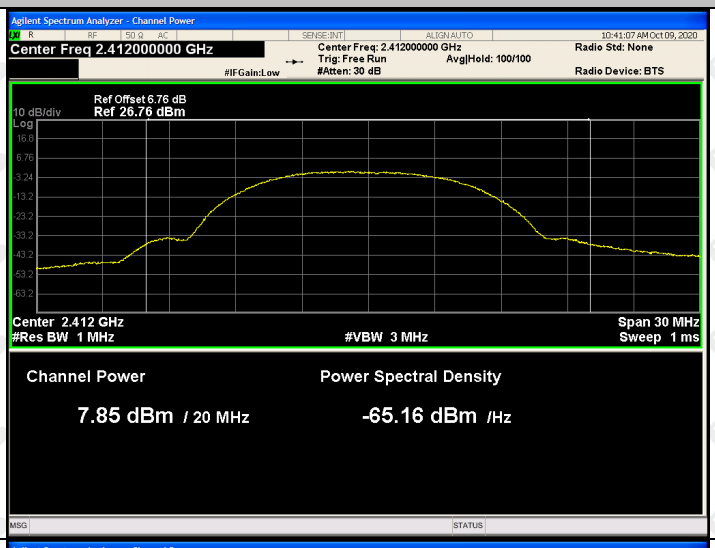
	MCH	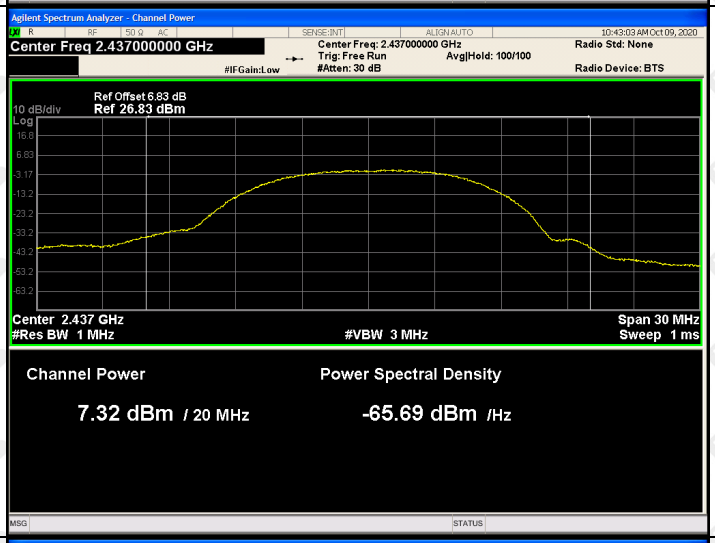
	HCH	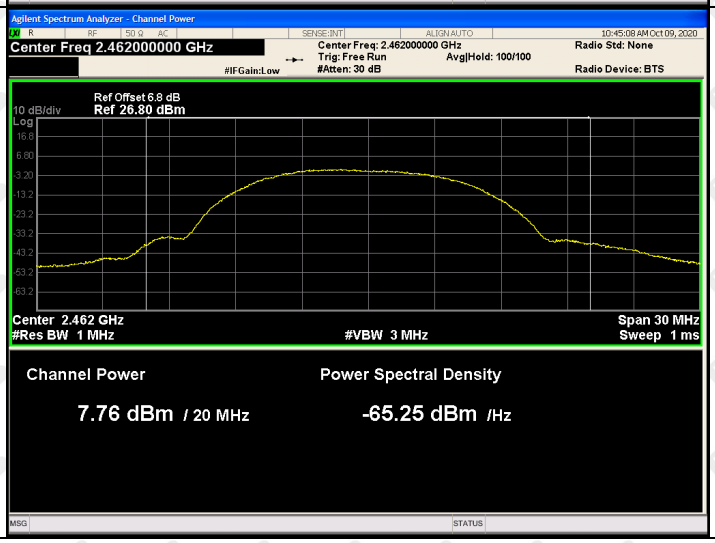

802.11g	LCH		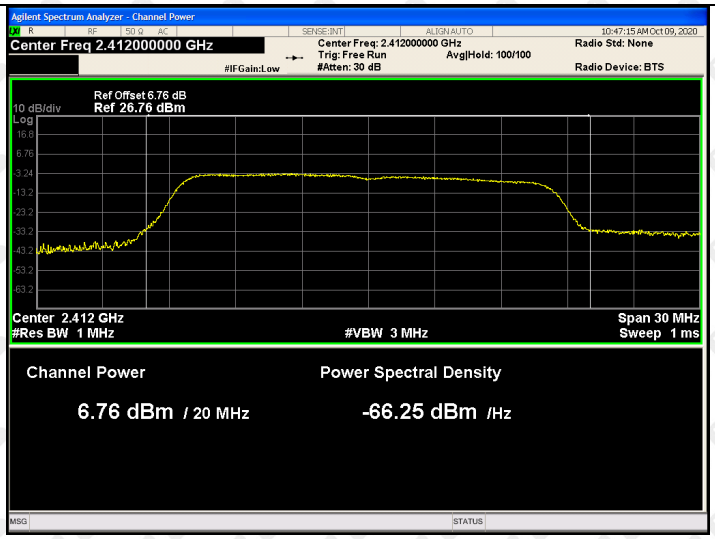
	MCH		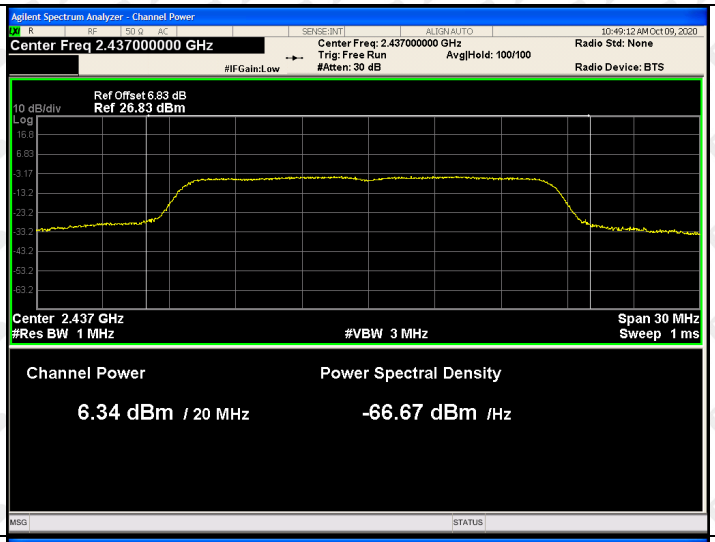
	HCH		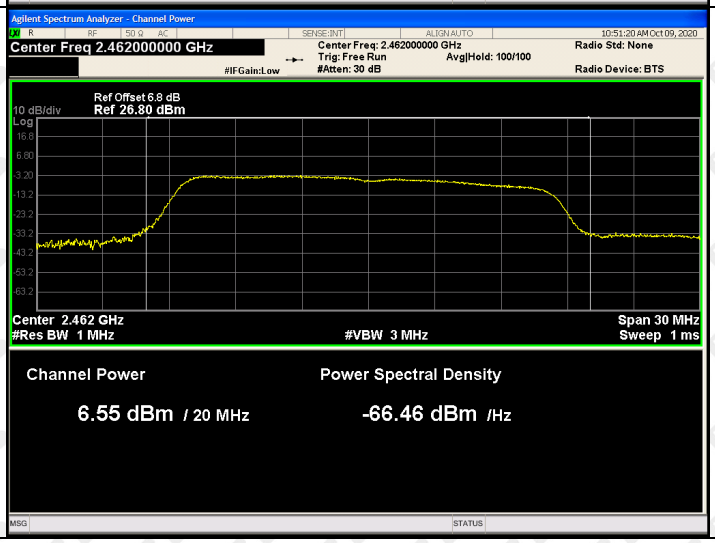

802.11n(HT20)	LCH		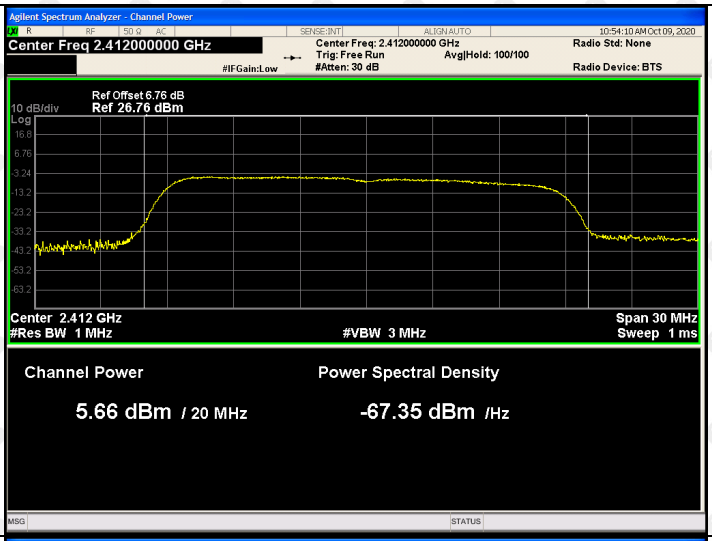	
	MCH		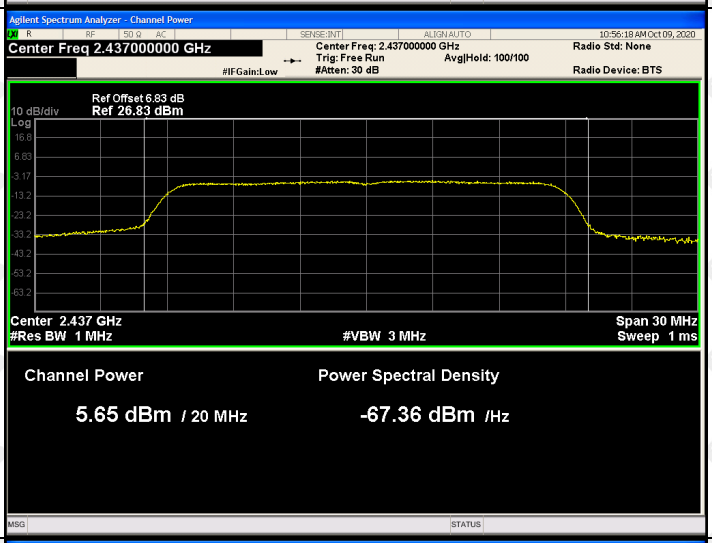	
	HCH		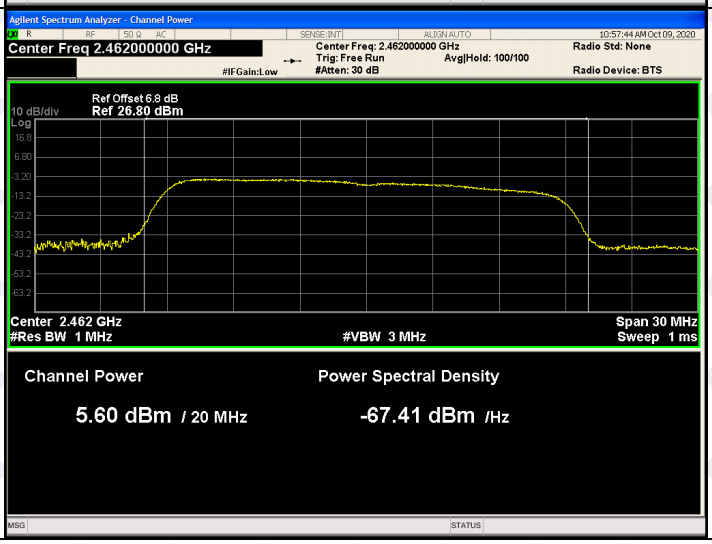	

802.11n(HT40)	LCH		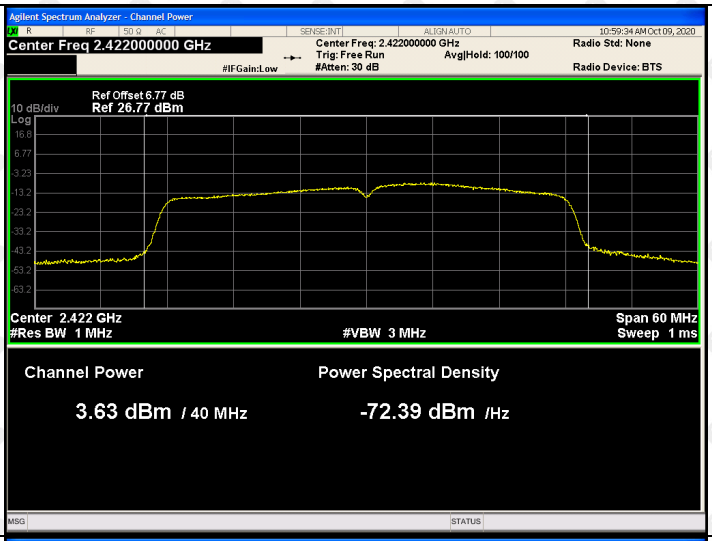
	MCH		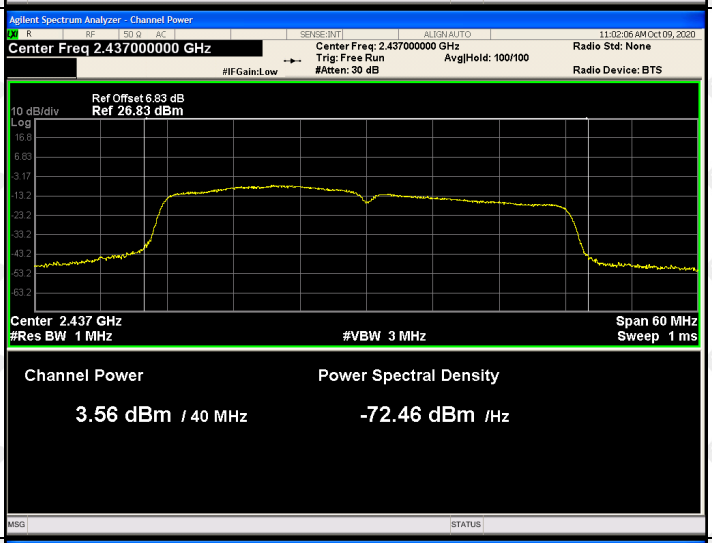
	HCH		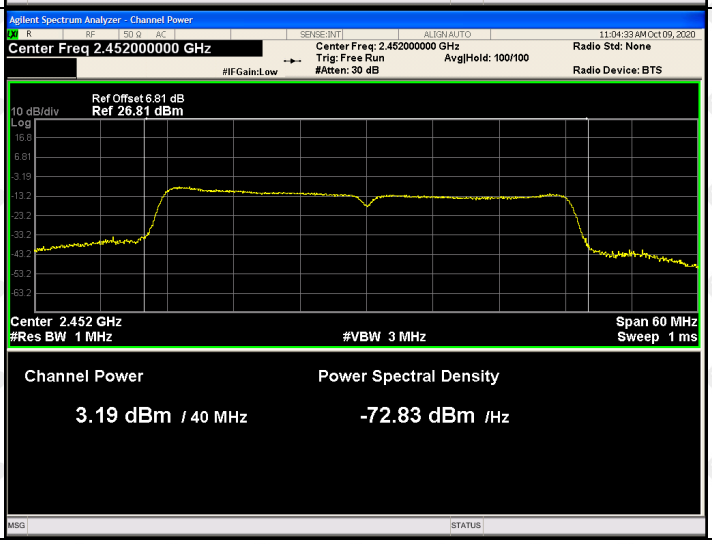

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

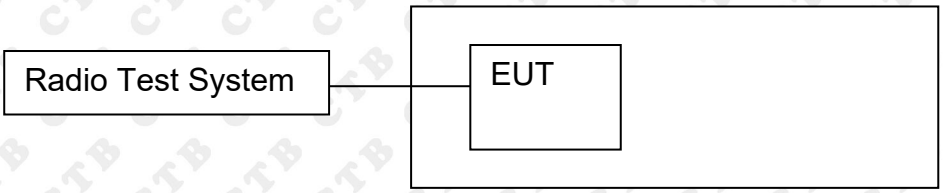

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	8.327	500	**PASS**
	MCH	8.649	500	**PASS**
	HCH	8.297	500	**PASS**
802.11g	LCH	15.91	500	**PASS**
	MCH	16.01	500	**PASS**
	HCH	15.28	500	**PASS**
802.11n(HT20)	LCH	16.24	500	**PASS**
	MCH	17.03	500	**PASS**
	HCH	16.22	500	**PASS**
802.11n(HT40)	LCH	35.31	500	**PASS**
	MCH	35.72	500	**PASS**
	HCH	36.11	500	**PASS**

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	7.896	500	**PASS**
	MCH	8.715	500	**PASS**
	HCH	8.200	500	**PASS**
802.11g	LCH	15.34	500	**PASS**
	MCH	15.94	500	**PASS**
	HCH	14.91	500	**PASS**
802.11n(HT20)	LCH	16.32	500	**PASS**
	MCH	17.08	500	**PASS**
	HCH	15.83	500	**PASS**
802.11n(HT40)	LCH	35.42	500	**PASS**
	MCH	35.99	500	**PASS**
	HCH	35.79	500	**PASS**

ANT1:
Test Graph:

Graphs			
802.11b /LCH		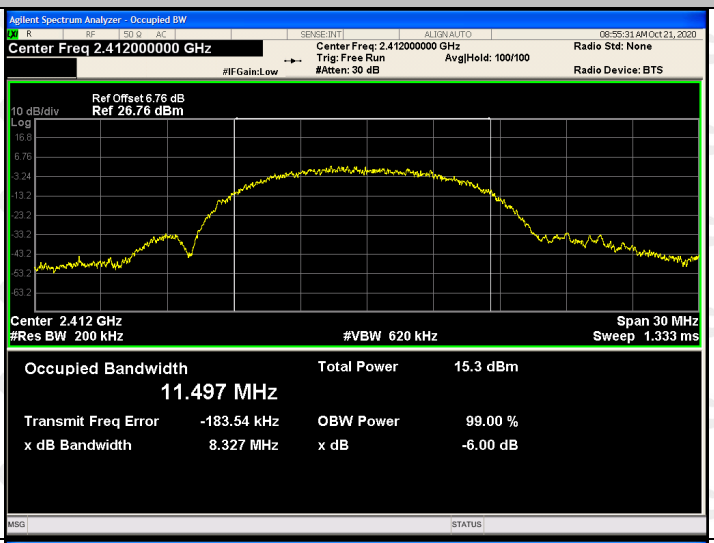	
802.11b /MCH		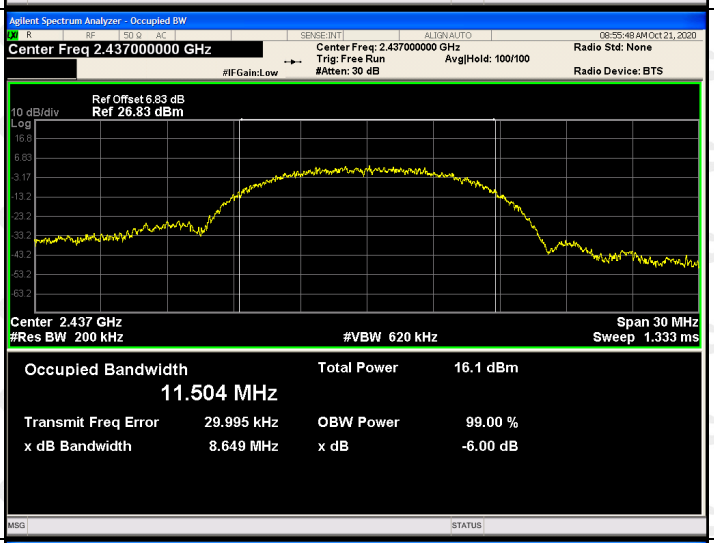	
802.11b/HCH		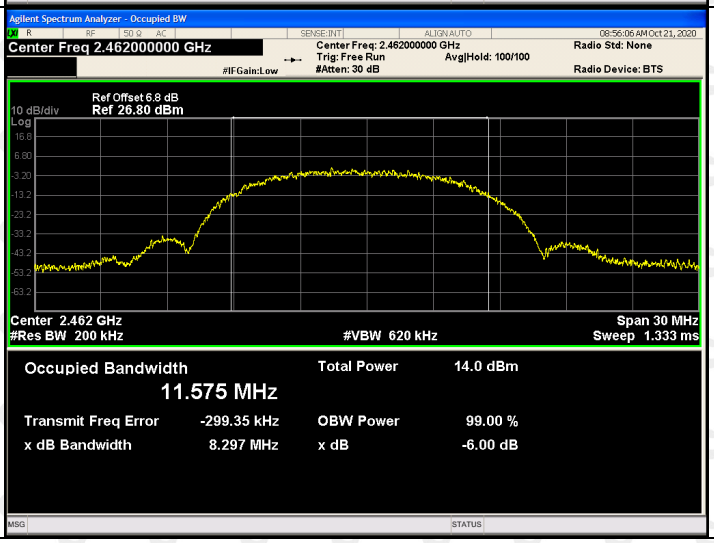	

802.11g/LCH		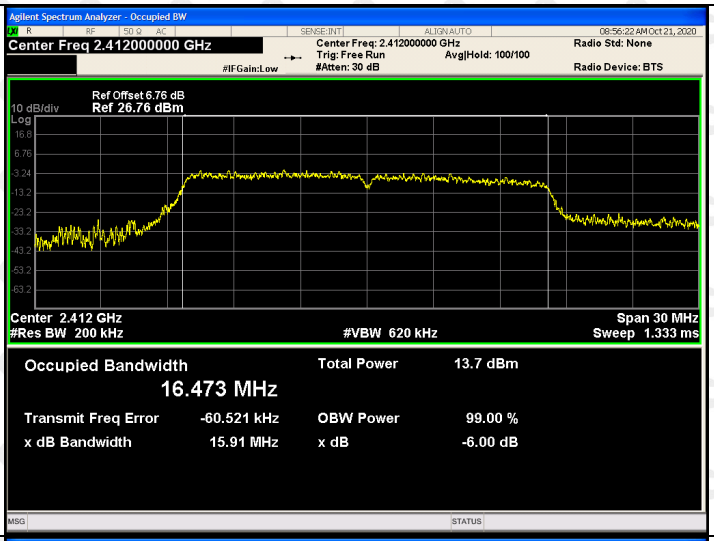	
802.11g/MCH		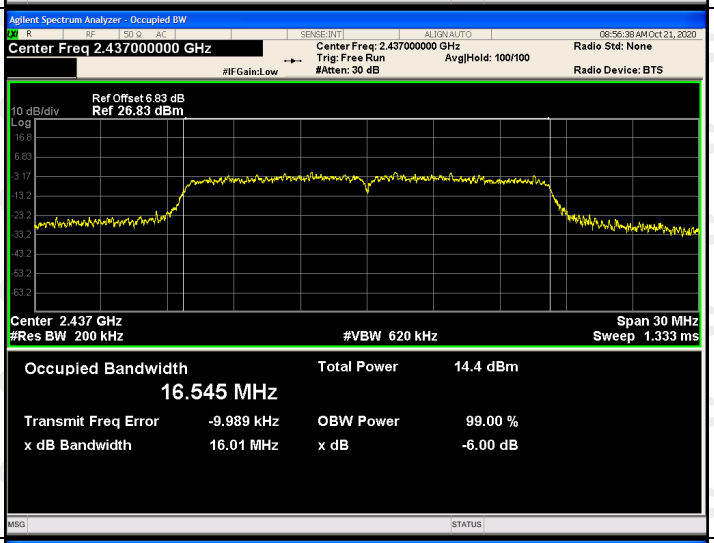	
802.11g/HCH		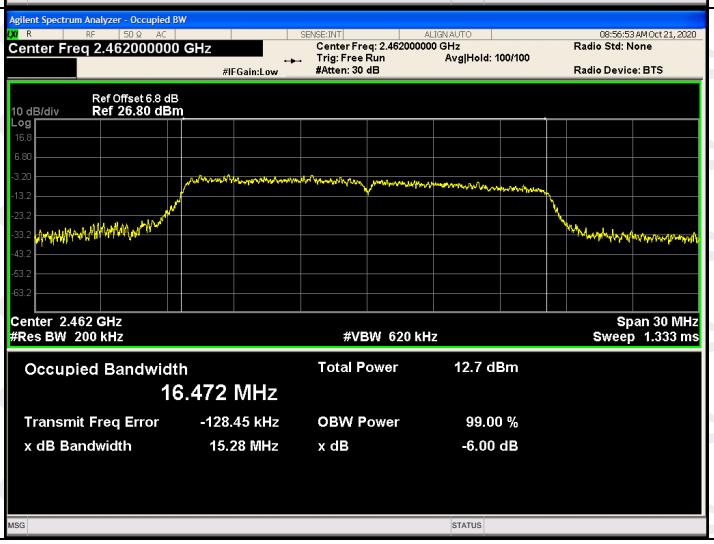	

802.11n(HT20)/LCH		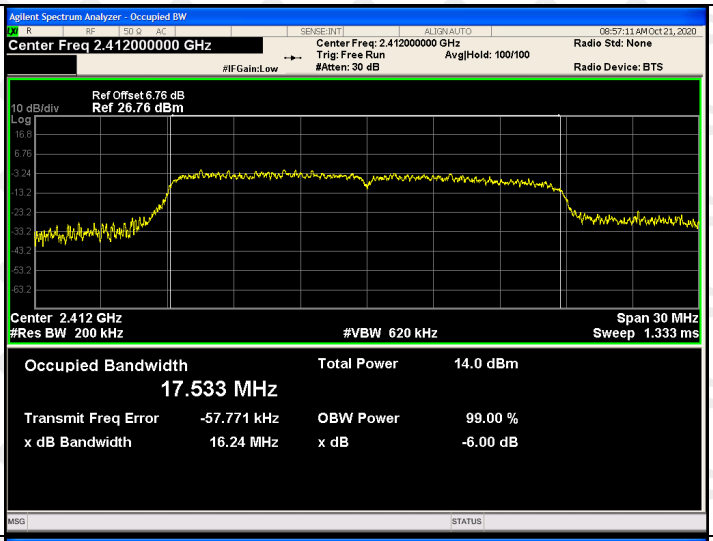	
802.11n(HT20)/MCH		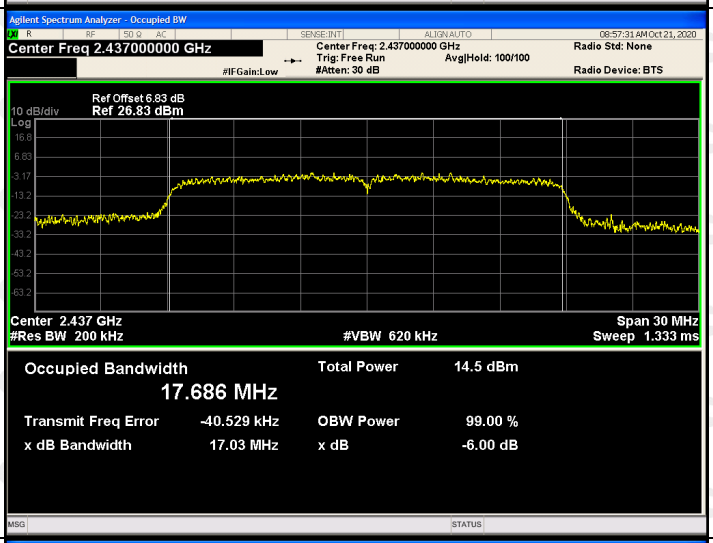	
802.11n(HT20)/HCH		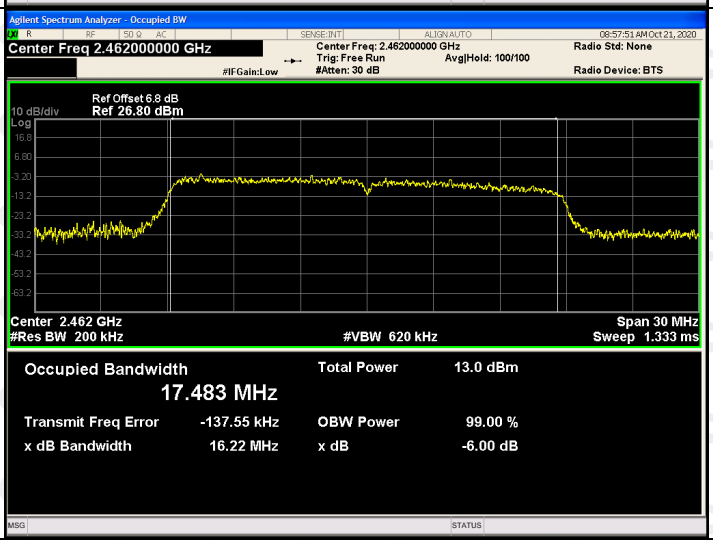	

802.11n(HT40)/LCH		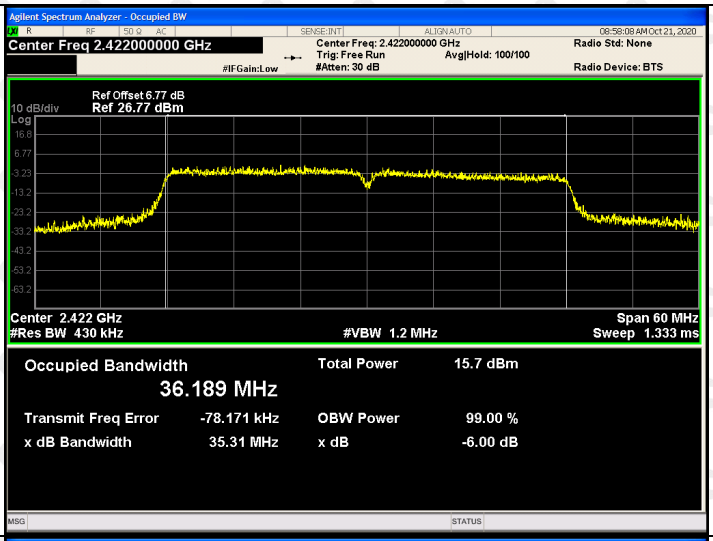	
802.11n(HT40)/MCH		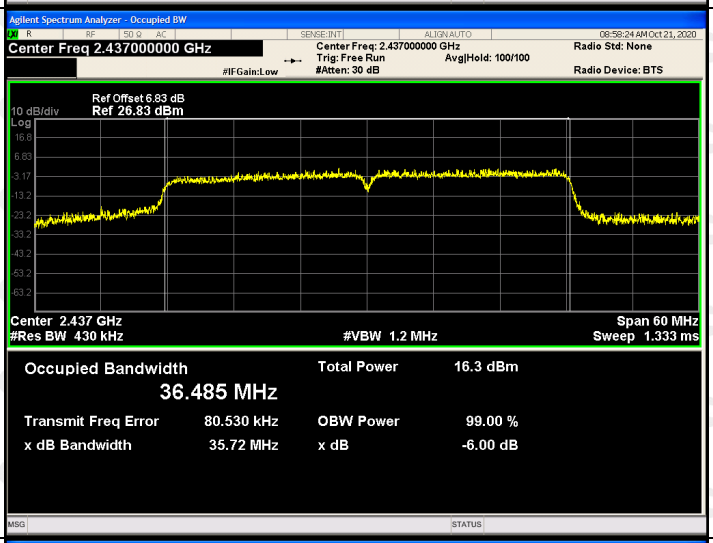	
802.11n(HT40)/HCH		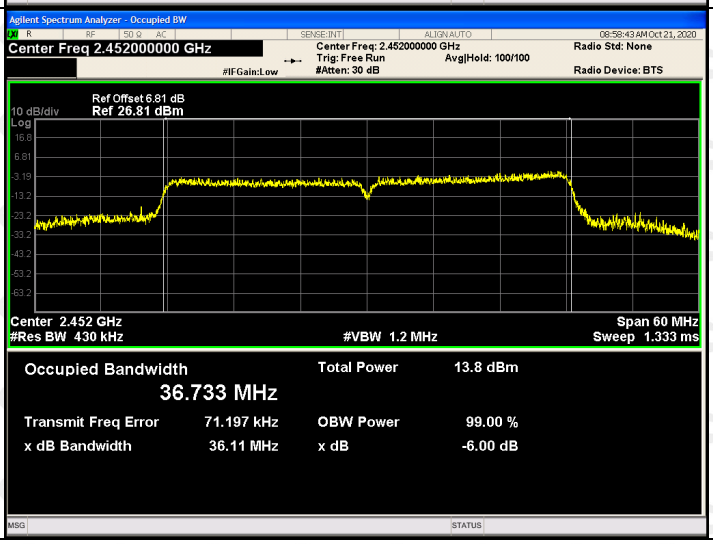	

ANT2:
Test Graph:

Graphs			
802.11b /LCH		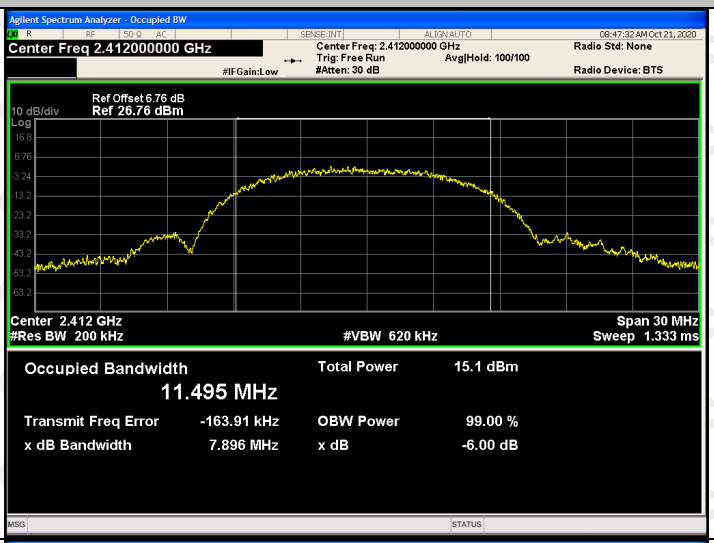	
802.11b /MCH		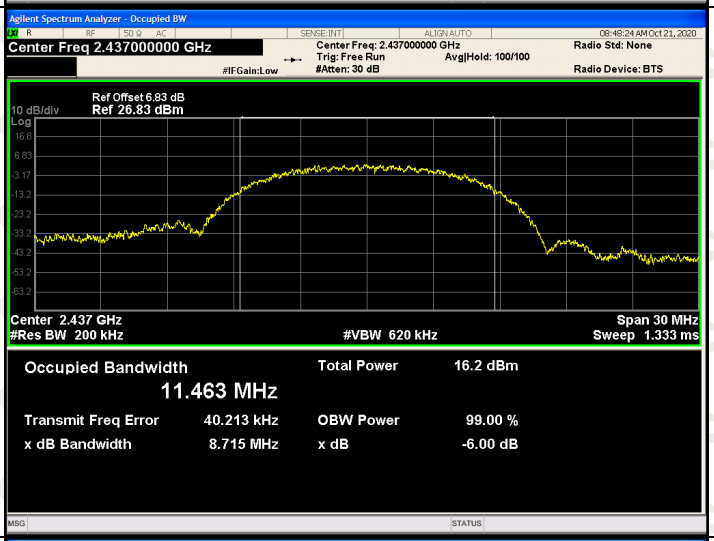	
802.11b/HCH		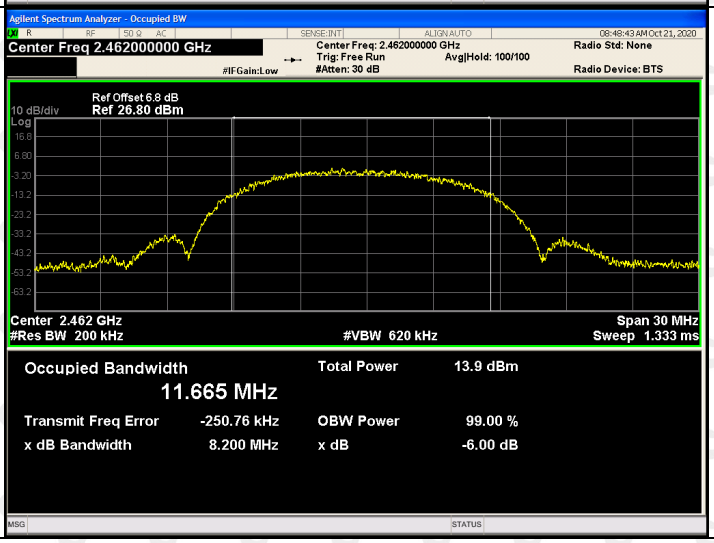	

802.11g/LCH		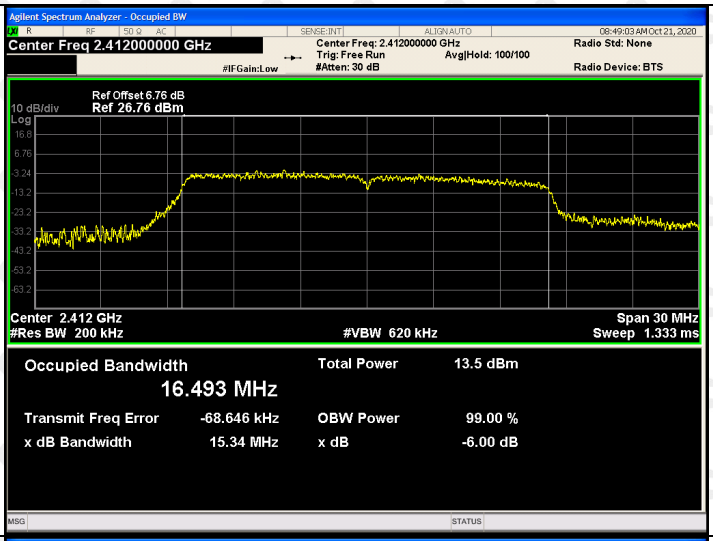	
802.11g/MCH		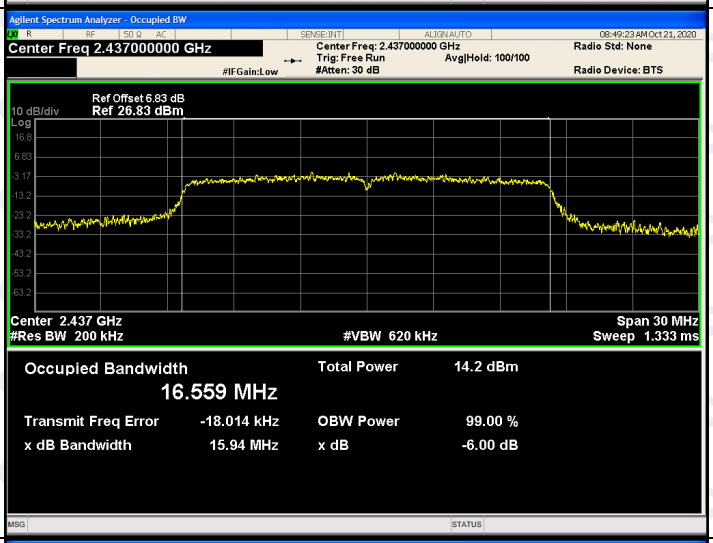	
802.11g/HCH		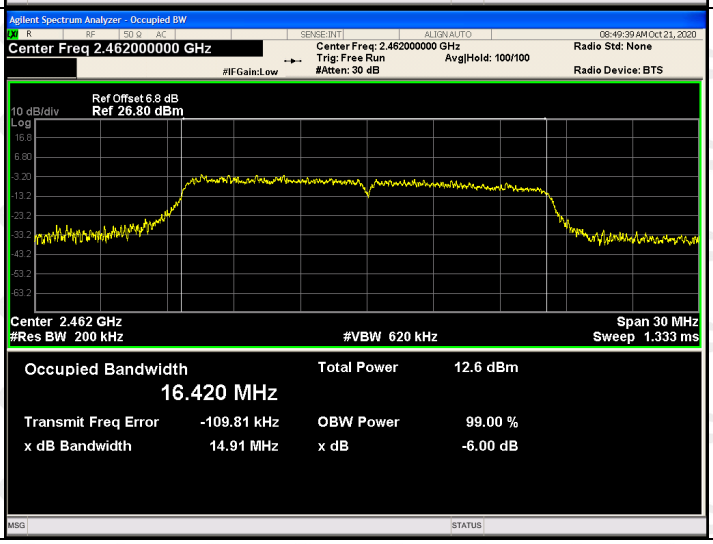	

802.11n(HT20)/LCH		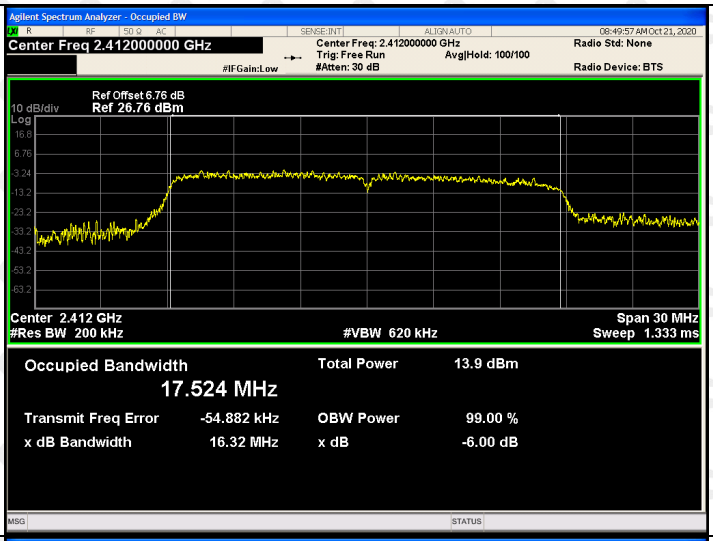	
802.11n(HT20)/MCH		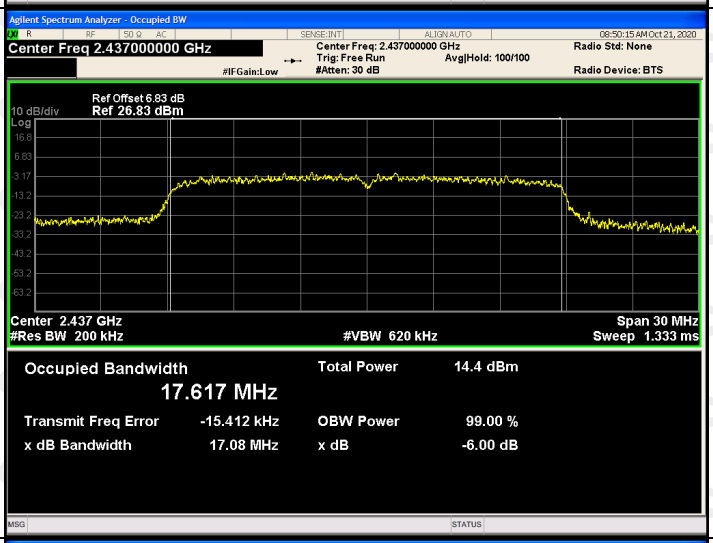	
802.11n(HT20)/HCH		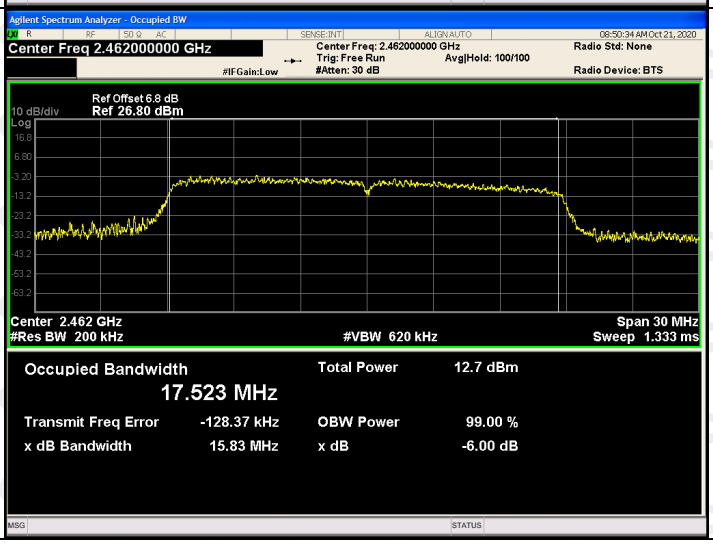	

802.11n(HT40)/LCH		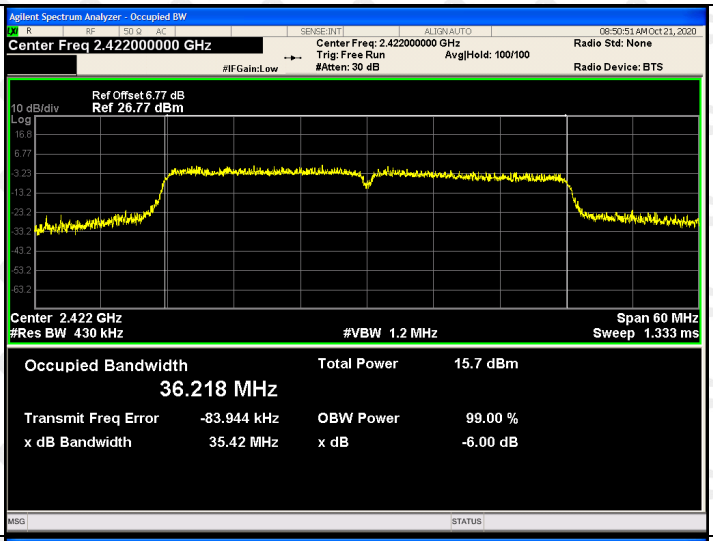	
802.11n(HT40)/MCH		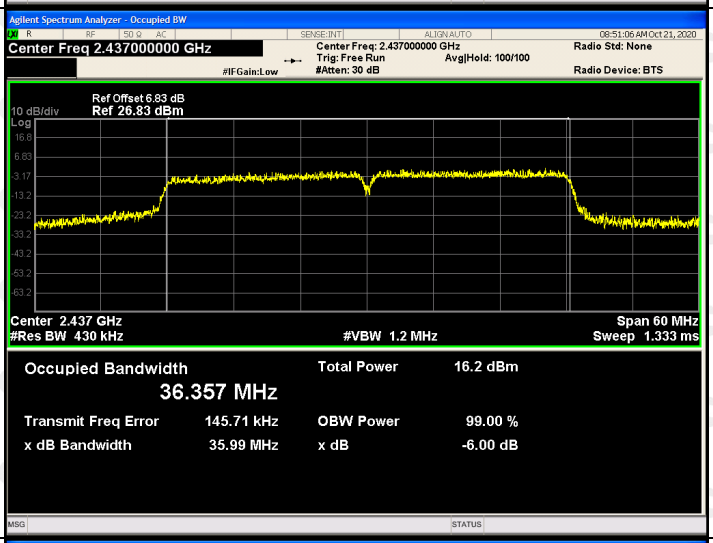	
802.11n(HT40)/HCH		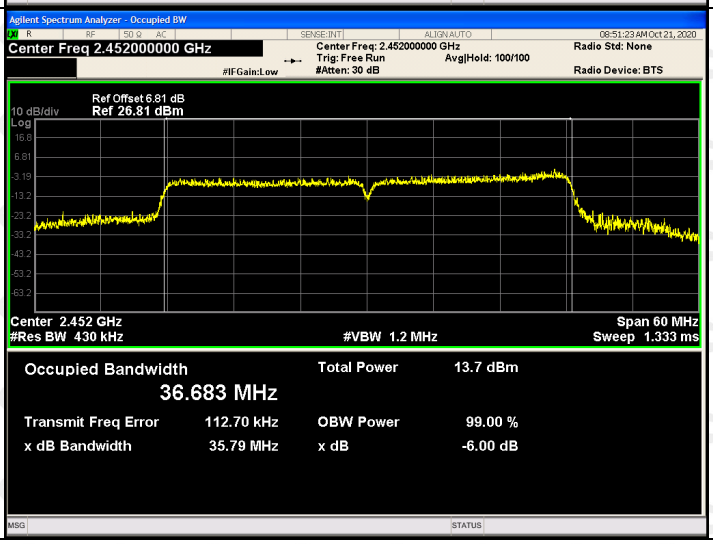	

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

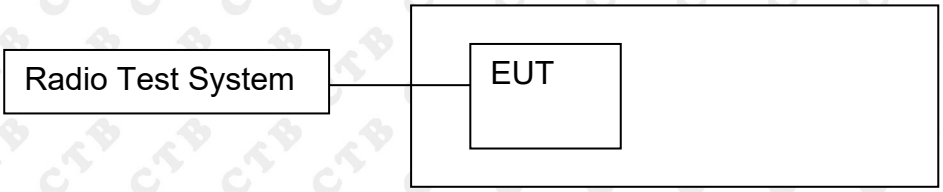

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = RMS.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /100KHz] ANT 1	Power Spectral Density [dBm /100KHz]] ANT 2	Power Spectral Density [dBm /100KHz]Total	Limit(dBm)
802.11b	LCH	-9.377	-9.021	/	8
	MCH	-10.244	-9.801	/	8
	HCH	-10.049	-9.442	/	8
802.11g	LCH	-12.267	-12.657	/	8
	MCH	-13.282	-13.574	/	8
	HCH	-13.834	-12.25	/	8
802.11n(HT20)	LCH	-13.794	-13.486	-10.627	6.99
	MCH	-14.468	-14.651	-11.548	6.99
	HCH	-14.073	-13.053	-10.523	6.99
802.11n(HT40)	LCH	-16.956	-16.838	-13.886	6.99
	MCH	-16.379	-17.078	-13.704	6.99
	HCH	-17.198	-17.451	-14.312	6.99

ANT1:
Test Graph

Graphs			
802.11b /LCH		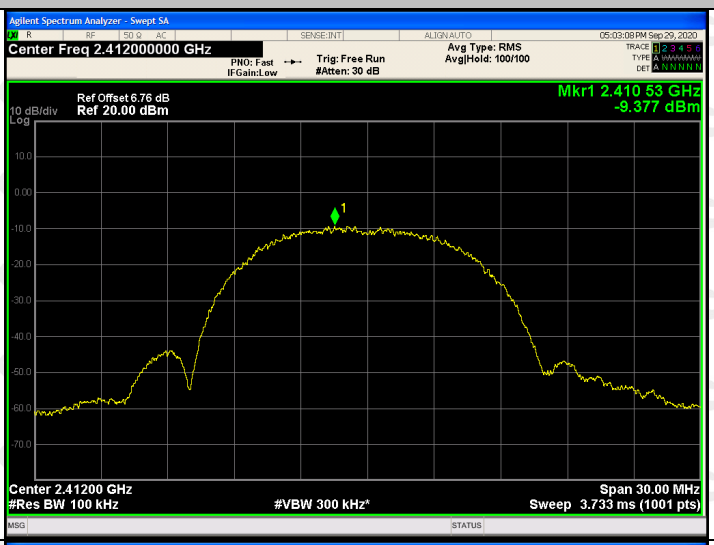	
802.11b /MCH		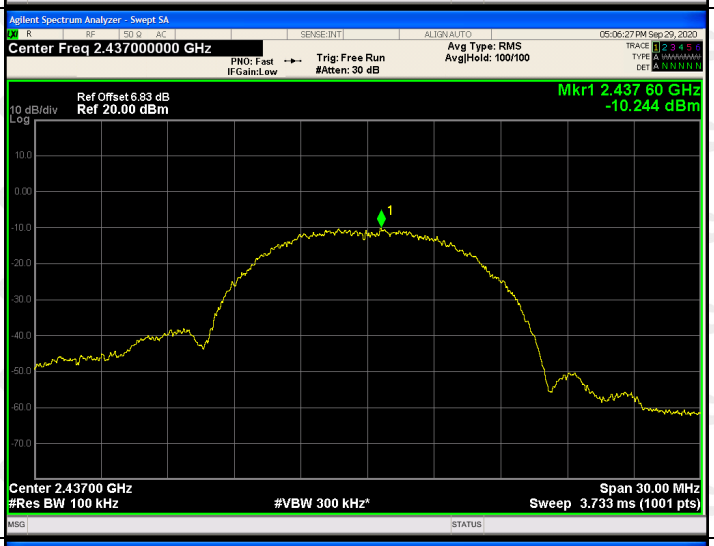	
802.11b/HCH		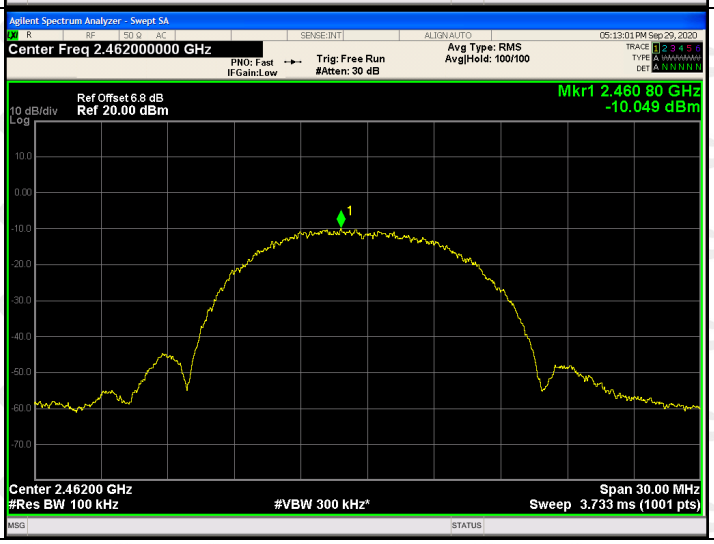	

802.11g/LCH		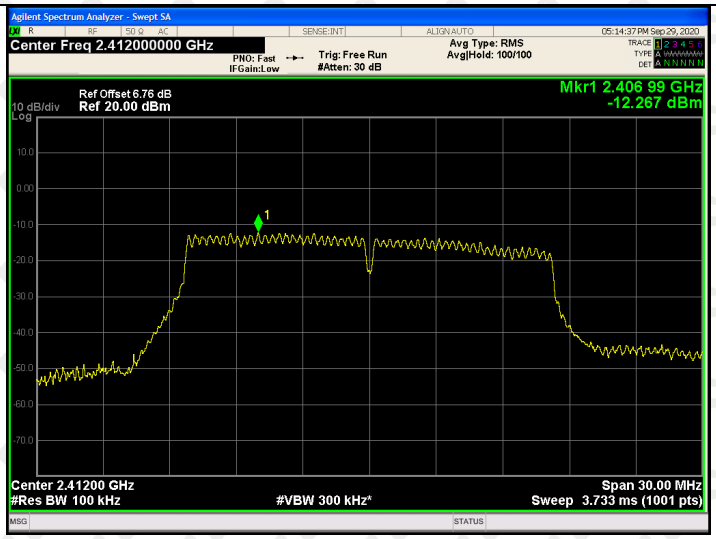
802.11g/MCH		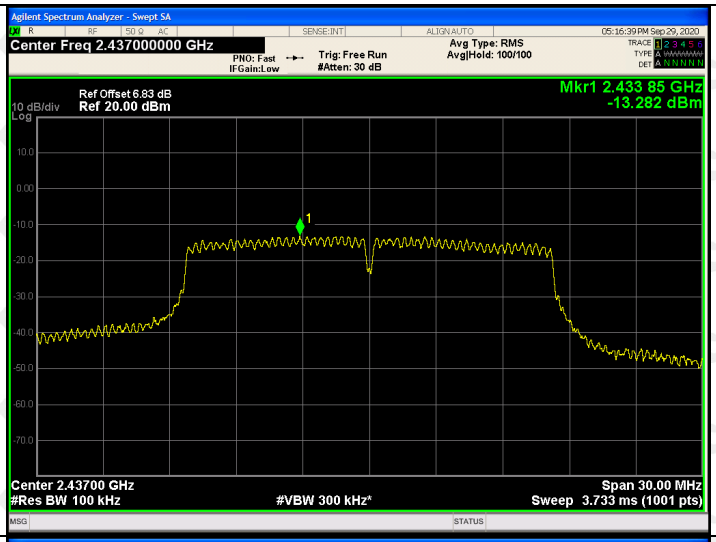
802.11g/HCH		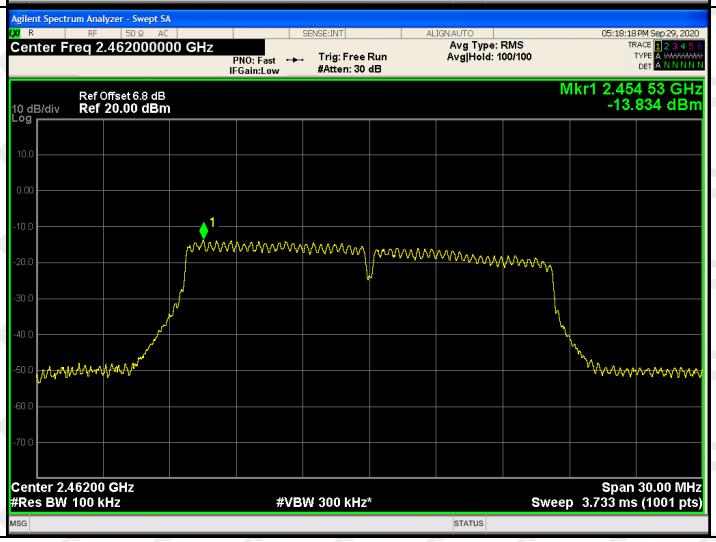

802.11n(HT20)/LCH		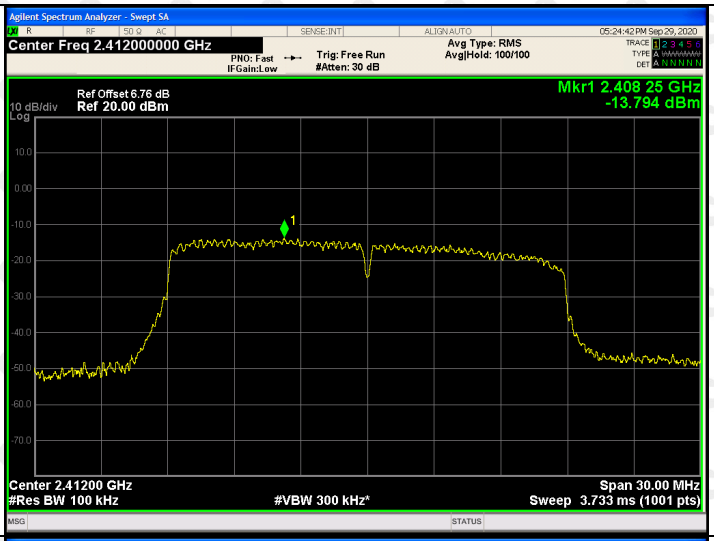	
802.11n(HT20)/MCH		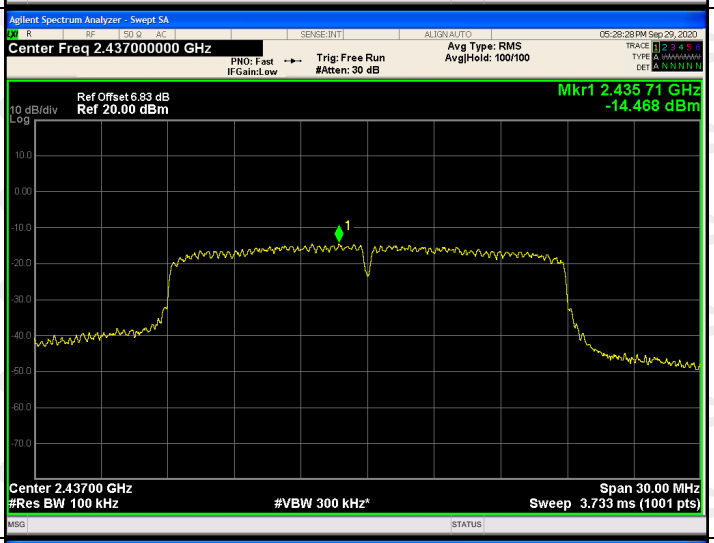	
802.11n(HT20)/HCH		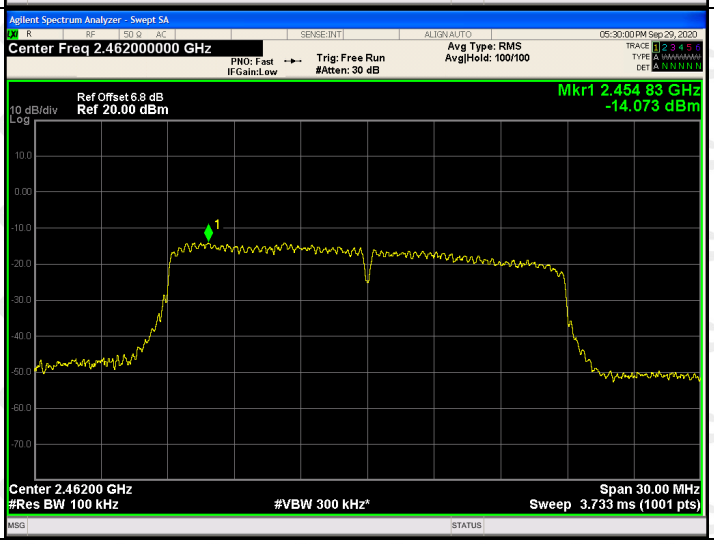	

802.11n(HT40)/LCH		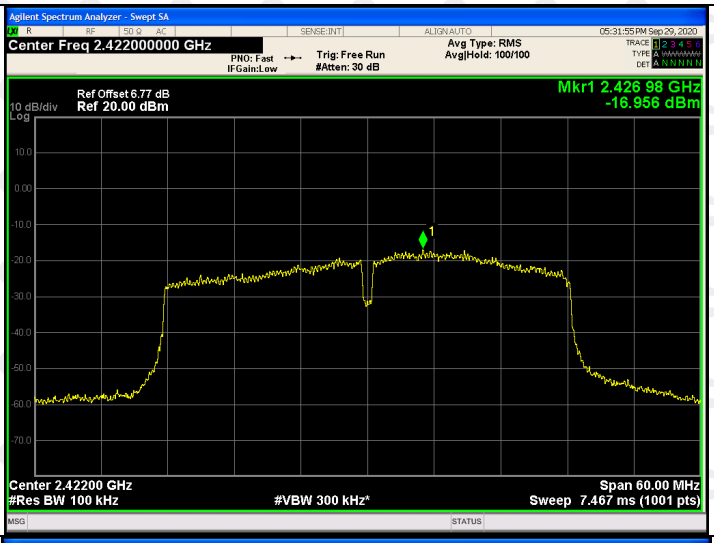	
802.11n(HT40)/MCH		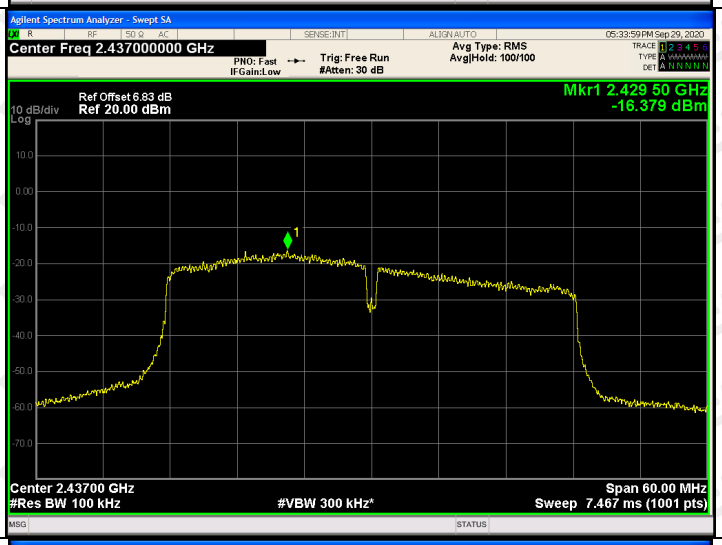	
802.11n(HT40)/HCH		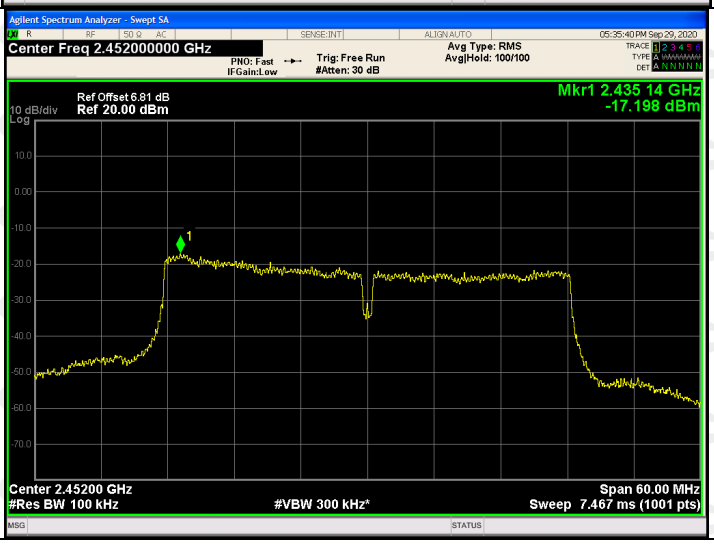	

ANT 2:
Test Graph

Graphs			
802.11b /LCH		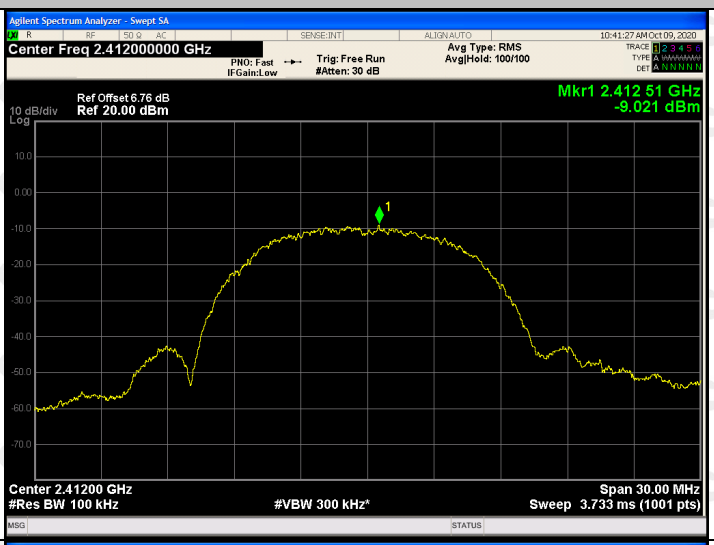	
802.11b /MCH		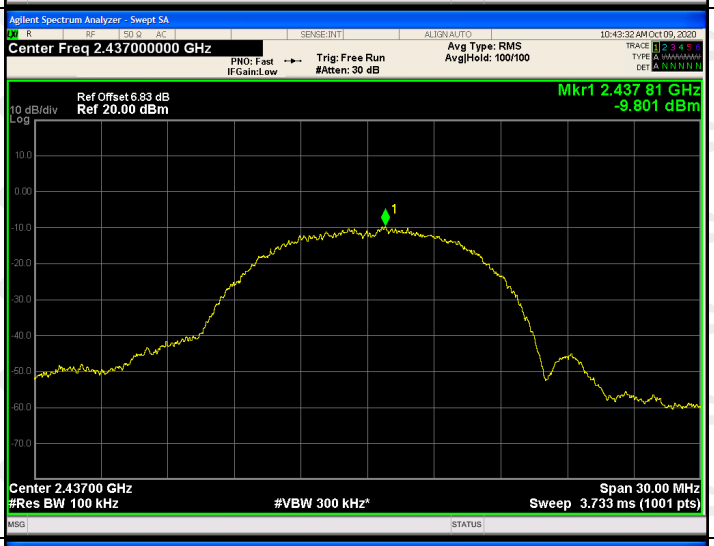	
802.11b/HCH		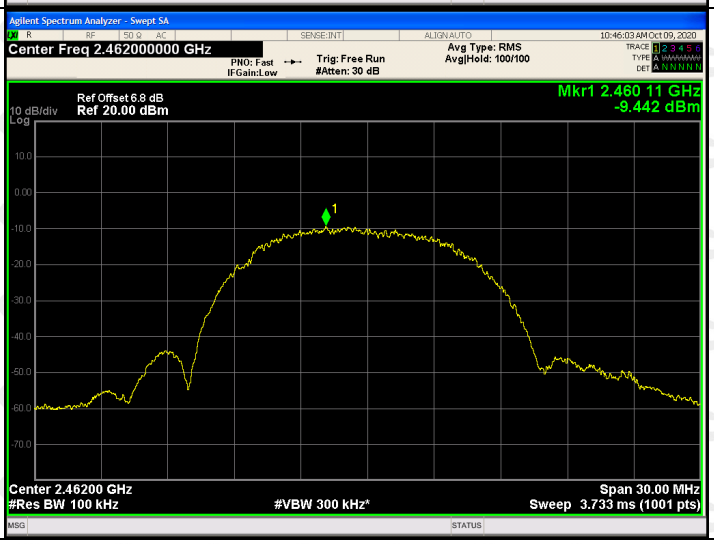	

802.11g/LCH		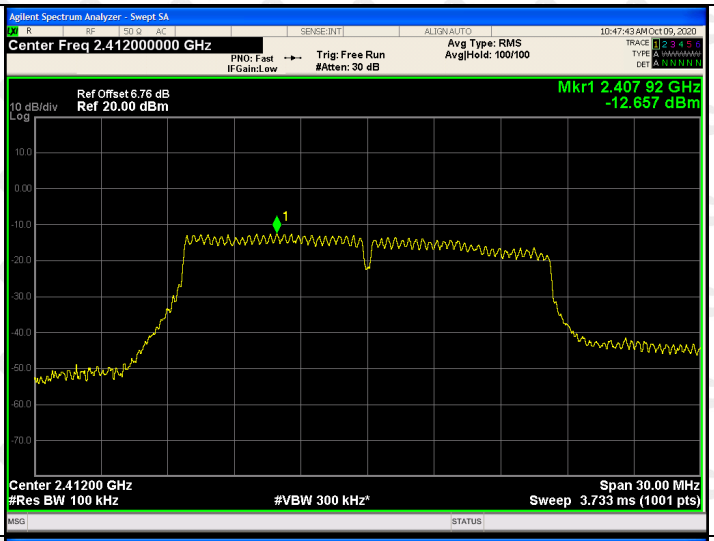	
802.11g/MCH		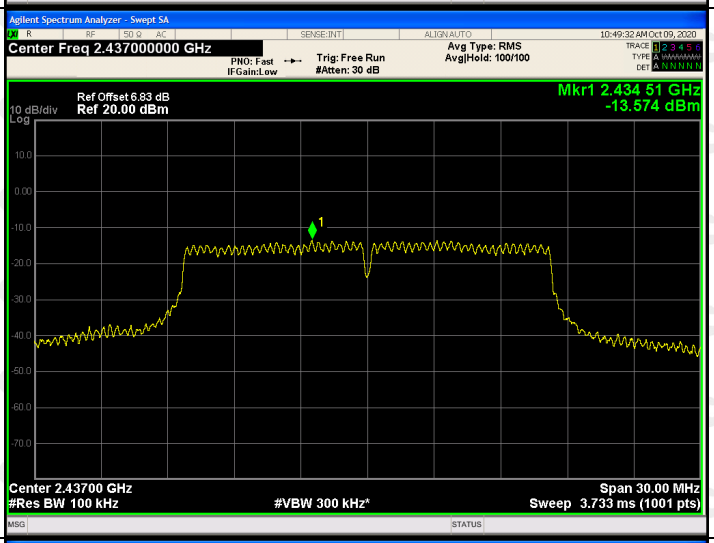	
802.11g/HCH		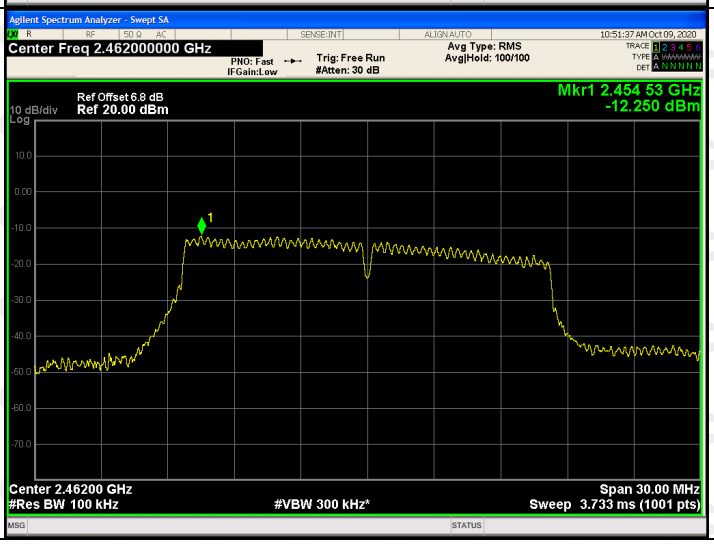	

802.11n(HT20)/LCH		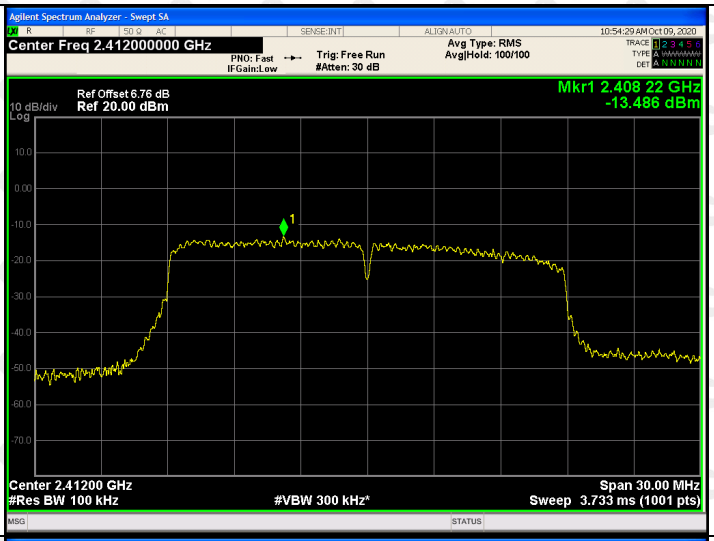	
802.11n(HT20)/MCH		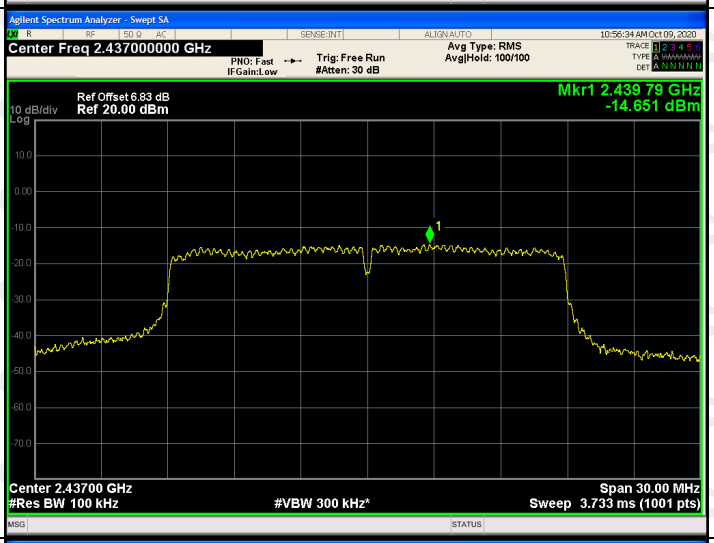	
802.11n(HT20)/HCH		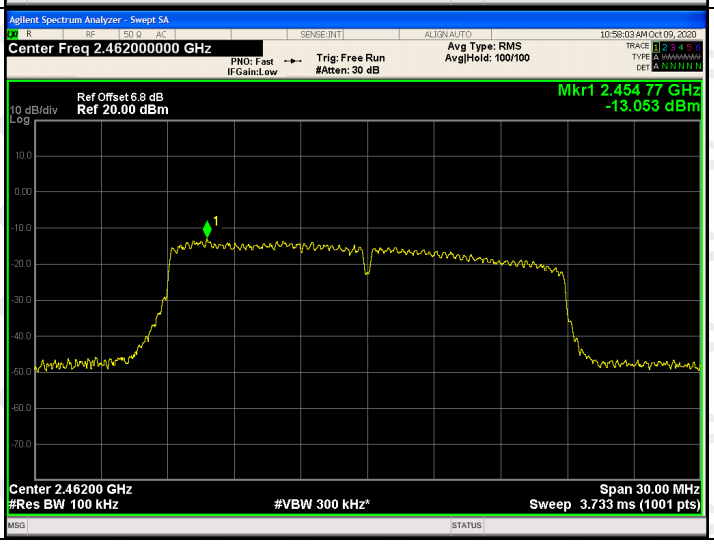	

802.11n(HT40)/LCH		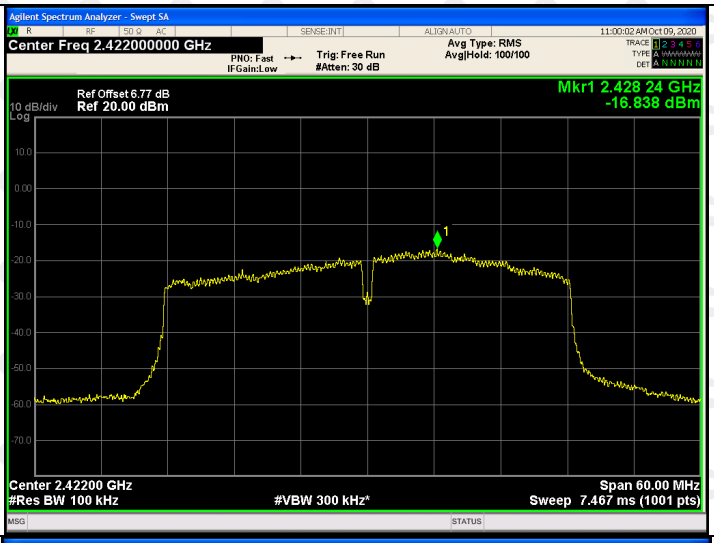	
802.11n(HT40)/MCH		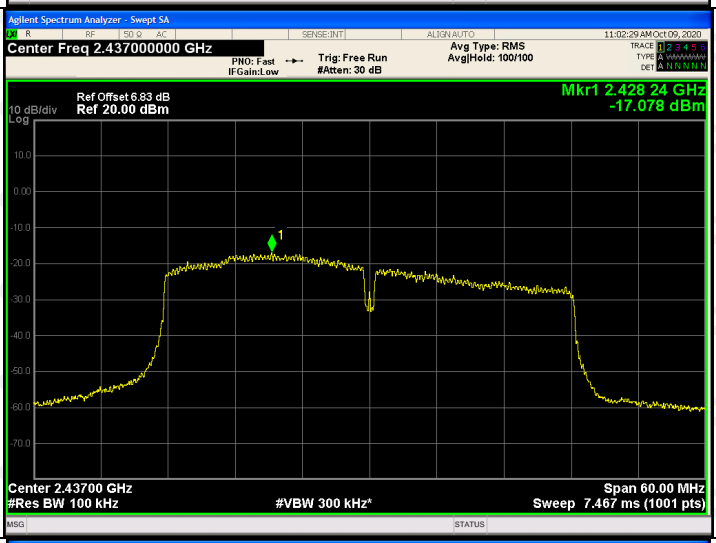	
802.11n(HT40)/HCH		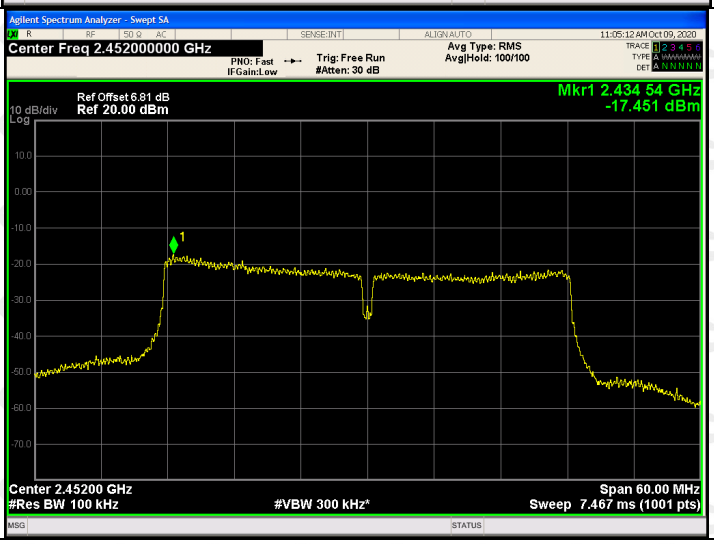	

12. ANTENNA REQUIREMENT

15.203 requirement:
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement:
The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 4.0dBi.

13. EUT PHOTOGRAPHS

External Photos

EUT Photo 1

EUT Photo 2

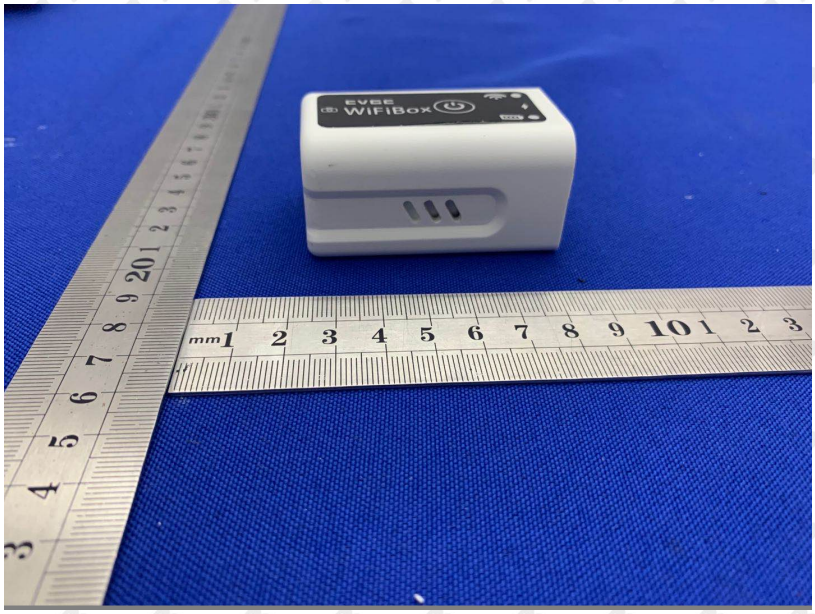

14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

Above 1G

Conducted Emission

※※※※※ END OF REPORT ※※※※※