


Report No.: WSCT-ANAB-R&E251200094A-BT Issued Date: 08 January 2026

Vertical:

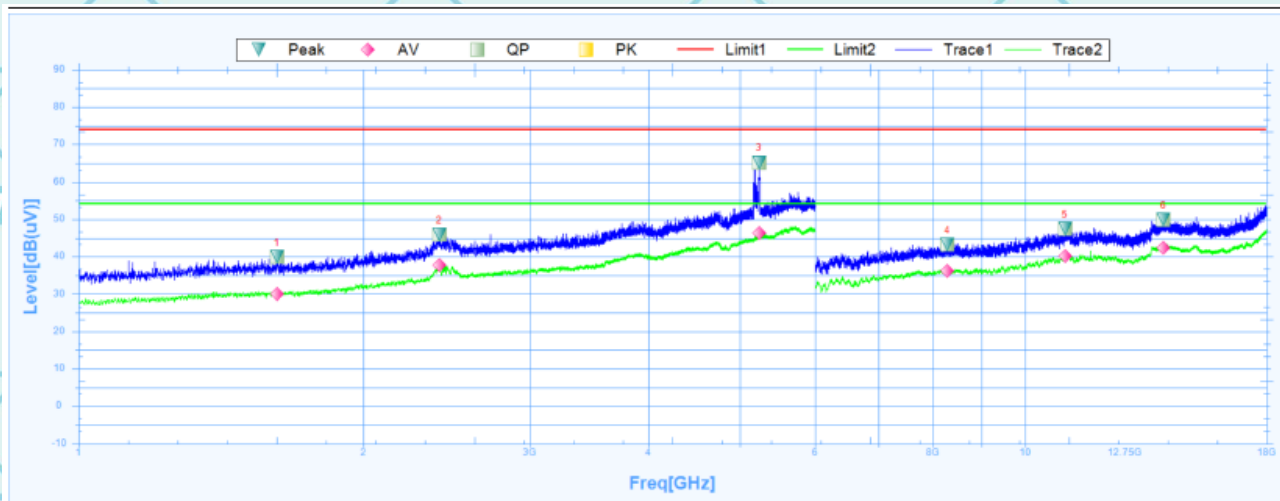


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1619.3750	39.87	0.16	39.71	74	-34.13	359.4	Vertical	PK	Pass
1	1619.3750	29.95	0.16	29.79	54	-24.05	359.4	Vertical	AV	Pass
2	2405.6250	45.96	7.59	38.37	74	-28.04	24.8	Vertical	PK	Pass
2	2405.6250	37.7	7.59	30.11	54	-16.3	24.8	Vertical	AV	Pass
3	5238.7500	65.22	18.93	46.29	74	-8.78	174.2	Vertical	PK	Pass
3	5238.7500	46.37	18.93	27.44	54	-7.63	174.2	Vertical	AV	Pass
4	8281.5000	43.34	37.11	6.23	74	-30.66	9.9	Vertical	PK	Pass
4	8281.5000	36.24	37.11	-0.87	54	-17.76	9.9	Vertical	AV	Pass
5	11017.5000	47.45	39.48	7.97	74	-26.55	226.4	Vertical	PK	Pass
5	11017.5000	40.23	39.48	0.75	54	-13.77	226.4	Vertical	AV	Pass
6	14002.5000	49.85	41.5	8.35	74	-24.15	360	Vertical	PK	Pass
6	14002.5000	42.46	41.5	0.96	54	-11.54	360	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E251200094A-BT Issued Date: 08 January 2026

High channel: 2480MHz

Horizontal:

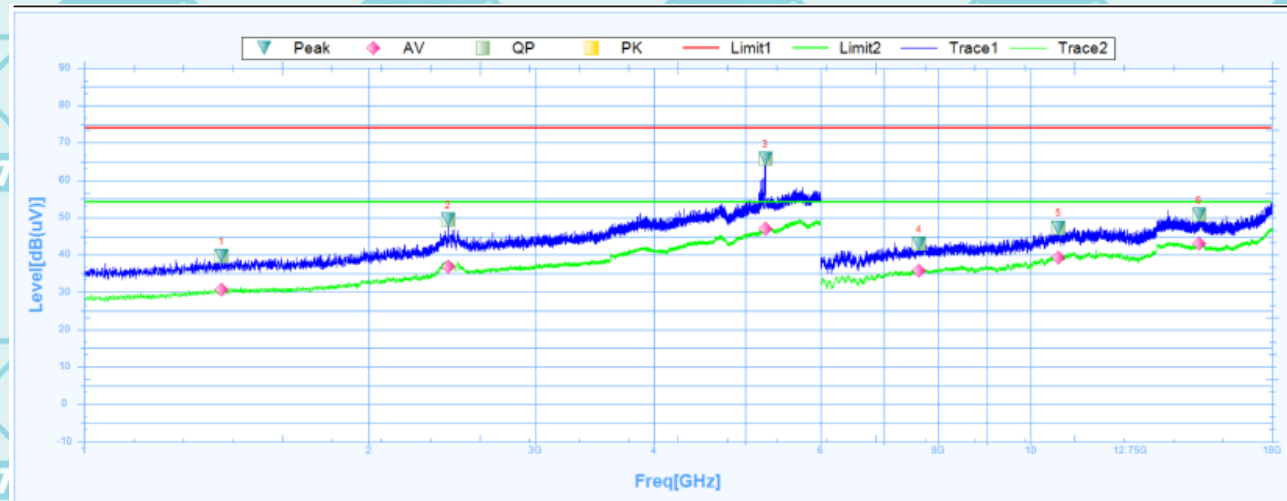


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1396.8750	39.7	-0.54	40.24	74	-34.3	-0.1	Horizontal	PK	Pass
1	1396.8750	30.55	-0.54	31.09	54	-23.45	-0.1	Horizontal	AV	Pass
2	2424.3750	49.33	7.65	41.68	74	-24.67	207.7	Horizontal	PK	Pass
2	2424.3750	36.88	7.65	29.23	54	-17.12	207.7	Horizontal	AV	Pass
3	5246.2500	65.74	19.07	46.67	74	-8.26	22.4	Horizontal	PK	Pass
3	5246.2500	46.93	19.07	27.86	54	-7.07	22.4	Horizontal	AV	Pass
4	7627.5000	42.93	36.44	6.49	74	-31.07	268.3	Horizontal	PK	Pass
4	7627.5000	35.63	36.44	-0.81	54	-18.37	268.3	Horizontal	AV	Pass
5	10705.5000	47.32	39.09	8.23	74	-26.68	220.5	Horizontal	PK	Pass
5	10705.5000	39.25	39.09	0.16	54	-14.75	220.5	Horizontal	AV	Pass
6	15070.5000	50.82	39.98	10.84	74	-23.18	175	Horizontal	PK	Pass
6	15070.5000	43.1	39.98	3.12	54	-10.9	175	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E251200094A-BT Issued Date: 08 January 2026

Vertical:

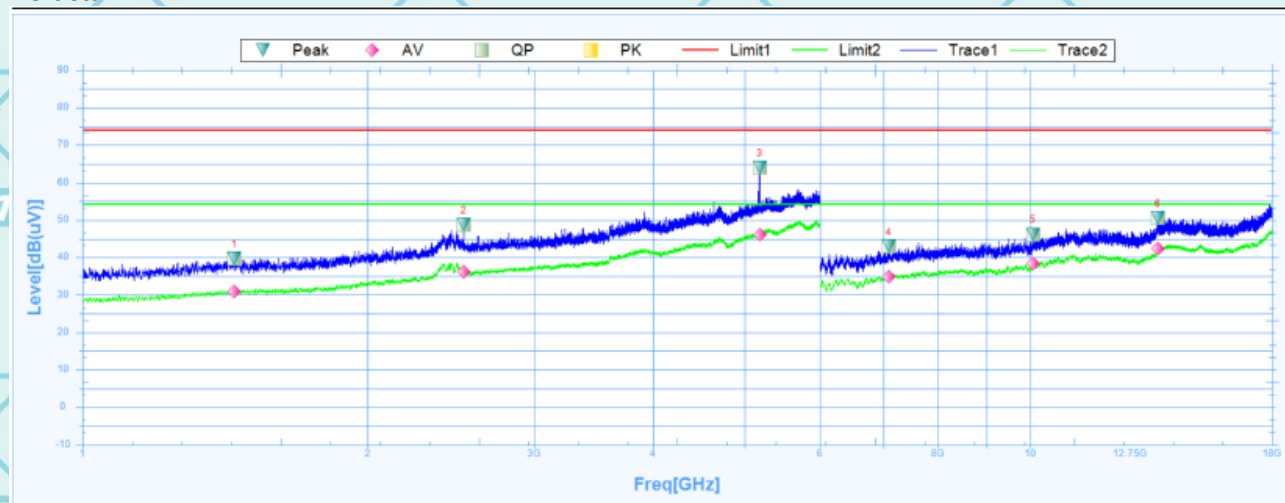

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1446.2500	39.63	-0.38	40.01	74	-34.37	20.1	Vertical	PK	Pass
1	1446.2500	30.96	-0.38	31.34	54	-23.04	20.1	Vertical	AV	Pass
2	2525.6250	48.7	6.38	42.32	74	-25.3	322.5	Vertical	PK	Pass
2	2525.6250	36.19	6.38	29.81	54	-17.81	322.5	Vertical	AV	Pass
3	5185.6250	63.96	17.95	46.01	74	-10.04	359.5	Vertical	PK	Pass
3	5185.6250	46.17	17.95	28.22	54	-7.83	359.5	Vertical	AV	Pass
4	7093.5000	43.06	35.64	7.42	74	-30.94	120.1	Vertical	PK	Pass
4	7093.5000	34.75	35.64	-0.89	54	-19.25	120.1	Vertical	AV	Pass
5	10074.0000	46.22	38.2	8.02	74	-27.78	36.4	Vertical	PK	Pass
5	10074.0000	38.31	38.2	0.11	54	-15.69	36.4	Vertical	AV	Pass
6	13636.5000	50.49	40.55	9.94	74	-23.51	183.4	Vertical	PK	Pass
6	13636.5000	42.42	40.55	1.87	54	-11.58	183.4	Vertical	AV	Pass

Note:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
3. Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
4. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (8DPSK) was submitted only.
5. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result 8DPSK model was report as below

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2387	60.02	-8.76	51.26	74	22.74	H	PK
2387	54.14	-8.76	45.38	54	8.62	H	AV
2387	63.52	-8.73	54.79	74	19.21	V	PK
2387	57.02	-8.73	48.29	54	5.71	V	AV
2390	64.87	-8.76	56.11	74	17.89	H	PK
2390	56.23	-8.76	47.47	54	6.53	H	AV
2390	63.60	-8.73	54.87	74	19.13	V	PK
2390	55.28	-8.73	46.55	54	7.45	V	AV
High Channel							
2483.5	63.82	-8.17	55.65	74	18.35	H	PK
2483.5	53.38	-8.17	45.21	54	8.79	H	AV
2483.5	62.11	-8.17	53.94	74	20.06	V	PK
2483.5	53.98	-8.17	45.81	54	8.19	V	AV

Note: Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E251200094A-BT Issued Date: 08 January 2026

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******