

TEST REPORT

FCC ID: 2AXYP-OPN-374N-R

Product: Open-Ear True Wireless Earbuds

Model No.: OPN-374N

Trade Mark: oraimo

Report No.: WSCT-ANAB-R&E251200100A-BT

Issued Date: 08 January 2026

Issued for:

ORAIMO TECHNOLOGY LIMITED
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B,Baoli'an Industrial Park,No.58 and 60,Tangtou Avenue, Shiyan
Street, Bao'an District, Shenzhen City, Guangdong Province, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
4. Genera Information.....	7
4.1. TEST ENVIRONMENT AND MODE.....	7
4.2. DESCRIPTION OF SUPPORT UNITS	7
5. Facilities and Accreditations	8
5.1. FACILITIES	8
5.2. ACCREDITATIONS	8
5.3. MEASUREMENT UNCERTAINTY	9
5.4. MEASUREMENT INSTRUMENTS	10
6. Test Results and Measurement Data	11
6.1. ANTENNA REQUIREMENT.....	11
6.2. CONDUCTED EMISSION	12
6.3. CONDUCTED OUTPUT POWER.....	17
6.4. EMISSION BANDWIDTH.....	22
6.5. POWER SPECTRAL DENSITY	27
6.6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	32
6.7. RADIATED SPURIOUS EMISSION MEASUREMENT	44
7. Test Setup Photographs	57

Report No.: WSCT-ANAB-R&E251200100A-LE Issued Date: 08 January 2026

1. Test Certification

Product:	Open-Ear True Wireless Earbuds
Model No.:	OPN-374N
Trade Mark:	oraimo
Applicant:	ORAIMO TECHNOLOGY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	ORAIMO TECHNOLOGY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of Test:	05 December 2025 to 08 January 2026
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 KDB 558074 D01 DTS Meas Guidance v04

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang

(Wang Xiang)

Checked By:

Qin Shuiquan

(Qin Shuiquan)

Approved By:

Li Huaibi

(Li Huaibi)

Date:

08 January 2026

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum conducted output power	§15.247 (b)(3) §2.1046	PASS
6dB Emission Bandwidth	§15.247 (a)(2) §2.1049	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS
Spurious Emission	§15.205/§15.209 §2.1053, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	Open-Ear True Wireless Earbuds
Model :	OPN-374N
Trade Mark:	oraimo
Operation Frequency:	2402MHz~2480MHz
Channel Separation:	2MHz
Number of Channel:	40
Modulation Technology:	GFSK
Antenna Type:	Chip Antenna
Antenna Gain:	2.48dBi
Operating Voltage:	Rechargeable Li-ion Polymer Battery: YD 551012 0.1665Wh 3.7V 45mAh Charging Box: 701435 3.7V 350mAh 1.295Wh
Remark:	N/A.

Note: 1. N/A stands for no applicable.

2. The antenna gain is provided by the customer. For any reported data issues caused by the antenna gain, World Standardization Certification&Testing Group (Shenzhen) Co., Ltd assumes no responsibility.

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
...	...	...	...	...	...	...	...
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark: Channel 0, 19 & 39 have been tested.

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%) with Fully-charged battery.
The sample was placed (0.1m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China** of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA	ANAB - Certificate Number: AT-3951
China	CNAS (Registration Number: L3732)
Canada	ISED(CAB identifier:CN0178)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

5.3.Measurement Uncertainty

No.	Item	MU
1	Power Spectral Density	±3.2dB
2	Duty Cycle and Tx-Sequence and Tx-Gap	±1%
3	Medium Utilisation Factor	±1.3%
4	Occupied Channel Bandwidth	±2.4%
5	Transmitter Unwanted Emission in the out-of Band	±1.3%
6	Transmitter Unwanted Emissions in the Spurious Domain	±2.5%
7	Receiver Spurious Emissions	±2.5%
8	Conducted Emission Test	±3.2dB
9	RF power, conducted	±0.16dB
10	Spurious emissions, conducted	±0.21dB
11	All emissions, radiated(<1GHz)	±4.7dB
12	All emissions, radiated(>1GHz)	±4.7dB
13	Temperature	±0.5°C
14	Humidity	±2.0%

NOTE:1.The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

2. The U_{lab} is less than U_{cispr} , compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

3. For conducted emission test of laboratory have a measurement uncertainty greater than that specified in harmonized standard, this equipment can still be used provided that an adjustment is made follows : any additionan uncertainty in the test system over and above that specified in harmonized standard should be used to tighter the test requirements-making the test harder to pass. This procedure will ensure that a test system not comliant with harmonized standard does not increase the probability of passing a EUT that would otherwise have failed a test if a test system comliant with harmonized standard had been used.

5.4.MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	--	EZ-EMC	CON-03A	-	-
Test software	--	MTS8310		-	
EMI Test Receiver	R&S	ESCI	100005	11/05/2025	11/04/2026
LISN	AFJ	LS16	16010222119	11/05/2025	11/04/2026
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2025	11/04/2026
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2025	11/04/2026
Coaxial cable	Megalon	LMR400	N/A	11/05/2025	11/04/2026
GPIO cable	Megalon	GPIO	N/A	11/05/2025	11/04/2026
Spectrum Analyzer	R&S	FSU	100114	11/05/2025	11/04/2026
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2025	11/04/2026
Pre-Amplifier	CDSI	PAP-1G18-38	--	11/05/2025	11/04/2026
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	07/29/2025	07/28/2026
9*6*6 Anechoic	--	--	--	11/05/2025	11/04/2026
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	11/05/2025	11/04/2026
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2025	11/04/2026
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2025	11/04/2026
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2025	11/04/2026
Loop Antenna	EMCO	6502	00042960	11/05/2025	11/04/2026
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2025	11/04/2026
Power meter	Anritsu	ML2487A	6K00003613	11/05/2025	11/04/2026
Power sensor	Anritsu	MX248XD	--	11/05/2025	11/04/2026
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2025	11/04/2026


6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The Bluetooth antenna is a PCB Antenna. it meets the standards, and the best case gain of the antenna is 2.87dBi. Please refer to the attached "OPN-374N Internal Photo" for the antenna location	

6.2. Conducted Emission

6.2.1. Test Specification

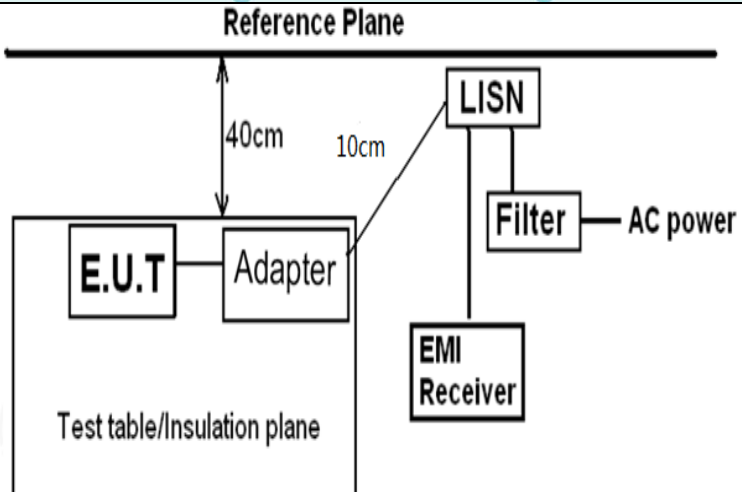Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2020														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane  40cm 10cm E.U.T Adapter Test table/Insulation plane LISN Filter AC power EMI Receiver Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Charging + Transmitting Mode														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum														

Report No.: WSCT-ANAB-R&E251200100A-LE Issued Date: 08 January 2026

	emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.
Test Result:	PASS

6.2.2. EUT OPERATING CONDITIONS


The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Report No.: WSCT-ANAB-R&E251200100A-LE Issued Date: 08 January 2026

Test data


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

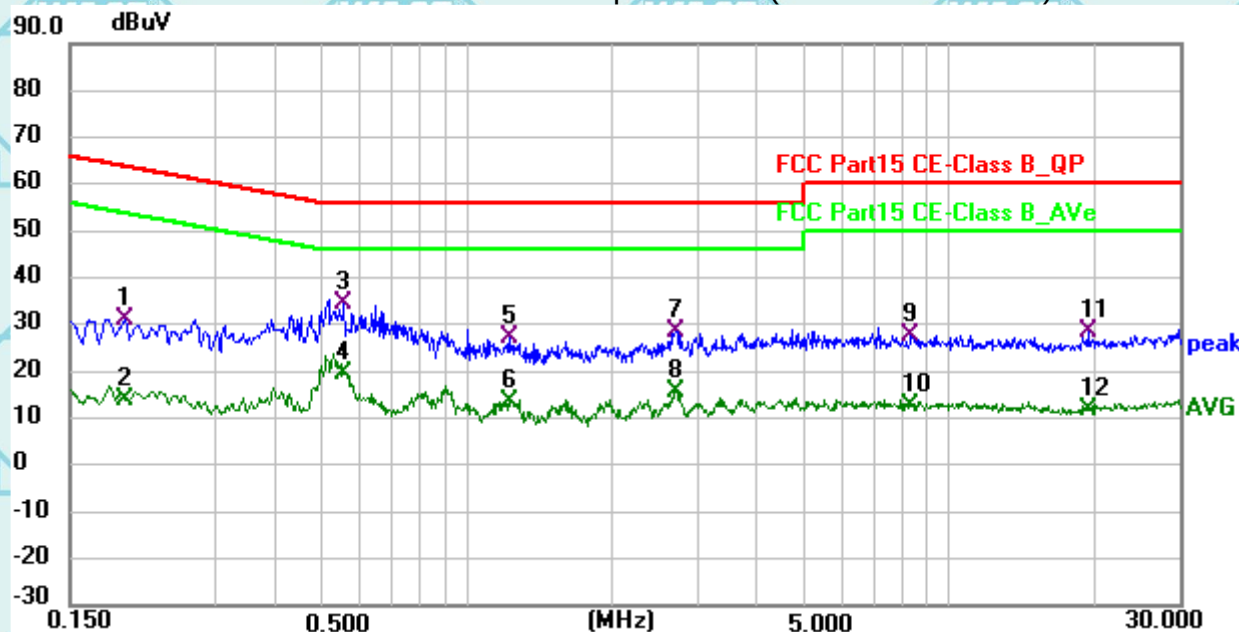

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1949	10.40	20.69	31.09	63.83	-32.74	QP
2	0.1949	-6.57	20.69	14.12	53.83	-39.71	AVG
3 *	0.5550	14.07	20.52	34.59	56.00	-21.41	QP
4	0.5550	-1.02	20.52	19.50	46.00	-26.50	AVG
5	1.2345	6.51	20.66	27.17	56.00	-28.83	QP
6	1.2345	-7.05	20.66	13.61	46.00	-32.39	AVG
7	2.7195	8.02	20.60	28.62	56.00	-27.38	QP
8	2.7195	-5.02	20.60	15.58	46.00	-30.42	AVG
9	8.3354	7.16	20.48	27.64	60.00	-32.36	QP
10	8.3354	-7.74	20.48	12.74	50.00	-37.26	AVG
11	19.4189	8.34	20.25	28.59	60.00	-31.41	QP
12	19.4189	-8.61	20.25	11.64	50.00	-38.36	AVG

Report No.: WSCT-ANAB-R&E251200100A-LE Issued Date: 08 January 2026

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

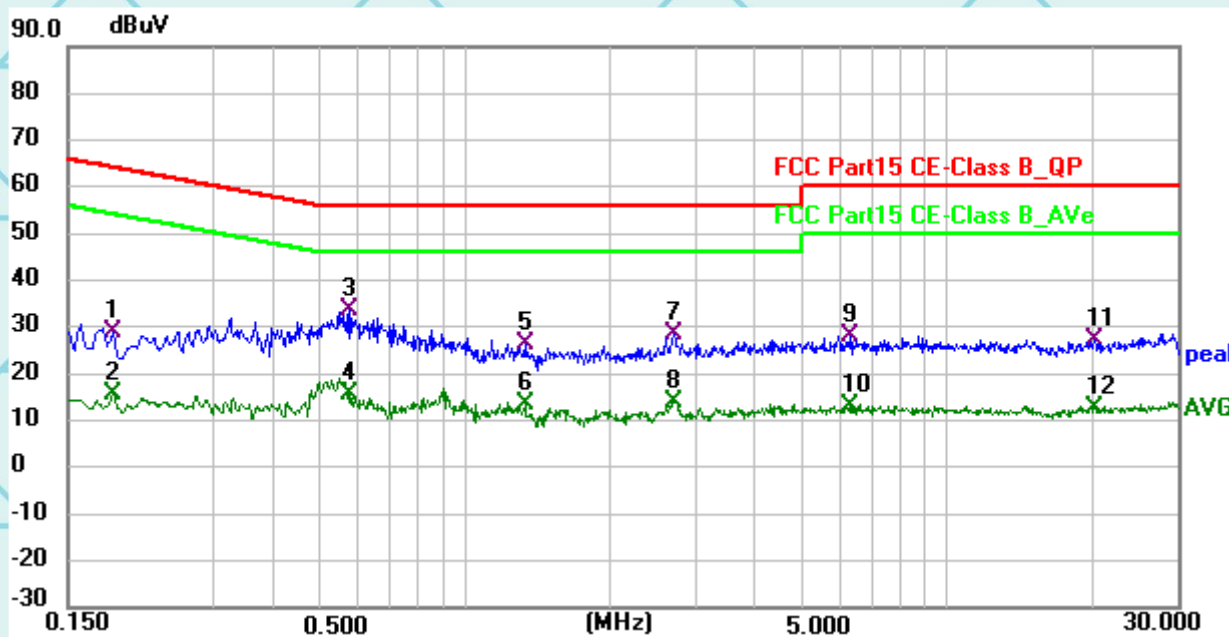

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	8.32	20.70	29.02	64.21	-35.19	QP
2	0.1860	-5.20	20.70	15.50	54.21	-38.71	AVG
3 *	0.5775	12.98	20.52	33.50	56.00	-22.50	QP
4	0.5775	-5.00	20.52	15.52	46.00	-30.48	AVG
5	1.3335	5.85	20.65	26.50	56.00	-29.50	QP
6	1.3335	-7.34	20.65	13.31	46.00	-32.69	AVG
7	2.7195	7.90	20.60	28.50	56.00	-27.50	QP
8	2.7195	-6.80	20.60	13.80	46.00	-32.20	AVG
9	6.2565	7.62	20.53	28.15	60.00	-31.85	QP
10	6.2565	-7.28	20.53	13.25	50.00	-36.75	AVG
11	20.1795	6.75	20.27	27.02	60.00	-32.98	QP
12	20.1795	-7.71	20.27	12.56	50.00	-37.44	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN Factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard


Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.3. Conducted Output Power

6.3.1. Test Specification

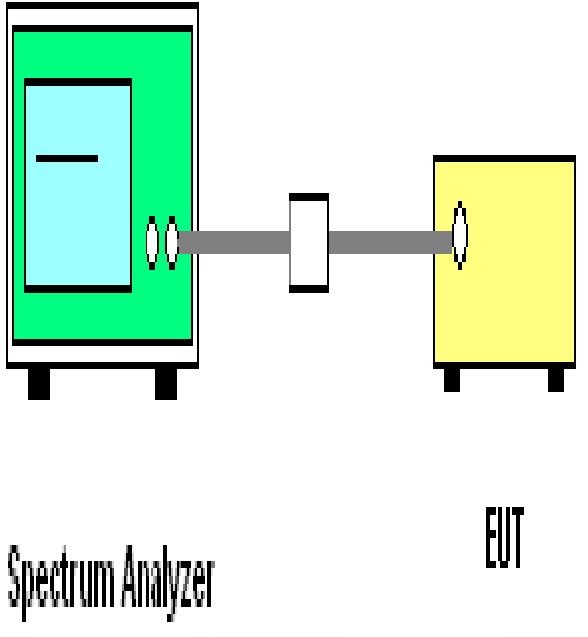Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074
Limit:	30dBm
Test Setup:	 The diagram illustrates the test setup. On the left is a green rectangular box labeled 'Spectrum Analyzer'. On the right is a yellow rectangular box labeled 'EUT'. A black cable connects the two boxes. The cable has a white connector on the Spectrum Analyzer side and a black connector on the EUT side.
Test Mode:	Refer to item 4.1
Test Procedure:	- The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04. - Set spectrum analyzer as following: - Set the RBW $\geq$ DTS bandwidth. - Set VBW $\geq 3 \times$ RBW. - Set span $\geq 3 \times$ RBW - Sweep time = auto couple. - Detector = peak. - Trace mode = max hold. - Allow trace to fully stabilize. - Use peak marker function to determine the peak amplitude level.
Test Result:	PASS

6.3.2. Test Data


BLE 1M			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	1.1	30.00	PASS
Middle	1.37	30.00	PASS
Highest	1.21	30.00	PASS

BLE 2M			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	1.37	30.00	PASS
Middle	1.7	30.00	PASS
Highest	1.62	30.00	PASS


Test plots as follows:

Test Graphs


Power NVNT BLE 1M 2402MHz Ant1

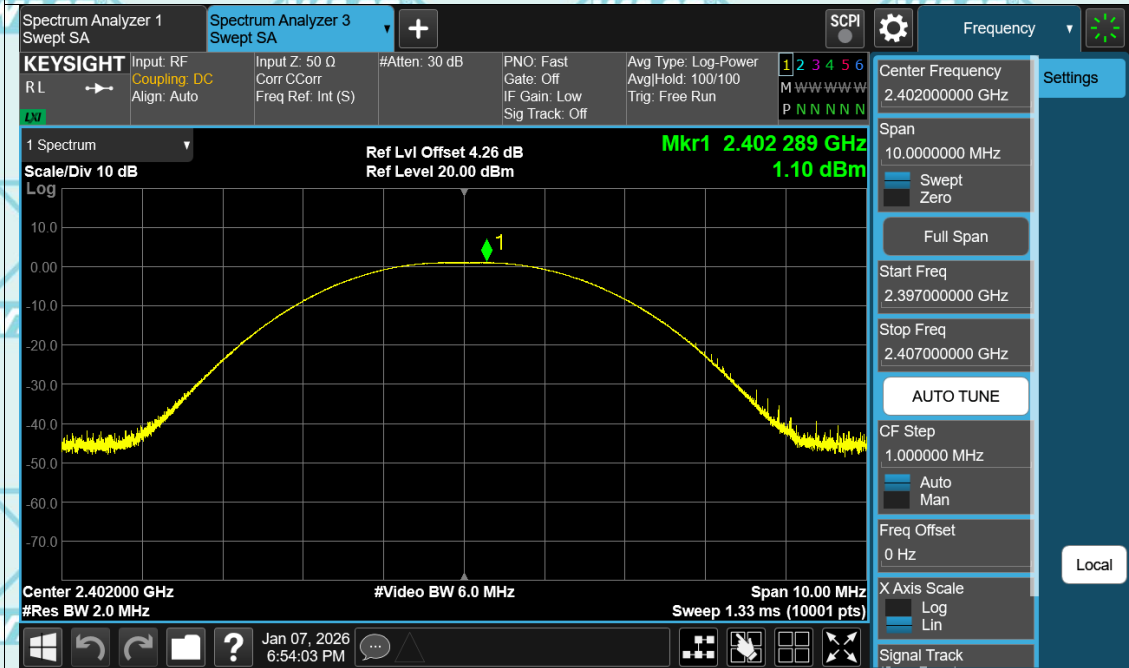


Power NVNT BLE 1M 2440MHz Ant1

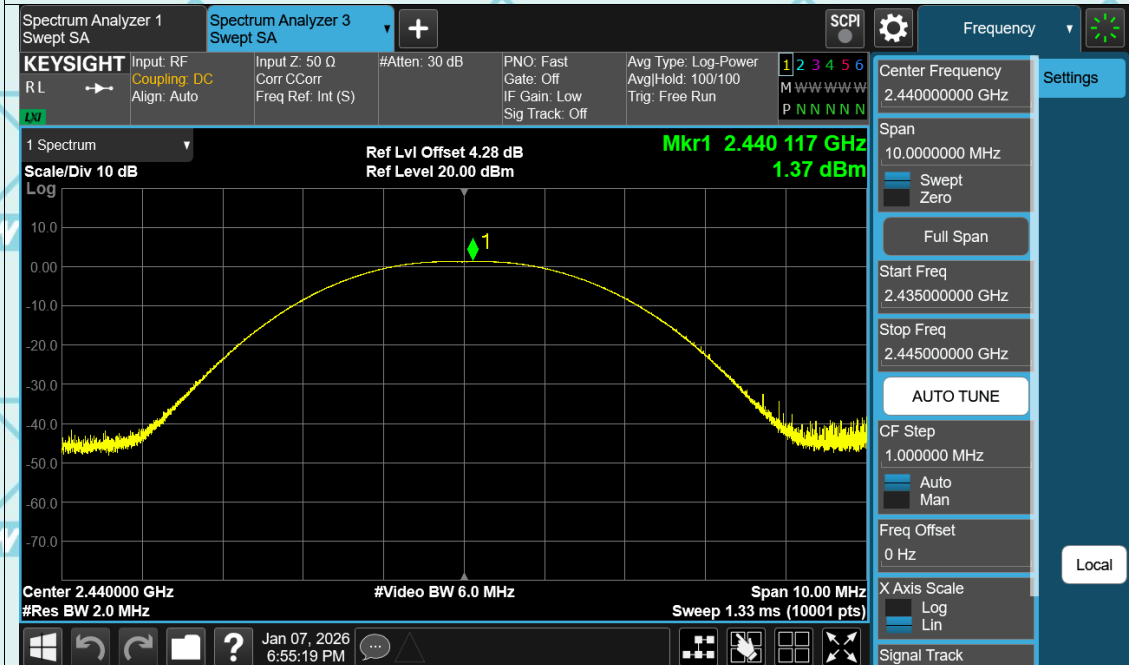


Power NVNT BLE 1M 2480MHz Ant1

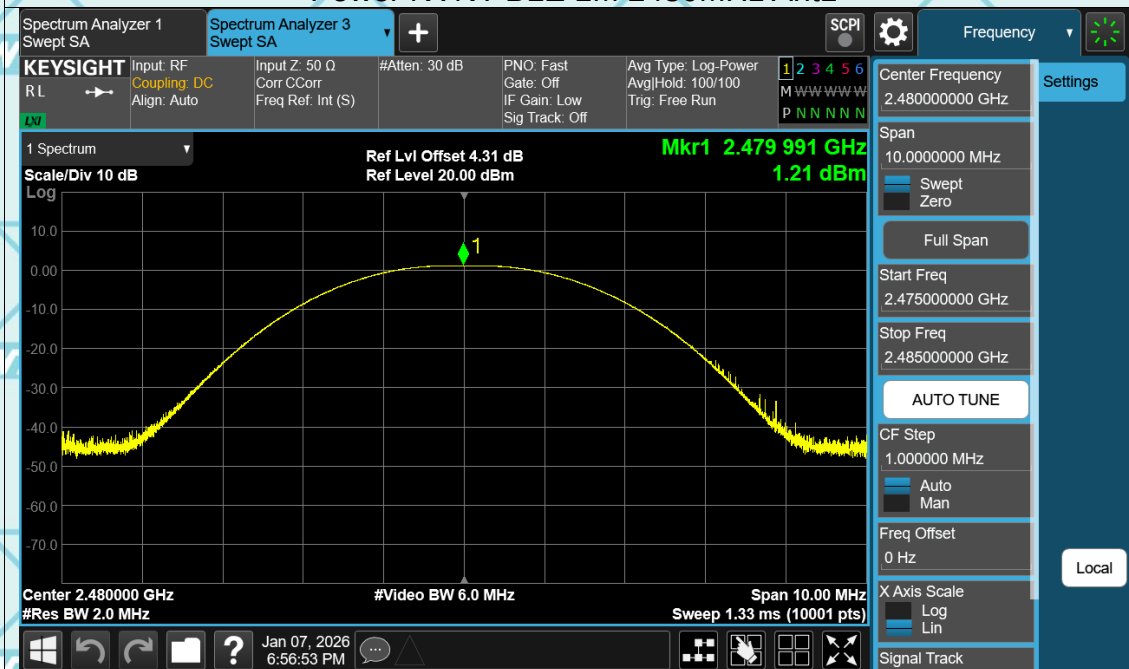


Power NVNT BLE 2M 2402MHz Ant1

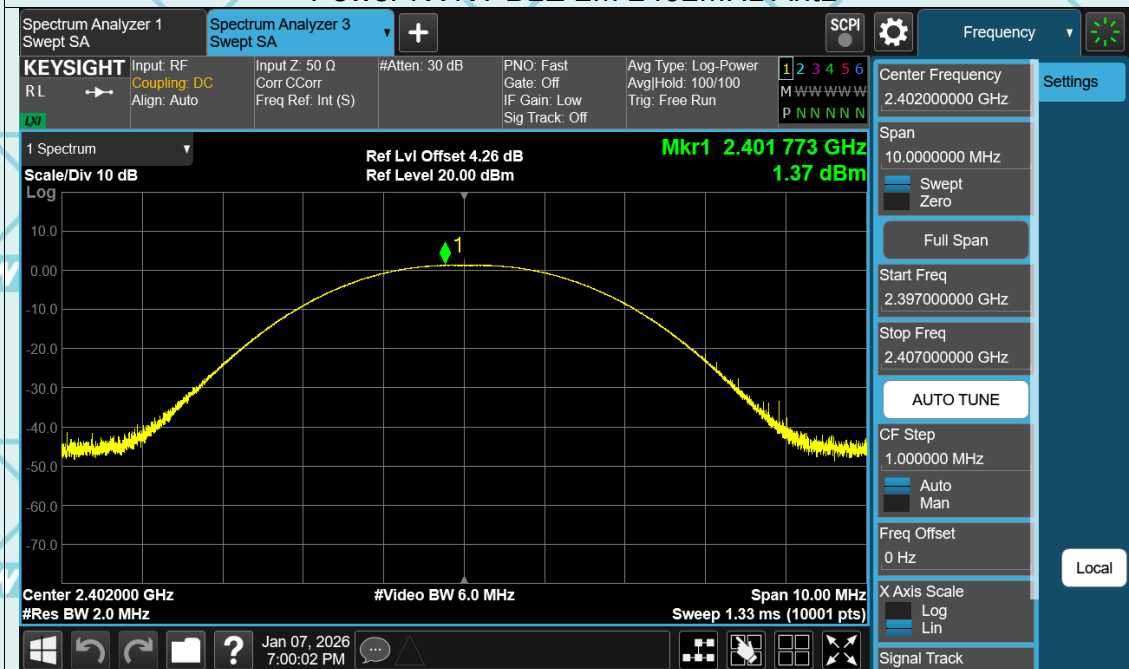

Power NVNT BLE 2M 2440MHz Ant1

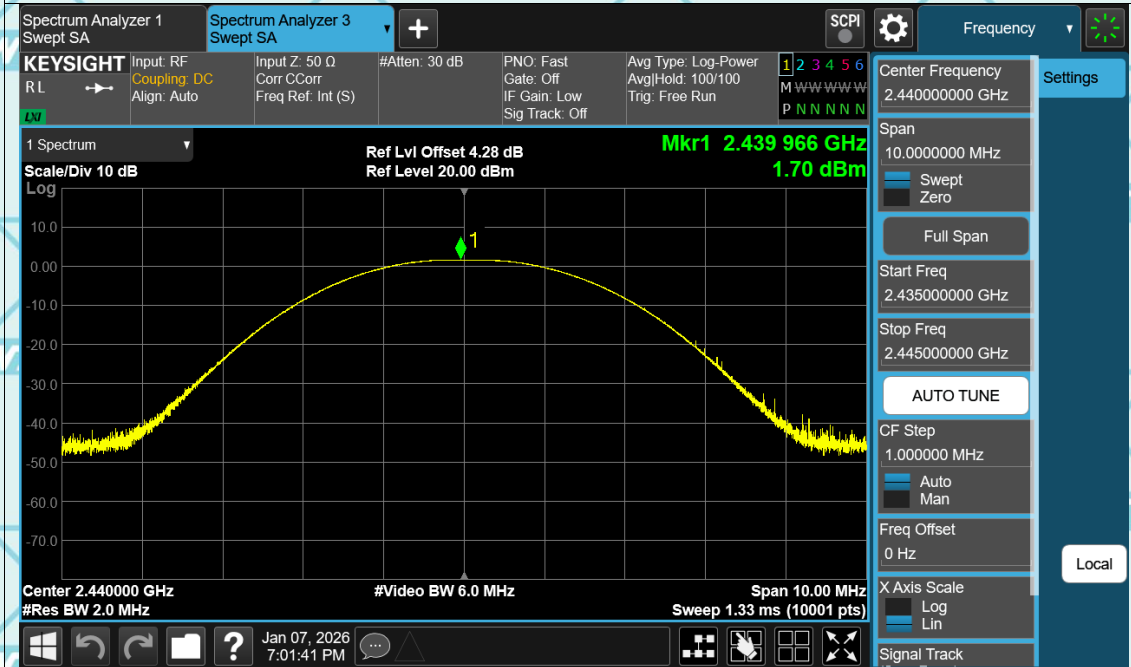


Power NVNT BLE 2M 2480MHz Ant1

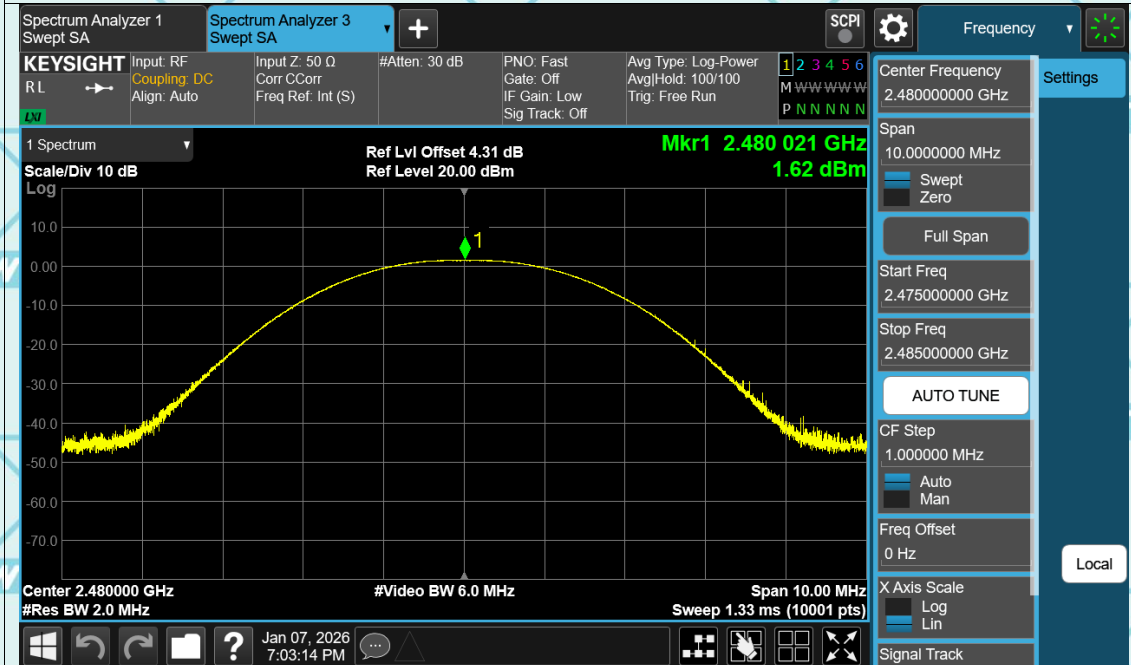

6.4. Emission Bandwidth

6.4.1. Test Specification

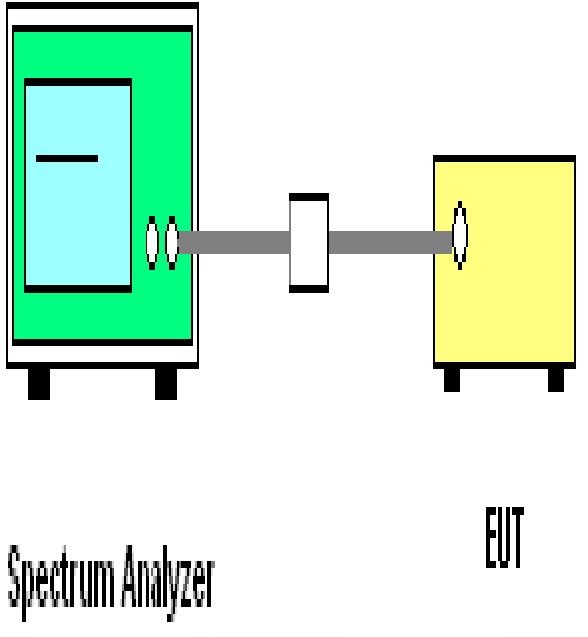Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074
Limit:	>500kHz
Test Setup:	 The diagram illustrates the test setup. On the left is a green rectangular box labeled 'Spectrum Analyzer'. On the right is a yellow rectangular box labeled 'EUT'. A black cable connects the two boxes. The cable has a white connector on the Spectrum Analyzer side and a black connector on the EUT side.
Test Mode:	Refer to item 4.1
Test Procedure:	1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test data



BLE 1M

Test channel	6dB Emission Bandwidth (kHz)		
	BT LE mode	Limit	Result
Lowest	649.2	>500k	PASS
Middle	664.4	>500k	
Highest	662.8	>500k	



BLE 2M

Test channel	6dB Emission Bandwidth (kHz)		
	BT LE mode	Limit	Result
Lowest	507.9	>500k	PASS
Middle	547.7	>500k	
Highest	506.2	>500k	



Test plots as follows:

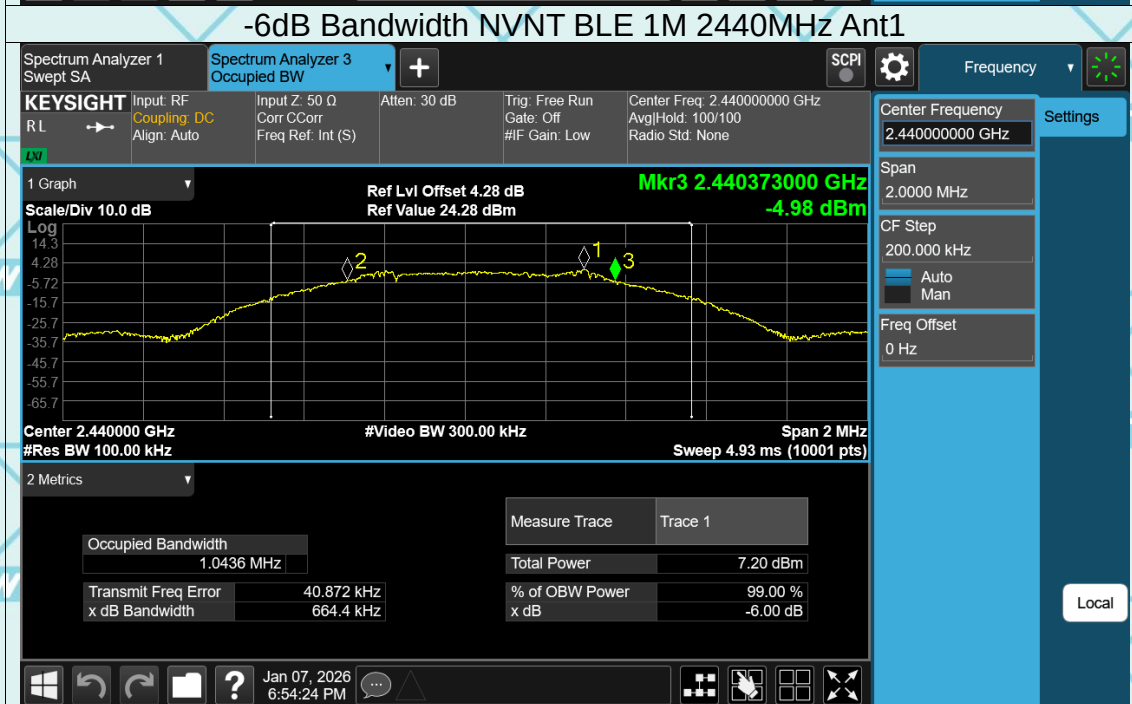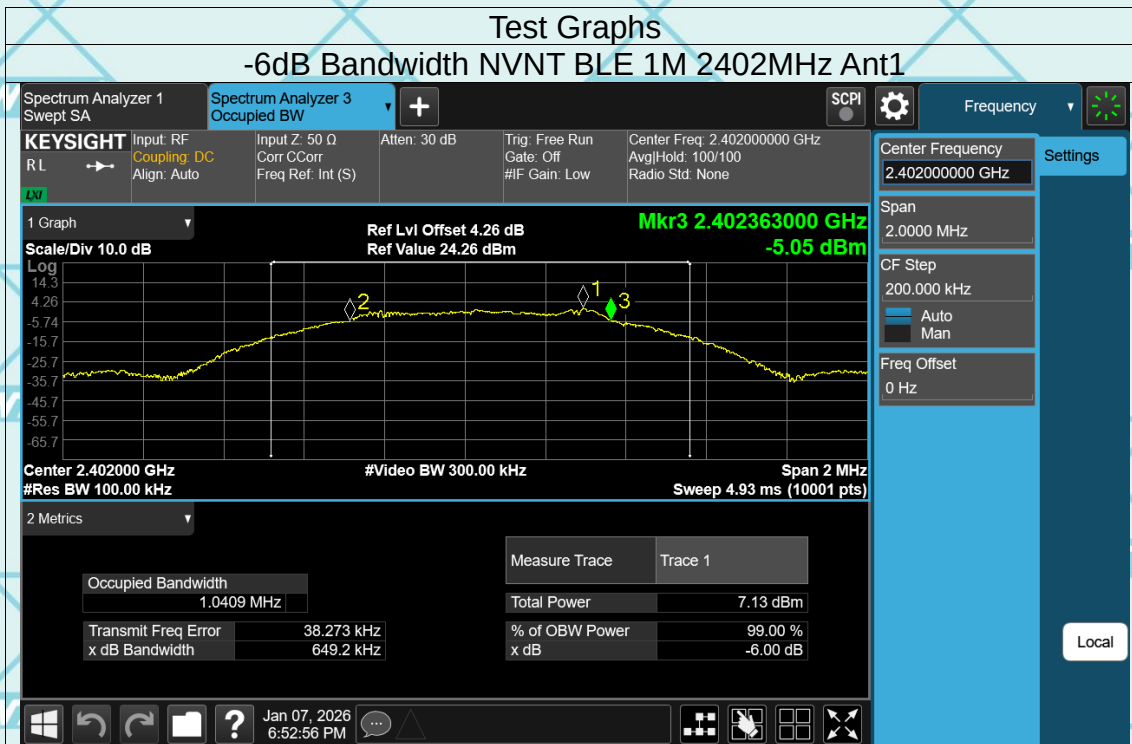

Report No.: WSCT-ANAB-R&E251200100A-LE Issued Date: 08 January 2026

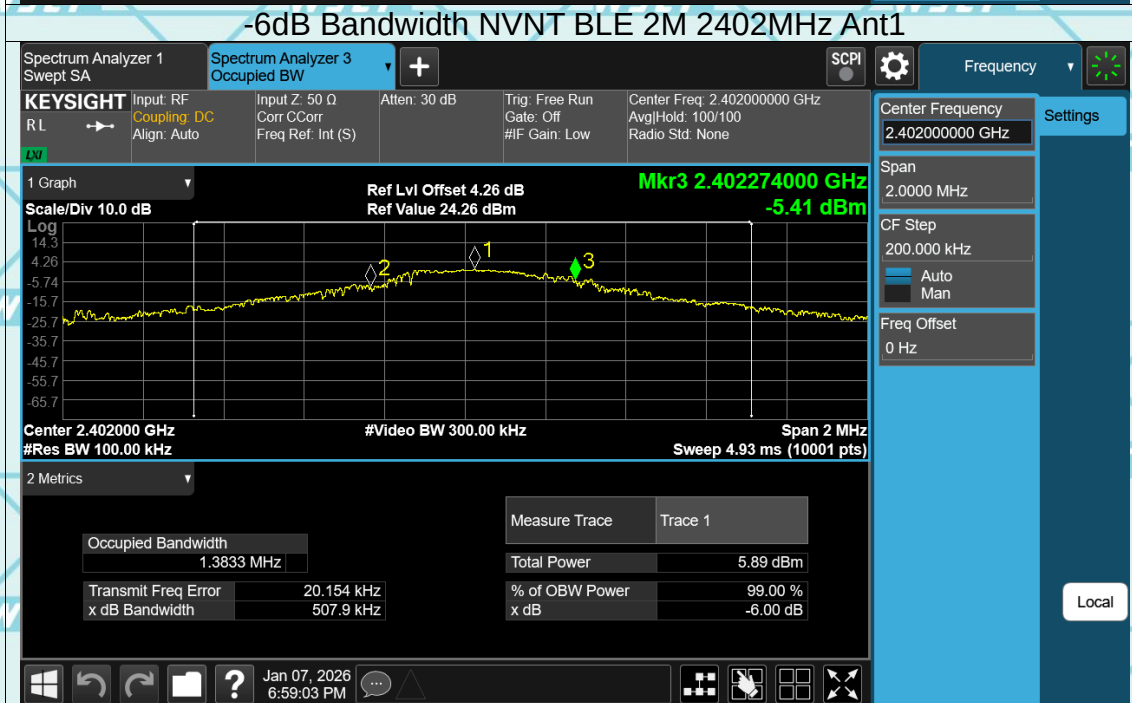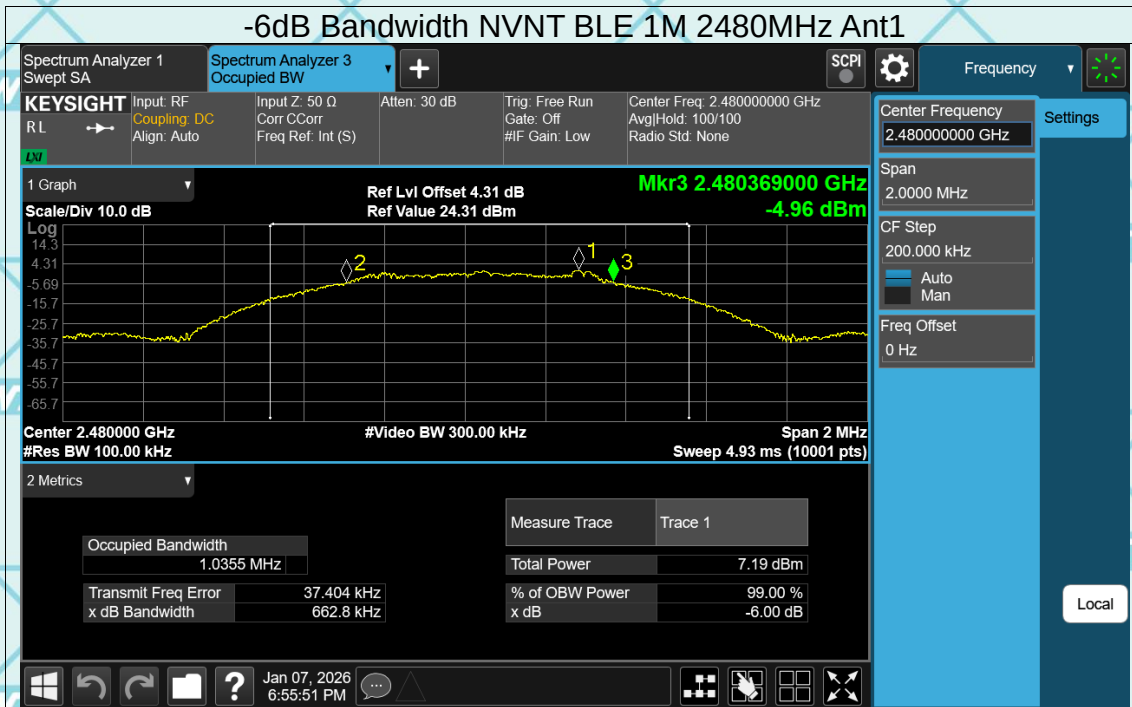


Report No.: WSCT-ANAB-R&E251200100A-LE Issued Date: 08 January 2026

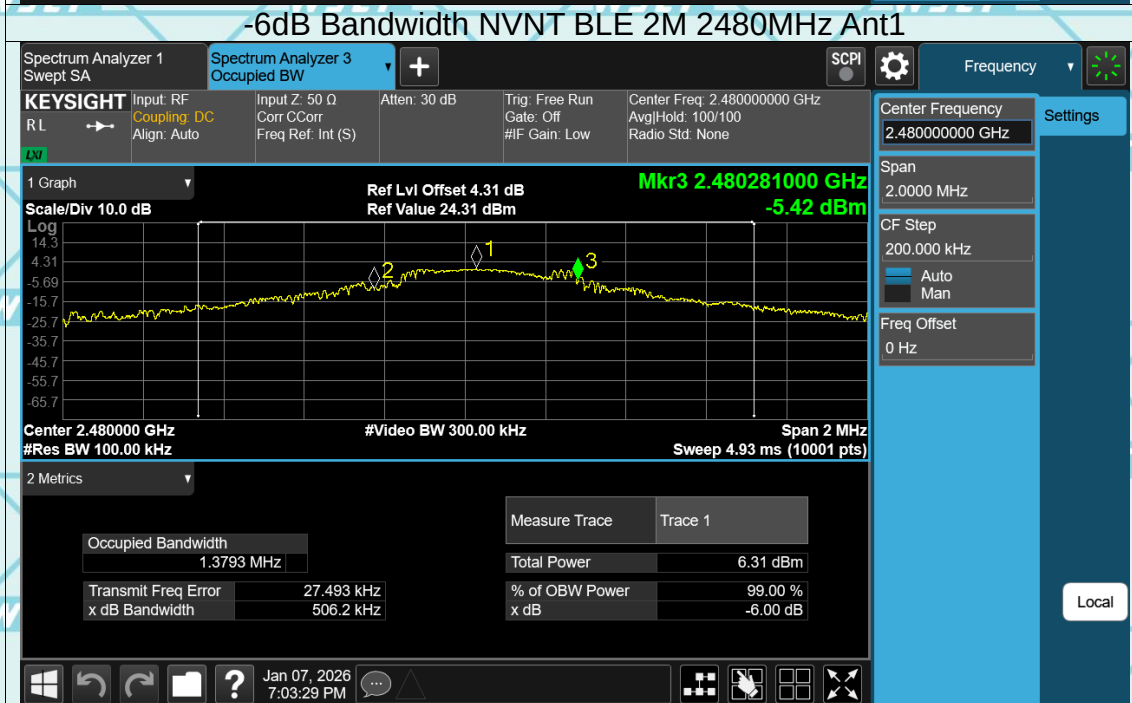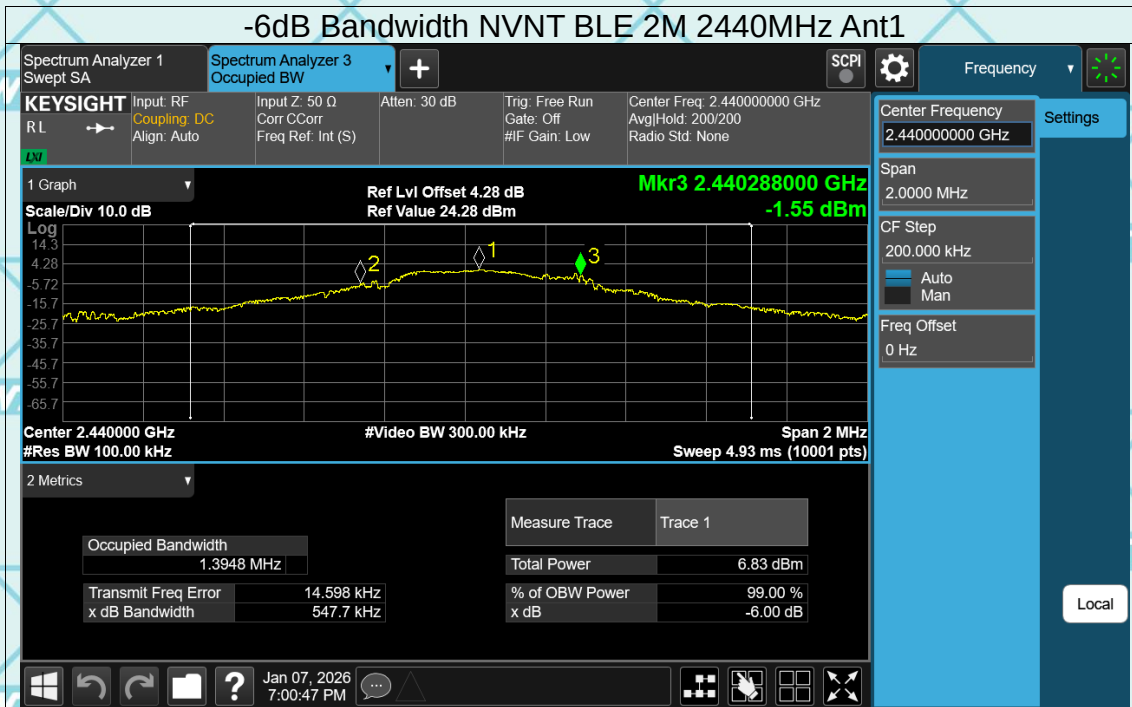

6.5. Power Spectral Density

6.5.1. Test Specification

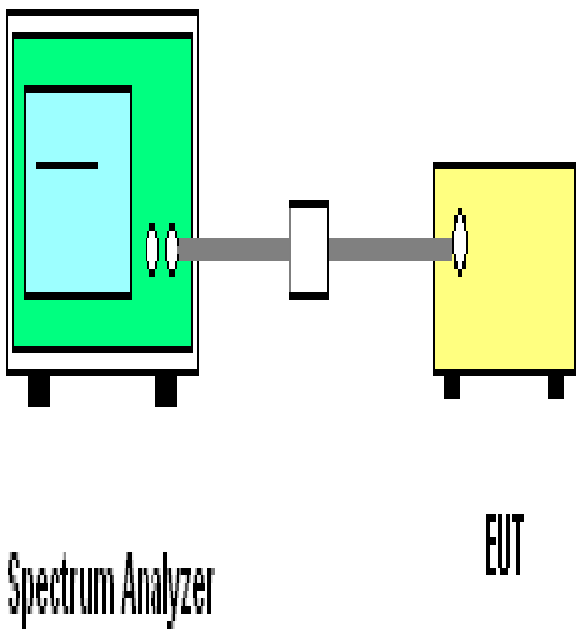Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074
Limit:	The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 The diagram illustrates the test setup. On the left is a green box labeled 'Spectrum Analyzer'. A grey line representing an RF cable connects the Spectrum Analyzer to a small white box labeled 'Attenuator'. Another grey line connects the Attenuator to a yellow box labeled 'EUT' (Equipment Under Test).
Test Mode:	Refer to item 4.1
Test Procedure:	1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. Video bandwidth $\text{VBW} \geq 3 \times \text{RBW}$. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW) 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

6.5.2. Test data


Test channel	Power Spectral Density (dBm/3kHz)		
	BLE 1M	Limit	Result
Lowest	-15.11	8 dBm/3kHz	PASS
Middle	-14.75	8 dBm/3kHz	
Highest	-14.9	8 dBm/3kHz	

Test channel	Power Spectral Density (dBm/3kHz)		
	BLE 2M	Limit	Result
Lowest	-10.79	8 dBm/3kHz	PASS
Middle	-10.27	8 dBm/3kHz	
Highest	-10.42	8 dBm/3kHz	


Test plots as follows:



Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

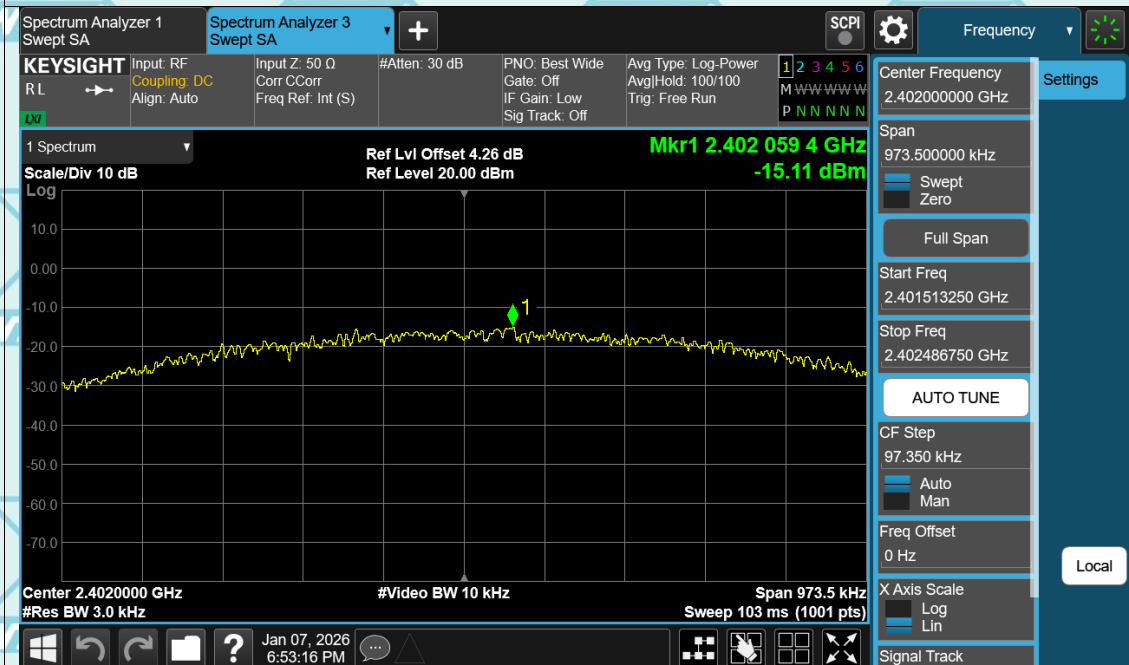


PSD NVNT BLE 1M 2440MHz Ant1

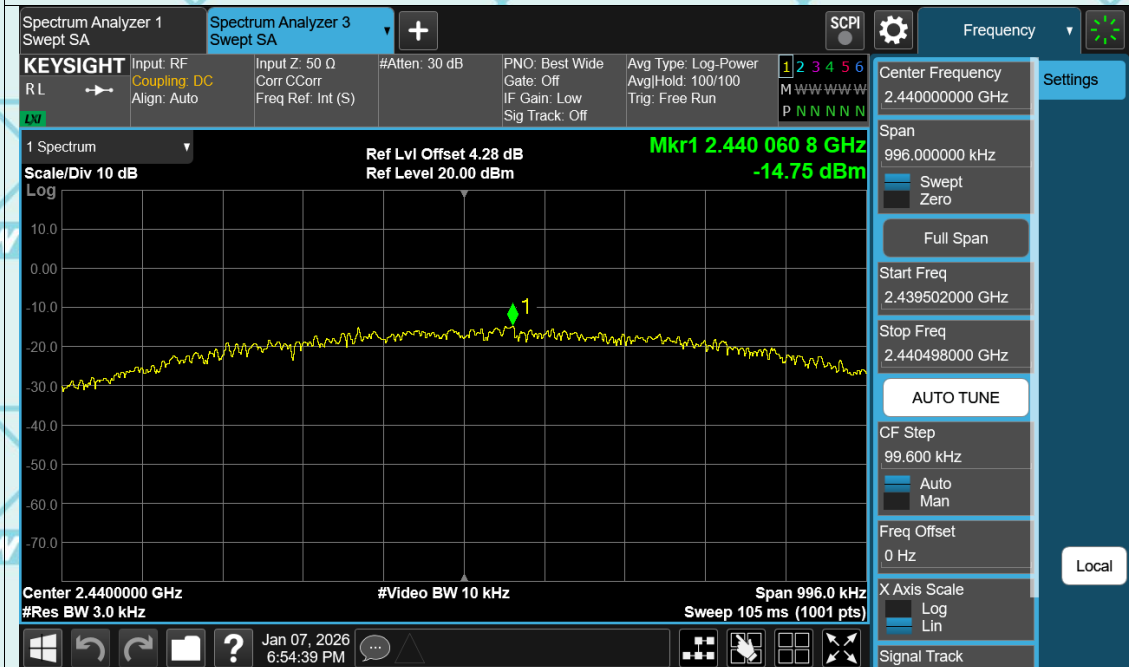


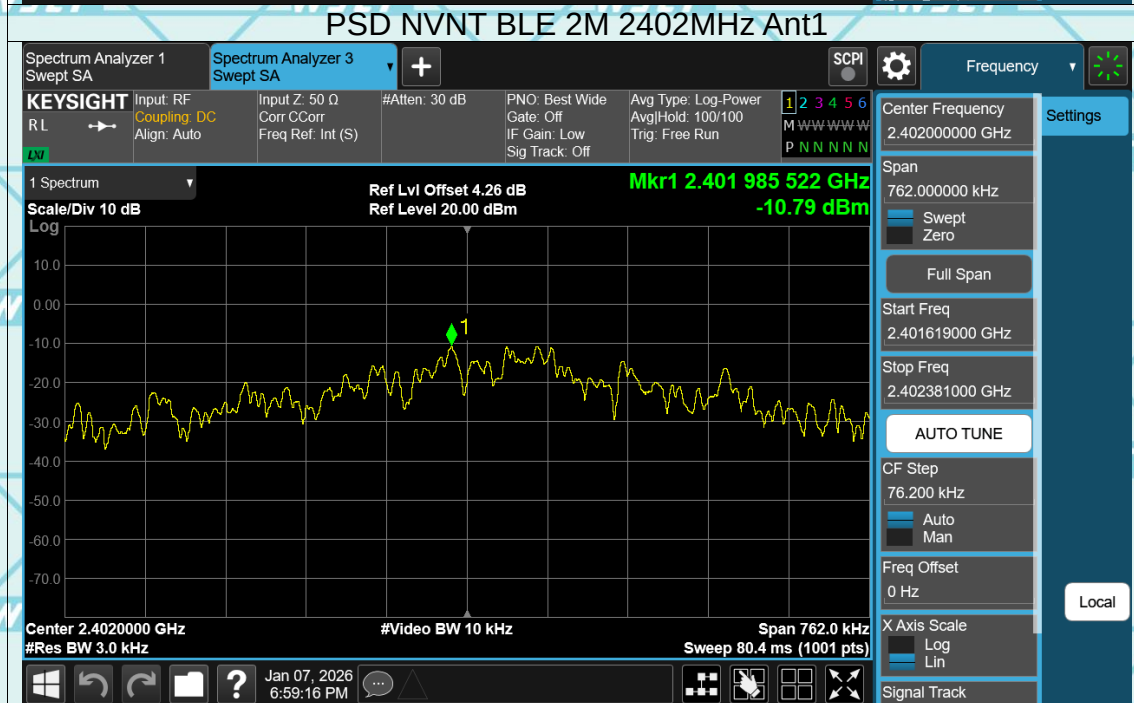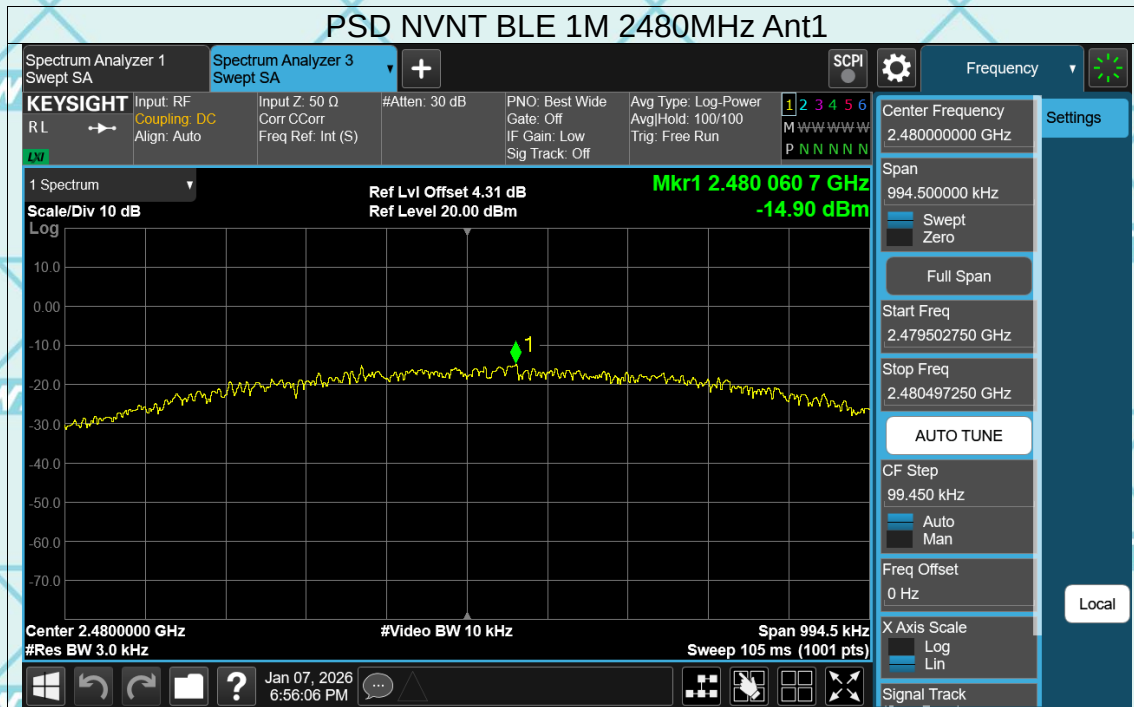

PSD NVNT BLE 2M 2440MHz Ant1

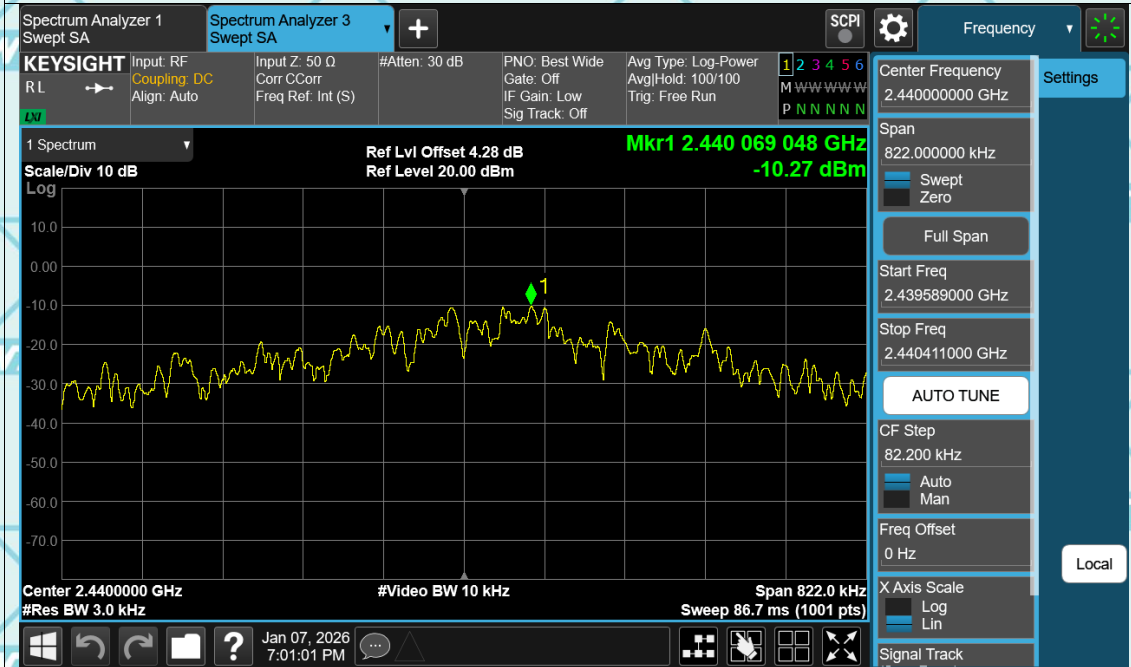


PSD NVNT BLE 2M 2480MHz Ant1

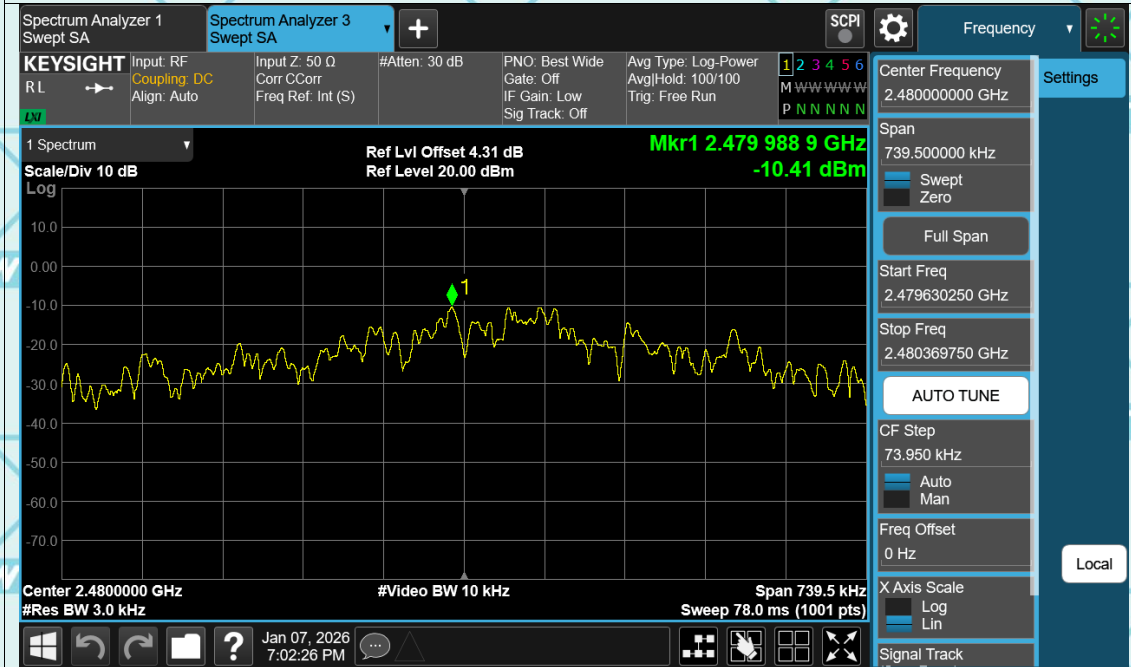

6.6. Conducted Band Edge and Spurious Emission Measurement

6.6.1. Test Specification

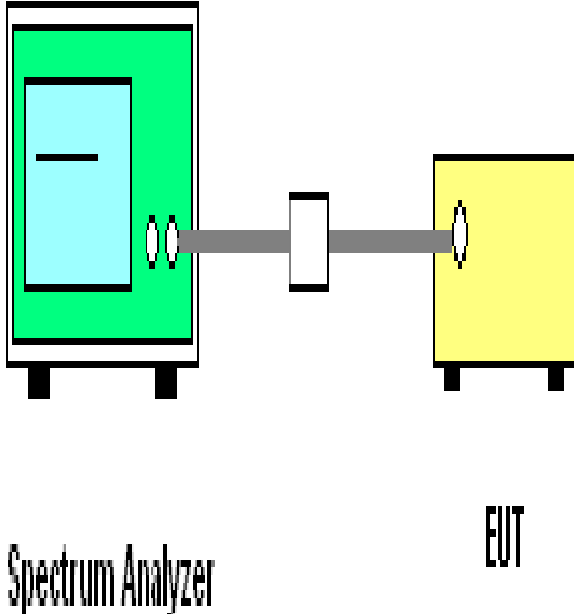Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 The diagram illustrates the test setup. On the left is a green box labeled 'Spectrum Analyzer'. On the right is a yellow box labeled 'EUT'. They are connected by a grey line representing an RF cable and attenuator. The connection points are marked with small circles.
Test Mode:	Refer to item 4.1
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over

Report No.: WSCT-ANAB-R&E251200100A-LE Issued Date: 08 January 2026



	a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 4. Measure and record the results in the test report. 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS







Report No.: WSCT-ANAB-R&E251200100A-LE Issued Date: 08 January 2026



Test Data

Band Edge

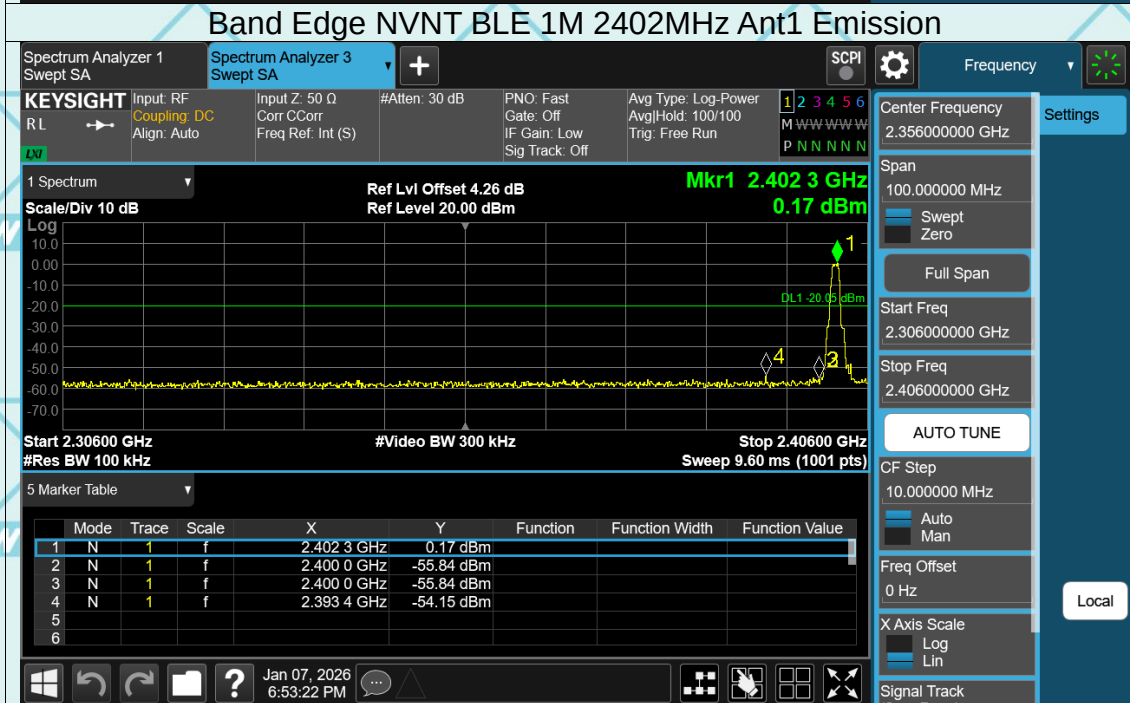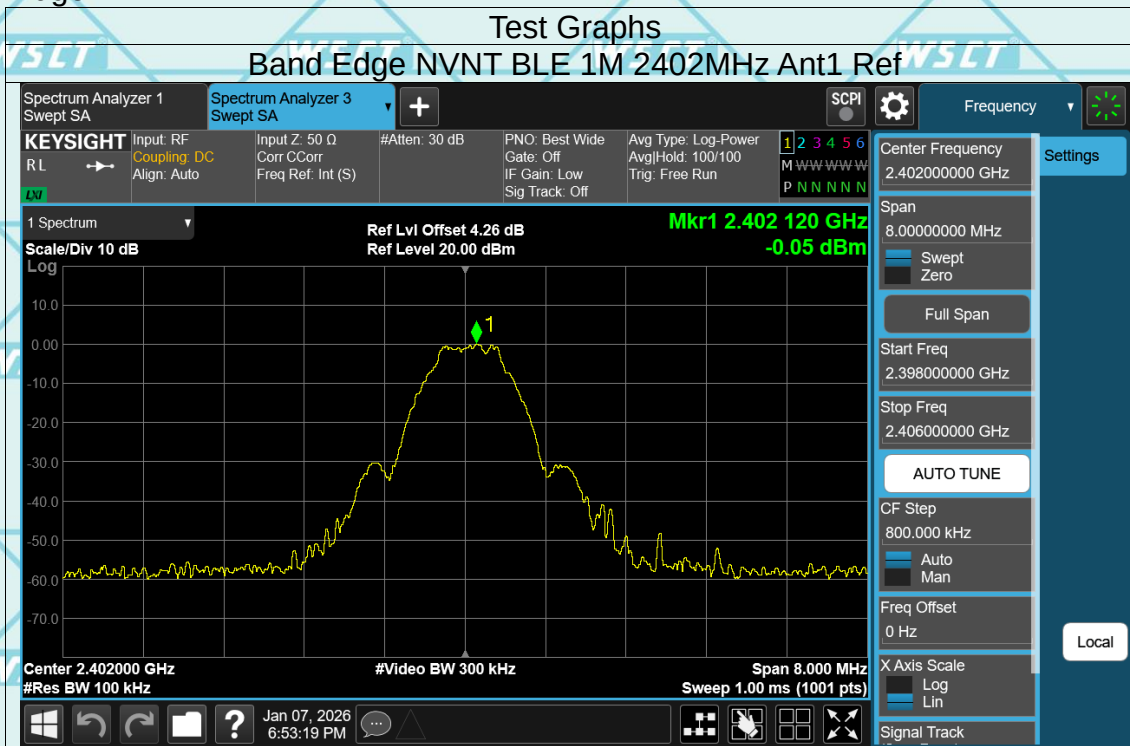

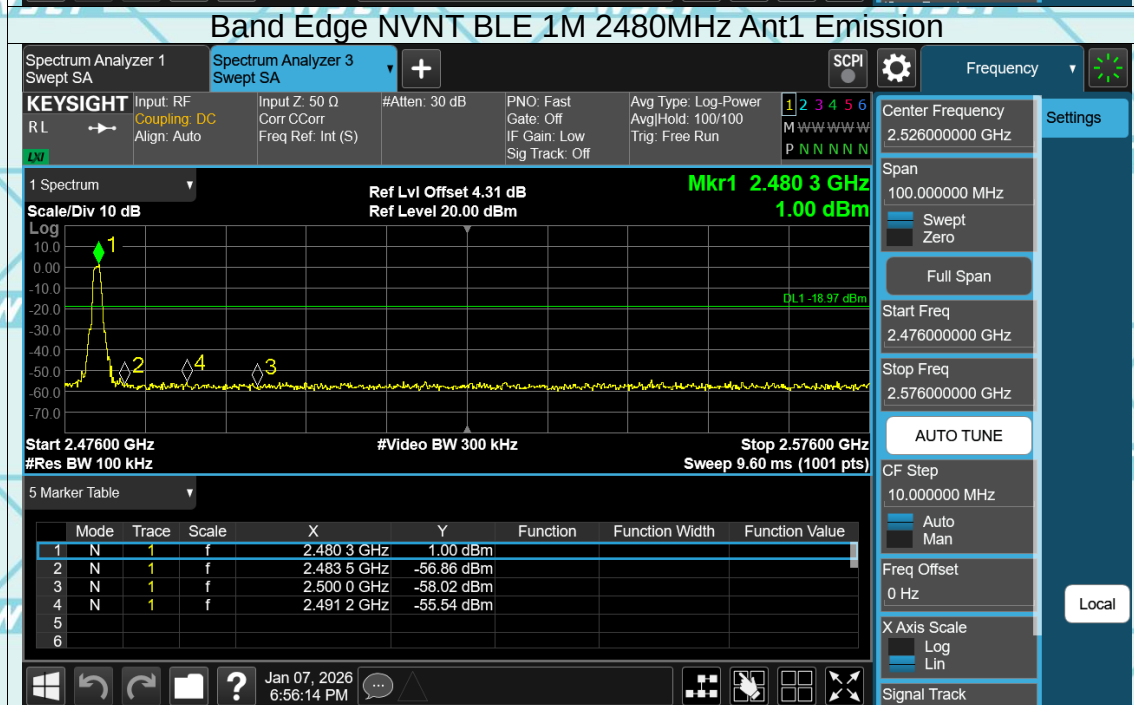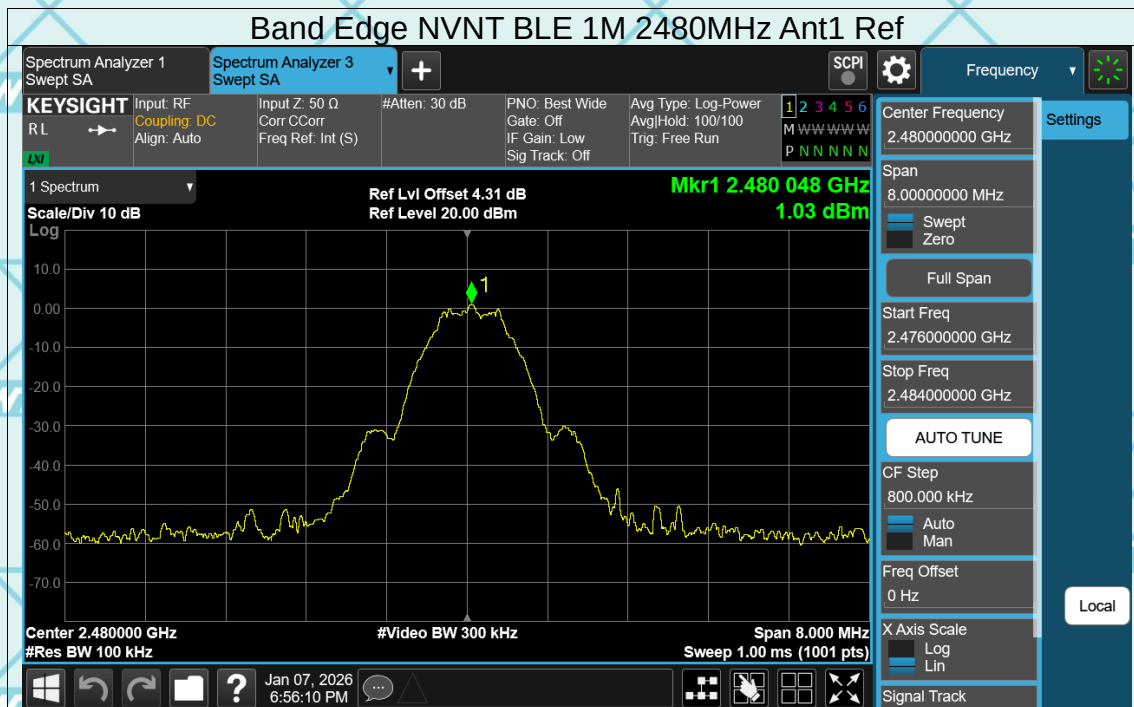

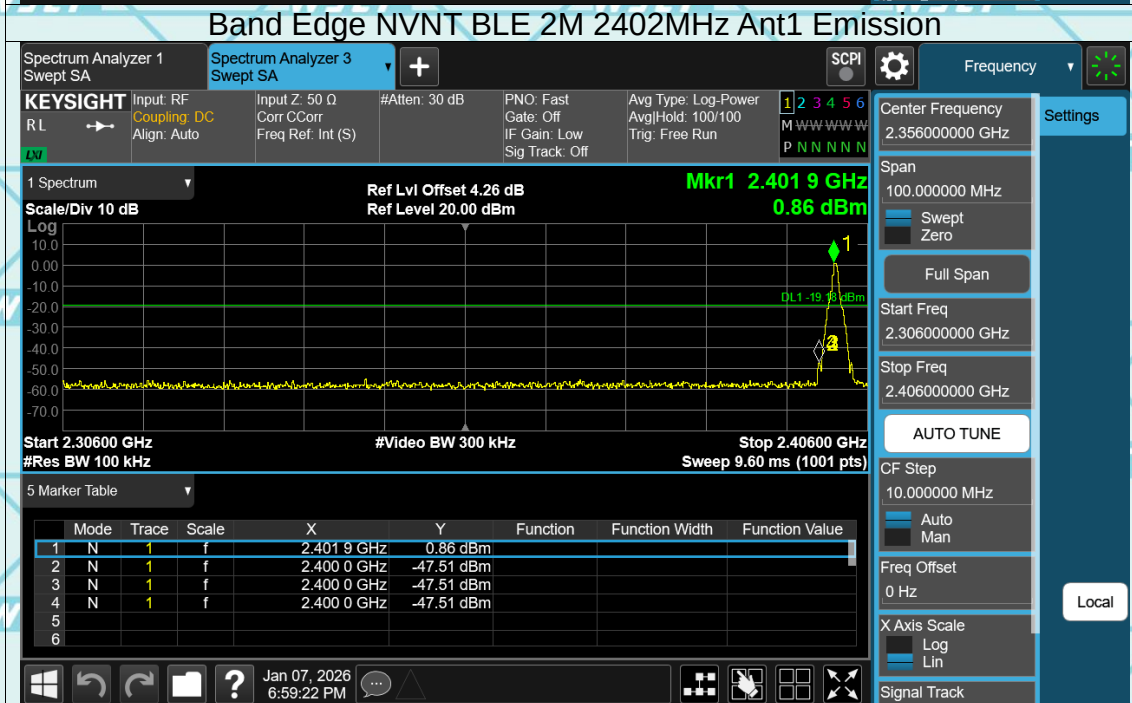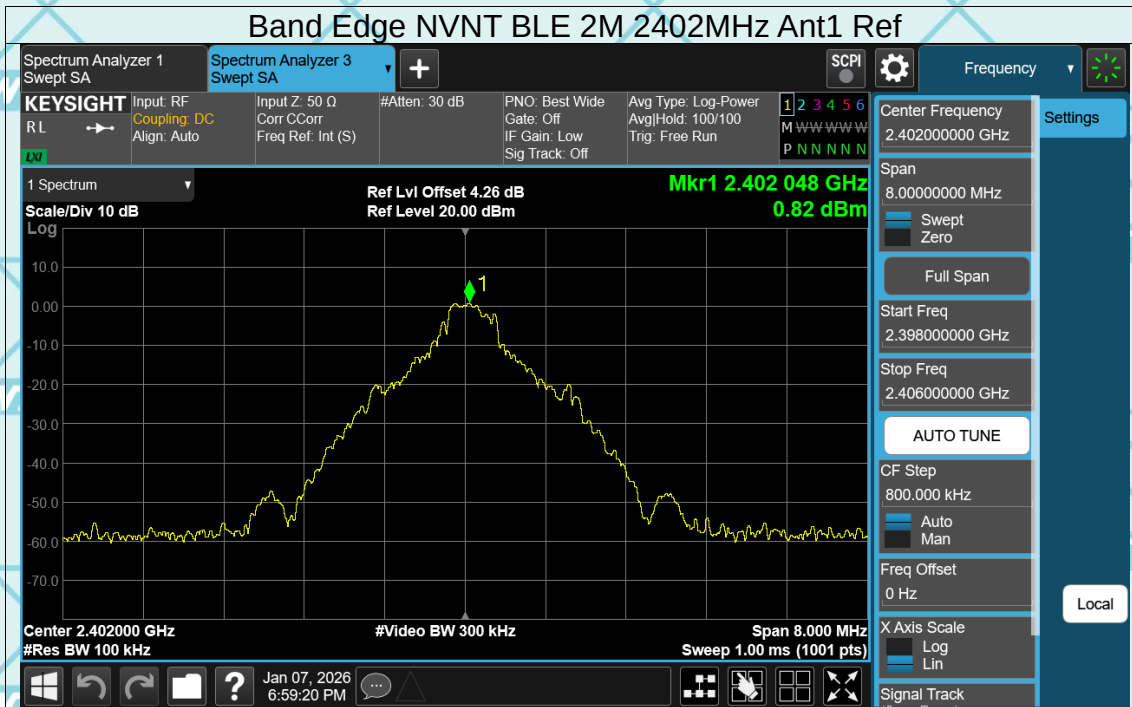

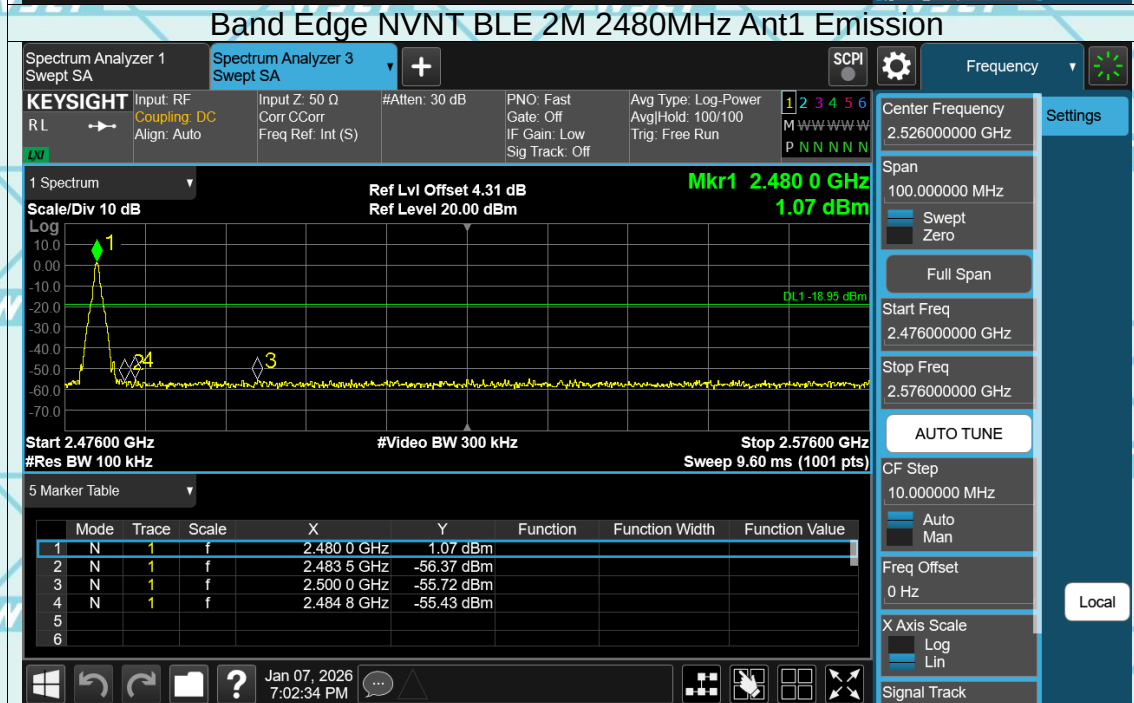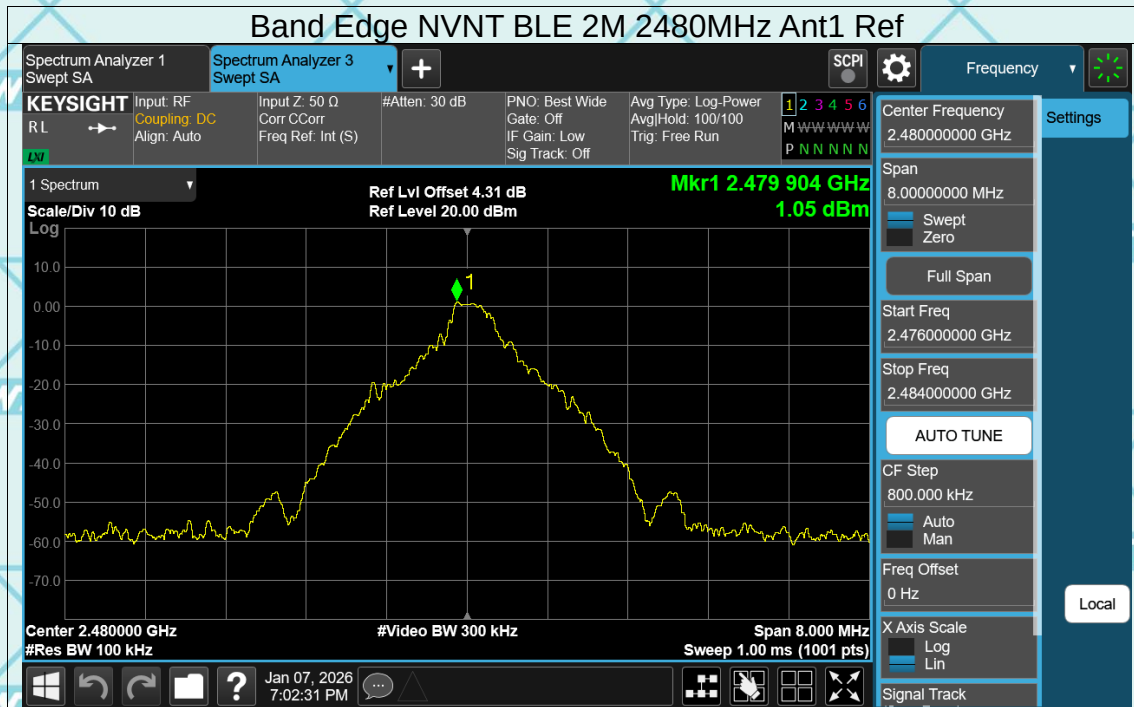

Report No.: WSCT-ANAB-R&E251200100A-LE Issued Date: 08 January 2026
Conducted RF Spurious Emission

