


Report No.: WSCT-ANAB-R&amp;E251200100A-BT Issued Date: 08 January 2026

Vertical:

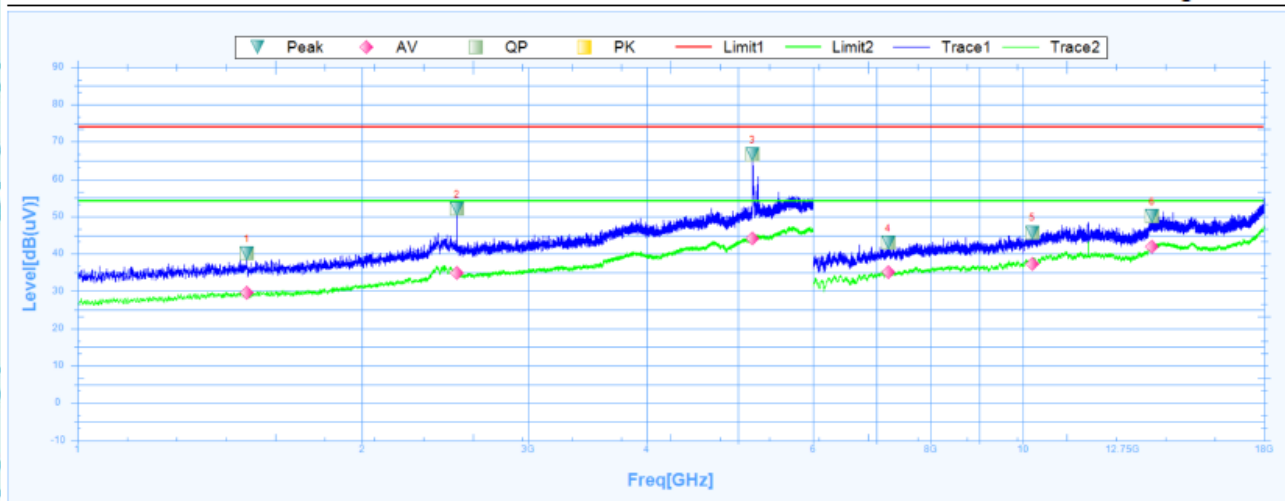


Suspected Data List

| NO. | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity | Trace | Verdict |
|-----|-------------|----------------|-------------|------------------|------------|-------------|---------|----------|-------|---------|
| 1   | 1511.2500   | 40.15          | 24.99       | 15.16            | 74         | -33.85      | 48.7    | Vertical | PK    | Pass    |
| 1   | 1511.2500   | 29.48          | 24.99       | 4.49             | 54         | -24.52      | 48.7    | Vertical | AV    | Pass    |
| 2   | 2521.2500   | 51.99          | 27.63       | 24.36            | 74         | -22.01      | 77.4    | Vertical | PK    | Pass    |
| 2   | 2521.2500   | 34.83          | 27.63       | 7.2              | 54         | -19.17      | 77.4    | Vertical | AV    | Pass    |
| 3   | 5178.7500   | 66.58          | 31.74       | 34.84            | 74         | -7.42       | 26      | Vertical | PK    | Pass    |
| 3   | 5178.7500   | 44.04          | 31.74       | 12.3             | 54         | -9.96       | 26      | Vertical | AV    | Pass    |
| 4   | 7201.5000   | 43.02          | 7           | 36.02            | 74         | -30.98      | 337.6   | Vertical | PK    | Pass    |
| 4   | 7201.5000   | 35.02          | 7           | 28.02            | 54         | -18.98      | 337.6   | Vertical | AV    | Pass    |
| 5   | 10239.0000  | 45.78          | 13.1        | 32.68            | 74         | -28.22      | 312.6   | Vertical | PK    | Pass    |
| 5   | 10239.0000  | 37.23          | 13.1        | 24.13            | 54         | -16.77      | 312.6   | Vertical | AV    | Pass    |
| 6   | 13701.0000  | 50.03          | 18.26       | 31.77            | 74         | -23.97      | 36.4    | Vertical | PK    | Pass    |
| 6   | 13701.0000  | 42             | 18.26       | 23.74            | 54         | -12         | 36.4    | Vertical | AV    | Pass    |

Report No.: WSCT-ANAB-R&amp;E251200100A-BT Issued Date: 08 January 2026

Middle channel: 2441MHz

Horizontal:

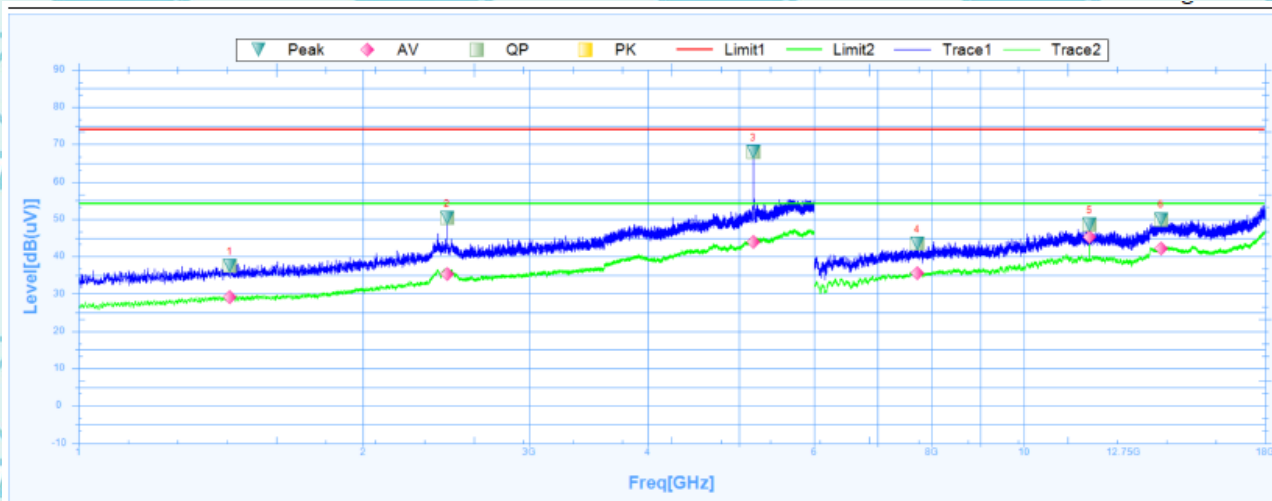


Suspected Data List

| NO. | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity   | Trace | Verdict |
|-----|-------------|----------------|-------------|------------------|------------|-------------|---------|------------|-------|---------|
| 1   | 1445.0000   | 37.41          | 25.06       | 12.35            | 74         | -36.59      | -0.1    | Horizontal | PK    | Pass    |
| 1   | 1445.0000   | 29.11          | 25.06       | 4.05             | 54         | -24.89      | -0.1    | Horizontal | AV    | Pass    |
| 2   | 2454.3750   | 50.27          | 27.44       | 22.83            | 74         | -23.73      | 131.1   | Horizontal | PK    | Pass    |
| 2   | 2454.3750   | 35.4           | 27.44       | 7.96             | 54         | -18.6       | 131.1   | Horizontal | AV    | Pass    |
| 3   | 5175.6250   | 67.91          | 31.74       | 36.17            | 74         | -6.09       | 2.4     | Horizontal | PK    | Pass    |
| 3   | 5175.6250   | 43.82          | 31.74       | 12.08            | 54         | -10.18      | 2.4     | Horizontal | AV    | Pass    |
| 4   | 7714.5000   | 43.5           | 7.96        | 35.54            | 74         | -30.5       | 170.2   | Horizontal | PK    | Pass    |
| 4   | 7714.5000   | 35.55          | 7.96        | 27.59            | 54         | -18.45      | 170.2   | Horizontal | AV    | Pass    |
| 5   | 11740.5000  | 48.45          | 16.11       | 32.34            | 74         | -25.55      | 44.7    | Horizontal | PK    | Pass    |
| 5   | 11740.5000  | 45.26          | 16.11       | 29.15            | 54         | -8.74       | 44.7    | Horizontal | AV    | Pass    |
| 6   | 13969.5000  | 49.98          | 19.03       | 30.95            | 74         | -24.02      | 0.5     | Horizontal | PK    | Pass    |
| 6   | 13969.5000  | 42.09          | 19.03       | 23.06            | 54         | -11.91      | 0.5     | Horizontal | AV    | Pass    |

Report No.: WSCT-ANAB-R&E251200100A-BT Issued Date: 08 January 2026

Vertical:

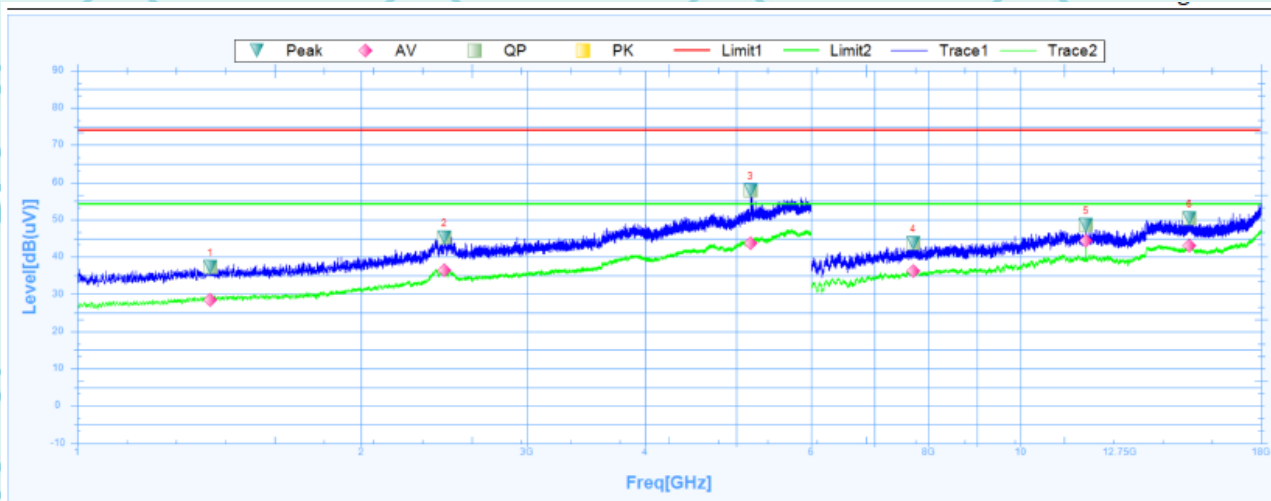


Suspected Data List

| NO. | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity | Trace | Verdict |
|-----|-------------|----------------|-------------|------------------|------------|-------------|---------|----------|-------|---------|
| 1   | 1383.7500   | 37.35          | 25.04       | 12.31            | 74         | -36.65      | 176.6   | Vertical | PK    | Pass    |
| 1   | 1383.7500   | 28.45          | 25.04       | 3.41             | 54         | -25.55      | 176.6   | Vertical | AV    | Pass    |
| 2   | 2451.2500   | 45.24          | 27.43       | 17.81            | 74         | -28.76      | 143.1   | Vertical | PK    | Pass    |
| 2   | 2451.2500   | 36.31          | 27.43       | 8.88             | 54         | -17.69      | 143.1   | Vertical | AV    | Pass    |
| 3   | 5177.5000   | 57.82          | 31.74       | 26.08            | 74         | -16.18      | 206.5   | Vertical | PK    | Pass    |
| 3   | 5177.5000   | 43.76          | 31.74       | 12.02            | 54         | -10.24      | 206.5   | Vertical | AV    | Pass    |
| 4   | 7699.5000   | 43.74          | 7.96        | 35.78            | 74         | -30.26      | 187     | Vertical | PK    | Pass    |
| 4   | 7699.5000   | 36.11          | 7.96        | 28.15            | 54         | -17.89      | 187     | Vertical | AV    | Pass    |
| 5   | 11742.0000  | 48.62          | 16.11       | 32.51            | 74         | -25.38      | 73.4    | Vertical | PK    | Pass    |
| 5   | 11742.0000  | 44.38          | 16.11       | 28.27            | 54         | -9.62       | 73.4    | Vertical | AV    | Pass    |
| 6   | 15118.5000  | 50.34          | 19.74       | 30.6             | 74         | -23.66      | 342.4   | Vertical | PK    | Pass    |
| 6   | 15118.5000  | 43.12          | 19.74       | 23.38            | 54         | -10.88      | 342.4   | Vertical | AV    | Pass    |

Report No.: WSCT-ANAB-R&amp;E251200100A-BT Issued Date: 08 January 2026

High channel: 2480MHz

Horizontal:

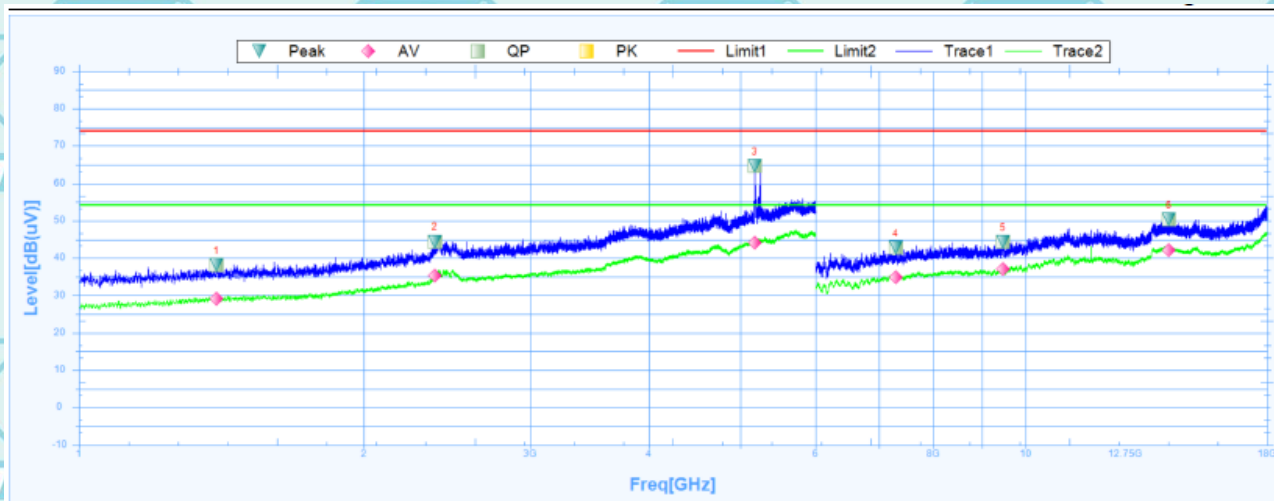

Suspected Data List

| NO. | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity   | Trace | Verdict |
|-----|-------------|----------------|-------------|------------------|------------|-------------|---------|------------|-------|---------|
| 1   | 1396.8750   | 38.23          | 25.09       | 13.14            | 74         | -35.77      | 207.8   | Horizontal | PK    | Pass    |
| 1   | 1396.8750   | 29.12          | 25.09       | 4.03             | 54         | -24.88      | 207.8   | Horizontal | AV    | Pass    |
| 2   | 2377.5000   | 44.45          | 27.18       | 17.27            | 74         | -29.55      | 41.6    | Horizontal | PK    | Pass    |
| 2   | 2377.5000   | 35.39          | 27.18       | 8.21             | 54         | -18.61      | 41.6    | Horizontal | AV    | Pass    |
| 3   | 5180.0000   | 64.7           | 31.74       | 32.96            | 74         | -9.3        | 13      | Horizontal | PK    | Pass    |
| 3   | 5180.0000   | 44.1           | 31.74       | 12.36            | 54         | -9.9        | 13      | Horizontal | AV    | Pass    |
| 4   | 7293.0000   | 42.8           | 6.88        | 35.92            | 74         | -31.2       | 184.6   | Horizontal | PK    | Pass    |
| 4   | 7293.0000   | 34.95          | 6.88        | 28.07            | 54         | -19.05      | 184.6   | Horizontal | AV    | Pass    |
| 5   | 9468.0000   | 44.26          | 11.07       | 33.19            | 74         | -29.74      | 1.4     | Horizontal | PK    | Pass    |
| 5   | 9468.0000   | 37.01          | 11.07       | 25.94            | 54         | -16.99      | 1.4     | Horizontal | AV    | Pass    |
| 6   | 14181.0000  | 50.27          | 18.94       | 31.33            | 74         | -23.73      | 68.6    | Horizontal | PK    | Pass    |
| 6   | 14181.0000  | 42.17          | 18.94       | 23.23            | 54         | -11.83      | 68.6    | Horizontal | AV    | Pass    |

Report No.: WSCT-ANAB-R&amp;E251200100A-BT Issued Date: 08 January 2026

Vertical:



Suspected Data List

| NO. | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity | Trace | Verdict |
|-----|-------------|----------------|-------------|------------------|------------|-------------|---------|----------|-------|---------|
| 1   | 1540.0000   | 38.49          | 24.96       | 13.53            | 74         | -35.51      | 0.2     | Vertical | PK    | Pass    |
| 1   | 1540.0000   | 29.56          | 24.96       | 4.6              | 54         | -24.44      | 0.2     | Vertical | AV    | Pass    |
| 2   | 2431.8750   | 47.58          | 27.37       | 20.21            | 74         | -26.42      | 355     | Vertical | PK    | Pass    |
| 2   | 2431.8750   | 35.4           | 27.37       | 8.03             | 54         | -18.6       | 355     | Vertical | AV    | Pass    |
| 3   | 5242.5000   | 67.25          | 31.79       | 35.46            | 74         | -6.75       | 359.6   | Vertical | PK    | Pass    |
| 3   | 5242.5000   | 46.23          | 31.79       | 14.44            | 54         | -7.77       | 359.6   | Vertical | AV    | Pass    |
| 4   | 6921.0000   | 43.52          | 6.1         | 37.42            | 74         | -30.48      | 360     | Vertical | PK    | Pass    |
| 4   | 6921.0000   | 34.58          | 6.1         | 28.48            | 54         | -19.42      | 360     | Vertical | AV    | Pass    |
| 5   | 10293.0000  | 45.47          | 13.27       | 32.2             | 74         | -28.53      | 360     | Vertical | PK    | Pass    |
| 5   | 10293.0000  | 38.42          | 13.27       | 25.15            | 54         | -15.58      | 360     | Vertical | AV    | Pass    |
| 6   | 14250.0000  | 50.55          | 18.88       | 31.67            | 74         | -23.45      | 71      | Vertical | PK    | Pass    |
| 6   | 14250.0000  | 42.5           | 18.88       | 23.62            | 54         | -11.5       | 71      | Vertical | AV    | Pass    |

**Note:**

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
3. Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
4. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (8DPSK) was submitted only.
5. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

### 6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result 8DPSK model was report as below

| Frequency    | Reading  | Correct Factor | Emission Level | Limit    | Margin | Polar | Detector |
|--------------|----------|----------------|----------------|----------|--------|-------|----------|
| (MHz)        | (dBuV/m) | dB/m           | (dBuV/m)       | (dBuV/m) | (dB)   | H/V   |          |
| Low Channel  |          |                |                |          |        |       |          |
| 2387         | 61.59    | -8.76          | 52.83          | 74       | 21.17  | H     | PK       |
| 2387         | 53.40    | -8.76          | 44.64          | 54       | 9.36   | H     | AV       |
| 2387         | 62.34    | -8.73          | 53.61          | 74       | 20.39  | V     | PK       |
| 2387         | 55.66    | -8.73          | 46.93          | 54       | 7.07   | V     | AV       |
| 2390         | 63.36    | -8.76          | 54.60          | 74       | 19.40  | H     | PK       |
| 2390         | 56.59    | -8.76          | 47.83          | 54       | 6.17   | H     | AV       |
| 2390         | 63.66    | -8.73          | 54.93          | 74       | 19.07  | V     | PK       |
| 2390         | 54.23    | -8.73          | 45.50          | 54       | 8.50   | V     | AV       |
| High Channel |          |                |                |          |        |       |          |
| 2483.5       | 61.29    | -8.17          | 53.12          | 74       | 20.88  | H     | PK       |
| 2483.5       | 54.52    | -8.17          | 46.35          | 54       | 7.65   | H     | AV       |
| 2483.5       | 60.33    | -8.17          | 52.16          | 74       | 21.84  | V     | PK       |
| 2483.5       | 53.06    | -8.17          | 44.89          | 54       | 9.11   | V     | AV       |

Note: Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E251200100A-BT Issued Date: 08 January 2026

## 7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

**\*\*\*\*\*END OF REPORT\*\*\*\*\***